

# Verification and Validation of Selected Fire Models for Nuclear Power Plant Applications

## Volume 1: Main Report

January 2006

U.S. Nuclear Regulatory Commission  
Office of Nuclear Regulatory Research  
Washington, DC 20555-0001

Electric Power Research Institute  
3412 Hillview Avenue  
Palo Alto, CA 94303



## AVAILABILITY OF REFERENCE MATERIALS IN NRC PUBLICATIONS

### NRC Reference Material

As of November 1999, you may electronically access NUREG-series publications and other NRC records at NRC's Public Electronic Reading Room at <http://www.nrc.gov/reading-rm.html>. Publicly released records include, to name a few, NUREG-series publications; *Federal Register* notices; applicant, licensee, and vendor documents and correspondence; NRC correspondence and internal memoranda; bulletins and information notices; inspection and investigative reports; licensee event reports; and Commission papers and their attachments.

NRC publications in the NUREG series, NRC regulations, and *Title 10, Energy, in the Code of Federal Regulations* may also be purchased from one of these two sources.

1. The Superintendent of Documents  
U.S. Government Printing Office  
Mail Stop SSOP  
Washington, DC 20402-0001  
Internet: [bookstore.gpo.gov](http://bookstore.gpo.gov)  
Telephone: 202-512-1800  
Fax: 202-512-2250
2. The National Technical Information Service  
Springfield, VA 22161-0002  
[www.ntis.gov](http://www.ntis.gov)  
1-800-553-6847 or, locally, 703-605-6000

A single copy of each NRC draft report for comment is available free, to the extent of supply, upon written request as follows:

Address: Office of the Chief Information Officer,  
Reproduction and Distribution  
Services Section  
U.S. Nuclear Regulatory Commission  
Washington, DC 20555-0001  
E-mail: [DISTRIBUTION@nrc.gov](mailto:DISTRIBUTION@nrc.gov)  
Facsimile: 301-415-2289

Some publications in the NUREG series that are posted at NRC's Web site address <http://www.nrc.gov/reading-rm/doc-collections/nuregs> are updated periodically and may differ from the last printed version. Although references to material found on a Web site bear the date the material was accessed, the material available on the date cited may subsequently be removed from the site.

### Non-NRC Reference Material

Documents available from public and special technical libraries include all open literature items, such as books, journal articles, and transactions, *Federal Register* notices, Federal and State legislation, and congressional reports. Such documents as theses, dissertations, foreign reports and translations, and non-NRC conference proceedings may be purchased from their sponsoring organization.

Copies of industry codes and standards used in a substantive manner in the NRC regulatory process are maintained at—

The NRC Technical Library  
Two White Flint North  
11545 Rockville Pike  
Rockville, MD 20852-2738

These standards are available in the library for reference use by the public. Codes and standards are usually copyrighted and may be purchased from the originating organization or, if they are American National Standards, from—

American National Standards Institute  
11 West 42<sup>nd</sup> Street  
New York, NY 10036-8002  
[www.ansi.org](http://www.ansi.org)  
212-642-4900

Legally binding regulatory requirements are stated only in laws; NRC regulations; licenses, including technical specifications; or orders, not in NUREG-series publications. The views expressed in contractor-prepared publications in this series are not necessarily those of the NRC.

The NUREG series comprises (1) technical and administrative reports and books prepared by the staff (NUREG-XXXX) or agency contractors (NUREG/CR-XXXX), (2) proceedings of conferences (NUREG/CP-XXXX), (3) reports resulting from international agreements (NUREG/IA-XXXX), (4) brochures (NUREG/BR-XXXX), and (5) compilations of legal decisions and orders of the Commission and Atomic and Safety Licensing Boards and of Directors' decisions under Section 2.206 of NRC's regulations (NUREG-0750).

# **Verification & Validation of Selected Fire Models for Nuclear Power Plant Applications**

**Volume 1: Main Report**

**NUREG-1824**

**EPRI 1011999**

**January 2006**

**U.S. Nuclear Regulatory Commission  
Office of Nuclear Regulatory Research (RES)  
Division of Risk Analysis and Applications  
Two White Flint North, 11545 Rockville Pike  
Rockville, MD 20852-2738**

**U.S. NRC-RES Project Manager  
M. H. Salley**

**Electric Power Research Institute (EPRI)  
3412 Hillview Avenue  
Palo Alto, CA 94303**

**EPRI Project Manager  
R. P. Kassawara**

## **DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITIES**

THIS DOCUMENT WAS PREPARED BY THE ORGANIZATION(S) NAMED BELOW AS AN ACCOUNT OF WORK SPONSORED OR COSPONSORED BY THE ELECTRIC POWER RESEARCH INSTITUTE, INC. (EPRI). NEITHER EPRI NOR ANY MEMBER OF EPRI, ANY COSPONSOR, THE ORGANIZATION(S) BELOW, OR ANY PERSON ACTING ON BEHALF OF ANY OF THEM:

(A) MAKES ANY WARRANTY OR REPRESENTATION WHATSOEVER, EXPRESS OR IMPLIED, (I) WITH RESPECT TO THE USE OF ANY INFORMATION, APPARATUS, METHOD, PROCESS, OR SIMILAR ITEM DISCLOSED IN THIS DOCUMENT, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, OR (II) THAT SUCH USE DOES NOT INFRINGE ON OR INTERFERE WITH PRIVATELY OWNED RIGHTS, INCLUDING ANY PARTY'S INTELLECTUAL PROPERTY, OR (III) THAT THIS DOCUMENT IS SUITABLE TO ANY PARTICULAR USER'S CIRCUMSTANCE; OR

(B) ASSUMES RESPONSIBILITY FOR ANY DAMAGES OR OTHER LIABILITY WHATSOEVER (INCLUDING ANY CONSEQUENTIAL DAMAGES, EVEN IF EPRI OR ANY EPRI REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES) RESULTING FROM YOUR SELECTION OR USE OF THIS DOCUMENT OR ANY INFORMATION, APPARATUS, METHOD, PROCESS, OR SIMILAR ITEM DISCLOSED IN THIS DOCUMENT.

ORGANIZATION(S) THAT PREPARED THIS DOCUMENT:

**U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research  
Science Applications International Corporation  
National Institute of Standards and Technology**

## **ORDERING INFORMATION**

Requests for copies of this report should be directed to EPRI Orders and Conferences, 1355 Willow Way, Suite 278, Concord, CA 94520, (800) 313-3774, press 2 or internally x5379, (925) 609-9169, (925) 609-1310 (fax).

Electric Power Research Institute and EPRI are registered service marks of the Electric Power Research Institute, Inc. EPRI. ELECTRIFY THE WORLD is a service mark of the Electric Power Research Institute, Inc.

## COMMENTS ON DRAFT NUREG-1824 REPORT

This report is being published jointly by the U.S. Nuclear Regulatory Commission (NRC) and the Electric Power Research Institute (EPRI). Any interested party may submit comments on this report for consideration by the NRC and EPRI staffs. Comments may be accompanied by additional relevant information or supporting data. Please specify both the report number (Draft NUREG-1824) and the volume number in your comments, and send them by March 31, 2006, to the following address:

Chief Rules Review and Directives Branch  
U.S. Nuclear Regulatory Commission  
Mail Stop T-6D59  
Washington, DC 20555-0001

For any questions about the material in this report, please contact:

Mark Henry Salley  
Mail Stop T-10E50  
U.S. Nuclear Regulatory Commission  
Washington, DC 20555-0001  
Phone: (301) 415-2840  
Email: [MXS3@nrc.gov](mailto:MXS3@nrc.gov)

If EPRI members also wish to provide comments to EPRI, they may send them to the following address:

R.P. Kassawara  
Electric Power Research Institute  
3412 Hillview Avenue  
Palo Alto, CA 94304  
Phone: (650) 855-2775  
Email: [RKASSAWA@epri.com](mailto:RKASSAWA@epri.com)



# CITATIONS

---

This report was prepared by

U.S. Nuclear Regulatory Commission,  
Office of Nuclear Regulatory Research (RES)  
Two White Flint North, 11545 Rockville Pike  
Rockville, MD 20852-2738

Principal Investigators:

K. Hill

J. Dreisbach

Electric Power Research Institute (EPRI)  
3412 Hillview Avenue  
Palo Alto, CA 94303

Science Applications International Corp (SAIC)  
4920 El Camino Real  
Los Altos, CA 94022

Principal Investigators:

F. Joglar

B. Najafi

National Institute of Standards and Technology  
Building Fire Research Laboratory (BFRL)  
100 Bureau Drive, Stop 8600  
Gaithersburg, MD 20899-8600

Principal Investigators:

K McGrattan

R. Peacock

A. Hamins

Volume 1, Main Report: B. Najafi, M.H. Salley, F. Joglar, J. Dreisbach

Volume 2, FDT<sup>S</sup>: K. Hill, J. Dreisbach

Volume 3, FIVE-REV. 1: F. Joglar

Volume 4, CFAST: R. Peacock, J. Dreisbach, P. Reneke (NIST)

Volume 5, MAGIC: F. Joglar, B. Guatier (EdF), L. Gay (EdF), J. Texeraud (EdF)

Volume 6, FDS: K. McGrattan, J. Dreisbach

Volume 7, Experimental Uncertainty: A. Hamins, K. McGrattan

This report describes research sponsored jointly by U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research (RES) and Electric Power Research Institute (EPRI).

The report is a corporate document that should be cited in the literature in the following manner:

*Verification and Validation of Selected Fire Models for Nuclear Power Plant Applications, Volume 1: Main Report*, U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research (RES), Rockville, MD: 2005 and Electric Power Research Institute (EPRI), Palo Alto, CA. NUREG-1824 and EPRI 1011999.





# ABSTRACT

---

There is a movement to introduce risk- and performance-based analyses into fire protection engineering practice, both domestically and worldwide. This movement exists in the general fire protection community, as well as the nuclear power plant (NPP) fire protection community.

In 2002, the National Fire Protection Association (NFPA) developed NFPA 805, *Performance-Based Standard for Fire Protection for Light-Water Reactor Electric Generating Plants, 2001 Edition*. In July 2004, the U.S. Nuclear Regulatory Commission (NRC) amended its fire protection requirements in Title 10, Section 50.48, of the *Code of Federal Regulations* (10 CFR 50.48) to permit existing reactor licensees to voluntarily adopt fire protection requirements contained in NFPA 805 as an alternative to the existing deterministic fire protection requirements. In addition, the nuclear fire protection community wants to use risk-informed, performance-based (RI/PB) approaches and insights to support fire protection decision-making in general.

One key tool needed to support RI/PB fire protection is the availability of verified and validated fire models that can reliably predict the consequences of fires. Section 2.4.1.2 of NFPA 805 requires that only fire models acceptable to the Authority Having Jurisdiction (AHJ) shall be used in fire modeling calculations. Further, Sections 2.4.1.2.2 and 2.4.1.2.3 of NFPA 805 state that fire models shall only be applied within the limitations of the given model, and shall be verified and validated.

This report is the first effort to document the verification and validation (V&V) of five fire models that are commonly used in NPP applications. The project was performed in accordance with the guidelines that the American Society for Testing and Materials (ASTM) set forth in *Standard E1355-04, "Evaluating the Predictive Capability of Deterministic Fire Models."* The results of this V&V are reported in the form of ranges of accuracies for the fire model predictions.



# CONTENTS

---

<b>1 INTRODUCTION .....</b>	<b>1-1</b>
1.1 Background .....	1-1
1.2 Programmatic Overview .....	1-1
1.2.1 Objectives .....	1-2
1.2.2 Approach .....	1-3
1.3 Report Structure .....	1-4
<b>2 TECHNICAL APPROACH .....</b>	<b>2-1</b>
2.1 Library of Nuclear Power Plant Fire Scenarios .....	2-4
2.1.1 Switchgear Room.....	2-4
2.1.2 Cable Spreading Room.....	2-5
2.1.3 Main Control Room.....	2-5
2.1.4 Pump Room.....	2-6
2.1.5 Turbine Building.....	2-6
2.1.6 Multi-Compartment Corridor.....	2-6
2.1.7 Multi-Level Building.....	2-7
2.1.8 Containment Building (PWR) .....	2-7
2.1.9 Battery Room.....	2-8
2.1.10 Diesel Generator Room .....	2-8
2.1.11 Computer Room .....	2-8
2.1.12 Outdoors.....	2-8
2.2 Fire Models .....	2-8
2.2.1 Libraries of Engineering Calculations: FDT <sup>s</sup> and FIVE-Rev1 .....	2-9
2.2.2 Two-Zone Fire Models: CFAST and MAGIC .....	2-9
2.2.3 Field Fire Model: FDS .....	2-10
2.3 Experimental Data .....	2-10
2.3.1 Factory Mutual & Sandia National Laboratories (FM/SNL) Test Series .....	2-10
2.3.2 The National Bureau of Standards (NBS) Test Series.....	2-11

2.3.3	The International Collaborative Fire Model Project (ICFMP) Benchmark Exercise Test Series .....	2-12
2.4	Selection of Fire Scenario Attributes.....	2-13
2.5	Quantitative Validation.....	2-17
2.6	Reporting and Applicability of the Validation Results .....	2-20
2.6.1	Applicability of the V&V Results .....	2-20
2.6.2	Characterization of Fire Model Predictions Based on Validation Results.....	2-24
<b>3</b>	<b>RESULTS AND CONCLUSIONS .....</b>	<b>3-1</b>
3.1	Results .....	3-1
3.1.1	Validation.....	3-1
3.1.2	Verification.....	3-4
3.2	Summary.....	3-4
3.3	Conclusions.....	3-5
<b>4</b>	<b>REFERENCES .....</b>	<b>4-1</b>

# FIGURES

---

Figure 2-1: Overview of the Approach for V&V Study of Selected Fire Models for Nuclear Power Plant Application .....	2-3
Figure 2-2: Typical Switchgear Room Fire Scenario .....	2-4
Figure 2-3: Typical Cable Spreading Room Fire Scenario.....	2-5
Figure 2-4: Typical Main Control Room Fire Scenario.....	2-5
Figure 2-5: Typical Pump Room Fire Scenario.....	2-6
Figure 2-6: Typical Turbine Building Fire Scenario.....	2-6
Figure 2-7: Typical Multi-Compartment Corridor Fire Scenario.....	2-7
Figure 2-8: Typical Multi-Level Building Fire Scenario.....	2-7



# TABLES

---

Table 2-1: FDT <sup>s</sup> and FIVE-Rev1 Models for the Fire Scenario Attributes Selected for this V&V Study .....	2-9
Table 2-2: Fire Modeling Attributes as Outputs .....	2-16
Table 2-3: Summary of the Fire Tests Used for Validation against Typical NPP Fire Scenario Attributes.....	2-18
Table 2-4: List of selected normalized parameters for application of the validation results to NPP fire scenarios .....	2-21
Table 2-5: Summary of the fire experiments in terms of commonly used metrics .....	2-24





# REPORT SUMMARY

---

This report documents the verification and validation (V&V) of five selected fire models commonly used in support of risk-informed and performance-based (RI/PB) fire protection at nuclear power plants (NPPs).

## Background

Over the past decade, there has been a considerable movement in the nuclear power industry to transition from prescriptive rules and practices towards the use of risk information to supplement decision-making. In the area of fire protection, this movement is evidenced by numerous initiatives by the U.S. Nuclear Regulatory Commission (NRC) and the nuclear community worldwide. In 2001, the National Fire Protection Association (NFPA) completed the development of NFPA Standard 805, "Performance-Based Standard for Fire Protection for Light Water Reactor Electric Generating Plants 2001 Edition." Effective July, 16, 2004, the NRC amended its fire protection requirements in 10 CFR 50.48(c) to permit existing reactor licensees to voluntarily adopt fire protection requirements contained in NFPA 805 as an alternative to the existing deterministic fire protection requirements. RI/PB fire protection relies on fire modeling for determining the consequence of fires. NFPA 805 requires that the "fire models shall be verified and validated," and "only fire models that are acceptable to the Authority Having Jurisdiction (AHJ) shall be used in fire modeling calculations."

## Objectives

The objective of this project is to examine the predictive capabilities of selected fire models. These models may be used to demonstrate compliance with the requirements of 10 CFR 50.48(c) and the referenced NFPA 805, or support other performance-based evaluations in NPP fire protection applications. In addition to NFPA 805 requiring that only verified and validated fire models acceptable to the AHJ be used, the standard also requires that fire models only be applied within their limitations. The V&V of specific models is important in establishing acceptable uses and limitations of fire models. Specific objectives of this project are:

- Perform V&V study of selected fire models using a consistent methodology (ASTM E1355) and issue a report to be prepared by U.S. Nuclear Regulatory Commission Office of Nuclear Regulatory Research (RES) and Electric Power Research Institute (EPRI).
- Investigate the specific fire modeling issues of interest to the NPP fire protection applications.
- Quantify fire model predictive capabilities to the extent that can be supported by comparison with selected and available experimental data.

The following fire models were selected for this evaluation: (i) NRC's NUREG-1805 Fire Dynamics Tools (FDT<sup>S</sup>), (ii) EPRI's Fire-Induced Vulnerability Evaluation Revision 1 (FIVE-Rev. 1), (iii) National Institute of Standards and Technology's (NIST) Consolidated Model of Fire Growth and Smoke Transport (CFAST), (iv) Electricite de France's (EdF) MAGIC, and (v) NIST's Fire Dynamics Simulator (FDS).

## **Approach**

This program is based on the guidelines of the ASTM E1355, "Evaluating the Predictive Capability of Deterministic Fire Models," for verification and validation of the selected fire models. The guide provides four areas of evaluation:

- Defining the model and scenarios for which the evaluation is to be conducted,
- Assessing the appropriateness of the theoretical basis and assumptions used in the model,
- Assessing the mathematical and numerical robustness of the model, and
- Validating a model by quantifying the accuracy of the model results in predicting the course of events for specific fire scenarios.

Traditionally, a V&V study reports the comparison of model results with experimental data, and therefore, the V&V of the fire model is for the specific fire scenarios of the test series. While V&V studies for the selected fire models exist, it is necessary to ensure that technical issues specific to the use of these fire models in NPP applications are investigated. The approach below was followed to fulfill this objective.

1. A set of fire scenarios were developed. These fire scenarios establish the "ranges of conditions" for which fire models will be applied in NPPs.
2. The next step summarizes the same attributes or "range of conditions" of the "fire scenarios" in test series available for fire model benchmarking and validation exercises.
3. Once the above two pieces of information were available, the validation test series, or tests within a series, that represent the "range of conditions" was mapped for the fire scenarios developed in Step 1. The range of uncertainties in the output variable of interest as predicted by the model for a specific "range of conditions" or "fire scenario" are calculated and reported.

The scope of this V&V study is limited to the capabilities of the selected fire models. There are potential fire scenarios in NPP fire modeling applications that do not fall within the capabilities of these fire models and therefore are not covered by this V&V study.

## **Results**

The results of this study are presented in the form of relative differences between fire model predictions and experimental data for fire modeling attributes important to NPP fire modeling applications, e.g., plume temperature. The relative differences sometimes show agreement, but may also show both under-prediction and over-prediction. These relative differences are affected by the capabilities of the models, the availability of accurate applicable experimental data, and the experimental uncertainty of this data. The relative differences were used, in combination with some engineering judgment as to the appropriateness of the model and the

agreement between model and experiment, to produce a graded characterization of the fire model's capability to predict attributes important to NPP fire modeling applications.

This report does not provide relative differences for all known fire scenarios in NPP applications. This incompleteness is due to a combination of model capability and lack of relevant experimental data. The first can be addressed by improving the fire models while the second needs more applicable fire experiments.

### **EPRI Perspective**

The use of fire models to support fire protection decision-making requires that their limitations and confidence in their predictive capability is well understood. While this report makes considerable progress towards that goal, it also points to ranges of accuracies in the predictive capability of these fire models that could limit their use in fire modeling applications. Use of these fire models present challenges that should be addressed if the fire protection community is to realize the full benefit of fire modeling and performance-based fire protection. This requires both short term and long term solutions. In the short term a methodology will be to educate the users on how the results of this work may affect known applications of fire modeling. This may be accomplished through pilot application of the findings of this report and documentation of the insights as they may influence decision-making. Note that the intent is not to describe how a decision is to be made, but rather to offer insights as to where and how these results may, or may not be used as the technical basis for a decision. In the long term, additional work on improving the models and performing additional experiments should be considered.

### **Keywords**

Fire	Fire Modeling	Verification and Validation (V&V)
Performance-based	Risk-informed regulation	Fire Hazard Analysis (FHA)
Fire safety	Fire protection	Nuclear Power Plant
Fire Probabilistic Risk Assessment (PRA)		Fire Probabilistic Safety Assessment (PSA)



# **PREFACE**

---

This report is presented in seven volumes. Volume 1, the Main Report, provides general background information, programmatic and technical overviews, and project insights and conclusions. Volumes 2 through 6 provide detailed discussions of the verification and validation (V&V) of the following five fire models:

Volume 2     Fire Dynamics Tools (FDT<sup>s</sup>)

Volume 3     Fire-Induced Vulnerability Evaluation, Revision 1 (FIVE-Rev1)

Volume 4     Consolidated Model of Fire Growth and Smoke Transport (CFAST)

Volume 5     MAGIC

Volume 6     Fire Dynamics Simulator (FDS)

Finally, Volume 7 quantifies the uncertainty of the experiments used in the V&V study of these five fire models.



# FOREWORD

---

Fire modeling and fire dynamics calculations are used in a number of fire hazards analysis (FHA) studies and documents, including fire risk analysis (FRA) calculations; compliance with, and exemptions to the regulatory requirements for fire protection in 10 CFR Part 50; "Specific Exemptions"; the Significance Determination Process (SDP) used in the inspection program conducted by the U.S. Nuclear Regulatory Commission (NRC); and, most recently, the risk-informed performance-based (RI/PB) voluntary fire protection licensing basis established under 10 CFR 50.48(c). The RI/PB method is based on the National Fire Protection Association (NFPA) Standard 805, "Performance-Based Standard for Fire Protection for Light-Water Reactor Generating Plants."

The seven volumes of this NUREG-series report provide technical documentation concerning the predictive capabilities of a specific set of fire dynamics calculation tools and fire models for the analysis of fire hazards in nuclear power plant (NPP) scenarios. Under a joint memorandum of understanding (MOU), the NRC Office of Nuclear Regulatory Research (RES) and the Electric Power Research Institute (EPRI) agreed to develop this technical document for NPP application of these fire modeling tools. The objectives of this agreement include creating a library of typical NPP fire scenarios and providing information on the ability of specific fire models to predict the consequences of those typical NPP fire scenarios. To meet these objectives, RES and EPRI initiated this collaborative project to provide an evaluation, in the form of verification and validation (V&V), for a set of five commonly available fire modeling tools.

The road map for this project was derived from NFPA 805 and the American Society for Testing and Materials (ASTM) Standard E1355-04, "Evaluating the Predictive Capability of Deterministic Fire Models." These industry standards form the methodology and process used to perform this study. Technical review of fire models is also necessary to ensure that those using the models can accurately assess the adequacy of the scientific and technical bases for the models, select models that are appropriate for a desired use, and understand the levels of confidence that can be attributed to the results predicted by the models. This work was performed using state-of-the-art fire dynamics calculation methods/models and the most applicable fire test data. Future improvements in the fire dynamics calculation methods/models and additional fire test data may impact the results presented in the seven volumes of this report.

*This document does not constitute regulatory requirements, and RES participation in this study neither constitutes nor implies regulatory approval of applications based on the analysis contained in this text.* The analyses documented in this report represent the combined efforts of individuals from RES and EPRI, both of which provided specialists in the use of fire models and other FHA tools. The results from this combined effort do not constitute either a regulatory position or regulatory guidance. Rather, these results are intended to provide technical analysis, and they may also help to identify areas where further research and analysis are needed.

---

Carl J. Paperiello, Director  
Office of Nuclear Regulatory Research  
U.S. Nuclear Regulatory Commission





# ACKNOWLEDGMENTS

---

The work documented in this report benefited from contributions and considerable technical support from several organizations.

The verification and validation (V&V) studies for FDT<sup>s</sup> (Volume 2), CFAST (Volume 4), and FDS (Volume 6) were conducted in collaboration with the U.S. Department of Commerce, National Institute of Standards and Technology (NIST), Building and Fire Research Laboratory (BFRL). Since the inception of this project in 1999, the NRC has collaborated with NIST through an interagency memorandum of understanding (MOU) and conducted research to provide the necessary technical data and tools to support the use of fire models in nuclear power plant fire hazard analysis (FHA).

We appreciate the efforts of Doug Carpenter and Rob Schmidt of Combustion Science Engineers, Inc. for their comments and contribution to Volume 2.

In addition, we acknowledge and appreciate the extensive contributions of Electricité de France (EdF) in preparing Volume 5 for MAGIC.

We also appreciate the efforts of organizations participating in the International Collaborative Fire Model Project (ICFMP) to Evaluate Fire Models for Nuclear Power Plant Applications, which provided experimental data, problem specifications, and insights and peer comment for the international fire model benchmarking and validation exercises, and jointly prepared the panel reports used and referred in this study. We specifically appreciate the efforts of the Building Research Establishment (BRE) and the Nuclear Installations Inspectorate in the United Kingdom, which provided leadership for ICFMP Benchmark Exercise (BE) #2, as well as Gesellschaft fuer Anlagen-und Reaktorsicherheit (GRS) and Institut fuer Baustoffe, Massivbau und Brandschutz (iBMB) in Germany, which provided leadership and valuable experimental data for ICFMP BE #4 and BE #5. In particular, ICFMP BE #2 was led by Stewart Miles at BRE; ICFMP BE #4 was led by Walter Klein-Hessling and Marina Rowekamp at GRS, and R. Dobbernack and Olaf Riese at iBMB; and ICFMP BE #5 was led by Olaf Riese and D. Hosser at iBMB, and Marina Rowekamp at GRS. We acknowledge and sincerely appreciate all of their efforts.

We greatly appreciate Paula Garrity, Technical Editor for the Office of Nuclear Regulatory Research, and Linda Stevenson, agency Publication Specialist, for providing editorial and publishing support for this report. We also greatly appreciate Dariusz Szwarc, Nuclear Safety Professional Development Program participant, for his assistance finalizing this report.



# LIST OF ACRONYMS

---

AGA	American Gas Association
AHJ	Authority Having Jurisdiction
ASME	American Society of Mechanical Engineers
ASTM	American Society for Testing and Materials
BE	Benchmark Exercise
BFRL	Building and Fire Research Laboratory
BRE	Building Research Establishment
CFAST	Consolidated Fire Growth and Smoke Transport Model
CFR	<i>Code of Federal Regulations</i>
EdF	Electricité de France
EPRI	Electric Power Research Institute
FDS	Fire Dynamics Simulator
FDT <sup>s</sup>	Fire Dynamics Tools (NUREG-1805)
FHA	Fire Hazard Analysis
FIVE-Rev1	Fire-Induced Vulnerability Evaluation, Revision 1
FM-SNL	Factory Mutual & Sandia National Laboratories
FPA	Foote, Pagni, and Alvares
FRA	Fire Risk Analysis
GRS	Gesellschaft fuer Anlagen-und Reaktorsicherheit (Germany)
HRR	Heat Release Rate
IAFSS	International Association of Fire Safety Science
iBMB	Institut für Baustoffe, Massivbau und Brandschutz
ICFMP	International Collaborative Fire Model Project
IEEE	Institute of Electrical and Electronics Engineers
MCC	Motor Control Center

<b>MQH</b>	<b>McCaffrey, Quintiere, and Harkleroad</b>
<b>MOU</b>	<b>Memorandum of Understanding</b>
<b>NBS</b>	<b>National Bureau of Standards (now NIST)</b>
<b>NFPA</b>	<b>National Fire Protection Association</b>
<b>NIST</b>	<b>National Institute of Standards and Technology</b>
<b>NPP</b>	<b>Nuclear Power Plant</b>
<b>NRC</b>	<b>U.S. Nuclear Regulatory Commission</b>
<b>NRR</b>	<b>Office of Nuclear Reactor Regulation (NRC)</b>
<b>RES</b>	<b>Office of Nuclear Regulatory Research (NRC)</b>
<b>RI/PB</b>	<b>Risk-Informed, Performance-Based</b>
<b>SDP</b>	<b>Significance Determination Process</b>
<b>SFPE</b>	<b>Society of Fire Protection Engineers</b>
<b>V&amp;V</b>	<b>Verification &amp; Validation</b>

# 1 INTRODUCTION

---

## 1.1 Background

Over the past decade, there has been a considerable movement in the nuclear power industry to transition from prescriptive rules and practices toward the use of risk information to supplement decision-making. In the area of fire protection, this movement is evidenced by numerous initiatives by the U.S. Nuclear Regulatory Commission (NRC) and the nuclear community worldwide.

In 2001, the National Fire Protection Association (NFPA) completed its development of NFPA 805, *Performance-Based Standard for Fire Protection for Light-Water Reactor Electric Generating Plants*, 2001 Edition [Ref. 1]. Effective July 16, 2004, the NRC amended its fire protection requirements in Title 10, Section 50.48(c), of the *Code of Federal Regulations* [10 CFR 50.48(c)] to permit existing reactor licensees to voluntarily adopt fire protection requirements contained in NFPA 805 as an alternative to the existing deterministic fire protection requirements [Ref. 2].

Risk-informed, performance-based (RI/PB) fire protection relies on fire modeling to determine the consequences of fires. NFPA 805 states that “fire models shall be verified and validated,” and “only fire models that are acceptable to the authority having jurisdiction [AHJ] shall be used in fire modeling calculations.”

## 1.2 Programmatic Overview

Under a joint Memorandum of Understanding [Ref. 3], the NRC’s Office of Nuclear Regulatory Research (RES) and the Electric Power Research Institute (EPRI) initiated a collaborative project for verification and validation (V&V) of five selected fire models to support RI/PB fire protection and implementation of the voluntary fire protection rule that adopts NFPA 805 as an RI/PB alternative. This V&V effort may also serve to increase the confidence of reviewers who evaluate fire models that are used in other programs, such as the Fire Protection Significance Determination Process (SDP).

This collaboration brings together the combined information and knowledge generated by the NRC and EPRI fire research programs in this area. This effort also recognizes the considerable knowledge that resides in the fire science community in general, and attempts to use that knowledge, particularly within the context of the fire models being evaluated. This report is the direct result of this collaboration between RES and EPRI.

### **1.2.1 Objectives**

The purpose of this report is to describe an evaluation of the predictive capabilities of certain fire models for applications specific to nuclear power plants (NPP). These models may be used to demonstrate compliance with the requirements of 10 CFR 50.48(c) [Ref. 2] and the referenced NFPA standard, NFPA 805 [Ref. 1].

Engineering analyses and methods that are applied to demonstrate compliance with the performance criteria in NFPA 805 need the requisite degree of defensible technical justification, as dictated by the scope and complexity of the specific application. These analyses are performed by qualified analysts and should include any necessary V&V of analytical methods relevant to the specific application.

Section 2.4.1.2 of NFPA 805 states that only fire models acceptable to the AHJ shall be used in fire modeling calculations. Further, Sections 2.4.1.2.2 and 2.4.1.2.3 of NFPA 805 state that fire models shall only be applied within the limitations of the given fire model, and shall be verified and validated. Thus, V&V is necessary to establish acceptable uses and limitations of fire models. In addition, analysts need to justify the appropriateness of fire model for specific applications.

This project was driven by the following objectives:

- Conduct a V&V study on the selected fire models using a consistent methodology (ASTM E1355) for NPP fire protection applications.
- Quantify predictive capabilities of fire models to the extent that can be supported by comparison with applicable and available fire experiment data.

This study evaluated the following five fire modeling tools:

- (1) NRC's Fire Dynamics Tools (FDT<sup>S</sup>) (documented in Volume 2 of this report)
- (2) EPRI's Fire-Induced Vulnerability Evaluation, Revision 1 (FIVE-Rev1) (documented in Volume 3 of this report)
- (3) National Institute of Standards and Technology's (NIST) Consolidated Model of Fire Growth and Smoke Transport (CFAST) (documented in Volume 4 of this report)
- (4) Electricité de France's (EdF) MAGIC code (documented in Volume 5 of this report)
- (5) NIST's Fire Dynamics Simulator (FDS) (documented in Volume 6 of this report).

### 1.2.2 Approach

This program follows the guidelines of ASTM E1355, "Evaluating the Predictive Capability of Deterministic Fire Models" (Ref. 4), which the American Society for Testing and Materials (ASTM) distributes as a guide to evaluate fire models. That standard identifies four areas of evaluation for predictive fire models:

- (1) Define the model and scenarios for which the evaluation is to be conducted.
- (2) Assess the appropriateness of the theoretical basis and assumptions used in the model.
- (3) Assess the mathematical and numerical robustness of the model.
- (4) Validate the model by quantifying the uncertainty and relative difference<sup>1</sup> of the model results in predicting the course of events for specific NPP fire scenarios.

Traditionally, a V&V study reports on the comparison of model results with experimental data from a test series and, as such, the V&V of the fire model is for the specific fire scenarios of the test series. V&V studies for the selected fire models do already exist, but it is necessary to investigate the technical issues specific to the use of these models in NPP fire modeling applications.

In order to accomplish the above-mentioned objectives, the following approach was developed and implemented in this study.

- (1) Develop a set of fire scenarios that establish the possible fire protection applications for which fire models may be applied in NPPs. In so doing, it is important to identify the important factors that can affect the fire phenomena. The following are those factors that principally influence the fire phenomena and predicted quantities:
  - fire source, peak heat release rate (HRR), and fire duration
  - geometry and construction of the compartment (shape, volume, single- or multi-compartment/multi-level)
  - ventilation (natural or mechanical)
  - target (cables with different properties and tenability)
- (2) Summarize the range of values of these factors found in experimental test series available for fire model validation evaluation.
- (3) Map the range of values of the factors in the experimental test series with the set of NPP fire scenarios developed in Step 1. In so doing, calculate and report the range of relative differences between experimental data and model prediction for the range of values.

The scope of this V&V study is limited to the capabilities of the selected fire models. As such, certain potential fire scenarios in NPP fire modeling applications do not fall within the capabilities of these fire models and, therefore, are not covered by this study. Examples of such fire scenarios include high-energy arcing faults and fire propagation between control panels [Ref. 5, Section 7.2.2].

---

<sup>1</sup> See section 2.5 for the specific definition of relative difference

## **1.3 Report Structure**

This report is presented in seven volumes:

- Volume 1, “Main Report,” provides general background information, programmatic and technical overviews, project results, insights, and conclusions. The description of the typical commercial NPP fire scenarios is contained in section 2 of Volume 1.
- Volumes 2 through 6 provide detailed discussions of the V&V of the FDT<sup>s</sup>, FIVE-Rev 1, CFAST, MAGIC, and FDS fire models. Each report follows the guidelines provided by ASTM E1355 and contains the following chapters:
  - Chapter 1, Introduction
  - Chapter 2, Model Definition, briefly describes the fire model.
  - Chapter 3, Theoretical Bases for the Model, includes theoretical descriptions of the fire model. In addition, this chapter provides a literature review and discusses the capabilities, limitations, and range of applications of the model.
  - Chapter 4, Mathematical and Numerical Robustness, discusses the mathematical and numerical robustness of the fire model.
  - Chapter 5, Model Sensitivity, presents the results of sensitivity analyses conducted for the fire model. In general, the sensitivity analysis evaluates model variations from a base case scenario, as they are affected by changes in the input parameters.
  - Chapter 6, Model Validation, documents the methodology and results of the V&V study.
  - Chapter 7, References
  - Appendix A, Technical Details for Validation Study
  - Appendix B, Input Files
- Volume 7 presents a summary description of the fire tests and estimates of experimental uncertainty used in this V&V study.



# 2

## TECHNICAL APPROACH

---

ASTM E1355 establishes a process for conducting a V&V study of a fire model. In general, the process can be summarized in the following tasks:

- **Model and scenario definition** documents the model and the scenarios or phenomenon of interest for the V&V study.
- **Description of the theoretical basis for the model** documents a detailed technical description of the thermo-physical processes addressed by the fire model.
- **Mathematical and numerical robustness** documents an evaluation of the numerical implementation of the model.
- **Model sensitivity** documents a sensitivity analysis of the model.
- **Model evaluation** documents the results of the validation study.

There is, however, a technical challenge in implementing these tasks. Specifically, the universe of fire scenarios in commercial nuclear power plants (NPP) is large and diverse. Also many scenarios have characteristics or attributes that either cannot be modeled using state of the art computational fire models, and/or no experimental data is available for supporting a quantitative V&V study of that particular characteristic or attribute. Improvements in these two specific limitations — limited fire modeling capabilities and/or insufficient experimental data — are needed.

In order to address these challenges, and still perform a quantitative V&V study consistent with ASTM E1355, the following approach has been selected:

- (1) **Define a list of typical NPP fire scenarios.** This list of fire scenarios is intended to be a reflection of the wide range of fire scenarios found in NPPs. In the context of this V&V study, the list of scenarios attempts to capture all the potential fire scenarios and the resulting conditions that could be predicted by some fire models. Many of these scenarios do not have any available experimental data to support a quantitative model evaluation.
- (2) **Select test series from which experimental data will be used to perform the quantitative validation.** The selected test series reflects some of the characteristics of the fire scenarios included in the list described in item 1 above.
- (3) **Select and describe the fire models for which an evaluation can be conducted.** Consistent with ASTM E1355, the description of the selected fire models includes a review of the theoretical basis and fundamental assumptions, an assessment of the mathematical and numerical robustness, and a sensitivity analysis, as well as validation with experimental data.

- (4) **Define fire scenario parameters.** As mentioned earlier, neither state of the art fire model capabilities nor the available experimental data can support a quantitative V&V study of every relevant attribute in all potential NPP fire scenarios. Therefore, based on the capabilities of the selected fire models, and the available experimental data, the project team identified 13 fire scenario attributes for which a quantitative validation study can be conducted.
- (5) **Conduct the quantitative validation study for each fire-modeling tool.** The quantitative validation studies are conducted by comparing experimental data with fire modeling tool predictions.
- (6) **Report validation results.** Results from the quantitative validation study are reported as relative differences for peak experimental measurements and model predictions, as well as graphical comparisons between experimental measurements and model predictions.

Figure 2-1 graphically represents this approach. The following sections describe the steps of this approach in greater detail.

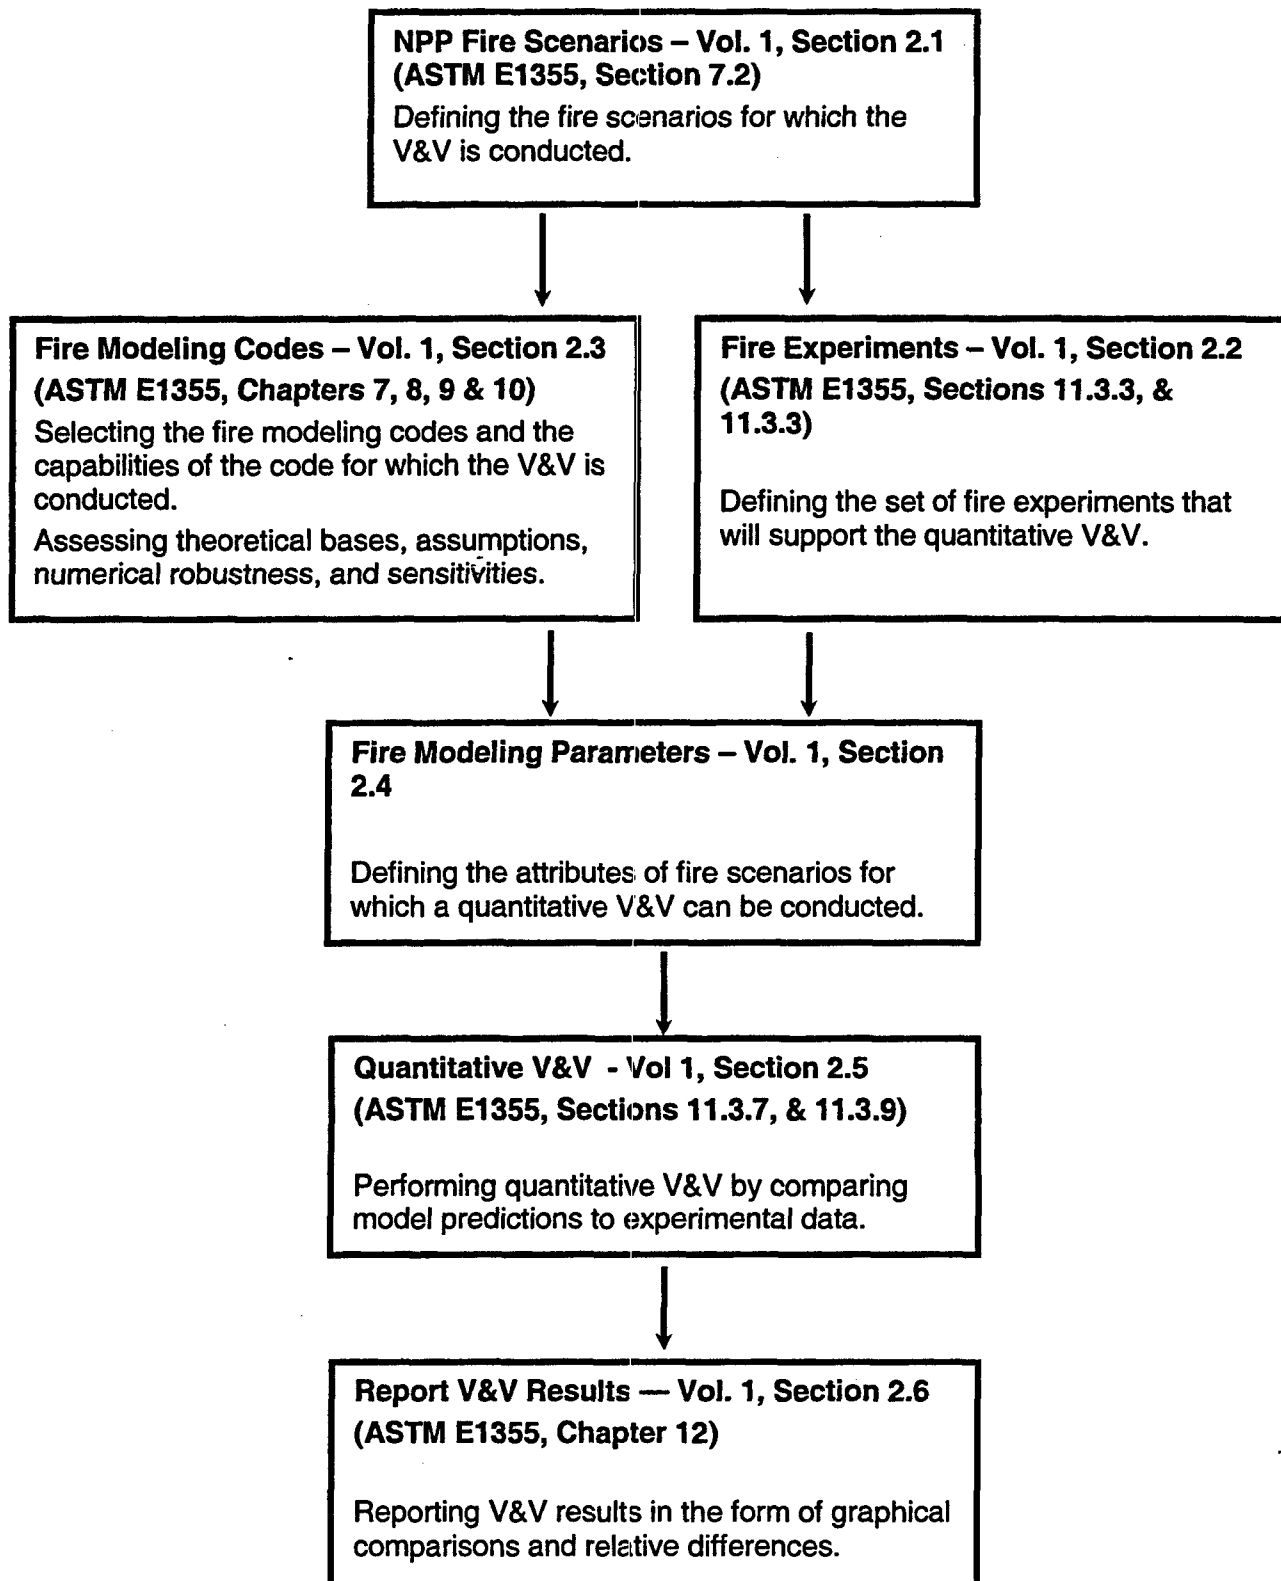


Figure 2-1: Overview of the Approach for V&V Study of Selected Fire Models for Nuclear Power Plant Application

## 2.1 Library of Nuclear Power Plant Fire Scenarios

To conduct the V&V study in accordance with ASTM E1355, it was necessary to define the scenarios or phenomena of interest to evaluate each model. For the purpose of the V&V study, a fire scenario definition should include a complete description of the phenomena of interest in the evaluation to facilitate appropriate application of the model. As mentioned in the introduction to this chapter, this list of fire scenarios is intended to reflect the collection of fire scenarios found in NPPs. In the context of this V&V study, the list of scenarios captures all the phenomena of interest that would be predicted by some fire models, but may or may not have experimental data to support a quantitative model evaluation.

The list of fire scenarios presented in this section expands and modifies the list originally compiled and documented by EPRI as part of the development of its “Fire Modeling Guide for Nuclear Power Plant Applications” [Ref. 5]. The basis for the selection of these fire scenarios is documented in Chapter 3 of this document. Further information on NPP fire scenarios is found in NUREG/CR-6850 [Ref. 6]. This document discusses risk methods that may be used to evaluate scenarios that can be outside the applicability of the fire modeling tools evaluated in this report. Such scenarios include high-energy arcing faults, main control board fires, and hydrogen fires.

The generic list of scenarios includes fires in the switchgear room (SWGR), cable spreading room (CSR), main control room (MCR), pump room, turbine building, multiple compartment (corridor) scenarios, multi-level building, containment (PWR), battery room, diesel generator room, computer room, and outdoors. The descriptions below of the fire scenario are examples of how and where a fire could start. The sources of fires described are representative of the typical configurations in most NPPs, and therefore are the most probable.

### 2.1.1 Switchgear Room

The SWGR is often an important area in a commercial NPP. A fire in a SWGR can have significant fire risk repercussions and, hence, the SWGR is one of the two plant locations that are most often identified as the top fire risk contributors in fire risk assessments performed under the IPEEE program. The reason the SWGR can be essential to plant operation is that it typically contains equipment and circuits that provide the electrical power needed to operate and control the plant. This area also contains potential sources of high-energy arcing faults that may be located close to other safety-related equipment and/or circuits. Figure 2-2 graphically represents the SWGR fire room scenario. The source of a fire in this scenario may be an electrical cabinet. The size of the fire will depend on the type and amount of cables present in the cabinet and the ventilation conditions within the cabinet itself. The ventilation conditions in the room may be natural ventilation with one or two open doors, or mechanical ventilation. Important targets may be cables in a cable tray located above the switchgear cabinet that are exposed to plume conditions or radiant heat flux from the fire.

[Figure TBD]

Figure 2-2: Typical Switchgear Room Fire Scenario

### **2.1.2 Cable Spreading Room**

The CSR is another critical location in a commercial NPP because it often contains redundant instrumentation and control circuits needed for plant operation. The CSR generally contains a high cable concentration (in cable trays and/or conduits), and fire propagation in open cable trays can be an important aspect of fire modeling. Some NPPs have areas called cable tunnels or cable lofts, which present similar challenges. These areas may also contain significant amounts of cables in trays or conduits and may contain redundant circuits. Figure 2-3 graphically represents the scenario. The source of a fire in this scenario may be transient combustibles, or electrical cable failure. The size of the fire will depend on the type and amount of trash in the area. The ventilation conditions in the room may be mechanical ventilation, or possibly some level of natural ventilation via leakage around closed doors. Important targets may be cables in a cable tray located above the fire cabinet that are exposed to plume conditions or an electrical cabinet exposed to radiant heat flux from the fire.

[Figure TBD]

**Figure 2-3: Typical Cable Spreading Room Fire Scenario**

### **2.1.3 Main Control Room**

Like the SWGR, the MCR is typically one of the two plant locations that are most often identified as the top fire risk contributors in fire risk assessments performed under the IPEEE program. The MCR contains redundant instrumentation and control circuits that are critical to plant control and safe shutdown. Analyses of fires in the MCR pose unique challenges, including timing of fire detection, smoke generation, migration, and habitability; fire propagation within very large panels; and fire propagation between panels. It should also be noted that some NPPs have areas (i.e., a relay room, auxiliary equipment room, or remote shutdown panel) that are similar to MCRs in that they contain redundant instrumentation and control circuits that are critical to plant control and safe-shutdown. However, such areas are not constantly manned like MCRs and may instead be equipped with automatic suppression systems. Figure 2-4 graphically represents a MCR scenario. This scenario can apply to one or more unit NPP control rooms. The source of a fire in this scenario may be a control cabinet. The size of the fire will depend on the type and amount of cables within the cabinet, as well as cabinet ventilation and detection and suppression activities in the constantly-manned control room. The ventilation conditions in the room will be mechanical ventilation. Important targets are adjacent control cabinets exposed to radiant heat flux from the fire.

[Figure TBD]

**Figure 2-4: Typical Main Control Room Fire Scenario**

### **2.1.4 Pump Room**

This location represents areas in a plant where a relatively large fire is possible in a small enclosure. Figure 2-5 graphically represents the scenario. The source of a fire in this scenario may be ignition of an oil pool spilled from a pump. The size of the fire will depend on the type and amount of oil spilled, as well as the area and depth of the pool itself. The growth of this fire typically will be fast, and depending on the size of the room, the fire could possibly generate flashover conditions that may challenge the walls and ceiling. The ventilation conditions in the room will be mechanical ventilation with leakage around closed doors. Targets of interest in these scenarios may be the walls and ceiling of the enclosure, which are fire barriers, as well as any other safety-related equipment and cables located in the room or area.

[Figure TBD]

**Figure 2-5: Typical Pump Room Fire Scenario**

### **2.1.5 Turbine Building**

A turbine building is usually a multi-level enclosure<sup>2</sup>, in which the top level is commonly referred to as the turbine operating deck. A fire scenario on the turbine deck was selected to examine large (e.g., turbine lube oil) or small (e.g., transient or panel) fires in large enclosures with high ceilings. A multi-level turbine building fire is described in Section 2.1.7. The scenario can apply to buildings with one or more turbines. Figure 2-6 graphically represents the scenario. The source of a fire in this scenario may be ignition of an oil pool spilled from one of the turbines. The size of the fire will depend on the type and amount of oil spilled, as well as the area and depth of the pool itself. The growth of this fire will be fast. Other sources of fire in the turbine building could be electrical fires, transformer or switchgear fires, and hydrogen fires. The ventilation conditions will be natural ventilation, with many open doors and windows. There may also be mechanical ventilation using roof-mounted exhaust fans and/or mechanical supply. Targets of interest in these scenarios may be structural steel members and fire barriers, as well as any other safety-related equipment and cables located in the area and exposed to the fire.

[Figure TBD]

**Figure 2-6: Typical Turbine Building Fire Scenario**

### **2.1.6 Multi-Compartment Corridor**

Many commercial NPPs have enclosures with multiple compartments that open into a common space or corridor. The significance of these enclosures in terms of fire safety varies from plant-to-plant because they house various mechanical, electrical, waste treatment, or other equipment and/or circuits. Figure 2-7 graphically represents this scenario, which consists of a fire in one compartment affecting targets in an adjacent compartment. The multi-compartment corridor considered in this scenario consists of interconnected rooms and corridors in the same level. These geometries may have soffits between the connecting rooms. The source of a fire in this

---

2 Some NPPs (typically in warmer climates) do not have a turbine building, and the main turbine is open to the elements.

scenario may be ignition of an oil pool spilled from a pump in one of the adjacent rooms. The size of the fire will depend on the type and amount of oil spilled, as well as the area and depth of the pool itself. The growth of this fire typically will be fast, and depending on the size of the room, the fire could potentially generate flashover conditions in the room of origin, and fire effluent may spill out and effect targets in adjacent rooms. The ventilation conditions will be natural ventilation, with leakage paths between compartments around normally closed doors. There may also be mechanical ventilation using both injection and extraction systems. Targets of interest in these scenarios are often safety-related equipment and cables located in the corridor outside the room of fire origin, or an adjacent room.

[Figure TBD]

**Figure 2-7: Typical Multi-Compartment Corridor Fire Scenario**

### **2.1.7 Multi-Level Building**

A typical NPP has locations where multiple elevations in the same building are separated by partial floors/ceilings, open hatches, or staircases. Typical examples include turbine buildings, pressurized-water reactor (PWR) auxiliary buildings, and boiling-water reactor (BWR) buildings. The multi-level turbine building in this scenario is a three-level space that includes the turbine deck. (Section 2.1.5 describes a turbine deck fire scenario.) This scenario consists of an oil spill fire affecting targets located on a different level. Figure 2-8 graphically represents the scenario, which can apply to turbine buildings with one or more units. The source of a fire in this scenario may be ignition of an oil pool spilled from an oil tank located under one of the turbine generators. The size of the fire will depend on the type and amount of oil spilled, as well as the area and depth of the pool itself. The energy and smoke created will flow through mezzanine opening between levels. The growth of this fire will be fast. The ventilation conditions will be natural ventilation via opening on the upper level. There may also be mechanical ventilation using roof-mounted exhaust fans and/or mechanical supply. Targets of interest in these scenarios may be cables in cable tray located on the upper levels.

[Figure TBD]

**Figure 2-8: Typical Multi-Level Building Fire Scenario**

### **2.1.8 Containment Building (PWR)**

The containment building in a PWR plant was selected because of its geometrical characteristics, which include cylindrical boundaries, high domed ceiling, and a large volume. This scenario involves an oil spill fire from the reactor coolant pump (RCP). The size of the fire will depend on the type and amount of oil spilled, as well as the area and depth of the pool itself. The containment in a PWR has internal air recirculation systems with cooling units. There is no fresh air added into the containment atmosphere during normal operation. The target of interest in this scenario is an elevated cable tray located outside the fire plume.

### **2.1.9 Battery Room**

Battery rooms are usually relatively small concrete rooms with two or more large banks of batteries. These rooms are kept closed and are typically free of transient combustibles and fixed ignition sources other than the batteries. The scenario consists of a battery fire attributable to a hydrogen leak. The size of the fire depends on the amount of hydrogen released and the environmental conditions in the room at the time of the leak. The ventilation conditions will be mechanical ventilation. The targets of interest in this scenario are cables and batteries.

### **2.1.10 Diesel Generator Room**

Diesel generator rooms are relatively medium-sized rooms, which house the standby diesel generator (SBDG) and associated electrical cabinets. This scenario consists of a fuel oil fire near the diesel generator. The size of the fire will depend on the type and amount of fuel oil spilled, as well as the area and depth of the pool itself. The growth of this fire will be fast. The ventilation conditions in the room will be mechanical ventilation with leakage around closed doors. Targets of interest in these scenarios may be cables located in the room exposed to HGL temperatures.

### **2.1.11 Computer Room**

Computer rooms are typically located in close proximity to the main control rooms in NPPs. In addition to computers and other office equipment, some computer rooms may house control cabinets. The ignition source for this scenario is a transient combustible fire, namely a computer workstation. The size of the fire will depend on the amount and type of materials involved. The ventilation conditions will be mechanical ventilation. The targets of interest may be a control cabinet or cables above the fire.

### **2.1.12 Outdoors**

Outdoor fire scenarios can involve large oil-filled transformers or hydrogen tanks and can affect or propagate to nearby equipment. The fire ignition source in this scenario is oil dripping from a transformer in the switchyard. The size of the fire will depend on the type and amount of oil spilled, as well as the area, depth of the pool itself, as well as the substrate onto which the oil was spill. The growth of this fire will be fast. The target of interest is an adjacent transformer.

## **2.2 Fire Models**

There are numerous fire models that have been developed and maintained by various organizations to predict fire-generated conditions. This study selects five of these fire models that represent a wide range of capabilities and mathematical and computational sophistication. These fire models are:

- Two libraries of engineering calculations: FDT<sup>s</sup> and FIVE-Rev1
- Two two-zone models: CFAST and MAGIC
- One field model: FDS

These particular models were chosen based on the fact that most of them have been used fairly extensively to calculate fire conditions in NPP fire protection applications, or were developed by



stakeholders within the nuclear industry for NPP fire protection applications. FDS was chosen to represent the most complex types of models available for fire protection applications.

**2.2.1 Libraries of Engineering Calculations: FDT<sup>s</sup> and FIVE-Rev1**

FDT<sup>s</sup> is a library of engineering calculations (also referred to as hand calculations) in the form of Microsoft<sup>®</sup> Excel<sup>®</sup> spreadsheets. For the most part, the models in the FDT<sup>s</sup> library are closed form algebraic expressions programmed in spreadsheets to provide a user-friendly interface that reduces input and computational errors. Technical details concerning the engineering calculations and use of the spreadsheets are available in NUREG-1805 [Ref. 6].

FIVE-Rev1 is another library of engineering calculations in the form of Microsoft<sup>®</sup> Excel<sup>®</sup> spreadsheets. Specifically, FIVE-Rev1 library consists of functions programmed in Visual Basic for Applications, which is the programming language within Excel. Having the models programmed as Microsoft Excel functions allows the use of Excel spreadsheets as the interface. Technical details concerning the engineering calculations and their use in the Excel environment are available in EPRI TR-1002981 [Ref. 5].

The FDT<sup>s</sup> and FIVE-Rev1 libraries include different models, and some of those models were not evaluated for this V&V study, due to applicability and a lack of experimental data. The fire scenario attributes that were selected for this study (see section 2.4 for the description of these attributes) are those that are used in NPP fire modeling applications. For the most part, these selected models are included in both libraries.

**Table 2-1: FDT<sup>s</sup> and FIVE-Rev1 Models for the Fire Scenario Attributes Selected for this V&V Study**

Attribute (See Section 2.4)	FDT <sup>s</sup>	FIVE-Rev1
1. Hot gas layer temperature	MQH, FPA, Beyler, Beyler & Deal	MQH, FPA
2. Hot gas layer height	Yamana & Tanaka	No model
3. Ceiling jet temperature	No model	Alpert's ceiling jet temperature correlation
4. Plume temperature	Heskestad's plume temperature correlation	Heskestad's plume temperature correlation
5. Flame height	Heskestad's flame height correlation	Heskestad's flame height correlation
6. Radiated heat flux to targets	Point source flame radiation model	Point source flame radiation model

**2.2.2 Two-Zone Fire Models: CFAST and MAGIC**

Fire modeling programs that were developed under the assumption that a fire will generate two distinct zones with uniform thermal properties are referred to as two-zone models. This V&V study evaluated two two-zone models, CFAST and MAGIC.

CFAST [Ref. 8] is a two-zone fire model that predicts the environment that arises within compartments as a result of a fire prescribed by the user. CFAST was developed and is maintained primarily by the Fire Research Division of the National Institute of Standards and Technology (NIST). In terms of modeling capabilities, CFAST provides the average temperatures of the upper and lower gas layers within each compartment; flame height; ceiling, wall, and floor temperatures within each compartment; flow through vents and openings; visible smoke and gas species concentrations within each layer; target temperatures; heat transfer to targets; sprinkler activation time; and the impact of sprinklers on the fire HRR.

MAGIC [Ref. 9] is a two-zone fire model developed and maintained by Electricité de France (EdF). It is available through EPRI to its members. In terms of modeling capabilities, MAGIC predicts (1) environmental conditions in the room (such as hot gas layer temperature, and oxygen/smoke concentrations), (2) heat transfer-related outputs to walls and targets (such as incident convective, radiated, and total heat fluxes), (3) fire intensity and flame height, and (4) flow velocities through vents and openings.

### **2.2.3 Field Fire Model: FDS**

FDS [Ref. 10] is a computational fluid dynamics (CFD) model of fire-driven fluid flow. The model numerically solves a form of the Navier-Stokes equations appropriate for low-speed, thermally-driven flow, with an emphasis on smoke and heat transport from fires. The partial derivatives of the equations for conservation of mass, momentum, and energy are approximated as finite differences, and the solution is updated in time on a three-dimensional, rectilinear grid. Thermal radiation is computed using a finite volume technique on the same grid as the flow solver. Lagrangian particles are used to simulate smoke movement and sprinkler discharge.

FDS computes the temperature, density, pressure, velocity, and chemical composition within each numerical grid cell at each discrete time step. There are typically hundreds of thousands to several million-grid cells, and thousands to hundreds of thousands of time steps. In addition, FDS computes the temperature, heat flux, mass loss rate, and various other quantities at solid surfaces.

## **2.3 Experimental Data**

This section provides a general overview of the tests series and experiments selected for this study. Volume 7 augments this overview by providing detailed descriptions of these experiments. Some test series included many experiments, from which only a few were chosen for this V&V study. One overriding reason for this is the sheer amount of data that is generated and must be processed can be overwhelming, so limiting the number of experiments to consider was necessary. The experiments within the test series that were chosen are representative of the overall series of tests, as well as representative of the fire scenarios in NPPs listed above. Volume 7, Section 1.2 has a more complete explanation for the selection of the experiments.

### **2.3.1 Factory Mutual & Sandia National Laboratories (FM/SNL) Test Series**

A series of fire tests was conducted at Sandia National Laboratories under the sponsorship of the NRC in the mid-1980s. Specifically tests were conducted using simple gas-fired burner, heptane pool, methanol pool, and solid polymethyl-methacrylate (PMMA) fires. Four (4) of these tests were conducted with a full-scale control room mockup in place. Parameters varied during

testing were fire intensity, enclosure ventilation rate, and fire location. The primary purpose at the time of these tests was to provide data for use in validating computer fire environment simulation models that would subsequently be used in analyzing NPP enclosure fire scenarios, specifically MCR scenarios.

These tests were conducted in an enclosure measuring 18.3 m x 12.2 m x 6.1 m (60 ft x 40 ft x 20 ft), which was constructed at the Factory Mutual Research Corporation fire test facility in Rhode Island. All of the tests utilized forced ventilation conditions. The ventilation system was designed to simulate typical NPP installation practices and ventilation rates.

NUREG/CR-4681 [Ref. 11] provides a detailed description of the FM/SNL test series, including the types and location of measurement devices as well as some results. Additional results are reported in NUREG/CR-5384 [Ref. 12].

This study used data from only the three tests with data reported in NUREG/CR-4681 (namely FM/SNL Tests 4, 5, and 21). For all three tests, the fire source was a propylene gas-fired burner with a diameter of approximately 0.9 m (2.95 ft), with its rim located approximately 0.1 m (0.33 ft) above the floor. For FM/SNL Tests 4 and 5, the burner was centered along the longitudinal axis centerline, 6.1 m (20 ft) laterally from the nearest wall. For FM/SNL Test 21, the burner was placed within simulated benchboard electrical cabinets.

### **2.3.2 The National Bureau of Standards (NBS) Test Series**

A total of 45 tests representing 9 different sets of experiments, with multiple replicates of each set, were conducted in a three-room suite that is described in detail in NBSIR 88-3752 [Ref. 13]. The suite consisted of two relatively small rooms, designated here as Rooms 1 and 3, which were connected via doorways and short connecting passageways to a relatively long corridor, designated as Room 2. Rooms 1 and 3 opened only onto the corridor (Room 2) via doorways; they did not open to the external environment other than through normal construction leakage paths. The corridor had a doorway to the external environment, as well as doorways to Rooms 1 and 3. The fire source, a gas-fired burner, was located against the rear wall of Room 1. The following parameters were varied in the 9 different sets of experiments:

- fire size, including nominal 100, 300, and 500 kW fires
- door positions, including open and closed doors between the corridor and Room 3, as well as between the corridor and the external environment

In this study, the tests designated as Sets 1, 2, and 4 in NBSIR 88-3752 are used for comparison. All three of these sets had a fire source intensity of 100 kW, but the sets differed based on door position. Specifically, the door between Rooms 1 and 2 was open for all three sets. However, for Set 1, the door between Room 2 and the external environment was open (providing a source of fresh air to the suite), while the door between Rooms 2 and 3 was closed (effectively isolating Room 3 from this test). By contrast, for Set 2, the door between Room 2 and the external environment was closed, as was the door between Rooms 2 and 3 (again isolating Room 3). For Set 4, the door between Room 2 and the external environment was open (again providing a source of fresh air to the suite), as was the door between Rooms 2 and 3.

Experimental data used for these comparisons was obtained in electronic format from NIST. These data were converted to spreadsheet format for tests designated as MV100A through

MV100AB. Average values for the nine data sets were also converted to spreadsheet format, but were not used for these comparisons. Rather, an exemplar test was selected from each data set for comparison purposes. Specifically, Test MV100A was used for Set 1, Test MV100O was used for Set 2, and Test MV100Z was used for Set 4. The selected data are also available in EPRI's Fire Modeling Code Comparison TR-108875 [Ref. 14].

### **2.3.3 The International Collaborative Fire Model Project (ICFMP) Benchmark Exercise Test Series**

To date, four full-scale fire test series have been completed as part of the ICFMP. The ICFMP is a separate, but related, project designed to perform some validation of fire models from around the world. ICFMP participants conduct a series of experiments and provide the data to other participants in order to compare fire model outputs to experimental data. These test series are referred to as benchmark exercises (BE). This V&V study includes experimental data from BEs #2, 3, 4, and 5. A brief description of each follows:

- BE #2 [Ref. 15]: The ICFMP objective of BE #2 was to examine scenarios that are more challenging for zone models. In particular, these scenarios included fires in larger room volumes that are representative of turbine halls in nuclear power plants. The tests were conducted inside the VTT Fire Test Hall, which has dimensions of 19 m high by 27 m long by 14 m wide. Each case involved a single heptane pool fire, ranging from 2 MW to 4 MW.
- BE #3 [Ref. 16]: This ICFMP exercise comprised a series of 15 large-scale fire tests, sponsored in part by the NRC, that were performed at NIST between June 5 and 20, 2003. These tests consisted of 350 kW, 1.0 MW, and 2 MW fires in a marinite room with dimensions of 21.7 m x 7.15 m x 3.7 m (71.2 ft x 23.5 ft x 12.1 ft). The room had one door with dimensions of 2 m x 2 m (6.6 ft x 6.6 ft), and a mechanical air injection and extraction system. Ventilation conditions and fire size were varied among the 15 tests. The numerous experimental measurements included temperatures in gas layers and surfaces, heat fluxes, and gas velocities, among others.
- BE #4 [Ref. 17]: This test series was conducted at the Institut Für Baustoffe, Massivbau Und Brandschutz (iBMB), in Germany. Each of these tests simulated a relatively large fire in a relatively small concrete room. Only one test from this series was selected for this study.
- BE #5 [Ref. 18]: This exercise, which was conducted at the iBMB in Germany, consisted of four large-scale tests inside the same concrete enclosure as BE #4 with realistically routed cable trays. Only one test was selected for this study.

## 2.4 Selection of Fire Scenario Attributes

A complete V&V of a particular model for a given NPP fire scenario may not be possible because (1) the availability of experimental data is limited, and/or (2) a selected tool has limited modeling capabilities. Therefore, this implementation of ASTM E1355 is intended to benefit as much as possible from the available data to establish the modeling capabilities and limitations of the selected fire models in typical NPP fire scenarios.

An important consideration in evaluating the capabilities of fire models in NPPs is the range of fire scenarios for which the models may be used. From a fire modeling perspective, most NPPs have similar configurations and fire hazards. That is, fire scenarios are characterized by similar attributes. Consequently, the V&V project team developed the following list of typical NPP fire modeling attributes, which provided the basic framework for conducting the V&V study and classifying the quantitative results:

- (1) **Hot gas layer temperature:** The hot gas layer temperature is particularly important in NPP fire scenarios because it can provide an indication of target damage away from the ignition source. Models predict the increase in environmental temperature attributable to the energy released by a fire in a volume. However, different models define this volume in different ways. In the FDT<sup>s</sup> and FIVE-Rev1 models available for predicting hot gas layer temperature, the assumed volume is the volume of the room and the output is a uniform room temperature. In the CFAST and MAGIC two-zone models, the room is divided into upper and lower control volumes. Thus, the hot gas layer temperature output from these two-zone models is a uniform temperature in the upper control volume (which is referred to as the hot gas layer because it accumulates hot gases that are transported to the upper part of the room by the fire plume). Finally, in the FDS field model, the room is divided into numerous control volumes. Thus, FDS can provide outputs for the average temperature of the control volumes in the upper layer of the computational domain, as determined by a reduction of temperature profile data.
- (2) **Hot gas layer height:** The height of the hot gas layer is also important in NPP fire scenarios because it indicates whether a given target is immersed in and affected by hot gas layer temperatures. The concept of hot gas layer height is most relevant in two-zone models (CFAST and MAGIC), in which this attribute defines the interface between the upper and lower control volumes. The FDS field model also provides the hot gas layer height output, which is calculated from the temperature profile within the height of the room. In addition, the FDT<sup>s</sup> library includes one model that predicts hot gas layer height before the layer reaches a vent, assuming steady-state fire conditions in the room. The FIVE-Rev 1 library does not have a model for predicting hot gas layer height in the scenarios evaluated in this V&V study.
- (3) **Ceiling jet temperature:** The ceiling jet is the shallow layer of hot gases that spreads radially below the ceiling as the fire plume flow impinges on it. This layer of hot gases has a distinct temperature that is higher than the temperature associated with the hot gas layer. This attribute is important in NPP fire scenarios that subject targets to unobstructed ceiling jet gases. The FIVE-Rev1 and MAGIC models calculate ceiling jet temperature using a semi-empirical correlation, and the ceiling jet temperature can be obtained from the FDS model by inspecting the temperature profile in the pre-defined grid. The FDT<sup>s</sup> library does not

include a model for calculating ceiling jet temperature, and the CFAST model does not provide ceiling jet temperature as a direct output.

- (4) **Plume temperature:** The fire plume is the buoyant flow rising above the ignition source, which carries the hot gases that ultimately accumulate in the upper part of a room to form the hot gas layer. The plume is characterized by a distinct temperature profile, which is expected to be higher than the ceiling jet and hot gas layer. This attribute is particularly important in NPP fires because of the numerous postulated scenarios that involve targets directly above a potential fire source. Models in the FDT<sup>s</sup> and FIVE-Rev1 libraries predict fire plume temperatures using closed form semi-empirical correlations, and the MAGIC model predicts plume temperatures in a similar manner. The plume temperature can also be obtained from the FDS model by inspecting the temperature profile in the pre-defined grid. The CFAST model does not provide plume temperatures as an output.
- (5) **Flame height:** The height of the flame is important in those NPP fire scenarios where targets are located close to the ignition source. Some of these scenarios subject the target to flame temperatures because the distance between the target and the ignition source is less than the predicted flame height. A typical example would be cable trays above an electrical cabinet. Models in the FDT<sup>s</sup> and FIVE-Rev 1 libraries predict flame height using a close form semi-empirical correlation. MAGIC and CFAST models also predict flame height in a similar manner. The FDS combustion model has the capability to calculate flame height.
- (6) **Radiated heat flux to targets:** Radiation is an important mode of heat transfer in fire events. The modeling tools within the scope of this study address fire-induced thermal radiation (or radiated heat flux) with various levels of sophistication, from simply estimating flame radiation, to calculating radiation from different surfaces and gas layers in the computational domain. The FDT<sup>s</sup> and FIVE-Rev1 libraries include models for calculating flame radiation at a specified distance from the flames. By contrast, CFAST, MAGIC, and FDS have sophisticated heat transfer models that account for radiation exchanges between room surfaces and the upper and lower gas layers. Therefore, the incident thermal radiation to which a given target is exposed is a result of the heat balance at the surface of the target (which includes all of the exchanges), as well as the thermal radiation received from the flames.
- (7) **Total heat flux to targets:** In contrast to thermal radiation (or radiated heat flux), the total heat flux a target is subjected includes convective heat transfer. Convective heat transfer is a significant contributor to target heat-up in scenarios that involve targets in the hot gas layer, ceiling jet, or fire plume. The CFAST and MAGIC two-zone models and the FDS field model account for convection, although CFAST (in particular) does not model target heating in the plume and ceiling jet sub-layers. The heat transfer models in the FDT<sup>s</sup> and FIVE-Rev1 libraries do not account for convective heat transfer.
- (8) **Total heat flux to walls:** This attribute is generally identical to “total heat flux to targets” (above). Nonetheless, it was included as a separate attribute in this V&V study in order to evaluate model capabilities to determine the incident heat flux to walls, floors, and ceilings, which includes the contributions of radiation and convection. Because the heat conducted through the walls, floors, and ceilings does not contribute to room heat-up, it can be an important factor in the heat balance in control volume(s) in contact with the surfaces.

- Of the models within the scope of this study, only the CFAST and MAGIC two-zone models and the FDS field model calculate total heat flux to walls, floors, and ceilings.
- (9) **Wall temperature:** This attribute was included as a separate attribute in this V&V study to evaluate model capabilities to determine the temperature of walls, floors, and ceilings. Of the models within the scope of this study, only the CFAST and MAGIC two-zone models and the FDS field model provide the temperatures of these surfaces as outputs, since such outputs are part of the calculations required to determine the heat losses through boundaries.
- (10) **Target temperature:** The calculation of target temperature is perhaps the most common objective of fire modeling analyses. The calculation of target temperature involves an analysis of localized heat transfer at the surface of the target after determining the fire-induced conditions in the room. The CFAST and MAGIC two-zone models and the FDS field model calculate the surface temperature of the target as a function of time, and consider the heat conducted into the target material. By contrast, the available model in the FIVE-Rev1 library assumes a constant incident heat flux and a semi-infinite solid. The FDT<sup>s</sup> library does not include a model for estimating target temperature.
- (11) **Smoke concentration:** The smoke concentration can be an important attribute in NPP fire scenarios that involve rooms where operators may need to perform actions during a fire. This attribute specifically refers to soot concentration, which affects how far a person can see through the smoke (visibility). The CFAST and MAGIC two-zone models and the FDS field model calculate smoke concentration as a function of time. These models determine smoke concentration as the fire plume carries combustion products into the hot gas layer. FDT<sup>s</sup> and FIVE-Rev1 libraries do not contain direct outputs of smoke concentration.
- (12) **Oxygen concentration:** Oxygen concentration is an important attribute potentially influencing the outcome of fires in NPPs due to compartmentalized nature of nuclear power plants. Oxygen concentration has a direct influence on the burning behavior of a fire, especially if the concentration is relatively low. The CFAST and MAGIC two-zone models calculate the oxygen concentration in the upper and lower layers, and the FDS model calculates the oxygen concentration in each control volume defined in the computational domain. The FDT<sup>s</sup> and FIVE-Rev1 libraries do not include models for calculating oxygen concentration.
- (13) **Room pressure:** Room pressure is a rarely used attribute in nuclear power plant fire modeling. It may be important when it contributes to smoke migration to adjacent compartments. CFAST, MAGIC and FDS calculate room pressure as they solve energy and mass balance equations in the control volume. FDT<sup>s</sup> library has a model for a sealed compartment that is not validated in this study. FIVE-Rev1 library does not have correlation to calculate room pressure.

**Table 2-2: Fire Modeling Attributes as Outputs**

Fire Modeling Attributes	Fire Models				
	FDT <sup>s</sup>	FIVE	CFAST	MAGIC	FDS
Hot Gas Layer Temperature	Yes	Yes	Yes	Yes	Yes
Hot Gas Layer Height	Yes	No	Yes	Yes	Yes
Ceiling Jet Temperature	No	Yes	No	Yes	Yes
Plume Temperature	Yes	Yes	No	Yes	Yes
Flame Height	Yes	Yes	Yes	Yes	Yes
Radiated Heat Flux to Targets	Yes	Yes	Yes	Yes	Yes
Total Heat Flux to Targets	No	No	Yes	Yes	Yes
Total Heat Flux to Walls	No	No	Yes	Yes	Yes
Wall Temperature	No	No	Yes	Yes	Yes
Target Temperature	No	No	Yes	Yes	Yes
Smoke Concentration	No	No	Yes	Yes	Yes
Oxygen Concentration	No	No	Yes	Yes	Yes
Room Pressure	No	No	Yes	Yes	Yes



## 2.5 Quantitative Validation

In keeping with the guidance in the ASTM E1355 and the objectives of this study, the following approach was used for quantification of the results of the validation of the selected fire models.

The numerical comparison between an experimental observation and a corresponding model prediction is referred to as “relative difference” throughout this report. Relative differences have been calculated for each of the attributes listed in Section 2.4 using point estimate peak values from fire experiments and model predictions. The following equation has been selected for relative difference calculations:

$$\varepsilon = \frac{\Delta M - \Delta E}{\Delta E} = \frac{(M_p - M_o) - (E_p - E_o)}{(E_p - E_o)}$$

where  $\Delta M$  is the difference between the peak value ( $M_p$ ) of the model prediction and the ambient value ( $M_o$ ), and  $\Delta E$  is the difference between the experimental observation ( $E_p$ ) and the ambient value ( $E_o$ ).

Table 2-3 summarizes the fire experiments and instruments used for quantitative validation of the different fire modeling parameters. The graphical comparisons of measured and predicted fire generated condition profiles and calculated relative differences for each of the five fire models are detailed in Appendix A to Volumes 2 through 6. This information is the basis for the conclusions summarized in this volume.

**Table 2-3: Summary of the Fire Tests Used for Validation against Typical NPP Fire Scenario Attributes**

Fire Modeling Parameters	Selected Test Series/Experiments/Sensors					
	ICFMP BE #3	ICFMP BE #5	FM/SNL	ICFMP BE #4	ICFMP BE #2	NIST Multi-Room Tests
	Tests 1-5, 7-10, 13-18	Test 4	Tests 4,5, & 21	Test 1	Part I, Cases 1, 2, 3	100A, 100O, 100Z
1. HGL temperature	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays
2. HGL height	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays	Vertical thermocouple arrays
3. Ceiling jet temperature	Thermocouple	NA	Thermocouple	NA	NA	NA
4. Plume temperature	NA	NA	Thermocouple	NA	Thermocouple	NA
5. Flame height	Pictures	No Data	No Data	No Data	Pictures	No Data
6. Radiant heat flux to target (cables)	Radiometers	No Data	No Data	No Data	No Data	No Data
7. Total heat flux to targets	Heat Flux Gauges	Heat Flux Gauges	No Data	Heat Flux Gauges	No Data	No Data
8. Total heat flux to walls	Heat Flux Gauges	No Data	No Data	No Data	No Data	No Data
9. Wall surface temperature	Thermocouples	Thermocouples	No Data	Thermocouples	No Data	No Data
10. Target (cable) surface temperature	Thermocouples	Thermocouples	No Data	Thermocouples	No Data	No Data

Fire Modeling Parameters	Selected Test Series/Experiments/Sensors					
	ICFMP BE #3	ICFMP BE #5	FM/SNL	ICFMP BE #4	ICFMP BE #2	NIST Multi-Room Tests
	Tests 1-5, 7-10, 13-18	Test 4	Tests 4,5, & 21	Test 1	Part I, Cases 1, 2, 3	100A, 100O, 100Z
11. Smoke concentration	Smoke Obs./Conc.	No Data	No Data	No Data	No Data	No Data
12. Oxygen concentration	Oxygen meter	Oxygen meter	No Data	Flawed Data	No Data	No Data
13. Room pressure	Pressure transducer	No Data	No Data	No Data	No Data	No Data

## 2.6 Reporting and Applicability of the Validation Results

Section 2.1 of this Volume listed typical nuclear power plant fire scenarios. The validation results of this study are limited by the general characteristics of the fire experiments selected. Consequently, the validation results need to be identified as corresponding to specific NPP fire scenarios to determine its applicability.

In general, the use of the quantitative results of this validation in support of fire modeling requires the following two steps:

1. *Applicability of V&V Results* - First, the user needs to assess the applicability of the validation results for the scenario under consideration, and
2. *Characterization of fire model predictions based on the V&V results* – Once the user determines the applicability of the validation, the user must determine the level of confidence in the model prediction based on the quantitative results of this validation.

### 2.6.1 Applicability of the V&V Results

The following is one method that may be used to determine applicability of these validation results to other scenarios of interest. The description of this method is reported here to demonstrate the rigor users should use in determining applicability of these validation results. Other methods may be appropriate.

The applicability of the validation results can be determined using normalized parameters traditionally used in fire modeling applications. Normalized parameters allow users to compare results from scenarios of different scales by normalizing physical characteristics of the scenario.

Table 2-4 lists selected normalized parameters that may be used to compare encountered scenarios with the experiments used in this validation study. It is intended to provide guidance on which groups to consider when evaluating a certain attribute based on the validation results. Table 2-5 lists the ranges of values for different physical characteristics and normalized parameters based on the experiments considered in this validation study.

The user could calculate the normalized parameters that are relevant to the fire scenario being evaluated. If the parameters fall within the ranges evaluated in this validation, then the results of this study offer appropriate validation for the scenario. If they fall outside the range, then a validation determination cannot be made based on the results in this study. For any given fire scenario, more than one normalized parameter may be necessary for determining applicability of the validation results.

**Table 2-4: List of selected normalized parameters for application of the validation results to NPP fire scenarios**

Parameter	Normalized Parameter	HGL Temp	HGL Height	Ceiling Jet Temp	Plume Temp	Flame Height	O2 Conc.	Room Press
Heat release rate	$Q^* = \frac{\dot{Q}}{\rho_{\infty} c_p T_{\infty} \sqrt{g} D D^2}$					X		
Fire diameter	$D^* = \left( \frac{\dot{Q}}{\rho_{\infty} c_p T_{\infty} \sqrt{g}} \right)^{2/5}$	X	X		X		X	
Room/Target height	$\frac{H}{D^*}$			X	X			
Ceiling jet radial distance	$\frac{r}{H}$			X				
Natural Ventilation	$\phi = \frac{\dot{m}_F / \dot{m}_{O_2}}{r} = \frac{\dot{Q} / \Delta H_c / 0.23 \times \frac{1}{2} A \sqrt{h}}{r}$ , AND $Q^* = \frac{\dot{Q}}{A_o \sqrt{H_o} \rho_{\infty} c_p T_{\infty} \sqrt{g}}$	X	X	(1)	(1)		X	X
Mechanical Ventilation	$\phi = \frac{\dot{m}_F / \dot{m}_{O_2}}{r} = \frac{\dot{Q} / \Delta H_c / 0.23 \times \frac{1}{2} \dot{V}}{r}$	X	X	(1)	(1)		X	X

Notes:

- (1) These parameters should be checked for ceiling-jet and plume temperature calculations when assuming well-ventilated compartment.

Following paragraphs describe each of the normalized parameters.

**Heat Release Rate (HRR or  $\dot{Q}$ ):** The most important parameter of any fire experiment is the heat release rate. In some cases, the fire model is used to predict the HRR. Here, however, the HRR is given, and the model is used to predict how the fire's energy is transported throughout the space of interest. A normalized quantity relating the HRR to the diameter of the fire,  $D$ , is commonly known as  $Q^*$ :

$$Q^* = \frac{\dot{Q}}{\rho_{\infty} c_p T_{\infty} \sqrt{g} D D^2}$$

Where:  $\dot{Q}$  is the heat release rate (kW),  
 $\rho_{\infty}$  is the ambient density (kg/m<sup>3</sup>),  
 $T_{\infty}$  is the ambient temperature (K),  
 $c_p$  is the specific heat (kJ/kg-K),  
 $g$  is the acceleration of gravity (m/s<sup>2</sup>), and  
 $D$  is the diameter of the fire (m).

A large value of  $Q^*$  describes a fire whose energy output is relatively large compared to its physical diameter, like an oil well blowout fire. A low value describes a fire whose energy output is relatively small compared to its diameter, like a brush fire. Most conventional accidental fire scenarios have  $Q^*$  values on the order of 1. Its relevance to the current validation study is mainly in the assessment of flame height.

**Fire Diameter:** The physical diameter of the fire is not always a well-defined property. A typical compartment fire may not have a well-defined diameter, whereas a circular pan filled with a burning liquid fuel has an obvious diameter. Fortunately, it is not the physical diameter of the fire that matters when assessing the "size" of the fire, but rather a characteristic diameter,  $D^*$ :

$$D^* = \left( \frac{\dot{Q}}{\rho_{\infty} c_p T_{\infty} \sqrt{g}} \right)^{2/5}$$

In many instances,  $D^*$  is comparable to the physical diameter of the fire (in which case  $Q^*$  is on the order of 1). This group should be used when the fire scenario consists of a fire with a given diameter. A good example application is the evaluation of validation results for unconfined oil spill fire scenarios.

**Room Height:** The quantities  $Q^*$  and  $D^*$  relate the fire's HRR to its physical dimensions. The height of the compartment relative to  $D^*$  indicates the relative importance of the fire plume to the overall transport of the hot gases. Much of the mixing of fresh air and combustion products takes place within the plume, and this dilution of the smoke and the decrease in the gas temperature ultimately determines the hot gas layer temperature. Thus, the parameter  $H/D^*$  can be used to assess the importance of the plume relative to other features of the fire-driven flow,

like the ceiling jet or doorway flow. This group is appropriate for evaluating applicability of validation results for scenarios involving targets inside the fire plume.

**Ventilation:** It is important to know whether a given compartment fire is limited by its fuel supply or by its oxygen supply. In all six test series, the fuel supply was specified as a test parameter. The oxygen supply was controlled either by the size of the compartment opening or by the flow rate of the ventilation system. Although less precise, it is possible to estimate the mass flow of oxygen for each test configuration. Where there is a door to the compartment, an estimate of the maximum achievable oxygen supply is given by:

$$\dot{m}_{O_2} = 0.23 \times \frac{1}{2} A \sqrt{h}$$

Where:  $A$  is the area of the opening ( $m^2$ )  
 $h$  is its height (m), and  
 0.23 is the mass fraction of oxygen in air.

Note that in many of the test series under consideration, this theoretical mass flow of oxygen was not achieved because the fires were of short duration. However, the estimate is useful for this exercise.

For an active ventilation system, the mass flow rate of oxygen is approximately

$$\dot{m}_{O_2} = 0.23 \times \rho_{\text{air}} \dot{V}$$

Where:  $\rho_{\text{air}}$  is the density of the air ( $kg/m^3$ ), and  
 $\dot{V}$  is the ventilation rate ( $m^3/sec$ )

Of course, not all of the air supplied by the ventilation system would reach the fire, especially for ceiling-mounted supply ducts.

The global equivalence ratio,  $\phi$ , is the ratio of the mass flow of fuel to the mass flow of oxygen, normalized by the stoichiometric ratio,  $r$ . The estimated values of  $\phi$  in the table above are based on the maximum fuel and oxygen flow rates for the given test series. The values are all considerably less than one, meaning that these fires would be characterized as *well-* or *over-ventilated*. The test with the highest value of  $\phi$  is ICFMP BE #4, Test 1, which has an equivalence ratio of about 0.6. It is also notable in that its HRR to volume ratio is about an order of magnitude larger than all the other test series. Although still over-ventilated, the fire is relatively large with respect to its compartment volume. All of the other fires could be characterized as relatively small with respect to the compartment.

**Table 2-5: Summary of the fire experiments in terms of commonly used metrics**

Test Series	$\dot{Q}$ (kW)	$Q^*$	$D$ (m)	$D^*$ (m)	$H$ (m)	$H/D^*$	$V$ (m <sup>3</sup> )	$\dot{m}_{O_2}$ (kg/s)	$\phi$
ICFMP BE #2	1800--3600	1.0	1.2, 1.6	1.2-3.6	19	12-16	5900	3.0	0.1
ICFMP BE #3	400--2300	0.4-1.9	1.0	0.7-1.3	3.8	3-5	580	0.6	0.3
ICFMP BE #4	3500	2.6	1.1	1.6	5.7	3.6	74	0.4	0.6
ICFMP BE #5	400	0.7	0.8	0.7	5.6	8	73	0.3	0.1
FM/SNL	500	0.5	0.9	0.7	6.1	9	1400	1.3	0.03
NBS Multi-Room	100	1.5	0.34	0.4	2.4	6	15	0.2	0.05

### 2.6.2 Characterization of Fire Model Predictions Based on Validation Results

Once the user determines the validation results reported here are applicable (see section 2.6.1), the user must determine the predictive capability of the fire models. The capability is characterized based on the quantitative results of the validation study and judgment of the V&V project team using criteria described below.

The process of deducing the predictive capability of the model from the quantitative results is documented in volumes 2 through 6 of this report. Appendix A to each volume contains detailed comparisons of model prediction and experimental measurements. Chapter 6 of these volumes describes how these quantitative results were used to arrive at the characterization of predictive capability of the model using the approach described below.

The following two criteria are used to characterize the predictive capability of the model:

**Criterion 1 - Are the physics of the model appropriate for the calculation being made?** This criterion reflects an evaluation of the underlying physics described by the model and the physics of the fire scenario. Generally the scope of this study is limited to the fire scenarios that are within the stated capability of the selected fire models, e.g., this study does not address the fire scenarios that involve flame spread within single and multiple cable trays.

**Criterion 2 - Are there calculated relative differences outside the experimental uncertainty?** This criterion is used as an indication of the accuracy of the model prediction. Since fire experiments are used as a way of establishing confidence in model prediction, the confidence can only be as good as our experiments. Therefore, if model predictions fall within the ranges of experimental uncertainties, the predictions are determined to be accurate. However, one should recognize that the experimental uncertainties vary with the experiment and the attribute being measured (see volume 7 of this report). These ranges could be as much as  $\pm 50\%$  for the experiments and attributes we used in this validation study. This leads to some judgment about the relative difference proximity relative to the range of uncertainty, as the uncertainty ranges are not necessarily all-inclusive or definitive.

The predictive capability of the model is characterized as follows based on the above criteria.



**GREEN**: If both criteria are satisfied, i.e., the model physics are appropriate for the calculation being made and the calculated relative differences are within or very near experimental uncertainty, then the V&V team concluded that the fire model prediction is accurate for the ranges of experiments in this study, and as described in tables 2-4 and 2-5. A grade of GREEN indicates the model can be used with confidence to calculate the specific attribute. The user should recognize, however, that the accuracy of the model prediction is still somewhat uncertain and for some attributes, such as smoke concentration and room pressure, these uncertainties may be rather large.

**YELLOW±**: If the first criterion is satisfied and the calculated relative differences are outside the experimental uncertainty but indicate a consistent pattern of model over-prediction or under-prediction, then the model predictive capability is characterized as YELLOW+ for over-prediction, and YELLOW- for under-prediction. The model prediction for the specific attribute may be useful within the ranges of experiments in this study, and as described in tables 2-4 and 2-5, but the users should take care and use caution when interpreting the results of the model. A complete understanding of model assumptions and scenario applicability to these V&V results is necessary. Generally, the model may be used if the grade is YELLOW+ when the user ensures that model over-prediction reflects conservatism. The user must exercise caution when using models with capabilities described as YELLOW±.

**YELLOW**: If the first criterion is satisfied and the calculated relative differences are outside experimental uncertainty with no clear pattern of over- or under-prediction, then the model predictive capability is characterized as YELLOW. Caution should be exercised when using a fire model for predicting these attributes. In this case, the user is referred to the details related to the experimental conditions and validation results documented in volumes 2 through 6. The user is advised to review and understand the model assumptions and inputs, as well as the conditions and results to determine and justify the appropriateness of the model prediction to the fire scenario for which it is being used.

**NO COLOR**: If the first criterion is not met, then the particular fire model capability should not be used.

**No color**: This V&V study did not investigate this capability. This may be due to one or more reasons that include unavailability of appropriate data or lack of model, sub-model, or output.

As suggested in the criteria above, there is a level of engineering judgment in the classification of fire model predictive capabilities. Specifically, engineering judgment is exercised in the following two areas:

1. Evaluation of the modeling capabilities of the particular tool if the model physics are appropriate.
2. Evaluation of the magnitude of relative differences when compared to the experimental uncertainty. Judgment in this area impacts the determination of Green versus Yellow colors.

In general, a Green or Yellow classification suggests that the V&V team determined that the model physics are appropriate for the calculation been made, within assumptions. The difference between the colors is due to the magnitude of the calculated relative differences. Judgment considerations include general experimental conditions, experimental data quality, and the characterization of the experimental uncertainty.



# 3

## RESULTS AND CONCLUSIONS

---

This chapter summarizes the results and findings of this V&V study. Section 3.1 presents the results using the approach discussed in section 2.6.2 of this Volume. Readers should also review Chapter 6 of Volumes 2 through 6 for more detailed discussions of the quantitative results. In addition, Appendix A to each volume presents a graphical representation of the experimental observations and outputs from the models.

Section 3.2 discusses observations concerning the results. These observations highlight patterns and relationships between the results presented and experiments. Section 3.3 contains our conclusion of our findings.

### 3.1 Results

#### 3.1.1 Validation

Table 3-1 summarizes the results of this validation study. As discussed in section 2.6.2, the predictive capabilities of the models are graded based on the quantitative values of relative difference between model prediction and experimental measurements.

The validation results show that none of the models have attributes that are RED. This is because all the models appropriately represent the physics of the scenarios, within the simplifying assumptions of the calculation method. Most of the correlations employed within the models were empirically confirmed theoretical derivations of general physical phenomena, as summarized in Chapter 3 of the volumes. All of the relative differences that fell significantly outside of the combined uncertainty could be explained in terms of the simplifying assumptions within the models and the comparison of these assumptions with the experimental configurations.

Results and Conclusions

**Table 3-1: Results of the Validation & Verification of the Selected Fire Models for Nuclear Power Plant Fire Modeling Applications**

Parameter		Fire Model				
		FDT <sup>S</sup>	FIVE-Rev 1	CFAST	MAGIC	FDS
Hot gas layer temperature ("Upper Layer Temperature")	Room of Origin	YELLOW+	YELLOW+	GREEN	GREEN	GREEN
	Adjacent Room			YELLOW	YELLOW	GREEN
Hot gas layer height ("Layer interface height")				GREEN	GREEN	GREEN
Ceiling jet temperature ("Target/Gas temperature")			YELLOW+ <sup>2</sup>		YELLOW	YELLOW
Plume temperature		YELLOW	YELLOW+ <sup>2</sup>		GREEN	GREEN
Flame height		GREEN	GREEN	GREEN	GREEN	YELLOW <sup>1</sup>
Oxygen concentration				GREEN	GREEN	GREEN
Smoke concentration				YELLOW	YELLOW	YELLOW
Room pressure				GREEN	GREEN	GREEN
Target temperature				YELLOW	YELLOW	YELLOW
Radiant heat flux		YELLOW	YELLOW	YELLOW	YELLOW	YELLOW
Total heat flux				YELLOW	YELLOW	YELLOW
Wall temperature				YELLOW	YELLOW	YELLOW
Total heat flux to walls				YELLOW	YELLOW	YELLOW

**Notes:**

1. FDS does not use an empirical correlation to predict the flame height. Rather, it solves a set of equations appropriate for reacting flows and predicts the flame height as the uppermost extent of the combustion zone. This is a challenging calculation and the Yellow emphasizes that caution should be exercised by users.
2. FIVE approximates the plume and ceiling jet temperature as the sum of hot gas layer temperature and plume and ceiling jet temperature obtained from the correlations.

### **3.1.2 Verification**

All five models have been verified by this study as appropriate for fire protection applications, within the assumptions for each individual model or sub model.

During the process of this study, a number of modifications and corrections to the five selected fire models were identified and implemented. These modification and corrections were identified during the validation as a result of trying to interpret the results. The nature of these modifications and corrections cover a wide range from inconsequential to those that could lead to incorrect result.

### **3.2 Summary**

This section presents a summary of observations from the results of this study. These observations are based on review of these results and generally apply to the five fire models considered in this study. While there may be valid technical reasons for some of these observations, it is not our intent to discuss the possible reasons and/or perspectives behind these observations.

- A clear general pattern of more accurate predictions by any one model is not apparent. While some of the models are more accurate in predicting certain attributes they may be less accurate in predicting other attributes in the same scenario.
- For the fire scenarios considered in the current validation study, and for the output quantities of interest, the libraries of engineering calculations (FDT<sup>s</sup>, FIVE-Rev1) have limited capabilities. These libraries do not have appropriate methods for estimating many of the fire scenario attributes evaluated in this study. The correlations the libraries do have are empirically derived and contain many inherently limiting assumptions. The user must be cautious when using these tools.
- The two-zone models performed well when compared with the experiments considered. These models have a much wider capability of predicting the fire scenario attributes important in NPPs. As indicated by the validation results, these models accurately predicted the attributes evaluated in this study. The reason for this may be the relatively simple experimental configurations conform well to the simple two-layer assumption that is the basis of these models. However, users must remain cautious when applying these models to more complex scenarios, or when predicting complicated phenomena, like heat fluxes.
- For the experiments considered, the results of the field model, FDS, are not significantly better than those of the two-zone models that are also evaluated in this study (CFAST, Volume 4 and MAGIC, Volume 5). FDS solves the basic transport equations instead of empirical correlations, making it a more predictive model. However, the computational cost of solving the basic equations is substantial. The two-zone models produce answers in seconds to minutes, while FDS produces comparable answers in hours to days. FDS is better suited to predict fire environments within more complex configurations because it predicts the local effects of a fire.
- The decision to use any of these models can depend on many considerations. Rarely do real fire scenarios conform neatly to some of the simplifying assumptions inherent in the models.

Fire plumes are rarely free and clear of obstacles -- fires often occur in cabinets or near walls. Ceilings are rarely flat and unobstructed -- duct work and cable trays often block the clear paths. Although engineering calculations and two-zone models can be applied in some of these instances, their accuracy cannot be assured. Field model predictions can be more accurate in more complex scenarios. However, the time it takes to get and understand a prediction may also be an important consideration in the decision to use a particular model for a specific scenario.

- Like all predictive models, the best predictions come with a clear understanding of the limitations of the model and of the inputs provided to do the calculations.

### **3.3 Conclusions**

This study provides justification for verification and provides validation via comparisons between experimental data collected in large-scale fire tests and predictions from five fire modeling tools. The validation results of this study are presented in the form of color-coded characterization of the predictive capability of fire models for important parameters for NPP fire modeling applications. These characterizations are developed based on the quantitative relative differences that are calculated using model prediction and applicable experimental measurements. The judgment of predictive capability considers the uncertainty in the experimental measurements.

The results of this study are limited somewhat by a lack of relevant data from fire experiments that represent NPP fire scenarios. The study is also limited by the capability of the models to simulate all potential NPP fire scenarios, such high-energy arching faults and ensuing fires and fire propagation between control panels. These much more complicated fire scenarios can be analyzed using the methods described in NUREG/CR-6850 [Ref. 6].

The use of fire models to support fire protection decision-making requires understanding of their limitations and confidence in their predictive capabilities. While this report tends to improve the confidence level in some cases, it also shows that some models are limited in their applications based on relative differences between experimental data and model calculations. Fully understanding the predictive capabilities of fire models is a challenge that should be addressed if the fire protection community is to realize the full benefit of fire modeling.

The results of this project clearly suggest that any fire modeling analysis should consider the predictive capabilities associated with the analytical tool when interpreting its results.





# 4

## REFERENCES

---

1. Performance-Based Standard for Fire Protection for Light-Water Reactor Electric Generating Plants, NFPA 805, 2001 Edition, National Fire Protection Association, Brainerd, MA, 2001.
2. "Voluntary Fire Protection Requirements for Light Water Reactors," 10 CFR Part 50, RIN 3150-AG48, *Federal Register*, Volume 69, Number 115, U.S. Nuclear Regulatory Commission, Washington, DC, June 16, 2004.
3. Memorandum of Understanding (MOU) on Cooperative Nuclear Safety Research Between EPRI and NRC, Amendment on Fire Risk, Revision 1, 2001.
4. *Standard Guide for Evaluating Predictive Capability of Deterministic Fire Models*, ASTM E1355-05, American Society for Testing and Materials, West Conshohocken, PA, 2004.
5. *Fire Modeling Guide for Nuclear Power Plant Applications*, EPRI 1002981, Electric Power Research Institute, Palo Alto, CA, August 2002.
6. EPRI 1011989 and NUREG/CR-6850, "EPRI/NRC-RES Fire PRA Methodology for Nuclear Power Facilities," August 2005.
7. NUREG-1805, "Fire Dynamics Tools (FDT<sup>®</sup>): Quantitative Fire Hazard Analysis Methods for the U.S. Nuclear Regulatory Commission Fire Protection Inspection Program," dated December 2004.
8. Jones, W., R. Peacock, G. Forney, and P. Reneke, "CFAST: An Engineering Tool for Estimating Fire and Smoke Transport, Version 5—Technical Reference Guide," SP 1030, National Institute of Standards and Technology, Gaithersburg, MD (2004).
9. L. Gay, C. Epiard "MAGIC Software Version 4.1.1: Mathematical model" EDF HI82/04/024/P, December 2004.
10. "Fire Dynamics Simulator (Version 4) Technical Reference Guide," K. McGrattan ed., National Institute of Standards and Technology, Special Publication 1018 (2004).
11. NUREG/CR-4681, "Enclosure Environment Characterization Testing for the Base Line Validation of Computer Fire Simulation Codes," March 1987.
12. NUREG/CR-5384, "A Summary of Nuclear Power Plant Fire Safety Research at Sandia National Laboratories, 1975–1987," dated December 1989
13. NBSIR 88-3752, "An Experimental Data Set for the Accuracy Assessment of Room Fire Models," April 1988
14. EPRI 108875, "Fire Modeling Code Comparison," September 1998.

---

*References*

15. Hostikka, S., Kokkala, M., Vaari, J., "Experimental Study of the Localized Room Fires," NFDC2 Test Series, VTT Research Notes 2104, 2001.
16. Hamins, A., Maranghides, A., Johnsson, E., Donnelly, M., Yang, J., Mulholland, G., and Anleitner, R., *Report of Experimental Results for the International Fire Model Benchmarking and Validation Exercise #3*, NIST Special Publication 1013-1, National Institute of Standards and Technology, Gaithersburg, MD, 2005.
17. Klein-Heßling, W. and M.Röwenkamp, *Evaluation of Fire Models for Nuclear Power Plant Applications: Fuel Pool Fire inside a Compartment*. May 2005.
18. Hosser, D., Jäse, O., and Klingenberg, M., *Performing of Recent Real Scale Cable Fire Experiments and Presentation of the Results in the Frame of the International Collaborative Fire Modeling Project ICFMP*, June 2004.

**BIBLIOGRAPHIC DATA SHEET**

(See instructions on the reverse)

NUREG-1824

2. TITLE AND SUBTITLE

Verification & Validation of Selected Fire Models For Nuclear Power Plant Applications  
Volume 1 : Main Report Draft Report for Comment

3. DATE REPORT PUBLISHED

MONTH

YEAR

January

2006

4. FIN OR GRANT NUMBER

5. AUTHOR(S)

Jason Driesbach (NRC), Kendra Hill (NRC), Francisco Joglar-Biloch (EPRI/SAIC), Bijan Najafi (EPRI/SAIC), Kevin McGrattan (NIST), Richard Peacock (NIST), Anthony Hamins (NIST)

6. TYPE OF REPORT

Technical

7. PERIOD COVERED (Inclusive Dates)

8. PERFORMING ORGANIZATION - NAME AND ADDRESS (If NRC, provide Division, Office or Region, U.S. Nuclear Regulatory Commission, and mailing address; if contractor, provide name and mailing address.)

U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research (RES), Washington, DC 20555-0001  
Electric Power Research Institute (EPRI), 3412 Hillview Avenue, Palo Alto, CA 94303  
National Institute of Standards and Technology, 100 Bureau Drive, Stop 8600, Gaithersburg, MD 20899  
Science Applications International Corp (SAIC), 4920 El Camino Real, Los Altos, CA 94022

9. SPONSORING ORGANIZATION - NAME AND ADDRESS (If NRC, type "Same as above"; if contractor, provide NRC Division, Office or Region, U.S. Nuclear Regulatory Commission, and mailing address.)

U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research (RES), Washington, DC 20555-0001  
Electric Power Research Institute (EPRI), 3412 Hillview Avenue, Palo Alto, CA 94303

10. SUPPLEMENTARY NOTES

11. ABSTRACT (200 words or less)

There is a movement to introduce risk- and performance-based analyses into fire protection engineering practice, both domestically and worldwide. This movement exists in the general fire protection community, as well as the nuclear power plant (NPP) fire protection community. In 2002, the National Fire Protection Association (NFPA) developed NFPA 805, Performance-Based Standard for Fire Protection for Light-Water Reactor Electric Generating Plants, 2001 Edition. In July 2004, the U.S. Nuclear Regulatory Commission (NRC) amended its fire protection requirements in Title 10, Section 50.48, of the Code of Federal Regulations (10 CFR 50.48) to permit existing reactor licensees to voluntarily adopt fire protection requirements contained in NFPA 805 as an alternative to the existing deterministic fire protection requirements. In addition, the nuclear fire protection community wants to use risk-informed, performance-based (RI/PB) approaches and insights to support fire protection decision-making in general. One key tool needed to support RI/PB fire protection is the availability of verified and validated fire models that can reliably predict the consequences of fires. Section 2.4.1.2 of NFPA 805 requires that only fire models acceptable to the Authority Having Jurisdiction (AHJ) shall be used in fire modeling calculations. Further, Sections 2.4.1.2.2 and 2.4.1.2.3 of NFPA 805 state that fire models shall only be applied within the limitations of the given model, and shall be verified and validated. This report is the first effort to document the verification and validation (V&V) of five fire models that are commonly used in NPP applications. The project was performed in accordance with the guidelines that the American Society for Testing and Materials (ASTM) set forth in Standard E1355-04, "Evaluating the Predictive Capability of Deterministic Fire Models." The results of this V&V are reported in the form of ranges of accuracies for the fire model predictions.

12. KEY WORDS/DESCRIPTORS (List words or phrases that will assist researchers in locating the report.)

Fire, Fire Modeling, Verification and Validation (V&V),  
Performance-based, Risk-informed regulation, Fire Hazard Analysis (FHA)  
Fire safety, Fire protection, Nuclear Power Plant  
Fire Probabilistic Risk Assessment (PRA), Fire Probabilistic Safety Assessment (PSA)

13. AVAILABILITY STATEMENT

unlimited

14. SECURITY CLASSIFICATION

(This Page)


unclassified

(This Report)

unclassified

15. NUMBER OF PAGES

16. PRICE



**Federal Recycling Program**