



Nebraska Public Power District

"Always there when you need us"

NLS2010048

May 14, 2010

U.S. Nuclear Regulatory Commission
Attention: Document Control Desk
Washington, D.C. 20555-0001

Subject: Annual Radiological Environmental Report
Cooper Nuclear Station, Docket No. 50-298, DPR-46

Dear Sir or Madam:

The purpose of this letter is to submit the Cooper Nuclear Station (CNS) Annual Radiological Environmental Report for the period January 1, 2009, through December 31, 2009. The enclosed report is being submitted per the requirements of Technical Specification 5.6.2 and CNS Offsite Dose Assessment Manual Section D 5.2.

Should you have any questions or require additional information, please contact me at (402) 825-2904.

Sincerely,

David W. Van Der Kamp
Licensing Manager

/jf

Enclosure

cc: Regional Administrator w/ enclosure
USNRC - Region IV

NPG Distribution w/o enclosure

Cooper Project Manager w/ enclosure
USNRC - NRR Project Directorate IV-1

CNS Records w/ enclosure

Senior Resident Inspector w/ enclosure
USNRC - CNS

COOPER NUCLEAR STATION

P.O. Box 98 / Brownville, NE 68321-0098

Telephone: (402) 825-3811 / Fax: (402) 825-5211

www.nppd.com

JE25
NRR

Correspondence Number: NLS2010048

The following table identifies those actions committed to by Nebraska Public Power District (NPPD) in this document. Any other actions discussed in the submittal represent intended or planned actions by NPPD. They are described for information only and are not regulatory commitments. Please notify the Licensing Manager at Cooper Nuclear Station of any questions regarding this document or any associated regulatory commitments.

COMMITMENT	COMMITMENT NUMBER	COMMITTED DATE OR OUTAGE
None		

NLS2010048
Enclosure

Enclosure

Annual Radiological Environmental Report
January 1, 2009 through December 31, 2009

NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
Radiological Environmental Monitoring Program
2009 Annual Report
January 1, 2009 to December 31, 2009

Prepared by
Teledyne Brown Engineering
2508 Quality Lane
Knoxville, TN 37931-3133

TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
	Preface.....	6
I.	Introduction.....	7
II.	Summary.....	10
III.	Sampling and Analyses Program.....	12
IV.	Summary and Discussion of 2009 Analytical Results.....	17
	A. Airborne Particulates.....	19
	B. Airborne Iodine.....	20
	C. Fish.....	21
	D. Milk – Nearest Producer.....	22
	E. Milk – Other Producers.....	23
	F. Ground Water.....	24
	G. River Water.....	25
	H. Thermoluminescent Dosimeters.....	26
	I. Food – Broadleaf Vegetation.....	27
	J. Shoreline Sediment.....	29
	K. Errata Data.....	30
V.	Conclusions.....	31
VI.	Radiological Environmental Monitoring Program Summary	
	Table – 2009.....	33
VII.	Complete Data Tables.....	39
VIII.	References.....	99

TABLE OF CONTENTS (Cont)

APPENDICES

APPENDIX A – 2009 Land Use Census A-1

APPENDIX B – Summary of Interlaboratory ComparisonsB-1

APPENDIX C – Synopsis of Analytical ProceduresC-1

APPENDIX D – Detection Limits and Reporting Levels D-1

APPENDIX E – REMP Sampling and Analytical ExceptionsE-1

APPENDIX F – Summary of Doses to a Member of the Public Offsite F-1

APPENDIX G – REMP Sample Station Descriptions G-1

APPENDIX H – Annual Radiological Groundwater Protection Program
(ARGPP) Report H-1

APPENDIX I – Non-ODAM Required Sampling, Supplementary StationsI-1

LIST OF FIGURES

1. Maps of Sampling Stations15

TABLE OF CONTENTS (Cont)

LIST OF TRENDING GRAPHS

1.	Gross Beta in Air Particulates.....	19
2.	Iodine-131 in Charcoal Filters	20
3.	Cesium-137 in Fish	21
4.	Iodine-131 and Cesium-137 in Milk – Nearest Producer	22
5.	Iodine-131 and Cesium-137 in Milk – Other Producers.....	23
6.	Tritium in Ground Water	24
7.	Tritium in River Water.....	25
8.	Thermoluminescent Dosimetry.....	26
9.	Iodine-131 and Cesium-137 in Food – Broadleaf Vegetation	27
10.	Cesium-134 and Cesium-137 in Shoreline Sediment	29

TABLE OF CONTENTS (Cont)

LIST OF TABLES

1	Sampling and Analyses Program.....	12
VII-1	Exposure Pathway – Airborne Air Particulate & Charcoal Filters	40
VII-2	Exposure Pathway – Airborne Composite Air Particulate Filters	60
VII-3	Exposure Pathway – Ingestion Fish.....	70
VII-4	Exposure Pathway – Ingestion Milk Nearest Producer	72
VII-5	Exposure Pathway – Ingestion Milk Other Producers.....	76
VII-6	Exposure Pathway – Ingestion Water – Ground.....	77
VII-7	Exposure Pathway – Ingestion Water – River	81
VII-8	Exposure Pathway – Thermoluminescent Dosimetry – TLD	87
VII-9	Exposure Pathway – Ingestion Vegetation – Terrestrial, Broadleaf....	89
VII-10	Exposure Pathway – Airborne Shoreline Sediment.....	97

PREFACE

This report covers the period of January 1 through December 31, 2009. Personnel of the Nebraska Public Power District made all sample collections. Analyses were performed and reports of analyses were prepared by Teledyne Brown Engineering – Environmental Services and forwarded to Nebraska Public Power District. Environmental Thermoluminescent Dosimeter (TLD) analyses were performed and reports of analyses were prepared by Global Dosimetry Solutions.

SECTION I. INTRODUCTION

I. INTRODUCTION

This report contains a complete tabulation of data collected during the period January through December 2009, for the operational Radiological Environmental Monitoring Program performed for the Cooper Nuclear Station (CNS) of the Nebraska Public Power District (NPPD) by Teledyne Brown Engineering - Environmental Services.

Cooper Nuclear Station is located in Nemaha County in the southeast corner of Nebraska on the Missouri River. A portion of the site extends into Missouri. The reactor is an 830-megawatt (net electrical) boiling water reactor. Initial criticality was attained on February 21, 1974.

Radiological environmental monitoring began in 1971 before the plant became operational and has continued to the present. The program monitors radiation levels in air, terrestrial and aquatic environments. All samples are collected by NPPD personnel. All samples are shipped for analysis to a contractor's laboratory where there exists special facilities required for measurements of extremely low levels of radioactivity. Teledyne Brown Engineering - Environmental Services has the responsibility for the analyses for Cooper Nuclear Station.

The United States Nuclear Regulatory Commission (USNRC) regulations (10CFR50.34a) require that nuclear power plants be designed, constructed, and operated to keep levels of radioactive material in effluents to unrestricted areas as low as is reasonably achievable (ALARA). Inplant monitoring is used to ensure that release limits are not exceeded. As a precaution against unexpected or undefined environmental processes, which might allow undue accumulation of radioactivity in the environment, a program for monitoring the plant environs is included in NPPD's CNS Offsite Dose Assessment Manual (ODAM).

A. Atmospheric Nuclear Tests

Three atmospheric nuclear detonations in the People's Republic of China influenced program results significantly in late 1976 and in 1977. Two of these detonations occurred in late 1976 (September 26 and November 17) and one in late 1977 (September 17). As a consequence of these tests elevated activities of gross beta in air particulate filters and I-131 in milk were observed throughout most of the United States. No atmospheric nuclear tests have been conducted since 1980, thus no short-lived fission products were detected in air particulate samples.

On April 26, 1986 the fire and explosion of Chernobyl Reactor No. 4 in the Soviet Union resulted in the release of fission products to the atmosphere and worldwide fallout. Following the explosion, elevated levels of gross beta activities in air particulates and Iodine-131 in charcoal filters and milk samples were measured. Additionally, in 1986, Cesium-137 and the short-lived radionuclides Iodine-131, Ruthenium-106, and Cesium-134 were detected in broadleaf vegetation. Similar results occurred in other areas of the United States and the entire Northern Hemisphere.

B. Program Objectives and Data Interpretation

The objective of the monitoring program is to detect and assess the impact of possible releases to the environs of radionuclides from the operations of the Cooper Nuclear Station. This objective requires measurements of low levels of radioactivity equal to or lower than pre-determined limits of detection. In addition the source of the environmental radiation must be established. Sources of environmental radiation include:

- (1) Natural background radiation from cosmic rays (Beryllium-7).
- (2) Terrestrial, primordial radionuclides from the environment (potassium-40, radium-226, thorium-232).
- (3) Fallout from atmospheric nuclear tests such as the September 1977 detonation by the Peoples' Republic of China and the atmospheric weapons test of October 16, 1980 (fission products and fusion products).
- (4) Releases from nuclear power plants such as CNS (fission products and neutron activation products).
- (5) Fallout from the Chernobyl Nuclear Reactor Accident.

Radiation levels measured in the vicinity of an operating power station are compared with preoperational measurements at the same locations to distinguish power plant effects from other sources. Also, results of the monitoring program are related to events known to cause elevated levels of radiation in the environment, e.g., atmospheric nuclear detonations or abnormal plant releases.

SECTION II. SUMMARY

II. SUMMARY

Presented in this report are summaries and discussions of the data generated for the Radiological Environmental Monitoring Program (REMP) for the Cooper Nuclear Station (CNS) of the Nebraska Public Power District (NPPD) for 2009.

The sampling and analyses program is described in Section III. It contains the sampling schedule and required analyses in Table 1 and the site map.

A discussion of each type of sample analyzed and its impact, if any, on the environment is presented in Section IV. Included are graphs of the radionuclides of interest for the past several years and the statistical results for each quarter of the year.

Section V presents the yearly conclusions of the program.

Section VI is the Radiological Environmental Monitoring Program Summary. It contains the yearly summary of the program with the total number of samples of each type analyzed. It lists the yearly average and range for the control locations versus the indicator locations and the number of detections per total number of samples. It identifies the station with the highest yearly average, the distance and location of that station and provides the range of detection.

Section VII contains the complete data tables for the period.

References are presented in Section VIII.

SECTION III. SAMPLING AND ANALYSES PROGRAM

III. SAMPLING AND ANALYSES PROGRAM

The 2009 sampling and analyses program is described in Table 1. Teledyne Brown Engineering - Environmental Services has a comprehensive quality assurance/quality control program designed to assure the reliability of data obtained. The results for the 2009 Interlaboratory Comparison Program conducted by the Analytics⁷, Inc., MAPEP and Environmental Resource Associates are contained in Appendix B.

Sampling locations are indicated in the map labeled Figure 1. The sample types collected at each location and the approximate distance and direction from the reactor elevated release point are specified.


The annual land use census for 2009 is described in Appendix A. There were no milk animals found within three miles of CNS in 2009 and no evidence of potable water use from the river. The nearest garden to CNS is in sector L, 1.3 miles from CNS. Gardens were found in nine sectors during 2000, in eight sectors during 2001, in seven sectors during 2002, in eight sectors during 2003, in nine sectors during 2004, in five sectors during 2005, in nine sectors during 2006, in seven sectors during 2007, in six sectors during 2008 and in nine sectors during 2009. The nearest resident to CNS is in sector Q, 0.9 miles from CNS.


All of the required 2009 environmental monitoring, including sampling and analyses, was conducted as specified in Table D4.1-1 of the CNS Offsite Dose Assessment Manual (ODAM), except as noted in Appendix E, REMP Sampling and Analytical Exceptions table.

TABLE 1

NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
Environmental Radiation Surveillance Program
Sampling Schedule and Analyses

<i>Sample Type</i>	<i>Station</i>	<i>Frequency</i>	<i>Analyses</i>
Airborne/ Particulate	1-10	Once per 7 days	Gross beta. Gamma Isotopic on quarterly composite of each station, and on each sample in which gross beta activity is >10 times the yearly mean of control samples
Airborne/Iodine	1-10	Once per 7 days	I-131
Milk / Nearest Producer peak pasture only	99	Once per 15 days	I-131 (low level), Gamma Isotopic analysis of each sample
River Water	28, 35	Once per 31 days	Gamma Isotopic, each sample Tritium on quarterly composite
Milk/ Nearest Producer Non-peak pasture	99	Once per 31 days	I-131 (low level), Gamma Isotopic analysis of each sample
Food Products / Broadleaf Vegetation	28, 35, 96, 101	Monthly when required	I-131 (low level), Gamma Isotopic analysis of each sample
Background Radiation Thermoluminescent Dosimeters	1-10, 20, 44, 56, 58, 59, 66, 67, 71, 79-91, 94,	Once per 92 days	TLD Readout (gamma dose)
Groundwater	11, 47	Once per 92 days	I-131 (low level), Gamma Isotopic, Tritium
Milk Other Producers	103	Once per 92 days	I-131 (low level), Gamma Isotopic
Fish (Summer and Fall)	28, 35	Two times per year	Gamma Isotopic on edible portions
Shoreline Sediment	28, 35	Two times per year	Gamma Isotopic

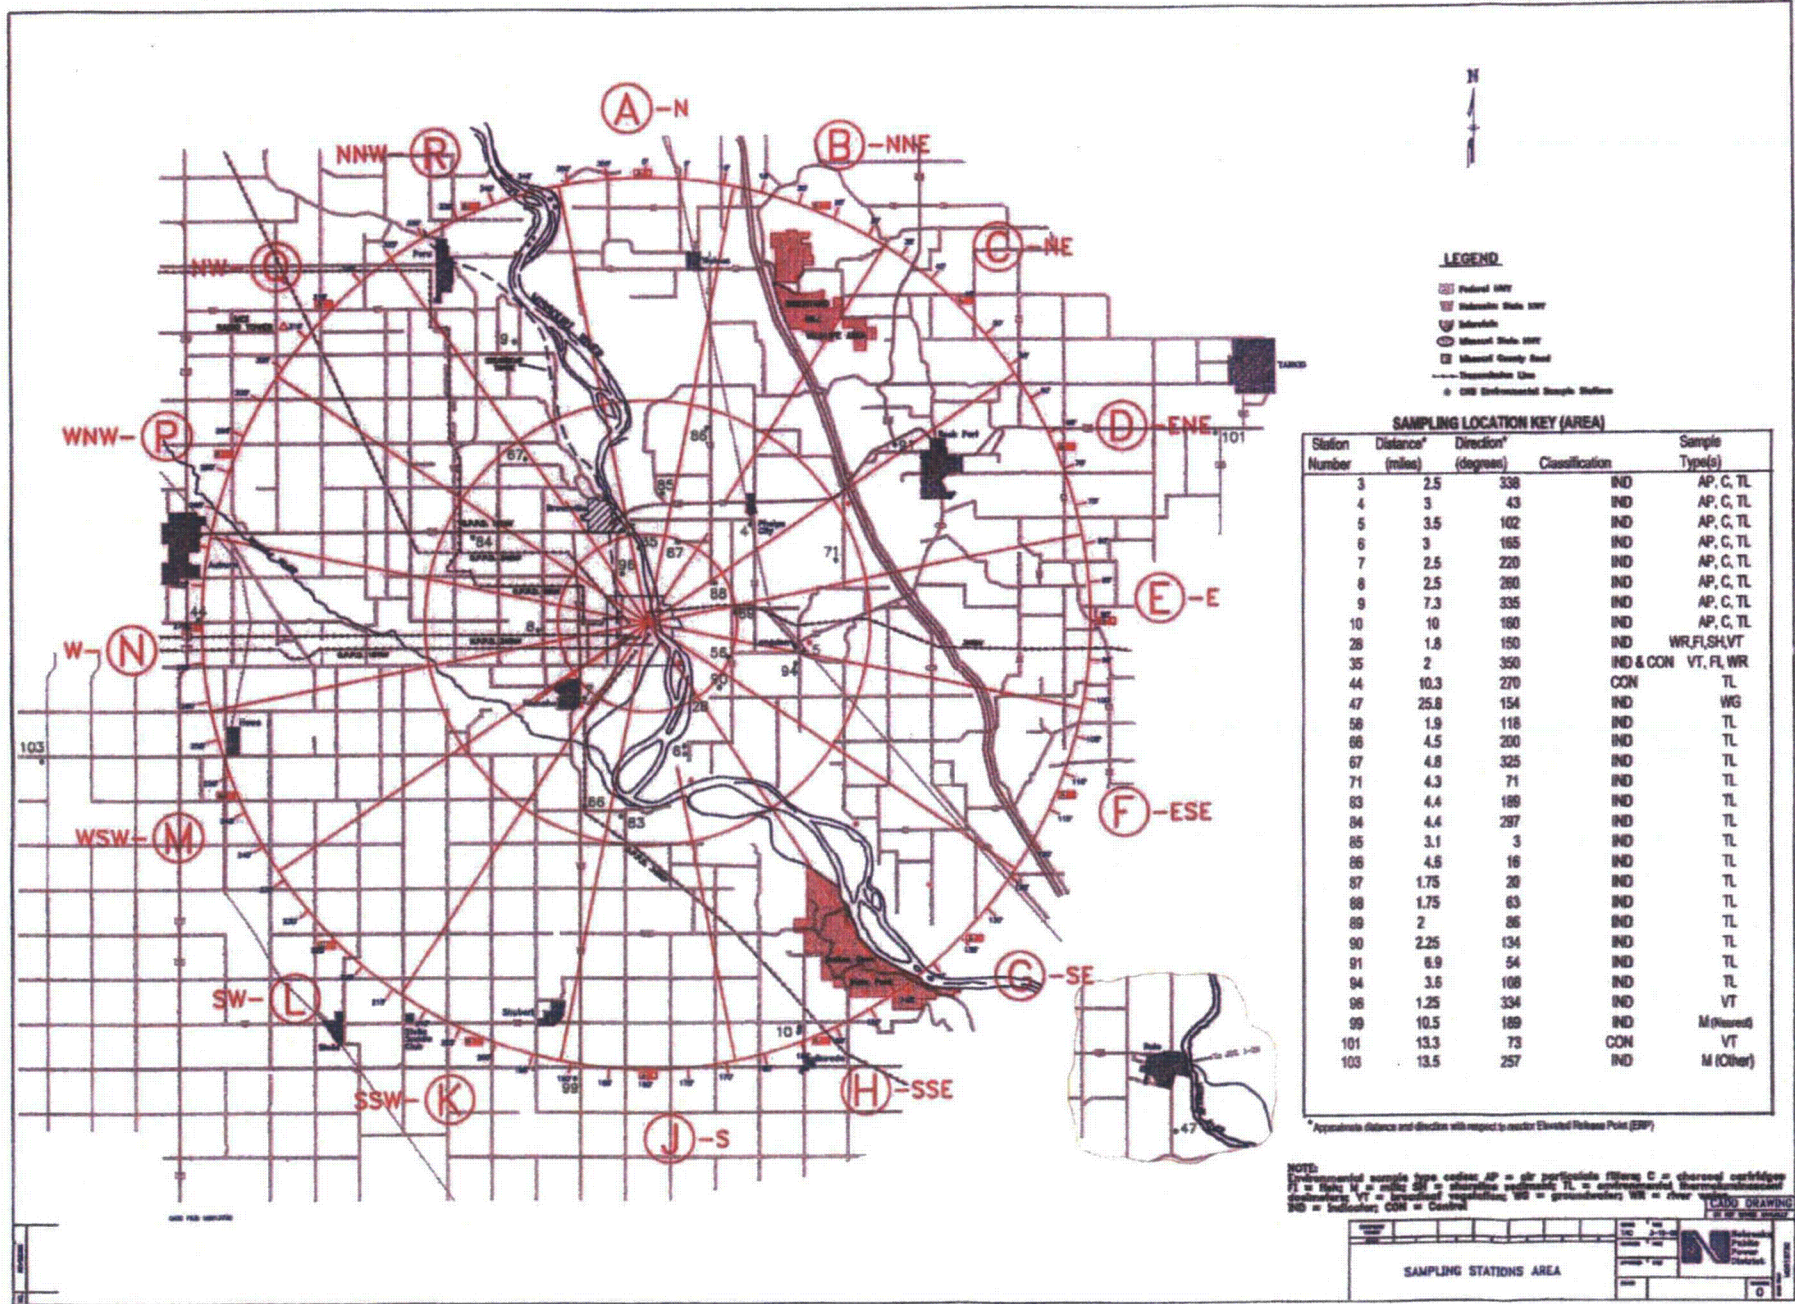

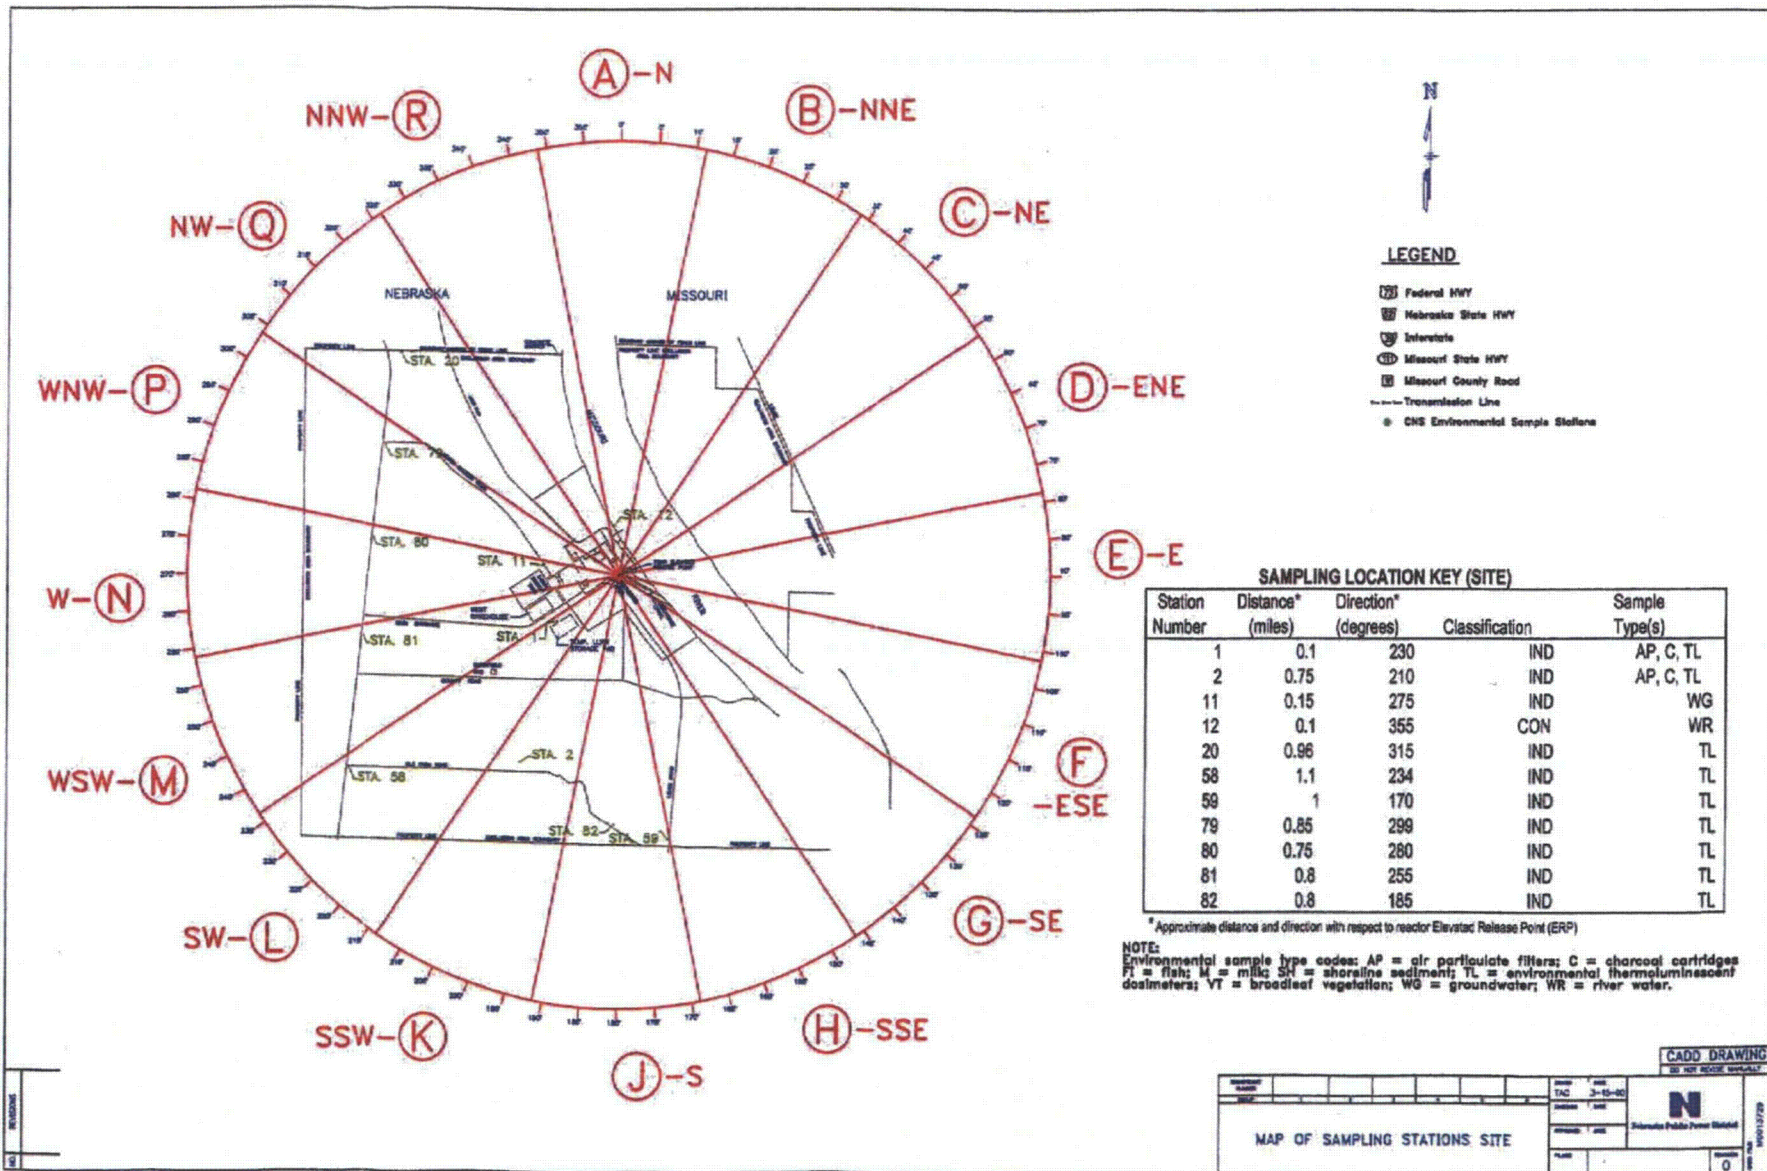

LEGEND

- Federal HWY
- Nebraska State HWY
- Interstate
- Missouri State HWY
- Missouri County Road
- Transmission Line
- CNS Environmental Sample Stations

SAMPLING LOCATION KEY (SITE)

Station Number	Distance* (miles)	Direction* (degrees)	Classification	Sample Type(s)
1	0.1	230	IND	AP, C, TL
2	0.75	210	IND	AP, C, TL
11	0.15	275	IND	WG
12	0.1	355	CON	WR
20	0.96	315	IND	TL
58	1.1	234	IND	TL
59	1	170	IND	TL
79	0.85	299	IND	TL
80	0.75	280	IND	TL
81	0.8	255	IND	TL
82	0.8	185	IND	TL

* Approximate distance and direction with respect to reactor Elevated Release Point (ERP)

NOTE: Environmental sample type codes: AP = air particulate filters; C = charcoal cartridges; F = fish; M = milk; SH = shoreline sediment; TL = environmental thermoluminescent dosimeters; VT = broadleaf vegetation; WG = groundwater; WR = river water.

CADD DRAWING
DO NOT SCALE DRAWING

<p>MAP OF SAMPLING STATIONS SITE</p>	<p>Nebraska Public Power District 0</p>
--------------------------------------	---------------------------------------------

SECTION IV. SUMMARY AND DISCUSSION OF 2009 ANALYTICAL RESULTS

IV. SUMMARY AND DISCUSSION OF 2009 ANALYTICAL RESULTS

Data from the radiological analyses of environmental media collected during 2009 are tabulated and discussed below. The procedures and specifications followed in the laboratory for these analyses are as required in the Teledyne Brown Engineering Quality Assurance manual and are explained in the Teledyne Brown Engineering Analytical Procedures. A synopsis of analytical procedures used for the environmental samples is provided in Appendix C. In addition to internal quality control measures performed by Teledyne Brown Engineering, the laboratory also participates in an Interlaboratory Comparison Program. Participation in this program ensures that independent checks on the precision and accuracy of the measurements of radioactive material in environmental samples are performed. The results of the Interlaboratory Comparison are provided in Appendix B.

Radiological analyses of environmental media characteristically approach and frequently fall below the detection limits of state-of-the-art measurement methods. The "less than" values in the data tables were calculated from each specific analysis and are dependent on sample size, detector efficiency, length of counting time, chemical yield (when appropriate) and the radioactive decay factor from time of counting to time of collection. Teledyne Brown Engineering's analytical methods meet or are below the Lower Limit of Detection (LLD) requirements given in Table 2 of the USNRC Branch Technical Position, Radiological Monitoring Acceptable Program (November 1979, Revision 1). Appendix C contains a discussion of the LLD formulas.

The following is a discussion and summary of the results of the environmental measurements taken during the 2009 reporting period (Graphs now only reflect the last ten years data):


A. Airborne Particulates

Gross beta activity was observed in 515 of the 518 indicator samples collected during 2009. The average concentration was 0.022 pCi/m³ with a range of 0.008 to 0.096 pCi/m³. The results of the gross beta activities are presented in Section VII-1 and Trending Graph 1. The gross beta activities for 2009 were comparable to levels measured in the previous several years. Prior to that period the gross beta activities were higher due to atmospheric nuclear weapons testing performed in other countries. The preoperational period of 1971 through 1974 averaged 0.098 pCi/m³ gross beta.

Air particulate filters were collected weekly and composited by locations on a quarterly basis. They were analyzed by gamma ray spectroscopy. The results are presented in Section VII-2. Beryllium-7, which is produced continuously in the upper atmosphere by cosmic radiation, was measured in 29 of 40 composite samples. The indicator locations had an average concentration of 0.166 pCi/m³ with a range of 0.098 to 0.250 pCi/m³. During the preoperational period, beryllium-7 was measured at comparable levels. Thorium-228 was measured in one sample at a concentration of 0.018 pCi/m³. All other gamma emitters were below the detection limits.

TRENDING GRAPH 1

GROSS BETA IN AIR PARTICULATES
MONTHLY AVERAGE – ALL LOCATIONS

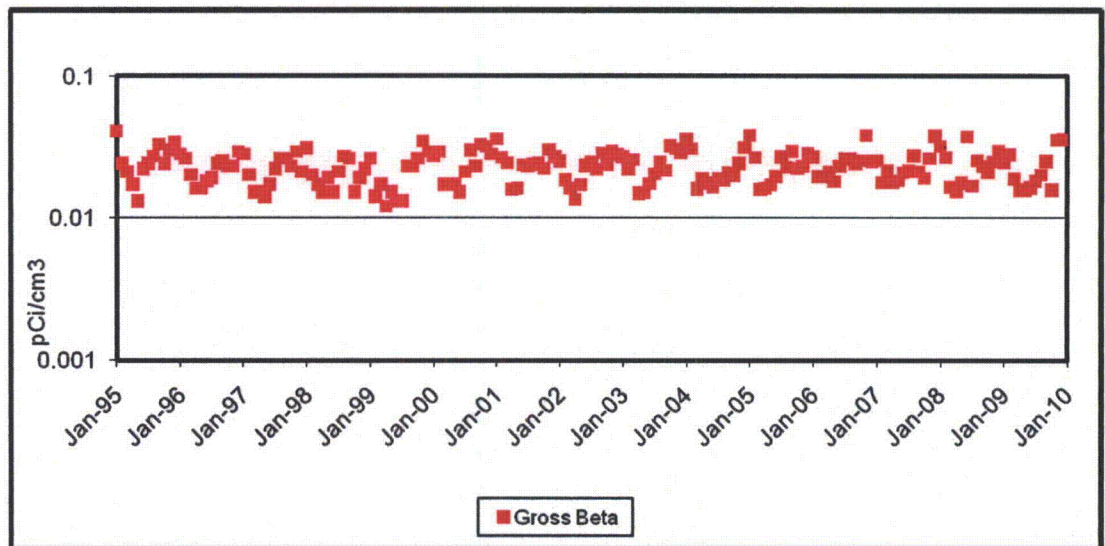


B. Airborne Iodine

Charcoal cartridges used to collect airborne iodine were collected weekly and analyzed by gamma spectrometry for iodine-131. Stations 01 through 10 were monitored. The results are presented in Section VII-1 and Trending Graph 2. All results were below the required lower limit of detection.

TRENDING GRAPH 2

IODINE-131 IN CHARCOAL FILTERS
MONTHLY AVERAGE – ALL LOCATIONS

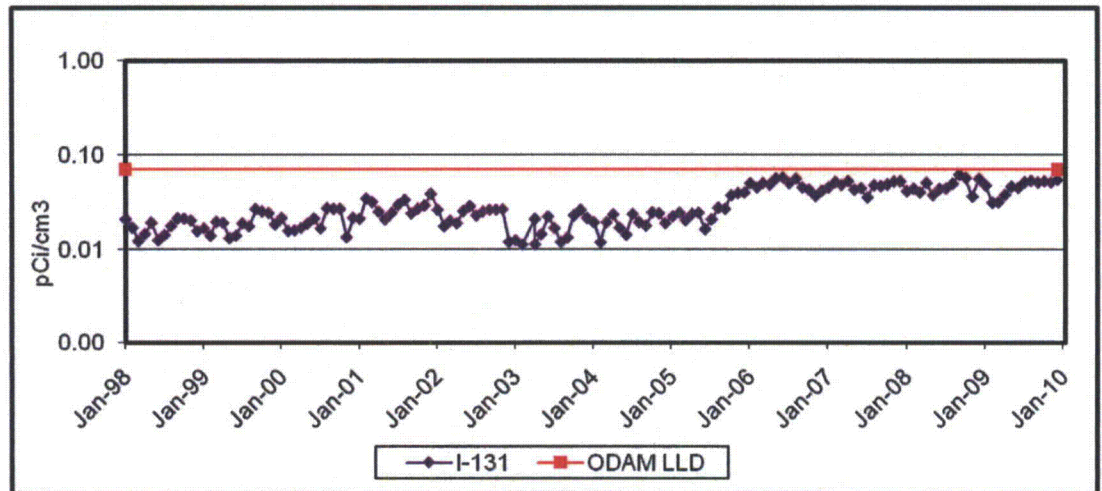


Trending Graph 2 represents minimum detectable concentration (MDC) results. This graph has the ODAM LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

C. *Fish*

Aquatic biota can be sensitive indicators of radionuclide accumulation in the environment because of their ability to concentrate certain chemical elements, which have radioisotopes. The results are presented in Table VII-3 and Trending Graph 3. Eight samples of fish were collected during the summer and fall of 2009. A middle-top feeding fish (carp) and a bottom feeding fish (catfish) were collected in July and September. These samples were analyzed by gamma ray spectroscopy. Naturally occurring potassium-40 was detected in all samples. The average concentration at the upstream control location was 3083 pCi/kg (wet weight) with a range of 2790 to 3550 pCi/kg (wet weight). The average concentration for the four indicator samples was 3210 pCi/kg (wet weight) with a range of 2890 to 3860 pCi/kg (wet weight). The preoperational period of 1971 through 1974 averaged 2400 pCi/kg potassium-40. All other gamma emitters were below their detection levels.

TRENDING GRAPH 3

CESIUM-137 IN FISH
ALL LOCATIONS

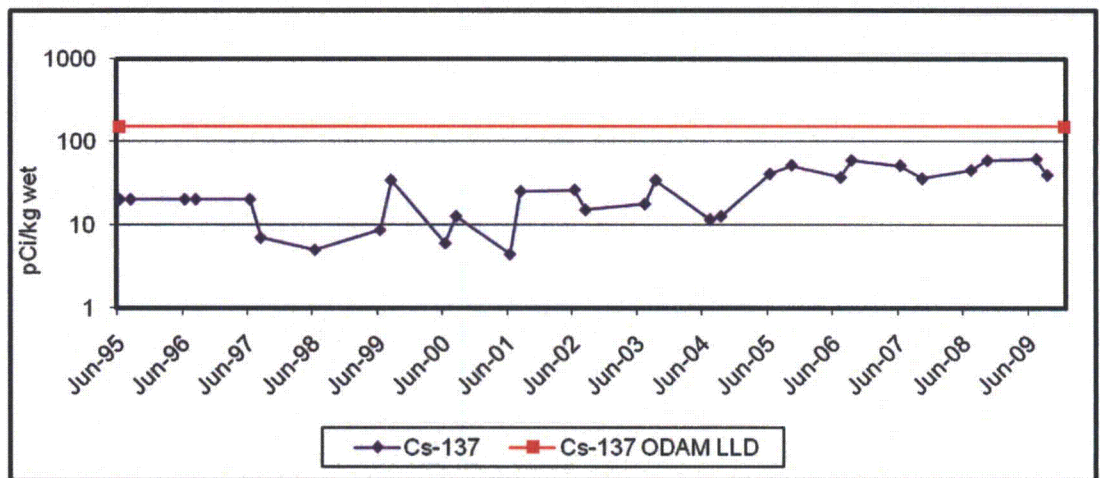


Trending Graph 3 represents minimum detectable concentration (MDC) results. This graph has the ODAM LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

D. Milk – Nearest Producer

Milk samples are collected once every 15 days in peak pasture season and once every 31 days the rest of the year from Station 99. The results are presented in Table VII-4 and Trending Graph 4. Sixteen samples were analyzed by gamma ray spectroscopy and for low-level iodine-131 by radiochemical separation. Naturally occurring potassium-40 was measured in all samples with an average concentration of 1254 pCi/liter and a range of 1070 to 1480 pCi/liter. Thorium-228 was measured in one sample at a concentration of 13.6 pCi/liter. All other gamma emitters were below their detection levels.

TRENDING GRAPH 4

IODINE-131 AND CESIUM-137 IN MILK – NEAREST PRODUCER
STATIONS 61 & 99

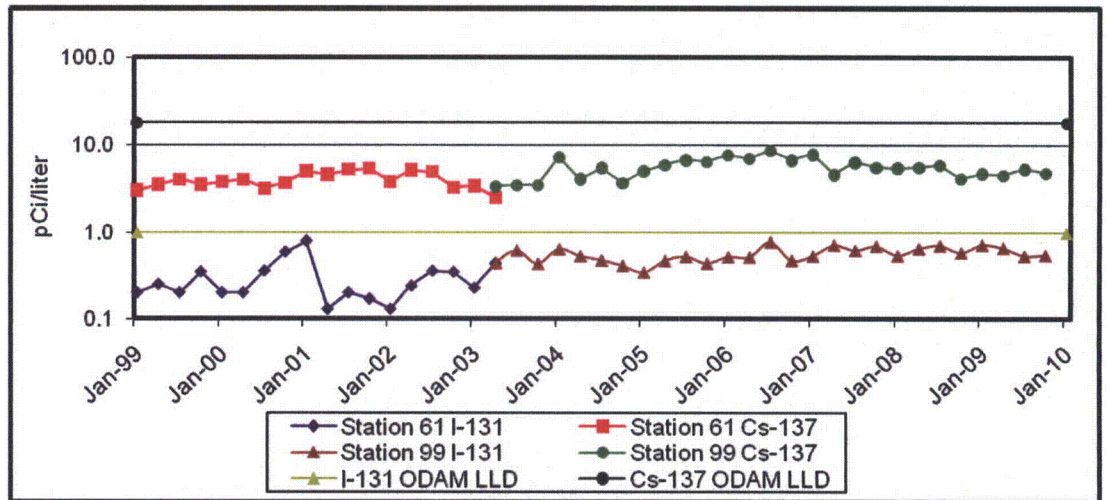


Station 61 went out of business in May of 2003. Station 99 replaced station 61 in May of 2003. Trending Graph 4 represents minimum detectable concentration (MDC) results. This graph has the ODAM LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

E. Milk – Other Producers

Four milk samples were collected from one location of other producers during 2009 and results are presented in Table VII-5 and Trending Graph 5. Station 103 was sampled quarterly in 2009. Naturally occurring potassium-40 was detected in all four samples analyzed with an average concentration of 1268 pCi/liter and a range of 1170 to 1430 pCi/liter. All other gamma emitters were below their detection levels. The operation of the Cooper Nuclear Station has no discernable impact on milk samples.

TRENDING GRAPH 5

IODINE-131 AND CESIUM-137 IN MILK – OTHER PRODUCERS
 QUARTERLY AVERAGE – ALL LOCATIONS

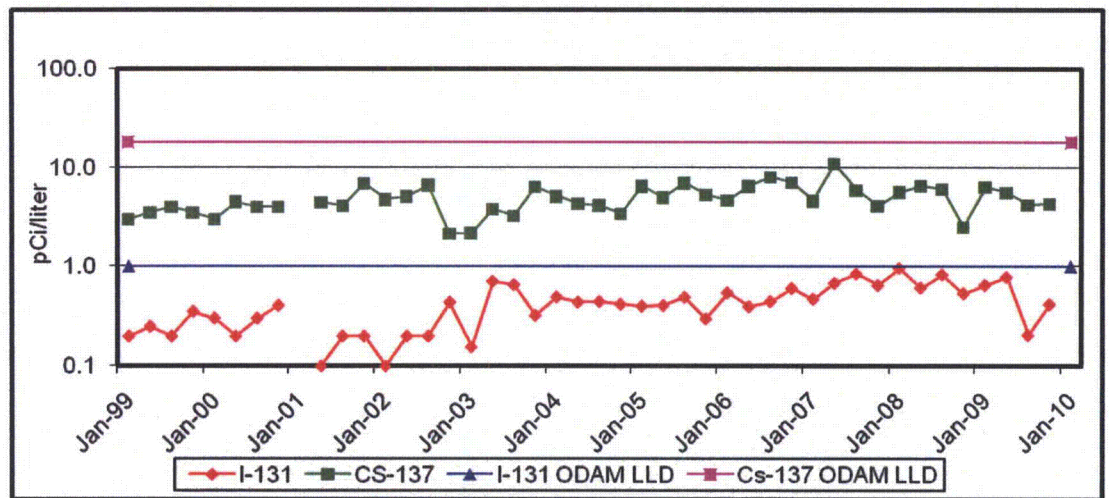

Due to delay in analysis, sample results for I-131 for the first quarter of 2001 were excluded and are not plotted.

Milk station 102 went out of business April 2006. Vegetation samples are taken in lieu of milk.


Trending Graph 5 represents minimum detectable concentration (MDC) results. This graph has the ODA M LLD trend line, showing the MDC results as below the ODA M required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

F. Ground Water

Groundwater was collected from two stations quarterly and analyzed for tritium and for gamma emitting radionuclides. Station 11 is located 0.15 miles from the plant and station 47 is 25.8 miles from the plant. The results are presented in Table VII-6 and Trending Graph 6. All results were below the required lower limit of detection.

TRENDING GRAPH 6

TRITIUM IN GROUND WATER
QUARTERLY AVERAGE – ALL LOCATIONS

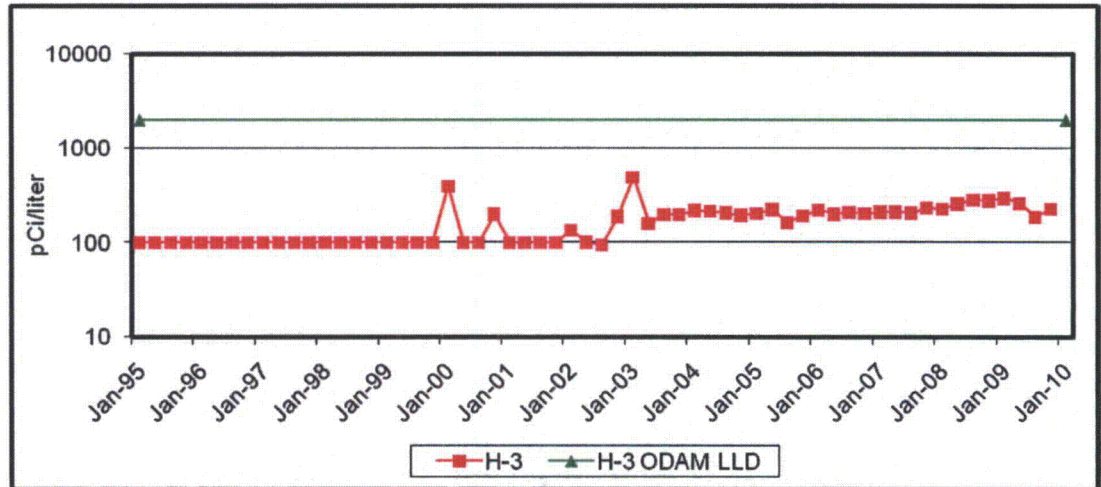


Trending Graph 6 represents minimum detectable concentration (MDC) results. This graph has the ODAM LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

G. River Water

River water was collected monthly and monitored for gamma emitting radionuclides. A quarterly composite was measured for tritium. The results are presented in Table VII-7 and Trending Graph 7. All results were below the required lower limit of detection. Naturally occurring potassium-40 was detected in two of twenty-four samples analyzed with an average concentration of 147 pCi/liter and a range of 105 to 189 pCi/liter. Naturally occurring Th-228 was detected in one of twenty-four samples analyzed, with a concentration of 5.36 pCi/liter. All other gamma emitters were below their detection levels.

TRENDING GRAPH 7

TRITIUM IN RIVER WATER
QUARTERLY AVERAGE – ALL LOCATIONS

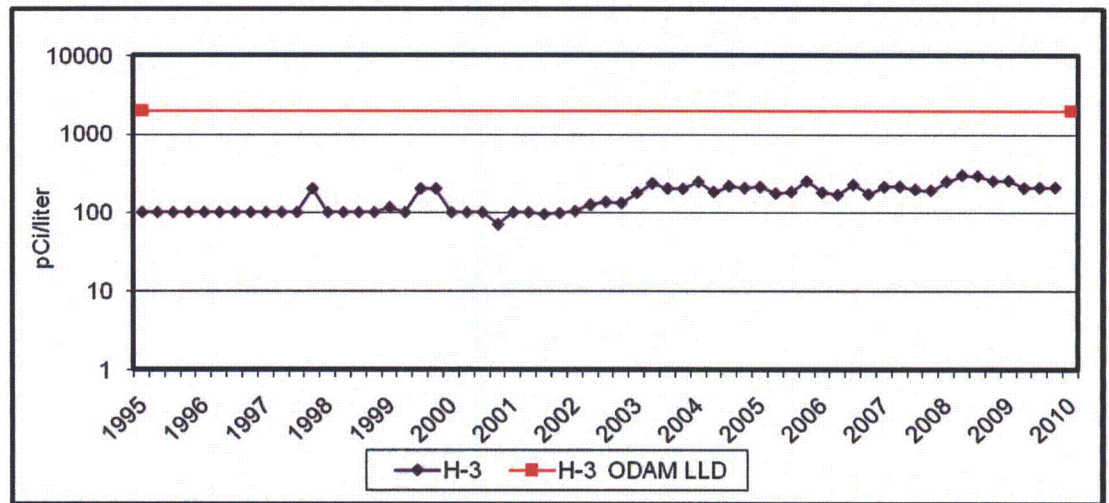


Trending Graph 7 represents minimum detectable concentration (MDC) results. This graph has the ODAM LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

H. Thermoluminescent Dosimeters

Thermoluminescent dosimeters (TLDs) determine environmental radiation doses and the results are presented in Table VII-8 and Trending Graph 8. Ambient radiation was monitored at 32 locations within an 11 mile radius of the Cooper Nuclear Station and collected quarterly. The quarterly average for the indicator locations was 22.7 millirem/quarter and a range from 19.4 to 30.0 millirem/quarter. The control station 44, which is located 10.3 miles, 270 degrees, had an average of 24.2 millirem/quarter and a range from 22.8 to 25.5 millirem/quarter. The highest station was Station 86 with an average of 24.8 millirem/quarter and a range from 22.9 to 30.0 millirem/quarter. The preoperational period of 1971 through 1974 averaged 7.0 millirem/quarter. The data from year to year is in good agreement and indicates no adverse changes in radiation exposure to the population near the Cooper Nuclear Station.

TRENDING GRAPH 8

THERMOLUMINESCENT DOSIMETRY
QUARTERLY AVERAGE – ALL LOCATIONS

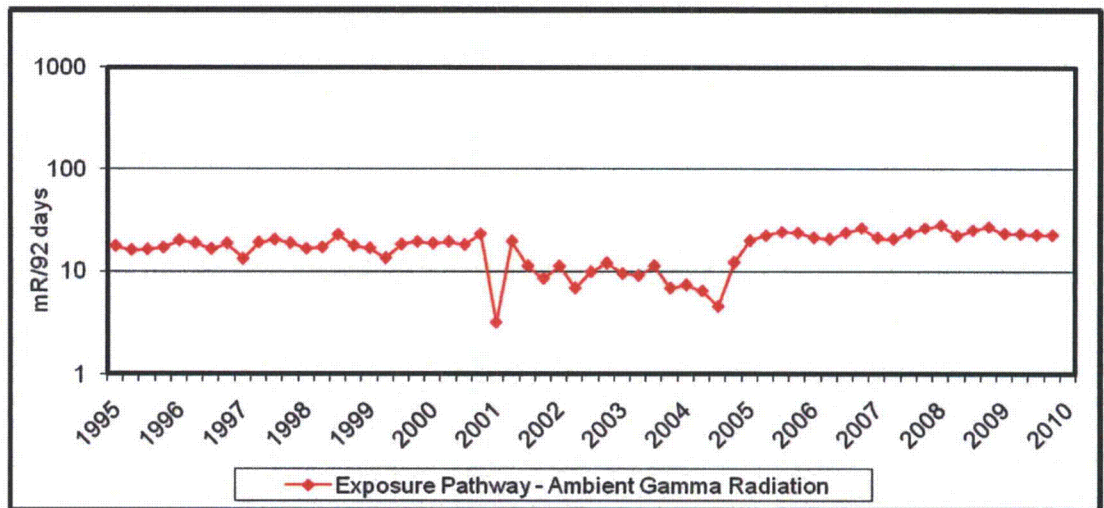


First quarter 2001 TLD data low but still within acceptable limits due to possible dry conditions.

I. Food – Broadleaf Vegetation

Eight broadleaf vegetation samples were collected in June, July and August from three locations during 2009, due to broadleaf vegetation samples being unavailable in May and September. The samples were analyzed by gamma ray spectroscopy and for low-level iodine-131 by radiochemical separation. The results are presented in Table VII-9 and Trending Graph 9. Beryllium-7, which is produced continuously in the upper atmosphere by cosmic radiation was measured in all eight samples analyzed. The average concentration for the two indicator locations was 1426 pCi/kg wet and a range of 588 to 2730 pCi/kg wet. The average concentration for the control location was 766 pCi/kg wet with a range of 624 to 1020 pCi/kg wet. Naturally occurring potassium-40 was measured in all eight samples analyzed. The average concentration for the two indicator locations was 5394 pCi/kg wet and a range of 2580 to 7090 pCi/kg. The average concentration for the control location was 5253 pCi/kg wet with a range of 4030 to 6740 pCi/kg wet. Naturally occurring thorium-228 was measured in four of eight samples. The average concentration for the two indicator locations was 61.2 pCi/kg wet and a range of 31.5 to 90.9 pCi/kg. The average concentration for the control location was 17.8 pCi/kg wet with a range of 12.2 to 23.3 pCi/kg wet. All other gamma emitters were below their detection levels. The operation of the Cooper Nuclear Station has no discernable impact on broadleaf vegetation samples.

TRENDING GRAPH 9

**IODINE-131 AND CESIUM-137 IN FOOD – BROADLEAF VEGETATION
ALL LOCATIONS**

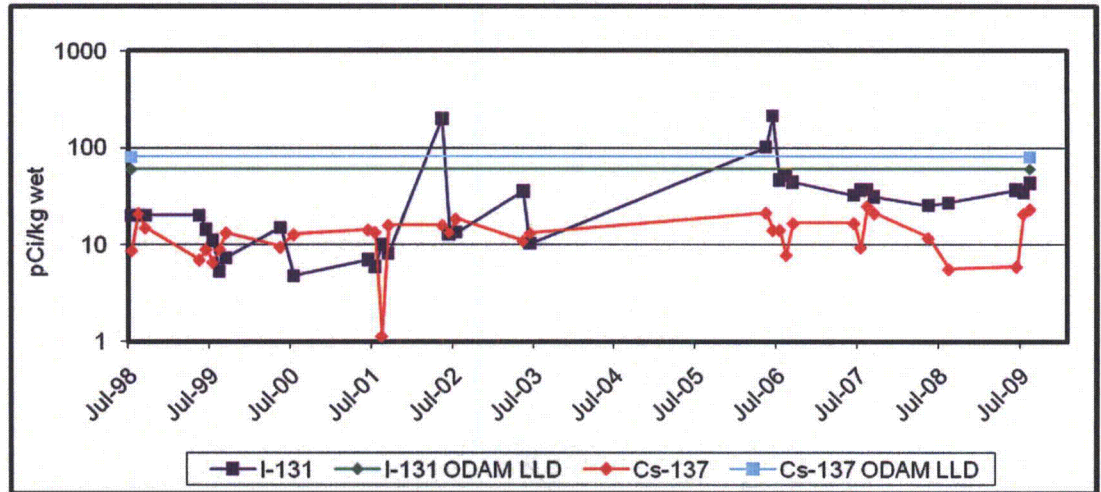

The low Cs-137 value reported in July 2001 was due to the wrong aliquot being entered for the gamma analysis resulted in an invalid analysis and is not reported
 Due to delay in sample receipt, the I-131 had decayed away, resulting in an invalid analysis for May 2002 and is not reported.

Milk samples were collected in lieu of broadleaf vegetation samples in 2004 and 2005.

Due to delay in counting sample, the I-131 had decayed away, resulting in an invalid analysis for June 2006 and is not reported. The I-131 by chemical separation met required I-131 LLD.

Trending Graph 9 represents minimum detectable concentration (MDC) results. This graph has the ODAM


LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

J. Shoreline Sediment

Sediment samples were collected during May and October from Stations 28 and 35 and were analyzed by gamma spectrometry. The results are presented in Table VII-10 and Trending Graph 10. A number of naturally occurring radionuclides were detected in these samples. Naturally occurring potassium-40 was observed in all four samples. The average concentration for the one supplemental station was 12650 pCi/kg (dry weight) and a range of 11400 to 13900 pCi/kg (dry weight). The average concentration for the one indicator station was 16950 pCi/kg (dry weight) and a range of 16700 to 17200 pCi/kg (dry weight). Radium-226 was observed in one sample from the supplemental station and one sample from the indicator station. The concentration for the supplemental station was 1260 pCi/kg (dry weight). The concentration for the indicator station was 2080 pCi/kg (dry weight). Thorium-228 was observed in all samples. The concentration for the supplemental station was 869 pCi/kg (dry weight) a range of 807 to 930 pCi/kg (dry weight). The concentration for the indicator station was 1071 pCi/kg (dry weight) a range of 961 to 1180 pCi/kg (dry weight). All other gamma emitters were below their detection limits.

TRENDING GRAPH 10

**CESIUM-134 AND CESIUM-137 IN SHORELINE SEDIMENT
STATIONS 28 AND 35**

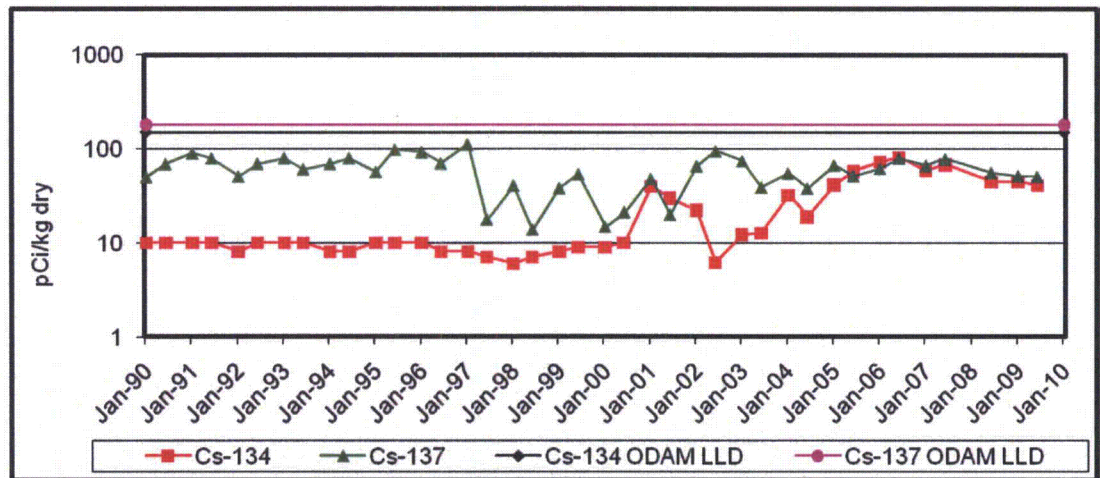

Trending Graph 10 represents minimum detectable concentration (MDC) results. Only one sample was collected in 2008. This graph has the ODAM LLD trend line, showing the MDC results as below the ODAM required LLDs. The upward trend indicates shortened detector count time in order to maximize the number of samples counted each day, and is not an indication that the trend will continue to increase above the LLD limit.

K. Errata Data

There was no errata data for 2009.

SECTION V. CONCLUSIONS

V. CONCLUSIONS

The results of the 2009 Radiological Environmental Monitoring Program (REMP) for the Cooper Nuclear Station (CNS) of the Nebraska Public Power District (NPPD) have been presented. The report contains data tables, summaries, and discussions of the data and trending graphs.

Naturally occurring radioactivity and residual traces of fallout were observed in sample media in the expected ranges. They have been discussed individually in the text. Observed radioactivity was at very low concentrations.

The results of the analyses have been presented. Based on the evidence of the Radiological Environmental Monitoring Program, the Nebraska Public Power District, Cooper Nuclear Station has had no discernable radiological impact on the environment and is operating within regulatory limits.

SECTION VI. RADIOLOGICAL ENVIRONMENTAL MONITORING
PROGRAM SUMMARY TABLE - 2009

ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SUMMARY

Name of Facility Cooper Nuclear Station Docket No. 50-298
 Location of Facility Nemaha Nebraska Reporting Period January 1 2009 to December 31 2009
 (County/State)

Medium of Pathway Sampled (Unit of Measurement)	Type & Total No. of Analysis Performed	Lower Limit of Detection(1) (LLD)	All Indicator Locations Mean(2) Range(2)	Location with Highest Annual Mean		Control Location Mean()(2) Range(2)	No. of Reportable Occurrences	
				Name	Mean()(2) Range(2)			
Air Iodine (pCi/m ³)	I-131	518	0.07	ND(0/518) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
Air Particulate (pCi/m ³)	GR-B	518	NA	0.022(515/518) (0.008/0.096)	Sta. 01	0.025(52/55) (0.01/0.096)	NA(0/0) (NA-NA)	0
	BE-7	40	NA	0.166(29/40) (0.098/0.250)	Sta. 05	0.219(3/14) (0.186/0.250)	NA(0/0) (NA-NA)	0
	CO-60	40	NA	ND(0/40) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
	TH-228	40	NA	0.018(1/40) NA-NA	Sta. 03	0.018(1/40) NA-NA	NA(0/0) (NA-NA)	0
Fish (pCi/kg Wet)	K-40	8	NA	3210(4/4) (2890/3860)	Sta. 28 1.8 mi.	3210(4/4) (2890/3860)	3083(4/4) (2790/3550)	0
	CO-60	8	130	ND(0/4) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/4) (ND-ND)	0
	CS-137	8	150	ND(0/4) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/4) (ND-ND)	0

(1) Nominal Lower Limit of Detection (LLD), as stated in ODAM.

(2) Mean and Range based upon detectable measurements only. Fraction of detectable measurements at specified location indicated in brackets().

(3) ND = Non Detectable.

(4) NA = Not Applicable.

ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SUMMARY

Name of Facility Cooper Nuclear Station
 Location of Facility Nemaha Nebraska
 (County/State)

Docket No. 50-298
 Reporting Period January 1 2009 to December 31 2009

Medium of Pathway Sampled (Unit of Measurement)	Type & Total No. of Analysis Performed	Lower Limit of Detection(1) (LLD)	All Indicator Locations Mean(2) Range(2)	Location with Highest Annual Mean		Control Location Mean()(2) Range(2)	No. of Reportable Occurrences	
				Name	Mean()(2) Range(2)			
Fish (pCi/kg Wet)	TH-228	8	NA	ND(0/4) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/4) (ND-ND)	0
Milk Nearest (pCi/L)	I-131	16	NA	ND(0/16) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
	K-40	16	NA	1254(16/16) (1070/1480)	Sta. 99	1254(16/16) (1070/1480)	NA(0/0) (NA-NA)	0
	RA-226	16	NA	ND(0/16) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
Milk Others (pCi/L)	TH-228	16	NA	13.6(1/16) NA-NA	Sta. 99	13.6(1/16) NA-NA	NA(0/0) (NA-NA)	0
	I-131	4	1	ND(0/4) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
	K-40	4	NA	1268(4/4) (1170/1430)	Sta. 103 13.5 mi.	1268(4/4) (1170/1430)	NA(0/0) (NA-NA)	0
	RA-226	4	NA	ND(0/4) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0

(1) Nominal Lower Limit of Detection (LLD), as stated in ODAM.

(2) Mean and Range based upon detectable measurements only. Fraction of detectable measurements at specified location indicated in brackets().

(3) ND = Non Detectable.

(4) NA = Not Applicable.

ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SUMMARY

Name of Facility Cooper Nuclear Station
 Location of Facility Nemaha Nebraska
 (County/State)

Docket No. 50-298
 Reporting Period January 1 2009 to December 31 2009

Medium of Pathway Sampled (Unit of Measurement)	Type & Total No. of Analysis Performed	Lower Limit of Detection(1) (LLD)	All Indicator Locations Mean(2) Range(2)	Location with Highest Annual Mean		Control Location Mean()(2) Range(2)	No. of Reportable Occurrences	
				Name	Mean()(2) Range(2)			
Milk Others (pCi/L)	TH-228	4	NA	ND(0/4) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
Water - Ground (pCi/L)	I-131	14	1	ND(0/14) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
	H-3	14	2000	ND(0/14) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
	K-40	14	NA	ND(0/14) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
	TH-228	14	NA	ND(0/14) (ND-ND)	NA	NA(0/0) (NA-NA)	NA(0/0) (NA-NA)	0
River Water (pCi/L)	H-3	24	2000	ND(0/12) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/12) (ND-ND)	0
	K-40	24	NA	ND(0/12) (ND-ND)	Sta. 35 2.0 mi.	147(2/12) (105/189)	147(2/12) (105/189)	0
	TH-228	24	NA	ND(0/12) (ND-ND)	Sta. 35 2.0 mi.	5.36(1/12) NA-NA	5.36(1/12) NA-NA	0

(1) Nominal Lower Limit of Detection (LLD), as stated in ODAM.

(2) Mean and Range based upon detectable measurements only. Fraction of detectable measurements at specified location indicated in brackets().

(3) ND = Non Detectable.

(4) NA = Not Applicable.

ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SUMMARY

Name of Facility Cooper Nuclear Station
 Location of Facility Nemaha Nebraska
 (County/State)

Docket No. 50-298
 Reporting Period January 1 2009 to December 31 2009

Medium of Pathway Sampled (Unit of Measurement)	Type & Total No. of Analysis Performed	Lower Limit of Detection(1) (LLD)	All Indicator Locations Mean(2) Range(2)	Location with Highest Annual Mean		Control Location Mean()(2) Range(2)	No. of Reportable Occurrences
				Name	Mean()(2) Range(2)		
Thermoluminescence Dosimeter (mR/Standard Quarter)	Gamma Dose Quarterly	127	NA 22.7(123/123) (19.4/30.0)	Sta. 86 4.6 mi.	24.8(4/4) (22.9/30.0)	24.2(4/4) (22.8/25.5)	0
Broadleaf Vegetation (pCi/kg Wet)	I-131	8	60 ND(0/5) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/3) (ND-ND)	0
	BE-7	8	NA 1426(5/5) (588/2730)	Sta. 101	1648(3/3) (684/2730)	766(3/3) (624/1020)	0
	K-40	8	NA 5394(5/5) (2580/7090)	Sta. 96	6650(2/2) (6210/7090)	5253(3/3) (4030/6740)	0
	RA-226	8	NA ND(0/5) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/3) (ND-ND)	0
	TH-228	8	NA 61.2(2/5) (31.5/90.9)	Sta. 101	90.9(1/4) NA-NA	17.8(2/3) (12.2/23.3)	0
Shoreline Sediment (pCi/kg Dry)	BE-7	4	NA ND(0/2) (ND-ND)	NA	NA(0/0) (NA-NA)	ND(0/2) (ND-ND)	0

(1) Nominal Lower Limit of Detection (LLD), as stated in ODAM.

(2) Mean and Range based upon detectable measurements only. Fraction of detectable measurements at specified location indicated in brackets().

(3) ND = Non Detectable.

(4) NA = Not Applicable.

ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SUMMARY

Name of Facility Cooper Nuclear Station
 Location of Facility Nemaha Nebraska
 (County/State)

Docket No. 50-298
 Reporting Period January 1 2009 to December 31 2009

Medium of Pathway Sampled (Unit of Measurement)	Type & Total No. of Analysis Performed	Lower Limit of Detection(1) (LLD)	All Indicator Locations Mean(2) Range(2)	Location with Highest Annual Mean		Control Location Mean()(2) Range(2)	No. of Reportable Occurrences	
				Name	Mean()(2) Range(2)			
Shoreline Sediment (pCi/kg Dry)	K-40	4	NA 16950(2/2) (16700/17200)	Sta. 28	1.8 mi.	16950(2/2) (16700/17200)	12650(2/2) (11400/13900)	0
	CS-137	4	NA ND(0/2) (ND-ND)	NA		NA(0/0) (NA-NA)	ND(0/2) (ND-ND)	0
	RA-226	4	NA 2080(1/2) NA-NA	Sta. 28	1.8 mi.	2080(1/2) NA-NA	1260(1/2) NA-NA	0
	TH-228	4	NA 1071(2/2) (961/1180)	Sta. 28	1.8 mi.	1071(2/2) (961/1180)	869(2/2) (807/930)	0

(1) Nominal Lower Limit of Detection (LLD), as stated in ODAM.
 (2) Mean and Range based upon detectable measurements only. Fraction of detectable measurements at specified location indicated in brackets().
 (3) ND = Non Detectable.
 (4) NA = Not Applicable.

SECTION VII. COMPLETE DATA TABLES

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 01

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.41E-02 ± 4.36E-03	L.T. 7.E-02
01/06/09	01/13/09	1.00E+04	CU.FT.	2.64E-02 ± 4.48E-03	L.T. 5.E-02
01/13/09	01/20/09	1.00E+04	CU.FT.	2.81E-02 ± 4.53E-03	L.T. 2.E-02
01/20/09	01/27/09	1.00E+04	CU.FT.	3.21E-02 ± 4.91E-03	L.T. 2.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.49E-02 ± 3.78E-03	L.T. 5.E-02
02/03/09	02/10/09	9.99E+03	CU.FT.	2.86E-02 ± 4.87E-03	L.T. 1.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.46E-02 ± 4.29E-03	L.T. 2.E-02
02/17/09	02/24/09	1.00E+04	CU.FT.	3.29E-02 ± 4.93E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.54E-02 ± 4.47E-03	L.T. 2.E-02
03/03/09	03/10/09	9.90E+03	CU.FT.	1.77E-02 ± 4.26E-03	L.T. 3.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.76E-02 ± 4.69E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.83E-02 ± 4.17E-03	L.T. 4.E-02
03/24/09	03/30/09	6.98E+03	CU.FT.	1.69E-02 ± 4.82E-03	L.T. 6.E-02
03/30/09	04/07/09	8.29E+03	CU.FT.	1.75E-02 ± 4.46E-03	L.T. 3.E-02
04/07/09	04/14/09	9.32E+03	CU.FT.	1.91E-02 ± 4.09E-03	L.T. 3.E-02
04/14/09	04/21/09	9.72E+03	CU.FT.	1.19E-02 ± 3.52E-03	L.T. 2.E-02
04/21/09	04/28/09	8.24E+03	CU.FT.	1.43E-02 ± 3.85E-03	L.T. 4.E-02
04/28/09	05/05/09	9.96E+03	CU.FT.	1.29E-02 ± 3.75E-03	L.T. 2.E-02
05/05/09	05/12/09	9.98E+03	CU.FT.	1.39E-02 ± 3.50E-03	L.T. 5.E-02
05/12/09	05/19/09	1.00E+04	CU.FT.	1.01E-02 ± 2.96E-03	L.T. 4.E-02
05/19/09	05/26/09	1.01E+04	CU.FT.	2.22E-02 ± 4.22E-03	L.T. 6.E-02
05/26/09	06/02/09	1.01E+04	CU.FT.	1.64E-02 ± 3.82E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.16E-02 ± 3.73E-03	L.T. 3.E-02
06/09/09	06/16/09	1.01E+04	CU.FT.	1.24E-02 ± 3.52E-03	L.T. 4.E-02
06/16/09	06/23/09	9.92E+03	CU.FT.	1.26E-02 ± 3.69E-03	L.T. 6.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	3.15E-02 ± 6.48E-03	L.T. 7.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 01

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	1.70E-02 ± 4.30E-03	L.T. 6.E-02
07/07/09	07/13/09	8.60E+03	CU.FT.	2.34E-02 ± 4.79E-03	L.T. 7.E-02
07/13/09	07/21/09	1.16E+04	CU.FT.	1.78E-02 ± 5.38E-03	L.T. 4.E-02
07/21/09	07/28/09	9.98E+03	CU.FT.	1.47E-02 ± 5.97E-03	L.T. 5.E-02
07/28/09	08/03/09	8.70E+03	CU.FT.	1.68E-02 ± 6.20E-03	L.T. 4.E-02
08/03/09	08/11/09	1.07E+04	CU.FT.	2.51E-02 ± 5.79E-03	L.T. 6.E-02
08/11/09	08/18/09	1.00E+04	CU.FT.	2.15E-02 ± 4.87E-03	L.T. 1.E-02
08/18/09	08/25/09	1.01E+04	CU.FT.	1.85E-02 ± 5.11E-03	L.T. 2.E-02
08/25/09	09/01/09	9.80E+03	CU.FT.	1.52E-02 ± 5.24E-03	L.T. 3.E-02
09/01/09	09/08/09	1.00E+04	CU.FT.	3.48E-02 ± 6.41E-03	L.T. 7.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.75E-02 ± 5.31E-03	L.T. 7.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	2.03E-02 ± 6.28E-03	L.T. 1.E-02
09/22/09	09/29/09	9.97E+03	CU.FT.	1.47E-02 ± 5.59E-03	L.T. 6.E-02
09/29/09	10/06/09	9.98E+03	CU.FT.	1.39E-02 ± 3.61E-03	L.T. 4.E-02
10/06/09	10/13/09	6.96E+03	CU.FT.	2.02E-02 ± 7.43E-03	L.T. 7.E-02
10/13/09	10/20/09	7.39E+03	CU.FT.	2.26E-02 ± 7.39E-03	L.T. 5.E-02
10/20/09	10/27/09	9.00E+03	CU.FT.	1.68E-02 ± 4.39E-03	L.T. 4.E-02
10/27/09	11/03/09	8.71E+03	CU.FT.	2.35E-02 ± 6.89E-03	L.T. 3.E-02
11/03/09	11/10/09	7.51E+03	CU.FT.	3.84E-02 ± 8.26E-03	L.T. 6.E-02
11/10/09	11/17/09	3.43E+03	CU.FT.	8.62E-02 ± 1.70E-02	L.T. 1.E-01
11/17/09	11/24/09	3.67E+03	CU.FT.	9.60E-02 ± 1.67E-02	L.T. 4.E-02
11/24/09	12/01/09	6.14E+03	CU.FT.	3.82E-02 ± 9.37E-03	L.T. 4.E-02
12/01/09	12/08/09	9.85E+03	CU.FT.	1.86E-02 ± 4.35E-03	L.T. 6.E-02
12/08/09	12/15/09	9.98E+03	CU.FT.	3.43E-02 ± 6.50E-03	L.T. 6.E-02
12/15/09	12/22/09	1.01E+04	CU.FT.	4.84E-02 ± 6.82E-03	L.T. 6.E-02
12/22/09	12/29/09	1.01E+04	CU.FT.	2.72E-02 ± 5.80E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 02

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.67E-02 ± 4.53E-03	L.T. 7.E-02
01/06/09	01/13/09	1.00E+04	CU.FT.	2.84E-02 ± 4.61E-03	L.T. 5.E-02
01/13/09	01/20/09	1.00E+04	CU.FT.	2.54E-02 ± 4.35E-03	L.T. 2.E-02
01/20/09	01/27/09	1.00E+04	CU.FT.	3.20E-02 ± 4.90E-03	L.T. 2.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.32E-02 ± 3.64E-03	L.T. 5.E-02
02/03/09	02/10/09	9.97E+03	CU.FT.	2.92E-02 ± 4.91E-03	L.T. 2.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.42E-02 ± 4.26E-03	L.T. 2.E-02
02/17/09	02/24/09	9.98E+03	CU.FT.	3.16E-02 ± 4.85E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	3.12E-02 ± 4.83E-03	L.T. 2.E-02
03/03/09	03/10/09	9.90E+03	CU.FT.	1.80E-02 ± 4.28E-03	L.T. 3.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.96E-02 ± 4.82E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.73E-02 ± 4.10E-03	L.T. 7.E-02
03/24/09	03/30/09	8.61E+03	CU.FT.	1.35E-02 ± 3.89E-03	L.T. 5.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.31E-02 ± 3.26E-03	L.T. 3.E-02
04/07/09	04/14/09	9.93E+03	CU.FT.	2.35E-02 ± 4.26E-03	L.T. 2.E-02
04/14/09	04/21/09	1.02E+04	CU.FT.	1.23E-02 ± 3.45E-03	L.T. 2.E-02
04/21/09	04/28/09	1.03E+04	CU.FT.	1.09E-02 ± 3.03E-03	L.T. 3.E-02
04/28/09	05/05/09	9.68E+03	CU.FT.	1.02E-02 ± 3.60E-03	L.T. 2.E-02
05/05/09	05/12/09	1.01E+04	CU.FT.	1.27E-02 ± 3.37E-03	L.T. 5.E-02
05/12/09	05/19/09	1.00E+04	CU.FT.	1.14E-02 ± 3.09E-03	L.T. 6.E-02
05/19/09	05/26/09	1.01E+04	CU.FT.	2.00E-02 ± 4.07E-03	L.T. 6.E-02
05/26/09	06/02/09	1.01E+04	CU.FT.	1.63E-02 ± 3.81E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.37E-02 ± 3.89E-03	L.T. 3.E-02
06/09/09	06/16/09	1.01E+04	CU.FT.	1.29E-02 ± 3.56E-03	L.T. 4.E-02
06/16/09	06/23/09	9.93E+03	CU.FT.	1.25E-02 ± 3.67E-03	L.T. 6.E-02
06/23/09	06/30/09	9.55E+03	CU.FT.	3.07E-02 ± 6.84E-03	L.T. 4.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 02

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	4.81E+03	CU.FT.	1.78E-02 ± 7.59E-03	L.T. 7.E-02
07/07/09	07/13/09	8.30E+03	CU.FT.	2.60E-02 ± 5.09E-03	L.T. 7.E-02
07/13/09	07/21/09	1.17E+04	CU.FT.	3.61E-02 ± 6.15E-03	L.T. 4.E-02
07/21/09	07/28/09	9.97E+03	CU.FT.	1.26E-02 ± 5.87E-03	L.T. 5.E-02
07/28/09	08/03/09	8.70E+03	CU.FT.	2.11E-02 ± 6.43E-03	L.T. 4.E-02
08/03/09	08/11/09	1.15E+03	CU.FT.	L.T. 7.E-02	L.T. 6.E-01
08/11/09	08/18/09	1.00E+04	CU.FT.	2.04E-02 ± 4.81E-03	L.T. 3.E-02
08/18/09	08/25/09	1.01E+04	CU.FT.	1.94E-02 ± 5.17E-03	L.T. 5.E-02
08/25/09	09/01/09	1.00E+04	CU.FT.	1.75E-02 ± 5.29E-03	L.T. 5.E-02
09/01/09	09/08/09	1.01E+04	CU.FT.	2.50E-02 ± 5.89E-03	L.T. 6.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.53E-02 ± 5.19E-03	L.T. 7.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	2.51E-02 ± 6.51E-03	L.T. 2.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.20E-02 ± 5.38E-03	L.T. 5.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.51E-02 ± 3.70E-03	L.T. 7.E-02
10/06/09	10/13/09	1.00E+04	CU.FT.	1.73E-02 ± 5.36E-03	L.T. 4.E-02
10/13/09	10/20/09	1.00E+04	CU.FT.	1.34E-02 ± 5.28E-03	L.T. 6.E-02
10/20/09	10/27/09	1.00E+04	CU.FT.	1.78E-02 ± 4.14E-03	L.T. 7.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.54E-02 ± 5.64E-03	L.T. 5.E-02
11/03/09	11/10/09	1.01E+04	CU.FT.	2.56E-02 ± 6.00E-03	L.T. 7.E-02
11/10/09	11/17/09	9.97E+03	CU.FT.	3.69E-02 ± 6.21E-03	L.T. 6.E-02
11/17/09	11/24/09	1.03E+04	CU.FT.	3.71E-02 ± 6.08E-03	L.T. 2.E-02
11/24/09	12/01/09	9.82E+03	CU.FT.	3.04E-02 ± 6.19E-03	L.T. 6.E-02
12/01/09	12/08/09	1.02E+04	CU.FT.	2.18E-02 ± 4.46E-03	L.T. 5.E-02
12/08/09	12/15/09	9.98E+03	CU.FT.	3.65E-02 ± 6.60E-03	L.T. 6.E-02
12/15/09	12/22/09	1.01E+04	CU.FT.	4.64E-02 ± 6.73E-03	L.T. 6.E-02
12/22/09	12/29/09	1.01E+04	CU.FT.	2.74E-02 ± 5.80E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 03

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.36E-02 ± 4.33E-03	L.T. 7.E-02
01/06/09	01/13/09	9.91E+03	CU.FT.	2.35E-02 ± 4.31E-03	L.T. 5.E-02
01/13/09	01/20/09	1.01E+04	CU.FT.	2.22E-02 ± 4.10E-03	L.T. 2.E-02
01/20/09	01/27/09	1.01E+04	CU.FT.	3.09E-02 ± 4.81E-03	L.T. 2.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.54E-02 ± 3.81E-03	L.T. 5.E-02
02/03/09	02/10/09	1.02E+04	CU.FT.	2.94E-02 ± 4.86E-03	L.T. 2.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.45E-02 ± 4.28E-03	L.T. 2.E-02
02/17/09	02/24/09	9.91E+03	CU.FT.	3.15E-02 ± 4.87E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.97E-02 ± 4.74E-03	L.T. 2.E-02
03/03/09	03/10/09	1.00E+04	CU.FT.	1.45E-02 ± 4.00E-03	L.T. 2.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.20E-02 ± 4.32E-03	L.T. 2.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.13E-02 ± 3.65E-03	L.T. 7.E-02
03/24/09	03/30/09	8.55E+03	CU.FT.	1.22E-02 ± 3.80E-03	L.T. 5.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.27E-02 ± 3.22E-03	L.T. 3.E-02
04/07/09	04/14/09	1.01E+04	CU.FT.	1.85E-02 ± 3.84E-03	L.T. 2.E-02
04/14/09	04/22/09	1.15E+04	CU.FT.	1.43E-02 ± 3.33E-03	L.T. 2.E-02
04/21/09	04/28/09	8.66E+03	CU.FT.	9.31E-03 ± 3.24E-03	L.T. 4.E-02
04/28/09	05/05/09	9.86E+03	CU.FT.	1.42E-02 ± 3.88E-03	L.T. 2.E-02
05/05/09	05/12/09	1.01E+04	CU.FT.	1.20E-02 ± 3.31E-03	L.T. 5.E-02
05/12/09	05/19/09	2.34E+03	CU.FT.	L.T. 1.E-02	L.T. 3.E-01
05/19/09	05/26/09	9.96E+03	CU.FT.	2.13E-02 ± 4.20E-03	L.T. 6.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	1.58E-02 ± 3.75E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	9.50E-03 ± 3.56E-03	L.T. 3.E-02
06/09/09	06/16/09	1.01E+04	CU.FT.	1.48E-02 ± 3.72E-03	L.T. 4.E-02
06/16/09	06/23/09	9.92E+03	CU.FT.	1.51E-02 ± 3.88E-03	L.T. 6.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	2.26E-02 ± 6.07E-03	L.T. 7.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 03

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	1.48E-02 ± 4.14E-03	L.T. 6.E-02
07/07/09	07/13/09	8.49E+03	CU.FT.	1.95E-02 ± 4.55E-03	L.T. 7.E-02
07/13/09	07/21/09	1.17E+04	CU.FT.	1.56E-02 ± 5.23E-03	L.T. 4.E-02
07/21/09	07/28/09	1.00E+04	CU.FT.	2.35E-02 ± 6.39E-03	L.T. 5.E-02
07/28/09	08/03/09	8.66E+03	CU.FT.	2.02E-02 ± 6.41E-03	L.T. 4.E-02
08/03/09	08/11/09	1.12E+04	CU.FT.	2.25E-02 ± 5.46E-03	L.T. 6.E-02
08/11/09	08/18/09	1.03E+04	CU.FT.	1.67E-02 ± 4.47E-03	L.T. 2.E-02
08/18/09	08/25/09	9.96E+03	CU.FT.	2.37E-02 ± 5.46E-03	L.T. 3.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	1.70E-02 ± 5.22E-03	L.T. 5.E-02
09/01/09	09/08/09	9.99E+03	CU.FT.	3.04E-02 ± 6.21E-03	L.T. 6.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.26E-02 ± 5.03E-03	L.T. 7.E-02
09/15/09	09/22/09	9.98E+03	CU.FT.	3.44E-02 ± 6.87E-03	L.T. 2.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.61E-02 ± 5.60E-03	L.T. 5.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.35E-02 ± 3.56E-03	L.T. 7.E-02
10/06/09	10/13/09	1.01E+04	CU.FT.	1.73E-02 ± 5.32E-03	L.T. 7.E-02
10/13/09	10/20/09	1.01E+04	CU.FT.	1.48E-02 ± 5.31E-03	L.T. 6.E-02
10/20/09	10/27/09	9.96E+03	CU.FT.	1.46E-02 ± 3.92E-03	L.T. 7.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.60E-02 ± 5.67E-03	L.T. 5.E-02
11/03/09	11/10/09	9.98E+03	CU.FT.	2.63E-02 ± 6.09E-03	L.T. 7.E-02
11/10/09	11/17/09	9.91E+03	CU.FT.	2.80E-02 ± 5.80E-03	L.T. 6.E-02
11/17/09	11/24/09	1.04E+04	CU.FT.	3.96E-02 ± 6.16E-03	L.T. 2.E-02
11/24/09	12/01/09	9.74E+03	CU.FT.	3.45E-02 ± 6.43E-03	L.T. 3.E-02
12/01/09	12/08/09	1.03E+04	CU.FT.	2.14E-02 ± 4.40E-03	L.T. 5.E-02
12/08/09	12/15/09	1.01E+04	CU.FT.	3.42E-02 ± 6.43E-03	L.T. 6.E-02
12/15/09	12/22/09	9.98E+03	CU.FT.	5.52E-02 ± 7.17E-03	L.T. 3.E-02
12/22/09	12/29/09	1.01E+04	CU.FT.	2.94E-02 ± 5.91E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 04

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.74E-02 ± 4.58E-03	L.T. 7.E-02
01/06/09	01/13/09	9.86E+03	CU.FT.	2.50E-02 ± 4.42E-03	L.T. 5.E-02
01/13/09	01/20/09	1.01E+04	CU.FT.	2.16E-02 ± 4.06E-03	L.T. 2.E-02
01/20/09	01/27/09	1.01E+04	CU.FT.	2.68E-02 ± 4.55E-03	L.T. 2.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	2.05E-02 ± 4.19E-03	L.T. 5.E-02
02/03/09	02/10/09	1.02E+04	CU.FT.	2.81E-02 ± 4.78E-03	L.T. 2.E-02
02/10/09	02/17/09	1.00E+04	CU.FT.	2.13E-02 ± 4.08E-03	L.T. 2.E-02
02/17/09	02/24/09	9.91E+03	CU.FT.	2.83E-02 ± 4.67E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	3.08E-02 ± 4.80E-03	L.T. 2.E-02
03/03/09	03/10/09	1.00E+04	CU.FT.	1.66E-02 ± 4.15E-03	L.T. 2.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.35E-02 ± 4.42E-03	L.T. 2.E-02
03/17/09	03/24/09	1.02E+04	CU.FT.	1.29E-02 ± 3.75E-03	L.T. 6.E-02
03/24/09	03/30/09	8.49E+03	CU.FT.	1.62E-02 ± 4.16E-03	L.T. 5.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.62E-02 ± 3.49E-03	L.T. 3.E-02
04/07/09	04/14/09	1.02E+04	CU.FT.	2.19E-02 ± 4.07E-03	L.T. 2.E-02
04/14/09	04/22/09	1.13E+04	CU.FT.	1.19E-02 ± 3.18E-03	L.T. 2.E-02
04/21/09	04/28/09	8.72E+03	CU.FT.	1.22E-02 ± 3.51E-03	L.T. 4.E-02
04/28/09	05/05/09	9.93E+03	CU.FT.	1.28E-02 ± 3.75E-03	L.T. 2.E-02
05/05/09	05/12/09	1.03E+04	CU.FT.	1.71E-02 ± 3.69E-03	L.T. 5.E-02
05/12/09	05/19/09	1.01E+04	CU.FT.	1.27E-02 ± 3.20E-03	L.T. 6.E-02
05/19/09	05/26/09	9.93E+03	CU.FT.	2.14E-02 ± 4.21E-03	L.T. 6.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	1.52E-02 ± 3.70E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	8.16E-03 ± 3.45E-03	L.T. 3.E-02
06/09/09	06/16/09	1.01E+04	CU.FT.	1.32E-02 ± 3.59E-03	L.T. 3.E-02
06/16/09	06/23/09	9.92E+03	CU.FT.	1.39E-02 ± 3.79E-03	L.T. 6.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	2.80E-02 ± 6.32E-03	L.T. 7.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 04

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	2.00E-02 ± 4.50E-03	L.T. 6.E-02
07/07/09	07/13/09	8.49E+03	CU.FT.	1.88E-02 ± 4.49E-03	L.T. 7.E-02
07/13/09	07/21/09	1.18E+04	CU.FT.	8.99E-03 ± 4.86E-03	L.T. 4.E-02
07/21/09	07/28/09	1.00E+04	CU.FT.	1.48E-02 ± 5.97E-03	L.T. 5.E-02
07/28/09	08/03/09	8.66E+03	CU.FT.	1.24E-02 ± 5.97E-03	L.T. 4.E-02
08/03/09	08/11/09	1.13E+04	CU.FT.	2.11E-02 ± 5.35E-03	L.T. 6.E-02
08/11/09	08/18/09	1.02E+04	CU.FT.	1.67E-02 ± 4.50E-03	L.T. 2.E-02
08/18/09	08/25/09	9.97E+03	CU.FT.	1.74E-02 ± 5.10E-03	L.T. 5.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	1.75E-02 ± 5.24E-03	L.T. 5.E-02
09/01/09	09/08/09	1.00E+04	CU.FT.	2.67E-02 ± 6.03E-03	L.T. 6.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.03E-02 ± 4.90E-03	L.T. 7.E-02
09/15/09	09/22/09	9.92E+03	CU.FT.	2.30E-02 ± 6.38E-03	L.T. 2.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	8.13E-03 ± 5.17E-03	L.T. 5.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.44E-02 ± 3.64E-03	L.T. 7.E-02
10/06/09	10/13/09	1.01E+04	CU.FT.	1.55E-02 ± 5.22E-03	L.T. 7.E-02
10/13/09	10/20/09	1.01E+04	CU.FT.	1.91E-02 ± 5.54E-03	L.T. 6.E-02
10/20/09	10/27/09	9.91E+03	CU.FT.	1.96E-02 ± 4.30E-03	L.T. 7.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.17E-02 ± 5.45E-03	L.T. 5.E-02
11/03/09	11/10/09	9.99E+03	CU.FT.	2.71E-02 ± 6.12E-03	L.T. 7.E-02
11/10/09	11/17/09	9.98E+03	CU.FT.	3.83E-02 ± 6.28E-03	L.T. 6.E-02
11/17/09	11/24/09	1.03E+04	CU.FT.	4.06E-02 ± 6.25E-03	L.T. 2.E-02
11/24/09	12/01/09	9.91E+03	CU.FT.	2.64E-02 ± 5.95E-03	L.T. 6.E-02
12/01/09	12/08/09	1.01E+04	CU.FT.	2.55E-02 ± 4.72E-03	L.T. 5.E-02
12/08/09	12/15/09	1.01E+04	CU.FT.	4.79E-02 ± 7.04E-03	L.T. 6.E-02
12/15/09	12/22/09	1.00E+04	CU.FT.	5.05E-02 ± 6.95E-03	L.T. 6.E-02
12/22/09	12/29/09	1.01E+04	CU.FT.	2.54E-02 ± 5.70E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 05

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.81E-02 ± 4.62E-03	L.T. 6.E-02
01/06/09	01/13/09	9.91E+03	CU.FT.	2.55E-02 ± 4.44E-03	L.T. 5.E-02
01/13/09	01/20/09	1.01E+04	CU.FT.	2.40E-02 ± 4.22E-03	L.T. 6.E-02
01/20/09	01/27/09	1.01E+04	CU.FT.	3.31E-02 ± 4.94E-03	L.T. 1.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.77E-02 ± 3.99E-03	L.T. 6.E-02
02/03/09	02/10/09	1.01E+04	CU.FT.	3.09E-02 ± 4.98E-03	L.T. 2.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.65E-02 ± 4.41E-03	L.T. 3.E-02
02/17/09	02/24/09	9.91E+03	CU.FT.	2.95E-02 ± 4.75E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.84E-02 ± 4.66E-03	L.T. 2.E-02
03/03/09	03/10/09	1.00E+04	CU.FT.	2.00E-02 ± 4.39E-03	L.T. 2.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.23E-02 ± 4.34E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.68E-02 ± 4.07E-03	L.T. 7.E-02
03/24/09	03/30/09	8.53E+03	CU.FT.	1.35E-02 ± 3.92E-03	L.T. 3.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.17E-02 ± 3.14E-03	L.T. 3.E-02
04/07/09	04/14/09	1.01E+04	CU.FT.	2.45E-02 ± 4.28E-03	L.T. 6.E-02
04/14/09	04/22/09	1.14E+04	CU.FT.	1.64E-02 ± 3.50E-03	L.T. 2.E-02
04/21/09	04/28/09	8.65E+03	CU.FT.	1.23E-02 ± 3.54E-03	L.T. 4.E-02
04/28/09	05/05/09	9.97E+03	CU.FT.	1.53E-02 ± 3.93E-03	L.T. 2.E-02
05/05/09	05/12/09	1.02E+04	CU.FT.	1.51E-02 ± 3.55E-03	L.T. 4.E-02
05/12/09	05/19/09	1.01E+04	CU.FT.	1.20E-02 ± 3.13E-03	L.T. 6.E-02
05/19/09	05/26/09	9.96E+03	CU.FT.	1.65E-02 ± 3.84E-03	L.T. 5.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	2.15E-02 ± 4.16E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.08E-02 ± 3.67E-03	L.T. 2.E-02
06/09/09	06/16/09	9.18E+03	CU.FT.	9.93E-03 ± 3.55E-03	L.T. 2.E-02
06/16/09	06/23/09	9.92E+03	CU.FT.	1.58E-02 ± 3.94E-03	L.T. 5.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	2.29E-02 ± 6.08E-03	L.T. 7.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 05

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	1.46E-02 ± 4.13E-03	L.T. 6.E-02
07/07/09	07/13/09	8.49E+03	CU.FT.	2.27E-02 ± 4.78E-03	L.T. 6.E-02
07/13/09	07/21/09	1.17E+04	CU.FT.	1.14E-02 ± 5.02E-03	L.T. 4.E-02
07/21/09	07/28/09	1.00E+04	CU.FT.	1.87E-02 ± 6.16E-03	L.T. 6.E-02
07/28/09	08/03/09	8.66E+03	CU.FT.	1.33E-02 ± 6.02E-03	L.T. 5.E-02
08/03/09	08/11/09	1.13E+04	CU.FT.	2.09E-02 ± 5.34E-03	L.T. 6.E-02
08/11/09	08/18/09	1.03E+04	CU.FT.	2.08E-02 ± 4.73E-03	L.T. 2.E-02
08/18/09	08/25/09	9.97E+03	CU.FT.	1.84E-02 ± 5.16E-03	L.T. 5.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	9.46E-03 ± 4.77E-03	L.T. 5.E-02
09/01/09	09/08/09	1.00E+04	CU.FT.	3.79E-02 ± 6.56E-03	L.T. 7.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.46E-02 ± 5.15E-03	L.T. 6.E-02
09/15/09	09/22/09	9.92E+03	CU.FT.	1.04E-02 ± 5.75E-03	L.T. 2.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.11E-02 ± 5.33E-03	L.T. 5.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.58E-02 ± 3.76E-03	L.T. 7.E-02
10/06/09	10/13/09	1.01E+04	CU.FT.	2.16E-02 ± 5.55E-03	L.T. 7.E-02
10/13/09	10/20/09	1.01E+04	CU.FT.	1.18E-02 ± 5.14E-03	L.T. 6.E-02
10/20/09	10/27/09	9.97E+03	CU.FT.	1.54E-02 ± 3.98E-03	L.T. 7.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.63E-02 ± 5.69E-03	L.T. 5.E-02
11/03/09	11/10/09	1.00E+04	CU.FT.	2.99E-02 ± 6.25E-03	L.T. 7.E-02
11/10/09	11/17/09	9.98E+03	CU.FT.	3.29E-02 ± 6.02E-03	L.T. 6.E-02
11/17/09	11/24/09	1.03E+04	CU.FT.	3.93E-02 ± 6.19E-03	L.T. 7.E-02
11/24/09	12/01/09	9.91E+03	CU.FT.	2.70E-02 ± 5.98E-03	L.T. 6.E-02
12/01/09	12/08/09	1.01E+04	CU.FT.	1.77E-02 ± 4.22E-03	L.T. 5.E-02
12/08/09	12/15/09	1.01E+04	CU.FT.	3.56E-02 ± 6.50E-03	L.T. 4.E-02
12/15/09	12/22/09	1.00E+04	CU.FT.	5.38E-02 ± 7.09E-03	L.T. 6.E-02
12/22/09	12/29/09	1.00E+04	CU.FT.	3.15E-02 ± 6.06E-03	L.T. 3.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 06

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.96E-02 ± 4.71E-03	L.T. 6.E-02
01/06/09	01/13/09	9.91E+03	CU.FT.	2.80E-02 ± 4.61E-03	L.T. 5.E-02
01/13/09	01/20/09	1.01E+04	CU.FT.	2.74E-02 ± 4.46E-03	L.T. 6.E-02
01/20/09	01/27/09	1.01E+04	CU.FT.	2.93E-02 ± 4.71E-03	L.T. 1.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.48E-02 ± 3.76E-03	L.T. 6.E-02
02/03/09	02/10/09	1.01E+04	CU.FT.	2.47E-02 ± 4.59E-03	L.T. 3.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.45E-02 ± 4.28E-03	L.T. 3.E-02
02/17/09	02/24/09	9.91E+03	CU.FT.	2.80E-02 ± 4.65E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.74E-02 ± 4.60E-03	L.T. 2.E-02
03/03/09	03/10/09	1.00E+04	CU.FT.	1.63E-02 ± 4.13E-03	L.T. 2.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.64E-02 ± 4.62E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.41E-02 ± 3.87E-03	L.T. 2.E-02
03/24/09	03/30/09	8.53E+03	CU.FT.	1.42E-02 ± 3.98E-03	L.T. 3.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.24E-02 ± 3.19E-03	L.T. 5.E-02
04/07/09	04/14/09	1.01E+04	CU.FT.	1.99E-02 ± 3.95E-03	L.T. 6.E-02
04/14/09	04/22/09	1.14E+04	CU.FT.	1.17E-02 ± 3.14E-03	L.T. 2.E-02
04/21/09	04/28/09	8.60E+03	CU.FT.	1.41E-02 ± 3.73E-03	L.T. 4.E-02
04/28/09	05/05/09	9.92E+03	CU.FT.	1.45E-02 ± 3.88E-03	L.T. 2.E-02
05/05/09	05/12/09	1.03E+04	CU.FT.	1.67E-02 ± 3.66E-03	L.T. 4.E-02
05/12/09	05/19/09	1.01E+04	CU.FT.	1.16E-02 ± 3.09E-03	L.T. 6.E-02
05/19/09	05/26/09	9.96E+03	CU.FT.	2.04E-02 ± 4.13E-03	L.T. 5.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	1.71E-02 ± 3.85E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.01E-02 ± 3.61E-03	L.T. 2.E-02
06/09/09	06/16/09	1.01E+04	CU.FT.	1.14E-02 ± 3.44E-03	L.T. 3.E-02
06/16/09	06/23/09	9.92E+03	CU.FT.	1.54E-02 ± 3.90E-03	L.T. 5.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	3.07E-02 ± 6.45E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 06

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	2.12E-02 ± 4.58E-03	L.T. 6.E-02
07/07/09	07/13/09	8.49E+03	CU.FT.	2.13E-02 ± 4.68E-03	L.T. 6.E-02
07/13/09	07/21/09	1.17E+04	CU.FT.	1.63E-02 ± 5.27E-03	L.T. 4.E-02
07/21/09	07/28/09	1.00E+04	CU.FT.	2.55E-02 ± 6.48E-03	L.T. 6.E-02
07/28/09	08/03/09	8.66E+03	CU.FT.	1.83E-02 ± 6.30E-03	L.T. 4.E-02
08/03/09	08/11/09	1.13E+04	CU.FT.	1.04E-02 ± 4.80E-03	L.T. 6.E-02
08/11/09	08/18/09	1.03E+04	CU.FT.	1.42E-02 ± 4.31E-03	L.T. 2.E-02
08/18/09	08/25/09	9.97E+03	CU.FT.	1.54E-02 ± 4.99E-03	L.T. 5.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	1.35E-02 ± 5.01E-03	L.T. 2.E-02
09/01/09	09/08/09	1.00E+04	CU.FT.	2.81E-02 ± 6.09E-03	L.T. 7.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.52E-02 ± 5.18E-03	L.T. 6.E-02
09/15/09	09/22/09	9.92E+03	CU.FT.	2.39E-02 ± 6.42E-03	L.T. 3.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.77E-02 ± 5.69E-03	L.T. 5.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.55E-02 ± 3.73E-03	L.T. 6.E-02
10/06/09	10/13/09	1.01E+04	CU.FT.	1.20E-02 ± 5.01E-03	L.T. 7.E-02
10/13/09	10/20/09	1.01E+04	CU.FT.	1.21E-02 ± 5.16E-03	L.T. 3.E-02
10/20/09	10/27/09	9.97E+03	CU.FT.	1.26E-02 ± 3.77E-03	L.T. 6.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.27E-02 ± 5.50E-03	L.T. 3.E-02
11/03/09	11/10/09	9.99E+03	CU.FT.	3.15E-02 ± 6.34E-03	L.T. 3.E-02
11/10/09	11/17/09	9.98E+03	CU.FT.	2.78E-02 ± 5.76E-03	L.T. 5.E-02
11/17/09	11/24/09	1.03E+04	CU.FT.	3.73E-02 ± 6.09E-03	L.T. 7.E-02
11/24/09	12/01/09	9.91E+03	CU.FT.	2.83E-02 ± 6.04E-03	L.T. 6.E-02
12/01/09	12/08/09	1.01E+04	CU.FT.	2.02E-02 ± 4.39E-03	L.T. 3.E-02
12/08/09	12/15/09	1.01E+04	CU.FT.	4.07E-02 ± 6.73E-03	L.T. 7.E-02
12/15/09	12/22/09	1.00E+04	CU.FT.	5.38E-02 ± 7.09E-03	L.T. 6.E-02
12/22/09	12/29/09	9.96E+03	CU.FT.	3.13E-02 ± 6.07E-03	L.T. 5.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 07

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.61E-02 ± 4.49E-03	L.T. 6.E-02
01/06/09	01/13/09	1.00E+04	CU.FT.	2.55E-02 ± 4.42E-03	L.T. 5.E-02
01/13/09	01/20/09	1.00E+04	CU.FT.	2.48E-02 ± 4.31E-03	L.T. 6.E-02
01/20/09	01/27/09	1.00E+04	CU.FT.	3.09E-02 ± 4.84E-03	L.T. 1.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.42E-02 ± 3.72E-03	L.T. 6.E-02
02/03/09	02/10/09	9.98E+03	CU.FT.	2.99E-02 ± 4.95E-03	L.T. 3.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.18E-02 ± 4.09E-03	L.T. 3.E-02
02/17/09	02/24/09	1.00E+04	CU.FT.	3.08E-02 ± 4.80E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.64E-02 ± 4.53E-03	L.T. 2.E-02
03/03/09	03/10/09	9.90E+03	CU.FT.	1.92E-02 ± 4.36E-03	L.T. 2.E-02
03/10/09	03/17/09	1.00E+04	CU.FT.	2.57E-02 ± 4.57E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.66E-02 ± 4.05E-03	L.T. 2.E-02
03/24/09	03/30/09	8.61E+03	CU.FT.	1.63E-02 ± 4.13E-03	L.T. 3.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.24E-02 ± 3.19E-03	L.T. 5.E-02
04/07/09	04/14/09	9.93E+03	CU.FT.	2.00E-02 ± 4.00E-03	L.T. 6.E-02
04/14/09	04/21/09	1.03E+04	CU.FT.	1.48E-02 ± 3.62E-03	L.T. 3.E-02
04/21/09	04/28/09	1.01E+04	CU.FT.	1.64E-02 ± 3.56E-03	L.T. 4.E-02
04/28/09	05/05/09	9.90E+03	CU.FT.	1.40E-02 ± 3.85E-03	L.T. 2.E-02
05/05/09	05/12/09	1.01E+04	CU.FT.	1.55E-02 ± 3.61E-03	L.T. 4.E-02
05/12/09	05/19/09	1.00E+04	CU.FT.	1.17E-02 ± 3.12E-03	L.T. 7.E-02
05/19/09	05/26/09	1.01E+04	CU.FT.	1.77E-02 ± 3.90E-03	L.T. 5.E-02
05/26/09	06/02/09	1.01E+04	CU.FT.	1.80E-02 ± 3.94E-03	L.T. 4.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.57E-02 ± 4.05E-03	L.T. 2.E-02
06/09/09	06/16/09	1.01E+04	CU.FT.	1.05E-02 ± 3.36E-03	L.T. 3.E-02
06/16/09	06/23/09	9.97E+03	CU.FT.	1.38E-02 ± 3.77E-03	L.T. 5.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	2.57E-02 ± 6.21E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 07

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	1.82E-02 ± 4.38E-03	L.T. 6.E-02
07/07/09	07/13/09	8.59E+03	CU.FT.	2.05E-02 ± 4.58E-03	L.T. 6.E-02
07/13/09	07/21/09	1.17E+04	CU.FT.	1.43E-02 ± 5.17E-03	L.T. 4.E-02
07/21/09	07/28/09	9.97E+03	CU.FT.	2.61E-02 ± 6.52E-03	L.T. 6.E-02
07/28/09	08/03/09	8.70E+03	CU.FT.	1.05E-02 ± 5.84E-03	L.T. 5.E-02
08/03/09	08/11/09	1.12E+04	CU.FT.	2.65E-02 ± 5.65E-03	L.T. 6.E-02
08/11/09	08/18/09	1.00E+04	CU.FT.	2.07E-02 ± 4.83E-03	L.T. 3.E-02
08/18/09	08/25/09	1.01E+04	CU.FT.	2.22E-02 ± 5.32E-03	L.T. 5.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	1.60E-02 ± 5.16E-03	L.T. 4.E-02
09/01/09	09/08/09	1.00E+04	CU.FT.	3.76E-02 ± 6.54E-03	L.T. 7.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.22E-02 ± 5.01E-03	L.T. 6.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	2.61E-02 ± 6.55E-03	L.T. 3.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	9.46E-03 ± 5.24E-03	L.T. 5.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.18E-02 ± 3.43E-03	L.T. 6.E-02
10/06/09	10/13/09	1.00E+04	CU.FT.	1.43E-02 ± 5.19E-03	L.T. 4.E-02
10/13/09	10/20/09	1.00E+04	CU.FT.	2.23E-02 ± 5.75E-03	L.T. 3.E-02
10/20/09	10/27/09	1.00E+04	CU.FT.	1.54E-02 ± 3.97E-03	L.T. 6.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.85E-02 ± 5.80E-03	L.T. 5.E-02
11/03/09	11/10/09	1.01E+04	CU.FT.	2.41E-02 ± 5.92E-03	L.T. 6.E-02
11/10/09	11/17/09	9.93E+03	CU.FT.	3.17E-02 ± 5.98E-03	L.T. 5.E-02
11/17/09	11/24/09	1.03E+04	CU.FT.	4.16E-02 ± 6.29E-03	L.T. 7.E-02
11/24/09	12/01/09	9.84E+03	CU.FT.	2.73E-02 ± 6.03E-03	L.T. 5.E-02
12/01/09	12/08/09	1.02E+04	CU.FT.	2.28E-02 ± 4.52E-03	L.T. 5.E-02
12/08/09	12/15/09	9.98E+03	CU.FT.	4.01E-02 ± 6.76E-03	L.T. 6.E-02
12/15/09	12/22/09	1.01E+04	CU.FT.	5.80E-02 ± 7.22E-03	L.T. 6.E-02
12/22/09	12/29/09	1.04E+04	CU.FT.	3.16E-02 ± 5.89E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 08

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.01E+04	CU.FT.	2.40E-02 ± 4.39E-03	L.T. 6.E-02
01/06/09	01/13/09	9.99E+03	CU.FT.	2.81E-02 ± 4.59E-03	L.T. 5.E-02
01/13/09	01/20/09	9.97E+03	CU.FT.	2.23E-02 ± 4.14E-03	L.T. 6.E-02
01/20/09	01/27/09	9.97E+03	CU.FT.	3.09E-02 ± 4.84E-03	L.T. 1.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.36E-02 ± 3.67E-03	L.T. 6.E-02
02/03/09	02/10/09	9.92E+03	CU.FT.	3.25E-02 ± 5.13E-03	L.T. 3.E-02
02/10/09	02/17/09	1.02E+04	CU.FT.	2.50E-02 ± 4.28E-03	L.T. 3.E-02
02/17/09	02/24/09	9.98E+03	CU.FT.	3.08E-02 ± 4.81E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	3.05E-02 ± 4.79E-03	L.T. 2.E-02
03/03/09	03/10/09	1.02E+04	CU.FT.	1.70E-02 ± 4.12E-03	L.T. 2.E-02
03/10/09	03/17/09	9.86E+03	CU.FT.	2.45E-02 ± 4.53E-03	L.T. 3.E-02
03/17/09	03/24/09	1.03E+04	CU.FT.	1.87E-02 ± 4.14E-03	L.T. 2.E-02
03/24/09	03/30/09	8.47E+03	CU.FT.	1.64E-02 ± 4.19E-03	L.T. 3.E-02
03/30/09	04/07/09	1.14E+04	CU.FT.	1.47E-02 ± 3.39E-03	L.T. 5.E-02
04/07/09	04/14/09	9.97E+03	CU.FT.	2.46E-02 ± 4.32E-03	L.T. 6.E-02
04/14/09	04/21/09	1.03E+04	CU.FT.	1.51E-02 ± 3.65E-03	L.T. 3.E-02
04/21/09	04/28/09	1.01E+04	CU.FT.	1.36E-02 ± 3.32E-03	L.T. 3.E-02
04/28/09	05/05/09	9.75E+03	CU.FT.	1.46E-02 ± 3.94E-03	L.T. 2.E-02
05/05/09	05/12/09	1.01E+04	CU.FT.	1.40E-02 ± 3.49E-03	L.T. 4.E-02
05/12/09	05/19/09	1.01E+04	CU.FT.	8.20E-03 ± 2.75E-03	L.T. 7.E-02
05/19/09	05/26/09	1.00E+04	CU.FT.	2.27E-02 ± 4.29E-03	L.T. 5.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	1.76E-02 ± 3.88E-03	L.T. 4.E-02
06/02/09	06/09/09	9.80E+03	CU.FT.	1.25E-02 ± 3.86E-03	L.T. 2.E-02
06/09/09	06/16/09	1.04E+04	CU.FT.	9.19E-03 ± 3.17E-03	L.T. 3.E-02
06/16/09	06/23/09	9.75E+03	CU.FT.	1.16E-02 ± 3.65E-03	L.T. 5.E-02
06/23/09	06/30/09	1.02E+04	CU.FT.	2.72E-02 ± 6.34E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 08

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.97E+03	CU.FT.	1.87E-02 ± 4.40E-03	L.T. 6.E-02
07/07/09	07/13/09	8.53E+03	CU.FT.	1.82E-02 ± 4.43E-03	L.T. 6.E-02
07/13/09	07/21/09	1.16E+04	CU.FT.	7.73E-03 ± 4.87E-03	L.T. 4.E-02
07/21/09	07/28/09	1.01E+04	CU.FT.	2.07E-02 ± 6.20E-03	L.T. 6.E-02
07/28/09	08/03/09	8.59E+03	CU.FT.	1.98E-02 ± 6.43E-03	L.T. 5.E-02
08/03/09	08/11/09	1.12E+04	CU.FT.	1.85E-02 ± 5.26E-03	L.T. 6.E-02
08/11/09	08/18/09	1.02E+04	CU.FT.	1.70E-02 ± 4.52E-03	L.T. 3.E-02
08/18/09	08/25/09	1.00E+04	CU.FT.	2.12E-02 ± 5.31E-03	L.T. 5.E-02
08/25/09	09/01/09	1.00E+04	CU.FT.	1.42E-02 ± 5.10E-03	L.T. 4.E-02
09/01/09	09/08/09	1.01E+04	CU.FT.	2.96E-02 ± 6.12E-03	L.T. 7.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.39E-02 ± 5.11E-03	L.T. 6.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	1.97E-02 ± 6.25E-03	L.T. 3.E-02
09/22/09	09/29/09	1.02E+04	CU.FT.	1.27E-02 ± 5.38E-03	L.T. 5.E-02
09/29/09	10/06/09	9.98E+03	CU.FT.	1.20E-02 ± 3.45E-03	L.T. 4.E-02
10/06/09	10/13/09	1.00E+04	CU.FT.	1.19E-02 ± 5.05E-03	L.T. 6.E-02
10/13/09	10/20/09	9.92E+03	CU.FT.	1.87E-02 ± 5.60E-03	L.T. 3.E-02
10/20/09	10/27/09	1.01E+04	CU.FT.	1.49E-02 ± 3.91E-03	L.T. 6.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.22E-02 ± 5.47E-03	L.T. 5.E-02
11/03/09	11/10/09	1.01E+04	CU.FT.	3.02E-02 ± 6.22E-03	L.T. 6.E-02
11/10/09	11/17/09		(a)		
11/10/09	11/24/09	2.03E+04	CU.FT.	3.72E-02 ± 3.87E-03	L.T. 5.E-02
11/24/09	12/01/09	9.79E+03	CU.FT.	2.82E-02 ± 6.10E-03	L.T. 3.E-02
12/01/09	12/08/09	1.02E+04	CU.FT.	2.64E-02 ± 4.75E-03	L.T. 5.E-02
12/08/09	12/15/09	1.00E+04	CU.FT.	4.14E-02 ± 6.81E-03	L.T. 7.E-02
12/15/09	12/22/09	9.96E+03	CU.FT.	5.95E-02 ± 7.35E-03	L.T. 5.E-02
12/22/09	12/29/09		(b)		

(a) Sample unavailable due to the weather

(b) Sample not taken

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 09

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.01E+04	CU.FT.	2.27E-02 ± 4.30E-03	L.T. 6.E-02
01/06/09	01/13/09	1.00E+04	CU.FT.	2.67E-02 ± 4.50E-03	L.T. 5.E-02
01/13/09	01/20/09	9.98E+03	CU.FT.	2.36E-02 ± 4.23E-03	L.T. 6.E-02
01/20/09	01/27/09	9.98E+03	CU.FT.	3.25E-02 ± 4.94E-03	L.T. 2.E-02
01/27/09	02/03/09	9.97E+03	CU.FT.	1.62E-02 ± 3.90E-03	L.T. 7.E-02
02/03/09	02/10/09	1.00E+04	CU.FT.	2.69E-02 ± 4.76E-03	L.T. 2.E-02
02/10/09	02/17/09	1.03E+04	CU.FT.	2.05E-02 ± 3.95E-03	L.T. 2.E-02
02/17/09	02/24/09	9.92E+03	CU.FT.	2.82E-02 ± 4.66E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.61E-02 ± 4.51E-03	L.T. 2.E-02
03/03/09	03/10/09	9.87E+03	CU.FT.	1.83E-02 ± 4.31E-03	L.T. 2.E-02
03/10/09	03/17/09	1.01E+04	CU.FT.	2.23E-02 ± 4.32E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.51E-02 ± 3.94E-03	L.T. 2.E-02
03/24/09	03/30/09	8.49E+03	CU.FT.	1.62E-02 ± 4.16E-03	L.T. 4.E-02
03/30/09	04/07/09	1.07E+04	CU.FT.	1.31E-02 ± 3.42E-03	L.T. 5.E-02
04/07/09	04/14/09	9.79E+03	CU.FT.	2.30E-02 ± 4.25E-03	L.T. 6.E-02
04/14/09	04/21/09	1.04E+04	CU.FT.	1.85E-02 ± 3.88E-03	L.T. 4.E-02
04/21/09	04/28/09	9.97E+03	CU.FT.	1.38E-02 ± 3.36E-03	L.T. 4.E-02
04/28/09	05/05/09	9.84E+03	CU.FT.	1.35E-02 ± 3.83E-03	L.T. 2.E-02
05/05/09	05/12/09	1.01E+04	CU.FT.	1.48E-02 ± 3.55E-03	L.T. 5.E-02
05/12/09	05/19/09	1.01E+04	CU.FT.	1.08E-02 ± 3.02E-03	L.T. 3.E-02
05/19/09	05/26/09	1.01E+04	CU.FT.	1.97E-02 ± 4.04E-03	L.T. 4.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	2.19E-02 ± 4.19E-03	L.T. 5.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.23E-02 ± 3.79E-03	L.T. 4.E-02
06/09/09	06/16/09	1.00E+04	CU.FT.	1.06E-02 ± 3.39E-03	L.T. 3.E-02
06/16/09	06/23/09	9.97E+03	CU.FT.	1.42E-02 ± 3.80E-03	L.T. 6.E-02
06/23/09	06/30/09	1.02E+04	CU.FT.	2.81E-02 ± 6.38E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 09

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	1.58E-02 ± 4.22E-03	L.T. 6.E-02
07/07/09	07/13/09	8.58E+03	CU.FT.	2.36E-02 ± 4.82E-03	L.T. 7.E-02
07/13/09	07/21/09	1.16E+04	CU.FT.	1.58E-02 ± 5.28E-03	L.T. 4.E-02
07/21/09	07/28/09	1.01E+04	CU.FT.	1.76E-02 ± 6.05E-03	L.T. 5.E-02
07/28/09	08/03/09	8.72E+03	CU.FT.	L.T. 9.E-03	L.T. 3.E-02
08/03/09	08/11/09	1.10E+04	CU.FT.	2.61E-02 ± 5.71E-03	L.T. 5.E-02
08/11/09	08/18/09	1.02E+04	CU.FT.	2.00E-02 ± 4.71E-03	L.T. 3.E-02
08/18/09	08/25/09	1.00E+04	CU.FT.	2.27E-02 ± 5.39E-03	L.T. 5.E-02
08/25/09	09/01/09	1.00E+04	CU.FT.	1.42E-02 ± 5.10E-03	L.T. 4.E-02
09/01/09	09/08/09	1.01E+04	CU.FT.	3.00E-02 ± 6.14E-03	L.T. 6.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.05E-02 ± 4.91E-03	L.T. 4.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	2.09E-02 ± 6.31E-03	L.T. 3.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.17E-02 ± 5.36E-03	L.T. 7.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.15E-02 ± 3.40E-03	L.T. 6.E-02
10/06/09	10/13/09	1.00E+04	CU.FT.	1.28E-02 ± 5.10E-03	L.T. 6.E-02
10/13/09	10/20/09	9.91E+03	CU.FT.	1.34E-02 ± 5.32E-03	L.T. 2.E-02
10/20/09	10/27/09	1.01E+04	CU.FT.	1.52E-02 ± 3.93E-03	L.T. 6.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.68E-02 ± 5.72E-03	L.T. 5.E-02
11/03/09	11/10/09	1.01E+04	CU.FT.	2.78E-02 ± 6.10E-03	L.T. 6.E-02
11/10/09	11/17/09	9.87E+03	CU.FT.	3.25E-02 ± 6.05E-03	L.T. 5.E-02
11/17/09	11/24/09	1.04E+04	CU.FT.	4.06E-02 ± 6.21E-03	L.T. 5.E-02
11/24/09	12/01/09	9.81E+03	CU.FT.	2.56E-02 ± 5.95E-03	L.T. 5.E-02
12/01/09	12/08/09	1.02E+04	CU.FT.	2.00E-02 ± 4.34E-03	L.T. 6.E-02
12/08/09	12/15/09	9.98E+03	CU.FT.	3.77E-02 ± 6.65E-03	L.T. 6.E-02
12/15/09	12/22/09	1.02E+04	CU.FT.	5.61E-02 ± 7.10E-03	L.T. 6.E-02
12/22/09	12/29/09	1.01E+04	CU.FT.	3.05E-02 ± 5.96E-03	L.T. 6.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 10

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.02E+04	CU.FT.	2.70E-02 ± 4.55E-03	L.T. 6.E-02
01/06/09	01/13/09	1.00E+04	CU.FT.	2.64E-02 ± 4.48E-03	L.T. 5.E-02
01/13/09	01/20/09	1.01E+04	CU.FT.	1.91E-02 ± 3.87E-03	L.T. 6.E-02
01/20/09	01/27/09	1.01E+04	CU.FT.	2.94E-02 ± 4.72E-03	L.T. 2.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.44E-02 ± 3.73E-03	L.T. 7.E-02
02/03/09	02/10/09	1.01E+04	CU.FT.	2.56E-02 ± 4.65E-03	L.T. 2.E-02
02/10/09	02/17/09	1.00E+04	CU.FT.	2.25E-02 ± 4.16E-03	L.T. 3.E-02
02/17/09	02/24/09	1.00E+04	CU.FT.	3.30E-02 ± 4.94E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.99E-02 ± 4.75E-03	L.T. 2.E-02
03/03/09	03/10/09	9.91E+03	CU.FT.	2.06E-02 ± 4.46E-03	L.T. 2.E-02
03/10/09	03/17/09	1.01E+04	CU.FT.	2.81E-02 ± 4.70E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	2.27E-02 ± 4.47E-03	L.T. 3.E-02
03/24/09	03/30/09	8.60E+03	CU.FT.	1.58E-02 ± 4.10E-03	L.T. 4.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.08E-02 ± 3.07E-03	L.T. 4.E-02
04/07/09	04/14/09	9.97E+03	CU.FT.	2.17E-02 ± 4.11E-03	L.T. 6.E-02
04/14/09	04/21/09	1.02E+04	CU.FT.	1.25E-02 ± 3.46E-03	L.T. 4.E-02
04/21/09	04/28/09	1.00E+04	CU.FT.	1.49E-02 ± 3.46E-03	L.T. 4.E-02
04/28/09	05/05/09	9.93E+03	CU.FT.	1.20E-02 ± 3.68E-03	L.T. 2.E-02
05/05/09	05/12/09	1.02E+04	CU.FT.	1.41E-02 ± 3.47E-03	L.T. 5.E-02
05/12/09	05/19/09	9.96E+03	CU.FT.	1.31E-02 ± 3.26E-03	L.T. 3.E-02
05/19/09	05/26/09	1.01E+04	CU.FT.	2.13E-02 ± 4.16E-03	L.T. 4.E-02
05/26/09	06/02/09	1.01E+04	CU.FT.	1.86E-02 ± 3.99E-03	L.T. 5.E-02
06/02/09	06/09/09	1.00E+04	CU.FT.	1.30E-02 ± 3.84E-03	L.T. 4.E-02
06/09/09	06/16/09	1.00E+04	CU.FT.	1.46E-02 ± 3.73E-03	L.T. 3.E-02
06/16/09	06/23/09	9.97E+03	CU.FT.	1.23E-02 ± 3.65E-03	L.T. 6.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	2.28E-02 ± 6.08E-03	L.T. 4.E-02

VII-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 10

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.92E+03	CU.FT.	2.15E-02 ± 4.60E-03	L.T. 6.E-02
07/07/09	07/13/09	8.59E+03	CU.FT.	2.39E-02 ± 4.84E-03	L.T. 7.E-02
07/13/09	07/21/09	1.17E+04	CU.FT.	1.09E-02 ± 5.00E-03	L.T. 4.E-02
07/21/09	07/28/09	9.91E+03	CU.FT.	1.99E-02 ± 6.27E-03	L.T. 5.E-02
07/28/09	08/03/09	8.53E+03	CU.FT.	1.35E-02 ± 6.12E-03	L.T. 4.E-02
08/03/09	08/11/09	1.14E+04	CU.FT.	2.20E-02 ± 5.36E-03	L.T. 5.E-02
08/11/09	08/18/09	1.00E+04	CU.FT.	1.88E-02 ± 4.71E-03	L.T. 3.E-02
08/18/09	08/25/09	1.01E+04	CU.FT.	1.75E-02 ± 5.05E-03	L.T. 5.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	1.91E-02 ± 5.33E-03	L.T. 4.E-02
09/01/09	09/08/09	1.00E+04	CU.FT.	3.23E-02 ± 6.29E-03	L.T. 6.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.56E-02 ± 5.20E-03	L.T. 4.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	2.05E-02 ± 6.29E-03	L.T. 2.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.18E-02 ± 5.37E-03	L.T. 7.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.46E-02 ± 3.66E-03	L.T. 6.E-02
10/06/09	10/13/09	1.00E+04	CU.FT.	1.97E-02 ± 5.49E-03	L.T. 6.E-02
10/13/09	10/20/09	1.01E+04	CU.FT.	1.77E-02 ± 5.47E-03	L.T. 3.E-02
10/20/09	10/27/09	9.92E+03	CU.FT.	1.36E-02 ± 3.86E-03	L.T. 5.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.48E-02 ± 5.61E-03	L.T. 5.E-02
11/03/09	11/10/09	1.02E+04	CU.FT.	3.06E-02 ± 6.19E-03	L.T. 6.E-02
11/10/09	11/17/09	8.64E+03	CU.FT.	3.11E-02 ± 6.60E-03	L.T. 6.E-02
11/17/09	11/24/09	9.51E+03	CU.FT.	4.22E-02 ± 6.69E-03	L.T. 6.E-02
11/24/09	12/01/09	9.85E+03	CU.FT.	2.65E-02 ± 5.98E-03	L.T. 5.E-02
12/01/09	12/08/09	1.02E+04	CU.FT.	2.68E-02 ± 4.78E-03	L.T. 5.E-02
12/08/09	12/15/09	9.98E+03	CU.FT.	3.53E-02 ± 6.54E-03	L.T. 4.E-02
12/15/09	12/22/09	1.01E+04	CU.FT.	4.73E-02 ± 6.77E-03	L.T. 6.E-02
12/22/09	12/29/09	1.01E+04	CU.FT.	3.34E-02 ± 6.10E-03	L.T. 6.E-02

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCI/CU.M.)

STATION NUMBER 01

DATE COLLECTED 12/30 - 03/30/09 03/30 - 06/30/09 06/30 - 09/29/09 09/29 - 12/29/09

GAMMA SPECTRUM ANALYSIS:

BE-7	1.59E-01 ± 6.09E-02	L.T. 2.E-01	1.63E-01 ± 9.29E-02	L.T. 2.E-01
K-40	L.T. 5.E-02	L.T. 5.E-02	L.T. 3.E-02	L.T. 1.E-01
MN-54	L.T. 4.E-03	L.T. 4.E-03	L.T. 4.E-03	L.T. 5.E-03
CO-58	L.T. 8.E-03	L.T. 2.E-02	L.T. 1.E-02	L.T. 8.E-03
FE-59	L.T. 2.E-02	L.T. 6.E-02	L.T. 4.E-02	L.T. 3.E-02
CO-60	L.T. 4.E-03	L.T. 3.E-03	L.T. 4.E-03	L.T. 7.E-03
ZN-65	L.T. 1.E-02	L.T. 1.E-02	L.T. 9.E-03	L.T. 1.E-02
ZR-95	L.T. 1.E-02	L.T. 3.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-103	L.T. 1.E-02	L.T. 7.E-02	L.T. 2.E-02	L.T. 2.E-02
RU-106	L.T. 3.E-02	L.T. 3.E-02	L.T. 3.E-02	L.T. 5.E-02
I-131	L.T. 8.E+00	L.T. 1.E+04	L.T. 2.E+02	L.T. 3.E+00
CS-134	L.T. 3.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 7.E-03
CS-137	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 5.E-03
BA-140	L.T. 1.E+00	L.T. 1.E+02	L.T. 1.E+01	L.T. 1.E+00
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 4.E-02
CE-144	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 4.E-02
RA-226	L.T. 5.E-02	L.T. 5.E-02	L.T. 4.E-02	L.T. 1.E-01
TH-228	L.T. 5.E-03	L.T. 5.E-03	L.T. 5.E-03	L.T. 9.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCU/CU.M.)

STATION NUMBER 02

DATE COLLECTED	12/30 - 03/30/09	03/30 - 06/30/09	06/30 - 09/29/09	09/29 - 12/29/09
----------------	------------------	------------------	------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	1.80E-01 ± 6.17E-02	L.T. 3.E-01	1.57E-01 ± 7.39E-02	1.36E-01 ± 5.68E-02
K-40	L.T. 4.E-02	L.T. 4.E-02	L.T. 5.E-02	L.T. 7.E-02
MN-54	L.T. 3.E-03	L.T. 5.E-03	L.T. 4.E-03	L.T. 5.E-03
CO-58	L.T. 5.E-03	L.T. 2.E-02	L.T. 8.E-03	L.T. 7.E-03
FE-59	L.T. 2.E-02	L.T. 1.E-01	L.T. 3.E-02	L.T. 3.E-02
CO-60	L.T. 3.E-03	L.T. 4.E-03	L.T. 2.E-03	L.T. 5.E-03
ZN-65	L.T. 1.E-02	L.T. 2.E-02	L.T. 8.E-03	L.T. 9.E-03
ZR-95	L.T. 1.E-02	L.T. 4.E-02	L.T. 2.E-02	L.T. 2.E-02
RU-103	L.T. 1.E-02	L.T. 7.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-106	L.T. 3.E-02	L.T. 5.E-02	L.T. 3.E-02	L.T. 4.E-02
I-131	L.T. 6.E+00	L.T. 1.E+04	L.T. 2.E+02	L.T. 2.E+00
CS-134	L.T. 3.E-03	L.T. 6.E-03	L.T. 4.E-03	L.T. 6.E-03
CS-137	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 5.E-03
BA-140	L.T. 1.E+00	L.T. 2.E+02	L.T. 9.E+00	L.T. 8.E-01
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 5.E-02	L.T. 2.E-02
CE-144	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02
RA-226	L.T. 5.E-02	L.T. 6.E-02	L.T. 5.E-02	L.T. 8.E-02
TH-228	L.T. 4.E-03	L.T. 6.E-03	L.T. 5.E-03	L.T. 6.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
 (PCI/CU.M.)

STATION NUMBER 03

DATE COLLECTED 12/30 - 03/30/09 03/30 - 06/30/09 06/30 - 09/29/09 09/29 - 12/29/09

GAMMA SPECTRUM ANALYSIS:

BE-7	1.35E-01 ± 4.58E-02	L.T. 3.E-01	L.T. 2.E-01	1.21E-01 ± 5.06E-02
K-40	L.T. 3.E-02	L.T. 5.E-02	2.21E-01 ± 5.79E-02	L.T. 8.E-02
MN-54	L.T. 3.E-03	L.T. 4.E-03	L.T. 5.E-03	L.T. 4.E-03
CO-58	L.T. 6.E-03	L.T. 2.E-02	L.T. 1.E-02	L.T. 7.E-03
FE-59	L.T. 2.E-02	L.T. 1.E-01	L.T. 7.E-02	L.T. 2.E-02
CO-60	L.T. 3.E-03	L.T. 3.E-03	L.T. 4.E-03	L.T. 4.E-03
ZN-65	L.T. 4.E-03	L.T. 1.E-02	L.T. 2.E-02	L.T. 1.E-02
ZR-95	L.T. 1.E-02	L.T. 4.E-02	L.T. 3.E-02	L.T. 1.E-02
RU-103	L.T. 9.E-03	L.T. 7.E-02	L.T. 3.E-02	L.T. 1.E-02
RU-106	L.T. 2.E-02	L.T. 4.E-02	L.T. 4.E-02	L.T. 4.E-02
I-131	L.T. 4.E+00	L.T. 1.E+04	L.T. 2.E+02	L.T. 2.E+00
CS-134	L.T. 2.E-03	L.T. 5.E-03	L.T. 7.E-03	L.T. 4.E-03
CS-137	L.T. 2.E-03	L.T. 3.E-03	L.T. 5.E-03	L.T. 4.E-03
BA-140	L.T. 1.E+00	L.T. 2.E+02	L.T. 1.E+01	L.T. 8.E-01
CE-141	L.T. 1.E-02	L.T. 1.E-01	L.T. 7.E-02	L.T. 2.E-02
CE-144	L.T. 1.E-02	L.T. 2.E-02	L.T. 3.E-02	L.T. 2.E-02
RA-226	L.T. 4.E-02	L.T. 6.E-02	L.T. 6.E-02	L.T. 7.E-02
TH-228	L.T. 3.E-03	L.T. 5.E-03	1.83E-02 ± 3.98E-03	L.T. 6.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PC/CU.M.)

STATION NUMBER 04

DATE COLLECTED	12/30 - 03/30/09	03/30 - 06/30/09	06/30 - 09/29/09	09/29 - 12/29/09
----------------	------------------	------------------	------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	1.50E-01 ± 4.93E-02	1.98E-01 ± 1.26E-01	1.66E-01 ± 5.91E-02	9.75E-02 ± 4.76E-02
K-40	L.T. 4.E-02	L.T. 2.E-02	L.T. 4.E-02	L.T. 5.E-02
MN-54	L.T. 4.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 5.E-03
CO-58	L.T. 8.E-03	L.T. 1.E-02	L.T. 6.E-03	L.T. 8.E-03
FE-59	L.T. 3.E-02	L.T. 8.E-02	L.T. 3.E-02	L.T. 2.E-02
CO-60	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03
ZN-65	L.T. 1.E-02	L.T. 1.E-02	L.T. 7.E-03	L.T. 8.E-03
ZR-95	L.T. 1.E-02	L.T. 3.E-02	L.T. 1.E-02	L.T. 1.E-02
RU-103	L.T. 1.E-02	L.T. 4.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-106	L.T. 4.E-02	L.T. 3.E-02	L.T. 2.E-02	L.T. 4.E-02
I-131	L.T. 7.E+00	L.T. 1.E+04	L.T. 1.E+02	L.T. 2.E+00
CS-134	L.T. 4.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 4.E-03
CS-137	L.T. 3.E-03	L.T. 2.E-03	L.T. 2.E-03	L.T. 4.E-03
BA-140	L.T. 1.E+00	L.T. 1.E+02	L.T. 6.E+00	L.T. 8.E-01
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 2.E-02
CE-144	L.T. 2.E-02	L.T. 1.E-02	L.T. 1.E-02	L.T. 2.E-02
RA-226	L.T. 5.E-02	L.T. 4.E-02	L.T. 5.E-02	L.T. 7.E-02
TH-228	L.T. 5.E-03	L.T. 4.E-03	L.T. 4.E-03	L.T. 6.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
 (PCI/CU.M.)

STATION NUMBER 05

DATE COLLECTED 12/30 - 03/30/09 03/30 - 06/30/09 06/30 - 09/29/09 09/29 - 12/29/09

GAMMA SPECTRUM ANALYSIS:

BE-7	1.86E-01 ± 5.44E-02	2.50E-01 ± 1.47E-01	2.22E-01 ± 8.07E-02	L.T. 1.E-01
K-40	L.T. 4.E-02	L.T. 5.E-02	L.T. 4.E-02	L.T. 8.E-02
MN-54	L.T. 3.E-03	L.T. 3.E-03	L.T. 5.E-03	L.T. 5.E-03
CO-58	L.T. 6.E-03	L.T. 2.E-02	L.T. 1.E-02	L.T. 6.E-03
FE-59	L.T. 2.E-02	L.T. 9.E-02	L.T. 4.E-02	L.T. 2.E-02
CO-60	L.T. 3.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 4.E-03
ZN-65	L.T. 9.E-03	L.T. 2.E-02	L.T. 9.E-03	L.T. 1.E-02
ZR-95	L.T. 9.E-03	L.T. 4.E-02	L.T. 2.E-02	L.T. 9.E-03
RU-103	L.T. 1.E-02	L.T. 7.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-106	L.T. 2.E-02	L.T. 3.E-02	L.T. 4.E-02	L.T. 4.E-02
I-131	L.T. 5.E+00	L.T. 1.E+04	L.T. 1.E+02	L.T. 2.E+00
CS-134	L.T. 3.E-03	L.T. 6.E-03	L.T. 3.E-03	L.T. 5.E-03
CS-137	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 5.E-03
BA-140	L.T. 1.E+00	L.T. 2.E+02	L.T. 1.E+01	L.T. 8.E-01
CE-141	L.T. 2.E-02	L.T. 2.E-01	L.T. 4.E-02	L.T. 2.E-02
CE-144	L.T. 1.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02
RA-226	L.T. 4.E-02	L.T. 6.E-02	L.T. 5.E-02	L.T. 8.E-02
TH-228	L.T. 4.E-03	L.T. 6.E-03	L.T. 5.E-03	L.T. 7.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCI/CU.M.)

STATION NUMBER 06

DATE COLLECTED	12/30 - 03/30/09	03/30 - 06/30/09	06/30 - 09/29/09	09/29 - 12/29/09
----------------	------------------	------------------	------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	1.59E-01 ± 5.37E-02	L.T. 3.E-01	1.84E-01 ± 7.62E-02	1.10E-01 ± 4.40E-02
K-40	L.T. 5.E-02	L.T. 5.E-02	L.T. 3.E-02	L.T. 7.E-02
MN-54	L.T. 3.E-03	L.T. 5.E-03	L.T. 3.E-03	L.T. 5.E-03
CO-58	L.T. 5.E-03	L.T. 2.E-02	L.T. 8.E-03	L.T. 9.E-03
FE-59	L.T. 3.E-02	L.T. 8.E-02	L.T. 4.E-02	L.T. 2.E-02
CO-60	L.T. 3.E-03	L.T. 5.E-03	L.T. 2.E-03	L.T. 4.E-03
ZN-65	L.T. 7.E-03	L.T. 2.E-02	L.T. 9.E-03	L.T. 1.E-02
ZR-95	L.T. 1.E-02	L.T. 3.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-103	L.T. 9.E-03	L.T. 7.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-106	L.T. 2.E-02	L.T. 4.E-02	L.T. 3.E-02	L.T. 4.E-02
I-131	L.T. 6.E+00	L.T. 1.E+04	L.T. 1.E+02	L.T. 2.E+00
CS-134	L.T. 3.E-03	L.T. 5.E-03	L.T. 3.E-03	L.T. 5.E-03
CS-137	L.T. 2.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 5.E-03
BA-140	L.T. 1.E+00	L.T. 2.E+02	L.T. 7.E+00	L.T. 8.E-01
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 2.E-02
CE-144	L.T. 1.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02
RA-226	L.T. 4.E-02	L.T. 6.E-02	L.T. 5.E-02	L.T. 8.E-02
TH-228	L.T. 4.E-03	L.T. 5.E-03	L.T. 4.E-03	L.T. 7.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCI/CU.M.)

STATION NUMBER 07

DATE COLLECTED 12/30 - 03/30/09 03/30 - 06/30/09 06/30 - 09/29/09 09/29 - 12/29/09

GAMMA SPECTRUM ANALYSIS:

BE-7	1.44E-01 ± 7.39E-02	L.T. 2.E-01	1.69E-01 ± 6.95E-02	L.T. 1.E-01
K-40	L.T. 3.E-02	L.T. 2.E-02	L.T. 5.E-02	L.T. 6.E-02
MN-54	L.T. 3.E-03	L.T. 5.E-03	L.T. 5.E-03	L.T. 5.E-03
CO-58	L.T. 8.E-03	L.T. 2.E-02	L.T. 1.E-02	L.T. 7.E-03
FE-59	L.T. 3.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 3.E-02
CO-60	L.T. 3.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 4.E-03
ZN-65	L.T. 1.E-02	L.T. 1.E-02	L.T. 9.E-03	L.T. 9.E-03
ZR-95	L.T. 1.E-02	L.T. 3.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-103	L.T. 1.E-02	L.T. 6.E-02	L.T. 3.E-02	L.T. 2.E-02
RU-106	L.T. 3.E-02	L.T. 4.E-02	L.T. 4.E-02	L.T. 4.E-02
I-131	L.T. 7.E+00	L.T. 1.E+04	L.T. 1.E+02	L.T. 2.E+00
CS-134	L.T. 4.E-03	L.T. 4.E-03	L.T. 4.E-03	L.T. 5.E-03
CS-137	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 4.E-03
BA-140	L.T. 1.E+00	L.T. 1.E+02	L.T. 1.E+01	L.T. 8.E-01
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 5.E-02	L.T. 2.E-02
CE-144	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 2.E-02
RA-226	L.T. 5.E-02	L.T. 5.E-02	L.T. 5.E-02	L.T. 8.E-02
TH-228	L.T. 5.E-03	L.T. 5.E-03	L.T. 5.E-03	L.T. 7.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCU/CU.M.)

STATION NUMBER 08

DATE COLLECTED	12/30 - 03/30/09	03/30 - 06/30/09	06/30 - 09/29/09	09/29 - 12/29/09
----------------	------------------	------------------	------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	1.86E-01 ± 6.03E-02	L.T. 2.E-01	1.92E-01 ± 7.06E-02	1.75E-01 ± 6.79E-02
K-40	L.T. 5.E-02	L.T. 5.E-02	L.T. 5.E-02	L.T. 3.E-02
MN-54	L.T. 3.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 6.E-03
CO-58	L.T. 5.E-03	L.T. 1.E-02	L.T. 6.E-03	L.T. 1.E-02
FE-59	L.T. 2.E-02	L.T. 8.E-02	L.T. 3.E-02	L.T. 3.E-02
CO-60	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03
ZN-65	L.T. 8.E-03	L.T. 1.E-02	L.T. 7.E-03	L.T. 1.E-02
ZR-95	L.T. 1.E-02	L.T. 3.E-02	L.T. 1.E-02	L.T. 1.E-02
RU-103	L.T. 1.E-02	L.T. 4.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-106	L.T. 3.E-02	L.T. 3.E-02	L.T. 2.E-02	L.T. 4.E-02
I-131	L.T. 6.E+00	L.T. 9.E+03	L.T. 1.E+02	L.T. 3.E+00
CS-134	L.T. 3.E-03	L.T. 3.E-03	L.T. 2.E-03	L.T. 5.E-03
CS-137	L.T. 3.E-03	L.T. 2.E-03	L.T. 2.E-03	L.T. 5.E-03
BA-140	L.T. 1.E+00	L.T. 1.E+02	L.T. 7.E+00	L.T. 9.E-01
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 2.E-02
CE-144	L.T. 2.E-02	L.T. 1.E-02	L.T. 1.E-02	L.T. 3.E-02
RA-226	L.T. 5.E-02	L.T. 4.E-02	L.T. 4.E-02	L.T. 8.E-02
TH-228	L.T. 4.E-03	L.T. 4.E-03	L.T. 4.E-03	L.T. 7.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
 (PCI/CU.M.)

STATION NUMBER 09

DATE COLLECTED 12/30 - 03/30/09 03/30 - 06/30/09 06/30 - 09/29/09 09/29 - 12/29/09

GAMMA SPECTRUM ANALYSIS:

BE-7	1.48E-01 ± 4.76E-02	2.42E-01 ± 1.31E-01	L.T. 1.E-01	1.33E-01 ± 4.99E-02
K-40	L.T. 4.E-02	L.T. 5.E-02	L.T. 3.E-02	L.T. 6.E-02
MN-54	L.T. 3.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 1.E-03
CO-58	L.T. 5.E-03	L.T. 2.E-02	L.T. 9.E-03	L.T. 4.E-03
FE-59	L.T. 2.E-02	L.T. 6.E-02	L.T. 5.E-02	L.T. 2.E-02
CO-60	L.T. 3.E-03	L.T. 4.E-03	L.T. 4.E-03	L.T. 2.E-03
ZN-65	L.T. 6.E-03	L.T. 2.E-02	L.T. 8.E-03	L.T. 7.E-03
ZR-95	L.T. 1.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 9.E-03
RU-103	L.T. 8.E-03	L.T. 6.E-02	L.T. 3.E-02	L.T. 8.E-03
RU-106	L.T. 2.E-02	L.T. 3.E-02	L.T. 3.E-02	L.T. 2.E-02
I-131	L.T. 5.E+00	L.T. 1.E+04	L.T. 1.E+02	L.T. 1.E+00
CS-134	L.T. 3.E-03	L.T. 5.E-03	L.T. 4.E-03	L.T. 3.E-03
CS-137	L.T. 2.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 2.E-03
BA-140	L.T. 9.E-01	L.T. 2.E+02	L.T. 9.E+00	L.T. 4.E-01
CE-141	L.T. 1.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 1.E-02
CE-144	L.T. 1.E-02	L.T. 2.E-02	L.T. 2.E-02	L.T. 1.E-02
RA-226	L.T. 3.E-02	L.T. 5.E-02	L.T. 5.E-02	L.T. 4.E-02
TH-228	L.T. 3.E-03	L.T. 5.E-03	L.T. 4.E-03	L.T. 4.E-03

VII-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCI/CU.M.)

STATION NUMBER 10

DATE COLLECTED 12/30 - 03/30/09 03/30 - 06/30/09 06/30 - 09/29/09 09/29 - 12/29/09

GAMMA SPECTRUM ANALYSIS:

BE-7	1.53E-01 ± 7.19E-02	2.27E-01 ± 1.25E-01	1.66E-01 ± 6.64E-02	1.13E-01 ± 6.80E-02
K-40	L.T. 5.E-02	L.T. 4.E-02	L.T. 4.E-02	L.T. 6.E-02
MN-54	L.T. 4.E-03	L.T. 3.E-03	L.T. 2.E-03	L.T. 5.E-03
CO-58	L.T. 6.E-03	L.T. 1.E-02	L.T. 6.E-03	L.T. 6.E-03
FE-59	L.T. 3.E-02	L.T. 9.E-02	L.T. 3.E-02	L.T. 2.E-02
CO-60	L.T. 4.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 4.E-03
ZN-65	L.T. 7.E-03	L.T. 9.E-03	L.T. 8.E-03	L.T. 8.E-03
ZR-95	L.T. 1.E-02	L.T. 2.E-02	L.T. 1.E-02	L.T. 2.E-02
RU-103	L.T. 1.E-02	L.T. 4.E-02	L.T. 2.E-02	L.T. 1.E-02
RU-106	L.T. 3.E-02	L.T. 3.E-02	L.T. 3.E-02	L.T. 4.E-02
I-131	L.T. 7.E+00	L.T. 8.E+03	L.T. 1.E+02	L.T. 2.E+00
CS-134	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 5.E-03
CS-137	L.T. 3.E-03	L.T. 2.E-03	L.T. 2.E-03	L.T. 3.E-03
BA-140	L.T. 2.E+00	L.T. 1.E+02	L.T. 7.E+00	L.T. 6.E-01
CE-141	L.T. 2.E-02	L.T. 9.E-02	L.T. 3.E-02	L.T. 2.E-02
CE-144	L.T. 2.E-02	L.T. 1.E-02	L.T. 1.E-02	L.T. 2.E-02
RA-226	L.T. 5.E-02	L.T. 4.E-02	L.T. 4.E-02	L.T. 7.E-02
TH-228	L.T. 5.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 7.E-03

VII-3
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
FISH
(PCI/KG WET)

STATION NUMBER 28

DATE COLLECTED	07/13/09 CATFISH	07/13/09 CARP	09/15/09 CATFISH	09/15/09 CARP
----------------	---------------------	------------------	---------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	L.T. 9.E+02	L.T. 8.E+02	L.T. 3.E+02	L.T. 3.E+02
K-40	3.86E+03 ± 1.07E+03	2.89E+03 ± 8.91E+02	3.17E+03 ± 6.99E+02	2.92E+03 ± 5.39E+02
MN-54	L.T. 1.E+02	L.T. 6.E+01	L.T. 3.E+01	L.T. 3.E+01
CO-58	L.T. 9.E+01	L.T. 7.E+01	L.T. 4.E+01	L.T. 3.E+01
FE-59	L.T. 2.E+02	L.T. 1.E+02	L.T. 1.E+02	L.T. 8.E+01
CO-60	L.T. 1.E+02	L.T. 6.E+01	L.T. 3.E+01	L.T. 4.E+01
ZN-65	L.T. 2.E+02	L.T. 1.E+02	L.T. 8.E+01	L.T. 8.E+01
ZR-95	L.T. 2.E+02	L.T. 1.E+02	L.T. 8.E+01	L.T. 6.E+01
RU-103	L.T. 1.E+02	L.T. 9.E+01	L.T. 5.E+01	L.T. 4.E+01
RU-106	L.T. 8.E+02	L.T. 5.E+02	L.T. 3.E+02	L.T. 3.E+02
I-131	L.T. 2.E+03	L.T. 1.E+03	L.T. 2.E+02	L.T. 1.E+02
CS-134	L.T. 7.E+01	L.T. 6.E+01	L.T. 4.E+01	L.T. 3.E+01
CS-137	L.T. 8.E+01	L.T. 6.E+01	L.T. 4.E+01	L.T. 3.E+01
BA-140	L.T. 2.E+03	L.T. 1.E+03	L.T. 3.E+02	L.T. 3.E+02
CE-141	L.T. 3.E+02	L.T. 3.E+02	L.T. 9.E+01	L.T. 5.E+01
CE-144	L.T. 8.E+02	L.T. 5.E+02	L.T. 3.E+02	L.T. 2.E+02
RA-226	L.T. 2.E+03	L.T. 2.E+03	L.T. 1.E+03	L.T. 7.E+02
TH-228	L.T. 2.E+02	L.T. 1.E+02	L.T. 8.E+01	L.T. 6.E+01

VII-3
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 FISH
 (PCI/KG WET)

STATION NUMBER 35

DATE COLLECTED	07/14/09 CATFISH	07/13/09 CARP	09/15/09 CATFISH	09/15/09 CARP
----------------	---------------------	------------------	---------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	L.T. 6.E+02	L.T. 6.E+02	L.T. 4.E+02	L.T. 4.E+02
K-40	2.79E+03 ± 7.03E+02	3.18E+03 ± 6.73E+02	3.55E+03 ± 6.32E+02	2.81E+03 ± 6.68E+02
MN-54	L.T. 6.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 4.E+01
CO-58	L.T. 6.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 4.E+01
FE-59	L.T. 2.E+02	L.T. 2.E+02	L.T. 1.E+02	L.T. 9.E+01
CO-60	L.T. 6.E+01	L.T. 5.E+01	L.T. 3.E+01	L.T. 4.E+01
ZN-65	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02	L.T. 9.E+01
ZR-95	L.T. 2.E+02	L.T. 1.E+02	L.T. 8.E+01	L.T. 8.E+01
RU-103	L.T. 1.E+02	L.T. 9.E+01	L.T. 5.E+01	L.T. 5.E+01
RU-106	L.T. 5.E+02	L.T. 4.E+02	L.T. 4.E+02	L.T. 4.E+02
I-131	L.T. 1.E+03	L.T. 1.E+03	L.T. 2.E+02	L.T. 1.E+02
CS-134	L.T. 4.E+01	L.T. 5.E+01	L.T. 5.E+01	L.T. 4.E+01
CS-137	L.T. 6.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 4.E+01
BA-140	L.T. 1.E+03	L.T. 1.E+03	L.T. 3.E+02	L.T. 3.E+02
CE-141	L.T. 2.E+02	L.T. 1.E+02	L.T. 7.E+01	L.T. 7.E+01
CE-144	L.T. 5.E+02	L.T. 3.E+02	L.T. 2.E+02	L.T. 2.E+02
RA-226	L.T. 1.E+03	L.T. 9.E+02	L.T. 9.E+02	L.T. 8.E+02
TH-228	L.T. 1.E+02	L.T. 8.E+01	L.T. 8.E+01	L.T. 6.E+01

VII-4
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
MILK NEAREST PRODUCER
(PCI/LITER)

STATION NUMBER 99

DATE COLLECTED	01/06/09	02/03/09	03/03/09	04/07/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 5.E-01	L.T. 9.E-01	L.T. 8.E-01	L.T. 8.E-01
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 4.E+01	L.T. 5.E+01	L.T. 5.E+01	L.T. 4.E+01
K-40	1.27E+03 ± 1.05E+02	1.29E+03 ± 1.11E+02	1.28E+03 ± 1.20E+02	1.17E+03 ± 1.04E+02
MN-54	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00
CO-58	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01
CO-60	L.T. 4.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00
ZN-65	L.T. 1.E+01	L.T. 9.E+00	L.T. 1.E+01	L.T. 1.E+01
ZR-95	L.T. 9.E+00	L.T. 9.E+00	L.T. 9.E+00	L.T. 9.E+00
RU-103	L.T. 5.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 6.E+00
RU-106	L.T. 4.E+01	L.T. 4.E+01	L.T. 5.E+01	L.T. 4.E+01
I-131	L.T. 2.E+01	L.T. 2.E+01	L.T. 1.E+01	L.T. 1.E+01
CS-134	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00
CS-137	L.T. 4.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00
BA-140	L.T. 3.E+01	L.T. 3.E+01	L.T. 3.E+01	L.T. 3.E+01
CE-141	L.T. 9.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00
CE-144	L.T. 3.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 3.E+01
RA-226	L.T. 8.E+01	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02
TH-228	L.T. 7.E+00	L.T. 9.E+00	L.T. 1.E+01	L.T. 7.E+00

VII-4
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
MILK NEAREST PRODUCER
(PCI/LITER)

STATION NUMBER 99

DATE COLLECTED	05/05/09	06/02/09	06/23/09	07/07/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 4.E-01	L.T. 7.E-01	L.T. 8.E-01	L.T. 2.E-01
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 3.E+01	L.T. 5.E+01	L.T. 5.E+01	L.T. 2.E+01
K-40	1.14E+03 ± 5.E+01	1.46E+03 ± 1.E+02	1.10E+03 ± 1.E+02	1.23E+03 ± 6.E+01
MN-54	L.T. 2.E+00	L.T. 7.E+00	L.T. 6.E+00	L.T. 2.E+00
CO-58	L.T. 3.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 3.E+00
FE-59	L.T. 8.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 7.E+00
CO-60	L.T. 2.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 3.E+00
ZN-65	L.T. 5.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 6.E+00
ZR-95	L.T. 5.E+00	L.T. 8.E+00	L.T. 9.E+00	L.T. 5.E+00
RU-103	L.T. 4.E+00	L.T. 5.E+00	L.T. 6.E+00	L.T. 3.E+00
RU-106	L.T. 2.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 2.E+01
I-131	L.T. 4.E+01	L.T. 1.E+01	L.T. 2.E+01	L.T. 9.E+00
CS-134	L.T. 2.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 2.E+00
CS-137	L.T. 2.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 3.E+00
BA-140	L.T. 5.E+01	L.T. 2.E+01	L.T. 3.E+01	L.T. 2.E+01
CE-141	L.T. 7.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 5.E+00
CE-144	L.T. 2.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 2.E+01
RA-226	L.T. 5.E+01	L.T. 1.E+02	L.T. 1.E+02	L.T. 5.E+01
TH-228	L.T. 3.E+00	1.36E+01 ± 8.76E+00	L.T. 9.E+00	L.T. 4.E+00

VII-4
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
MILK NEAREST PRODUCER
(PCI/LITER)

STATION NUMBER 99

DATE COLLECTED	07/28/09	08/04/09	08/25/09	09/01/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 7.E-01	L.T. 5.E-01	L.T. 8.E-01	L.T. 5.E-01
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 5.E+01	L.T. 4.E+01	L.T. 7.E+01	L.T. 6.E+01
K-40	1.14E+03 ± 1.12E+02	1.23E+03 ± 1.27E+02	1.48E+03 ± 1.91E+02	1.07E+03 ± 1.43E+02
MN-54	L.T. 5.E+00	L.T. 4.E+00	L.T. 8.E+00	L.T. 7.E+00
CO-58	L.T. 6.E+00	L.T. 5.E+00	L.T. 8.E+00	L.T. 7.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 2.E+01
CO-60	L.T. 6.E+00	L.T. 4.E+00	L.T. 6.E+00	L.T. 7.E+00
ZN-65	L.T. 1.E+01	L.T. 8.E+00	L.T. 2.E+01	L.T. 1.E+01
ZR-95	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01	L.T. 1.E+01
RU-103	L.T. 7.E+00	L.T. 5.E+00	L.T. 8.E+00	L.T. 7.E+00
RU-106	L.T. 5.E+01	L.T. 4.E+01	L.T. 6.E+01	L.T. 6.E+01
I-131	L.T. 3.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01
CS-134	L.T. 5.E+00	L.T. 3.E+00	L.T. 7.E+00	L.T. 6.E+00
CS-137	L.T. 5.E+00	L.T. 5.E+00	L.T. 7.E+00	L.T. 6.E+00
BA-140	L.T. 5.E+01	L.T. 3.E+01	L.T. 4.E+01	L.T. 4.E+01
CE-141	L.T. 1.E+01	L.T. 9.E+00	L.T. 1.E+01	L.T. 1.E+01
CE-144	L.T. 3.E+01	L.T. 3.E+01	L.T. 6.E+01	L.T. 5.E+01
RA-226	L.T. 1.E+02	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02
TH-228	L.T. 9.E+00	L.T. 8.E+00	L.T. 2.E+01	L.T. 1.E+01

VII-4
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 MILK NEAREST PRODUCER
 (PCI/LITER)

STATION NUMBER 99

DATE COLLECTED	09/22/09	10/06/09	11/03/09	12/10/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 6.E-01	L.T. 4.E-01	L.T. 6.E-01	L.T. 6.E-01
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 5.E+01
K-40	1.10E+03 ± 1.30E+02	1.39E+03 ± 1.03E+02	1.30E+03 ± 8.39E+01	1.41E+03 ± 1.25E+02
MN-54	L.T. 7.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 5.E+00
CO-58	L.T. 7.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 5.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01
CO-60	L.T. 7.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 6.E+00
ZN-65	L.T. 1.E+01	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01
ZR-95	L.T. 1.E+01	L.T. 8.E+00	L.T. 6.E+00	L.T. 1.E+01
RU-103	L.T. 6.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 6.E+00
RU-106	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 5.E+01
I-131	L.T. 1.E+01	L.T. 9.E+00	L.T. 6.E+00	L.T. 2.E+01
CS-134	L.T. 6.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 5.E+00
CS-137	L.T. 6.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 6.E+00
BA-140	L.T. 3.E+01	L.T. 2.E+01	L.T. 2.E+01	L.T. 4.E+01
CE-141	L.T. 1.E+01	L.T. 8.E+00	L.T. 6.E+00	L.T. 1.E+01
CE-144	L.T. 5.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 4.E+01
RA-226	L.T. 2.E+02	L.T. 1.E+02	L.T. 8.E+01	L.T. 1.E+02
TH-228	L.T. 1.E+01	L.T. 8.E+00	L.T. 6.E+00	L.T. 1.E+01

VII-5
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
MILK OTHER PRODUCERS
(PCI/LITER)

STATION NUMBER 103

DATE COLLECTED	01/06/09	04/07/09	07/07/09	10/06/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 6.E-01	L.T. 8.E-01	L.T. 2.E-01	L.T. 4.E-01
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 5.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01
K-40	1.43E+03 ± 1.31E+02	1.17E+03 ± 1.22E+02	1.28E+03 ± 9.72E+01	1.19E+03 ± 9.42E+01
MN-54	L.T. 5.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00
CO-58	L.T. 6.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00
CO-60	L.T. 6.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 5.E+00
ZN-65	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 1.E+01
ZR-95	L.T. 9.E+00	L.T. 9.E+00	L.T. 8.E+00	L.T. 8.E+00
RU-103	L.T. 6.E+00	L.T. 6.E+00	L.T. 4.E+00	L.T. 4.E+00
RU-106	L.T. 4.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 4.E+01
I-131	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 8.E+00
CS-134	L.T. 5.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00
CS-137	L.T. 6.E+00	L.T. 6.E+00	L.T. 4.E+00	L.T. 4.E+00
BA-140	L.T. 4.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 2.E+01
CE-141	L.T. 1.E+01	L.T. 1.E+01	L.T. 7.E+00	L.T. 8.E+00
CE-144	L.T. 4.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 3.E+01
RA-226	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02
TH-228	L.T. 8.E+00	L.T. 8.E+00	L.T. 7.E+00	L.T. 8.E+00

VII-6
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND
(PCI/LITER)

STATION NUMBER 11

DATE COLLECTED	01/20/09	02/10/09	03/10/09	04/14/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 7.E-01	L.T. 7.E-01	L.T. 4.E-01	L.T. 1.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 3.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 3.E+01
K-40	L.T. 4.E+01	L.T. 9.E+01	L.T. 3.E+01	L.T. 9.E+01
MN-54	L.T. 3.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
CO-58	L.T. 3.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 4.E+00
FE-59	L.T. 7.E+00	L.T. 9.E+00	L.T. 8.E+00	L.T. 9.E+00
CO-60	L.T. 3.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 4.E+00
ZN-65	L.T. 5.E+00	L.T. 8.E+00	L.T. 7.E+00	L.T. 8.E+00
ZR-95	L.T. 6.E+00	L.T. 9.E+00	L.T. 8.E+00	L.T. 8.E+00
RU-103	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00
RU-106	L.T. 3.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 3.E+01
I-131	L.T. 2.E+01	L.T. 2.E+01	L.T. 8.E+00	L.T. 2.E+01
CS-134	L.T. 3.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00
CS-137	L.T. 3.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00
BA-140	L.T. 3.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 4.E+01
CE-141	L.T. 8.E+00	L.T. 1.E+01	L.T. 8.E+00	L.T. 8.E+00
CE-144	L.T. 2.E+01	L.T. 3.E+01	L.T. 3.E+01	L.T. 3.E+01
RA-226	L.T. 8.E+01	L.T. 1.E+02	L.T. 1.E+02	L.T. 8.E+01
TH-228	L.T. 7.E+00	L.T. 9.E+00	L.T. 8.E+00	L.T. 5.E+00
H-3	L.T. 3.E+02	L.T. 3.E+02	L.T. 3.E+02	L.T. 4.E+02

VII-6
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND
(PCI/LITER)

STATION NUMBER 11

DATE COLLECTED	05/12/09	07/21/09 (a)	10/20/09
RADIOCHEMICAL ANALYSIS:			
I-131	L.T. 6.E-01	L.T. 8.E-01	L.T. 9.E-01
GAMMA SPECTRUM ANALYSIS:			
BE-7	L.T. 1.E+01	L.T. 4.E+01	L.T. 4.E+01
K-40	L.T. 2.E+01	L.T. 8.E+01	L.T. 3.E+01
MN-54	L.T. 1.E+00	L.T. 5.E+00	L.T. 4.E+00
CO-58	L.T. 2.E+00	L.T. 5.E+00	L.T. 4.E+00
FE-59	L.T. 3.E+00	L.T. 1.E+01	L.T. 9.E+00
CO-60	L.T. 1.E+00	L.T. 4.E+00	L.T. 4.E+00
ZN-65	L.T. 3.E+00	L.T. 9.E+00	L.T. 1.E+01
ZR-95	L.T. 3.E+00	L.T. 9.E+00	L.T. 6.E+00
RU-103	L.T. 2.E+00	L.T. 5.E+00	L.T. 5.E+00
RU-106	L.T. 1.E+01	L.T. 4.E+01	L.T. 4.E+01
I-131	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00
CS-134	L.T. 1.E+00	L.T. 4.E+00	L.T. 4.E+00
CS-137	L.T. 1.E+00	L.T. 4.E+00	L.T. 5.E+00
BA-140	L.T. 2.E+01	L.T. 3.E+01	L.T. 2.E+01
CE-141	L.T. 4.E+00	L.T. 8.E+00	L.T. 1.E+01
CE-144	L.T. 1.E+01	L.T. 3.E+01	L.T. 4.E+01
RA-226	L.T. 4.E+01	L.T. 9.E+01	L.T. 1.E+02
TH-228	L.T. 2.E+00	L.T. 8.E+00	L.T. 7.E+00
H-3	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02

(a) Monthly sampling was changed to the ODAM required quarterly sampling schedule of Jan, April, July and October.

VII-6
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND
(PCI/LITER)

STATION NUMBER 47

DATE COLLECTED	01/20/09	02/10/09	03/11/09	04/14/09
RADIOCHEMICAL ANALYSIS:				
I-131	L.T. 6.E-01	L.T. 6.E-01	L.T. 3.E-01	L.T. 9.E-01
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 4.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 4.E+01
K-40	L.T. 3.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 7.E+01
MN-54	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
CO-58	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 4.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 7.E+00
CO-60	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
ZN-65	L.T. 8.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 6.E+00
ZR-95	L.T. 8.E+00	L.T. 9.E+00	L.T. 8.E+00	L.T. 7.E+00
RU-103	L.T. 5.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 5.E+00
RU-106	L.T. 3.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01
I-131	L.T. 3.E+01	L.T. 2.E+01	L.T. 8.E+00	L.T. 2.E+01
CS-134	L.T. 3.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
CS-137	L.T. 4.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 4.E+00
BA-140	L.T. 4.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 3.E+01
CE-141	L.T. 1.E+01	L.T. 1.E+01	L.T. 8.E+00	L.T. 9.E+00
CE-144	L.T. 3.E+01	L.T. 3.E+01	L.T. 4.E+01	L.T. 3.E+01
RA-226	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02	L.T. 9.E+01
TH-228	L.T. 7.E+00	L.T. 1.E+01	L.T. 9.E+00	L.T. 6.E+00
H-3	L.T. 3.E+02	L.T. 3.E+02	L.T. 3.E+02	L.T. 4.E+02

VII-6
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND
(PCI/LITER)

STATION NUMBER 47

DATE COLLECTED	05/12/09	07/22/09 (a)	10/20/09
RADIOCHEMICAL ANALYSIS:			
I-131	L.T. 7.E-01	L.T. 7.E-01	L.T. 9.E-01
GAMMA SPECTRUM ANALYSIS:			
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 6.E+01
K-40	L.T. 3.E+01	L.T. 2.E+01	L.T. 5.E+01
MN-54	L.T. 2.E+00	L.T. 3.E+00	L.T. 6.E+00
CO-58	L.T. 2.E+00	L.T. 2.E+00	L.T. 7.E+00
FE-59	L.T. 5.E+00	L.T. 5.E+00	L.T. 1.E+01
CO-60	L.T. 2.E+00	L.T. 3.E+00	L.T. 6.E+00
ZN-65	L.T. 4.E+00	L.T. 5.E+00	L.T. 1.E+01
ZR-95	L.T. 4.E+00	L.T. 5.E+00	L.T. 1.E+01
RU-103	L.T. 2.E+00	L.T. 3.E+00	L.T. 7.E+00
RU-106	L.T. 2.E+01	L.T. 2.E+01	L.T. 6.E+01
I-131	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01
CS-134	L.T. 2.E+00	L.T. 3.E+00	L.T. 6.E+00
CS-137	L.T. 2.E+00	L.T. 3.E+00	L.T. 7.E+00
BA-140	L.T. 2.E+01	L.T. 2.E+01	L.T. 3.E+01
CE-141	L.T. 5.E+00	L.T. 5.E+00	L.T. 1.E+01
CE-144	L.T. 1.E+01	L.T. 2.E+01	L.T. 5.E+01
RA-226	L.T. 4.E+01	L.T. 7.E+01	L.T. 2.E+02
TH-228	L.T. 3.E+00	L.T. 5.E+00	L.T. 1.E+01
H-3	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02

(a) Monthly sampling was changed to the ODAM required quarterly sampling schedule of Jan, April, July and October.

VII-7
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - RIVER
(PCI/LITER)

STATION NUMBER 28

DATE COLLECTED	01/07/09	02/03/09	03/03/09	04/07/09
RADIOCHEMICAL ANALYSIS:				
H-3	L.T. 3.E+02	L.T. 3.E+02	L.T. 3.E+02	L.T. 3.E+02
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 5.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01
K-40	L.T. 9.E+01	L.T. 7.E+01	L.T. 4.E+01	L.T. 3.E+01
MN-54	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
CO-58	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 4.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 7.E+00
CO-60	L.T. 5.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 3.E+00
ZN-65	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 7.E+00
ZR-95	L.T. 9.E+00	L.T. 1.E+01	L.T. 9.E+00	L.T. 5.E+00
RU-103	L.T. 6.E+00	L.T. 6.E+00	L.T. 5.E+00	L.T. 4.E+00
RU-106	L.T. 4.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01
I-131	L.T. 2.E+01	L.T. 2.E+01	L.T. 7.E+00	L.T. 1.E+01
CS-134	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00
CS-137	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 3.E+00
BA-140	L.T. 3.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 2.E+01
CE-141	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 7.E+00
CE-144	L.T. 4.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 3.E+01
RA-226	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02	L.T. 9.E+01
TH-228	L.T. 1.E+01	L.T. 9.E+00	L.T. 9.E+00	L.T. 6.E+00

VII-7
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - RIVER
(PCI/LITER)

STATION NUMBER 28

DATE COLLECTED	05/05/09	06/02/09	07/07/09	08/03/09
RADIOCHEMICAL ANALYSIS:				
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 5.E+01
K-40	L.T. 3.E+01	L.T. 1.E+02	L.T. 6.E+01	L.T. 9.E+01
MN-54	L.T. 2.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 4.E+00
CO-58	L.T. 2.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 5.E+00
FE-59	L.T. 5.E+00	L.T. 1.E+01	L.T. 7.E+00	L.T. 9.E+00
CO-60	L.T. 2.E+00	L.T. 7.E+00	L.T. 3.E+00	L.T. 4.E+00
ZN-65	L.T. 3.E+00	L.T. 9.E+00	L.T. 7.E+00	L.T. 8.E+00
ZR-95	L.T. 4.E+00	L.T. 8.E+00	L.T. 6.E+00	L.T. 9.E+00
RU-103	L.T. 3.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 6.E+00
RU-106	L.T. 2.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 4.E+01
I-131	L.T. 2.E+01	L.T. 1.E+01	L.T. 6.E+00	L.T. 2.E+01
CS-134	L.T. 2.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00
CS-137	L.T. 2.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00
BA-140	L.T. 3.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 4.E+01
CE-141	L.T. 5.E+00	L.T. 8.E+00	L.T. 7.E+00	L.T. 1.E+01
CE-144	L.T. 1.E+01	L.T. 3.E+01	L.T. 3.E+01	L.T. 4.E+01
RA-226	L.T. 4.E+01	L.T. 1.E+02	L.T. 8.E+01	L.T. 1.E+02
TH-228	L.T. 3.E+00	L.T. 9.E+00	L.T. 9.E+00	L.T. 8.E+00

VII-7
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - RIVER
(PCI/LITER)

STATION NUMBER 28

DATE COLLECTED	09/01/09	10/06/09	11/03/09	12/15/09
RADIOCHEMICAL ANALYSIS:				
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 3.E+02
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 7.E+01	L.T. 3.E+01	L.T. 5.E+01	L.T. 9.E+00
K-40	L.T. 7.E+01	L.T. 8.E+01	L.T. 6.E+01	L.T. 5.E+00
MN-54	L.T. 7.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 8.E-01
CO-58	L.T. 7.E+00	L.T. 4.E+00	L.T. 8.E+00	L.T. 8.E-01
FE-59	L.T. 1.E+01	L.T. 9.E+00	L.T. 8.E+00	L.T. 2.E+00
CO-60	L.T. 8.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 6.E-01
ZN-65	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01	L.T. 1.E+00
ZR-95	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01	L.T. 2.E+00
RU-103	L.T. 7.E+00	L.T. 4.E+00	L.T. 8.E+00	L.T. 1.E+00
RU-106	L.T. 6.E+01	L.T. 4.E+01	L.T. 4.E+01	L.T. 7.E+00
I-131	L.T. 2.E+01	L.T. 6.E+00	L.T. 2.E+01	L.T. 8.E+00
CS-134	L.T. 7.E+00	L.T. 3.E+00	L.T. 5.E+00	L.T. 7.E-01
CS-137	L.T. 7.E+00	L.T. 4.E+00	L.T. 6.E+00	L.T. 7.E-01
BA-140	L.T. 4.E+01	L.T. 2.E+01	L.T. 4.E+01	L.T. 1.E+01
CE-141	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01	L.T. 2.E+00
CE-144	L.T. 5.E+01	L.T. 3.E+01	L.T. 5.E+01	L.T. 7.E+00
RA-226	L.T. 2.E+02	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+01
TH-228	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01	L.T. 2.E+00

VII-7
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - RIVER
(PCI/LITER)

STATION NUMBER 35

DATE COLLECTED	01/07/09	02/03/09	03/03/09	04/07/09
RADIOCHEMICAL ANALYSIS:				
H-3	L.T. 2.E+02	L.T. 3.E+02	L.T. 3.E+02	L.T. 2.E+02
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 4.E+01	L.T. 5.E+01	L.T. 3.E+01	L.T. 4.E+01
K-40	L.T. 4.E+01	L.T. 5.E+01	L.T. 8.E+01	L.T. 4.E+01
MN-54	L.T. 4.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00
CO-58	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 5.E+00
FE-59	L.T. 1.E+01	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01
CO-60	L.T. 5.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
ZN-65	L.T. 9.E+00	L.T. 1.E+01	L.T. 8.E+00	L.T. 9.E+00
ZR-95	L.T. 9.E+00	L.T. 9.E+00	L.T. 6.E+00	L.T. 8.E+00
RU-103	L.T. 6.E+00	L.T. 6.E+00	L.T. 4.E+00	L.T. 6.E+00
RU-106	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 5.E+01
I-131	L.T. 1.E+01	L.T. 2.E+01	L.T. 6.E+00	L.T. 1.E+01
CS-134	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 4.E+00
CS-137	L.T. 5.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 5.E+00
BA-140	L.T. 3.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 3.E+01
CE-141	L.T. 1.E+01	L.T. 9.E+00	L.T. 6.E+00	L.T. 1.E+01
CE-144	L.T. 3.E+01	L.T. 3.E+01	L.T. 3.E+01	L.T. 4.E+01
RA-226	L.T. 1.E+02	L.T. 1.E+02	L.T. 9.E+01	L.T. 1.E+02
TH-228	L.T. 9.E+00	L.T. 9.E+00	L.T. 7.E+00	L.T. 9.E+00

VII-7
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 WATER - RIVER
 (PCI/LITER)

STATION NUMBER 35

DATE COLLECTED	05/05/09	06/02/09	07/07/09	08/03/09
RADIOCHEMICAL ANALYSIS:				
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 7.E+01	L.T. 5.E+01	L.T. 4.E+01
K-40	L.T. 4.E+01	1.05E+02 ± 6.31E+01	L.T. 6.E+01	L.T. 5.E+01
MN-54	L.T. 2.E+00	L.T. 7.E+00	L.T. 6.E+00	L.T. 5.E+00
CO-58	L.T. 2.E+00	L.T. 7.E+00	L.T. 5.E+00	L.T. 5.E+00
FE-59	L.T. 5.E+00	L.T. 1.E+01	L.T. 9.E+00	L.T. 1.E+01
CO-60	L.T. 2.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 5.E+00
ZN-65	L.T. 4.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00
ZR-95	L.T. 4.E+00	L.T. 1.E+01	L.T. 9.E+00	L.T. 9.E+00
RU-103	L.T. 3.E+00	L.T. 7.E+00	L.T. 6.E+00	L.T. 6.E+00
RU-106	L.T. 2.E+01	L.T. 6.E+01	L.T. 4.E+01	L.T. 4.E+01
I-131	L.T. 3.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 2.E+01
CS-134	L.T. 2.E+00	L.T. 7.E+00	L.T. 4.E+00	L.T. 4.E+00
CS-137	L.T. 2.E+00	L.T. 7.E+00	L.T. 5.E+00	L.T. 5.E+00
BA-140	L.T. 3.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 4.E+01
CE-141	L.T. 6.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01
CE-144	L.T. 2.E+01	L.T. 5.E+01	L.T. 4.E+01	L.T. 3.E+01
RA-226	L.T. 5.E+01	L.T. 2.E+02	L.T. 1.E+02	L.T. 1.E+02
TH-228	L.T. 3.E+00	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00

VII-7
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - RIVER
(PCI/LITER)

STATION NUMBER 35

DATE COLLECTED	09/01/09	10/06/09	11/03/09	12/15/09
RADIOCHEMICAL ANALYSIS:				
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 6.E+01	L.T. 3.E+01	L.T. 5.E+01	L.T. 8.E+00
K-40	1.89E+02 ± 9.70E+01	L.T. 3.E+01	L.T. 1.E+02	L.T. 6.E+00
MN-54	L.T. 7.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 6.E-01
CO-58	L.T. 6.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 7.E-01
FE-59	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01	L.T. 2.E+00
CO-60	L.T. 6.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 7.E-01
ZN-65	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01	L.T. 1.E+00
ZR-95	L.T. 1.E+01	L.T. 5.E+00	L.T. 9.E+00	L.T. 1.E+00
RU-103	L.T. 8.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 1.E+00
RU-106	L.T. 6.E+01	L.T. 4.E+01	L.T. 5.E+01	L.T. 6.E+00
I-131	L.T. 2.E+01	L.T. 7.E+00	L.T. 2.E+01	L.T. 6.E+00
CS-134	L.T. 7.E+00	L.T. 3.E+00	L.T. 5.E+00	L.T. 6.E-01
CS-137	L.T. 6.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 7.E-01
BA-140	L.T. 4.E+01	L.T. 2.E+01	L.T. 4.E+01	L.T. 9.E+00
CE-141	L.T. 2.E+01	L.T. 7.E+00	L.T. 1.E+01	L.T. 2.E+00
CE-144	L.T. 6.E+01	L.T. 3.E+01	L.T. 3.E+01	L.T. 5.E+00
RA-226	L.T. 2.E+02	L.T. 9.E+01	L.T. 1.E+02	L.T. 1.E+01
TH-228	L.T. 2.E+01	L.T. 6.E+00	L.T. 8.E+00	5.36E+00 ± 2.55E+00

VII-8
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - THERMOLUMINESCENT DOSIMETRY - TLD
COOPER NUCLEAR STATION 2009

Sample Station	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	Quarter Average
Nuclide Number	01/01-03/31	04/01-06/30	07/01-09/30	10/01-01/01	- 1 S.D.
TLD 01	24.8 ± 0.7	21.5 ± 0.4	21.4 ± 0.6	20.5 ± 0.3	22.0 ± 1.9
02	23.9 ± 0.7	20.7 ± 0.2	20.7 ± 0.2	20.6 ± 0.7	21.5 ± 1.6
03	23.7 ± 0.9	20.9 ± 0.1	22.1 ± 0.6	23.1 ± 0.2	22.4 ± 1.2
04	23.7 ± 0.7	21.7 ± 0.7	21.9 ± 0.5	19.4 ± 0.1	21.7 ± 1.7
05	21.2 ± 0.4	23.0 ± 0.8	21.3 ± 1.5	21.0 ± 0.2	21.6 ± 1.0
06	24.7 ± 0.6	20.9 ± 0.8	22.4 ± 0.3	22.0 ± 0.4	22.5 ± 1.6
07	23.1 ± 0.5	23.6 ± 1.1	21.0 ± 0.3	22.4 ± 0.3	22.5 ± 1.1
08	24.3 ± 0.3	22.5 ± 2.1	21.2 ± 0.7	23.5 ± 1.3	22.9 ± 1.3
09	23.5 ± 0.8	20.2 ± 1.6	22.1 ± 0.3	21.8 ± 0.1	21.9 ± 1.3
10	21.2 ± 0.2	22.4 ± 1.6	23.1 ± 2.0	22.0 ± 0.4	22.2 ± 0.8
20	22.5 ± 0.1	21.5 ± 1.0	22.1 ± 1.1	22.8 ± 0.1	22.2 ± 0.5
44	25.5 ± 0.4	23.7 ± 0.7	22.8 ± 0.7	24.8 ± 0.6	24.2 ± 1.2
56	24.9 ± 1.2	23.4 ± 0.8	22.6 ± 1.9	22.1 ± 0.7	23.3 ± 1.2
58	20.8 ± 0.1	22.3 ± 0.3	22.1 ± 0.8	22.4 ± 0.4	21.9 ± 0.8
59	22.3 ± 0.4	20.9 ± 0.9	21.6 ± 0.3	23.0 ± 1.0	22.0 ± 0.9
66	22.9 ± 0.03	22.8 ± 1.2	24.1 ± 0.5	23.7 ± 1.1	23.4 ± 0.6
67	23.2 ± 1.2	22.2 ± 0.2	23.3 ± 1.3	23.1 ± 0.3	22.9 ± 0.5
71	21.7 ± 0.7	25.6 ± 0.8	21.5 ± 0.5	21.1 ± 0.5	22.5 ± 2.1
79	22.6 ± 0.1	25.6 ± 2.0	22.0 ± 0.6	23.5 ± 0.0	23.4 ± 1.6
80	24.6 ± 0.8	26.9 ± 1.0	21.2 ± 0.5	22.9 ± 1.1	23.9 ± 2.4
81	22.8 ± 1.4	25.5 ± 0.7	23.3 ± 0.2	23.2 ± 0.2	23.7 ± 1.2
82	22.5 ± 0.9	24.7 ± 1.7	22.5 ± 0.5	22.3 ± 0.7	23.0 ± 1.1
83	25.0 ± 0.5	25.9 ± 1.3	22.6 ± 0.5	25.4 ± 1.0	24.7 ± 1.4
84	23.1 ± 0.6	22.0 ± 0.8	25.5 ± 0.5	23.2 ± 0.3	23.4 ± 1.4
85	20.2 ± 0.8	19.5 ± 1.1	19.9 ± 0.2	21.8 ± 0.3	20.4 ± 1.0

VII-8
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - THERMOLUMINESCENT DOSIMETRY - TLD
COOPER NUCLEAR STATION 2009

Sample Station Nuclide Number	First Quarter 01/01-03/31	Second Quarter 04/01-06/30	Third Quarter 07/01-09/30	Fourth Quarter 10/01-01/01	Quarter Average - 1 S.D.
TLD 86	22.9 ± 0.3	22.9 ± 0.2	30.0 ± 1.8	23.3 ± 0.8	24.8 ± 3.5
87	(a)	26.5 ± 1.7	23.2 ± 1.5	22.4 ± 1.2	24.0 ± 2.2
88	23.6 ± 1.2	27.6 ± 1.9	21.4 ± 0.3	21.8 ± 0.6	23.6 ± 2.9
89	23.2 ± 0.7	22.0 ± 0.5	27.5 ± 3.1	22.6 ± 1.0	23.8 ± 2.5
90	24.8 ± 1.0	22.3 ± 1.0	22.2 ± 0.5	21.3 ± 1.6	22.6 ± 1.5
91	23.0 ± 0.1	21.4 ± 0.9	23.4 ± 0.4	21.7 ± 0.5	22.4 ± 0.9
94	23.0 ± 1.2	21.9 ± 0.7	22.9 ± 1.0	21.3 ± 0.2	22.3 ± 0.8

88	Average/Quarter	23.2 ± 2.6 mrem/90 days	23.0 ± 4.2 mrem/90 days	22.6 ± 3.9 mrem/90 days	22.4 ± 2.5 mrem/90 days
	Average/Day	0.258 ± 0.03 mrem/day	0.255 ± 0.05 mrem/day	0.252 ± 0.04 mrem/day	0.249 ± 0.03 mrem/day
	Range	(20.2-25.5) mrem/90 days	(19.5-27.6) mrem/90 days	(19.9-30.0) mrem/90 days	(19.4-25.4) mrem/90 days
	Detection/Total	31/31	32/32	32/32	32/32

25
7
32

(a) TLD was lost due to a farmer "incident".

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 28

DATE COLLECTED	05/27/09	06/11/09	07/30/09	08/11/09
	(a)	(a)	(a)	(a)

RADIOCHEMICAL ANALYSIS:

I-131

GAMMA SPECTRUM ANALYSIS:

BE-7
K-40
MN-54
CO-58
FE-59
CO-60
ZN-65
ZR-95
RU-103
RU-106
I-131
CS-134
CS-137
BA-140
CE-141
CE-144
RA-226
TH-228

(a) No broadleaf vegetation available.

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 28

DATE COLLECTED

09/29/09

10/27/09

(a)

(a)

RADIOCHEMICAL ANALYSIS:

I-131

GAMMA SPECTRUM ANALYSIS:

BE-7

K-40

MN-54

CO-58

FE-59

CO-60

ZN-65

ZR-95

RU-103

RU-106

I-131

CS-134

CS-137

BA-140

CE-141

CE-144

RA-226

TH-228

(a) No broadleaf vegetation available.

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 35

DATE COLLECTED	05/27/09	06/11/09	07/30/09	08/11/09
RADIOCHEMICAL ANALYSIS:	(a)			
I-131		L.T. 4.E+01	L.T. 4.E+01	L.T. 4.E+01
GAMMA SPECTRUM ANALYSIS:				
BE-7		6.55E+02 ± 4.27E+01	1.02E+03 ± 3.88E+02	6.24E+02 ± 1.01E+02
K-40		4.99E+03 ± 1.30E+02	4.03E+03 ± 5.52E+02	6.74E+03 ± 2.46E+02
MN-54		L.T. 4.E+00	L.T. 3.E+01	L.T. 9.E+00
CO-58		L.T. 5.E+00	L.T. 4.E+01	L.T. 9.E+00
FE-59		L.T. 1.E+01	L.T. 9.E+01	L.T. 2.E+01
CO-60		L.T. 4.E+00	L.T. 3.E+01	L.T. 9.E+00
ZN-65		L.T. 1.E+01	L.T. 8.E+01	L.T. 2.E+01
ZR-95		L.T. 8.E+00	L.T. 6.E+01	L.T. 2.E+01
RU-103		L.T. 5.E+00	L.T. 4.E+01	L.T. 1.E+01
RU-106		L.T. 4.E+01	L.T. 3.E+02	L.T. 8.E+01
I-131		L.T. 1.E+01	(b)	L.T. 6.E+01
CS-134		L.T. 4.E+00	L.T. 3.E+01	L.T. 8.E+00
CS-137		L.T. 4.E+00	L.T. 3.E+01	L.T. 9.E+00
BA-140		L.T. 3.E+01	L.T. 4.E+02	L.T. 1.E+02
CE-141		L.T. 9.E+00	L.T. 6.E+01	L.T. 2.E+01
CE-144		L.T. 3.E+01	L.T. 2.E+02	L.T. 6.E+01
RA-226		L.T. 1.E+02	L.T. 6.E+02	L.T. 2.E+02
TH-228		1.22E+01 ± 5.75E+00	L.T. 5.E+01	2.33E+01 ± 1.43E+01

(a) No broadleaf vegetation available.
(b) No gamma I-131 reported for this sample.

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 35

DATE COLLECTED	09/29/09	10/27/09
	(a)	(a)

RADIOCHEMICAL ANALYSIS:

I-131

GAMMA SPECTRUM ANALYSIS:

BE-7
K-40
MN-54
CO-58
FE-59
CO-60
ZN-65
ZR-95
RU-103
RU-106
I-131
CS-134
CS-137
BA-140
CE-141
CE-144
RA-226
TH-228

(a) No broadleaf vegetation available.

-VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 96

DATE COLLECTED	05/27/09	06/11/09	07/30/09	08/11/09
RADIOCHEMICAL ANALYSIS:	(a)	(a)		
I-131			L.T. 3.E+01	L.T. 4.E+01
GAMMA SPECTRUM ANALYSIS:				
BE-7			5.88E+02 ± 2.14E+02	1.60E+03 ± 1.E+02
K-40			7.09E+03 ± 4.42E+02	6.21E+03 ± 2.E+02
MN-54			L.T. 2.E+01	L.T. 9.E+00
CO-58			L.T. 2.E+01	L.T. 1.E+01
FE-59			L.T. 5.E+01	L.T. 3.E+01
CO-60			L.T. 2.E+01	L.T. 9.E+00
ZN-65			L.T. 4.E+01	L.T. 2.E+01
ZR-95			L.T. 3.E+01	L.T. 2.E+01
RU-103			L.T. 2.E+01	L.T. 1.E+01
RU-106			L.T. 1.E+02	L.T. 8.E+01
I-131			(b)	L.T. 6.E+01
CS-134			L.T. 1.E+01	L.T. 9.E+00
CS-137			L.T. 2.E+01	L.T. 9.E+00
BA-140			L.T. 2.E+02	L.T. 1.E+02
CE-141			L.T. 4.E+01	L.T. 2.E+01
CE-144			L.T. 1.E+02	L.T. 6.E+01
RA-226			L.T. 3.E+02	L.T. 2.E+02
TH-228			3.15E+01 ± 2.06E+01	L.T. 1.E+01

(a) No broadleaf vegetation available.
(b) No gamma I-131 reported for this sample.

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 96

DATE COLLECTED

09/29/09

10/27/09

(a)

(a)

RADIOCHEMICAL ANALYSIS:

I-131

GAMMA SPECTRUM ANALYSIS:

BE-7

K-40

MN-54

CO-58

FE-59

CO-60

ZN-65

ZR-95

RU-103

RU-106

I-131

CS-134

CS-137

BA-140

CE-141

CE-144

RA-226

TH-228

(a) No broadleaf vegetation available.

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 101

DATE COLLECTED	05/27/09	06/11/09	07/30/09	08/11/09
RADIOCHEMICAL ANALYSIS:	(a)			
I-131		L.T. 4.E+01	L.T. 3.E+01	L.T. 5.E+01
GAMMA SPECTRUM ANALYSIS:				
BE-7		1.53E+03 ± 1.01E+02	2.73E+03 ± 4.02E+02	6.84E+02 ± 5.73E+01
K-40		5.16E+03 ± 2.03E+02	2.58E+03 ± 4.48E+02	5.93E+03 ± 1.35E+02
MN-54		L.T. 8.E+00	L.T. 1.E+01	L.T. 5.E+00
CO-58		L.T. 8.E+00	L.T. 2.E+01	L.T. 6.E+00
FE-59		L.T. 2.E+01	L.T. 3.E+01	L.T. 1.E+01
CO-60		L.T. 9.E+00	L.T. 1.E+01	L.T. 5.E+00
ZN-65		L.T. 2.E+01	L.T. 3.E+01	L.T. 1.E+01
ZR-95		L.T. 2.E+01	L.T. 3.E+01	L.T. 1.E+01
RU-103		L.T. 8.E+00	L.T. 2.E+01	L.T. 6.E+00
RU-106		L.T. 6.E+01	L.T. 1.E+02	L.T. 4.E+01
I-131		L.T. 2.E+01	(b)	L.T. 3.E+01
CS-134		L.T. 7.E+00	L.T. 1.E+01	L.T. 4.E+00
CS-137		L.T. 8.E+00	L.T. 1.E+01	L.T. 5.E+00
BA-140		L.T. 5.E+01	L.T. 2.E+02	L.T. 5.E+01
CE-141		L.T. 1.E+01	L.T. 3.E+01	L.T. 1.E+01
CE-144		L.T. 5.E+01	L.T. 9.E+01	L.T. 3.E+01
RA-226		L.T. 2.E+02	L.T. 3.E+02	L.T. 1.E+02
TH-228		L.T. 1.E+01	9.09E+01 ± 3.75E+01	L.T. 8.E+00

(a) No broadleaf vegetation available.

(b) No gamma I-131 reported for this sample.

VII-9
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
VEGETATION-TERRESTRIAL, BROADLEAF
(PCI/KG WET)

STATION NUMBER 101

DATE COLLECTED	09/29/09	10/27/09
	(a)	(a)

RADIOCHEMICAL ANALYSIS:

I-131 (LOW LVL)

GAMMA SPECTRUM ANALYSIS:

BE-7
K-40
MN-54
CO-58
FE-59
CO-60
ZN-65
ZR-95
RU-103
RU-106
I-131
CS-134
CS-137
BA-140
CE-141
CE-144
RA-226
TH-228
TH-228

(a) No broadleaf vegetation available.

VII-10
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
SHORELINE SEDIMENT
 (PCI/KG DRY)

STATION NUMBER 28

DATE COLLECTED	05/27/09	10/20/09
----------------	----------	----------

GAMMA SPECTRUM ANALYSIS:

BE-7	L.T. 6.E+02	L.T. 7.E+02
K-40	1.67E+04 ± 1.20E+03	1.72E+04 ± 1.31E+03
MN-54	L.T. 6.E+01	L.T. 5.E+01
CO-58	L.T. 6.E+01	L.T. 6.E+01
FE-59	L.T. 2.E+02	L.T. 2.E+02
CO-60	L.T. 5.E+01	L.T. 5.E+01
ZN-65	L.T. 1.E+02	L.T. 1.E+02
ZR-95	L.T. 1.E+02	L.T. 1.E+02
RU-103	L.T. 7.E+01	L.T. 8.E+01
RU-106	L.T. 5.E+02	L.T. 5.E+02
I-131	L.T. 6.E+02	L.T. 5.E+02
CS-134	L.T. 5.E+01	L.T. 5.E+01
CS-137	L.T. 6.E+01	L.T. 7.E+01
BA-140	L.T. 8.E+02	L.T. 8.E+02
CE-141	L.T. 1.E+02	L.T. 1.E+02
CE-144	L.T. 4.E+02	L.T. 4.E+02
RA-226	L.T. 1.E+03	2.08E+03 ± 1.09E+03
TH-228	1.18E+03 ± 9.09E+01	9.61E+02 ± 1.10E+02

VII-10
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - AIRBORNE
 SHORELINE SEDIMENT
 (PCI/KG DRY)

STATION NUMBER 35

DATE COLLECTED

05/27/09

10/20/09

GAMMA SPECTRUM ANALYSIS:

BE-7	L.T. 5.E+02	L.T. 4.E+02
K-40	1.39E+04 ± 1.04E+03	1.14E+04 ± 8.11E+02
MN-54	L.T. 4.E+01	L.T. 4.E+01
CO-58	L.T. 5.E+01	L.T. 4.E+01
FE-59	L.T. 1.E+02	L.T. 9.E+01
CO-60	L.T. 5.E+01	L.T. 4.E+01
ZN-65	L.T. 1.E+02	L.T. 8.E+01
ZR-95	L.T. 9.E+01	L.T. 8.E+01
RU-103	L.T. 6.E+01	L.T. 5.E+01
RU-106	L.T. 4.E+02	L.T. 3.E+02
I-131	L.T. 4.E+02	L.T. 3.E+02
CS-134	L.T. 4.E+01	L.T. 3.E+01
CS-137	L.T. 4.E+01	L.T. 4.E+01
BA-140	L.T. 6.E+02	L.T. 5.E+02
CE-141	L.T. 1.E+02	L.T. 9.E+01
CE-144	L.T. 3.E+02	L.T. 2.E+02
RA-226	1.26E+03 ± 8.01E+02	L.T. 7.E+02
TH-228	8.07E+02 ± 7.49E+01	9.30E+02 ± 6.10E+01

SECTION VIII. REFERENCES

VIII. REFERENCES

1. Nebraska Public Power District, Cooper Nuclear Station Environmental Radiation Monitoring Program, Annual Report, January 1, 1982-December 31, 1982 (prepared by Teledyne Isotopes).
2. Nebraska Public Power District, Cooper Nuclear Station Environmental Radiation Monitoring Program, Annual Report, January 1, 1983-December 31, 1983 (prepared by Teledyne Isotopes).
3. Nebraska Public Power District Cooper Nuclear Station, Environmental Monitoring Program, Annual Report, January 1, 1984 to December 31, 1984. (Prepared by Teledyne Isotopes).
4. U.S. Department of Energy; EML 440 March 1985; EML-444 April 1989; Environmental Measurements Laboratory, US Department of Energy, New York, New York 10014.
5. U.S. Environmental Protection Agency; Environmental Radiation Data, Report 35, July -- September 1983, Report 39, July -- September 1985; Report 40, October -- December 1984; Report 41, January -- March 1985. Report 42, April -- June 1985; Report 43, July-September 1985, Report 44-45, October-March 1986; Report 46, April-June 1986; Report 47, July-September 1986; Report 48, October-December 1986; Report 49, January-March 1987. Environmental Radiation Facility, Montgomery, Alabama.
6. U.S. Department of Energy; EML 460, October 1, 1986; Environmental Measurements Laboratory, US Department of Energy, New York, New York 10014.
7. U.S. Nuclear Regulatory Commission, 1975, Regulatory Guide 4.8, Environmental Technical Specifications for Nuclear Power Plants.
8. U.S. Regulatory Commission, Branch Technical Position, Radiological Monitoring Acceptable Program (November, 1979, Revision 1).

APPENDIX A
2009 LAND USE CENSUS

2009 LAND USE CENSUS

Conducted July 8, 2009
0-3 miles

Cooper Nuclear Station (CNS) Offsite Dose Assessment Manual (ODAM) requires an annual land use census. This census identifies the location of the nearest garden that is greater than 500 square feet in area and yields leafy green vegetables, the nearest milk animal, and the location of the nearest resident in each of the 16 meteorological sectors within 3 miles of CNS.

A land use census was performed on July 8, 2009, in accordance with the CNS ODAM. The nearest residence was found in sector Q, 0.9 miles from CNS, and the nearest garden was found in sector L, 1.3 miles from CNS.

No milk animals were found within 3 miles of CNS and there was no evidence of potable water use from the Missouri River within three miles of CNS.

2009 LAND USE CENSUS

July 08, 2009

0-3 Miles

SECTOR	NEAREST RESIDENT	Direction in Degrees	NEAREST GARDEN	Direction in Degrees	NEAREST MILK ANIMAL
	Distance		Distance		
A/N	2.5 Miles	1.0°	NONE	NA	NONE
B/NNE	NONE	NA	NONE	NA	NONE
C/NE	2.8 Miles	42.0°	2.8 Miles	42.0°	NONE
D/ENE	1.7 Miles	62.0°	1.7 Miles	62.0°	NONE
E/E	1.9 Miles	97.0°	1.9 Miles	97.0°	NONE
F/ESE	2.3 Miles	112.0°	3.0 Miles	108.0°	NONE
G/SE	NONE	NONE	NONE	NA	NONE
H/SSE	NONE	NA	NONE	NA	NONE
J/S	NONE	NA	NONE	NA	NONE
K/SSW	2.1 Miles	218.0°	NONE	NA	NONE
L/SW	1.3 Miles	232.0°	1.3 Miles	232.0°	NONE
M/WSW	1.9 Miles	241.0°	1.9 Miles	241.0°	NONE
N/W	1.0 Miles	265.0°	NONE	NA	NONE
P/WNW	1.7 Miles	299.0°	2.4 Miles	298.0°	NONE
Q/NW	0.9 Miles	307.0°	2.9 Miles	324.0°	NONE
R/NNW	1.9 Miles	339.0°	2.8 Miles	335.0°	NONE

APPENDIX B
SUMMARY OF INTERLABORATORY COMPARISONS

The Teledyne Brown Engineering ICP report is presented in this section

INTERLABORATORY COMPARISION PROGRAM

The purpose of the Interlaboratory Comparison Program (ICP) is to confirm the accuracy of results produced by Teledyne Brown Engineering. Samples of various matrices (i.e. soil, water, vegetation, air filters, and milk) are spiked with known amounts of radioactivity by commercial vendors of this service and by departments within the government. TBE participates in three programs. Two are commercial, Analytics Inc. and Environmental Resource Associates (ERA) and one is a government sponsored program, the Department of Energy's (DOE) Mixed Analyte Performance Evaluation Program (MAPEP). The DOE's Idaho National Engineering Laboratory administers the MAPEP. All three programs are blind performance evaluation studies in which samples with known activities are sent to TBE for analysis. Once analyzed, TBE submits the results to the respective agency for evaluation. The results of these evaluations are published in TBE's quarterly and annual QA reports.

The 2009 Interlaboratory Comparison Program includes all contractually required matrices and analyses we supply to customers.

The US Environmental Protection Agency (EPA) discontinued their Interlaboratory Comparison Program in December 1998. However, on May 1, 2001, accreditation was granted to Environmental Resource Associates' (ERA) RadChem Proficiency Testing Program to complete the process of replacing the USEPA-LV Nuclear Radiation Assessment Division program.

The Department of Energy's Environmental Measurement Laboratory (EML) program terminated performance assessments at the end of the March 2004 test session. The MAPEP sample distribution was expanded to include water, soil, vegetation and air particulate testing material previously provided by DOE/EML. In 2009, the samples were received in March and September with required reporting dates of May and October, respectively.

The National Institute of Standards and Technology (NIST) is the approval authority for laboratory providers participating in Intercomparison Study Programs; however, at this time, there are no approved laboratories for environmental and/or radiochemical isotope analyses.

Trending graphs are provided in this section for the Analytics and ERA Programs.

ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES
(PAGE 1 OF 3)

Month/Year	Identification Number	Matrix	Nuclide	Units	Reported Value (a)	Known Value (b)	Ratio (c) TBE/Analytics	Evaluation (d)			
March 2009	E6533-396	Milk	Sr-89	pCi/L	102	97.7	1.04	A			
			Sr-90	pCi/L	14.9	15.6	0.96	A			
March 2009	E6534-396	Milk	I-131	pCi/L	66.7	79.3	0.84	A			
			Ce-141	pCi/L	87.5	94.9	0.92	A			
			Cr-51	pCi/L	275	305	0.90	A			
			Cs-134	pCi/L	82.0	93.7	0.88	A			
			Cs-137	pCi/L	111	111	1.00	A			
			Co-58	pCi/L	114	119	0.96	A			
			Mn-54	pCi/L	136	128	1.06	A			
			Fe-59	pCi/L	112	99.9	1.12	A			
			Zn-65	pCi/L	160	156	1.03	A			
			Co-60	pCi/L	142	142	1.00	A			
			March 2009	E6536-396	AP	Ce-141	pCi	120	115	1.04	A
						Cr-51	pCi	385	371	1.04	A
						Cs-134	pCi	113	114	0.99	A
						Cs-137	pCi	149	135	1.10	A
Co-58	pCi	153				145	1.06	A			
Mn-54	pCi	155				155	1.00	A			
Fe-59	pCi	118				121	0.98	A			
Zn-65	pCi	195				189	1.03	A			
Co-60	pCi	190	173	1.10	A						
March 2009	E6535-396	Charcoal	I-131	pCi	82.8	79.4	1.04	A			
June 2009	E6742-396	Milk	Sr-89	pCi/L	107	112	0.96	A			
			Sr-90	pCi/L	19.0	16.7	1.14	A			
June 2009	E6743-396	Milk	I-131	pCi/L	98.1	102.0	0.96	A			
			Ce-141	pCi/L	260	284	0.92	A			
			Cr-51	pCi/L	389	400	0.97	A			
			Cs-134	pCi/L	144.0	166	0.87	A			
			Cs-137	pCi/L	185	192	0.96	A			
			Co-58	pCi/L	86.9	91.9	0.95	A			
			Mn-54	pCi/L	133	137	0.97	A			
			Fe-59	pCi/L	126	122	1.03	A			
			Zn-65	pCi/L	173	175	0.99	A			
			Co-60	pCi/L	298	312	0.96	A			
			June 2009	E6745-396	AP	Ce-141	pCi	186	163	1.14	A
						Cr-51	pCi	262	231	1.13	A
						Cs-134	pCi	101	95	1.06	A
						Cs-137	pCi	135	111	1.22	W
Co-58	pCi	61				53	1.16	A			
Mn-54	pCi	83.1				79	1.05	A			
Fe-59	pCi	84				70	1.19	A			
Zn-65	pCi	137				101	1.36	N (1)			
Co-60	pCi	202	180	1.12	A						
June 2009	E6744-396	Charcoal	I-131	pCi	92.2	95.8	0.96	A			

ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES
(PAGE 2 OF 3)

Month/Year	Identification Number	Matrix	Nuclide	Units	Reported Value (a)	Known Value (b)	Ratio (c) TBE/Analytics	Evaluation (d)		
June 2009	E6745-396	Water	Fe-55	pCi	1780	1790	0.99	A		
September 2009	E6897-396	Milk	Sr-89	pCi/L	113	107	1.06	A		
			Sr-90	pCi/L	17.4	18.8	0.93	A		
	E6898-396	Milk	I-131	pCi/L	89.2	98.6	0.90	A		
			Ce-141	pCi/L	249	275	0.91	A		
			Cr-51	pCi/L	213	221	0.96	A		
			Cs-134	pCi/L	104.0	123	0.85	A		
			Cs-137	pCi/L	172	185	0.93	A		
			Co-58	pCi/L	96.3	99.4	0.97	A		
			Mn-54	pCi/L	201	206	0.98	A		
			Fe-59	pCi/L	154	147	1.05	A		
			Zn-65	pCi/L	213	204	1.04	A		
			Co-60	pCi/L	154	160	0.96	A		
			E6900-396	AP	Ce-141	pCi	181	161	1.12	A
					Cr-51	pCi	145	130	1.12	A
					Cs-134	pCi	71.8	72	0.99	A
					Cs-137	pCi	115	109	1.06	A
Co-58	pCi	62			58	1.06	A			
Mn-54	pCi	129			121	1.07	A			
Fe-59	pCi	97			98	0.98	A			
Zn-65	pCi	110			120	0.92	A			
E6901-396	AP	Co-60	pCi	98.7	94.1	1.05	A			
		E6899-396	Charcoal	I-131	pCi	89.5	92.3	0.97	A	
		E6901-396	Water	Fe-55	pCi	1980	1980	1.00	A	
		December 2009	E6946-396	Milk	Sr-89	pCi/L	131	131	1.00	A
					Sr-90	pCi/L	19.3	17.9	1.08	A
		E6947-396	Milk	I-131	pCi/L	79.2	87.3	0.91	A	
				Ce-141	pCi/L	193	202	0.96	A	
				Cr-51	pCi/L	512	548	0.93	A	
Cs-134	pCi/L			222	253	0.88	A			
Cs-137	pCi/L			163	179	0.91	A			
Co-58	pCi/L			200	211	0.95	A			
Mn-54	pCi/L			178	178	1.00	A			
Fe-59	pCi/L			176	178	0.99	A			
Zn-65	pCi/L			326	345	0.94	A			
Co-60	pCi/L			240	256	0.94	A			
E6949-396	AP	Ce-141	pCi	103	103	1.00	A			
		Cr-51	pCi	290	280	1.04	A			
		Cs-134	pCi	116	129	0.90	A			
		Cs-137	pCi	93.4	91.5	1.02	A			
		Co-58	pCi	111	108	1.03	A			
		Mn-54	pCi	81.0	90.8	0.89	A			
		Fe-59	pCi	106	90.8	1.17	A			
		Zn-65	pCi	155	176	0.88	A			
		Co-60	pCi	135	131	1.03	A			

**ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES**

(PAGE 3 OF 3)

Month/Year	Identification Number	Matrix	Nuclide	Units	Reported Value (a)	Known Value (b)	Ratio (c) TBE/Analytics	Evaluation (d)
December 2009	E6948-396	Charcoal	I-131	pCi	93.3	93.9	0.99	A
	E6950-396	Water	Fe-55	pCi	1860	2500	0.74	W

(1) Detector 7 appears to have a slightly high bias. Detector 7 was removed from service until it can be recalibrated. NCR 09-23

(a) Teledyne Brown Engineering reported result.

(b) The Analytics known value is equal to 100% of the parameter present in the standard as determined by gravimetric and/or volumetric measurements made during standard preparation.

(c) Ratio of Teledyne Brown Engineering to Analytics results.

(d) Analytics evaluation based on TBE internal QC limits: A= Acceptable. Reported result falls within ratio limits of 0.80-1.20. W-Acceptable with warning. Reported result falls within 0.70-0.80 or 1.20-1.30. N = Not Acceptable. Reported result falls outside the ratio limits of < 0.70 and > 1.30.

DOE's MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM (MAPEP)
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES
(PAGE 1 OF 3)

Month/Year	Identification Number	Media	Nuclide	Units	Reported Value (a)	Known Value (b)	Acceptance Range	Evaluation (c)		
March 2009	09-MaW20	Water	Am-241	Bq/L	NR					
			Cs-134	Bq/L	18.8	22.5	18.5 - 29.3	A		
			Cs-137	Bq/L	0.0601		(1)	A		
			Co-57	Bq/L	17.0	18.9	13.2 - 24.6	A		
			Co-60	Bq/L	16.1	17.21	12.05 - 22.37	A		
			Fe-55	Bq/L	69.92	48.20	33.7 - 62.7	N (2)		
			H-3	Bq/L	332	330.9	231.6 - 430.2	A		
			Mn-54	Bq/L	13.8	14.7	10.26 - 19.06	A		
			Ni-63	Bq/L	50.7	53.50	37.45 - 69.55	A		
			Pu-238	Bq/L	0.349	1.18	0.83 - 1.53	N (3)		
			Pu-239/240	Bq/L	0.244	0.853	0.597 - 1.109	N (3)		
			Sr-90	Bq/L	6.88	7.21	5.05 - 9.37	A		
			Tc-99	Bq/L	12.5	14.46	10.12 - 18.80	A		
			U-234/233	Bq/L	2.61	2.77	1.94 - 3.60	A		
			U-238	Bq/L	2.71	2.88	2.02 - 3.74	A		
			Zn-65	Bq/L	13.2	13.6	9.5 - 17.7	A		
			09-GrW20	Water	Gr-A	Bq/L	0.529	0.635	>0.0 - 1.270	A
					Gr-B	Bq/L	1.87	1.27	0.64 - 1.91	A
			09-MaS20	Soil	Am-241	Bq/kg	27.17	38.3	26.8 - 49.8	W
					Cs-134	Bq/kg	433	467	327 - 607	A
	Cs-137	Bq/kg			649	605	424 - 787	A		
	Co-57	Bq/kg			-0.120		(1)	A		
	Co-60	Bq/kg			3.91	4.113	(4)	A		
	Mn-54	Bq/kg			339	307	215 - 399	A		
	Ni-63	Bq/kg			241	514.9	360.4 - 669.4	N (5)		
	Pu-238	Bq/kg			NR					
	Pu-239/240	Bq/kg			NR					
	K-40	Bq/kg			644	570	399 - 741	A		
	Sr-90	Bq/kg			245	257	180 - 334	A		
	Tc-99	Bq/kg			133	171	120 - 222	W		
	U-234/233	Bq/kg			158.7	149	104 - 194	A		
	U-238	Bq/kg			164.8	155	109 - 202	A		
	Zn-65	Bq/kg			272	242	169 - 315	A		
	09-RdF20	AP			Am-241	Bq/sample	NR			
			Cs-134	Bq/sample	2.77	2.93	2.05 - 3.81	A		
			Cs-137	Bq/sample	1.41	1.52	1.06 - 1.98	A		
			Co-57	Bq/sample	1.24	1.30	0.91 - 1.69	A		
			Co-60	Bq/sample	1.33	1.22	0.85 - 1.59	A		
			Mn-54	Bq/sample	2.42	2.2709	1.5898 - 2.9522	A		
			Pu-238	Bq/sample	0.0965	0.1763	0.1234 - 0.2292	N (6)		
Pu-239/240			Bq/sample	0.084	0.157	0.110 - 0.204	N (6)			
Sr-90			Bq/sample	0.713	0.64	0.448 - 0.832	A			
U-234/233			Bq/sample	0.187	0.198	0.139 - 0.257	A			
U-238			Bq/sample	0.183	0.21	0.15 - 0.27	A			
Zn-65			Bq/sample	1.30	1.36	0.95 - 1.77	A			
09-GrF20			AP	Gr-A	Bq/sample	0.188	0.348	>0.0 - 0.696	A	
	Gr-B	Bq/sample		0.313	0.279	0.140 - 0.419	A			

DOE's MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM (MAPEP)
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES
(PAGE 2 OF 3)

Month/Year	Identification Number	Media	Nuclide	Units	Reported Value (a)	Known Value (b)	Acceptance Range	Evaluation (c)
March 2009	09-RdV20	Vegetation	Cs-134	Bq/sample	3.48	3.40	2.38 - 4.42	A
			Cs-137	Bq/sample	1.15	0.93	0.65 - 1.21	W
			Co-57	Bq/sample	3.12	2.36	1.65 - 3.07	N (7)
			Co-60	Bq/sample	-0.0105		(1)	A
			Mn-54	Bq/sample	2.98	2.3	1.61 - 2.99	W
			K-40	Bq/sample	64.1		(8)	
			Sr-90	Bq/sample	1.09	1.260	0.882 - 1.638	A
			Zn-65	Bq/sample	1.73	1.3540	0.948 - 1.760	W
September 2009	09-MaW21	Water	Cs-134	Bq/L	26.5	32.2	22.5 - 41.9	A
			Cs-137	Bq/L	37.2	41.2	28.8 - 53.6	A
			Co-57	Bq/L	32.2	36.6	25.6 - 47.6	A
			Co-60	Bq/L	14.0	15.40	10.8 - 20.0	A
			H-3	Bq/L	705	634.1	443.9 - 824.3	A
			Mn-54	Bq/L	-0.1015		(1)	A
			Ni-63	Bq/L	40.93	44.2	30.9 - 57.5	A
			Pu-238	Bq/L	0.008	0.018	(4)	A
			Pu-239/240	Bq/L	1.507	1.640	1.15 - 2.13	A
			Sr-90	Bq/L	13.9	12.99	9.09 - 16.89	A
			Tc-99	Bq/L	8.06	10.0	7.0 - 13.0	A
			U-234/233	Bq/L	3.01	2.96	2.07 - 3.85	A
			U-238	Bq/L	3.07	3.03	3.07 - 3.94	A
	Zn-65	Bq/L	26.2	26.9	18.8 - 35.0	A		
	09-GrW21	Water	Gr-A	Bq/L	1.27	1.047	>0.0 - 2.094	A
			Gr-B	Bq/L	9.70	7.53	3.77 - 11.30	A
	09-MaS21	Soil	Am-241	Bq/kg	74.7	89.8	62.9 - 116.7	A
			Cs-134	Bq/kg	0.554		(1)	A
			Cs-137	Bq/kg	706	669	468 - 870	A
			Co-57	Bq/kg	606	586	410 - 762	A
Co-60			Bq/kg	350	327.000	229 - 425	A	
Mn-54			Bq/kg	876	796	557 - 1035	A	
Ni-63			Bq/kg	509	680.0	476 - 884	W	
K-40			Bq/kg	425	375	263 - 488	A	
Sr-90			Bq/kg	505	455	319 - 592	A	
Tc-99			Bq/kg	392	444	311 - 577	A	
U-234/233			Bq/kg	219	209	146 - 272	A	
U-238			Bq/kg	211	217	152 - 282	A	
Zn-65			Bq/kg	1370	1178	825 - 1531	A	
09-RdF21	AP	Am-241	Bq/sample	-0.0040		(1)	A	
		Cs-134	Bq/sample	-0.02		(1)	A	
		Cs-137	Bq/sample	1.4	1.4	0.98 - 1.82	A	
		Co-57	Bq/sample	5.98	6.48	4.54 - 8.42	A	
		Co-60	Bq/sample	1.01	1.03	0.72 - 1.34	A	
		Mn-54	Bq/sample	5.16	5.49	3.84 - 7.14	A	
		Pu-238	Bq/sample	0.0745	0.091	0.064 - 0.118	A	
		Pu-239/240	Bq/sample	0.1100	0.138	0.097 - 0.0471	W	
		Sr-90	Bq/sample	0.925	0.0835	0.585 - 1.086	A	
		U-234/233	Bq/sample	0.276	0.300	0.210 - 0.390	A	
		U-238	Bq/sample	0.312	0.312	0.218 - 0.406	A	
		Zn-65	Bq/sample	4.39	3.93	2.75 - 5.11	A	

**DOE's MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM (MAPEP)
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES**

(PAGE 3 OF 3)

Month/Year	Identification Number	Media	Nuclide	Units	Reported Value (a)	Known Value (b)	Acceptance Range	Evaluation (c)
September 2009	09-GrF21	AP	Gr-A	Bq/sample	0.357	0.659	>0.0 - 1.318	A
			Gr-B	Bq/sample	1.403	1.320	0.66 - 1.98	A
	09-RdV21	Vegetation	Cs-134	Bq/sample	-0.0027		(1)	A
			Cs-137	Bq/sample	2.36	2.43	1.70 - 3.16	A
			Co-60	Bq/sample	2.58	2.57	1.80 - 3.34	A
			Mn-54	Bq/sample	8.36	7.9	5.5 - 10.3	A
			K-40	Bq/sample	57.8		(8)	A
			Sr-90	Bq/sample	1.73	1.78	1.25 - 2.31	A
			Zn-65	Bq/sample	-0.59		(1)	A

(1) False positive test.

(2) Fe-55 activity is too close to our detection limit. Fe-55 in water will be done quarterly through Analytics from now on. NCR 09-10

(3) Resin problem caused failure. NCR 09-11

(4) Sensativity evaluation.

(5) Abnormally high concentration of native nickel in soil caused high recovery resulting in low activity. NCR 09-09

(6) Resin problem caused failure. NCR 09-12

(7) Homogeniety problem. MAPEP requires using entire sample but due to geometry limitations we can only use part of the sample. NCR 09-13

(8) Not evaluated by MAPEP.

(a) Teledyne Brown Engineering reported result.

(b) The MAPEP known value is equal to 100% of the parameter present in the standard as determined by gravimetric and/or volumetric measurements made during standard preparation.

(c) DOE/MAPEP evaluation: A=acceptable, W=acceptable with warning, N=not acceptable.

ERA ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM
TELEDYNE QC SPIKE PROGRAM
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES
(PAGE 1 OF 1)




Month/Year	Identification Number	Media	Nuclide	Units	Reported Value (a)	Known Value (b)	Control Limits	Evaluation (c)
April 2009	RAD 77	Water	Sr-89	pCi/L	57.4	48.3	37.8 - 55.7	N (1)
			Sr-90	pCi/L	30.6	31.4	22.9 - 36.4	A
			Ba-133	pCi/L	55.2	52.7	43.4 - 58.3	A
			Cs-134	pCi/L	65.8	72.9	59.5 - 80.2	A
			Cs-137	pCi/L	157	168	151 - 187	A
			Co-60	pCi/L	86.4	88.9	80.0 - 100	A
			Zn-65	pCi/L	85.5	84.4	76.0 - 101	A
			Gr-A	pCi/L	47.7	54.2	28.3 - 67.7	A
			Gr-B	pCi/L	45.2	43.5	29.1 - 50.8	A
			I-131	pCi/L	25.2	26.1	21.7 - 30.8	A
			U-Nat	pCi/L	24.0	25.7	20.6 - 28.8	A
			H-3	pCi/L	19733	20300	17800 - 22300	A
October 2009	RAD 79	Water	Sr-89	pCi/L	64.75	62.2	50.2 - 70.1	A
			Sr-90	pCi/L	30.30	30.7	22.4 - 35.6	A
			Ba-133	pCi/L	97.9	92.9	78.3 - 102	A
			Cs-134	pCi/L	76.8	79.4	65.0 - 87.3	A
			Cs-137	pCi/L	59.9	54.6	49.1 - 62.9	A
			Co-60	pCi/L	121	117	105 - 131	A
			Zn-65	pCi/L	115	99.5	89.6 - 119	A
			Gr-A	pCi/L	19.6	23.2	11.6 - 31.1	A
			Gr-B	pCi/L	28.5	26.0	16.2 - 33.9	A
			I-131	pCi/L	22.1	22.2	18.4 - 26.5	A
			H-3	pCi/L	16133	16400	14300 - 18000	A




(1) Calculation did not allow for Y-90 ingrowth on the Sr-89 mount. NCR 09-14




(a) Teledyne Brown Engineering reported result.




(b) The ERA known value is equal to 100% of the parameter present in the standard as determined by gravimetric and/or volumetric measurements made during standard preparation.




(c) ERA evaluation: A=acceptable. Reported result falls within the Warning Limits. NA=not acceptable. Reported result falls outside of the Control Limits. CE=check for Error. Reported result falls within the Control Limits and outside of the Warning Limit.

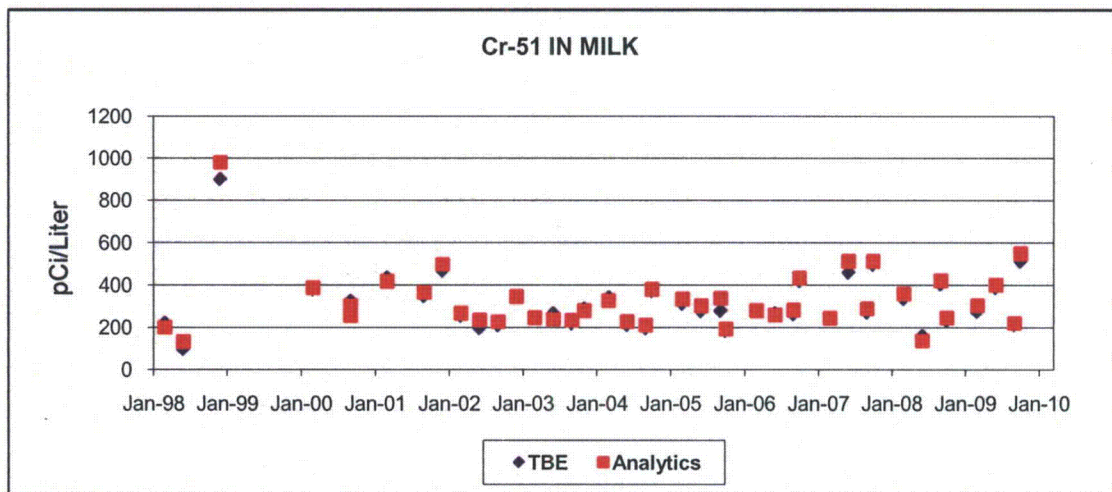
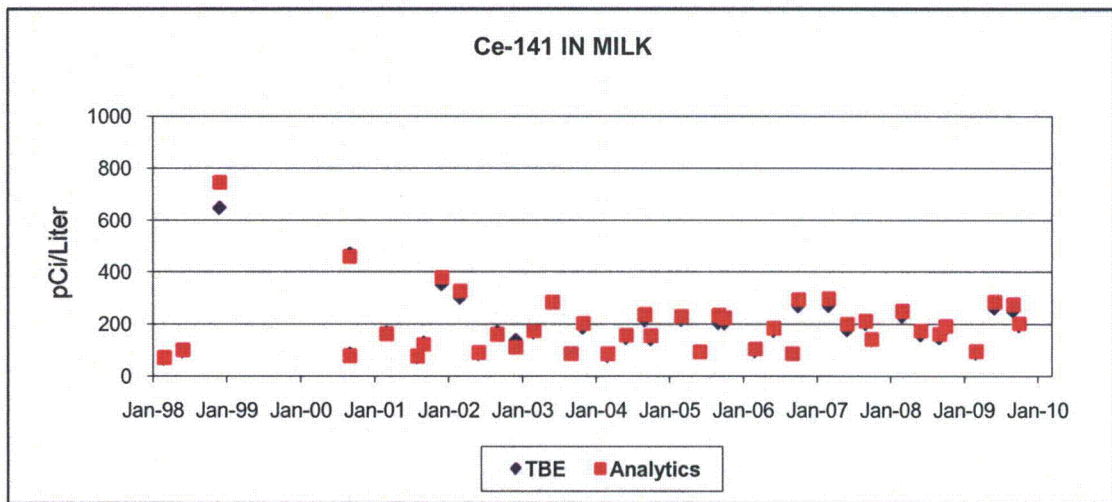
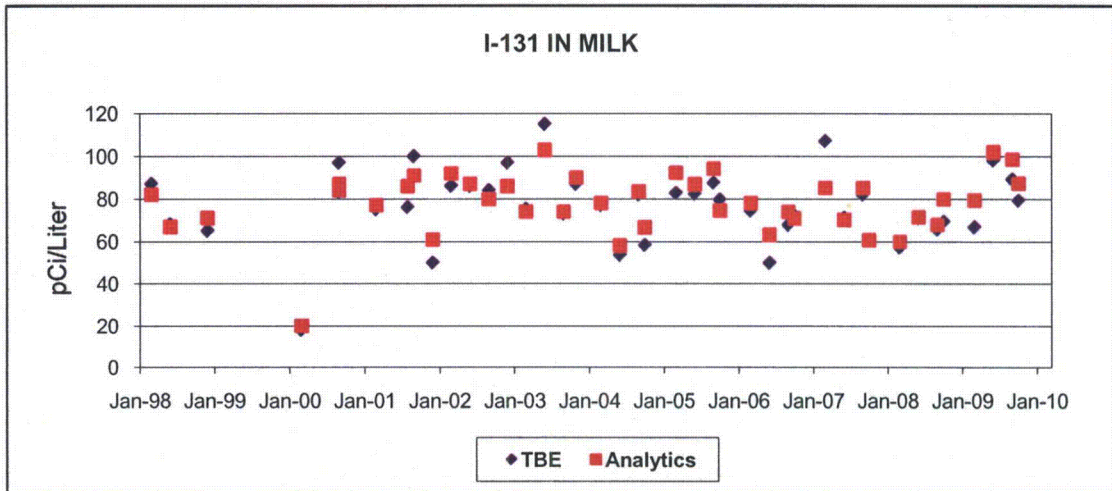


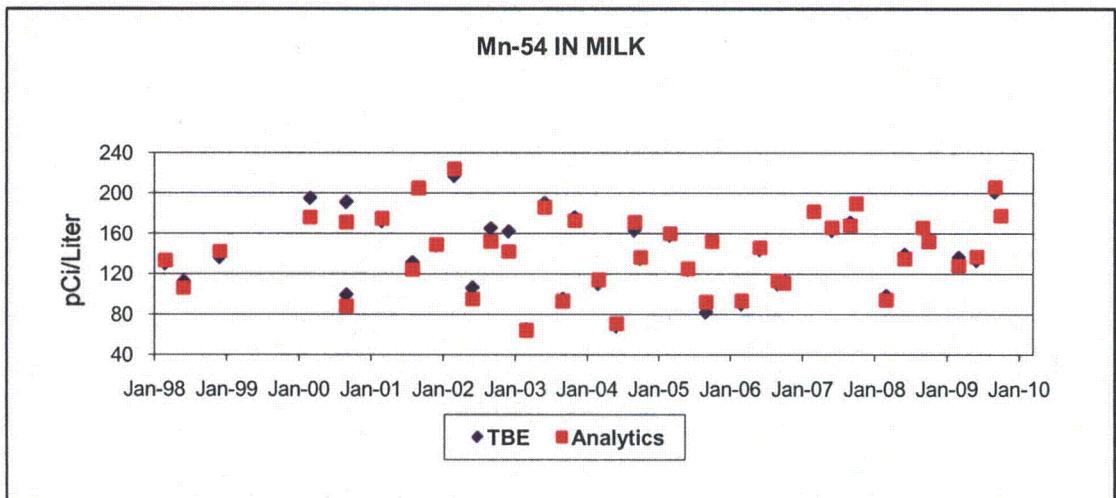
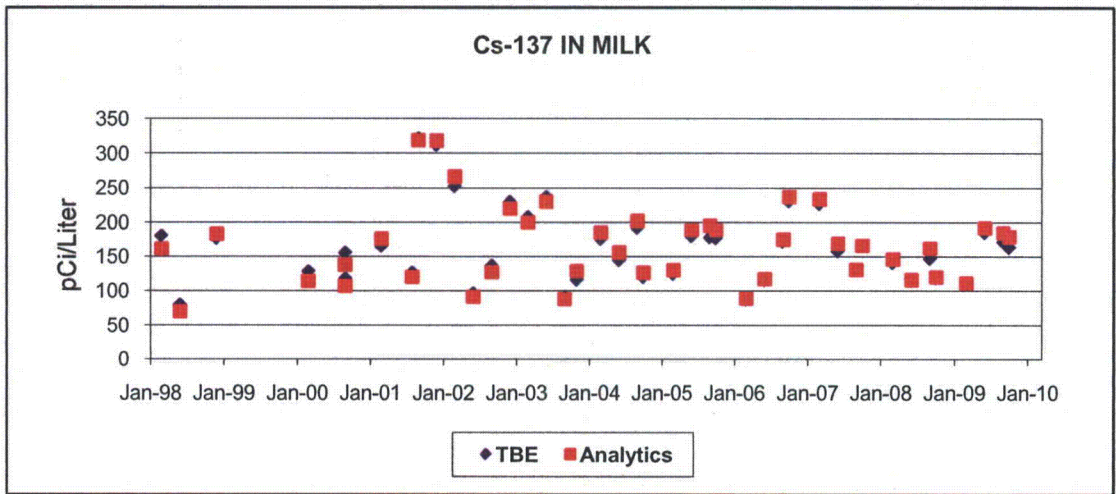
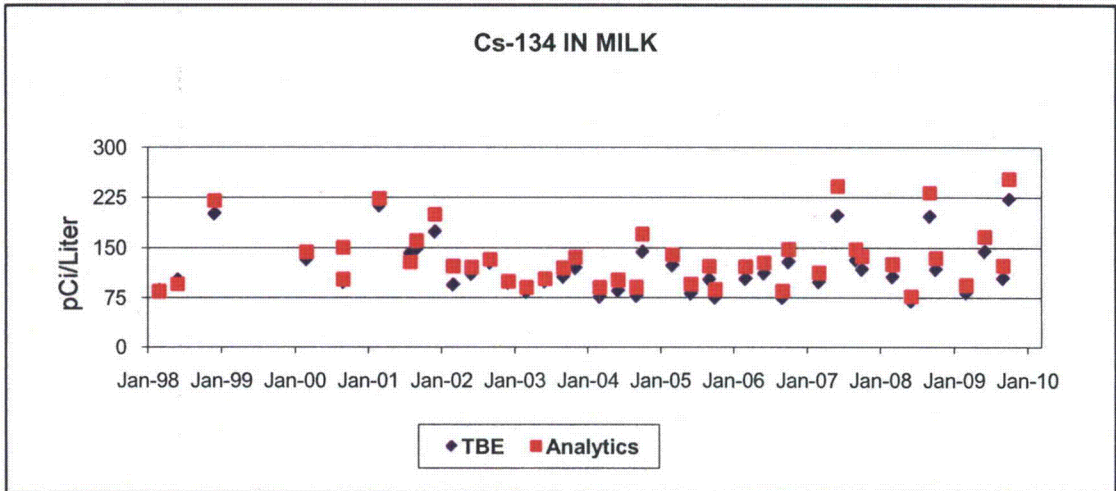


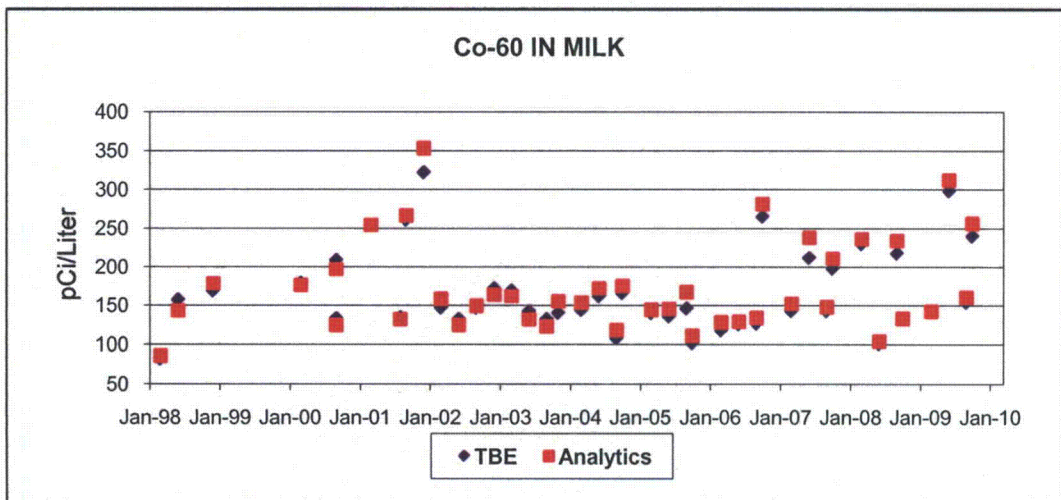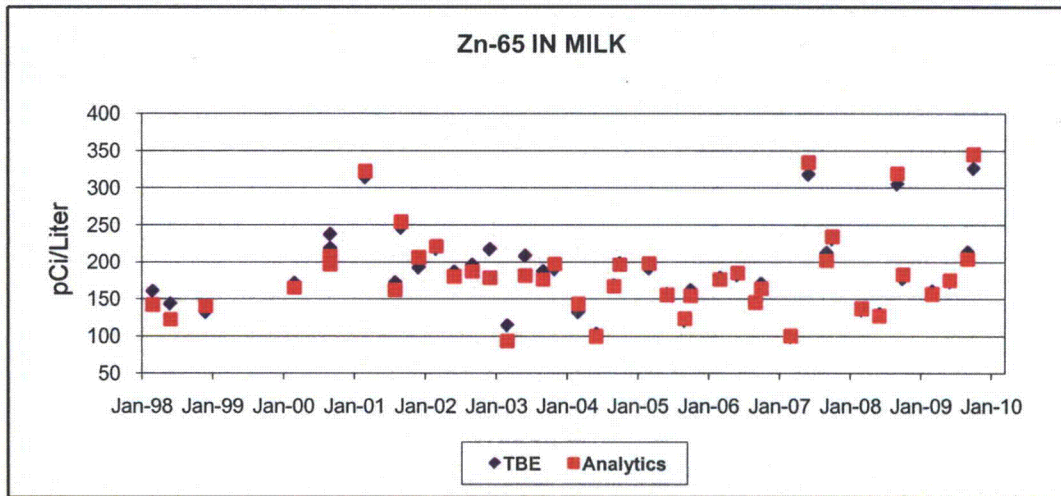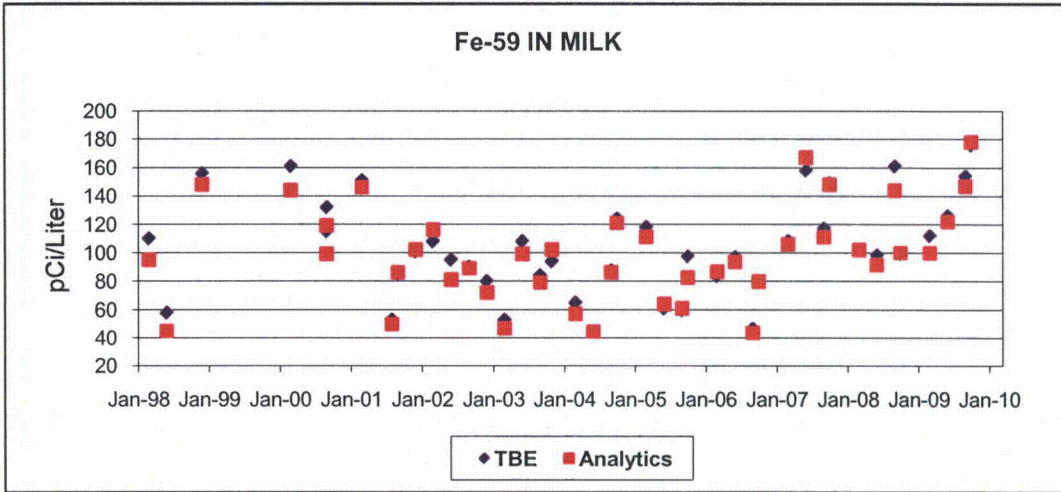


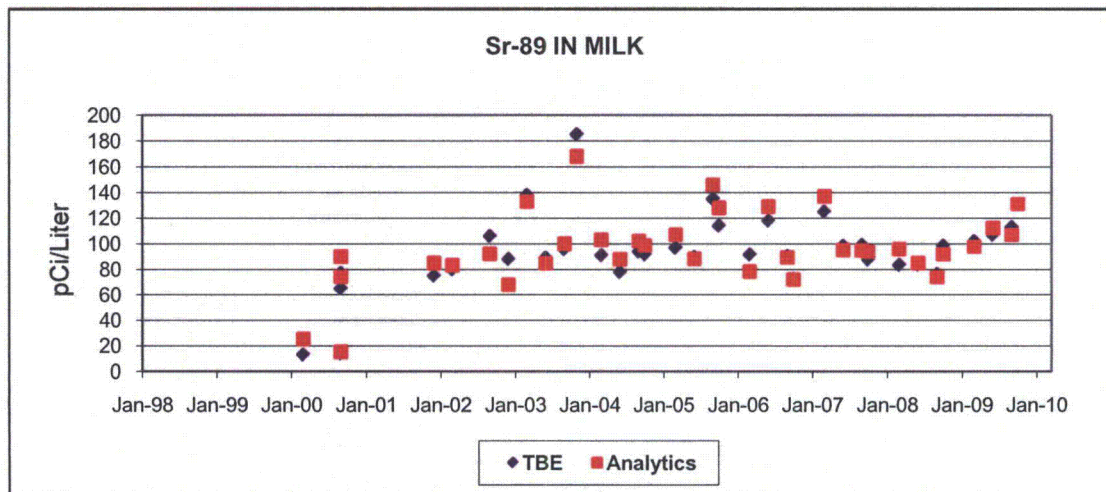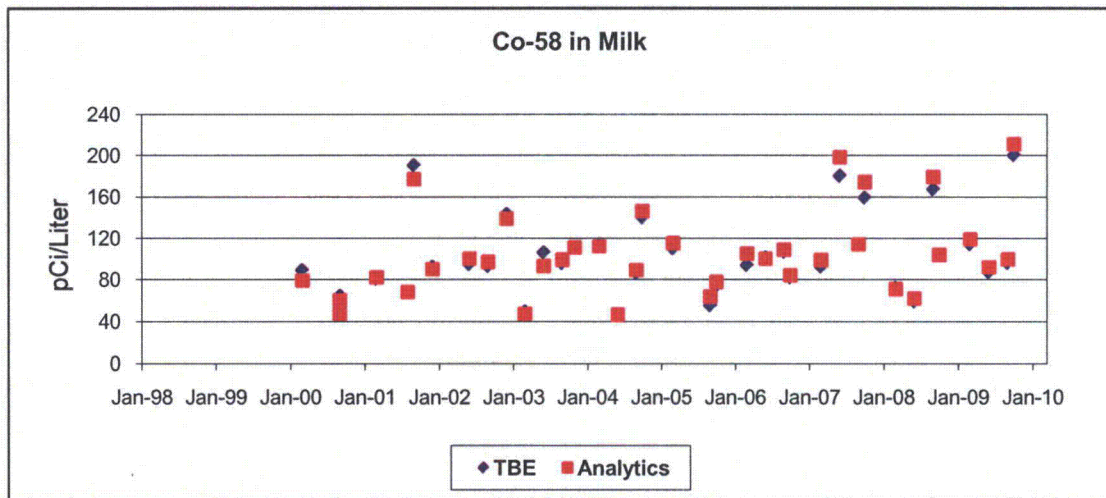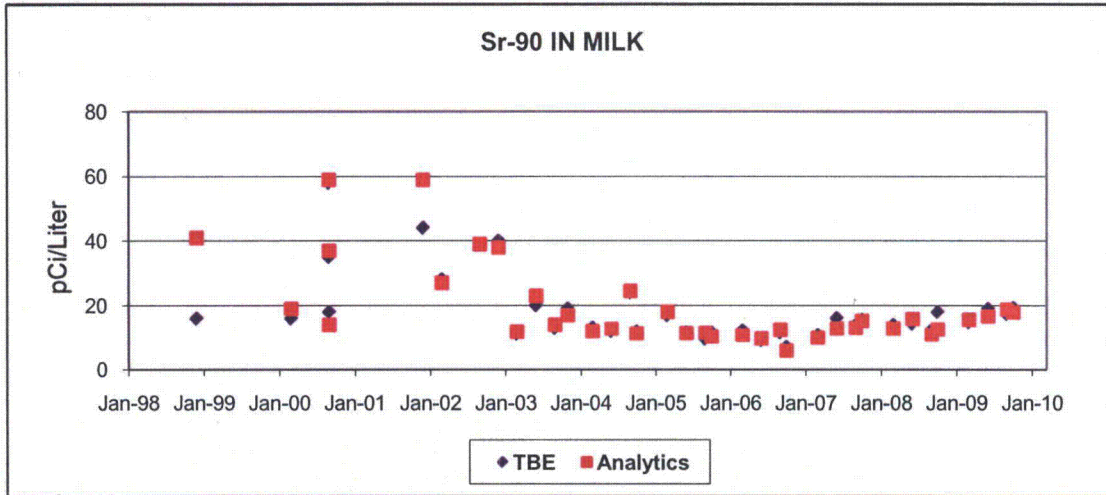

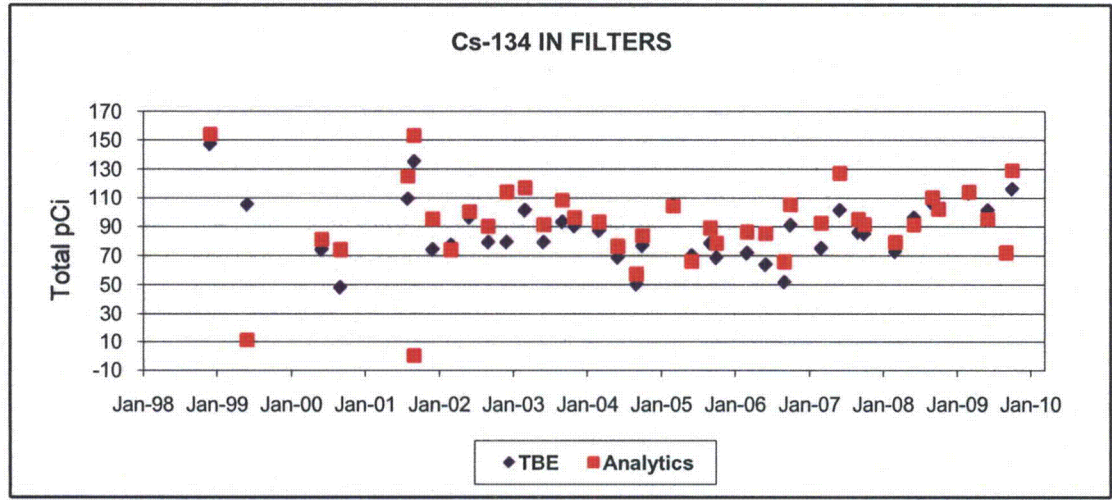
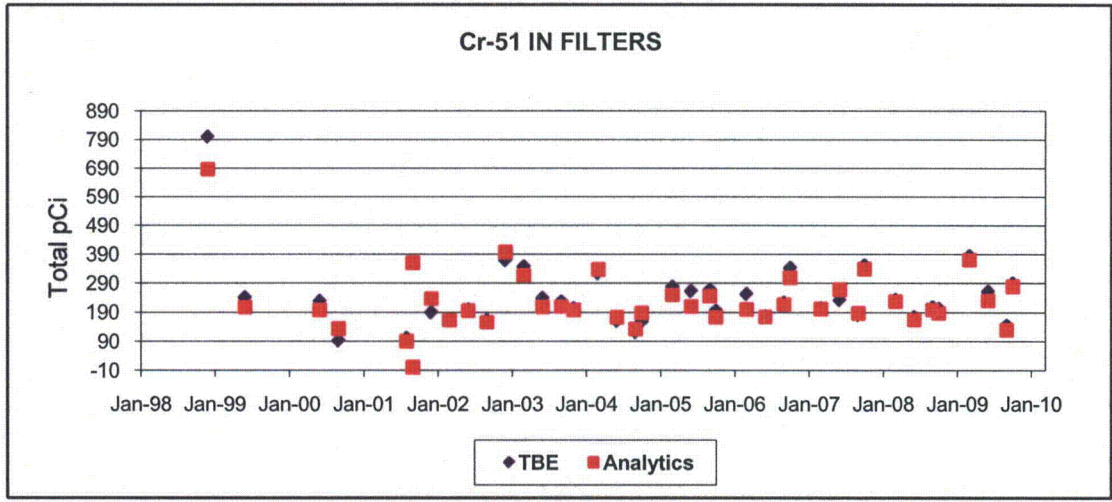
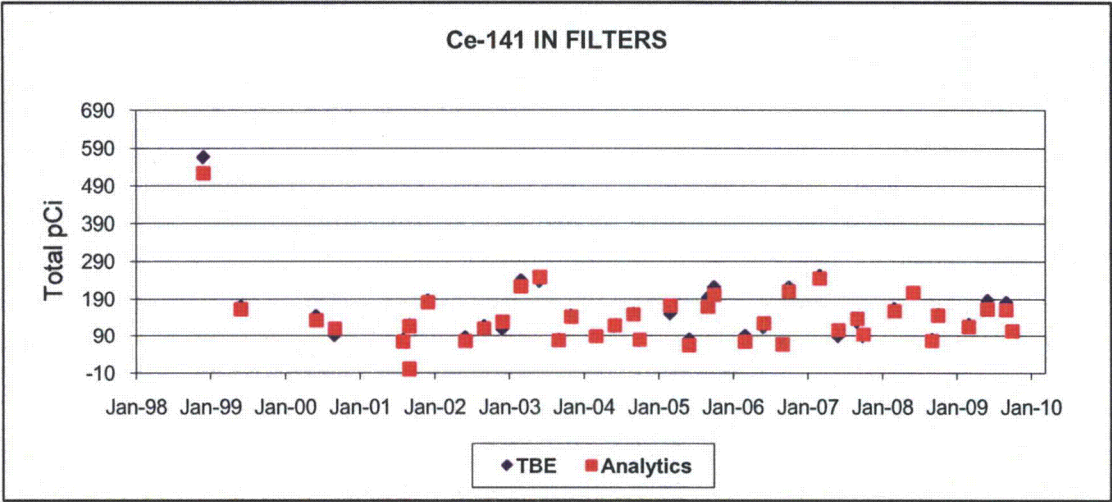


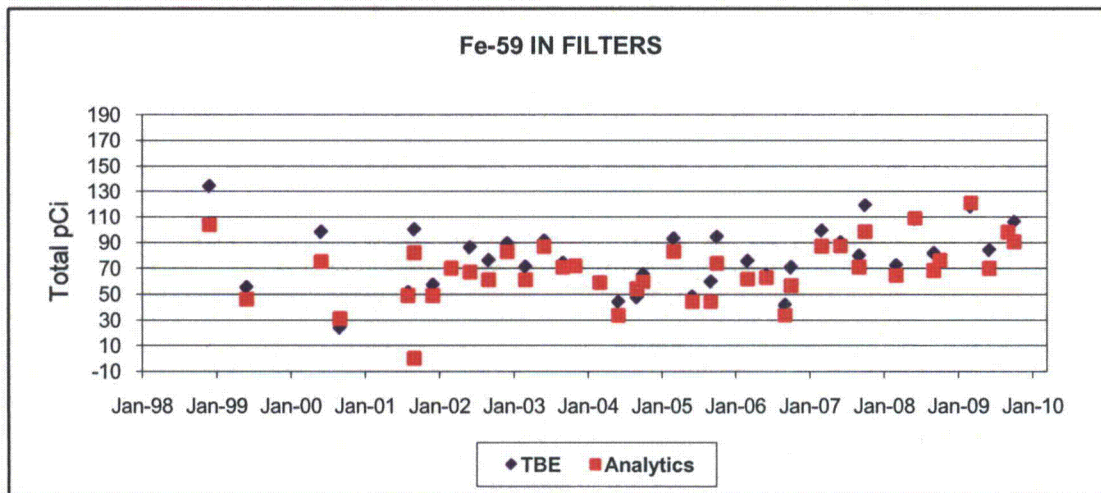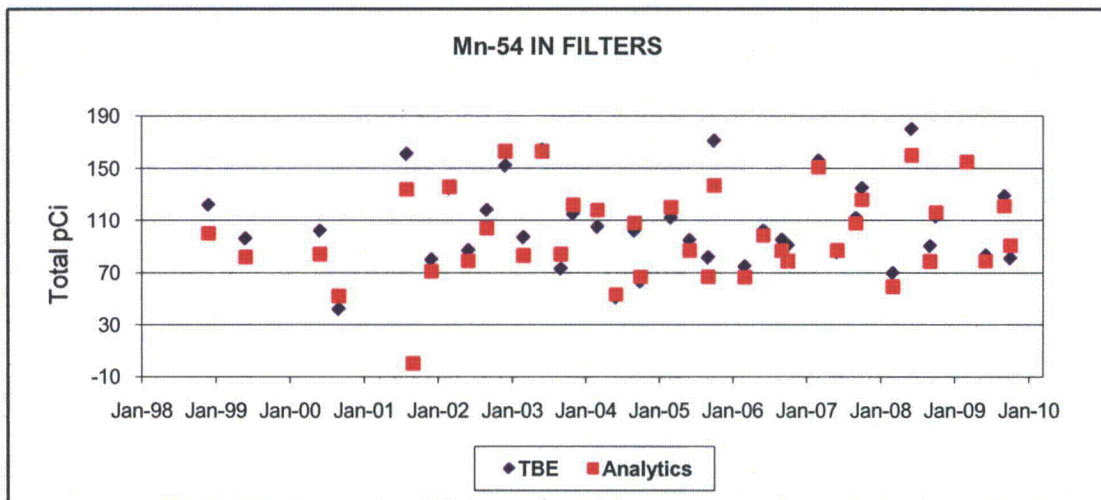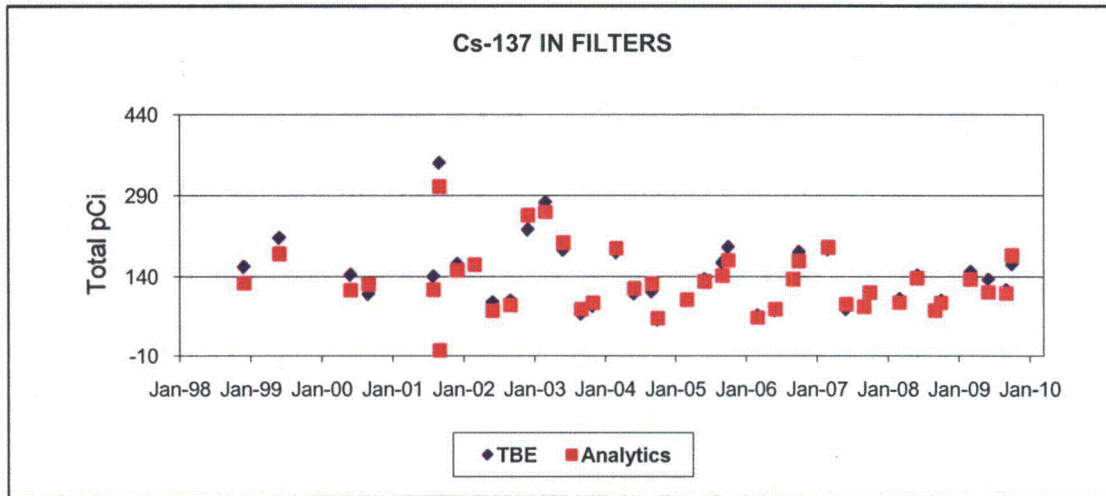


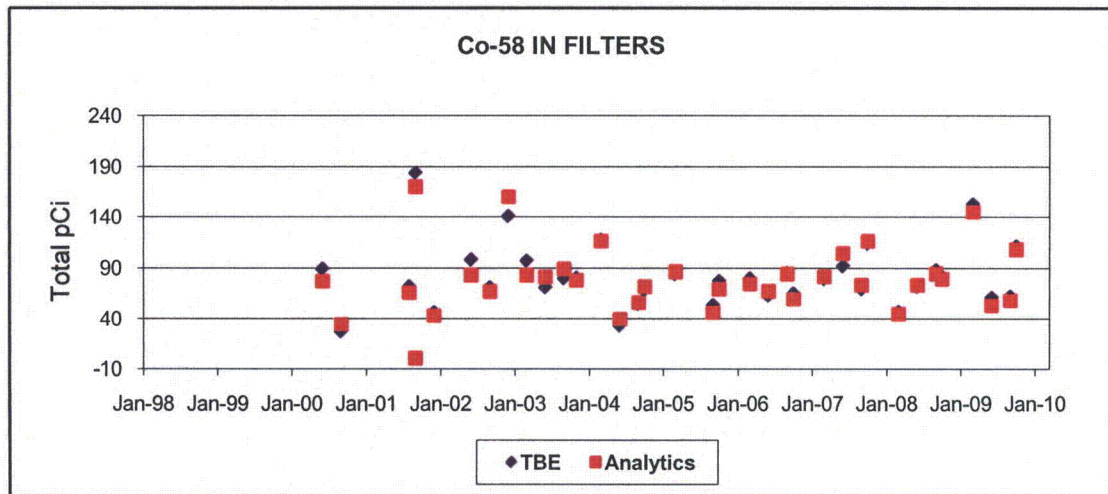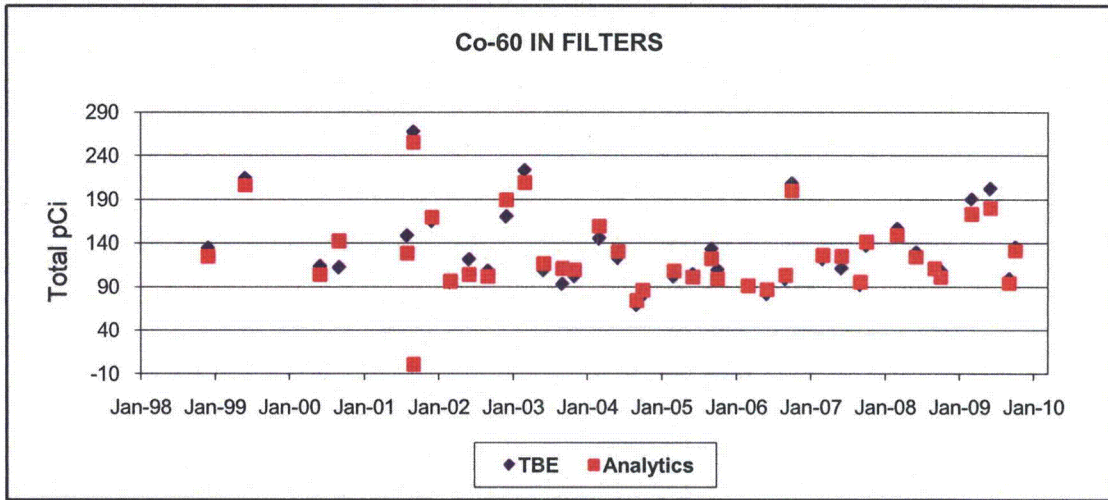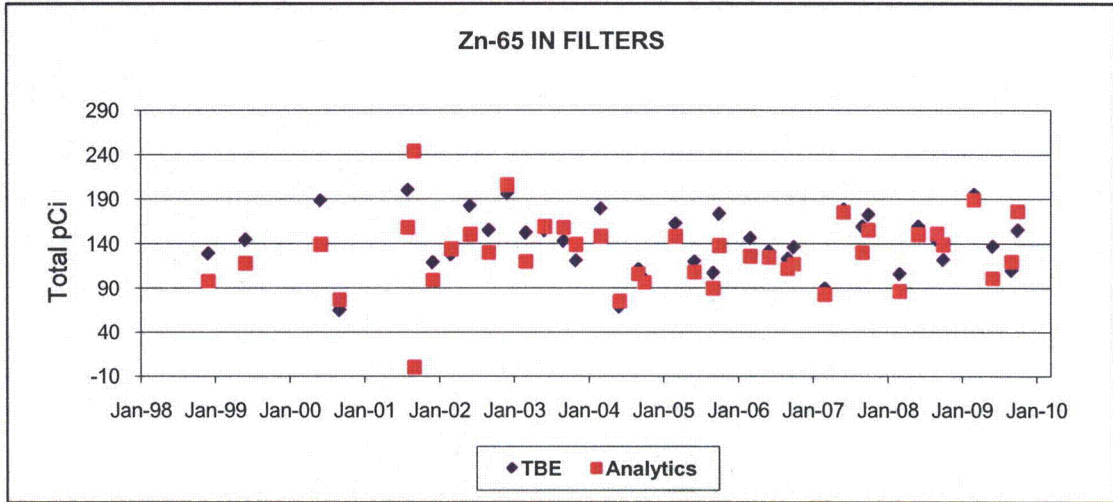

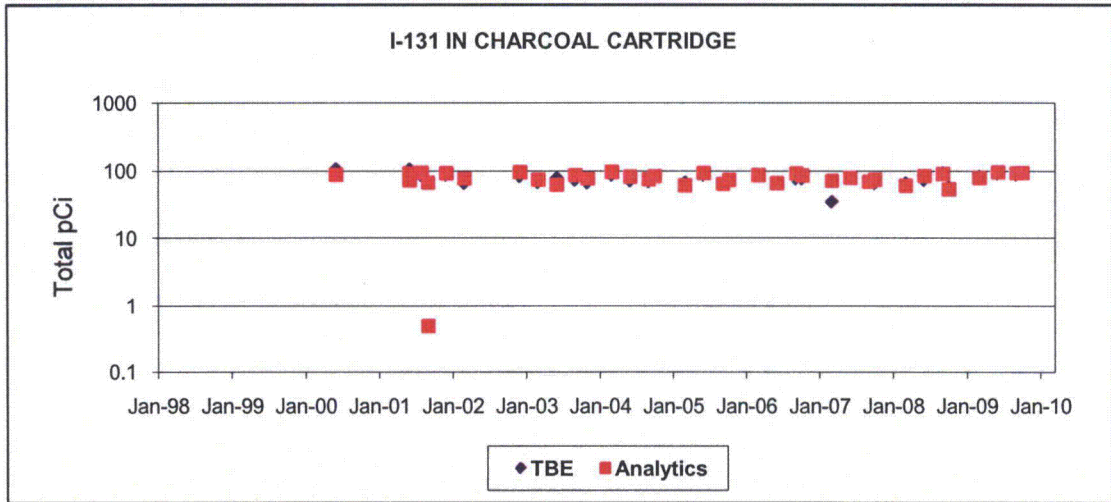


March 2007 - New analyst did not count face

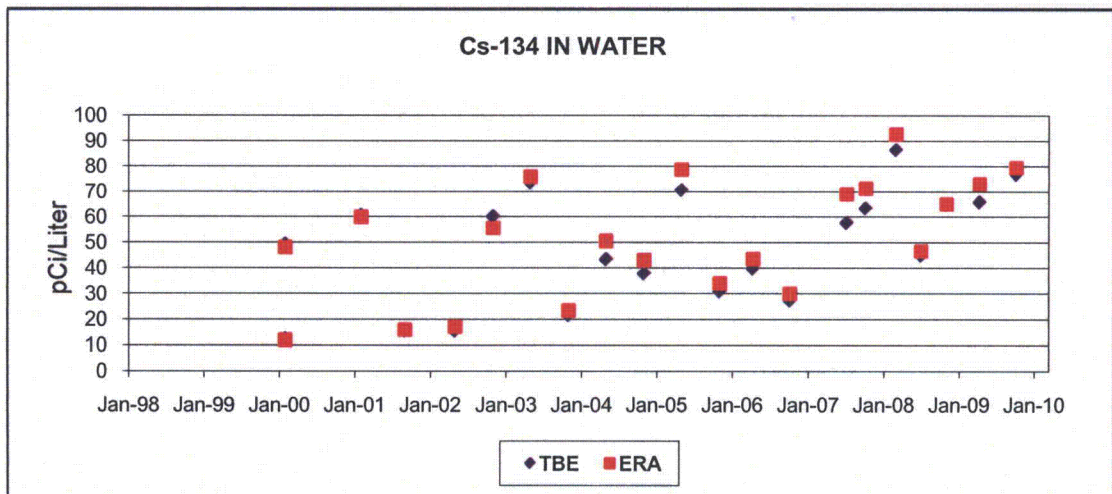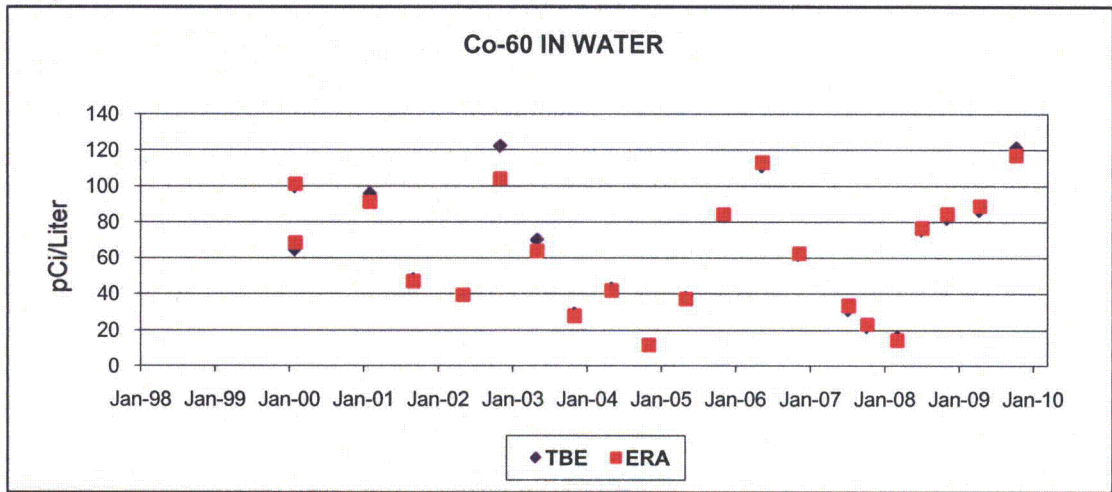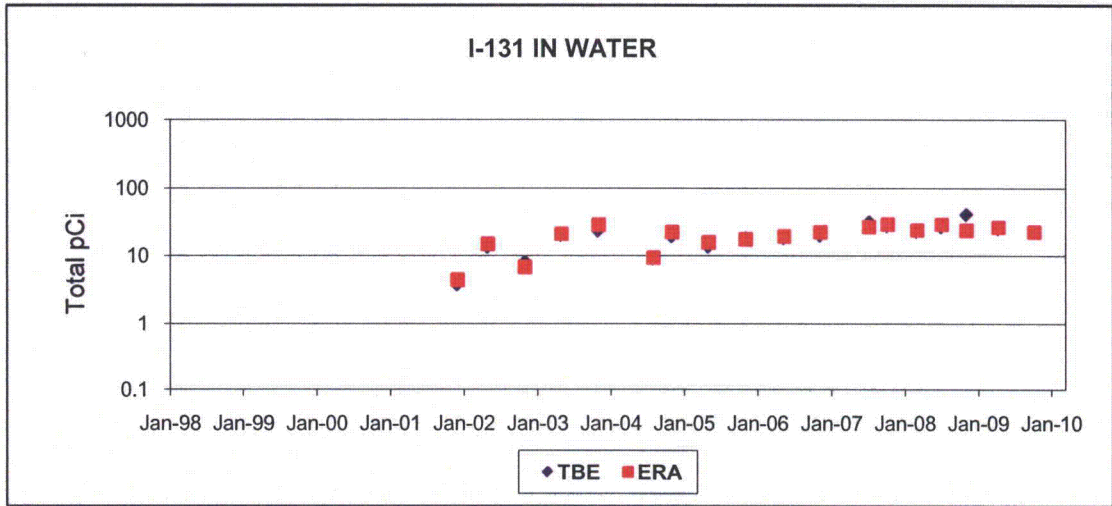




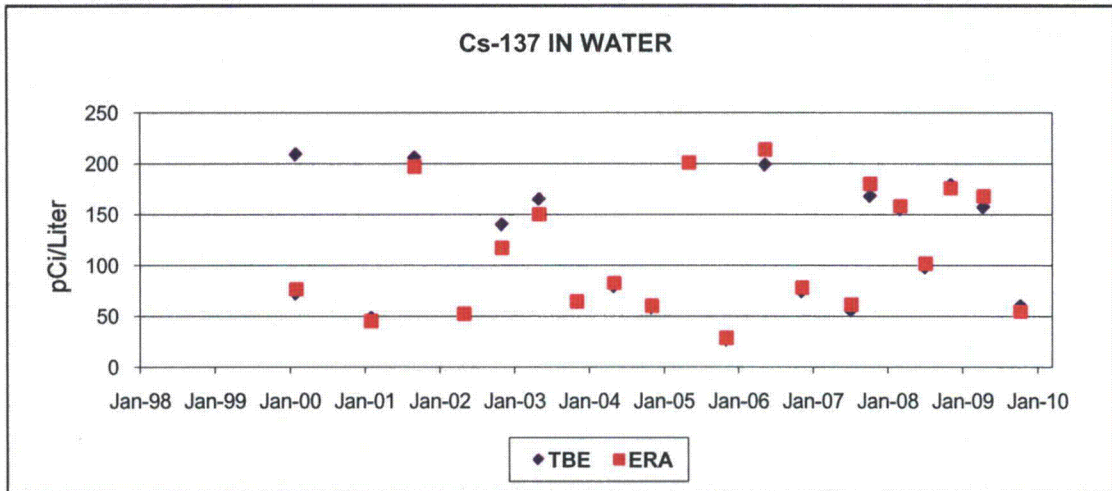


February 2001 - Analyst error or equipment failure.


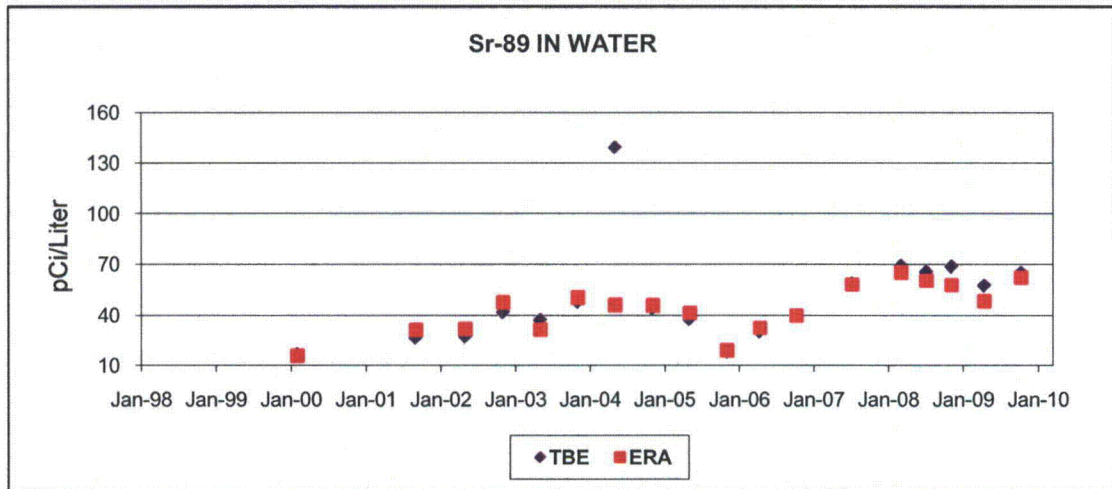


May 2004 - Counted without absorber.

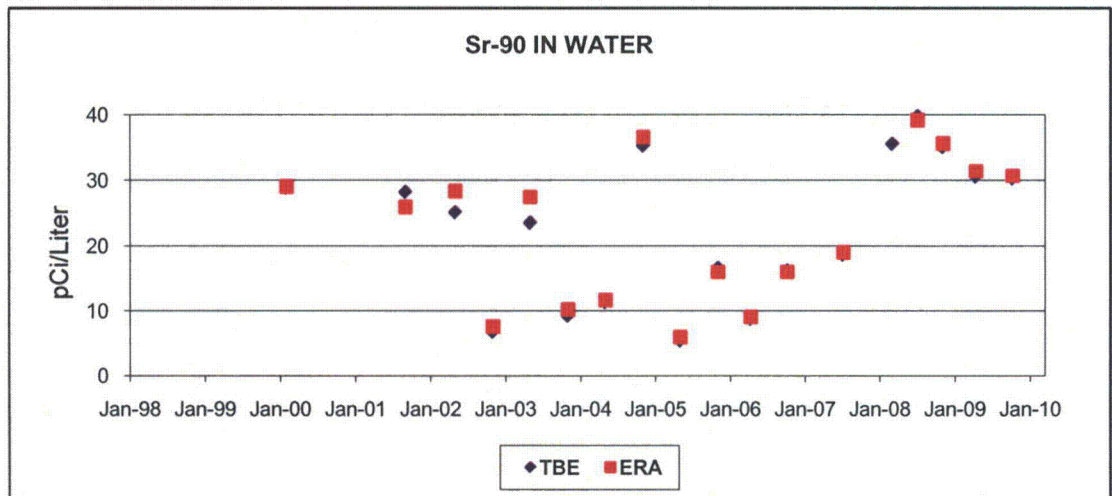

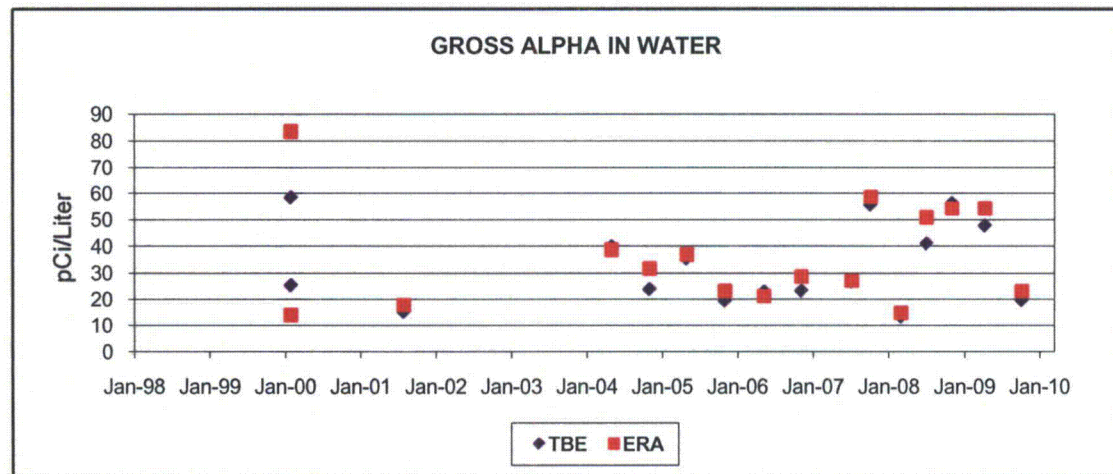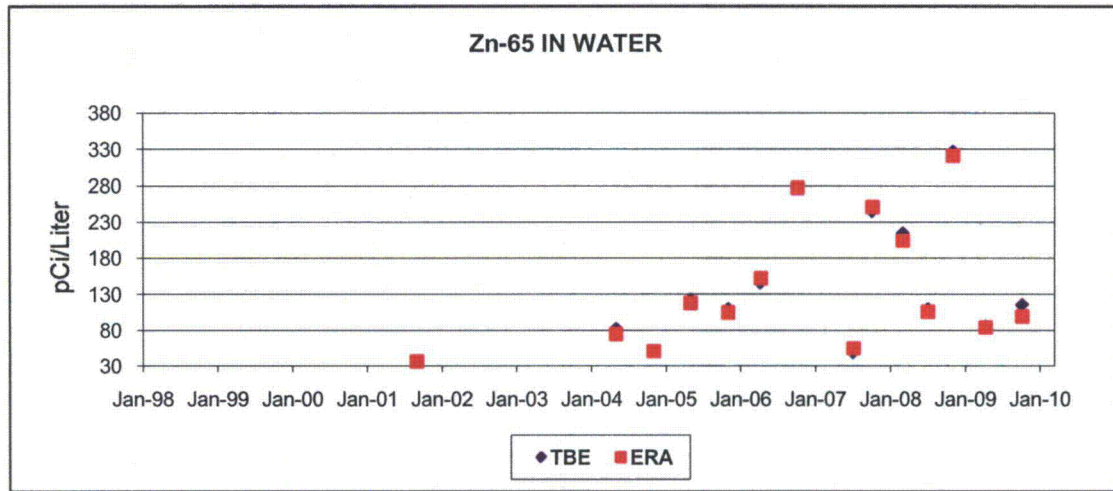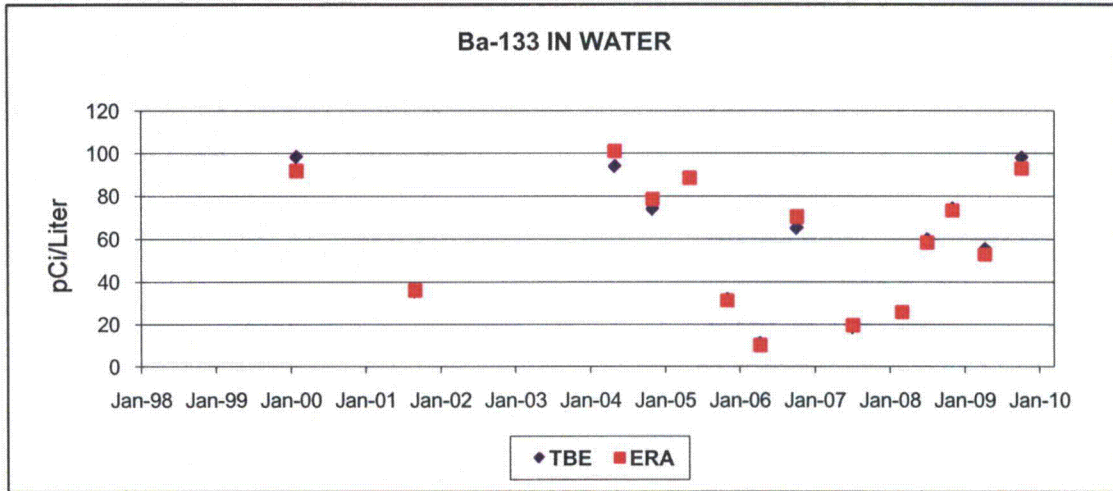

February 2000 - Analyst error or equipment failure.

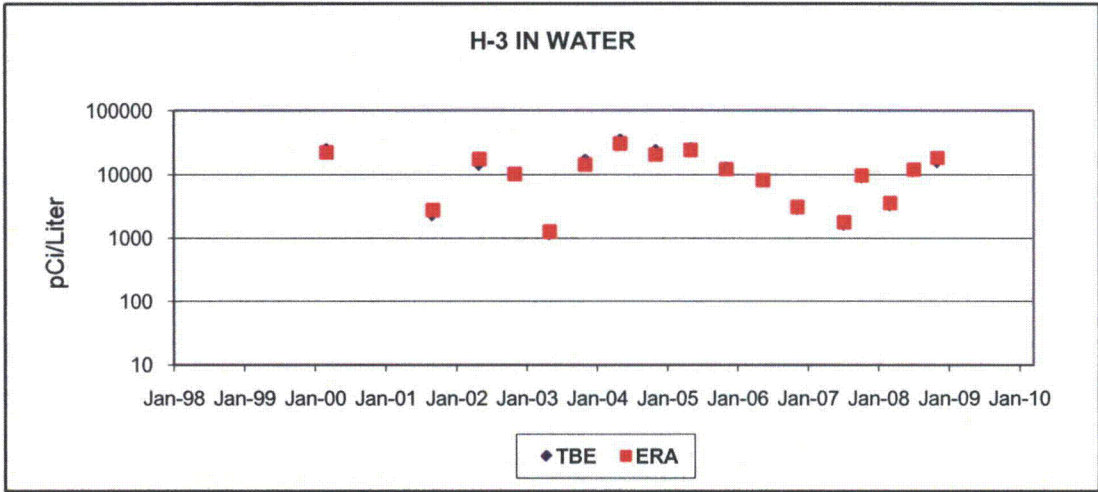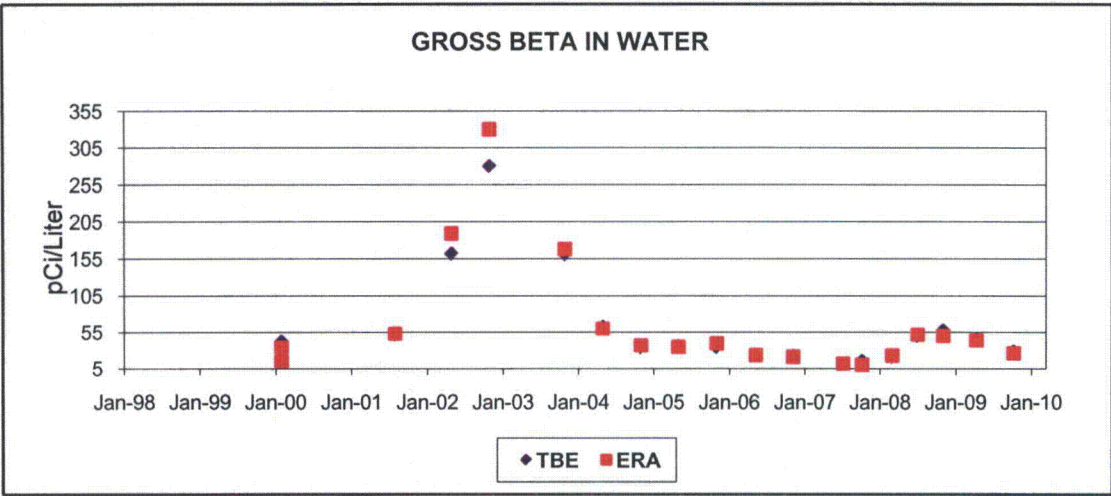

APPENDIX C
SYNOPSIS OF ANALYTICAL PROCEDURES

SYNOPSIS OF ANALYTICAL PROCEDURES

Appendix C is a synopsis of the analytical procedures performed during 2009 on samples collected for the Nebraska Public Power Nuclear Plant's Radiological Environmental Monitoring Program. All analyses have been mutually agreed upon by Nebraska Public Power District and Teledyne Brown Engineering and include those recommended by the USNRC Branch Technical Position, Rev. 1, November 1979.

<u>ANALYSIS TITLE</u>	<u>PAGE</u>
Gross Beta Analysis of Air Particulate Samples.....	C-3
Air Particulates.....	C-3
Determination of Gross Beta Activity in Water Samples.....	C-4
Introduction.....	C-4
Detection Capabilities.....	C-4
Analysis of Samples for Tritium (Liquid Scintillation).....	C-5
Water.....	C-5
Analysis of Samples for Iodine-131	C-6
Milk or Water.....	C-6
Gamma Spectrometry of Samples	C-7
Milk or Water.....	C-7
Dried Solids other than Soils and Sediment	C-7
Fish	C-7
Soils and Sediments.....	C-7
Charcoal Cartridges (Air Iodine)	C-7
Airborne Particulates	C-8
Addendum to Gamma Spectrometry Procedure	C-9
Environmental Dosimetry.....	C-10
Lower Limit of Detection Formulas	C-11

GROSS BETA ANALYSIS OF AIR PARTICULATE SAMPLES

Air Particulates

After a delay of five or more days, allowing for the radon-222 and radon-220 (thoron) daughter products to decay, the filters are counted in a gas-flow proportional counter.

Calculations of the results, the two sigma error and the lower limit of detection (LLD):

$$\text{RESULT (pCi/m}^3\text{)} = ((S/T) - (B/t))/(2.22 V E)$$

$$\text{TWO SIGMA ERROR (pCi/m}^3\text{)} = 2((S/T)^2 + (B/t^2))^{1/2}/(2.22 V E)$$

$$\text{LLD (pCi/m}^3\text{)} = 4.66(B^{1/2})/(2.22 V E t)$$

where:

S	=	Gross counts of sample including blank
B	=	Counts of blank
E	=	Counting efficiency
T	=	Number of minutes sample was counted
t	=	Number of minutes blank was counted
V	=	Sample aliquot size (cubic meters)

DETERMINATION OF GROSS BETA ACTIVITY IN WATER SAMPLES

Introduction

The procedures described in this section are used to measure the overall radioactivity of water samples without identifying the radioactive species present. No chemical separation techniques are involved.

One liter of the sample is evaporated on a hot plate. A smaller volume may be used if the sample has a significant salt content as measured gravimetrically. If requested by the customer, the sample is filtered through No. 54 filter paper before evaporation, removing particles greater than 30 microns in size.

After evaporating to a small volume in a beaker, the sample is rinsed into a 2-inch diameter stainless steel planchette, which is stamped with a concentric ring pattern to distribute residue evenly. Final evaporation to dryness takes place under heat lamps.

Residue mass is determined by weighing the planchette before and after mounting the sample. The planchette is counted for beta activity on an automatic proportional counter. Results are calculated using empirical self-absorption curves which allow for the change in effective counting efficiency caused by the residue mass.

Detection Capability

Detection capability depends upon the sample volume actually represented on the planchette, the background and the efficiency of the counting instrument, and upon self-absorption of beta particles by the mounted sample. Because the radioactive species are not identified, no decay corrections are made and the reported activity refers to the counting time.

The minimum detectable level (MDL) for water samples is nominally 1.6 picoCuries per liter for gross beta at the 4.66 sigma level (1.0 pCi/L at the 2.83 sigma level), assuming that 1 liter of sample is used and that ½ gram of sample residue is mounted on the planchette. These figures are based upon a counting time of 50 minutes and upon representative values of counting efficiency and background of 0.2 and 1.2 cpm, respectively

The MDL becomes significantly lower as the mount weight decreases because of reduced self-absorption. At a zero mount weight, the 4.66 sigma MDL for gross beta is 0.9 picoCuries per liter. These values reflect a beta counting efficiency of 0.38.

ANALYSIS OF SAMPLES FOR TRITIUM
(Liquid Scintillation)

Water

Ten milliliters of water are mixed with 10 ml of a liquid scintillation "cocktail" and then the mixture is counted in an automatic liquid scintillator.

Calculation of the results, the two sigma error and the lower limit detection (LLD) in pCi/L:

$$\text{RESULT} = (N-B)/(2.22 V E)$$

$$\text{TWO SIGMA ERROR} = 2((N + B)/\Delta t)^{1/2} / (2.22 V E)$$

$$\text{LLD} = 4.66(B/\Delta t)^{1/2} / (2.22 V E)$$

where:

N	=	the gross cpm of the sample
B	=	the background of the detector in cpm
2.22	=	conversion factor changing dpm to pCi
V	=	volume of the sample in ml
E	=	efficiency of the detector
Δt	=	counting time for the sample

ANALYSIS OF SAMPLES FOR IODINE-131

Milk or Water

Two or more liters of sample are first equilibrated with stable iodide carrier. A batch treatment with anion exchange resin is used to remove iodine from the sample. The iodine is then stripped from the resin with sodium hypochlorite solution, is reduced with hydroxylamine hydrochloride and is extracted into carbon tetrachloride as free iodine. It is then back-extracted as iodide into sodium bisulfite solution and is precipitated as palladium iodide. The precipitate is weighed for chemical yield and is mounted on a nylon planchette for low-level beta counting.

Calculations of results, two sigma error and the lower limit of detection (LLD) in pCi/L:

RESULT	=	$(N/\Delta t - B)/(2.22 E V Y DF)$
TWO SIGMA ERROR	=	$2((N/\Delta t + B)/\Delta t)^{1/2}/(2.22 E V Y DF)$
LLD	=	$4.66(B/\Delta t)^{1/2}/(2.22 E V Y DF)$

where:	N	=	total counts from sample (counts)
	Δt	=	counting time for sample (min)
	B	=	background rate of counter (cpm)
	2.22	=	dpm/pCi
	V	=	volume or weight of sample analyzed
	Y	=	chemical yield of the mount or sample counted
	DF	=	decay factor from the collection to the counting date
	E	=	efficiency of the counter for I-131, corrected for self absorption effects by the formula
	E	=	$E_s(\exp-0.0061M)/(\exp-0.0061M_s)$
	E_s	=	efficiency of the counter determined from an I-131 standard mount
	M_s	=	mass of PdI_2 on the standard mount, mg
	M	=	mass of PdI_2 on the sample mount, mg

GAMMA SPECTROMETRY OF SAMPLES

Milk or Water

A 1.0 liter Marinelli beaker is filled with a representative aliquot of the sample. The sample is then counted for approximately 1000 minutes with a shielded high purity germanium (HPGe) detector coupled to a VAX-based data acquisition system, which performs pulse height analysis.

Dried Solids other than Soils and Sediments

A large quantity of the sample is dried at a low temperature, less than 100°C. As much as possible (up to the total sample) is loaded into a tared 1-liter Marinelli and weighed. The sample is then counted for approximately 1000 minutes with a shielded HPGe detector coupled to a VAX-based data acquisition system, which performs pulse height analysis.

Fish

As much as possible (up to the total sample) of the edible portion of the sample is loaded into a tared Marinelli and weighed. The sample is then counted for approximately 1000 minutes with a shielded HPGe detector coupled to a VAX-based data acquisition system, which performs pulse height analysis.

Soils and Sediments

Soils and sediments are dried at a low temperature, less than 100°C. The soil or sediment is loaded fully into a tared, standard 300 cc container and weighed. The sample is then counted for approximately six hours with a shielded HPGe detector coupled to a VAX-based data acquisition system, which performs pulse height and analysis.

Charcoal Cartridges (Air Iodine)

Charcoal cartridges are counted up to five at a time, with one positioned on the face of an HPGe detector and up to four on the side of the HPGe detector. Each HPGe detector is calibrated for both positions. The detection limit for I-131 of each charcoal cartridge can be determined (assuming no positive I-131) uniquely from the volume of air, which passed through it. In the event I-131 is observed in the initial counting of a set, each charcoal cartridge is then counted separately, positioned on the face of the detector.

Air Particulates

The thirteen airborne particulate filters for a quarterly composite for each field station are aligned one in front of another and then counted for at least six hours with a shielded HPGe detector coupled to a VAX-based data acquisition system which performs pulse height analysis.

A VAX software program defines peaks by certain changes in the slope of the spectrum. The program also compares the energy of each peak with a library of peaks for isotope identification and then performs the radioactivity calculation using the appropriate fractional gamma ray abundance, half-life, detector efficiency, and net counts in the peak region.

The calculation of results, two sigma error and the lower limit of detection (LLD) in pCi/volume or pCi/mass:

$$\text{RESULT} = (S-B)/(2.22 t E V F DF)$$

$$\text{TWO SIGMA ERROR} = 2(S+B)^{1/2}/(2.22 t E V F DF)$$

$$\text{LLD} = 4.66(B)^{1/2}/(2.22 t E V F DF)$$

where:

S	=	Area, in counts, of sample peak and background (region of spectrum of interest)
B	=	Background area, in counts, under sample peak, determined by a linear interpolation of the representative backgrounds on either side of the peak
t	=	length of time in minutes the sample was counted
2.22	=	dpm/pCi
E	=	detector efficiency for energy of interest and geometry of sample
V	=	sample aliquot size (liters, cubic meters, kilograms, or grams)
F	=	fractional gamma abundance (specific for each emitted gamma)
DF	=	decay factor from the mid-collection date to the counting date

ADDENDUM TO GAMMA SPECTROMETRY PROCEDURE

Ba-140 (half-life = ~12.8d) decays to La-140 (half-life ~40 hrs) and the daughter radionuclide, La-140 approaches ~ 90 % of the Ba-140 activity within ~ 6 days. The La-140 photon energy at 1596 keV is used to quantify the Ba-140 activity due to its high photon emission probability yield (96%) producing a higher count rate when present and therefore, a smaller associated counting error.

Zr-95 (half-life = ~65d) decays to Nb-95 (half-life = ~35d). The photon energy of Nb-95 (~765 keV) is used to quantify Zr-95 because of the high photon emission probability yield (~100%) yielding a higher count rate and an associated lower counting error. The daughter radionuclide, Nb-95 approaches the Zr-95 activity after a time period of ~65 days, an estimated time interval occurring between sample exposure, collection and shipping, and analysis.

ENVIRONMENTAL DOSIMETRY

Environmental Dosimetry services are provided by Global Dosimetry Solutions, Inc. (GDS). GDS uses a thermoluminescent dosimeter (TLD) manufactured by Panasonic, Inc. Panasonic identifies it as an UD-814A1 TLD. The TLD has four elements, numbered 1-4. Elements and their filtration are composed of:

ELEMENT	MATERIAL	FILTRATION
1	${}^6\text{Li}_2{}^7\text{B}_4\text{O}_7\text{-Cu}$	Thin plastic
2	$\text{CaSO}_4\text{-Tm}$	Lead
3	$\text{CaSO}_4\text{-Tm}$	Lead
4	$\text{CaSO}_4\text{-Tm}$	Lead

This material has a high light output, negligible thermally induced signal loss (fading) and negligible self-dosing. The energy response curve (as well as other features) satisfies NRC Regulatory Guide 4.13. Transit doses are accounted for by use of separate TLDs.

Prior to being sent to Cooper Nuclear Station, the GDS badges are exposed to Cs-137, to known a dose and read in the Panasonic UD-710 reader, with reference badges to establish an element response level for each badge. Badges are then re-annealed for assignment and distribution to Cooper Nuclear Station.

Following the field exposure the badges are returned to GDS for processing in a Panasonic UD-710 reader. Each element is heated and the measured light emission is recorded. The transit controls are read in the same manner. Total exposure for each badge is the average of Elements 2, 3, and 4.

Transit Controls are calculated using the following equation:

$$\text{TRANSDOSE} = \frac{(E_{3_1} + E_{4_1} + E_{3_2} + E_{4_2})}{4} - \frac{(E_{3_{\text{trans}}} + E_{4_{\text{trans}}})}{2}$$

LOWER LIMIT of DETECTION FORMULAS

The LLD formulas in Appendix C are consistent with the LLD discussion in the ODAM. The term s_b in the ODAM equals $\sqrt{B/t}$ by Poisson statistics, where B = blank counts and t = blank counting intervals. The decay factor term $e^{-\lambda\Delta t}$ in the ODAM is the same as the DF terms in Appendix C, but does not appear in certain analyses such as gross beta because decay does not apply. In the tritium analysis, decay is not considered because of the relatively long half-life.

Efficiencies and volumes are consistent between the two documents. Chemical yields appear in Appendix C where applicable but do not apply to other analyses such as tritium and gross beta.

APPENDIX D
DETECTION LIMITS AND REPORTING LEVELS

NEBRASKA PUBLIC POWER - COOPER NUCLEAR STATION
DETECTION LIMITS AND REPORTING LEVELS

Isotope	ODAM LLD	NRC Rept. Level
<u>Water - pCi/liter</u>		
Gross beta	4	N/A
H-3	2000	20000 ^(a) /30000 ^(b)
Mn-54	15	1000
Fe-59	30	400
Co-58	15	1000
Co-60	15	300
Zn-65	30	300
Zr-95	30	400
Nb-95	15	400
I-131	1 ^(c)	2
Cs-134	15	30
Cs-137	18	50
Ba-140	60	200
La-140	15	200
<u>Air Filter - pCi/m³</u>		
Gross Beta	0.01	N/A
I-131	0.07	0.9
Cs-134	0.05	10
Cs-137	0.06	20
<u>Fish - pCi/kg-wet</u>		
Mn-54	130	30000
Fe-59	260	10000
Co-58	130	30000
Co-60	130	10000
Zn-65	260	20000
Cs-134	130	1000
Cs-137	150	2000
<u>Milk - pCi/liter</u>		
I-131	1	3
Cs-134	15	60
Cs-137	18	70
Ba-140	60	300
La-140	15	300

(a) For drinking water samples

(b) For samples of water not used as a source of drinking water

(c) LLD for drinking water

NEBRASKA PUBLIC POWER - COOPER NUCLEAR STATION
DETECTION LIMITS AND REPORTING LEVELS

<u>Isotope</u>	<u>ODAM LLD</u>	<u>NRC Rept. Level</u>
<u>Vegetation - pCi/kg-wet</u>		
I-131	60	100
Cs-134	60	1000
Cs-137	80	2000
<u>Sediment - pCi/kg-dry</u>		
Cs-134	150	N/A
Cs-137	180	N/A

APPENDIX E
REMP SAMPLING AND ANALYTICAL EXCEPTIONS

EXCEPTIONS

Appendix E contains the exceptions to the 2009 REMP Program. Where possible, causes of the deviation have been corrected to prevent recurrence.

Any deviations from the sampling schedule are documented on the data tables. Data Tables are in Section VII.

Exceptions for Scheduled REMP Sampling and Analysis During 2009, NPPD Cooper Nuclear Station

Air Station 9 experienced pump failure. Replaced pump. Week end 04/07/09

Air Station 3 rotometer was found reading low. Replaced pump. Week end 05/05/09

Air Station 2 rotometer was found reading low. Replaced pump. 06/30/09

Air Station 8 sample was unavailable due to the weather. 11/17/09

Air Station 8 sample was not taken. 12/29/09

Vegetation Station 28 no broadleaf vegetation was available. 2009

Vegetation Station 35 no broadleaf vegetation was available. 05/27/09, 09/29/09 and 10/27/09

Vegetation Station 96 no broadleaf vegetation was available. 05/27/09, 06/11/09, 09/29/09 and 10/27/09

Vegetation Station 101 no broadleaf vegetation was available. 05/27/09, 09/29/09 and 10/27/09

TLD station 87 was lost due to farmer "incident". First quarter 2009

APPENDIX F
SUMMARY OF DOSES TO A MEMBER OF THE PUBLIC OFFSITE

LIQUID EFFLUENT DOSE CALCULATIONS

Doses to the maximum individual and 0 to 50 - mile population resulting from the release of radioactive material in liquid effluents from Cooper Nuclear Station were calculated using the LADTAP II computer program. The LADTAP II program implements the radiological dose models of Regulatory Guide 1.109 for determining the radiation exposure to man from three principal exposure pathways in the aquatic environment -- potable water, aquatic foods, and recreational water use. Doses to both the maximum individual and 0 to 50 mile population are calculated as a function of age group and pathway for significant body organs, and are presented in Tables 1 - 6.

Assumptions and data sources used for input to the LADTAP II code are described in a separate section of this appendix (see page F-52).

TABLE 1. Doses to Maximum Individual at the Site Boundary, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, January-June 2009 Cooper Nuclear Station

Period and Pathway	Dose to Individual, mrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>1st Quarter</u>								
Drinking Water		0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
Shoreline	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
Totals	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
<u>2nd Quarter</u>								
Eating Fish		0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
Drinking Water		0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
Shoreline	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
Totals	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00
Totals for 1st & 2nd Quarters	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00	0.00 E-00

Calculated doses are based on the following periods of exposures: Fishing: April - November; Drinking water and shoreline: January - December

TABLE 2. Doses to Maximum Individual at the Site Boundary, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, July-December 2009, Cooper Nuclear Station

Period and Pathway	Dose to Individual, mrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>3rd Quarter</u>								
Eating Fish		1.80 E-03	4.34 E-04	4.82 E-04	2.87 E-04	3.16 E-04	2.87 E-04	6.39 E-04
Drinking Water		4.43 E-03	2.36 E-02	2.38 E-02	2.36 E-02	2.36 E-02	2.36 E-02	2.41 E-02
Shoreline	2.34 E-04	1.99 E-04	1.99 E-04	1.99 E-04	1.99 E-04	1.99 E-04	1.99 E-04	1.99 E-04
Totals	2.34 E-04	6.43 E-03	2.43 E-02	2.45 E-02	2.40 E-02	2.41 E-02	2.40 E-02	2.49+E-02
<u>4th Quarter</u>								
Eating Fish		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 3rd & 4th Quarters	2.34 E-04	6.43 E-03	2.43 E-02	2.45 E-02	2.40 E-02	2.41 E-02	2.40 E-02	2.49 E-02

Calculated doses are based on the following periods of exposures: Fishing: April - November; Drinking water and shoreline: January - December

TABLE 3. Summary of Doses to Maximum Individual at the Site Boundary, Resulting from Exposure to Radioactivity Discharged in Liquid Effluents, January-December 2009, Cooper Nuclear Station

Period and Pathway	Dose to Individual, mrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
1st Quarter	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
2nd Quarter	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
3rd Quarter	2.34 E-04	6.43 E-03	2.43 E-02	2.45 E-02	2.40 E-02	2.41 E-02	2.40 E-02	2.49 E-02
4th Quarter	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 2009	2.34 E-04	6.43 E-03	2.43 E-02	2.45 E-02	2.40 E-02	2.41 E-02	2.40 E-02	2.49 E-02

TABLE 4. Doses to Population Within a 50-Mile Radius, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, January-June 2009, Cooper Nuclear Station

Period and Pathway	Dose to Population, manrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>1st Quarter</u>								
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>2nd Quarter</u>								
Eating Fish		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Swimming	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Boating	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 1st & 2nd Quarters	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00

Calculated doses are based on the following periods of exposures: Fishing and Boating: April - November; Drinking water and shoreline: January - December; Swimming: June - September
Exposure from drinking water is calculated for the city of St. Joseph, Missouri, nearest public water intake from the Missouri River, 84 miles downstream

TABLE 5. Doses to Population Within a 50-Mile Radius, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, July-December 2009, Cooper Nuclear Station

Period and Pathway	Dose to Population, manrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>3rd Quarter</u>								
Eating Fish		1.32 E-04	4.25 E-05	4.30 E-05	2.97 E-05	3.23 E-05	2.97 E-05	1.18 E-04
Drinking Water		3.070E-03	2.19 E-02	2.20 E-02	2.18 E-02	2.18 E-02	2.18 E-02	2.28 E-02
Shoreline	3.31 E-04	0.00 E+00	0.00 E+00	2.82 E-04	2.82 E-04	0.00 E+00	0.00 E+00	0.00 E+00
Swimming	0.00 E+00	0.00 E+00	0.00 E+00	1.71 E-06	1.71 E-06	0.00 E+00	0.00 E+00	0.00 E+00
Boating	0.00 E+00	0.00 E+00	0.00 E+00	6.26 E-06	6.26 E-06	0.00 E+00	0.00 E+00	0.00 E+00
Totals	3.31 E-04	3.20 E-03	2.19 E-02	2.23 E-02	2.21 E-02	2.18 E-02	2.18 E-02	2.29 E-02
<u>4th Quarter</u>								
Eating Fish		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 3rd & 4th Quarters	3.31 E-04	3.20 E-03	2.19 E-02	2.23 E-02	2.21 E-02	2.18 E-02	2.18 E-02	2.29 E-02

Calculated doses are based on the following periods of exposures: Fishing and Boating: April - November; Drinking water and shoreline: January - December; Swimming: June - September
 Exposure from drinking water is calculated for the city of St. Joseph, Missouri, nearest public water intake from the Missouri River, 84 miles downstream

TABLE 6. Summary of Doses to Population Within a 50-Mile Radius, Resulting from Exposure to Radioactivity Discharged in Liquid Effluents, January-December 2009 Cooper Nuclear Station

Period and Pathway	Dose to Population, manrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>1st Quarter</u>	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>2nd Quarter</u>	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>3rd Quarter</u>	3.31 E-04	3.20 E-03	2.19 E-02	2.23 E-02	2.21 E-02	2.18 E-02	2.18 E-02	2.29 E-02
<u>4th Quarter</u>	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 2009	3.31 E-04	3.20 E-03	2.19 E-02	2.23 E-02	2.21 E-02	2.18 E-02	2.18 E-02	2.29 E-02

GASEOUS EFFLUENT DOSE CALCULATIONS

Doses to the maximum individual and 0 to 50 mile population resulting from the release of radioactive material in gaseous effluents from the Cooper Nuclear Station were calculated using the GASPARG computer code. Four sites were selected for individual dose calculations: the site boundary, the nearest residence, the nearest garden and the nearest cow. GASPARG implements the radiological dose models of Regulatory Guide 1.109 for determining the radiation exposure to man from four principal atmospheric exposure pathways: plume, ground, inhalation, and ingestion. Doses to the maximum individual and the population are calculated as a function of age group and pathway for significant body organs.

Tables 1 through 7 present maximum individual doses. Population doses are given in Tables 8 through 14.

Assumptions and data used for input to the GASPARG code are described in a separate section of this appendix (see page F-52).

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2009

SPECIAL LOCATION NO. 1 - A Site Boundary
 AT .69 MILES NNW

ANNUAL BETA AIR DOSE = 1.12E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 8.11E-04 MILLRADS

PATHWAY	T. BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.28E-04	5.28E-04	5.28E-04	5.28E-04	5.28E-04	5.28E-04	5.39E-04	1.32E-03
GROUND	7.76E-04	7.76E-04	7.76E-04	7.76E-04	7.76E-04	7.76E-04	7.76E-04	9.13E-04
VEGET								
ADULT	2.62E-05	1.39E-04	2.32E-04	1.97E-05	2.46E-05	4.69E-03	1.74E-17	0.00E+00
TEEN	4.05E-05	1.54E-04	3.84E-04	3.00E-05	3.74E-05	6.33E-03	1.96E-17	0.00E+00
CHILD	8.33E-05	1.07E-04	9.37E-04	4.94E-05	6.03E-05	1.21E-02	2.34E-17	0.00E+00
MEAT								
ADULT	3.42E-06	2.72E-05	2.42E-06	1.81E-06	6.63E-07	1.27E-04	0.00E+00	0.00E+00
TEEN	2.71E-06	1.47E-05	2.04E-06	1.42E-06	5.42E-07	9.17E-05	0.00E+00	0.00E+00
CHILD	4.20E-06	7.43E-06	3.86E-06	1.73E-06	6.88E-07	1.38E-04	0.00E+00	0.00E+00
COW MILK								
ADULT	7.10E-06	1.03E-05	1.78E-05	1.10E-05	1.83E-05	3.50E-03	2.61E-23	0.00E+00
TEEN	1.19E-05	1.29E-05	3.27E-05	1.95E-05	3.27E-05	5.53E-03	5.78E-23	0.00E+00
CHILD	2.25E-05	9.33E-06	8.01E-05	3.39E-05	5.43E-05	1.09E-02	9.20E-23	0.00E+00
INFANT	4.21E-05	8.74E-06	1.58E-04	8.26E-05	9.45E-05	2.65E-02	2.51E-22	0.00E+00
GOATMILK								
ADULT	8.05E-06	7.60E-06	3.07E-05	1.29E-05	2.20E-05	4.20E-03	3.13E-24	0.00E+00
TEEN	1.35E-05	1.01E-05	5.64E-05	2.28E-05	3.92E-05	6.64E-03	6.94E-24	0.00E+00
CHILD	2.57E-05	7.95E-06	1.39E-04	3.98E-05	6.52E-05	1.31E-02	1.10E-23	0.00E+00
INFANT	4.85E-05	7.86E-06	2.71E-04	9.73E-05	1.13E-04	3.19E-02	3.01E-23	0.00E+00
INHAL								
ADULT	5.44E-07	3.81E-06	1.46E-06	8.31E-07	1.29E-06	2.40E-04	4.78E-05	0.00E+00
TEEN	7.11E-07	7.62E-06	2.07E-06	1.14E-06	1.76E-06	2.95E-04	7.17E-05	0.00E+00
CHILD	7.67E-07	4.19E-05	2.84E-06	1.10E-06	1.65E-06	3.30E-04	5.91E-05	0.00E+00
INFANT	5.18E-07	3.63E-05	2.01E-06	9.90E-07	1.09E-06	3.01E-04	4.13E-05	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2009 (Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 1.49E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.00E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	6.49E-04	6.49E-04	6.49E-04	6.49E-04	6.49E-04	6.49E-04	6.63E-04	1.67E-03
GROUND	9.44E-04	9.44E-04	9.44E-04	9.44E-04	9.44E-04	9.44E-04	9.44E-04	1.11E-03
VEGET								
ADULT	3.18E-05	1.69E-04	2.82E-04	2.38E-05	2.96E-05	5.65E-03	2.11E-17	0.00E+00
TEEN	4.91E-05	1.87E-04	4.67E-04	3.62E-05	4.51E-05	7.63E-03	2.38E-17	0.00E+00
CHILD	1.01E-04	1.31E-04	1.14E-03	5.97E-05	7.27E-05	1.46E-02	2.84E-17	0.00E+00
MEAT								
ADULT	4.16E-06	3.31E-05	2.95E-06	2.20E-06	7.99E-07	1.53E-04	0.00E+00	0.00E+00
TEEN	3.29E-06	1.78E-05	2.48E-06	1.72E-06	6.53E-07	1.11E-04	0.00E+00	0.00E+00
CHILD	5.11E-06	9.05E-06	4.69E-06	2.10E-06	8.29E-07	1.67E-04	0.00E+00	0.00E+00
COW MILK								
ADULT	8.57E-06	1.25E-05	2.16E-05	1.33E-05	2.21E-05	4.22E-03	3.17E-23	0.00E+00
TEEN	1.44E-05	1.57E-05	3.96E-05	2.35E-05	3.94E-05	6.67E-03	7.03E-23	0.00E+00
CHILD	2.72E-05	1.13E-05	9.72E-05	4.09E-05	6.55E-05	1.32E-02	1.12E-22	0.00E+00
INFANT	5.08E-05	1.06E-05	1.92E-04	9.96E-05	1.14E-04	3.20E-02	3.05E-22	0.00E+00
GOATMILK								
ADULT	9.71E-06	9.21E-06	3.73E-05	1.55E-05	2.65E-05	5.06E-03	3.80E-24	0.00E+00
TEEN	1.63E-05	1.23E-05	6.84E-05	2.75E-05	4.73E-05	8.00E-03	8.44E-24	0.00E+00
CHILD	3.10E-05	9.64E-06	1.68E-04	4.80E-05	7.86E-05	1.58E-02	1.34E-23	0.00E+00
INFANT	5.86E-05	9.53E-06	3.29E-04	1.17E-04	1.37E-04	3.84E-02	3.66E-23	0.00E+00
INHAL								
ADULT	7.53E-07	5.27E-06	2.01E-06	1.15E-06	1.78E-06	3.32E-04	6.61E-05	0.00E+00
TEEN	9.85E-07	1.05E-05	2.86E-06	1.57E-06	2.44E-06	4.09E-04	9.91E-05	0.00E+00
CHILD	1.06E-06	5.79E-05	3.93E-06	1.53E-06	2.29E-06	4.57E-04	8.17E-05	0.00E+00
INFANT	7.17E-07	5.02E-05	2.78E-06	1.37E-06	1.51E-06	4.18E-04	5.71E-05	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2009 (Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.00E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.19E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	7.90E-04	7.90E-04	7.90E-04	7.90E-04	7.90E-04	7.90E-04	8.00E-04	1.65E-03
GROUND	3.89E-04	3.89E-04	3.89E-04	3.89E-04	3.89E-04	3.89E-04	3.89E-04	4.58E-04
VEGET								
ADULT	1.47E-05	7.03E-05	1.18E-04	1.26E-05	1.70E-05	3.25E-03	9.06E-18	0.00E+00
TEEN	2.25E-05	7.80E-05	1.95E-04	1.92E-05	2.59E-05	4.38E-03	1.02E-17	0.00E+00
CHILD	4.58E-05	5.44E-05	4.77E-04	3.18E-05	4.17E-05	8.39E-03	1.22E-17	0.00E+00
MEAT								
ADULT	1.76E-06	1.36E-05	1.27E-06	9.82E-07	4.59E-07	8.77E-05	0.00E+00	0.00E+00
TEEN	1.39E-06	7.36E-06	1.07E-06	7.72E-07	3.75E-07	6.35E-05	0.00E+00	0.00E+00
CHILD	2.15E-06	3.73E-06	2.01E-06	9.48E-07	4.76E-07	9.59E-05	0.00E+00	0.00E+00
COW MILK								
ADULT	4.73E-06	5.72E-06	1.04E-05	7.55E-06	1.27E-05	2.42E-03	1.36E-23	0.00E+00
TEEN	7.92E-06	7.19E-06	1.90E-05	1.34E-05	2.26E-05	3.83E-03	3.02E-23	0.00E+00
CHILD	1.49E-05	5.24E-06	4.64E-05	2.33E-05	3.76E-05	7.56E-03	4.80E-23	0.00E+00
INFANT	2.79E-05	4.93E-06	9.25E-05	5.68E-05	6.54E-05	1.84E-02	1.31E-22	0.00E+00
GOATMILK								
ADULT	5.43E-06	4.46E-06	1.71E-05	8.89E-06	1.52E-05	2.90E-03	1.63E-24	0.00E+00
TEEN	9.11E-06	5.95E-06	3.14E-05	1.58E-05	2.71E-05	4.59E-03	3.62E-24	0.00E+00
CHILD	1.72E-05	4.67E-06	7.71E-05	2.75E-05	4.51E-05	9.07E-03	5.76E-24	0.00E+00
INFANT	3.25E-05	4.60E-06	1.52E-04	6.73E-05	7.84E-05	2.20E-02	1.57E-23	0.00E+00
INHAL								
ADULT	2.22E-07	1.39E-06	5.58E-07	3.47E-07	5.38E-07	9.98E-05	1.73E-05	0.00E+00
TEEN	2.91E-07	2.79E-06	7.92E-07	4.75E-07	7.39E-07	1.23E-04	2.60E-05	0.00E+00
CHILD	3.13E-07	1.53E-05	1.09E-06	4.61E-07	6.93E-07	1.37E-04	2.14E-05	0.00E+00
INFANT	2.13E-07	1.33E-05	7.74E-07	4.15E-07	4.56E-07	1.25E-04	1.50E-05	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2009 (Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 4.83E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 7.13E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.78E-04	4.78E-04	4.78E-04	4.78E-04	4.78E-04	4.78E-04	4.83E-04	9.42E-04
GROUND	1.55E-05	1.55E-05	1.55E-05	1.55E-05	1.55E-05	1.55E-05	1.55E-05	1.82E-05
VEGET								
ADULT	6.99E-07	2.85E-06	4.83E-06	7.02E-07	1.02E-06	1.95E-04	1.59E-19	0.00E+00
TEEN	1.06E-06	3.16E-06	7.98E-06	1.07E-06	1.55E-06	2.63E-04	1.80E-19	0.00E+00
CHILD	2.11E-06	2.21E-06	1.95E-05	1.78E-06	2.50E-06	5.03E-04	2.15E-19	0.00E+00
MEAT								
ADULT	7.30E-08	5.44E-07	5.41E-08	4.44E-08	2.75E-08	5.26E-06	0.00E+00	0.00E+00
TEEN	5.76E-08	2.94E-07	4.55E-08	3.51E-08	2.25E-08	3.81E-06	0.00E+00	0.00E+00
CHILD	8.89E-08	1.49E-07	8.58E-08	4.36E-08	2.85E-08	5.75E-06	0.00E+00	0.00E+00
COW MILK								
ADULT	2.73E-07	2.67E-07	5.16E-07	4.49E-07	7.60E-07	1.45E-04	2.39E-25	0.00E+00
TEEN	4.57E-07	3.39E-07	9.42E-07	7.98E-07	1.36E-06	2.29E-04	5.31E-25	0.00E+00
CHILD	8.54E-07	2.50E-07	2.30E-06	1.39E-06	2.25E-06	4.53E-04	8.45E-25	0.00E+00
INFANT	1.60E-06	2.37E-07	4.64E-06	3.39E-06	3.92E-06	1.10E-03	2.30E-24	0.00E+00
GOATMILK								
ADULT	3.19E-07	2.25E-07	8.05E-07	5.33E-07	9.12E-07	1.74E-04	2.87E-26	0.00E+00
TEEN	5.33E-07	2.99E-07	1.47E-06	9.46E-07	1.63E-06	2.75E-04	6.37E-26	0.00E+00
CHILD	9.97E-07	2.35E-07	3.61E-06	1.65E-06	2.70E-06	5.44E-04	1.01E-25	0.00E+00
INFANT	1.89E-06	2.32E-07	7.17E-06	4.03E-06	4.70E-06	1.32E-03	2.76E-25	0.00E+00
INHAL								
ADULT	3.28E-08	1.11E-07	6.38E-08	5.46E-08	8.51E-08	1.54E-05	1.40E-06	0.00E+00
TEEN	4.29E-08	1.61E-07	9.04E-08	7.49E-08	1.17E-07	1.90E-05	2.09E-06	0.00E+00
CHILD	4.60E-08	5.86E-07	1.24E-07	7.30E-08	1.10E-07	2.11E-05	1.72E-06	0.00E+00
INFANT	3.21E-08	5.00E-07	9.06E-08	6.66E-08	7.21E-08	1.93E-05	1.18E-06	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
 AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 5.32E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 7.43E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.98E-04	4.98E-04	4.98E-04	4.98E-04	4.98E-04	4.98E-04	5.03E-04	9.94E-04
GROUND	5.78E-05	5.78E-05	5.78E-05	5.78E-05	5.78E-05	5.78E-05	5.78E-05	6.80E-05
VEGET								
ADULT	2.52E-06	1.06E-05	1.79E-05	2.46E-06	3.53E-06	6.75E-04	9.50E-19	0.00E+00
TEEN	3.82E-06	1.18E-05	2.96E-05	3.74E-06	5.38E-06	9.10E-04	1.07E-18	0.00E+00
CHILD	7.65E-06	8.21E-06	7.23E-05	6.23E-06	8.67E-06	1.74E-03	1.28E-18	0.00E+00
MEAT								
ADULT	2.70E-07	2.03E-06	1.99E-07	1.62E-07	9.54E-08	1.82E-05	0.00E+00	0.00E+00
TEEN	2.13E-07	1.10E-06	1.67E-07	1.27E-07	7.79E-08	1.32E-05	0.00E+00	0.00E+00
CHILD	3.29E-07	5.56E-07	3.16E-07	1.58E-07	9.90E-08	1.99E-05	0.00E+00	0.00E+00
COW MILK								
ADULT	9.53E-07	9.65E-07	1.84E-06	1.56E-06	2.63E-06	5.03E-04	1.43E-24	0.00E+00
TEEN	1.59E-06	1.22E-06	3.37E-06	2.77E-06	4.70E-06	7.96E-04	3.16E-24	0.00E+00
CHILD	2.98E-06	9.00E-07	8.24E-06	4.82E-06	7.81E-06	1.57E-03	5.04E-24	0.00E+00
INFANT	5.59E-06	8.52E-07	1.66E-05	1.18E-05	1.36E-05	3.82E-03	1.37E-23	0.00E+00
GOATMILK								
ADULT	1.11E-06	8.01E-07	2.91E-06	1.85E-06	3.16E-06	6.04E-04	1.71E-25	0.00E+00
TEEN	1.85E-06	1.07E-06	5.32E-06	3.28E-06	5.64E-06	9.55E-04	3.80E-25	0.00E+00
CHILD	3.47E-06	8.38E-07	1.31E-05	5.71E-06	9.37E-06	1.89E-03	6.04E-25	0.00E+00
INFANT	6.57E-06	8.26E-07	2.59E-05	1.40E-05	1.63E-05	4.58E-03	1.65E-24	0.00E+00
INHAL								
ADULT	5.89E-08	2.88E-07	1.34E-07	9.44E-08	1.47E-07	2.69E-05	3.67E-06	0.00E+00
TEEN	7.70E-08	4.85E-07	1.89E-07	1.29E-07	2.01E-07	3.31E-05	5.48E-06	0.00E+00
CHILD	8.28E-08	2.23E-06	2.60E-07	1.26E-07	1.89E-07	3.70E-05	4.51E-06	0.00E+00
INFANT	5.69E-08	1.92E-06	1.87E-07	1.14E-07	1.24E-07	3.38E-05	3.12E-06	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2009

SPECIAL LOCATION NO. 1 A Site Boundary
 AT .80 MILES S

ANNUAL BETA AIR DOSE = 6.34E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 5.66E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.75E-05	3.75E-05	3.75E-05	3.75E-05	3.75E-05	3.75E-05	3.81E-05	9.29E-05
GROUND	1.76E-03	1.76E-03	1.76E-03	1.76E-03	1.76E-03	1.76E-03	1.76E-03	2.07E-03
VEGET								
ADULT	3.06E-05	2.36E-04	6.59E-05	1.62E-05	7.18E-06	1.37E-03	2.47E-09	0.00E+00
TEEN	4.78E-05	2.53E-04	1.09E-04	2.47E-05	1.09E-05	1.85E-03	4.63E-09	0.00E+00
CHILD	9.66E-05	1.67E-04	2.66E-04	3.90E-05	1.76E-05	3.54E-03	7.04E-09	0.00E+00
MEAT								
ADULT	7.20E-06	6.07E-05	6.91E-07	3.34E-06	1.94E-07	3.69E-05	2.01E-10	0.00E+00
TEEN	5.70E-06	3.27E-05	5.82E-07	2.60E-06	1.58E-07	2.67E-05	1.91E-10	0.00E+00
CHILD	8.86E-06	1.65E-05	1.10E-06	3.10E-06	2.01E-07	4.04E-05	2.24E-10	0.00E+00
COW MILK								
ADULT	3.44E-06	1.45E-05	5.14E-06	3.86E-06	5.38E-06	1.02E-03	1.70E-09	0.00E+00
TEEN	5.83E-06	1.73E-05	9.41E-06	6.79E-06	9.60E-06	1.62E-03	3.52E-09	0.00E+00
CHILD	1.14E-05	1.17E-05	2.31E-05	1.16E-05	1.60E-05	3.20E-03	5.41E-09	0.00E+00
INFANT	2.01E-05	1.04E-05	4.57E-05	2.76E-05	2.78E-05	7.77E-03	9.79E-09	0.00E+00
GOATMILK								
ADULT	2.54E-06	3.59E-06	8.83E-06	3.89E-06	6.47E-06	1.23E-03	5.11E-09	0.00E+00
TEEN	4.25E-06	4.58E-06	1.62E-05	6.91E-06	1.15E-05	1.94E-03	1.06E-08	0.00E+00
CHILD	8.08E-06	3.39E-06	3.99E-05	1.20E-05	1.92E-05	3.84E-03	1.62E-08	0.00E+00
INFANT	1.51E-05	3.24E-06	7.79E-05	2.92E-05	3.33E-05	9.32E-03	2.94E-08	0.00E+00
INHAL								
ADULT	3.44E-07	5.08E-06	4.08E-07	4.11E-07	4.30E-07	7.43E-05	8.74E-05	0.00E+00
TEEN	4.56E-07	9.53E-06	5.79E-07	5.55E-07	5.91E-07	9.21E-05	1.29E-04	0.00E+00
CHILD	5.09E-07	5.13E-05	7.93E-07	5.21E-07	5.55E-07	1.04E-04	1.05E-04	0.00E+00
INFANT	3.02E-07	4.45E-05	5.68E-07	4.25E-07	3.65E-07	9.53E-05	6.95E-05	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 7.82E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 6.97E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.62E-05	4.62E-05	4.62E-05	4.62E-05	4.62E-05	4.62E-05	4.70E-05	1.14E-04
GROUND	2.21E-03	2.21E-03	2.21E-03	2.21E-03	2.21E-03	2.21E-03	2.21E-03	2.59E-03
VEGET								
ADULT	3.84E-05	2.96E-04	8.29E-05	2.03E-05	9.09E-06	1.73E-03	3.84E-09	0.00E+00
TEEN	6.00E-05	3.18E-04	1.37E-04	3.11E-05	1.38E-05	2.34E-03	7.20E-09	0.00E+00
CHILD	1.21E-04	2.10E-04	3.35E-04	4.91E-05	2.23E-05	4.48E-03	1.09E-08	0.00E+00
MEAT								
ADULT	9.04E-06	7.63E-05	8.70E-07	4.20E-06	2.45E-07	4.67E-05	3.13E-10	0.00E+00
TEEN	7.16E-06	4.11E-05	7.33E-07	3.26E-06	2.00E-07	3.38E-05	2.97E-10	0.00E+00
CHILD	1.11E-05	2.07E-05	1.38E-06	3.89E-06	2.55E-07	5.11E-05	3.48E-10	0.00E+00
COW MILK								
ADULT	4.34E-06	1.83E-05	6.49E-06	4.88E-06	6.81E-06	1.29E-03	2.65E-09	0.00E+00
TEEN	7.36E-06	2.18E-05	1.19E-05	8.59E-06	1.22E-05	2.05E-03	5.48E-09	0.00E+00
CHILD	1.43E-05	1.47E-05	2.91E-05	1.47E-05	2.02E-05	4.04E-03	8.42E-09	0.00E+00
INFANT	2.53E-05	1.31E-05	5.77E-05	3.49E-05	3.51E-05	9.83E-03	1.52E-08	0.00E+00
GOATMILK								
ADULT	3.22E-06	4.53E-06	1.11E-05	4.94E-06	8.19E-06	1.55E-03	7.95E-09	0.00E+00
TEEN	5.38E-06	5.77E-06	2.04E-05	8.76E-06	1.46E-05	2.46E-03	1.64E-08	0.00E+00
CHILD	1.02E-05	4.28E-06	5.03E-05	1.52E-05	2.43E-05	4.85E-03	2.52E-08	0.00E+00
INFANT	1.91E-05	4.08E-06	9.83E-05	3.70E-05	4.22E-05	1.18E-02	4.57E-08	0.00E+00
INHAL								
ADULT	4.16E-07	6.10E-06	4.93E-07	4.99E-07	5.24E-07	9.07E-05	1.05E-04	0.00E+00
TEEN	5.51E-07	1.15E-05	7.00E-07	6.74E-07	7.21E-07	1.12E-04	1.55E-04	0.00E+00
CHILD	6.15E-07	6.17E-05	9.60E-07	6.33E-07	6.77E-07	1.27E-04	1.26E-04	0.00E+00
INFANT	3.66E-07	5.35E-05	6.88E-07	5.17E-07	4.45E-07	1.16E-04	8.36E-05	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 6.68E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.00E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	6.72E-05	6.72E-05	6.72E-05	6.72E-05	6.72E-05	6.72E-05	6.79E-05	1.35E-04
GROUND	1.10E-03	1.10E-03	1.10E-03	1.10E-03	1.10E-03	1.10E-03	1.10E-03	1.30E-03
VEGET								
ADULT	1.95E-05	1.48E-04	4.32E-05	1.06E-05	5.14E-06	9.76E-04	8.60E-09	0.00E+00
TEEN	3.04E-05	1.59E-04	7.14E-05	1.62E-05	7.82E-06	1.32E-03	1.61E-08	0.00E+00
CHILD	6.14E-05	1.05E-04	1.74E-04	2.56E-05	1.26E-05	2.52E-03	2.45E-08	0.00E+00
MEAT								
ADULT	4.53E-06	3.82E-05	4.60E-07	2.11E-06	1.40E-07	2.63E-05	7.01E-10	0.00E+00
TEEN	3.59E-06	2.05E-05	3.87E-07	1.64E-06	1.14E-07	1.91E-05	6.64E-10	0.00E+00
CHILD	5.58E-06	1.04E-05	7.31E-07	1.96E-06	1.45E-07	2.88E-05	7.80E-10	0.00E+00
COW MILK								
ADULT	2.34E-06	9.23E-06	3.52E-06	2.73E-06	3.86E-06	7.29E-04	5.93E-09	0.00E+00
TEEN	3.95E-06	1.10E-05	6.44E-06	4.82E-06	6.88E-06	1.15E-03	1.23E-08	0.00E+00
CHILD	7.63E-06	7.43E-06	1.58E-05	8.26E-06	1.14E-05	2.28E-03	1.88E-08	0.00E+00
INFANT	1.35E-05	6.63E-06	3.12E-05	1.96E-05	1.99E-05	5.54E-03	3.41E-08	0.00E+00
GOATMILK								
ADULT	1.87E-06	2.37E-06	6.01E-06	2.90E-06	4.66E-06	8.75E-04	1.78E-08	0.00E+00
TEEN	3.06E-06	3.03E-06	1.10E-05	5.14E-06	8.31E-06	1.38E-03	3.68E-08	0.00E+00
CHILD	5.72E-06	2.26E-06	2.71E-05	8.94E-06	1.38E-05	2.74E-03	5.65E-08	0.00E+00
INFANT	1.07E-05	2.16E-06	5.29E-05	2.16E-05	2.40E-05	6.65E-03	1.02E-07	0.00E+00
INHAL								
ADULT	1.21E-07	1.52E-06	1.44E-07	1.50E-07	1.58E-07	2.61E-05	2.83E-05	0.00E+00
TEEN	1.60E-07	1.87E-06	2.04E-07	2.02E-07	2.17E-07	3.24E-05	4.15E-05	0.00E+00
CHILD	1.79E-07	5.26E-06	2.80E-07	1.91E-07	2.04E-07	3.67E-05	3.38E-05	0.00E+00
INFANT	1.08E-07	4.38E-06	2.01E-07	1.57E-07	1.34E-07	3.35E-05	2.19E-05	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
 AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 1.60E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 2.68E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.80E-05	1.80E-05	1.80E-05	1.80E-05	1.80E-05	1.80E-05	1.81E-05	3.49E-05
GROUND	2.21E-05	2.21E-05	2.21E-05	2.21E-05	2.21E-05	2.21E-05	2.21E-05	2.60E-05
VEGET								
ADULT	3.94E-07	2.98E-06	8.87E-07	2.17E-07	1.11E-07	2.10E-05	2.65E-10	0.00E+00
TEEN	6.13E-07	3.19E-06	1.47E-06	3.32E-07	1.69E-07	2.84E-05	4.97E-10	0.00E+00
CHILD	1.24E-06	2.11E-06	3.58E-06	5.26E-07	2.72E-07	5.44E-05	7.56E-10	0.00E+00
MEAT								
ADULT	9.08E-08	7.64E-07	9.53E-09	4.25E-08	3.03E-09	5.67E-07	2.16E-11	0.00E+00
TEEN	7.19E-08	4.11E-07	8.03E-09	3.30E-08	2.48E-09	4.11E-07	2.05E-11	0.00E+00
CHILD	1.12E-07	2.08E-07	1.51E-08	3.94E-08	3.15E-09	6.20E-07	2.41E-11	0.00E+00
COW MILK								
ADULT	4.92E-08	1.86E-07	7.42E-08	5.88E-08	8.34E-08	1.57E-05	1.83E-10	0.00E+00
TEEN	8.27E-08	2.22E-07	1.36E-07	1.04E-07	1.49E-07	2.49E-05	3.78E-10	0.00E+00
CHILD	1.59E-07	1.50E-07	3.33E-07	1.78E-07	2.47E-07	4.92E-05	5.81E-10	0.00E+00
INFANT	2.83E-07	1.34E-07	6.59E-07	4.23E-07	4.30E-07	1.20E-04	1.05E-09	0.00E+00
GOATMILK								
ADULT	4.09E-08	4.90E-08	1.26E-07	6.39E-08	1.01E-07	1.89E-05	5.49E-10	0.00E+00
TEEN	6.64E-08	6.27E-08	2.32E-07	1.13E-07	1.80E-07	2.99E-05	1.13E-09	0.00E+00
CHILD	1.23E-07	4.68E-08	5.69E-07	1.97E-07	3.00E-07	5.90E-05	1.74E-09	0.00E+00
INFANT	2.28E-07	4.48E-08	1.11E-06	4.74E-07	5.21E-07	1.43E-04	3.15E-09	0.00E+00
INHAL								
ADULT	8.00E-09	7.92E-08	9.85E-09	1.14E-08	1.27E-08	1.80E-06	1.43E-06	0.00E+00
TEEN	1.06E-08	9.34E-08	1.39E-08	1.55E-08	1.75E-08	2.24E-06	2.09E-06	0.00E+00
CHILD	1.20E-08	2.25E-07	1.91E-08	1.48E-08	1.64E-08	2.55E-06	1.70E-06	0.00E+00
INFANT	7.56E-09	1.86E-07	1.40E-08	1.27E-08	1.08E-08	2.34E-06	1.10E-06	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
 AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 2.63E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 4.08E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.73E-05	2.73E-05	2.73E-05	2.73E-05	2.73E-05	2.73E-05	2.76E-05	5.43E-05
GROUND	1.19E-04	1.19E-04	1.19E-04	1.19E-04	1.19E-04	1.19E-04	1.19E-04	1.39E-04
VEGET								
ADULT	2.11E-06	1.60E-05	4.74E-06	1.16E-06	5.91E-07	1.12E-04	1.28E-09	0.00E+00
TEEN	3.29E-06	1.71E-05	7.84E-06	1.78E-06	8.99E-07	1.51E-04	2.40E-09	0.00E+00
CHILD	6.64E-06	1.13E-05	1.91E-05	2.81E-06	1.45E-06	2.89E-04	3.65E-09	0.00E+00
MEAT								
ADULT	4.87E-07	4.10E-06	5.08E-08	2.28E-07	1.61E-08	3.02E-06	1.04E-10	0.00E+00
TEEN	3.86E-07	2.21E-06	4.28E-08	1.77E-07	1.32E-08	2.19E-06	9.89E-11	0.00E+00
CHILD	6.00E-07	1.12E-06	8.08E-08	2.12E-07	1.67E-08	3.30E-06	1.16E-10	0.00E+00
COW MILK								
ADULT	2.63E-07	9.97E-07	3.95E-07	3.13E-07	4.44E-07	8.37E-05	8.83E-10	0.00E+00
TEEN	4.41E-07	1.19E-06	7.23E-07	5.51E-07	7.92E-07	1.32E-04	1.83E-09	0.00E+00
CHILD	8.50E-07	8.04E-07	1.77E-06	9.46E-07	1.32E-06	2.62E-04	2.81E-09	0.00E+00
INFANT	1.51E-06	7.18E-07	3.51E-06	2.25E-06	2.29E-06	6.36E-04	5.08E-09	0.00E+00
GOATMILK								
ADULT	2.17E-07	2.62E-07	6.73E-07	3.38E-07	5.37E-07	1.00E-04	2.65E-09	0.00E+00
TEEN	3.52E-07	3.36E-07	1.23E-06	6.00E-07	9.59E-07	1.59E-04	5.48E-09	0.00E+00
CHILD	6.53E-07	2.50E-07	3.03E-06	1.04E-06	1.59E-06	3.14E-04	8.42E-09	0.00E+00
INFANT	1.22E-06	2.40E-07	5.92E-06	2.51E-06	2.77E-06	7.64E-04	1.52E-08	0.00E+00
INHAL								
ADULT	3.19E-08	4.33E-07	3.84E-08	4.07E-08	4.38E-08	6.99E-06	7.32E-06	0.00E+00
TEEN	4.23E-08	8.22E-07	5.44E-08	5.51E-08	6.02E-08	8.68E-06	1.08E-05	0.00E+00
CHILD	4.74E-08	4.46E-06	7.45E-08	5.21E-08	5.65E-08	9.84E-06	8.80E-06	0.00E+00
INFANT	2.88E-08	3.87E-06	5.39E-08	4.35E-08	3.72E-08	9.00E-06	5.83E-06	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2009

SPECIAL LOCATION NO. 1 A Site Boundary
 AT .80 MILES S

ANNUAL BETA AIR DOSE = 1.02E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 8.16E-04 MILLRADS

PATHWAY	T. BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.34E-04	5.34E-04	5.34E-04	5.34E-04	5.34E-04	5.34E-04	5.45E-04	1.28E-03
GROUND	2.42E-03	2.42E-03	2.42E-03	2.42E-03	2.42E-03	2.42E-03	2.42E-03	2.85E-03
VEGET								
ADULT	5.43E-05	3.57E-04	2.77E-04	3.47E-05	3.10E-05	5.91E-03	2.65E-09	0.00E+00
TEEN	8.43E-05	3.88E-04	4.58E-04	5.29E-05	4.71E-05	7.97E-03	4.97E-09	0.00E+00
CHILD	1.72E-04	2.61E-04	1.12E-03	8.55E-05	7.60E-05	1.53E-02	7.56E-09	0.00E+00
MEAT								
ADULT	1.02E-05	8.42E-05	2.90E-06	4.94E-06	8.36E-07	1.60E-04	2.16E-10	0.00E+00
TEEN	8.05E-06	4.53E-05	2.45E-06	3.85E-06	6.83E-07	1.16E-04	2.05E-10	0.00E+00
CHILD	1.25E-05	2.29E-05	4.62E-06	4.63E-06	8.67E-07	1.74E-04	2.41E-10	0.00E+00
COW MILK								
ADULT	1.02E-05	2.38E-05	2.18E-05	1.45E-05	2.31E-05	4.41E-03	1.83E-09	0.00E+00
TEEN	1.72E-05	2.89E-05	3.98E-05	2.56E-05	4.12E-05	6.97E-03	3.78E-09	0.00E+00
CHILD	3.28E-05	2.01E-05	9.78E-05	4.43E-05	6.85E-05	1.38E-02	5.81E-09	0.00E+00
INFANT	6.02E-05	1.83E-05	1.94E-04	1.07E-04	1.19E-04	3.35E-02	1.05E-08	0.00E+00
GOATMILK								
ADULT	1.03E-05	1.07E-05	3.72E-05	1.63E-05	2.77E-05	5.29E-03	5.49E-09	0.00E+00
TEEN	1.72E-05	1.40E-05	6.83E-05	2.90E-05	4.95E-05	8.37E-03	1.13E-08	0.00E+00
CHILD	3.27E-05	1.08E-05	1.68E-04	5.05E-05	8.23E-05	1.65E-02	1.74E-08	0.00E+00
INFANT	6.17E-05	1.05E-05	3.29E-04	1.23E-04	1.43E-04	4.02E-02	3.15E-08	0.00E+00
INHAL								
ADULT	7.35E-07	7.01E-06	1.49E-06	1.02E-06	1.40E-06	2.56E-04	1.13E-04	0.00E+00
TEEN	9.67E-07	1.11E-05	2.11E-06	1.39E-06	1.92E-06	3.16E-04	1.67E-04	0.00E+00
CHILD	1.06E-06	4.88E-05	2.89E-06	1.34E-06	1.80E-06	3.54E-04	1.37E-04	0.00E+00
INFANT	6.78E-07	4.18E-05	2.06E-06	1.16E-06	1.19E-06	3.23E-04	9.09E-05	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 1.44E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.05E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	6.87E-04	6.87E-04	6.87E-04	6.87E-04	6.87E-04	6.87E-04	7.02E-04	1.71E-03
GROUND	3.17E-03	3.17E-03	3.17E-03	3.17E-03	3.17E-03	3.17E-03	3.17E-03	3.73E-03
VEGET								
ADULT	7.09E-05	4.68E-04	3.62E-04	4.50E-05	3.98E-05	7.60E-03	2.93E-09	0.00E+00
TEEN	1.10E-04	5.08E-04	5.99E-04	6.86E-05	6.06E-05	1.02E-02	5.48E-09	0.00E+00
CHILD	2.24E-04	3.42E-04	1.46E-03	1.11E-04	9.77E-05	1.96E-02	8.34E-09	0.00E+00
MEAT								
ADULT	1.33E-05	1.10E-04	3.79E-06	6.46E-06	1.07E-06	2.05E-04	2.39E-10	0.00E+00
TEEN	1.05E-05	5.93E-05	3.20E-06	5.03E-06	8.77E-07	1.49E-04	2.26E-10	0.00E+00
CHILD	1.64E-05	3.00E-05	6.04E-06	6.05E-06	1.11E-06	2.24E-04	2.66E-10	0.00E+00
COW MILK								
ADULT	1.32E-05	3.11E-05	2.83E-05	1.86E-05	2.97E-05	5.67E-03	2.02E-09	0.00E+00
TEEN	2.22E-05	3.78E-05	5.18E-05	3.30E-05	5.30E-05	8.96E-03	4.17E-09	0.00E+00
CHILD	4.24E-05	2.62E-05	1.27E-04	5.71E-05	8.81E-05	1.77E-02	6.41E-09	0.00E+00
INFANT	7.78E-05	2.39E-05	2.51E-04	1.38E-04	1.53E-04	4.30E-02	1.16E-08	0.00E+00
GOATMILK								
ADULT	1.32E-05	1.39E-05	4.85E-05	2.10E-05	3.57E-05	6.80E-03	6.06E-09	0.00E+00
TEEN	2.22E-05	1.82E-05	8.89E-05	3.73E-05	6.36E-05	1.08E-02	1.25E-08	0.00E+00
CHILD	4.22E-05	1.40E-05	2.19E-04	6.49E-05	1.06E-04	2.12E-02	1.92E-08	0.00E+00
INFANT	7.95E-05	1.37E-05	4.28E-04	1.59E-04	1.84E-04	5.16E-02	3.48E-08	0.00E+00
INHAL								
ADULT	1.12E-06	1.15E-05	2.27E-06	1.55E-06	2.11E-06	3.86E-04	1.78E-04	0.00E+00
TEEN	1.47E-06	2.22E-05	3.23E-06	2.11E-06	2.90E-06	4.76E-04	2.63E-04	0.00E+00
CHILD	1.61E-06	1.20E-04	4.43E-06	2.02E-06	2.72E-06	5.34E-04	2.15E-04	0.00E+00
INFANT	1.03E-06	1.04E-04	3.15E-06	1.76E-06	1.79E-06	4.88E-04	1.45E-04	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.34E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.74E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.16E-03	1.16E-03	1.16E-03	1.16E-03	1.16E-03	1.16E-03	1.18E-03	2.37E-03
GROUND	1.45E-03	1.45E-03	1.45E-03	1.45E-03	1.45E-03	1.45E-03	1.45E-03	1.70E-03
VEGET ADULT	3.50E-05	2.14E-04	1.69E-04	2.51E-05	2.60E-05	4.96E-03	6.31E-09	0.00E+00
TEEN	5.39E-05	2.33E-04	2.80E-04	3.82E-05	3.96E-05	6.69E-03	1.18E-08	0.00E+00
CHILD	1.09E-04	1.57E-04	6.83E-04	6.23E-05	6.38E-05	1.28E-02	1.80E-08	0.00E+00
MEAT ADULT	6.13E-06	5.02E-05	1.83E-06	3.07E-06	7.03E-07	1.34E-04	5.15E-10	0.00E+00
TEEN	4.85E-06	2.70E-05	1.54E-06	2.40E-06	5.74E-07	9.70E-05	4.87E-10	0.00E+00
CHILD	7.53E-06	1.37E-05	2.91E-06	2.89E-06	7.29E-07	1.46E-04	5.73E-10	0.00E+00
COW MILK ADULT	7.99E-06	1.51E-05	1.54E-05	1.19E-05	1.94E-05	3.70E-03	4.35E-09	0.00E+00
TEEN	1.34E-05	1.84E-05	2.81E-05	2.12E-05	3.46E-05	5.85E-03	9.00E-09	0.00E+00
CHILD	2.54E-05	1.29E-05	6.88E-05	3.67E-05	5.76E-05	1.16E-02	1.38E-08	0.00E+00
INFANT	4.68E-05	1.18E-05	1.37E-04	8.90E-05	1.00E-04	2.81E-02	2.50E-08	0.00E+00
GOATMILK ADULT	8.45E-06	7.42E-06	2.51E-05	1.38E-05	2.33E-05	4.44E-03	1.31E-08	0.00E+00
TEEN	1.41E-05	9.78E-06	4.61E-05	2.44E-05	4.16E-05	7.03E-03	2.70E-08	0.00E+00
CHILD	2.65E-05	7.56E-06	1.13E-04	4.26E-05	6.91E-05	1.39E-02	4.15E-08	0.00E+00
INFANT	5.00E-05	7.39E-06	2.23E-04	1.04E-04	1.20E-04	3.37E-02	7.50E-08	0.00E+00
INHAL ADULT	3.45E-07	3.18E-06	6.70E-07	4.96E-07	6.87E-07	1.24E-04	4.85E-05	0.00E+00
TEEN	4.53E-07	6.14E-06	9.51E-07	6.76E-07	9.43E-07	1.53E-04	7.19E-05	0.00E+00
CHILD	4.96E-07	3.34E-05	1.30E-06	6.50E-07	8.85E-07	1.71E-04	5.88E-05	0.00E+00
INFANT	3.21E-07	2.90E-05	9.33E-07	5.70E-07	5.82E-07	1.56E-04	3.97E-05	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 4.54E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 6.76E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.54E-04	4.54E-04	4.54E-04	4.54E-04	4.54E-04	4.54E-04	4.59E-04	8.93E-04
GROUND	4.17E-05	4.17E-05	4.17E-05	4.17E-05	4.17E-05	4.17E-05	4.17E-05	4.91E-05
VEGET								
ADULT	1.09E-06	6.23E-06	5.02E-06	8.61E-07	9.84E-07	1.88E-04	3.29E-10	0.00E+00
TEEN	1.67E-06	6.77E-06	8.29E-06	1.31E-06	1.50E-06	2.53E-04	6.17E-10	0.00E+00
CHILD	3.35E-06	4.57E-06	2.02E-05	2.15E-06	2.41E-06	4.85E-04	9.38E-10	0.00E+00
MEAT								
ADULT	1.79E-07	1.45E-06	5.58E-08	9.23E-08	2.66E-08	5.07E-06	2.69E-11	0.00E+00
TEEN	1.42E-07	7.81E-07	4.70E-08	7.22E-08	2.17E-08	3.67E-06	2.54E-11	0.00E+00
CHILD	2.20E-07	3.95E-07	8.86E-08	8.75E-08	2.76E-08	5.54E-06	2.99E-11	0.00E+00
COW MILK								
ADULT	2.89E-07	4.62E-07	5.16E-07	4.47E-07	7.34E-07	1.40E-04	2.27E-10	0.00E+00
TEEN	4.84E-07	5.68E-07	9.43E-07	7.92E-07	1.31E-06	2.21E-04	4.69E-10	0.00E+00
CHILD	9.10E-07	4.01E-07	2.31E-06	1.37E-06	2.18E-06	4.37E-04	7.21E-10	0.00E+00
INFANT	1.69E-06	3.69E-07	4.63E-06	3.34E-06	3.79E-06	1.06E-03	1.31E-09	0.00E+00
GOATMILK								
ADULT	3.15E-07	2.47E-07	8.16E-07	5.22E-07	8.82E-07	1.68E-04	6.81E-10	0.00E+00
TEEN	5.24E-07	3.26E-07	1.49E-06	9.26E-07	1.57E-06	2.66E-04	1.41E-09	0.00E+00
CHILD	9.79E-07	2.53E-07	3.67E-06	1.61E-06	2.62E-06	5.25E-04	2.16E-09	0.00E+00
INFANT	1.85E-06	2.47E-07	7.26E-06	3.93E-06	4.55E-06	1.27E-03	3.92E-09	0.00E+00
INHAL								
ADULT	3.78E-08	2.25E-07	6.31E-08	6.02E-08	8.70E-08	1.51E-05	3.26E-06	0.00E+00
TEEN	4.96E-08	4.45E-07	8.94E-08	8.24E-08	1.19E-07	1.86E-05	4.84E-06	0.00E+00
CHILD	5.41E-08	2.46E-06	1.22E-07	7.99E-08	1.12E-07	2.08E-05	3.96E-06	0.00E+00
INFANT	3.65E-08	2.14E-06	8.99E-08	7.18E-08	7.38E-08	1.90E-05	2.68E-06	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
 AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 5.97E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 8.44E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.66E-04	5.66E-04	5.66E-04	5.66E-04	5.66E-04	5.66E-04	5.72E-04	1.13E-03
GROUND	1.80E-04	1.80E-04	1.80E-04	1.80E-04	1.80E-04	1.80E-04	1.80E-04	2.11E-04
VEGET								
ADULT	4.61E-06	2.68E-05	2.15E-05	3.58E-06	4.02E-06	7.66E-04	1.28E-09	0.00E+00
TEEN	7.08E-06	2.91E-05	3.55E-05	5.45E-06	6.11E-06	1.03E-03	2.40E-09	0.00E+00
CHILD	1.42E-05	1.96E-05	8.66E-05	8.93E-06	9.86E-06	1.98E-03	3.65E-09	0.00E+00
MEAT								
ADULT	7.69E-07	6.24E-06	2.38E-07	3.94E-07	1.09E-07	2.07E-05	1.04E-10	0.00E+00
TEEN	6.08E-07	3.36E-06	2.00E-07	3.08E-07	8.87E-08	1.50E-05	9.89E-11	0.00E+00
CHILD	9.43E-07	1.70E-06	3.77E-07	3.73E-07	1.13E-07	2.26E-05	1.16E-10	0.00E+00
COW MILK								
ADULT	1.19E-06	1.96E-06	2.15E-06	1.83E-06	3.00E-06	5.72E-04	8.83E-10	0.00E+00
TEEN	1.99E-06	2.41E-06	3.93E-06	3.24E-06	5.35E-06	9.04E-04	1.83E-09	0.00E+00
CHILD	3.75E-06	1.70E-06	9.63E-06	5.62E-06	8.89E-06	1.79E-03	2.81E-09	0.00E+00
INFANT	6.95E-06	1.56E-06	1.93E-05	1.37E-05	1.55E-05	4.34E-03	5.08E-09	0.00E+00
GOATMILK								
ADULT	1.29E-06	1.03E-06	3.43E-06	2.13E-06	3.60E-06	6.86E-04	2.65E-09	0.00E+00
TEEN	2.15E-06	1.36E-06	6.28E-06	3.78E-06	6.43E-06	1.08E-03	5.48E-09	0.00E+00
CHILD	4.01E-06	1.06E-06	1.54E-05	6.59E-06	1.07E-05	2.14E-03	8.42E-09	0.00E+00
INFANT	7.57E-06	1.03E-06	3.05E-05	1.61E-05	1.86E-05	5.21E-03	1.52E-08	0.00E+00
INHAL								
ADULT	9.09E-08	7.41E-07	1.69E-07	1.35E-07	1.90E-07	3.38E-05	1.12E-05	0.00E+00
TEEN	1.19E-07	1.44E-06	2.39E-07	1.85E-07	2.61E-07	4.17E-05	1.66E-05	0.00E+00
CHILD	1.30E-07	7.87E-06	3.27E-07	1.78E-07	2.45E-07	4.67E-05	1.36E-05	0.00E+00
INFANT	8.57E-08	6.83E-06	2.36E-07	1.58E-07	1.61E-07	4.27E-05	9.15E-06	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2009

SPECIAL LOCATION NO. 1 A Site Boundary
AT .67 MILES N

ANNUAL BETA AIR DOSE = 5.52E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 2.11E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.26E-04	1.26E-04	1.26E-04	1.26E-04	1.26E-04	1.26E-04	1.31E-04	3.42E-04
GROUND	1.50E-03	1.50E-03	1.50E-03	1.50E-03	1.50E-03	1.50E-03	1.50E-03	1.76E-03
VEGET								
ADULT	2.58E-05	2.02E-04	5.23E-05	1.43E-05	4.66E-06	6.54E-04	3.72E-10	0.00E+00
TEEN	4.05E-05	2.17E-04	8.66E-05	2.18E-05	7.00E-06	8.82E-04	6.26E-10	0.00E+00
CHILD	8.21E-05	1.43E-04	2.11E-04	3.38E-05	1.10E-05	1.69E-03	8.94E-10	0.00E+00
MEAT								
ADULT	6.49E-06	5.22E-05	7.98E-07	3.67E-06	6.71E-07	1.76E-05	1.29E-11	0.00E+00
TEEN	5.14E-06	2.81E-05	6.35E-07	2.84E-06	5.00E-07	1.28E-05	1.11E-11	0.00E+00
CHILD	7.99E-06	1.42E-05	1.13E-06	3.36E-06	5.77E-07	1.93E-05	1.23E-11	0.00E+00
COW MILK								
ADULT	3.75E-06	1.42E-05	4.45E-06	5.44E-06	4.81E-06	4.90E-04	5.19E-11	0.00E+00
TEEN	6.44E-06	1.67E-05	7.85E-06	9.27E-06	8.18E-06	7.75E-04	9.76E-11	0.00E+00
CHILD	1.28E-05	1.11E-05	1.85E-05	1.46E-05	1.29E-05	1.53E-03	1.41E-10	0.00E+00
INFANT	1.99E-05	2.08E-05	3.43E-05	2.92E-05	2.04E-05	3.72E-03	2.81E-10	0.00E+00
GOATMILK								
ADULT	1.51E-06	2.89E-06	6.33E-06	2.28E-06	3.37E-06	5.88E-04	6.23E-12	0.00E+00
TEEN	2.56E-06	3.62E-06	1.16E-05	4.00E-06	5.96E-06	9.30E-04	1.17E-11	0.00E+00
CHILD	4.99E-06	2.63E-06	2.85E-05	6.80E-06	9.83E-06	1.84E-03	1.70E-11	0.00E+00
INFANT	8.93E-06	3.79E-06	5.50E-05	1.58E-05	1.68E-05	4.47E-03	3.37E-11	0.00E+00
INHAL								
ADULT	4.39E-07	6.39E-06	4.84E-07	5.18E-07	4.32E-07	6.51E-05	1.22E-04	0.00E+00
TEEN	5.85E-07	7.46E-06	6.85E-07	6.94E-07	5.91E-07	8.12E-05	1.78E-04	0.00E+00
CHILD	6.59E-07	1.83E-05	9.36E-07	6.38E-07	5.50E-07	9.28E-05	1.45E-04	0.00E+00
INFANT	3.76E-07	1.50E-05	6.56E-07	4.87E-07	3.56E-07	8.50E-05	9.37E-05	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2009 (Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
 AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 4.16E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.51E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	8.92E-05	8.92E-05	8.92E-05	8.92E-05	8.92E-05	8.92E-05	9.34E-05	2.47E-04
GROUND	1.09E-03	1.09E-03	1.09E-03	1.09E-03	1.09E-03	1.09E-03	1.09E-03	1.28E-03
VEGET								
ADULT	1.89E-05	1.48E-04	3.80E-05	1.04E-05	3.40E-06	4.78E-04	2.70E-10	0.00E+00
TEEN	2.96E-05	1.58E-04	6.29E-05	1.59E-05	5.11E-06	6.45E-04	4.54E-10	0.00E+00
CHILD	5.99E-05	1.04E-04	1.53E-04	2.47E-05	8.04E-06	1.24E-03	6.48E-10	0.00E+00
MEAT								
ADULT	4.74E-06	3.81E-05	5.81E-07	2.68E-06	4.90E-07	1.29E-05	9.36E-12	0.00E+00
TEEN	3.76E-06	2.05E-05	4.62E-07	2.07E-06	3.66E-07	9.33E-06	8.06E-12	0.00E+00
CHILD	5.83E-06	1.04E-05	8.19E-07	2.45E-06	4.22E-07	1.41E-05	8.92E-12	0.00E+00
COW MILK								
ADULT	2.74E-06	1.03E-05	3.24E-06	3.97E-06	3.51E-06	3.58E-04	3.78E-11	0.00E+00
TEEN	4.70E-06	1.22E-05	5.72E-06	6.78E-06	5.98E-06	5.66E-04	7.10E-11	0.00E+00
CHILD	9.36E-06	8.09E-06	1.35E-05	1.07E-05	9.46E-06	1.12E-03	1.03E-10	0.00E+00
INFANT	1.45E-05	1.52E-05	2.50E-05	2.13E-05	1.49E-05	2.72E-03	2.04E-10	0.00E+00
GOATMILK								
ADULT	1.10E-06	2.11E-06	4.60E-06	1.67E-06	2.46E-06	4.29E-04	4.53E-12	0.00E+00
TEEN	1.87E-06	2.64E-06	8.43E-06	2.93E-06	4.35E-06	6.79E-04	8.52E-12	0.00E+00
CHILD	3.65E-06	1.91E-06	2.07E-05	4.97E-06	7.18E-06	1.34E-03	1.23E-11	0.00E+00
INFANT	6.52E-06	2.77E-06	4.00E-05	1.16E-05	1.23E-05	3.26E-03	2.45E-11	0.00E+00
INHAL								
ADULT	3.54E-07	5.18E-06	3.90E-07	4.16E-07	3.43E-07	5.17E-05	9.88E-05	0.00E+00
TEEN	4.72E-07	6.05E-06	5.52E-07	5.57E-07	4.69E-07	6.45E-05	1.45E-04	0.00E+00
CHILD	5.32E-07	1.48E-05	7.54E-07	5.12E-07	4.37E-07	7.37E-05	1.18E-04	0.00E+00
INFANT	3.03E-07	1.22E-05	5.28E-07	3.90E-07	2.83E-07	6.75E-05	7.61E-05	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2009 (Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 2.01E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.40E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	8.99E-05	8.99E-05	8.99E-05	8.99E-05	8.99E-05	8.99E-05	9.19E-05	2.06E-04
GROUND	7.81E-04	7.81E-04	7.81E-04	7.81E-04	7.81E-04	7.81E-04	7.81E-04	9.19E-04
VEGET								
ADULT	1.35E-05	1.06E-04	2.82E-05	7.44E-06	2.42E-06	3.40E-04	2.01E-10	0.00E+00
TEEN	2.12E-05	1.13E-04	4.67E-05	1.14E-05	3.63E-06	4.58E-04	3.40E-10	0.00E+00
CHILD	4.30E-05	7.48E-05	1.14E-04	1.76E-05	5.72E-06	8.78E-04	4.86E-10	0.00E+00
MEAT								
ADULT	3.39E-06	2.73E-05	4.25E-07	1.91E-06	3.49E-07	9.16E-06	7.00E-12	0.00E+00
TEEN	2.69E-06	1.47E-05	3.38E-07	1.48E-06	2.60E-07	6.63E-06	6.05E-12	0.00E+00
CHILD	4.17E-06	7.41E-06	6.01E-07	1.75E-06	3.00E-07	1.00E-05	6.71E-12	0.00E+00
COW MILK								
ADULT	1.95E-06	7.40E-06	2.36E-06	2.83E-06	2.50E-06	2.54E-04	2.77E-11	0.00E+00
TEEN	3.35E-06	8.72E-06	4.17E-06	4.82E-06	4.25E-06	4.02E-04	5.20E-11	0.00E+00
CHILD	6.68E-06	5.79E-06	9.83E-06	7.61E-06	6.73E-06	7.95E-04	7.53E-11	0.00E+00
INFANT	1.04E-05	1.08E-05	1.82E-05	1.52E-05	1.06E-05	1.93E-03	1.50E-10	0.00E+00
GOATMILK								
ADULT	7.87E-07	1.52E-06	3.39E-06	1.18E-06	1.75E-06	3.05E-04	3.32E-12	0.00E+00
TEEN	1.34E-06	1.91E-06	6.21E-06	2.08E-06	3.09E-06	4.83E-04	6.24E-12	0.00E+00
CHILD	2.61E-06	1.39E-06	1.52E-05	3.53E-06	5.10E-06	9.54E-04	9.04E-12	0.00E+00
INFANT	4.67E-06	1.99E-06	2.94E-05	8.22E-06	8.74E-06	2.32E-03	1.80E-11	0.00E+00
INHAL								
ADULT	8.24E-08	1.18E-06	9.16E-08	9.92E-08	8.24E-08	1.19E-05	2.21E-05	0.00E+00
TEEN	1.10E-07	1.41E-06	1.30E-07	1.33E-07	1.13E-07	1.48E-05	3.25E-05	0.00E+00
CHILD	1.24E-07	3.67E-06	1.77E-07	1.23E-07	1.05E-07	1.69E-05	2.64E-05	0.00E+00
INFANT	7.15E-08	3.03E-06	1.25E-07	9.48E-08	6.81E-08	1.55E-05	1.71E-05	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2009 (Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 5.28E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 4.88E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.19E-05	3.19E-05	3.19E-05	3.19E-05	3.19E-05	3.19E-05	3.24E-05	6.95E-05
GROUND	2.31E-05	2.31E-05	2.31E-05	2.31E-05	2.31E-05	2.31E-05	2.31E-05	2.72E-05
VEGET								
ADULT	4.01E-07	3.14E-06	8.81E-07	2.19E-07	7.08E-08	9.94E-06	6.35E-12	0.00E+00
TEEN	6.29E-07	3.36E-06	1.46E-06	3.36E-07	1.06E-07	1.34E-05	1.07E-11	0.00E+00
CHILD	1.28E-06	2.22E-06	3.56E-06	5.21E-07	1.67E-07	2.57E-05	1.54E-11	0.00E+00
MEAT								
ADULT	1.00E-07	8.07E-07	1.30E-08	5.65E-08	1.02E-08	2.68E-07	2.22E-13	0.00E+00
TEEN	7.94E-08	4.34E-07	1.04E-08	4.37E-08	7.61E-09	1.94E-07	1.92E-13	0.00E+00
CHILD	1.23E-07	2.19E-07	1.85E-08	5.17E-08	8.78E-09	2.93E-07	2.14E-13	0.00E+00
COW MILK								
ADULT	5.75E-08	2.19E-07	7.16E-08	8.28E-08	7.31E-08	7.44E-06	8.47E-13	0.00E+00
TEEN	9.87E-08	2.58E-07	1.27E-07	1.41E-07	1.24E-07	1.18E-05	1.59E-12	0.00E+00
CHILD	1.97E-07	1.71E-07	3.00E-07	2.23E-07	1.97E-07	2.33E-05	2.31E-12	0.00E+00
INFANT	3.05E-07	3.19E-07	5.56E-07	4.44E-07	3.10E-07	5.66E-05	4.61E-12	0.00E+00
GOATMILK								
ADULT	2.32E-08	4.57E-08	1.05E-07	3.47E-08	5.12E-08	8.93E-06	1.02E-13	0.00E+00
TEEN	3.94E-08	5.73E-08	1.92E-07	6.09E-08	9.05E-08	1.41E-05	1.91E-13	0.00E+00
CHILD	7.71E-08	4.17E-08	4.71E-07	1.03E-07	1.49E-07	2.79E-05	2.77E-13	0.00E+00
INFANT	1.38E-07	5.94E-08	9.08E-07	2.40E-07	2.56E-07	6.79E-05	5.53E-13	0.00E+00
INHAL								
ADULT	6.73E-09	8.95E-08	7.76E-09	8.78E-09	7.36E-09	8.81E-07	1.56E-06	0.00E+00
TEEN	9.01E-09	1.18E-07	1.10E-08	1.18E-08	1.01E-08	1.10E-06	2.29E-06	0.00E+00
CHILD	1.03E-08	3.73E-07	1.50E-08	1.11E-08	9.42E-09	1.26E-06	1.86E-06	0.00E+00
INFANT	6.17E-09	3.15E-07	1.07E-08	8.95E-09	6.13E-09	1.15E-06	1.21E-06	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
 AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 9.41E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 7.26E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.69E-05	4.69E-05	4.69E-05	4.69E-05	4.69E-05	4.69E-05	4.79E-05	1.05E-04
GROUND	1.30E-04	1.30E-04	1.30E-04	1.30E-04	1.30E-04	1.30E-04	1.30E-04	1.53E-04
VEGET								
ADULT	2.25E-06	1.76E-05	4.71E-06	1.24E-06	4.03E-07	5.66E-05	3.36E-11	0.00E+00
TEEN	3.53E-06	1.89E-05	7.79E-06	1.90E-06	6.06E-07	7.63E-05	5.68E-11	0.00E+00
CHILD	7.17E-06	1.25E-05	1.90E-05	2.94E-06	9.53E-07	1.46E-04	8.12E-11	0.00E+00
MEAT								
ADULT	5.65E-07	4.55E-06	7.09E-08	3.19E-07	5.81E-08	1.53E-06	1.17E-12	0.00E+00
TEEN	4.48E-07	2.45E-06	5.65E-08	2.47E-07	4.33E-08	1.11E-06	1.01E-12	0.00E+00
CHILD	6.96E-07	1.24E-06	1.00E-07	2.92E-07	5.00E-08	1.67E-06	1.12E-12	0.00E+00
COW MILK								
ADULT	3.26E-07	1.23E-06	3.94E-07	4.71E-07	4.16E-07	4.24E-05	4.62E-12	0.00E+00
TEEN	5.59E-07	1.45E-06	6.95E-07	8.03E-07	7.08E-07	6.70E-05	8.68E-12	0.00E+00
CHILD	1.11E-06	9.65E-07	1.64E-06	1.27E-06	1.12E-06	1.33E-04	1.26E-11	0.00E+00
INFANT	1.73E-06	1.80E-06	3.04E-06	2.53E-06	1.76E-06	3.22E-04	2.50E-11	0.00E+00
GOATMILK								
ADULT	1.31E-07	2.54E-07	5.65E-07	1.97E-07	2.91E-07	5.08E-05	5.54E-13	0.00E+00
TEEN	2.23E-07	3.18E-07	1.04E-06	3.47E-07	5.16E-07	8.05E-05	1.04E-12	0.00E+00
CHILD	4.35E-07	2.31E-07	2.55E-06	5.88E-07	8.50E-07	1.59E-04	1.51E-12	0.00E+00
INFANT	7.78E-07	3.32E-07	4.91E-06	1.37E-06	1.46E-06	3.87E-04	3.00E-12	0.00E+00
INHAL								
ADULT	2.92E-08	4.13E-07	3.27E-08	3.58E-08	3.00E-08	4.21E-06	7.66E-06	0.00E+00
TEEN	3.90E-08	5.01E-07	4.63E-08	4.80E-08	4.11E-08	5.25E-06	1.12E-05	0.00E+00
CHILD	4.42E-08	1.35E-06	6.33E-08	4.44E-08	3.83E-08	6.00E-06	9.12E-06	0.00E+00
INFANT	2.56E-08	1.12E-06	4.47E-08	3.47E-08	2.49E-08	5.50E-06	5.91E-06	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2009

SPECIAL LOCATION NO. 1 A Site Boundary
 AT .69 MILES NNW

ANNUAL BETA AIR DOSE = 1.31E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 4.66E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.75E-04	2.75E-04	2.75E-04	2.75E-04	2.75E-04	2.75E-04	2.88E-04	7.65E-04
GROUND	3.52E-03	3.52E-03	3.52E-03	3.52E-03	3.52E-03	3.52E-03	3.52E-03	4.14E-03
VEGET								
ADULT	5.93E-05	4.84E-04	6.83E-06	4.03E-05	9.11E-06	6.05E-04	8.31E-07	0.00E+00
TEEN	9.28E-05	5.15E-04	1.02E-05	6.17E-05	1.35E-05	8.17E-04	1.46E-06	0.00E+00
CHILD	1.86E-04	3.36E-04	2.25E-05	9.46E-05	2.04E-05	1.57E-03	2.14E-06	0.00E+00
MEAT								
ADULT	1.67E-05	1.30E-04	1.97E-06	1.20E-05	2.51E-06	1.64E-05	5.13E-07	0.00E+00
TEEN	1.32E-05	7.03E-05	1.47E-06	9.34E-06	1.85E-06	1.18E-05	4.59E-07	0.00E+00
CHILD	2.05E-05	3.56E-05	2.39E-06	1.11E-05	2.11E-06	1.79E-05	5.19E-07	0.00E+00
COW MILK								
ADULT	1.03E-05	3.71E-05	5.54E-06	1.70E-05	1.17E-05	4.51E-04	6.49E-08	0.00E+00
TEEN	1.77E-05	4.32E-05	8.81E-06	2.86E-05	1.91E-05	7.14E-04	1.27E-07	0.00E+00
CHILD	3.55E-05	2.82E-05	1.82E-05	4.38E-05	2.91E-05	1.41E-03	1.89E-07	0.00E+00
INFANT	5.10E-05	7.05E-05	2.80E-05	8.02E-05	4.16E-05	3.42E-03	3.83E-07	0.00E+00
GOATMILK								
ADULT	2.18E-06	4.87E-06	2.00E-06	3.66E-06	4.00E-06	5.41E-04	2.39E-08	0.00E+00
TEEN	3.64E-06	5.74E-06	3.46E-06	6.32E-06	6.93E-06	8.56E-04	4.86E-08	0.00E+00
CHILD	6.96E-06	3.83E-06	7.96E-06	1.03E-05	1.12E-05	1.69E-03	7.38E-08	0.00E+00
INFANT	1.12E-05	8.89E-06	1.48E-05	2.17E-05	1.84E-05	4.11E-03	1.39E-07	0.00E+00
INHAL								
ADULT	9.25E-07	1.48E-05	1.83E-07	1.11E-06	4.18E-07	5.02E-05	2.97E-04	0.00E+00
TEEN	1.24E-06	1.40E-05	2.45E-07	1.46E-06	5.57E-07	6.17E-05	4.33E-04	0.00E+00
CHILD	1.40E-06	9.83E-06	3.15E-07	1.28E-06	4.97E-07	6.85E-05	3.51E-04	0.00E+00
INFANT	7.43E-07	6.01E-06	2.20E-07	8.40E-07	2.96E-07	6.25E-05	2.25E-04	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2009(Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 1.95E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 6.83E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.02E-04	4.02E-04	4.02E-04	4.02E-04	4.02E-04	4.02E-04	4.21E-04	1.12E-03
GROUND	6.02E-03	6.02E-03	6.02E-03	6.02E-03	6.02E-03	6.02E-03	6.02E-03	7.08E-03
VEGET								
ADULT	1.01E-04	8.28E-04	1.15E-05	6.89E-05	1.55E-05	1.02E-03	1.42E-06	0.00E+00
TEEN	1.59E-04	8.80E-04	1.72E-05	1.05E-04	2.30E-05	1.38E-03	2.49E-06	0.00E+00
CHILD	3.18E-04	5.75E-04	3.77E-05	1.62E-04	3.47E-05	2.64E-03	3.64E-06	0.00E+00
MEAT								
ADULT	2.85E-05	2.23E-04	3.36E-06	2.06E-05	4.29E-06	2.75E-05	8.74E-07	0.00E+00
TEEN	2.26E-05	1.20E-04	2.50E-06	1.60E-05	3.16E-06	1.99E-05	7.83E-07	0.00E+00
CHILD	3.51E-05	6.08E-05	4.07E-06	1.89E-05	3.60E-06	3.01E-05	8.85E-07	0.00E+00
COW MILK								
ADULT	1.76E-05	6.33E-05	9.43E-06	2.90E-05	1.99E-05	7.60E-04	1.10E-07	0.00E+00
TEEN	3.03E-05	7.38E-05	1.50E-05	4.88E-05	3.26E-05	1.20E-03	2.17E-07	0.00E+00
CHILD	6.06E-05	4.83E-05	3.10E-05	7.48E-05	4.96E-05	2.37E-03	3.21E-07	0.00E+00
INFANT	8.70E-05	1.20E-04	4.75E-05	1.37E-04	7.08E-05	5.77E-03	6.52E-07	0.00E+00
GOATMILK								
ADULT	3.70E-06	8.31E-06	3.36E-06	6.21E-06	6.76E-06	9.12E-04	3.97E-08	0.00E+00
TEEN	6.18E-06	9.81E-06	5.81E-06	1.07E-05	1.17E-05	1.44E-03	8.05E-08	0.00E+00
CHILD	1.18E-05	6.54E-06	1.34E-05	1.74E-05	1.89E-05	2.85E-03	1.22E-07	0.00E+00
INFANT	1.89E-05	1.52E-05	2.50E-05	3.68E-05	3.10E-05	6.92E-03	2.30E-07	0.00E+00
INHAL								
ADULT	1.41E-06	2.25E-05	2.76E-07	1.69E-06	6.32E-07	7.57E-05	4.51E-04	0.00E+00
TEEN	1.88E-06	2.05E-05	3.69E-07	2.22E-06	8.40E-07	9.29E-05	6.59E-04	0.00E+00
CHILD	2.12E-06	8.65E-06	4.74E-07	1.95E-06	7.51E-07	1.03E-04	5.34E-04	0.00E+00
INFANT	1.13E-06	3.57E-06	3.30E-07	1.27E-06	4.46E-07	9.42E-05	3.41E-04	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2009(Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 3.66E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.59E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	9.72E-05	9.72E-05	9.72E-05	9.72E-05	9.72E-05	9.72E-05	1.01E-04	2.51E-04
GROUND	1.39E-03	1.39E-03	1.39E-03	1.39E-03	1.39E-03	1.39E-03	1.39E-03	1.64E-03
VEGET								
ADULT	2.35E-05	1.92E-04	4.05E-06	1.60E-05	3.69E-06	2.52E-04	3.33E-07	0.00E+00
TEEN	3.68E-05	2.04E-04	6.10E-06	2.45E-05	5.48E-06	3.39E-04	5.86E-07	0.00E+00
CHILD	7.39E-05	1.33E-04	1.36E-05	3.77E-05	8.28E-06	6.51E-04	8.57E-07	0.00E+00
MEAT								
ADULT	6.60E-06	5.16E-05	7.97E-07	4.77E-06	9.99E-07	6.79E-06	2.03E-07	0.00E+00
TEEN	5.23E-06	2.78E-05	5.94E-07	3.70E-06	7.37E-07	4.92E-06	1.82E-07	0.00E+00
CHILD	8.12E-06	1.41E-05	9.68E-07	4.38E-06	8.39E-07	7.43E-06	2.05E-07	0.00E+00
COW MILK								
ADULT	4.12E-06	1.47E-05	2.29E-06	6.78E-06	4.68E-06	1.88E-04	2.89E-08	0.00E+00
TEEN	7.08E-06	1.71E-05	3.67E-06	1.14E-05	7.69E-06	2.97E-04	5.71E-08	0.00E+00
CHILD	1.41E-05	1.12E-05	7.64E-06	1.75E-05	1.17E-05	5.86E-04	8.49E-08	0.00E+00
INFANT	2.03E-05	2.79E-05	1.18E-05	3.22E-05	1.68E-05	1.42E-03	1.70E-07	0.00E+00
GOATMILK								
ADULT	9.44E-07	1.95E-06	1.00E-06	1.57E-06	1.67E-06	2.25E-04	1.93E-08	0.00E+00
TEEN	1.53E-06	2.31E-06	1.73E-06	2.72E-06	2.90E-06	3.56E-04	3.95E-08	0.00E+00
CHILD	2.87E-06	1.54E-06	4.02E-06	4.45E-06	4.69E-06	7.03E-04	6.03E-08	0.00E+00
INFANT	4.59E-06	3.55E-06	7.31E-06	9.38E-06	7.71E-06	1.71E-03	1.11E-07	0.00E+00
INHAL								
ADULT	2.35E-07	3.74E-06	5.28E-08	2.85E-07	1.13E-07	1.33E-05	7.43E-05	0.00E+00
TEEN	3.13E-07	3.57E-06	7.06E-08	3.75E-07	1.50E-07	1.64E-05	1.09E-04	0.00E+00
CHILD	3.55E-07	2.88E-06	9.10E-08	3.30E-07	1.35E-07	1.82E-05	8.79E-05	0.00E+00
INFANT	1.89E-07	1.87E-06	6.33E-08	2.18E-07	8.08E-08	1.67E-05	5.63E-05	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2009(Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
 AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 7.90E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 6.54E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.26E-05	4.26E-05	4.26E-05	4.26E-05	4.26E-05	4.26E-05	4.34E-05	9.31E-05
GROUND	7.17E-05	7.17E-05	7.17E-05	7.17E-05	7.17E-05	7.17E-05	7.17E-05	8.44E-05
VEGET								
ADULT	1.24E-06	9.92E-06	7.01E-07	8.56E-07	2.20E-07	1.73E-05	1.86E-08	0.00E+00
TEEN	1.93E-06	1.06E-05	1.07E-06	1.31E-06	3.28E-07	2.34E-05	3.29E-08	0.00E+00
CHILD	3.87E-06	6.90E-06	2.42E-06	2.02E-06	5.00E-07	4.48E-05	4.83E-08	0.00E+00
MEAT								
ADULT	3.41E-07	2.66E-06	4.74E-08	2.47E-07	5.32E-08	4.67E-07	1.04E-08	0.00E+00
TEEN	2.70E-07	1.43E-06	3.55E-08	1.92E-07	3.94E-08	3.38E-07	9.32E-09	0.00E+00
CHILD	4.19E-07	7.24E-07	5.85E-08	2.28E-07	4.49E-08	5.10E-07	1.05E-08	0.00E+00
COW MILK								
ADULT	2.27E-07	7.64E-07	1.56E-07	3.74E-07	2.65E-07	1.30E-05	2.66E-09	0.00E+00
TEEN	3.85E-07	8.91E-07	2.54E-07	6.33E-07	4.38E-07	2.05E-05	5.37E-09	0.00E+00
CHILD	7.60E-07	5.84E-07	5.47E-07	9.79E-07	6.73E-07	4.05E-05	8.11E-09	0.00E+00
INFANT	1.10E-06	1.46E-06	8.69E-07	1.82E-06	9.82E-07	9.85E-05	1.55E-08	0.00E+00
GOATMILK								
ADULT	7.77E-08	1.10E-07	1.29E-07	1.26E-07	1.18E-07	1.55E-05	4.58E-09	0.00E+00
TEEN	1.12E-07	1.31E-07	2.24E-07	2.19E-07	2.07E-07	2.46E-05	9.44E-09	0.00E+00
CHILD	1.89E-07	8.92E-08	5.23E-07	3.66E-07	3.37E-07	4.86E-05	1.45E-08	0.00E+00
INFANT	2.99E-07	1.94E-07	9.03E-07	7.68E-07	5.59E-07	1.18E-04	2.63E-08	0.00E+00
INHAL								
ADULT	3.27E-08	4.97E-07	1.39E-08	4.23E-08	2.20E-08	2.28E-06	9.33E-06	0.00E+00
TEEN	4.36E-08	5.18E-07	1.86E-08	5.61E-08	2.97E-08	2.84E-06	1.36E-05	0.00E+00
CHILD	4.94E-08	7.44E-07	2.42E-08	5.02E-08	2.70E-08	3.21E-06	1.11E-05	0.00E+00
INFANT	2.73E-08	5.66E-07	1.65E-08	3.54E-08	1.67E-08	2.93E-06	7.10E-06	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 1.22E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 9.95E-05 MILLRADS

PATHWAY	T. BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	6.47E-05	6.47E-05	6.47E-05	6.47E-05	6.47E-05	6.47E-05	6.60E-05	1.42E-04
GROUND	3.12E-04	3.12E-04	3.12E-04	3.12E-04	3.12E-04	3.12E-04	3.12E-04	3.68E-04
VEGET								
ADULT	5.43E-06	4.32E-05	3.44E-06	3.75E-06	9.83E-07	7.93E-05	8.22E-08	0.00E+00
TEEN	8.45E-06	4.60E-05	5.25E-06	5.75E-06	1.47E-06	1.07E-04	1.46E-07	0.00E+00
CHILD	1.69E-05	3.01E-05	1.19E-05	8.86E-06	2.24E-06	2.05E-04	2.14E-07	0.00E+00
MEAT								
ADULT	1.49E-06	1.16E-05	2.12E-07	1.08E-06	2.33E-07	2.14E-06	4.53E-08	0.00E+00
TEEN	1.18E-06	6.23E-06	1.59E-07	8.38E-07	1.73E-07	1.55E-06	4.06E-08	0.00E+00
CHILD	1.82E-06	3.15E-06	2.62E-07	9.93E-07	1.97E-07	2.34E-06	4.60E-08	0.00E+00
COW MILK								
ADULT	1.00E-06	3.33E-06	7.10E-07	1.65E-06	1.18E-06	5.93E-05	1.25E-08	0.00E+00
TEEN	1.69E-06	3.89E-06	1.16E-06	2.80E-06	1.95E-06	9.38E-05	2.53E-08	0.00E+00
CHILD	3.33E-06	2.55E-06	2.51E-06	4.33E-06	2.99E-06	1.86E-04	3.83E-08	0.00E+00
INFANT	4.82E-06	6.38E-06	4.00E-06	8.05E-06	4.38E-06	4.51E-04	7.30E-08	0.00E+00
GOATMILK								
ADULT	3.62E-07	4.84E-07	6.23E-07	5.84E-07	5.43E-07	7.12E-05	2.28E-08	0.00E+00
TEEN	5.17E-07	5.81E-07	1.08E-06	1.02E-06	9.49E-07	1.13E-04	4.70E-08	0.00E+00
CHILD	8.56E-07	3.97E-07	2.53E-06	1.70E-06	1.55E-06	2.23E-04	7.22E-08	0.00E+00
INFANT	1.35E-06	8.56E-07	4.36E-06	3.58E-06	2.57E-06	5.41E-04	1.31E-07	0.00E+00
INHAL								
ADULT	5.52E-08	8.51E-07	2.23E-08	7.09E-08	3.55E-08	3.66E-06	1.60E-05	0.00E+00
TEEN	7.37E-08	8.91E-07	2.97E-08	9.40E-08	4.78E-08	4.54E-06	2.34E-05	0.00E+00
CHILD	8.36E-08	1.33E-06	3.86E-08	8.40E-08	4.34E-08	5.14E-06	1.90E-05	0.00E+00
INFANT	4.59E-08	1.02E-06	2.63E-08	5.87E-08	2.68E-08	4.69E-06	1.22E-05	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2009

SPECIAL LOCATION NO. 1 A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 2.49E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 9.04E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.36E-04	5.36E-04	5.36E-04	5.36E-04	5.36E-04	5.36E-04	5.60E-04	1.48E-03
GROUND	7.17E-03	7.17E-03	7.17E-03	7.17E-03	7.17E-03	7.17E-03	7.17E-03	8.43E-03
VEGET ADULT	1.22E-04	9.82E-04	7.23E-05	7.90E-05	1.96E-05	1.71E-03	1.30E-06	0.00E+00
TEEN	1.90E-04	1.05E-03	1.18E-04	1.21E-04	2.93E-05	2.31E-03	2.29E-06	0.00E+00
CHILD	3.83E-04	6.85E-04	2.82E-04	1.86E-04	4.47E-05	4.42E-03	3.34E-06	0.00E+00
MEAT ADULT	3.33E-05	2.62E-04	4.00E-06	2.29E-05	4.67E-06	4.62E-05	7.97E-07	0.00E+00
TEEN	2.64E-05	1.41E-04	3.02E-06	1.77E-05	3.45E-06	3.34E-05	7.13E-07	0.00E+00
CHILD	4.09E-05	7.14E-05	5.02E-06	2.10E-05	3.94E-06	5.05E-05	8.06E-07	0.00E+00
COW MILK ADULT	2.03E-05	7.37E-05	1.38E-05	3.27E-05	2.37E-05	1.28E-03	1.07E-07	0.00E+00
TEEN	3.50E-05	8.61E-05	2.29E-05	5.52E-05	3.92E-05	2.02E-03	2.11E-07	0.00E+00
CHILD	6.99E-05	5.65E-05	5.01E-05	8.51E-05	6.03E-05	3.99E-03	3.14E-07	0.00E+00
INFANT	1.02E-04	1.33E-04	8.37E-05	1.59E-04	8.85E-05	9.71E-03	6.32E-07	0.00E+00
GOATMILK ADULT	5.27E-06	1.09E-05	1.07E-05	8.53E-06	1.02E-05	1.53E-03	5.62E-08	0.00E+00
TEEN	8.75E-06	1.31E-05	1.92E-05	1.48E-05	1.79E-05	2.43E-03	1.15E-07	0.00E+00
CHILD	1.67E-05	8.98E-06	4.63E-05	2.45E-05	2.91E-05	4.79E-03	1.75E-07	0.00E+00
INFANT	2.78E-05	1.82E-05	8.81E-05	5.33E-05	4.86E-05	1.16E-02	3.25E-07	0.00E+00
INHAL ADULT	1.78E-06	2.78E-05	7.78E-07	2.13E-06	1.06E-06	1.42E-04	5.50E-04	0.00E+00
TEEN	2.38E-06	2.77E-05	1.08E-06	2.82E-06	1.43E-06	1.75E-04	8.03E-04	0.00E+00
CHILD	2.68E-06	3.35E-05	1.45E-06	2.51E-06	1.30E-06	1.98E-04	6.51E-04	0.00E+00
INFANT	1.45E-06	2.46E-05	1.01E-06	1.71E-06	8.04E-07	1.81E-04	4.18E-04	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
 AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 1.56E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 5.55E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.27E-04	3.27E-04	3.27E-04	3.27E-04	3.27E-04	3.27E-04	3.43E-04	9.12E-04
GROUND	4.49E-03	4.49E-03	4.49E-03	4.49E-03	4.49E-03	4.49E-03	4.49E-03	5.28E-03
VEGET								
ADULT	7.61E-05	6.15E-04	4.40E-05	4.94E-05	1.22E-05	1.06E-03	8.11E-07	0.00E+00
TEEN	1.19E-04	6.55E-04	7.18E-05	7.56E-05	1.82E-05	1.43E-03	1.43E-06	0.00E+00
CHILD	2.40E-04	4.29E-04	1.73E-04	1.16E-04	2.78E-05	2.75E-03	2.09E-06	0.00E+00
MEAT								
ADULT	2.08E-05	1.64E-04	2.49E-06	1.43E-05	2.92E-06	2.87E-05	4.99E-07	0.00E+00
TEEN	1.65E-05	8.84E-05	1.88E-06	1.11E-05	2.16E-06	2.08E-05	4.47E-07	0.00E+00
CHILD	2.57E-05	4.47E-05	3.13E-06	1.31E-05	2.46E-06	3.13E-05	5.05E-07	0.00E+00
COW MILK								
ADULT	1.27E-05	4.62E-05	8.58E-06	2.04E-05	1.48E-05	7.93E-04	6.44E-08	0.00E+00
TEEN	2.19E-05	5.39E-05	1.42E-05	3.45E-05	2.45E-05	1.25E-03	1.26E-07	0.00E+00
CHILD	4.37E-05	3.54E-05	3.10E-05	5.32E-05	3.76E-05	2.48E-03	1.88E-07	0.00E+00
INFANT	6.38E-05	8.34E-05	5.18E-05	9.90E-05	5.52E-05	6.02E-03	3.80E-07	0.00E+00
GOATMILK								
ADULT	3.23E-06	6.80E-06	6.50E-06	5.24E-06	6.33E-06	9.52E-04	2.67E-08	0.00E+00
TEEN	5.41E-06	8.18E-06	1.17E-05	9.09E-06	1.11E-05	1.51E-03	5.43E-08	0.00E+00
CHILD	1.04E-05	5.60E-06	2.82E-05	1.50E-05	1.80E-05	2.97E-03	8.26E-08	0.00E+00
INFANT	1.73E-05	1.14E-05	5.39E-05	3.27E-05	3.01E-05	7.23E-03	1.55E-07	0.00E+00
INHAL								
ADULT	1.15E-06	1.80E-05	4.99E-07	1.37E-06	6.77E-07	9.04E-05	3.56E-04	0.00E+00
TEEN	1.53E-06	1.79E-05	6.93E-07	1.82E-06	9.12E-07	1.12E-04	5.20E-04	0.00E+00
CHILD	1.73E-06	2.15E-05	9.29E-07	1.61E-06	8.30E-07	1.26E-04	4.21E-04	0.00E+00
INFANT	9.38E-07	1.58E-05	6.50E-07	1.10E-06	5.13E-07	1.15E-04	2.71E-04	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 5.80E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 3.38E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.13E-04	2.13E-04	2.13E-04	2.13E-04	2.13E-04	2.13E-04	2.19E-04	5.06E-04
GROUND	2.57E-03	2.57E-03	2.57E-03	2.57E-03	2.57E-03	2.57E-03	2.57E-03	3.02E-03
VEGET								
ADULT	4.40E-05	3.53E-04	3.29E-05	2.87E-05	7.43E-06	6.70E-04	4.86E-07	0.00E+00
TEEN	6.87E-05	3.76E-04	5.29E-05	4.39E-05	1.11E-05	9.04E-04	8.58E-07	0.00E+00
CHILD	1.38E-04	2.46E-04	1.26E-04	6.77E-05	1.70E-05	1.73E-03	1.26E-06	0.00E+00
MEAT								
ADULT	1.19E-05	9.39E-05	1.52E-06	8.22E-06	1.70E-06	1.81E-05	2.85E-07	0.00E+00
TEEN	9.46E-06	5.06E-05	1.15E-06	6.38E-06	1.26E-06	1.31E-05	2.56E-07	0.00E+00
CHILD	1.47E-05	2.56E-05	1.92E-06	7.55E-06	1.43E-06	1.98E-05	2.89E-07	0.00E+00
COW MILK								
ADULT	7.49E-06	2.65E-05	5.48E-06	1.20E-05	8.82E-06	5.01E-04	5.41E-08	0.00E+00
TEEN	1.28E-05	3.10E-05	9.13E-06	2.04E-05	1.46E-05	7.93E-04	1.08E-07	0.00E+00
CHILD	2.55E-05	2.04E-05	2.01E-05	3.15E-05	2.25E-05	1.57E-03	1.62E-07	0.00E+00
INFANT	3.72E-05	4.80E-05	3.37E-05	5.89E-05	3.33E-05	3.81E-03	3.16E-07	0.00E+00
GOATMILK								
ADULT	2.27E-06	4.03E-06	4.89E-06	3.65E-06	4.09E-06	6.01E-04	6.77E-08	0.00E+00
TEEN	3.58E-06	4.87E-06	8.75E-06	6.35E-06	7.16E-06	9.51E-04	1.39E-07	0.00E+00
CHILD	6.54E-06	3.36E-06	2.10E-05	1.06E-05	1.17E-05	1.88E-03	2.14E-07	0.00E+00
INFANT	1.08E-05	6.67E-06	3.89E-05	2.29E-05	1.95E-05	4.57E-03	3.90E-07	0.00E+00
INHAL								
ADULT	3.25E-07	5.02E-06	1.59E-07	3.98E-07	2.10E-07	2.66E-05	9.74E-05	0.00E+00
TEEN	4.34E-07	5.16E-06	2.20E-07	5.27E-07	2.84E-07	3.30E-05	1.42E-04	0.00E+00
CHILD	4.91E-07	7.39E-06	2.95E-07	4.71E-07	2.59E-07	3.73E-05	1.15E-04	0.00E+00
INFANT	2.69E-07	5.63E-06	2.05E-07	3.28E-07	1.62E-07	3.41E-05	7.42E-05	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 9.84E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 7.38E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.78E-05	4.78E-05	4.78E-05	4.78E-05	4.78E-05	4.78E-05	4.88E-05	1.09E-04
GROUND	9.56E-05	9.56E-05	9.56E-05	9.56E-05	9.56E-05	9.56E-05	9.56E-05	1.12E-04
VEGET								
ADULT	1.67E-06	1.32E-05	1.77E-06	1.10E-06	3.06E-07	2.92E-05	1.96E-08	0.00E+00
TEEN	2.60E-06	1.41E-05	2.80E-06	1.68E-06	4.57E-07	3.93E-05	3.48E-08	0.00E+00
CHILD	5.22E-06	9.22E-06	6.60E-06	2.60E-06	7.04E-07	7.54E-05	5.11E-08	0.00E+00
MEAT								
ADULT	4.46E-07	3.49E-06	6.36E-08	3.08E-07	6.50E-08	7.86E-07	1.06E-08	0.00E+00
TEEN	3.53E-07	1.88E-06	4.83E-08	2.39E-07	4.81E-08	5.70E-07	9.50E-09	0.00E+00
CHILD	5.47E-07	9.51E-07	8.11E-08	2.83E-07	5.51E-08	8.60E-07	1.07E-08	0.00E+00
COW MILK								
ADULT	2.94E-07	9.95E-07	2.44E-07	4.73E-07	3.52E-07	2.18E-05	3.22E-09	0.00E+00
TEEN	4.97E-07	1.16E-06	4.09E-07	8.02E-07	5.86E-07	3.46E-05	6.52E-09	0.00E+00
CHILD	9.79E-07	7.65E-07	9.12E-07	1.25E-06	9.08E-07	6.83E-05	9.88E-09	0.00E+00
INFANT	1.44E-06	1.81E-06	1.53E-06	2.35E-06	1.35E-06	1.66E-04	1.87E-08	0.00E+00
GOATMILK								
ADULT	1.14E-07	1.60E-07	2.64E-07	1.81E-07	1.84E-07	2.62E-05	6.20E-09	0.00E+00
TEEN	1.67E-07	1.94E-07	4.69E-07	3.16E-07	3.23E-07	4.15E-05	1.28E-08	0.00E+00
CHILD	2.85E-07	1.35E-07	1.12E-06	5.32E-07	5.29E-07	8.20E-05	1.96E-08	0.00E+00
INFANT	4.65E-07	2.60E-07	2.02E-06	1.14E-06	8.87E-07	1.99E-04	3.57E-08	0.00E+00
INHAL								
ADULT	3.47E-08	5.29E-07	2.36E-08	4.46E-08	2.82E-08	3.36E-06	9.63E-06	0.00E+00
TEEN	4.61E-08	5.65E-07	3.22E-08	5.93E-08	3.82E-08	4.19E-06	1.41E-05	0.00E+00
CHILD	5.22E-08	8.78E-07	4.27E-08	5.36E-08	3.50E-08	4.79E-06	1.14E-05	0.00E+00
INFANT	2.91E-08	6.75E-07	2.90E-08	3.89E-08	2.21E-08	4.37E-06	7.35E-06	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
 AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 2.33E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.87E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.21E-04	1.21E-04	1.21E-04	1.21E-04	1.21E-04	1.21E-04	1.23E-04	2.68E-04
GROUND	4.81E-04	4.81E-04	4.81E-04	4.81E-04	4.81E-04	4.81E-04	4.81E-04	5.65E-04
VEGET								
ADULT	8.30E-06	6.61E-05	7.45E-06	5.44E-06	1.46E-06	1.36E-04	9.45E-08	0.00E+00
TEEN	1.29E-05	7.05E-05	1.19E-05	8.33E-06	2.18E-06	1.83E-04	1.67E-07	0.00E+00
CHILD	2.60E-05	4.62E-05	2.81E-05	1.28E-05	3.35E-06	3.50E-04	2.45E-07	0.00E+00
MEAT								
ADULT	2.24E-06	1.76E-05	3.01E-07	1.54E-06	3.22E-07	3.66E-06	5.33E-08	0.00E+00
TEEN	1.77E-06	9.45E-06	2.28E-07	1.20E-06	2.38E-07	2.65E-06	4.78E-08	0.00E+00
CHILD	2.75E-06	4.78E-06	3.82E-07	1.42E-06	2.72E-07	4.00E-06	5.41E-08	0.00E+00
COW MILK								
ADULT	1.44E-06	4.98E-06	1.12E-06	2.31E-06	1.71E-06	1.01E-04	1.30E-08	0.00E+00
TEEN	2.44E-06	5.82E-06	1.87E-06	3.92E-06	2.84E-06	1.60E-04	2.62E-08	0.00E+00
CHILD	4.84E-06	3.83E-06	4.15E-06	6.07E-06	4.38E-06	3.17E-04	3.95E-08	0.00E+00
INFANT	7.08E-06	9.03E-06	6.96E-06	1.14E-05	6.50E-06	7.71E-04	7.57E-08	0.00E+00
GOATMILK								
ADULT	4.96E-07	7.77E-07	1.11E-06	7.90E-07	8.42E-07	1.22E-04	2.14E-08	0.00E+00
TEEN	7.51E-07	9.41E-07	1.98E-06	1.38E-06	1.48E-06	1.93E-04	4.42E-08	0.00E+00
CHILD	1.32E-06	6.53E-07	4.73E-06	2.31E-06	2.41E-06	3.81E-04	6.78E-08	0.00E+00
INFANT	2.17E-06	1.28E-06	8.64E-06	4.97E-06	4.04E-06	9.25E-04	1.23E-07	0.00E+00
INHAL								
ADULT	9.49E-08	1.43E-06	5.52E-08	1.20E-07	6.98E-08	8.11E-06	2.69E-05	0.00E+00
TEEN	1.27E-07	1.51E-06	7.58E-08	1.60E-07	9.45E-08	1.01E-05	3.93E-05	0.00E+00
CHILD	1.44E-07	2.42E-06	1.01E-07	1.44E-07	8.66E-08	1.14E-05	3.19E-05	0.00E+00
INFANT	7.99E-08	1.88E-06	7.01E-08	1.04E-07	5.44E-08	1.05E-05	2.05E-05	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2009

SPECIAL LOCATION NO. 1 A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 3.74E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.99E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.26E-03	1.26E-03	1.26E-03	1.26E-03	1.26E-03	1.26E-03	1.29E-03	3.26E-03
GROUND	1.02E-02	1.02E-02	1.02E-02	1.02E-02	1.02E-02	1.02E-02	1.02E-02	1.20E-02
VEGET								
ADULT	1.91E-04	1.44E-03	4.44E-04	1.23E-04	5.98E-05	9.44E-03	1.26E-06	0.00E+00
TEEN	2.98E-04	1.54E-03	7.33E-04	1.88E-04	9.04E-05	1.27E-02	2.22E-06	0.00E+00
CHILD	6.03E-04	1.02E-03	1.79E-03	2.94E-04	1.43E-04	2.44E-02	3.24E-06	0.00E+00
MEAT								
ADULT	4.60E-05	3.68E-04	7.78E-06	2.88E-05	5.62E-06	2.55E-04	7.70E-07	0.00E+00
TEEN	3.65E-05	1.98E-04	6.22E-06	2.24E-05	4.24E-06	1.85E-04	6.90E-07	0.00E+00
CHILD	5.66E-05	1.00E-04	1.11E-05	2.66E-05	4.95E-06	2.79E-04	7.79E-07	0.00E+00
COW MILK								
ADULT	3.32E-05	1.04E-04	4.25E-05	5.07E-05	5.34E-05	7.05E-03	1.07E-07	0.00E+00
TEEN	5.67E-05	1.22E-04	7.55E-05	8.72E-05	9.23E-05	1.11E-02	2.10E-07	0.00E+00
CHILD	1.11E-04	8.18E-05	1.79E-04	1.41E-04	1.49E-04	2.20E-02	3.12E-07	0.00E+00
INFANT	1.79E-04	1.53E-04	3.40E-04	2.95E-04	2.43E-04	5.35E-02	6.27E-07	0.00E+00
GOATMILK								
ADULT	1.87E-05	2.48E-05	6.03E-05	2.98E-05	4.65E-05	8.46E-03	6.31E-08	0.00E+00
TEEN	3.13E-05	3.15E-05	1.10E-04	5.26E-05	8.25E-05	1.34E-02	1.29E-07	0.00E+00
CHILD	5.95E-05	2.32E-05	2.71E-04	9.03E-05	1.37E-04	2.64E-02	1.97E-07	0.00E+00
INFANT	1.09E-04	3.17E-05	5.27E-04	2.14E-04	2.36E-04	6.42E-02	3.64E-07	0.00E+00
INHAL								
ADULT	2.88E-06	3.76E-05	3.51E-06	3.70E-06	3.51E-06	5.99E-04	6.80E-04	0.00E+00
TEEN	3.81E-06	5.11E-05	4.97E-06	4.97E-06	4.80E-06	7.39E-04	9.99E-04	0.00E+00
CHILD	4.24E-06	1.81E-04	6.78E-06	4.60E-06	4.47E-06	8.29E-04	8.12E-04	0.00E+00
INFANT	2.50E-06	1.53E-04	4.80E-06	3.61E-06	2.90E-06	7.58E-04	5.30E-04	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 2 A Site Boundary
AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 2.48E-03 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.31E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	8.27E-04	8.27E-04	8.27E-04	8.27E-04	8.27E-04	8.27E-04	8.52E-04	2.15E-03
GROUND	6.47E-03	6.47E-03	6.47E-03	6.47E-03	6.47E-03	6.47E-03	6.47E-03	7.61E-03
VEGET								
ADULT	1.21E-04	9.07E-04	2.82E-04	7.79E-05	3.83E-05	6.07E-03	7.99E-07	0.00E+00
TEEN	1.89E-04	9.73E-04	4.65E-04	1.19E-04	5.79E-05	8.18E-03	1.41E-06	0.00E+00
CHILD	3.81E-04	6.43E-04	1.13E-03	1.87E-04	9.19E-05	1.57E-02	2.06E-06	0.00E+00
MEAT								
ADULT	2.91E-05	2.33E-04	4.93E-06	1.82E-05	3.56E-06	1.64E-04	4.86E-07	0.00E+00
TEEN	2.30E-05	1.25E-04	3.94E-06	1.42E-05	2.69E-06	1.19E-04	4.36E-07	0.00E+00
CHILD	3.58E-05	6.33E-05	7.03E-06	1.68E-05	3.14E-06	1.79E-04	4.93E-07	0.00E+00
COW MILK								
ADULT	2.11E-05	6.55E-05	2.71E-05	3.23E-05	3.41E-05	4.53E-03	6.92E-08	0.00E+00
TEEN	3.61E-05	7.74E-05	4.81E-05	5.55E-05	5.90E-05	7.16E-03	1.37E-07	0.00E+00
CHILD	7.07E-05	5.18E-05	1.14E-04	8.98E-05	9.51E-05	1.41E-02	2.03E-07	0.00E+00
INFANT	1.14E-04	9.71E-05	2.17E-04	1.88E-04	1.55E-04	3.44E-02	4.07E-07	0.00E+00
GOATMILK								
ADULT	1.20E-05	1.58E-05	3.84E-05	1.92E-05	2.98E-05	5.43E-03	4.55E-08	0.00E+00
TEEN	2.01E-05	2.00E-05	7.02E-05	3.38E-05	5.30E-05	8.59E-03	9.32E-08	0.00E+00
CHILD	3.81E-05	1.47E-05	1.72E-04	5.81E-05	8.77E-05	1.70E-02	1.42E-07	0.00E+00
INFANT	6.95E-05	2.01E-05	3.35E-04	1.38E-04	1.51E-04	4.12E-02	2.63E-07	0.00E+00
INHAL								
ADULT	1.88E-06	2.45E-05	2.29E-06	2.42E-06	2.31E-06	3.94E-04	4.42E-04	0.00E+00
TEEN	2.49E-06	3.32E-05	3.24E-06	3.25E-06	3.15E-06	4.87E-04	6.49E-04	0.00E+00
CHILD	2.77E-06	1.18E-04	4.43E-06	3.01E-06	2.94E-06	5.46E-04	5.28E-04	0.00E+00
INFANT	1.63E-06	9.96E-05	3.14E-06	2.37E-06	1.91E-06	4.99E-04	3.44E-04	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 3 A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.81E-03 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.90E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.26E-03	1.26E-03	1.26E-03	1.26E-03	1.26E-03	1.26E-03	1.28E-03	2.65E-03
GROUND	4.16E-03	4.16E-03	4.16E-03	4.16E-03	4.16E-03	4.16E-03	4.16E-03	4.89E-03
VEGET								
ADULT	8.02E-05	5.85E-04	1.93E-04	5.41E-05	3.11E-05	5.10E-03	5.44E-07	0.00E+00
TEEN	1.25E-04	6.28E-04	3.17E-04	8.26E-05	4.70E-05	6.88E-03	9.61E-07	0.00E+00
CHILD	2.52E-04	4.15E-04	7.69E-04	1.30E-04	7.48E-05	1.32E-02	1.41E-06	0.00E+00
MEAT								
ADULT	1.88E-05	1.49E-04	3.36E-06	1.18E-05	2.49E-06	1.38E-04	3.13E-07	0.00E+00
TEEN	1.49E-05	8.05E-05	2.69E-06	9.21E-06	1.89E-06	9.97E-05	2.81E-07	0.00E+00
CHILD	2.31E-05	4.07E-05	4.79E-06	1.09E-05	2.22E-06	1.51E-04	3.18E-07	0.00E+00
COW MILK								
ADULT	1.53E-05	4.29E-05	1.99E-05	2.38E-05	2.68E-05	3.80E-03	6.71E-08	0.00E+00
TEEN	2.60E-05	5.09E-05	3.54E-05	4.11E-05	4.65E-05	6.02E-03	1.34E-07	0.00E+00
CHILD	5.05E-05	3.41E-05	8.42E-05	6.70E-05	7.54E-05	1.19E-02	2.02E-07	0.00E+00
INFANT	8.25E-05	6.35E-05	1.61E-04	1.43E-04	1.25E-04	2.89E-02	3.92E-07	0.00E+00
GOATMILK								
ADULT	1.00E-05	1.11E-05	2.83E-05	1.62E-05	2.50E-05	4.57E-03	9.77E-08	0.00E+00
TEEN	1.64E-05	1.42E-05	5.16E-05	2.87E-05	4.45E-05	7.22E-03	2.01E-07	0.00E+00
CHILD	3.06E-05	1.05E-05	1.26E-04	4.94E-05	7.37E-05	1.43E-02	3.09E-07	0.00E+00
INFANT	5.61E-05	1.40E-05	2.45E-04	1.17E-04	1.27E-04	3.47E-02	5.62E-07	0.00E+00
INHAL								
ADULT	6.66E-07	8.21E-06	8.24E-07	8.86E-07	8.85E-07	1.48E-04	1.46E-04	0.00E+00
TEEN	8.82E-07	1.13E-05	1.16E-06	1.19E-06	1.21E-06	1.83E-04	2.15E-04	0.00E+00
CHILD	9.81E-07	4.10E-05	1.59E-06	1.11E-06	1.13E-06	2.05E-04	1.75E-04	0.00E+00
INFANT	5.86E-07	3.47E-05	1.13E-06	8.89E-07	7.33E-07	1.87E-04	1.14E-04	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 4 A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 5.75E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 7.94E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.31E-04	5.31E-04	5.31E-04	5.31E-04	5.31E-04	5.31E-04	5.37E-04	1.06E-03
GROUND	1.37E-04	1.37E-04	1.37E-04	1.37E-04	1.37E-04	1.37E-04	1.37E-04	1.61E-04
VEGET								
ADULT	2.76E-06	1.93E-05	6.89E-06	1.97E-06	1.32E-06	2.24E-04	1.93E-08	0.00E+00
TEEN	4.27E-06	2.08E-05	1.13E-05	3.00E-06	2.00E-06	3.02E-04	3.43E-08	0.00E+00
CHILD	8.57E-06	1.37E-05	2.73E-05	4.77E-06	3.20E-06	5.79E-04	5.04E-08	0.00E+00
MEAT								
ADULT	6.21E-07	4.92E-06	1.19E-07	3.96E-07	9.08E-08	6.04E-06	1.03E-08	0.00E+00
TEEN	4.92E-07	2.65E-06	9.54E-08	3.08E-07	6.94E-08	4.37E-06	9.27E-09	0.00E+00
CHILD	7.63E-07	1.34E-06	1.70E-07	3.67E-07	8.22E-08	6.60E-06	1.05E-08	0.00E+00
COW MILK								
ADULT	5.87E-07	1.45E-06	7.72E-07	9.24E-07	1.11E-06	1.67E-04	3.28E-09	0.00E+00
TEEN	9.87E-07	1.73E-06	1.37E-06	1.60E-06	1.93E-06	2.64E-04	6.64E-09	0.00E+00
CHILD	1.90E-06	1.16E-06	3.27E-06	2.64E-06	3.15E-06	5.22E-04	1.01E-08	0.00E+00
INFANT	3.15E-06	2.14E-06	6.29E-06	5.76E-06	5.25E-06	1.27E-03	1.90E-08	0.00E+00
GOATMILK								
ADULT	4.37E-07	4.12E-07	1.10E-06	7.16E-07	1.10E-06	2.00E-04	6.46E-09	0.00E+00
TEEN	7.07E-07	5.28E-07	2.00E-06	1.27E-06	1.95E-06	3.17E-04	1.33E-08	0.00E+00
CHILD	1.29E-06	3.94E-07	4.87E-06	2.19E-06	3.24E-06	6.26E-04	2.05E-08	0.00E+00
INFANT	2.37E-06	5.10E-07	9.46E-06	5.19E-06	5.59E-06	1.52E-03	3.72E-08	0.00E+00
INHAL								
ADULT	7.55E-08	7.20E-07	9.74E-08	1.11E-07	1.25E-07	1.98E-05	1.24E-05	0.00E+00
TEEN	9.98E-08	8.71E-07	1.37E-07	1.50E-07	1.71E-07	2.45E-05	1.81E-05	0.00E+00
CHILD	1.11E-07	2.20E-06	1.86E-07	1.42E-07	1.60E-07	2.75E-05	1.47E-05	0.00E+00
INFANT	6.95E-08	1.81E-06	1.34E-07	1.19E-07	1.04E-07	2.51E-05	9.59E-06	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2009 (Continued)

SPECIAL LOCATION NO. 5 A Nearest Garden
 AT 1.30 MILES SW

ANNUAL BETA AIR DOSE = 8.63E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.09E-03 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	7.25E-04	7.25E-04	7.25E-04	7.25E-04	7.25E-04	7.25E-04	7.34E-04	1.47E-03
GROUND	6.36E-04	6.36E-04	6.36E-04	6.36E-04	6.36E-04	6.36E-04	6.36E-04	7.48E-04
VEGET								
ADULT	1.26E-05	8.98E-05	3.10E-05	8.80E-06	5.60E-06	9.38E-04	8.71E-08	0.00E+00
TEEN	1.96E-05	9.63E-05	5.09E-05	1.34E-05	8.48E-06	1.27E-03	1.55E-07	0.00E+00
CHILD	3.93E-05	6.38E-05	1.23E-04	2.13E-05	1.35E-05	2.43E-03	2.27E-07	0.00E+00
MEAT								
ADULT	2.88E-06	2.29E-05	5.39E-07	1.83E-06	4.06E-07	2.53E-05	4.81E-08	0.00E+00
TEEN	2.28E-06	1.23E-05	4.31E-07	1.42E-06	3.09E-07	1.83E-05	4.31E-08	0.00E+00
CHILD	3.54E-06	6.23E-06	7.68E-07	1.69E-06	3.65E-07	2.77E-05	4.87E-08	0.00E+00
COW MILK								
ADULT	2.58E-06	6.68E-06	3.37E-06	4.04E-06	4.73E-06	7.00E-04	1.32E-08	0.00E+00
TEEN	4.35E-06	7.93E-06	6.01E-06	6.99E-06	8.26E-06	1.11E-03	2.67E-08	0.00E+00
CHILD	8.40E-06	5.34E-06	1.43E-05	1.15E-05	1.34E-05	2.19E-03	4.04E-08	0.00E+00
INFANT	1.39E-05	9.87E-06	2.74E-05	2.49E-05	2.23E-05	5.32E-03	7.70E-08	0.00E+00
GOATMILK								
ADULT	1.84E-06	1.83E-06	4.81E-06	3.00E-06	4.60E-06	8.40E-04	2.40E-08	0.00E+00
TEEN	2.98E-06	2.34E-06	8.74E-06	5.30E-06	8.19E-06	1.33E-03	4.94E-08	0.00E+00
CHILD	5.50E-06	1.74E-06	2.13E-05	9.15E-06	1.36E-05	2.63E-03	7.59E-08	0.00E+00
INFANT	1.01E-05	2.28E-06	4.15E-05	2.17E-05	2.35E-05	6.38E-03	1.38E-07	0.00E+00
INHAL								
ADULT	1.87E-07	2.14E-06	2.36E-07	2.59E-07	2.73E-07	4.44E-05	3.72E-05	0.00E+00
TEEN	2.48E-07	3.03E-06	3.32E-07	3.50E-07	3.73E-07	5.49E-05	5.47E-05	0.00E+00
CHILD	2.76E-07	1.13E-05	4.52E-07	3.28E-07	3.48E-07	6.16E-05	4.45E-05	0.00E+00
INFANT	1.68E-07	9.59E-06	3.24E-07	2.68E-07	2.27E-07	5.63E-05	2.91E-05	0.00E+00

TABLE 8. DOSES TO POPULATION WITHIN 50 MILES, JANUARY-MARCH 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T. BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 1.13E-03 : : 95.52% :	: 1.13E-03 : : 94.81% :	: 1.13E-03 : : 94.10% :	: 1.13E-03 : : 95.47% :	: 1.13E-03 : : 95.25% :	: 1.13E-03 : : 39.58% :	: 1.15E-03 : : 95.44% :	: 2.53E-03 : : 97.83% :
GROUND	: 4.78E-05 : : 4.02% :	: 4.78E-05 : : 4.00% :	: 4.78E-05 : : 3.97% :	: 4.78E-05 : : 4.02% :	: 4.78E-05 : : 4.01% :	: 4.78E-05 : : 1.67% :	: 4.78E-05 : : 3.96% :	: 5.62E-05 : : 2.17% :
INHAL	: 1.94E-07 : : .02% :	: 7.01E-07 : : .06% :	: 4.00E-07 : : .03% :	: 3.23E-07 : : .03% :	: 5.23E-07 : : .04% :	: 9.86E-05 : : 3.44% :	: 7.20E-06 : : .60% :	: 0.00E+00 : : .00% :
VEGET	: 1.83E-06 : : .15% :	: 8.89E-06 : : .74% :	: 1.55E-05 : : 1.29% :	: 6.19E-07 : : .05% :	: 1.07E-07 : : .01% :	: 1.99E-05 : : .69% :	: 0.00E+00 : : .00% :	: 0.00E+00 : : .00% :
COW MILK	: 2.94E-06 : : .25% :	: 1.99E-06 : : .17% :	: 7.02E-06 : : .58% :	: 4.81E-06 : : .40% :	: 7.97E-06 : : .67% :	: 1.53E-03 : : 53.48% :	: 1.37E-34 : : .00% :	: 0.00E+00 : : .00% :
MEAT	: 4.47E-07 : : .04% :	: 2.65E-06 : : .22% :	: 3.57E-07 : : .03% :	: 2.63E-07 : : .02% :	: 1.70E-07 : : .01% :	: 3.24E-05 : : 1.13% :	: 0.00E+00 : : .00% :	: 0.00E+00 : : .00% :
TOTAL	: 1.19E-03 :	: 1.20E-03 :	: 1.20E-03 :	: 1.19E-03 :	: 1.19E-03 :	: 2.86E-03 :	: 1.21E-03 :	: 2.59E-03 :

TABLE 9. DOSES TO POPULATION WITHIN 50 MILES, APRIL-JUNE 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 2.04E-05 : : 15.67% :	: 2.04E-05 : : 13.38% :	: 2.04E-05 : : 15.48% :	: 2.04E-05 : : 15.97% :	: 2.04E-05 : : 16.13% :	: 2.04E-05 : : 4.79% :	: 2.07E-05 : : 14.99% :	: 4.91E-05 : : 28.53% :
GROUND	: 1.05E-04 : : 80.22% :	: 1.05E-04 : : 68.52% :	: 1.05E-04 : : 79.26% :	: 1.05E-04 : : 81.76% :	: 1.05E-04 : : 82.60% :	: 1.05E-04 : : 24.51% :	: 1.05E-04 : : 75.58% :	: 1.23E-04 : : 71.47% :
INHAL	: 6.82E-08 : : .05% :	: 8.38E-07 : : .55% :	: 9.27E-08 : : .07% :	: 9.02E-08 : : .07% :	: 1.10E-07 : : .09% :	: 1.84E-05 : : 4.31% :	: 1.30E-05 : : 9.42% :	: 0.00E+00 : : .00% :
VEGET	: 3.40E-06 : : 2.61% :	: 1.81E-05 : : 11.89% :	: 5.02E-06 : : 3.80% :	: 1.35E-06 : : 1.05% :	: 2.56E-08 : : .02% :	: 3.34E-06 : : .78% :	: 2.89E-09 : : .00% :	: 0.00E+00 : : .00% :
COW MILK	: 9.55E-07 : : .73% :	: 2.38E-06 : : 1.56% :	: 1.72E-06 : : 1.30% :	: 1.05E-06 : : .82% :	: 1.44E-06 : : 1.14% :	: 2.74E-04 : : 64.29% :	: 3.87E-09 : : .00% :	: 0.00E+00 : : .00% :
MEAT	: 9.35E-07 : : .72% :	: 6.27E-06 : : 4.10% :	: 1.05E-07 : : .08% :	: 4.13E-07 : : .32% :	: 3.04E-08 : : .02% :	: 5.68E-06 : : 1.33% :	: 2.25E-10 : : .00% :	: 0.00E+00 : : .00% :
TOTAL	: 1.30E-04	: 1.53E-04	: 1.32E-04	: 1.28E-04	: 1.27E-04	: 4.27E-04	: 1.38E-04	: 1.72E-04

TABLE 10. DOSES TO POPULATION WITHIN 50 MILES, JANUARY-JUNE 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.12E-03 87.15%	1.12E-03 85.09%	1.12E-03 85.85%	1.12E-03 87.27%	1.12E-03 87.17%	1.12E-03 34.17%	1.14E-03 86.64%	2.52E-03 93.25%
GROUND	1.55E-04 12.02%	1.55E-04 11.73%	1.55E-04 11.84%	1.55E-04 12.03%	1.55E-04 12.02%	1.55E-04 4.71%	1.55E-04 11.77%	1.82E-04 6.75%
INHAL	2.61E-07 .02%	1.57E-06 .12%	4.81E-07 .04%	4.11E-07 .03%	6.28E-07 .05%	1.16E-04 3.52%	2.09E-05 1.59%	0.00E+00 .00%
VEGET	5.22E-06 .40%	2.70E-05 2.05%	2.05E-05 1.57%	1.97E-06 .15%	1.34E-07 .01%	2.35E-05 .71%	2.82E-09 .00%	0.00E+00 .00%
COW MILK	3.95E-06 .31%	4.38E-06 .33%	8.80E-06 .67%	5.94E-06 .46%	9.54E-06 .74%	1.83E-03 55.70%	3.76E-09 .00%	0.00E+00 .00%
MEAT	1.38E-06 .11%	8.92E-06 .68%	4.63E-07 .04%	6.77E-07 .05%	2.03E-07 .02%	3.86E-05 1.17%	2.19E-10 .00%	0.00E+00 .00%
TOTAL	1.29E-03	1.32E-03	1.31E-03	1.29E-03	1.29E-03	3.29E-03	1.32E-03	2.70E-03

TABLE 11. DOSES TO POPULATION WITHIN 50 MILES, JULY-SEPTEMBER 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T. BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	7.42E-05 46.65%	7.42E-05 42.35%	7.42E-05 46.46%	7.42E-05 47.08%	7.42E-05 47.53%	7.42E-05 29.05%	7.74E-05 44.69%	2.39E-04 71.53%
GROUND	8.08E-05 50.79%	8.08E-05 46.11%	8.08E-05 50.59%	8.08E-05 51.27%	8.08E-05 51.76%	8.08E-05 31.64%	8.08E-05 46.61%	9.50E-05 28.47%
INHAL	5.98E-08 .04%	7.40E-07 .42%	7.49E-08 .05%	6.91E-08 .04%	6.14E-08 .04%	9.66E-06 3.78%	1.51E-05 8.70%	0.00E+00 .00%
VEGET	2.48E-06 1.56%	1.31E-05 7.46%	3.43E-06 2.15%	1.11E-06 .70%	1.01E-07 .06%	1.03E-06 .40%	1.14E-11 .00%	0.00E+00 .00%
COW MILK	8.27E-07 .52%	1.90E-06 1.09%	1.11E-06 .69%	1.05E-06 .67%	8.85E-07 .57%	8.79E-05 34.42%	1.09E-11 .00%	0.00E+00 .00%
MEAT	7.03E-07 .44%	4.51E-06 2.57%	9.31E-08 .06%	3.73E-07 .24%	6.64E-08 .04%	1.80E-06 .70%	1.46E-12 .00%	0.00E+00 .00%
TOTAL	1.59E-04	1.75E-04	1.60E-04	1.58E-04	1.56E-04	2.55E-04	1.73E-04	3.34E-04

TABLE 12. DOSES TO POPULATION WITHIN 50 MILES, OCTOBER-DECEMBER 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T. BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 1.20E-04 : : 30.51% :	: 1.20E-04 : : 26.84% :	: 1.20E-04 : : 31.03% :	: 1.20E-04 : : 30.71% :	: 1.20E-04 : : 31.28% :	: 1.20E-04 : : 21.01% :	: 1.24E-04 : : 28.81% :	: 3.11E-04 : : 50.55% :
GROUND	: 2.59E-04 : : 65.81% :	: 2.59E-04 : : 57.90% :	: 2.59E-04 : : 66.94% :	: 2.59E-04 : : 66.26% :	: 2.59E-04 : : 67.48% :	: 2.59E-04 : : 45.32% :	: 2.59E-04 : : 60.27% :	: 3.04E-04 : : 49.45% :
INHAL	: 1.73E-07 : : .04% :	: 2.34E-06 : : .52% :	: 1.06E-07 : : .03% :	: 2.16E-07 : : .06% :	: 1.34E-07 : : .03% :	: 1.64E-05 : : 2.87% :	: 4.66E-05 : : 10.87% :	: 0.00E+00 : : .00% :
VEGET	: 8.30E-06 : : 2.11% :	: 4.33E-05 : : 9.70% :	: 4.84E-06 : : 1.25% :	: 4.73E-06 : : 1.21% :	: 7.34E-07 : : .19% :	: 2.14E-06 : : .37% :	: 7.31E-08 : : .02% :	: 0.00E+00 : : .00% :
COW MILK	: 3.49E-06 : : .89% :	: 6.95E-06 : : 1.56% :	: 2.50E-06 : : .65% :	: 5.15E-06 : : 1.32% :	: 3.51E-06 : : .92% :	: 1.70E-04 : : 29.81% :	: 4.43E-08 : : .01% :	: 0.00E+00 : : .00% :
MEAT	: 2.51E-06 : : .64% :	: 1.56E-05 : : 3.48% :	: 3.63E-07 : : .09% :	: 1.72E-06 : : .44% :	: 3.66E-07 : : .10% :	: 3.57E-06 : : .63% :	: 7.42E-08 : : .02% :	: 0.00E+00 : : .00% :
TOTAL	: 3.93E-04	: 4.47E-04	: 3.86E-04	: 3.90E-04	: 3.83E-04	: 5.71E-04	: 4.29E-04	: 6.15E-04

TABLE 13. DOSES TO POPULATION WITHIN 50 MILES, JULY-DECEMBER 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 1.90E-04 : : 34.46% :	: 1.90E-04 : : 30.57% :	: 1.90E-04 : : 34.83% :	: 1.90E-04 : : 34.72% :	: 1.90E-04 : : 35.27% :	: 1.90E-04 : : 22.90% :	: 1.96E-04 : : 32.65% :	: 5.34E-04 : : 57.02% :
GROUND	: 3.42E-04 : : 62.17% :	: 3.42E-04 : : 55.15% :	: 3.42E-04 : : 62.84% :	: 3.42E-04 : : 62.63% :	: 3.42E-04 : : 63.63% :	: 3.42E-04 : : 41.31% :	: 3.42E-04 : : 56.86% :	: 4.02E-04 : : 42.98% :
INHAL	: 2.39E-07 : : .04% :	: 3.14E-06 : : .51% :	: 1.92E-07 : : .04% :	: 2.96E-07 : : .05% :	: 2.05E-07 : : .04% :	: 2.73E-05 : : 3.29% :	: 6.29E-05 : : 10.46% :	: 0.00E+00 : : .00% :
VEGET	: 1.08E-05 : : 1.96% :	: 5.64E-05 : : 9.10% :	: 8.38E-06 : : 1.54% :	: 5.84E-06 : : 1.07% :	: 8.37E-07 : : .16% :	: 3.19E-06 : : .39% :	: 7.37E-08 : : .01% :	: 0.00E+00 : : .00% :
COW MILK	: 4.32E-06 : : .79% :	: 8.87E-06 : : 1.43% :	: 3.64E-06 : : .67% :	: 6.22E-06 : : 1.14% :	: 4.41E-06 : : .82% :	: 2.60E-04 : : 31.46% :	: 4.53E-08 : : .01% :	: 0.00E+00 : : .00% :
MEAT	: 3.21E-06 : : .58% :	: 2.01E-05 : : 3.24% :	: 4.58E-07 : : .08% :	: 2.09E-06 : : .38% :	: 4.33E-07 : : .08% :	: 5.42E-06 : : .65% :	: 7.43E-08 : : .01% :	: 0.00E+00 : : .00% :
TOTAL	: 5.50E-04 : : .000550 :	: 6.20E-04 : : .000620 :	: 5.44E-04 : : .000544 :	: 5.46E-04 : : .000546 :	: 5.37E-04 : : .000537 :	: 8.28E-04 : : .000828 :	: 6.01E-04 : : .000601 :	: 9.36E-04 : : .000936 :

TABLE 14. DOSES TO POPULATION WITHIN 50 MILES, JANUARY-DECEMBER 2009

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 1.30E-03 : : 71.25% :	: 1.30E-03 : : 67.52% :	: 1.30E-03 : : 70.73% :	: 1.30E-03 : : 71.48% :	: 1.30E-03 : : 71.76% :	: 1.30E-03 : : 31.78% :	: 1.33E-03 : : 69.74% :	: 3.04E-03 : : 83.88% :
GROUND	: 4.97E-04 : : 27.14% :	: 4.97E-04 : : 25.72% :	: 4.97E-04 : : 26.95% :	: 4.97E-04 : : 27.23% :	: 4.97E-04 : : 27.34% :	: 4.97E-04 : : 12.11% :	: 4.97E-04 : : 26.09% :	: 5.84E-04 : : 16.12% :
INHAL	: 5.16E-07 : : .03% :	: 4.57E-06 : : .24% :	: 7.40E-07 : : .04% :	: 7.41E-07 : : .04% :	: 9.20E-07 : : .05% :	: 1.61E-04 : : 3.92% :	: 7.92E-05 : : 4.16% :	: 0.00E+00 : : .00% :
VEGET	: 1.60E-05 : : .88% :	: 8.36E-05 : : 4.33% :	: 2.89E-05 : : 1.57% :	: 7.83E-06 : : .43% :	: 9.71E-07 : : .05% :	: 2.65E-05 : : .64% :	: 7.67E-08 : : .00% :	: 0.00E+00 : : .00% :
COW MILK	: 8.24E-06 : : .45% :	: 1.33E-05 : : .69% :	: 1.24E-05 : : .67% :	: 1.21E-05 : : .66% :	: 1.39E-05 : : .76% :	: 2.07E-03 : : 50.49% :	: 4.94E-08 : : .00% :	: 0.00E+00 : : .00% :
MEAT	: 4.60E-06 : : .25% :	: 2.91E-05 : : 1.51% :	: 9.20E-07 : : .05% :	: 2.77E-06 : : .15% :	: 6.34E-07 : : .03% :	: 4.37E-05 : : 1.07% :	: 7.45E-08 : : .00% :	: 0.00E+00 : : .00% :
TOTAL	: 1.83E-03	: 1.93E-03	: 1.84E-03	: 1.82E-03	: 1.82E-03	: 4.10E-03	: 1.90E-03	: 3.63E-03

DOSE CALCULATION MODELS

To evaluate the radiological consequences of the routine release of liquid and gaseous effluents from the Cooper Nuclear Station, two computer codes were used: LADTAP II for liquid doses and GASPAR for gaseous doses. Both of these computer codes implement the dose calculational methodologies of U.S. NRC Regulatory Guide 1.109, Revision 1.

Source terms for each quarter are combined with station-specific demographic data and either hydrological dilution factors, for liquid dose calculations, or atmospheric diffusion estimates, for gaseous dose calculations.

For liquid dose calculations, the hydrological dilution factors used for input to LADTAP II, as well as other input parameters, are listed in Table 15. Other inputs not specifically listed in this table are taken from Regulatory Guide 1.109, Revision 1. Semiannual doses are obtained by summing the contributions from the appropriate quarters.

For gaseous dose calculations, atmospheric diffusion estimates are obtained from the reduction and processing of onsite meteorological data. Source terms for the semiannual period are obtained by summing source terms for the appropriate quarters. Additional input to GASPAR includes the following station-supplied data:

- 0 to 50 mile population distribution
- 0 to 50 mile meat, milk, and vegetable distributions
- Absolute humidity at Cooper Nuclear Station (14.61 g/m^3)
- The fraction of the year that the vegetables are grown (0.5)
- The fraction of the daily feed intake derived from pasture for milk and meat animals (0.5)

Other values used for input to GASPAR are default values from Regulatory Guide 1.109, Rev. 1.

TABLE 15. Values of Parameters Used to Make Dose Estimates Resulting From Liquid Discharges at Cooper Nuclear Station January-December 2009

Parameter	Values Assigned	
	Individual	Population
Cooling flow rate (cfs) * (Average daily value)	Q1 NR	NR
	Q2 NR	NR
	Q3 1388.83	1388.83
	Q4 NR	NR
Dilution factor*	Q1 NR	NR
	Q2 NR	NR
	Q3 1	32.01
	Q4 NR	NR
Holding time:		
Fish	24 hr ***	168 hr ***
Drinking water	12 hr ***	22.4 hr **
Shoreline exposure	0 hr ***	22.4 hr **
Swimming	0 hr ***	22.4 hr **
Boating	0 hr ***	22.4 hr **

* Q1, Q2, Q3, and Q4 represent first, second, third and fourth quarter station data for 2009, respectively.

** Based on an average Missouri River water flow of 5.5 ft/sec, 84 miles down the river.

*** Values from Regulatory Guide 1.109, Revision 1.

NR- No release

REFERENCES

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.21, "Measuring, Evaluating, and Reporting Radioactivity in Solid Wastes and Releases of Radioactive Materials in Liquid and Gaseous Effluents from Light-Water-Cooled Nuclear Power Plants", Revision 1, 1974.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.23 (Safety Guide 23), "Onsite Meteorological Programs", Revision 0, 1972.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water-Cooled Reactors", Revision 1, 1977.

U.S. Nuclear Regulatory Commission, NUREG/CR-2919, "XOQDOQ: Computer Program for the Meteorological Evaluation of Routine Effluent Releases at Nuclear Power Stations", 1982.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water-Cooled Reactors", Revision 0, 1976.

U.S. Nuclear Regulatory Commission, NUREG-0597, "User's Guide to GASPAR Code", December 1980.

U.S. Nuclear Regulatory Commission, NUREG/CR-1276, "User's Manual for LADTAP II: A Computer Code for Calculating Radiation Exposure to Man From Routine Release of Nuclear Reactor Liquid Effluents", 1980.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Evaluating Compliance with 10 CFR 50, Appendix I", Revision 1, 1977.

APPENDIX G
REMP SAMPLE STATION DESCRIPTIONS

REMP SAMPLE STATION DESCRIPTIONS

The following pages contain descriptions of the CNS REMP Sample Stations that were active or were used for part or all of 2009.

REMP SAMPLE STATION DESCRIPTIONS
SAMPLE TYPES AND SAMPLE LOCATIONS

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
No. 1	Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry Location: Outside the northwest edge of fence, east of the gate to the LLRW storage pad on the CNS site, NW ¼, S32, T5N, R16E, Nemaha County, Nebraska. Lon. 095.38.634 W – Lat. 40.21.523 N
No. 2	Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry Location: North side of county road to the south portion of CNS site, SW ¼, S32, T5N, R16E, Nemaha County, Nebraska. Lon. 095.38.954 W – Lat. 40.21.126 N
No. 3	Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry Location: Located on the north side of the Brownville State Recreation Park access road near water gauging station, SE ¼, S18, T5N, R16E, Nemaha County, Nebraska. Lon. 095.39.108 W – Lat. 40.23.777 N
No. 4	Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry Location: Located ½ mile south of Phelps City, Missouri, on west side of highway “U”, NE ¼, S2, T64N, R42W, Atchison County, Missouri. Lon. 095.35.792 W – Lat. 40.23.797 N
No. 5	Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry Location: Located ¼ mile south and ¼ mile east of Langdon, Missouri, on north side of road, west of railroad tracks, SW ¼, T64N, R41W, Atchison County, Missouri. Lon. 095.34.434 W – Lat. 40.21.151 N

Sample Station (a)	<u>Sample Description – Type and Location</u>
No. 6	<p>Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile west of the end of Missouri State Highway “U”, SW corner of the intersection, NW ¼, S34, T64N, R42W, Atchison County, Missouri. Lon. 095.37.620 W – Lat. 40.19.459 N</p>
No 7	<p>Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry</p> <p>Location: 300 yards east of Highway 67 on north side of road, SW ¼, S6, T4N, R16E, Nemaha, Nebraska. Lon. 095.40.207 W – Lat. 40.20.287 N</p>
No. 8	<p>Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry</p> <p>Location: ½ mile north, ¾ mile west and ¾ mile north of Nemaha, on west side of road adjacent to transmission line, NE ¼, S35, T5N, R15E, Nemaha County, Nebraska. Lon. 095.41.220 W – Lat. 40.21.570 N</p>
No. 9	<p>Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry</p> <p>Location: Four miles north of Highway 136, on Highway 67. Then 1 mile east of Highway 67 and ½ mile north on west side of road, SW ¼, S26, T6N, R15E, Nemaha County, Nebraska. Lon. 095.41.810 W – Lat. 40.27.259 N</p>
No. 10	<p>Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile north of Barada, Nebraska, in SW corner of intersection, NE ¼, S14, T3N, R16E, Richardson County, Nebraska. Lon. 095.34.723 W – Lat. 40.13.970 N</p>

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
No. 11	<p>Type: (1) Water – Ground</p> <p>Location: Plant well water supply header at well pits, NW ¼, S32, T5N, R16E, Nemaha County, Nebraska. Lon. 095.53.866 W – Lat. 40.18.970 N</p>
No. 12	<p>Type: (1) Water – River</p> <p>Location: Sample (1) taken from the Missouri River immediately upstream from the Plant Intake Structure (River Mile 532.5). During periods when unsafe conditions warrant, Station 35 may be used as an alternate upstream collection site. Lon. 095.53.866 W – Lat. 40.18.970 N</p>
No.20	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: On NNW boundary of NPPD property, east side of county road, SE, S30, T5N, R16E, Nemaha County, Nebraska. Lon. 095.39.226 W – Lat. 40.22.260 N</p>
No.28	<p>Type: (1) Water – River, (2) Fish (3) Sediment from Shoreline (4) Food Products – Broadleaf Vegetation</p> <p>Location: Samples (1), (3), and (4) are taken from the Missouri River or its shore downstream near River Mile 530, Sample (2) is taken from the Missouri River ½ to 3 miles downstream of the plant site. Lon. 095.37.301 W – Lat. 40.20.336 N</p>

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
No. 35	<p>Type: (1) Fish (2) Water – River (Alternate Site) (3) Food Products – Broadleaf Vegetation</p> <p>Location: Sample (1) will be taken from the Missouri River about 1 to 3 miles above the CNS intake structure. During periods when unsafe conditions warrant, Station 35 may be used as an alternate to Station 12 (upstream collection site) for sample type (2). Sample (3) is taken about ¼ mile south of the Brownville State Recreation Area in Sector A. Lon. 095.39.046 W – Lat. 40.23.737 N</p>
No. 44	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: ¼ mile south of Auburn Country Club on Highway 75, then ½ mile east of Highway 75 at fence line north of county road, SE1/4, S27, T5N, R14E, Nemaha County, Nebraska. Lon. 095.49.759 W – Lat. 40.21.840 N</p>
No. 47	<p>Type: (1) Water – Ground</p> <p>Location: At Falls City Municipal water supply well. Lon. 095.25.537 W – Lat. 40.01.939 N</p>
No. 56	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: 1 ¼ miles SW of Langdon, Missouri, on Highway “U”, on the right side of the highway, NW ¼, S23, T64N, R42W, Atchison County, Missouri. Lon. 095.36.383 W – Lat. 40.21.157 N</p>
No. 58	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: Three miles south of Brownville, Nebraska, on county road, at the SE corner of the intersection with the farm road leading to Sample Station No. 2, SE1/4, S31, T5N, R16E, Nemaha County, Nebraska. Lon. 095.39.338 W – Lat. 40.21.126 N</p>

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
No. 59	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile SSE of the CNS Elevated Release Point, in the vicinity of the levee at the south boundary of NPPD property, SE ¼, S32, T5N, R16E, Nemaha County, Nebraska. Lon. 095.38.223 W – Lat. 40.20.986 N</p>
No. 66	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: Two miles south of Nemaha, Nebraska, on Highway 67 east side of road, NW1/4, S19, T4N, R16E, Nemaha County, Nebraska. Lon. 095.40.307 W – Lat. 40.18.277 N</p>
No. 67	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: 2 miles west of Brownville, Nebraska, on Highway 136, then north 1 ½ miles on county road and east ½ mile, on north side of road, NE1/4, S11, T5N, R15E, Nemaha County, Nebraska. Lon. 095.41.520 W – Lat. 40.24.898 N</p>
No. 71	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: Two miles east of Phelps City, Missouri, on Highway 36, then south 1 ½ miles on county road and west ¼ mile, SE1/4, S6, T64N, R41W, Atchison County, Missouri. Lon. 095.34.727 W – Lat. 40.21.664 N</p>
No. 79	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: 1 7/8 miles south of Brownville, NE, on east side of paved road, NPPD property, SE1/4, S30, T5N, R16E, Nemaha County, Nebraska. Lon. 095.39.238 W – Lat. 40.22.006 N</p>

Sample
Station (a)

Sample Description – Type and Location

No. 80

Type: (1) Environmental Thermoluminescent Dosimetry

Location: 2 1/8 miles south of Brownville, on east side of paved road, NPPD property, NE1/4, S31, T5N, R16E, Nemaha County, Nebraska.
Lon. 095.39.259 W – Lat. 40.21.834 N

No. 81

Type: (1) Environmental Thermoluminescent Dosimetry

Location: 2 3/8 miles south of Brownville, Nebraska, in the NE corner of the intersection of the paved county road and CNS access road, NPPD property, NE1/4, S31, T5N, R16E, Nemaha County, Nebraska.
Lon. 095.39.291 W – Lat. 40.21.582 N

No. 82

Type: (1) Environmental Thermoluminescent Dosimetry

Location: 7/8 mile south of CNS in a field, on NPPD property, SW1/4, S32, T5N, R16E, Nemaha County, Nebraska.
Lon. 095.38.395 W – Lat. 40.20.961 N

No. 83

Type: (1) Environmental Thermoluminescent Dosimetry

Location: 2 ¼ miles south of Nemaha, Nebraska, on Highway 67, then east 1 mile to the junction of the driveway and county road (east side of drive), NE1/4, S19, T4N, R16E, Nemaha County, Nebraska.
Lon. 095.39.411 W – Lat. 40.18.119 N

No. 84

Type: (1) Environmental Thermoluminescent Dosimetry

Location: 2 ½ miles west of Brownville, NE, south side of Highway 136 west of Locust Grove School, NW1/4, S22, T5N, R15E, Nemaha County, Nebraska.
Lon. 095.42.993 W – Lat. 40.23.564 N

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
No. 85	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile east of Brownville, Nebraska, on Highway 136, then north ¼ mile on the east side of the county road, NE1/4, S33, T65N, R42W, Atchison County, Missouri. Lon. 095.38.309 W – Lat. 40.24.508 N</p>
No. 86	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile west of Phelps City, Missouri, on Highway 136, then north 1 ½ miles on Highway “D” on west side, SE1/4, S22, T65N, R42W, Atchison County, Missouri. Lon. 095.36.938 W – Lat. 40.25.563 N</p>
No. 87	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile west of Phelps City, Missouri, on Highway 136, then south ½ mile on county road and ¾ mile west on county road to the end of the road, NW1/4, S3, T64N, R42W, Atchison County, Missouri. Lon. 095.37.806 W – Lat. 40.23.818 N</p>
No. 88	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: One mile west of Phelps City, Missouri, on Highway 136, then south 2 miles at the end of the county road, NW1/4, S11, T64N, R42W, Atchison County, Missouri. Lon. 095.37.771 W – Lat. 40.24.762 N</p>
No. 89	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: 2 ½ miles south of Phelps City, Missouri, on Highway “U”, then ½ mile west in the SE corner of the county road intersection, NE1/4, S14, T64N, R42W, Atchison County, Missouri. Lon. 095.36.361 W – Lat. 40.21.962 N</p>

Sample Station (a)	<u>Sample Description – Type and Location</u>
No. 90	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: 1 ½ miles west and ¾ mile south of Langdon, Missouri, on Highway “U”, then ¼ mile west, SW1/4, S23, T64N, R42W, Atchison County, Missouri. Lon. 095.35.808 W – Lat. 40.19.472 N</p>
No. 91	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: ½ mile west of Rockport, Missouri, on the south side of the intersection of U.S. Highway 136 and U.S. Highway 275, at the south side of the water tower, NW1/4, S28, T65N, R41 W, Atchison County, Missouri. Lon. 095.32.217 W – Lat. 40.25.181 N</p>
No. 94	<p>Type: (1) Environmental Thermoluminescent Dosimetry</p> <p>Location: ¼ mile of Langdon, Missouri, on the west side of the road, NE1/4, S24, T64N, R42W, Atchison County, Missouri. Lon. 095.34.673 W – Lat. 40.20.931 N</p>
No. 96	<p>Type: (1) Food products – Broadleaf Vegetation</p> <p>Location: Approximately 1 mile south of Brownville, Nebraska, along the paved road, in the road ditch in Sector R, SW1/4, S19, T5N, R16E, Nemaha County, Nebraska. Lon. 095.39.318 W – Lat. 40.23.144 N</p>
No. 99	<p>Type: (1) Milk (Nearest and Other Producer)</p> <p>Location: 1 ¼ mile south of Shubert, Nebraska, on the west side of Highway 67, NE1/4, S24, T3N, R15E, Richardson County, Nebraska. Lon. 095.40.368 W – Lat. 40.12.850 N</p>

Sample
Station (a)

Sample Description – Type and Location

No. 101

Type: (1) Food Products – Broadleaf Vegetation

Location: 5 ½ miles east and ½ mile north of Rock Port, Missouri,
near the junction of Highway 136 and Highway 59, in
Sector D, encompasses portions of several sections,
Athison County, Missouri.

Lon. 095.23.822 W – Lat. 40.25.222 N

No. 103

Type: (1) Milk (Other Producer)

Location: Four miles south and 3 miles west of Auburn,
Nebraska, NE ¼, S13, T4N, R13E, Nemaha County,
Nebraska.

Lon. 095.53.865 W – Lat. 40.18.971 N

**APPENDIX H
ANNUAL RADIOLOGICAL GROUNDWATER PROTECTION PROGRAM
(ARGPP) REPORT**

***NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
Radiological Groundwater Protection Program
2009 Annual Report
January 1, 2009 to December 31, 2009***

Prepared by
*Teledyne Brown Engineering
2508 Quality Lane
Knoxville, TN 37931-3133*

Table Of Contents

I. Summary	4
II. Characteristics of Tritium (H-3)	6
III. Introduction.....	6
A. Objectives of the RGPP	7
B. Implementation of the Objectives.....	7
C. Program Description	7
IV. Program Description.....	8
A. Sample Analysis.....	8
B. Data Interpretation	8
V. Results and Discussion	9
A. Groundwater Results	9

Appendices

Appendix A: Location Designation of the Annual Radiological Groundwater Protection Program Report (ARGPPR)

Tables

Table A-1: Radiological Groundwater Protection Program - Sampling Locations, Nebraska Public Power District, Cooper Nuclear Station, 2009

MAP

Map A-1 Routine Well Water Sample Locations for the Radiological Groundwater Protection Program, Nebraska Public Power District, Cooper Nuclear Station, 2009

Appendix B: Data Tables of the Annual Radiological Groundwater Protection Program Report (ARGPPR)

Table B-1: Concentrations of Gross Alpha, Strontium-89/90, Iron-55, Nickel-63, Gamma Emitters and Tritium in Groundwater Samples Collected in the Vicinity of Nebraska Public Power District, Cooper Nuclear Station, 2009.

I. Summary

In 2008, the Cooper Nuclear Station (CNS) of the Nebraska Public Power District (NPPD) Nebraska Public Power District instituted a comprehensive program to evaluate the impact of station operations on groundwater in the vicinity of CNS. This report covers groundwater samples, collected outside of the Licensee required Off-Site Dose Assessment Manual (ODAM) requirements, both on and off station property in 2009. During that time period, 308 analyses were performed on 44 samples from 11 locations.

In assessing all the data gathered for this report, it was concluded that the operation of CNS had no adverse radiological impact on the environment, and there are no known active releases into the groundwater or surface water at Nebraska Public Power District.

Gross alpha was detected in five locations. The concentrations ranged from 2.82 ± 1.85 pCi/L to 8.10 ± 3.30 pCi/L.

Tritium was not detected in any of the groundwater samples at concentrations greater than the United States Environmental Protection Agency (USEPA) drinking water standard (and the Nuclear Regulatory Commission Reporting Limit) of 20,000 pCi/L. The tritium concentrations ranged from 238 ± 121 pCi/L to 1170 ± 181 pCi/L.

Strontium-89 and strontium-90 were not detected at concentrations greater than the Lower Limit of Detection (LLD) as specified in NUREG-1302 in any of the groundwater samples.

Iron-55 was not detected in any of the groundwater samples.

Nickel-63 was not detected in any of the groundwater samples.

Gamma-emitting radionuclides associated with licensed plant operations were not detected at concentrations greater than their respective Lower Limits of Detection (LLDs) as specified in NUREG-1302 in any of the groundwater samples. In the case of tritium, CNS specified that the independent laboratory achieve a lower limit of detection 10 times lower than that required by the United States Environmental Protection Agency (USEPA) regulation.

Intentionally left blank

II. Characteristics of Tritium (H-3)

Tritium (chemical symbol H-3) is a radioactive isotope of hydrogen. The most common form of tritium is tritium oxide, which is also called "tritiated water." The chemical properties of tritium are essentially those of ordinary hydrogen.

Tritiated water behaves the same as ordinary water in both the environment and the body. Tritium can be taken into the body by drinking water, breathing air, eating food, or absorption through skin. Once tritium enters the body, it disperses quickly and is uniformly distributed throughout the body. Tritium is excreted primarily through urine with a clearance rate characterized by an effective biological half-life of about 14 days. Within one month or so after ingestion, essentially all tritium is cleared. Organically bound tritium (tritium that is incorporated in organic compounds) can remain in the body for a longer period.

Tritium is produced naturally in the upper atmosphere when cosmic rays strike air molecules. Tritium is also produced during nuclear weapons explosions, as a by-product in reactors producing electricity, and in special production reactors, where the isotopes lithium-7 and/or boron-10 are activated to produce tritium. Like normal water, tritiated water is colorless and odorless. Tritiated water behaves chemically and physically like non-tritiated water in the subsurface, and therefore tritiated water will travel at the same velocity as the average groundwater velocity.

Tritium has a half-life of approximately 12.3 years. It decays spontaneously to helium-3 (^3He). This radioactive decay releases a beta particle (low-energy electron). The radioactive decay of tritium is the source of the health risk from exposure to tritium. Tritium is one of the least dangerous radionuclides because it emits very weak beta radiation and leaves the body relatively quickly. Since tritium is almost always found as water, it goes directly into soft tissues and organs. The associated dose to these tissues is generally uniform and is dependent on the water content of the specific tissue.

III. Introduction

Cooper Nuclear Station is located in Nemaha County in the southeast corner of Nebraska on the Missouri River. A portion of the site extends into Missouri. The reactor is an 805-megawatt (net electrical) boiling water reactor. Initial criticality was attained on February 21, 1974.

This report covers those analyses performed by Teledyne Brown Engineering (TBE) on samples collected in 2009.

A. Objectives of the Radiological Groundwater Protection Program (RGPP)

The long-term objectives of the RGPP are as follows:

1. Identify suitable locations to monitor and evaluate potential impacts from station operations before significant radiological impact to the environment and potential drinking water sources.
2. Understand the local hydrogeologic regime in the vicinity of the station and maintain up-to-date knowledge of flow patterns on the surface and shallow subsurface.
3. Perform routine water sampling and radiological analysis of water from selected locations.
4. Report new leaks, spills, or other detections with potential radiological significance to stakeholders in a timely manner.
5. Regularly assess analytical results to identify adverse trends.
6. Take necessary corrective actions to protect groundwater resources.

B. Implementation of the Objectives

The objectives identified have been implemented at CNS as discussed below:

1. Cooper Nuclear Station will continue to perform routine sampling and radiological analysis of water from selected locations.
2. Cooper Nuclear Station has implemented new procedures to identify and report new leaks, spills, or other detections with potential radiological significance in a timely manner.
3. Cooper Nuclear Station staff assesses analytical results on an ongoing basis to identify adverse trends.

C. Program Description

1. Sample Collection

Sample locations can be found in Appendix A, Table A-1 and Map A-1.

Groundwater

Samples of water are collected, managed, transported and analyzed in

accordance with approved procedures following regulatory methods. Sample locations, sample collection frequencies and analytical frequencies are controlled in accordance with approved station procedures. Contractor and/or station personnel are trained in the collection, preservation management, and shipment of samples, as well as in documentation of sampling events. Analytical laboratories are subject to internal quality assurance programs, inter-laboratory cross-check programs, as well as nuclear industry audits. Station personnel review and evaluate all analytical data deliverables after initial review by the contractor.

Analytical data results are reviewed by both station personnel for adverse trends or changes to hydrogeologic conditions.

IV Program Description

A. Sample Analysis

This section describes the general analytical methodologies used by TBE to analyze the environmental samples for radioactivity for the CNS RGPP in 2009.

In order to achieve the stated objectives, the current program includes the following analyses:

1. Concentrations of gross alpha in groundwater.
2. Concentrations of tritium in groundwater.
3. Concentrations of strontium-89 and strontium-90 in groundwater.
4. Concentrations of iron-55 in groundwater.
5. Concentration of nickel-63 in groundwater.
6. Concentrations of gamma emitters in groundwater.

B. Data Interpretation

The radiological data collected prior to CNS becoming operational were used as a baseline with which these operational data were compared. For the purpose of this report, CNS was considered operational at initial criticality. Several factors were important in the interpretation of the data:

1. Lower Limit of Detection and Minimum Detectable Concentration

The lower limit of detection (LLD) is specified by federal regulation as a minimum sensitivity value that must be achieved routinely by the analytical parameter.

2. Laboratory Measurements Uncertainty

The estimated uncertainty in measurement of tritium in environmental samples is frequently on the order of 50% of the measurement value.

Statistically, the exact value of a measurement is expressed as a range with a stated level of confidence. The convention is to report results with a 95% level of confidence. The uncertainty comes from calibration standards, sample volume or weight measurements, sampling uncertainty and other factors. CNS reports the uncertainty of a measurement created by statistical process (counting error). Each result has two values calculated. CNS reports the result with plus or minus (\pm) the estimated sample standard deviation.

Analytical uncertainties are reported at the 95% confidence level in this report for reporting consistency with the REMP.

Gamma spectroscopy results for each type of sample were grouped as follows:

For groundwater 18 nuclides, Be-7, K-40, Mn-54, Co-58, Fe-59, Co-60, Zn-65, Zr-95, Ru-103, Ru-106, I-131, Cs-134, Cs-137, Ba-140, Ce-141, Ce-144, Ra-226 and Th-228 were reported.

V. Results and Discussion

A. Groundwater Results

Gross Alpha

Samples from 11 locations were analyzed for gross alpha (Table B-1, Appendix B). Gross alpha was detected at five locations. The concentrations ranged from 2.82 to 8.10 pCi/L.

Tritium

Samples from 11 locations were analyzed for tritium activity (Table B-1, Appendix B). Tritium was detected at two locations. Tritium values

ranged from 238 to 1170 pCi/L. All values were below the CNS ODAM LLD of 2000 pCi/liter.

Strontium

Samples from 11 locations were analyzed for strontium-89 and strontium-90 (Table B-1, Appendix B). Strontium-89 and strontium-90 were not detected at concentrations greater than the LLD.

Iron-55

Samples from 11 locations were analyzed for iron-55 (Table B-1, Appendix A). Iron-55 was not detected at concentrations greater than the LLD.

Nickel-63

Samples from 11 locations were analyzed for nickel-63 (Table B-1, Appendix B). Nickel-63 was not detected at concentrations greater than the LLD.

Gamma Emitters

Naturally occurring potassium-40 was detected in five of 44 samples. The concentrations ranged from 35.4 to 88.7 pCi/liter. Thorium-228 was detected in four of 44 samples. The concentrations ranged from 4.09 to 9.52 pCi/liter. Ra-226 was detected on one sample at a concentration of 59.8 pCiL. No other gamma emitting nuclides were detected (Table B-1, Appendix B).


APPENDIX A

**LOCATION DESIGNATION OF THE ANNUAL
RADIOLOGICAL GROUNDWATER PROTECTION
PROGRAM REPORT (ARGPPR)**

TABLE A-1: Radiological Groundwater Protection Program - Sampling Locations,
NEBRASKA PUBLIC POWER DISTRICT, Cooper Nuclear Station,
2009

Site	Type
1D	Ground Water
1S	Ground Water
2	Ground Water
3	Ground Water
4D	Ground Water
4S	Ground Water
5	Ground Water
6	Ground Water
7D	Ground Water
7S	Ground Water
8	Ground Water

← NORTH

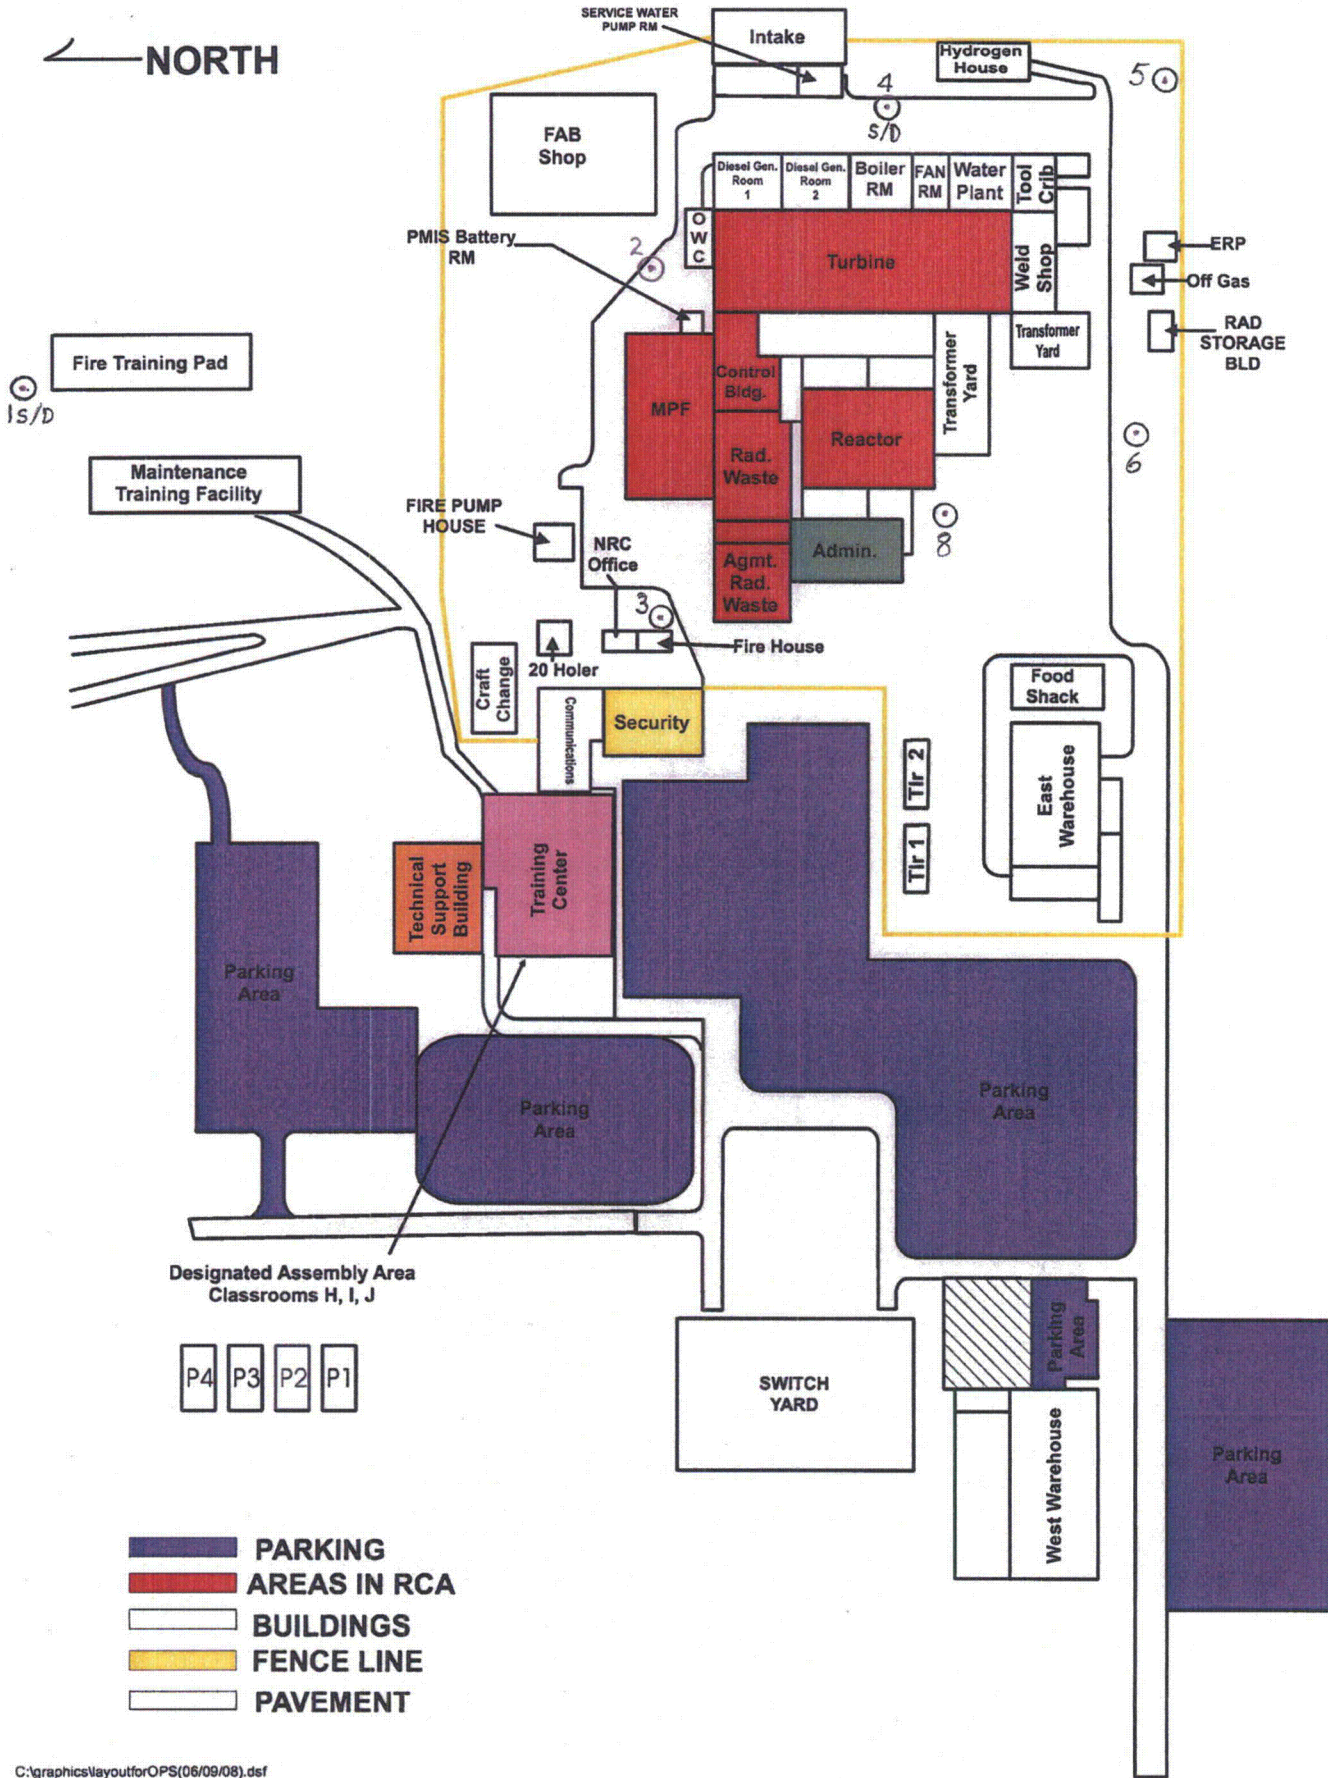

- PARKING
- AREAS IN RCA
- BUILDINGS
- FENCE LINE
- PAVEMENT

APPENDIX B

DATA TABLES

B-1
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND (PCI/LITER)

STATION NUMBER 1D

DATE COLLECTED	03/02/09	05/05/09	08/05/09	11/10/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 8.E+01	L.T. 6.E+00	L.T. 2.E+01	L.T. 3.E+01
SR-89	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
SR-90	L.T. 9.E-01	L.T. 4.E-01	L.T. 4.E-01	L.T. 8.E-01
FE-55	L.T. 2.E+02	L.T. 2.E+02	L.T. 1.E+02	L.T. 2.E+02
NI-63	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 5.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	8.46E+01 ± 5.53E+01	L.T. 1.E+01	L.T. 5.E+00	L.T. 1.E+01
MN-54	L.T. 2.E+00	L.T. 1.E+00	L.T. 7.E-01	L.T. 1.E+00
CO-58	L.T. 2.E+00	L.T. 1.E+00	L.T. 1.E+00	L.T. 2.E+00
FE-59	L.T. 6.E+00	L.T. 3.E+00	L.T. 3.E+00	L.T. 4.E+00
CO-60	L.T. 1.E+00	L.T. 1.E+00	L.T. 6.E-01	L.T. 1.E+00
ZN-65	L.T. 4.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 3.E+00
ZR-95	L.T. 4.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-103	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 2.E+00
RU-106	L.T. 2.E+01	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01
I-131	L.T. 7.E+01	L.T. 7.E+00	L.T. 1.E+02	L.T. 1.E+01
CS-134	L.T. 2.E+00	L.T. 1.E+00	L.T. 7.E-01	L.T. 1.E+00
CS-137	L.T. 2.E+00	L.T. 1.E+00	L.T. 7.E-01	L.T. 2.E+00
BA-140	L.T. 6.E+01	L.T. 1.E+01	L.T. 5.E+01	L.T. 2.E+01
CE-141	L.T. 6.E+00	L.T. 3.E+00	L.T. 4.E+00	L.T. 4.E+00
CE-144	L.T. 1.E+01	L.T. 9.E+00	L.T. 6.E+00	L.T. 1.E+01
RA-226	L.T. 5.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 3.E+01
TH-228	L.T. 3.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 3.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-2

H-16

B-1
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND (PCI/LITER)

STATION NUMBER 1S

DATE COLLECTED	03/02/09	05/05/09	08/05/09	11/10/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 7.E+00	L.T. 5.E+01	L.T. 5.E+00	2.82E+00 ± 1.85E+00
SR-89	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00	L.T. 4.E+00
SR-90	L.T. 5.E-01	L.T. 6.E-01	L.T. 5.E-01	L.T. 6.E-01
FE-55	L.T. 8.E+01	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 4.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 1.E+01	L.T. 3.E+01
K-40	L.T. 1.E+01	L.T. 3.E+01	L.T. 1.E+01	L.T. 4.E+01
MN-54	L.T. 1.E+00	L.T. 2.E+00	L.T. 6.E-01	L.T. 2.E+00
CO-58	L.T. 2.E+00	L.T. 2.E+00	L.T. 9.E-01	L.T. 3.E+00
FE-59	L.T. 4.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 6.E+00
CO-60	L.T. 1.E+00	L.T. 2.E+00	L.T. 6.E-01	L.T. 2.E+00
ZN-65	L.T. 3.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 5.E+00
ZR-95	L.T. 3.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 5.E+00
RU-103	L.T. 2.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 1.E+01	L.T. 2.E+01	L.T. 5.E+00	L.T. 2.E+01
I-131	L.T. 5.E+01	L.T. 1.E+01	L.T. 1.E+02	L.T. 2.E+01
CS-134	L.T. 1.E+00	L.T. 2.E+00	L.T. 6.E-01	L.T. 2.E+00
CS-137	L.T. 1.E+00	L.T. 2.E+00	L.T. 6.E-01	L.T. 2.E+00
BA-140	L.T. 4.E+01	L.T. 2.E+01	L.T. 6.E+01	L.T. 3.E+01
CE-141	L.T. 3.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 7.E+00
CE-144	L.T. 6.E+00	L.T. 1.E+01	L.T. 7.E+00	L.T. 2.E+01
RA-226	L.T. 3.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 6.E+01
TH-228	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 4.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-3

H-17

B-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND (PCI/LITER)

STATION NUMBER 2

DATE COLLECTED	03/04/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 7.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 2.E+00
SR-89	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 4.E+00
SR-90	L.T. 9.E-01	L.T. 5.E-01	L.T. 5.E-01	L.T. 6.E-01
FE-55	L.T. 1.E+02	L.T. 1.E+02	L.T. 1.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 4.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	L.T. 1.E+01	L.T. 2.E+01	L.T. 7.E+00	L.T. 2.E+01
MN-54	L.T. 2.E+00	L.T. 2.E+00	L.T. 9.E-01	L.T. 2.E+00
CO-58	L.T. 3.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
FE-59	L.T. 6.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 6.E+00
CO-60	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
ZN-65	L.T. 3.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 4.E+00
ZR-95	L.T. 4.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 4.E+00
RU-103	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 1.E+01	L.T. 2.E+01	L.T. 8.E+00	L.T. 2.E+01
I-131	L.T. 6.E+01	L.T. 1.E+01	L.T. 7.E+01	L.T. 2.E+01
CS-134	L.T. 1.E+00	L.T. 2.E+00	L.T. 8.E-01	L.T. 2.E+00
CS-137	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
BA-140	L.T. 5.E+01	L.T. 2.E+01	L.T. 5.E+01	L.T. 3.E+01
CE-141	L.T. 5.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00
CE-144	L.T. 1.E+01	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01
RA-226	L.T. 4.E+01	L.T. 4.E+01	L.T. 2.E+01	L.T. 4.E+01
TH-228	L.T. 2.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-4

H-18

B-1
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND (PCI/LITER)

STATION NUMBER 3

DATE COLLECTED	03/04/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 6.E+00	L.T. 5.E+00	L.T. 5.E+00	3.91E+00 ± 2.00E+00
SR-89	L.T. 3.E+00	L.T. 3.E+00	L.T. 3.E+00	L.T. 3.E+00
SR-90	L.T. 6.E-01	L.T. 6.E-01	L.T. 7.E-01	L.T. 7.E-01
FE-55	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 5.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	L.T. 1.E+01	4.19E+01 ± 2.63E+01	L.T. 2.E+01	L.T. 2.E+01
MN-54	L.T. 1.E+00	L.T. 2.E+00	L.T. 8.E-01	L.T. 2.E+00
CO-58	L.T. 1.E+00	L.T. 2.E+00	L.T. 9.E-01	L.T. 3.E+00
FE-59	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 6.E+00
CO-60	L.T. 1.E+00	L.T. 2.E+00	L.T. 7.E-01	L.T. 2.E+00
ZN-65	L.T. 2.E+00	L.T. 4.E+00	L.T. 1.E+00	L.T. 5.E+00
ZR-95	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 5.E+00
RU-103	L.T. 2.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 1.E+01	L.T. 1.E+01	L.T. 6.E+00	L.T. 2.E+01
I-131	L.T. 5.E+01	L.T. 9.E+00	L.T. 6.E+01	L.T. 2.E+01
CS-134	L.T. 1.E+00	L.T. 1.E+00	L.T. 6.E-01	L.T. 2.E+00
CS-137	L.T. 1.E+00	L.T. 2.E+00	L.T. 7.E-01	L.T. 2.E+00
BA-140	L.T. 4.E+01	L.T. 2.E+01	L.T. 4.E+01	L.T. 3.E+01
CE-141	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 6.E+00
CE-144	L.T. 9.E+00	L.T. 1.E+01	L.T. 5.E+00	L.T. 1.E+01
RA-226	L.T. 3.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 5.E+01
TH-228	L.T. 4.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 3.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-5

H-19

B-1
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 WATER - GROUND (PCI/LITER)

STATION NUMBER 4D

DATE COLLECTED	03/04/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 7.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 3.E+00
SR-89	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00	L.T. 3.E+00
SR-90	L.T. 5.E-01	L.T. 3.E-01	L.T. 6.E-01	L.T. 8.E-01
FE-55	L.T. 8.E+01	L.T. 9.E+01	L.T. 2.E+02	L.T. 1.E+02
NI-63	L.T. 4.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 3.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	L.T. 1.E+01	L.T. 1.E+01	L.T. 2.E+01	L.T. 1.E+01
MN-54	L.T. 1.E+00	L.T. 1.E+00	L.T. 9.E-01	L.T. 2.E+00
CO-58	L.T. 2.E+00	L.T. 1.E+00	L.T. 1.E+00	L.T. 2.E+00
FE-59	L.T. 4.E+00	L.T. 3.E+00	L.T. 3.E+00	L.T. 5.E+00
CO-60	L.T. 2.E+00	L.T. 1.E+00	L.T. 8.E-01	L.T. 2.E+00
ZN-65	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00
ZR-95	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 4.E+00
RU-103	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 1.E+01	L.T. 1.E+01	L.T. 7.E+00	L.T. 1.E+01
I-131	L.T. 5.E+01	L.T. 8.E+00	L.T. 7.E+01	L.T. 2.E+01
CS-134	L.T. 1.E+00	L.T. 1.E+00	L.T. 7.E-01	L.T. 2.E+00
CS-137	L.T. 1.E+00	L.T. 1.E+00	L.T. 8.E-01	L.T. 2.E+00
BA-140	L.T. 5.E+01	L.T. 1.E+01	L.T. 4.E+01	L.T. 3.E+01
CE-141	L.T. 5.E+00	L.T. 3.E+00	L.T. 4.E+00	L.T. 5.E+00
CE-144	L.T. 1.E+01	L.T. 9.E+00	L.T. 6.E+00	L.T. 1.E+01
RA-226	L.T. 3.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 4.E+01
TH-228	L.T. 2.E+00	L.T. 3.E+00	4.09E+00 ± 2.21E+00	L.T. 3.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-6

H-20

B-1
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 WATER - GROUND (PCI/LITER)

STATION NUMBER 4S

DATE COLLECTED	03/04/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 5.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00
SR-89	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 4.E+00
SR-90	L.T. 6.E-01	L.T. 7.E-01	L.T. 5.E-01	L.T. 5.E-01
FE-55	L.T. 1.E+02	L.T. 2.E+02	L.T. 1.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 4.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	L.T. 1.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 4.E+01
MN-54	L.T. 2.E+00	L.T. 1.E+00	L.T. 8.E-01	L.T. 2.E+00
CO-58	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
FE-59	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 5.E+00
CO-60	L.T. 2.E+00	L.T. 1.E+00	L.T. 7.E-01	L.T. 2.E+00
ZN-65	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 4.E+00
ZR-95	L.T. 4.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 4.E+00
RU-103	L.T. 3.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 3.E+00
RU-106	L.T. 2.E+01	L.T. 1.E+01	L.T. 7.E+00	L.T. 2.E+01
I-131	L.T. 6.E+01	L.T. 9.E+00	L.T. 6.E+01	L.T. 2.E+01
CS-134	L.T. 1.E+00	L.T. 1.E+00	L.T. 6.E-01	L.T. 2.E+00
CS-137	L.T. 2.E+00	L.T. 1.E+00	L.T. 7.E-01	L.T. 2.E+00
BA-140	L.T. 6.E+01	L.T. 1.E+01	L.T. 4.E+01	L.T. 3.E+01
CE-141	L.T. 6.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 6.E+00
CE-144	L.T. 1.E+01	L.T. 1.E+01	L.T. 6.E+00	L.T. 1.E+01
RA-226	L.T. 4.E+01	5.98E+01 ± 3.67E+01	L.T. 2.E+01	L.T. 4.E+01
TH-228	L.T. 4.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 3.E+00
H-3	4.97E+02 ± 1.45E+02	7.48E+02 ± 1.48E+02	9.34E+02 ± 1.64E+02	1.17E+03 ± 1.81E+02

B-7

H-21

B-1
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 WATER - GROUND (PCI/LITER)

STATION NUMBER 5

DATE COLLECTED	03/05/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 6.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 2.E+00
SR-89	L.T. 3.E+00	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00
SR-90	L.T. 9.E-01	L.T. 6.E-01	L.T. 5.E-01	L.T. 7.E-01
FE-55	L.T. 1.E+02	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 5.E+00	L.T. 5.E+00	L.T. 3.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 2.E+01	L.T. 2.E+01
K-40	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 2.E+01
MN-54	L.T. 1.E+00	L.T. 1.E+00	L.T. 1.E+00	L.T. 2.E+00
CO-58	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
FE-59	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 5.E+00
CO-60	L.T. 2.E+00	L.T. 1.E+00	L.T. 8.E-01	L.T. 2.E+00
ZN-65	L.T. 2.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 4.E+00
ZR-95	L.T. 3.E+00	L.T. 3.E+00	L.T. 3.E+00	L.T. 4.E+00
RU-103	L.T. 2.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 1.E+01	L.T. 1.E+01	L.T. 9.E+00	L.T. 2.E+01
I-131	L.T. 4.E+01	L.T. 9.E+00	L.T. 8.E+01	L.T. 2.E+01
CS-134	L.T. 1.E+00	L.T. 1.E+00	L.T. 9.E-01	L.T. 2.E+00
CS-137	L.T. 1.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
BA-140	L.T. 4.E+01	L.T. 2.E+01	L.T. 5.E+01	L.T. 3.E+01
CE-141	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 6.E+00
CE-144	L.T. 7.E+00	L.T. 1.E+01	L.T. 8.E+00	L.T. 2.E+01
RA-226	L.T. 2.E+01	L.T. 3.E+01	L.T. 3.E+01	L.T. 4.E+01
TH-228	L.T. 2.E+00	L.T. 3.E+00	9.52E+00 ± 2.94E+00	L.T. 4.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-8

H-22

B-1
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 WATER - GROUND (PCI/LITER)

STATION NUMBER 6

DATE COLLECTED	03/05/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 6.E+00	L.T. 4.E+00	L.T. 2.E+00	4.63E+00 ± 2.08E+00
SR-89	L.T. 2.E+00	L.T. 3.E+00	L.T. 3.E+00	L.T. 3.E+00
SR-90	L.T. 5.E-01	L.T. 6.E-01	L.T. 6.E-01	L.T. 7.E-01
FE-55	L.T. 2.E+02	L.T. 2.E+02	L.T. 1.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 5.E+00	L.T. 4.E+00	L.T. 3.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 2.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	L.T. 6.E+01	3.54E+01 ± 2.24E+01	L.T. 2.E+01	L.T. 1.E+01
MN-54	L.T. 2.E+00	L.T. 2.E+00	L.T. 9.E-01	L.T. 2.E+00
CO-58	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 2.E+00
FE-59	L.T. 5.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 5.E+00
CO-60	L.T. 2.E+00	L.T. 2.E+00	L.T. 8.E-01	L.T. 2.E+00
ZN-65	L.T. 4.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 3.E+00
ZR-95	L.T. 5.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-103	L.T. 3.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 1.E+01	L.T. 2.E+01	L.T. 8.E+00	L.T. 2.E+01
I-131	L.T. 5.E+01	L.T. 1.E+01	L.T. 8.E+01	L.T. 2.E+01
CS-134	L.T. 2.E+00	L.T. 2.E+00	L.T. 8.E-01	L.T. 2.E+00
CS-137	L.T. 2.E+00	L.T. 2.E+00	L.T. 9.E-01	L.T. 2.E+00
BA-140	L.T. 5.E+01	L.T. 2.E+01	L.T. 5.E+01	L.T. 3.E+01
CE-141	L.T. 4.E+00	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00
CE-144	L.T. 9.E+00	L.T. 1.E+01	L.T. 8.E+00	L.T. 1.E+01
RA-226	L.T. 4.E+01	L.T. 4.E+01	L.T. 3.E+01	L.T. 5.E+01
TH-228	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00
H-3	L.T. 2.E+02	2.38E+02 ± 1.21E+02	3.35E+02 ± 1.30E+02	2.47E+02 ± 1.22E+02

B-9

H-23

B-1
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND (PCI/LITER)

STATION NUMBER 7D

DATE COLLECTED	03/02/09	05/05/09	08/05/09	11/10/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 7.E+01	L.T. 4.E+01	L.T. 2.E+01	8.10E+00 ± 3.30E+00
SR-89	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00	L.T. 4.E+00
SR-90	L.T. 6.E-01	L.T. 4.E-01	L.T. 6.E-01	L.T. 7.E-01
FE-55	L.T. 2.E+02	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 5.E+00	L.T. 3.E+00	L.T. 3.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 1.E+01	L.T. 1.E+01	L.T. 1.E+01	L.T. 3.E+01
K-40	L.T. 2.E+01	4.90E+01 ± 1.97E+01	L.T. 5.E+00	L.T. 2.E+01
MN-54	L.T. 9.E-01	L.T. 1.E+00	L.T. 7.E-01	L.T. 2.E+00
CO-58	L.T. 1.E+00	L.T. 1.E+00	L.T. 1.E+00	L.T. 3.E+00
FE-59	L.T. 3.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 6.E+00
CO-60	L.T. 8.E-01	L.T. 1.E+00	L.T. 6.E-01	L.T. 2.E+00
ZN-65	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	L.T. 5.E+00
ZR-95	L.T. 2.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 5.E+00
RU-103	L.T. 2.E+00	L.T. 2.E+00	L.T. 2.E+00	L.T. 3.E+00
RU-106	L.T. 9.E+00	L.T. 1.E+01	L.T. 6.E+00	L.T. 2.E+01
I-131	L.T. 4.E+01	L.T. 8.E+00	L.T. 1.E+02	L.T. 2.E+01
CS-134	L.T. 8.E-01	L.T. 1.E+00	L.T. 6.E-01	L.T. 2.E+00
CS-137	L.T. 9.E-01	L.T. 1.E+00	L.T. 7.E-01	L.T. 2.E+00
BA-140	L.T. 3.E+01	L.T. 1.E+01	L.T. 5.E+01	L.T. 3.E+01
CE-141	L.T. 3.E+00	L.T. 3.E+00	L.T. 4.E+00	L.T. 6.E+00
CE-144	L.T. 5.E+00	L.T. 1.E+01	L.T. 6.E+00	L.T. 2.E+01
RA-226	L.T. 2.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 5.E+01
TH-228	L.T. 2.E+00	L.T. 2.E+00	L.T. 1.E+00	7.04E+00 ± 3.68E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-10

H-24

B-1
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
EXPOSURE PATHWAY - INGESTION
WATER - GROUND (PCI/LITER)

STATION NUMBER 7S

DATE COLLECTED	03/02/09	05/05/09	08/05/09	11/10/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 6.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 2.E+00
SR-89	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00	L.T. 2.E+00
SR-90	L.T. 8.E-01	L.T. 6.E-01	L.T. 7.E-01	L.T. 8.E-01
FE-55	L.T. 1.E+02	L.T. 1.E+02	L.T. 2.E+02	L.T. 5.E+01
NI-63	L.T. 4.E+00	L.T. 4.E+00	L.T. 5.E+00	L.T. 3.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 1.E+01	L.T. 3.E+01	L.T. 1.E+01	L.T. 2.E+01
K-40	L.T. 9.E+00	L.T. 3.E+01	L.T. 6.E+00	L.T. 2.E+01
MN-54	L.T. 1.E+00	L.T. 2.E+00	L.T. 7.E-01	L.T. 2.E+00
CO-58	L.T. 1.E+00	L.T. 3.E+00	L.T. 9.E-01	L.T. 2.E+00
FE-59	L.T. 3.E+00	L.T. 6.E+00	L.T. 3.E+00	L.T. 5.E+00
CO-60	L.T. 9.E-01	L.T. 2.E+00	L.T. 6.E-01	L.T. 2.E+00
ZN-65	L.T. 2.E+00	L.T. 5.E+00	L.T. 2.E+00	L.T. 4.E+00
ZR-95	L.T. 2.E+00	L.T. 6.E+00	L.T. 2.E+00	L.T. 4.E+00
RU-103	L.T. 2.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 3.E+00
RU-106	L.T. 8.E+00	L.T. 2.E+01	L.T. 6.E+00	L.T. 2.E+01
I-131	L.T. 3.E+01	L.T. 2.E+01	L.T. 9.E+01	L.T. 2.E+01
CS-134	L.T. 8.E-01	L.T. 2.E+00	L.T. 6.E-01	L.T. 2.E+00
CS-137	L.T. 9.E-01	L.T. 3.E+00	L.T. 6.E-01	L.T. 2.E+00
BA-140	L.T. 3.E+01	L.T. 3.E+01	L.T. 5.E+01	L.T. 3.E+01
CE-141	L.T. 3.E+00	L.T. 6.E+00	L.T. 3.E+00	L.T. 5.E+00
CE-144	L.T. 6.E+00	L.T. 2.E+01	L.T. 5.E+00	L.T. 1.E+01
RA-226	L.T. 2.E+01	L.T. 5.E+01	L.T. 1.E+01	L.T. 4.E+01
TH-228	L.T. 1.E+00	L.T. 6.E+00	L.T. 1.E+00	6.21E+00 ± 3.38E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02	L.T. 2.E+02

B-11

H-25

B-1
NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - INGESTION
 WATER - GROUND (PCI/LITER)

STATION NUMBER 8

DATE COLLECTED	03/05/09	05/06/09	08/11/09	11/09/09
RADIOCHEMICAL ANALYSIS:				
GR-A	L.T. 7.E+00	L.T. 4.E+00	L.T. 2.E+00	3.21E+00 ± 2.04E+00
SR-89	L.T. 3.E+00	L.T. 2.E+00	L.T. 3.E+00	L.T. 3.E+00
SR-90	L.T. 6.E-01	L.T. 4.E-01	L.T. 5.E-01	L.T. 5.E-01
FE-55	L.T. 2.E+02	L.T. 1.E+02	L.T. 2.E+02	L.T. 2.E+02
NI-63	L.T. 4.E+00	L.T. 4.E+00	L.T. 3.E+00	L.T. 4.E+00
GAMMA SPECTRUM ANALYSIS:				
BE-7	L.T. 2.E+01	L.T. 3.E+01	L.T. 2.E+01	L.T. 7.E+00
K-40	8.87E+01 ± 5.87E+01	L.T. 5.E+01	L.T. 9.E+00	L.T. 5.E+00
MN-54	L.T. 1.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 5.E-01
CO-58	L.T. 2.E+00	L.T. 3.E+00	L.T. 2.E+00	L.T. 7.E-01
FE-59	L.T. 4.E+00	L.T. 8.E+00	L.T. 4.E+00	L.T. 1.E+00
CO-60	L.T. 2.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 6.E-01
ZN-65	L.T. 3.E+00	L.T. 5.E+00	L.T. 2.E+00	L.T. 1.E+00
ZR-95	L.T. 4.E+00	L.T. 6.E+00	L.T. 3.E+00	L.T. 1.E+00
RU-103	L.T. 3.E+00	L.T. 4.E+00	L.T. 2.E+00	L.T. 9.E-01
RU-106	L.T. 1.E+01	L.T. 3.E+01	L.T. 1.E+01	L.T. 4.E+00
I-131	L.T. 6.E+01	L.T. 2.E+01	L.T. 7.E+01	L.T. 6.E+00
CS-134	L.T. 1.E+00	L.T. 3.E+00	L.T. 9.E-01	L.T. 5.E-01
CS-137	L.T. 2.E+00	L.T. 3.E+00	L.T. 1.E+00	L.T. 6.E-01
BA-140	L.T. 5.E+01	L.T. 3.E+01	L.T. 5.E+01	L.T. 9.E+00
CE-141	L.T. 5.E+00	L.T. 7.E+00	L.T. 5.E+00	L.T. 2.E+00
CE-144	L.T. 1.E+01	L.T. 2.E+01	L.T. 8.E+00	L.T. 4.E+00
RA-226	L.T. 4.E+01	L.T. 7.E+01	L.T. 2.E+01	L.T. 1.E+01
TH-228	L.T. 3.E+00	L.T. 6.E+00	L.T. 2.E+00	L.T. 2.E+00
H-3	L.T. 2.E+02	L.T. 2.E+02	L.T. 3.E+02	L.T. 2.E+02

B-12

H-26

APPENDIX I
NON-ODAM REQUIRED SAMPLING, SUPPLEMENTARY STATIONS

NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
Non-ODAM Required Sampling, Supplementary Stations
2009 Annual Report
January 1, 2009 to December 31, 2009

Prepared by
Teledyne Brown Engineering
2508 Quality Lane
Knoxville, TN 37931-3133

TABLE OF CONTENTS

I. Introduction	4
II. Summary and Discussion	5
A. Airborne Particulates	5
B. Airborne Iodine	5
C. Thermoluminescent Dosimeters	6

APPENDICES

Appendix A: Non-ODAM Required Sampling Locations.....A-1

Table A-1: Non-ODAM Sampling Station Description, Sample Type and Sample Location, Nebraska Public Power District, Cooper Nuclear Station, 2009.....A-2

Appendix B: Data Tables of Non-ODAM Required Sampling LocationsB-1

Table B-1: Exposure Pathway – Airborne Air Particulate and Charcoal FiltersB-2

Table B-2: Exposure Pathway – Airborne Composite Air Particulate FiltersB-4

Table B-3: Exposure Pathway – Thermoluminescent Dosimetry.....B-5

I Introduction

This report contains a complete tabulation of data for non-ODAM required Sampling Stations collected during the period January through December 2009 for the Cooper Nuclear Station (CNS) of the Nebraska Public Power District (NPPD) by Teledyne Brown Engineering - Environmental Services.

In assessing all the data gathered for this report, it was concluded that the operation of CNS had no adverse radiological impact on the environment, and there are no known active releases into the groundwater or surface water at Nebraska Public Power District.

II. Summary and Discussion of 2009 Analytical Results

Data from the radiological analyses of environmental media collected during 2009 for non-ODAM required stations are tabulated and discussed below.

Radiological analyses of environmental media characteristically approach and frequently fall below the detection limits of state-of-the-art measurement methods. The “less than” values in the data tables were calculated from each specific analysis and are dependent on sample size, detector efficiency, length of counting time, chemical yield (when appropriate) and the radioactive decay factor from time of counting to time of collection. Teledyne Brown Engineering’s analytical methods meet or are below the Lower Limit of Detection (LLD) requirements given in Table 2 of the USNRC Branch Technical Position, Radiological Monitoring Acceptable Program (November 1979, Revision 1). Appendix C contains a discussion of the LLD formulas.

The following is a discussion and summary of the results of the environmental measurements taken during the 2009 reporting period:

A. *Airborne Particulates*

Gross beta activity was observed in 52 of the 52 samples collected during 2009. The average concentration was 0.023 pCi/m³ with a range of 0.009 to 0.052 pCi/m³. The results of the gross beta activities are presented in Table B-1. The gross beta activities for 2009 were comparable to levels measured in the previous several years. Prior to that period the gross beta activities were higher due to atmospheric nuclear weapons testing performed in other countries. The preoperational period of 1971 through 1974 averaged 0.098 pCi/m³ gross beta.

Air particulate filters were collected weekly and composited by locations on a quarterly basis. They were analyzed by gamma ray spectroscopy. The results are presented in Table B-2. Beryllium-7, which is produced continuously in the upper atmosphere by cosmic radiation, was measured in three of four composite samples. The location had an average Be-7 concentration of 0.160 pCi/m³ with a range of 0.121 to 0.213 pCi/m³. During the preoperational period, beryllium-7 was measured at comparable levels. All other gamma emitters were below the detection limits.

B. *Airborne Iodine*

Charcoal cartridges used to collect airborne iodine were collected weekly and analyzed by gamma spectrometry for iodine-131. The results are presented in Table B-1. All results were below the required lower limit of detection.

C. *Thermoluminescent Dosimeters*

Thermoluminescent dosimeters (TLDs) determine environmental radiation doses and the results are presented in Table B-3. Ambient radiation was monitored at 26 non-ODAM required locations and collected quarterly. The quarterly average for the locations was 23.0 millirem/quarter and a range from 18.9 to 33.4 millirem/quarter. The preoperational period of 1971 through 1974 averaged 7.0 millirem/quarter. The data from year to year is in good agreement and indicates no adverse changes in radiation exposure to the population near the Cooper Nuclear Station.

APPENDIX A
NON-ODAM REQUIRED SAMPLING STATIONS

**NON-ODAM SAMPLE STATION DESCRIPTION,
SAMPLE TYPE AND SAMPLE LOCATION**

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
No. 111	Type: (1) Air Particulate and Charcoal Filters (2) Environmental Thermoluminescent Dosimetry Location: 10.8 miles west southwest and 1.3 miles west of Howe, Nebraska, NE ¼, S13, T4N, R13E, Nemaha County, Nebraska. Lon. 095.84.165 W – Lat. 40.31.955 N
N01	Type: (1) Environmental Thermoluminescent Dosimetry
N02	Type: (1) Environmental Thermoluminescent Dosimetry
N03	Type: (1) Environmental Thermoluminescent Dosimetry
N04	Type: (1) Environmental Thermoluminescent Dosimetry
N05	Type: (1) Environmental Thermoluminescent Dosimetry
N06	Type: (1) Environmental Thermoluminescent Dosimetry
N07	Type: (1) Environmental Thermoluminescent Dosimetry
N08	Type: (1) Environmental Thermoluminescent Dosimetry
N09	Type: (1) Environmental Thermoluminescent Dosimetry
N10	Type: (1) Environmental Thermoluminescent Dosimetry
N11	Type: (1) Environmental Thermoluminescent Dosimetry
N12	Type: (1) Environmental Thermoluminescent Dosimetry
N13	Type: (1) Environmental Thermoluminescent Dosimetry
N14	Type: (1) Environmental Thermoluminescent Dosimetry
N15	Type: (1) Environmental Thermoluminescent Dosimetry

<u>Sample Station (a)</u>	<u>Sample Description – Type and Location</u>
N16	Type: (1) Environmental Thermoluminescent Dosimetry
N17	Type: (1) Environmental Thermoluminescent Dosimetry
N18	Type: (1) Environmental Thermoluminescent Dosimetry
N19	Type: (1) Environmental Thermoluminescent Dosimetry
N20	Type: (1) Environmental Thermoluminescent Dosimetry
N21	Type: (1) Environmental Thermoluminescent Dosimetry
N22	Type: (1) Environmental Thermoluminescent Dosimetry
N23	Type: (1) Environmental Thermoluminescent Dosimetry
N24	Type: (1) Environmental Thermoluminescent Dosimetry
N25	Type: (1) Environmental Thermoluminescent Dosimetry

APPENDIX B
DATA TABLES OF NON-ODAM REQUIRED SAMPLING LOCATIONS

B-1
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - AIRBORNE
 AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 111

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
12/30/08	01/06/09	1.01E+04	CU.FT.	2.36E-02 ± 4.36E-03	L.T. 6.E-02
01/06/09	01/13/09	9.99E+03	CU.FT.	2.50E-02 ± 4.38E-03	L.T. 5.E-02
01/13/09	01/20/09	1.00E+04	CU.FT.	2.33E-02 ± 4.20E-03	L.T. 6.E-02
01/20/09	01/27/09	1.00E+04	CU.FT.	3.09E-02 ± 4.84E-03	L.T. 2.E-02
01/27/09	02/03/09	1.01E+04	CU.FT.	1.51E-02 ± 3.79E-03	L.T. 7.E-02
02/03/09	02/10/09	1.00E+04	CU.FT.	3.09E-02 ± 5.01E-03	L.T. 2.E-02
02/10/09	02/17/09	1.01E+04	CU.FT.	2.87E-02 ± 4.56E-03	L.T. 2.E-02
02/17/09	02/24/09	9.98E+03	CU.FT.	3.64E-02 ± 5.14E-03	L.T. 6.E-02
02/24/09	03/03/09	1.02E+04	CU.FT.	2.80E-02 ± 4.63E-03	L.T. 2.E-02
03/03/09	03/10/09	9.91E+03	CU.FT.	2.35E-02 ± 4.65E-03	L.T. 2.E-02
03/10/09	03/17/09	1.01E+04	CU.FT.	2.43E-02 ± 4.45E-03	L.T. 3.E-02
03/17/09	03/24/09	1.01E+04	CU.FT.	1.77E-02 ± 4.13E-03	L.T. 3.E-02
03/24/09	03/30/09	8.64E+03	CU.FT.	2.02E-02 ± 4.44E-03	L.T. 4.E-02
03/30/09	04/07/09	1.15E+04	CU.FT.	1.58E-02 ± 3.46E-03	L.T. 4.E-02
04/07/09	04/14/09	9.97E+03	CU.FT.	2.09E-02 ± 4.06E-03	L.T. 6.E-02
04/14/09	04/21/09	1.03E+04	CU.FT.	1.48E-02 ± 3.62E-03	L.T. 4.E-02
04/21/09	04/28/09	1.01E+04	CU.FT.	1.52E-02 ± 3.46E-03	L.T. 4.E-02
04/28/09	05/05/09	9.81E+03	CU.FT.	1.48E-02 ± 3.94E-03	L.T. 2.E-02
05/05/09	05/12/09	1.01E+04	CU.FT.	1.35E-02 ± 3.44E-03	L.T. 5.E-02
05/12/09	05/19/09	1.00E+04	CU.FT.	1.02E-02 ± 2.97E-03	L.T. 3.E-02
05/19/09	05/26/09	1.01E+04	CU.FT.	2.23E-02 ± 4.23E-03	L.T. 4.E-02
05/26/09	06/02/09	1.02E+04	CU.FT.	1.12E-02 ± 3.37E-03	L.T. 5.E-02
06/02/09	06/09/09	9.97E+03	CU.FT.	1.63E-02 ± 4.09E-03	L.T. 4.E-02
06/09/09	06/16/09	1.00E+04	CU.FT.	1.05E-02 ± 3.38E-03	L.T. 3.E-02
06/16/09	06/23/09	9.96E+03	CU.FT.	9.30E-03 ± 3.39E-03	L.T. 6.E-02
06/23/09	06/30/09	1.03E+04	CU.FT.	3.06E-02 ± 6.44E-03	L.T. 5.E-02

B-2

I-12

B-1
 NEBRASKA PUBLIC POWER DISTRICT
 COOPER NUCLEAR STATION
 EXPOSURE PATHWAY - AIRBORNE
 AIR PARTICULATE & CHARCOAL FILTERS

STATION NUMBER 111

COLL START DATE	TIME STOP DATE	SAMPLE VOLUME	UNITS	AP FILTER GROSS BETA (PCI/CU.M.)	CHARCOAL FILTER I-131 (PCI/CU.M.)
06/30/09	07/07/09	9.85E+03	CU.FT.	1.85E-02 ± 4.43E-03	L.T. 5.E-02
07/07/09	07/13/09	8.58E+03	CU.FT.	2.36E-02 ± 4.82E-03	L.T. 7.E-02
07/13/09	07/21/09	1.16E+04	CU.FT.	1.26E-02 ± 5.12E-03	L.T. 6.E-02
07/21/09	07/28/09	1.00E+04	CU.FT.	1.54E-02 ± 6.00E-03	L.T. 5.E-02
07/28/09	08/03/09	8.73E+03	CU.FT.	9.92E-03 ± 5.79E-03	L.T. 3.E-02
08/03/09	08/11/09	1.14E+04	CU.FT.	3.28E-02 ± 5.86E-03	L.T. 5.E-02
08/11/09	08/18/09	1.02E+04	CU.FT.	1.74E-02 ± 4.55E-03	L.T. 4.E-02
08/18/09	08/25/09	9.92E+03	CU.FT.	2.74E-02 ± 5.68E-03	L.T. 3.E-02
08/25/09	09/01/09	1.01E+04	CU.FT.	1.91E-02 ± 5.33E-03	L.T. 3.E-02
09/01/09	09/08/09	9.98E+03	CU.FT.	3.23E-02 ± 6.31E-03	L.T. 6.E-02
09/08/09	09/15/09	1.03E+04	CU.FT.	3.99E-02 ± 5.44E-03	L.T. 4.E-02
09/15/09	09/22/09	9.86E+03	CU.FT.	2.30E-02 ± 6.41E-03	L.T. 5.E-02
09/22/09	09/29/09	1.01E+04	CU.FT.	1.30E-02 ± 5.44E-03	L.T. 7.E-02
09/29/09	10/06/09	1.00E+04	CU.FT.	1.26E-02 ± 3.49E-03	L.T. 1.E-02
10/06/09	10/13/09	1.00E+04	CU.FT.	2.15E-02 ± 5.59E-03	L.T. 6.E-02
10/13/09	10/20/09	1.01E+04	CU.FT.	1.91E-02 ± 5.54E-03	L.T. 4.E-02
10/20/09	10/27/09	1.00E+04	CU.FT.	1.55E-02 ± 3.98E-03	L.T. 4.E-02
10/27/09	11/03/09	1.02E+04	CU.FT.	1.64E-02 ± 5.69E-03	L.T. 7.E-02
11/03/09	11/10/09	1.01E+04	CU.FT.	2.65E-02 ± 5.74E-03	L.T. 6.E-02
11/10/09	11/17/09	9.92E+03	CU.FT.	3.40E-02 ± 6.16E-03	L.T. 2.E-03
11/17/09	11/24/09	1.03E+04	CU.FT.	3.80E-02 ± 6.13E-03	L.T. 5.E-02
11/24/09	12/01/09	9.85E+03	CU.FT.	3.50E-02 ± 6.40E-03	L.T. 5.E-02
12/01/09	12/08/09	1.02E+04	CU.FT.	2.47E-02 ± 4.64E-03	L.T. 3.E-02
12/08/09	12/15/09	9.98E+03	CU.FT.	3.56E-02 ± 6.56E-03	L.T. 6.E-02
12/15/09	12/22/09	1.01E+04	CU.FT.	5.24E-02 ± 6.99E-03	L.T. 4.E-02
12/22/09	12/29/09	1.02E+04	CU.FT.	3.16E-02 ± 5.97E-03	L.T. 6.E-02

B-3

I-13

B-2
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - AIRBORNE
COMPOSITE AIR PARTICULATE FILTERS
(PCl/CU.M.)

STATION NUMBER 111

DATE COLLECTED	12/30 - 03/30/09	03/30 - 06/30/09	06/30 - 09/29/09	09/29 - 12/29/09
----------------	------------------	------------------	------------------	------------------

GAMMA SPECTRUM ANALYSIS:

BE-7	1.46E-01 ± 5.50E-02	L.T. 3.E-01	2.13E-01 ± 1.11E-01	1.21E-01 ± 5.26E-02
K-40	L.T. 5.E-02	L.T. 5.E-02	L.T. 4.E-02	L.T. 7.E-02
MN-54	L.T. 4.E-03	L.T. 4.E-03	L.T. 4.E-03	L.T. 2.E-03
CO-58	L.T. 6.E-03	L.T. 2.E-02	L.T. 1.E-02	L.T. 4.E-03
FE-59	L.T. 2.E-02	L.T. 8.E-02	L.T. 3.E-02	L.T. 8.E-03
CO-60	L.T. 2.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 2.E-03
ZN-65	L.T. 8.E-03	L.T. 1.E-02	L.T. 8.E-03	L.T. 7.E-03
ZR-95	L.T. 1.E-02	L.T. 3.E-02	L.T. 2.E-02	L.T. 6.E-03
RU-103	L.T. 1.E-02	L.T. 7.E-02	L.T. 3.E-02	L.T. 8.E-03
RU-106	L.T. 3.E-02	L.T. 4.E-02	L.T. 3.E-02	L.T. 2.E-02
I-131	L.T. 6.E+00	L.T. 1.E+04	L.T. 2.E+02	L.T. 1.E+00
CS-134	L.T. 3.E-03	L.T. 4.E-03	L.T. 3.E-03	L.T. 2.E-03
CS-137	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03	L.T. 3.E-03
BA-140	L.T. 1.E+00	L.T. 1.E+02	L.T. 1.E+01	L.T. 3.E-01
CE-141	L.T. 2.E-02	L.T. 1.E-01	L.T. 4.E-02	L.T. 1.E-02
CE-144	L.T. 1.E-02	L.T. 2.E-02	L.T. 1.E-02	L.T. 1.E-02
RA-226	L.T. 4.E-02	L.T. 5.E-02	L.T. 5.E-02	L.T. 4.E-02
TH-228	L.T. 4.E-03	L.T. 5.E-03	L.T. 5.E-03	L.T. 3.E-03

B-4

I-14

B-3
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - THERMOLUMINESCENT DOSIMETRY - TLD
COOPER NUCLEAR STATION 2009

Sample Nuclide	Station Number	First Quarter 01/01-03/31	Second Quarter 04/01-06/30	Third Quarter 07/01-09/30	Fourth Quarter 10/01-01/01	Quarter Average - 1 S.D.
TLD	111	23.9 ± 1.0	21.0 ± 0.8	22.5 ± 1.0	23.6 ± 0.8	22.7 ± 1.3
	N01	26.5 ± 0.0	19.9 ± 0.2	23.3 ± 0.3	22.2 ± 0.4	23.0 ± 2.7
	N02	23.3 ± 0.5	20.7 ± 0.8	24.2 ± 1.0	22.3 ± 1.3	22.6 ± 1.5
	N03	23.0 ± 1.1	21.7 ± 0.6	33.4 ± 4.6	21.9 ± 0.4	25.0 ± 5.6
	N04	24.4 ± 0.9	21.1 ± 0.6	22.3 ± 0.5	21.6 ± 0.4	22.3 ± 1.4
	N05	23.1 ± 1.3	19.4 ± 0.3	26.1 ± 2.8	21.2 ± 1.2	22.5 ± 2.9
	N06	23.0 ± 0.3	20.6 ± 0.5	20.1 ± 0.5	21.2 ± 0.4	21.2 ± 1.2
	N07	24.8 ± 0.3	32.1 ± 2.4	22.9 ± 0.5	22.6 ± 0.5	25.6 ± 4.4
	N08	22.7 ± 0.5	20.2 ± 1.6	25.8 ± 2.4	20.9 ± 0.7	22.4 ± 2.5
	N09	23.7 ± 0.4	21.0 ± 0.3	23.2 ± 0.4	22.4 ± 0.7	22.6 ± 1.2
	N10	24.2 ± 0.4	25.8 ± 1.1	28.7 ± 1.1	22.9 ± 0.7	25.4 ± 2.5
	N11	23.3 ± 0.4	20.3 ± 0.6	21.5 ± 0.4	22.9 ± 0.4	22.0 ± 1.4
	N12	25.8 ± 0.8	20.2 ± 0.7	23.0 ± 0.1	22.9 ± 0.4	23.0 ± 2.3
	N13	23.1 ± 0.1	22.3 ± 0.8	24.3 ± 1.2	24.4 ± 1.1	23.5 ± 1.0
	N14	24.1 ± 0.3	25.2 ± 0.9	23.1 ± 0.5	22.8 ± 0.7	23.8 ± 1.1
	N15	26.7 ± 0.8	22.2 ± 1.6	24.9 ± 0.7	21.4 ± 0.4	23.8 ± 2.4
	N16	26.5 ± 0.6	22.2 ± 0.7	24.0 ± 0.8	22.2 ± 0.5	23.7 ± 2.0
	N17	23.3 ± 0.6	21.1 ± 0.7	22.7 ± 0.2	21.2 ± 0.4	22.1 ± 1.1
	N18	21.7 ± 0.5	23.7 ± 1.0	20.9 ± 0.5	21.5 ± 0.8	22.0 ± 1.2
	N19	24.2 ± 0.7	20.6 ± 0.4	21.2 ± 0.4	20.6 ± 0.4	21.7 ± 1.7
	N20	26.4 ± 0.3	22.7 ± 0.1	23.0 ± 0.6	23.9 ± 1.3	24.0 ± 1.7
	N21	23.8 ± 0.6	19.5 ± 0.4	20.3 ± 0.3	20.1 ± 0.5	20.9 ± 2.0
N22	25.3 ± 0.5	(a)	21.9 ± 1.4	20.2 ± 0.3	22.5 ± 2.6	

(a) TLD N22 was identified as missing.

B-3
NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
EXPOSURE PATHWAY - THERMOLUMINESCENT DOSIMETRY - TLD
COOPER NUCLEAR STATION 2009

Sample Nuclide	Station Number	First Quarter 01/01-03/31	Second Quarter 04/01-06/30	Third Quarter 07/01-09/30	Fourth Quarter 10/01-01/01	Quarter Average - 1 S.D.
N23		21.9 ± 0.2	19.9 ± 0.1	18.9 ± 0.7	21.3 ± 0.9	20.5 ± 1.3
N24		26.3 ± 0.6	25.4 ± 0.9	(a)	23.6 ± 0.8	25.1 ± 1.4
N25		22.7 ± 0.6	23.7 ± 1.9	28.5 ± 2.9	20.7 ± 0.4	23.9 ± 3.3
Average/Quarter		24.1 ± 1.5	22.1 ± 2.8	23.6 ± 3.1	22.0 ± 1.1	
Average/Day		0.268	0.246	0.263	0.245	
Range		(21.7-26.7)	(19.4-32.1)	(18.9-33.4)	(20.1-24.4)	
Detection/Total		26/26	25/25	25/25	26/26	

(a) TLD N24 was identified as missing.