Sr. Vice President and Chief Nuclear Officer

PPL Susquehanna, LLC 769 Salem Boulevard Berwick, PA 18603 Tel. 570.542.3149 Fax 570.542.1504 btmckinney@pplweb.com



Docket Nos. 50-387

50-388

MAY 07 2008

U. S. Nuclear Regulatory Commission Attention: Document Control Desk Mail Stop O-P1-17 11555 Rockville Pike Rockville, MD 20852

SUSQUEHANNA STEAM ELECTRIC STATION ANNUAL RADIOLOGICAL ENVIRONMENTAL OPERATING REPORT PLA-6360

The Susquehanna Steam Electric Station Annual Radiological Environmental Operating Report is hereby submitted for the calendar year 2007 in accordance with Technical Specification 5.6.2.

Should you have any questions or require additional information, please contact Mr. Rocco R. Sgarro, Manager – Nuclear Regulatory Affairs, at (610) 774-7552.

B./T. McKinney

Attachment

Copy: Mr. D. J. Allard, DEP/BRP

Mr. S. J. Collins, NRC Region I, Regional Administrator

Mr. J. T. Furia, NRC Region I, Senior Health Physicist

Jann for B.T. Mckinney

Mr. R. R. Janati, DEP/BRP

Mr. F. W. Jaxheimer, NRC Sr. Resident Inspector

Ms. T. Lewis, DEP/BRP

Mr. R. Maiers, DEP/BRP

Mr. W. Nestel, INPO

Ms. D. Russo, ANI


Mr. B. Vaidya, NRC Project Manager

IE 25

MRR

Susquehanna Steam Electric Station Units 1 & 2

2007 ANNUAL REPORT

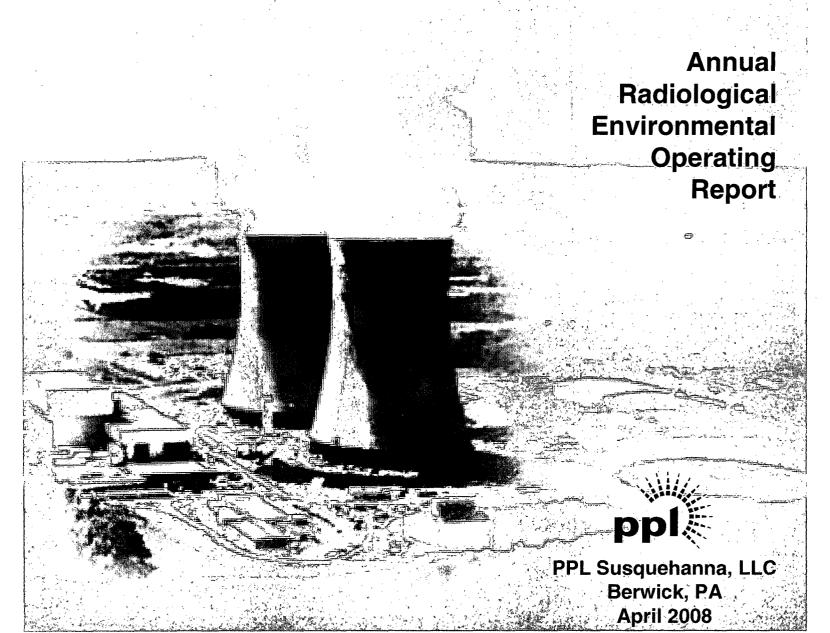

SUSQUEHANNA STEAM ELECTRIC STATION UNITS 1 and 2

Annual Radiological Environmental Operating Report

2007

Handle	
H. L. Riley, Health Physicist	
Reviewed by:	
Raymond & Doeblin	
R. E. Doebler, Chemistry Support Supervisor	
Approved by: Bunce Roads	
B. E. Rhoads, Manager – Plant Chemistry	

Prepared by:

PPL Susquehanna, LLC 769 Salem Boulevard Berwick, Pennsylvania 18603

TABLE OF CONTENTS

20M	MARY AND CONCLUSIONS	
INTR	ODUCTION	6
AMB	SIENT RADIATION MONITORING	17
AQU	ATIC PATHWAY MONITORING	21
ATM	OSPHERIC PATHWAY MONITORING	33
TERI	RESTRIAL PATHWAY MONITORING	37
	UND WATER MONITORING	
REF	ERENCES	44
<u>APPI</u>	ENDICES	
A.	2007 REMP SAMPLE COLLECTION, ANALYSIS TYPE, ANALYTICAL METHODS, PROGRAM CHANGES AND EXCEPTIONS	A-1
B.	2007 REMP MONITORING SCHEDULE (SAMPLING AND ANALYSIS)	B-1
, C .	2007 REMP MONITORING LOCATION DESCRIPTIONS	C-1
D.	2007 LAND USE CENSUS RESULTS	D-1
E.	INTENTIONALLY LEFT BLANK	E-1
F.	INTENTIONALLY LEFT BLANK	F-1
G.	2007 SSES REMP SUMMARY OF DATA	G-1
Н.	COMPARISON OF INDICATOR AND CONTROL 2007 REMP ANNUAL MEANS FOR SELECTED MEDIA ANALYSIS RESULTS WITH MEANS FROM PREOPERATIONAL AND PRIOR OPERATIONAL PERIODS	H-1
I.	SPECIFIC ANALYSIS RESULTS TABULATED BY MEDIA AND SAMPLING PERIOD	I-1
J.	PERFORMANCE SUMMARY FOR THE RADIOANALYSES OF SPIKED ENVIRONMENTAL SAMPLE MEDIA - 2007	J-1

LIST OF FIGURES

Figure Numbers <u>Title</u>		Page
1.	Exposure Pathways to Humans	10
2.	2007 TLD Monitoring Locations within One Mile	11
3.	2007 TLD Monitoring Locations from One to Five Miles	12
4.	2007 TLD Monitoring Locations Greater than Five Miles	13
5.	2007 Environmental Sampling Locations within One Mile	14
6.	2007 Environmental Sampling Locations from One to Five Miles	15
7.	2007 Environmental Sampling Locations Greater than Five Miles	16
8.	Ambient Radiation Levels Based on TLD Data	20
9.	Figure 9 – "Intentionally Deleted"	
10.	Tritium Activity in Surface Water	31
11.	Gross Beta Activity in Drinking Water	32
12.	Gross Beta Activity in Air Particulates	36
13.	Iodine-131 Activity in Milk	41

LIST OF TABLES

Table <u>Numbers</u>	<u>Title</u>	Page
A1	Source of REMP Data for Monitoring Year 2007	A-2
A2	TRM Sampling Deviations	A-5
A3	Non-TRM Sampling Occurrences	A-7
A 4 .	Equipment Operability Trending	A-10
B1	Annual Analytical Schedule for 2007	B-2
C1	TLD Locations for 2007	C-2
C2	Sampling Locations for 2007	C-7
D1	Nearest Residence, Garden, and Dairy Animal for 2007	D-3
G	Summary of Data for 2007	G-3
H1	Ambient Radiation Levels as Measured by TLDS	H-3
H2	"Intentionally Deleted"	
НЗ	Surface Water Iodine-131 Activities	H-3
H4	Surface Water Tritium Activities	H-3
H5	"Intentionally Deleted"	
Н6	Drinking Water Gross Beta Activities	H-3
H7	Drinking Water Tritium Activities	H-4
H8	Fish Potassium-40 Activities	H-4
Н9	Sediment Potassium-40 Activities	H-4
H10	Sediment Radium-226 Activities	H-4
H11	Sediment Thorium-228 Activities	H-4

Table Numbers <u>Title</u>		Page	
H12	Sediment Cesium-137 Activities	H-5	
H13	Air Particulate Gross Beta Activities	H-5	
H14	Air Particulate Beryllium-7 Activities	H-5	
H15	Soil Potassium-40 Activities	H-6	
H16	Soil Radium-226 Activities	H-6	
H17	Soil Thorium-228 Activities	H-6	
H18	Soil Cesium-137 Activities	H-6	
H19	Milk Potassium-40 Activities	H-7	
H20	Ground Water Tritium Activities	H-7	
I-1	Environmental Thermoluminescent Dosimtery Results	I-3	
I-2	Tritium and Gamma Spectroscopic Analyses of Surface Water	I-6	
I-3	Iodine-131 Analyses of Surface Water	I-8	
I-4	Gross Beta, Tritium, Gamma Spectroscopic Analyses of Drinking Water	I-10	
I-5	Gamma Spectroscopic Analyses of Fish	I-11	
I-6	Gamma Spectroscopic Analyses of Shoreline Sediment	I-12	
I-7	Tritium and Gamma Spectroscopic Analyses of Ground Water	I-13	
I-8	Gross Beta Analyses of Air Particulate Filters	I-14	
I-9	Gamma Spectroscopic Analyses of Composited Air Particulate Filters	I-16	
I-10	Iodine-131, and Gamma Spectroscopic Analyses of Milk	I-17	
I-11	Gamma Spectroscopic Analyses of Soil	I-21	

LIST OF TABLES

Table <u>Numbers</u>	<u>Title</u>	Page
I-12	Gamma Spectroscopic Analyses of Food Products (Fruits and Vegetables)	I-22
I-13	Typical Minimum Detectable Concentrations of Nuclides Searched for but not found by Gamma Spectrometry in the Vicinity of SSES	I-23
J-1	Environmental Resource Associates (ERA) Proficiency Testing Program	J-4
J-2	Analytics Environmental Radioactivity Cross Check Program – 2007 Teledyne Quality Control Spike Program	J-6
J-3	PPL REMP Laboratory Spike Program Analytics Environmental Radioactivity Cross Check Program	J-11
J-4	DOE – MAPEP Mixed Analyte Performance Evaluation Program	J-16

SUMMARY AND CONCLUSIONS

Radiological Dose Impact

This report on the Radiological Environmental Monitoring Program covers the year 2007.


During that period, 1211 analyses were performed on 927 samples at 32 sampling locations. Additionally, 228 TLD direct radiation measurements were performed at 57 locations around the site.

In assessing all the data gathered and comparing with SSES pre-operational data, it was concluded that the operation of SSES had no adverse radiological impact on the health and safety of the public or the environment.

The total whole body dose from both ingested radionuclides and direct radiation from SSES Operations is negligible compared to the public's exposure from natural background radiation, medical irradiation, and radiation from consumer products of more than 300 millirem/year.

The following graph compares public dose from SSES operation to that from other sources of radioactivity and radiation.

COMPARISON OF PERCENT OF AVERAGE ANNUAL PUBLIC DOSE FROM OTHER SOURCES WITH THAT FROM THE SSES



Sources for the values provided, with the exception of Susquehanna, are the following from NCRP Report #93 (1987): Tables 2.4 (Natural Background), 5.1 (Consumer Products), and 7.4 (Medical).

Ambient Gamma Radiation

Environmental direct radiation measurements were performed quarterly on and around the SSES site using thermoluminescent dosimeters (TLDs).

The maximum direct radiation dose from SSES operation to a member of the public was approximately 0.0321 mrem for all of 2007. This dose represents approximately 0.13% of the 25-mrem whole-body SSES Technical Requirements (TRO 3.11.3) limit for all SSES sources of radioactivity and radiation.

Aquatic Environment

Surface water samples were analyzed for concentrations of tritium, iodine-131, and gamma emitting nuclides. Drinking water samples were analyzed for concentrations of gross beta, tritium and gamma emitting nuclides. Gross beta activities detected in drinking water were consistent with those reported in previous years.

Iodine-131 activity was detected in 13 of 36 surface water samples. Evidence indicates that it is there only as the result of the discharge of medical waste to the Susquehanna or Lackawanna Rivers through sewage treatment plants upstream of the SSES. Iodine-131 was not reported to have been discharged with water released from the SSES to the Susquehanna River during 2007.

Tritium activity attributable to SSES operation was detected in the aquatic pathway to man. The maximum dose from the ingestion of tritium was

estimated at the nearest downriver municipal water supplier via the drinking water pathway and near the outfall of the SSES discharge to the Susquehanna River via the fish pathway. The maximum whole body and organ doses due to tritium identified via REMP samples is approximately 0.0012 mrem/year. This dose is less than one-tenth of one percent of the dose guidelines stated in 10 CFR 50, Appendix I.

Fish samples were analyzed for concentrations of gamma emitting nuclides. Concentrations of naturally occurring K-40 were consistent with those detected in previous years. No fission or activation products were detected in fish.

Sediment samples were analyzed for concentrations of gamma emitting nuclides. Cesium-137 was observed in sediment and attributed to non-SSES sources (residual fallout from atmospheric weapons testing). Concentrations of naturally occurring K-40, radium-226, and actinium-thorium-228 were found consistent with those detected in previous years.

Atmospheric Environment

Air particulate samples were analyzed for concentrations of gross beta and gamma emitting nuclides. Cosmogenic Be-7 was detected at levels consistent with those detected in previous years.

Air iodine samples were analyzed for concentrations of iodine-131. All results were less than the MDC.

Terrestrial Environment

Soil samples were analyzed for concentrations of gamma emitting nuclides. Cesium-137 was observed in soil and attributed to non-SSES sources (residual fallout from atmospheric weapons testing). Concentrations of naturally occurring K-40 were consistent with those detected in previous years. Concentrations of naturally occurring actinium-thorium-228 were consistent with those of previous years.

Cow milk samples were analyzed for concentrations of iodine-131 as well as other gamma emitting nuclides. All iodine results were less than the MDC. Concentrations of naturally occurring K-40 were consistent with those detected in previous years. No fission or activation products were detected.

Pumpkins, soybeans, green beans, potatoes and rye which were irrigated with Susquehanna River water downstream of the SSES were sampled. These food products were sampled during the harvest season and analyzed for concentrations of gamma emitting nuclides. Concentrations of naturally occurring K-40 were found consistent with those in previous years. No fission or activation products were detected.

Ground Water

Ground water samples were analyzed for concentrations of tritium and gamma emitting nuclides. Three tritium samples were measured above analysis MDC in 2007. The activity was slightly

above the detection limit. The 2007 indicator mean tritium activity level is lower than the range for preoperational years. No fission or activation products were detected.


Relative Radionuclide Activity Levels in Selected Media

Some media monitored in the environment are significant for the numbers of gamma-emitting radionuclides routinely measured at levels exceeding analysis MDCs. Sediment in the aquatic pathway and soil in the terrestrial pathway are two such media.

The following graphs show the relative activity contributions for the types of gamma-emitting radionuclides reported at levels above the analysis MDCs in sediment and soil at indicator locations during 2007.


AQUATIC PATHWAY

PERCENT TOTAL GAMMA ACTIVITY

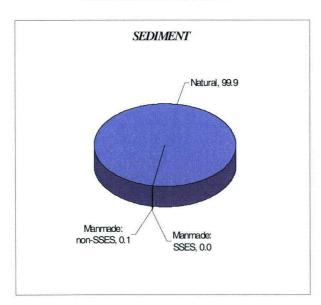

TERRESTRIAL PATHWAY

PERCENT TOTAL GAMMA ACTIVITY

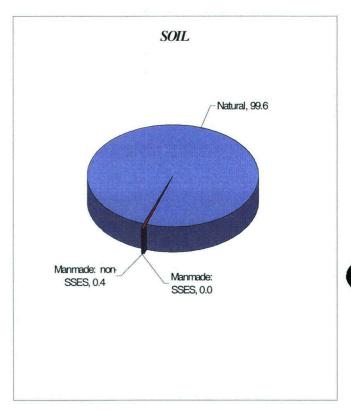

Naturally occurring radionuclides accounts for over 99.0 % of the gamma-emitting activity in both sediment and soil in 2007. Man-made radionuclides of SSES origin accounted for 0.0% of the gamma-emitting activity in sediment and soil during 2007.

Radionuclides Contributing to Dose from SSES Operation

Of the three man-made radionuclides reported in the environment by the SSES REMP (i.e. H-3, I-131 and Cs-137), tritium is the only radionuclide attributable to SSES operation.

The whole body and organ dose to members of the public attributable to tritium identified in REMP blowdown samples was 0.0012 mrem.

Tritium was included in the dose calculation because it was identified in the REMP samples of water being discharged to the river. The concentration of tritium in the water and the volume of water discharged were used to determine the amount of tritium released. The presumed exposure pathways to the public from this radionuclide were drinking water taken from the Susquehanna River at Danville, PA, and eating fish caught near the SSES discharge to the river. This assumption is based on the fact that tritium does not emit gamma radiation and the beta radiation emitted by tritium is not sufficiently penetrating to reach an individual on the shore.

INTRODUCTION

Radiological Environmental Monitoring Program (REMP)

The SSES is located on approximately an 1500-acre tract along the Susquehanna River, five miles northeast of Berwick in Salem Township, Luzerne County, Pennsylvania. The area around the site is primarily rural, consisting predominately of forest and agricultural lands. (More specific information on the demography, hydrology, meteorology, and land use characteristics of the area in the vicinity of the SSES can be found in the Environmental Report (Reference 1), the Final Safety Analysis Report (Reference 2), and the Final Environmental Statement (Reference 3) for the SSES.)

The SSES implements the REMP in accordance with Technical Specifications, Technical Requirements Manual and the Offsite Dose Calculation Manual, which are based on the design objectives in 10CFR Part 50 Appendix I, Sections IV.B.2, IV.B.3, and IV.C.

The REMP supplements the results of the radioactive effluent-monitoring program by verifying that the measurable concentrations of radioactive materials and levels of radiation in the environment are not higher than expected on the basis of the effluent measurements and modeling of the environment in the vicinity of the SSES.

Key objectives of the SSES REMP are as follows:

- Document compliance with SSES REMP Technical Requirements radiological environmental surveillances
- Verify proper implementation of SSES radiological effluent controls
- Identify, measure, and evaluate trends of radionuclide concentrations in environmental pathways near SSES
- Assess impact of SSES Effluents on the environment and the public

PPL has maintained a Radiological **Environmental Monitoring Program** (REMP) in the vicinity of the Susquehanna Steam Electric Station Units 1 and 2 since April, 1972, prior to construction of both units and ten years prior to the initial operation of Unit 1 in September, 1982. The purpose of the preoperational REMP (April, 1972 to September, 1982) was to establish a baseline for radioactivity in the local environment that could be compared with the radioactivity levels observed in various environmental media throughout the operational lifetime of the SSES. This comparison facilitates assessments of the radiological impact of the SSES operation.

Potential Exposure Pathways

The three pathways through which radioactive material may reach the public from nuclear power plants are the atmospheric, terrestrial, and aquatic pathways. (Figure 1 depicts these pathways for the intake of radioactive materials.)

Mechanisms by which people may be exposed to radioactivity and radiation in the environment vary with the pathway. Three mechanisms by which a member of the public has the potential to be exposed to radioactivity or radiation from nuclear power plants such as the SSES are as follows:

- inhalation (breathing)
- ingestion (eating and drinking), and
- whole body irradiation directly from a plant or from immersion in the radioactive effluents.

REMP Scope

The scope of the SSES REMP was developed based on the NRC's Radiological Assessment Branch Technical Position on radiological environmental monitoring, as described in Revision 1, November 1979 (Reference 4). However, the REMP conducted by PPL for the SSES exceeds some of the monitoring suggested by the NRC's branch technical position, in terms of the number of monitoring locations, the frequency of certain monitoring, the types of analyses required for the samples, and the achievable analysis sensitivities.

During the operational period of the SSES, two different categories of

monitoring locations, called control and indicator locations, were established to further assist in assessing the impact of station operation. Control locations are located at sites where it is considered unlikely that radiation or radioactive material from normal station operation would be detected. Indicator locations are sited where it is expected that radiation and radioactive material that might originate from the station would be most readily detectable.

Control locations for the atmospheric and terrestrial pathways are more than 10 miles from the station. Preferably, the controls also are in directions from the station less likely to be exposed to wind blowing from the station than are the indicator locations. Control locations for the aquatic pathway, the Susquehanna River, are upstream of the station's discharge to the river.

Indicator locations are selected primarily on the basis of proximity to the station, although factors such as meteorology, topography, and sampling practicality also are considered. Indicator locations for the atmospheric and terrestrial pathways are typically less than 10 miles from the station. Most often, they are within 5 miles of the station. Indicator locations in the Susquehanna River are downstream of the station's discharge. Monitoring results from indicator locations are compared with results from control locations. These comparisons are made to discern any differences in the levels and/or types of radioactive material and/or radiation that might exist between indicators and controls and that could be attributable to the station.

In 2007, the SSES REMP collected 927 samples at 32 locations and performed 1,211 analyses. In addition, the REMP monitors ambient radiation levels using thermoluminescent dosimeters (TLDs) at 57 indicator and control locations, resulting in 228 radiation level measurements in 2007. The media monitored and analyses performed are summarized in the table below. Figures 2 through 7 display the REMP TLDs and sampling locations in the vicinity of the SSES. Appendix C provides directions, distances, and a brief description of each of the locations in Figures 2 through 7.

REMP Monitoring Sensitivity

Detection of radiation and radioactive material from the SSES in the environment is complicated by the presence of naturally occurring radiation and radioactive materials from both terrestrial and cosmic sources. Manmade radiation and radioactive material from non-SSES sources, such as nuclear fallout from previous nuclear weapons tests and medical wastes, also can make

identification of SSES radiation and radioactive material difficult. Together, this radiation and radioactive material present background levels from which an attempt is made to distinguish relatively small contributions from the SSES. This effort is further complicated by the natural variations that typically occur from both monitoring location to location and with time at the same locations.

The naturally occurring radionuclides potassium-40, beryllium-7, actinium-228, thorium-228, and tritium are routinely observed in certain environmental media. Potassium-40 has been observed in all monitored media and is routinely seen at readily detectable levels in such media as milk. fish, fruits and vegetables. Seasonal variations in beryllium-7 in air samples are regularly observed. Man-made radionuclides, such as cesium-137 left over from nuclear weapons testing are often observed as well. In addition, the radionuclide tritium, produced by both cosmic radiation interactions in the upper atmosphere as well as man-made (nuclear weapons), is another radionuclide typically observed.

SSES REMP		
Type of Monitoring	Media Monitored	
Gross Beta Activity	Drinking Water and Air Particulates	
Gamma-Emitting Radionuclide Activities	All Media	
Tritium Activity	All Waters	
Iodine-131 Activity	Surface Water, Air & Milk	
Gamma Radiation Exposure	Ambient Radiation Levels	
(by TLD)	·	

Radioactivity levels in environmental media are usually so low that their measurements, even with state-of-theart measurement methods, typically have significant degrees of uncertainty associated with them (Reference 5). As a result, expressions are often used when referring to these measurements that convey information about the levels being measured relative to the measurement sensitivities. Terms such as "minimum detectable concentration" (MDC) are used for this purpose. The MDC is an "a priori" estimate of the capability for detecting an activity concentration by a given measurement system, procedure, and type of sample. Counting statistics of the appropriate instrument background are used to compute the MDC for each specific analysis. The formulas used to calculate MDCs may be found in procedures referenced in Appendix A.

The methods of measurement for sample radioactivity levels used by PPL's contracted REMP radioanalytical laboratories are capable of meeting the analysis sensitivity requirements found in the SSES Technical Requirements.

Exposure Pathways to Humans

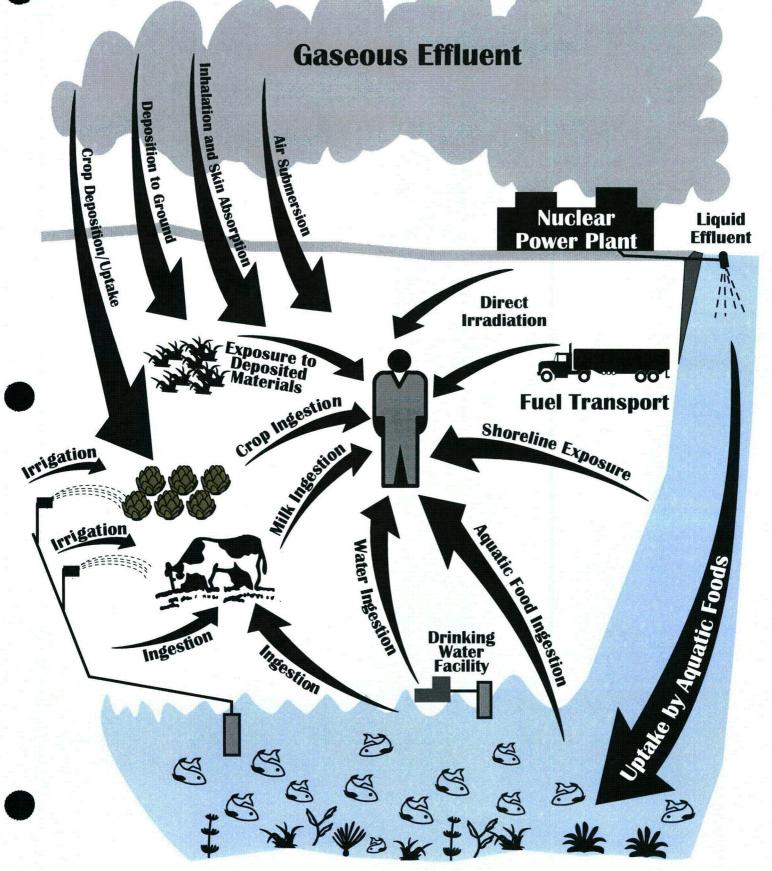


FIGURE 2 2007 TLD MONITORING LOCATIONS WITHIN ONE MILE

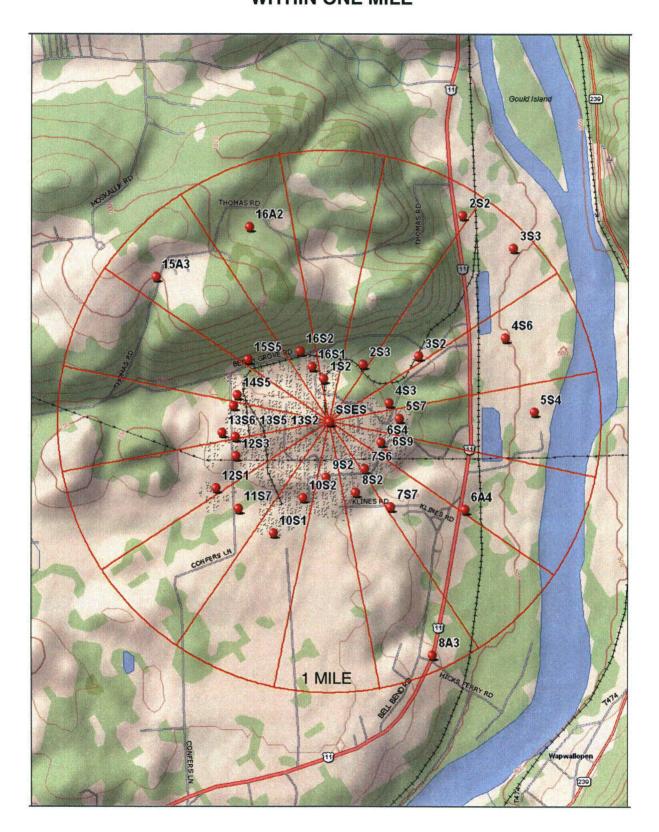


FIGURE 3 2007 TLD MONITORING LOCATIONS FROM ONE TO FIVE MILES

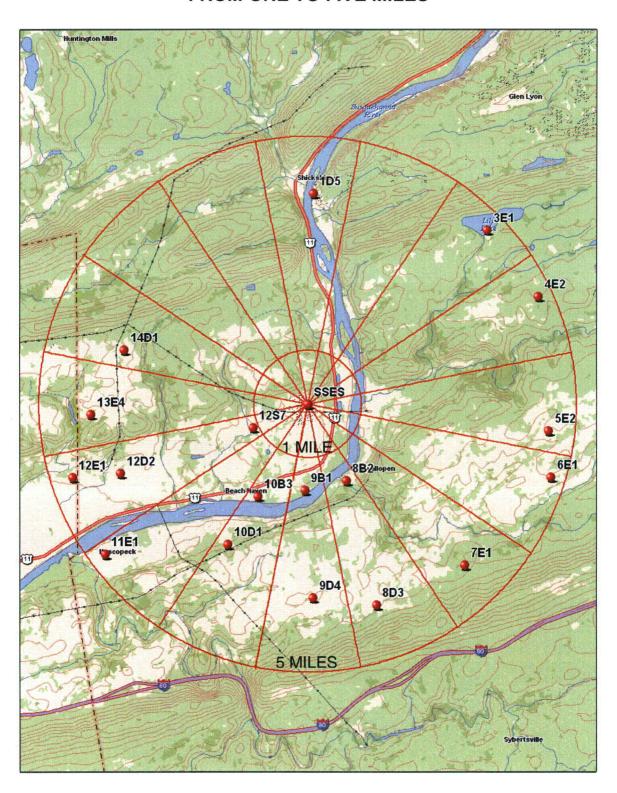


FIGURE 4 2007 TLD MONITORING LOCATIONS GREATER THAN FIVE MILES

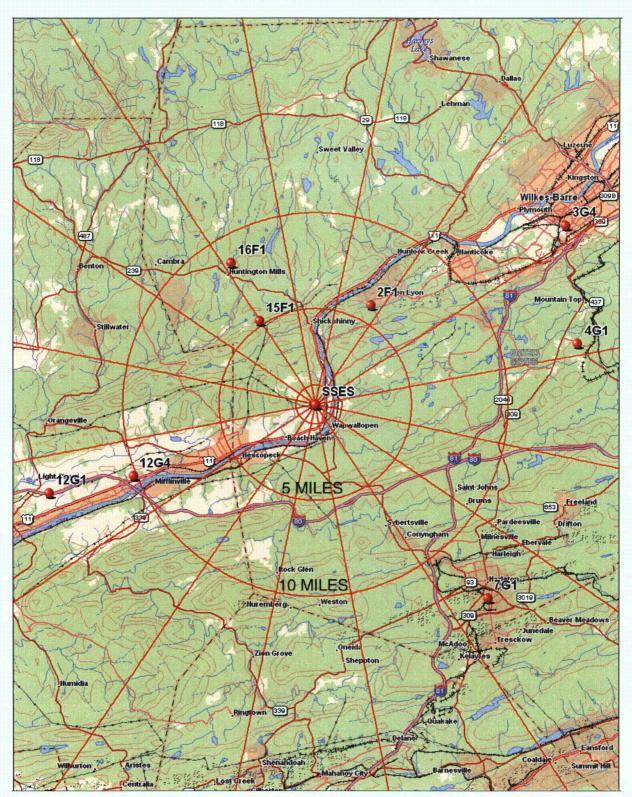


FIGURE 5
2007 ENVIRONMENTAL SAMPLING LOCATIONS
WITHIN ONE MILE

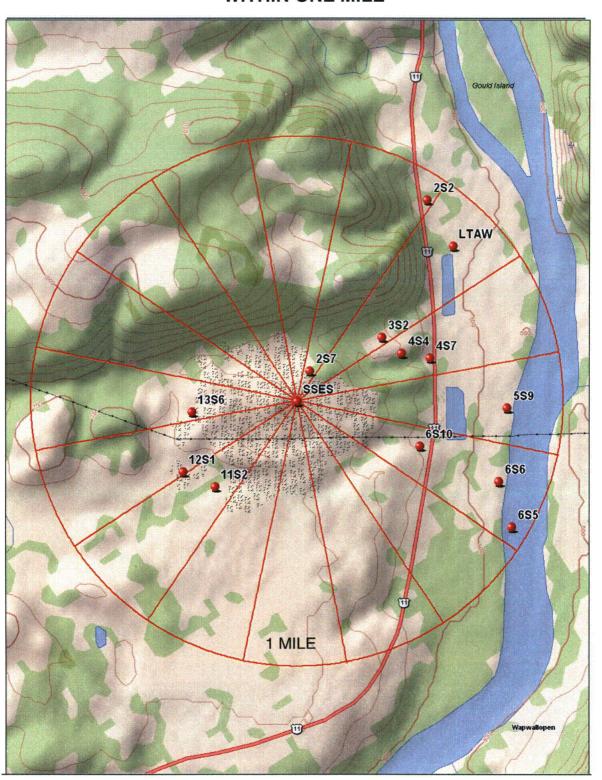


FIGURE 6
2007 ENVIRONMENTAL SAMPLING LOCATIONS
FROM ONE TO FIVE MILES


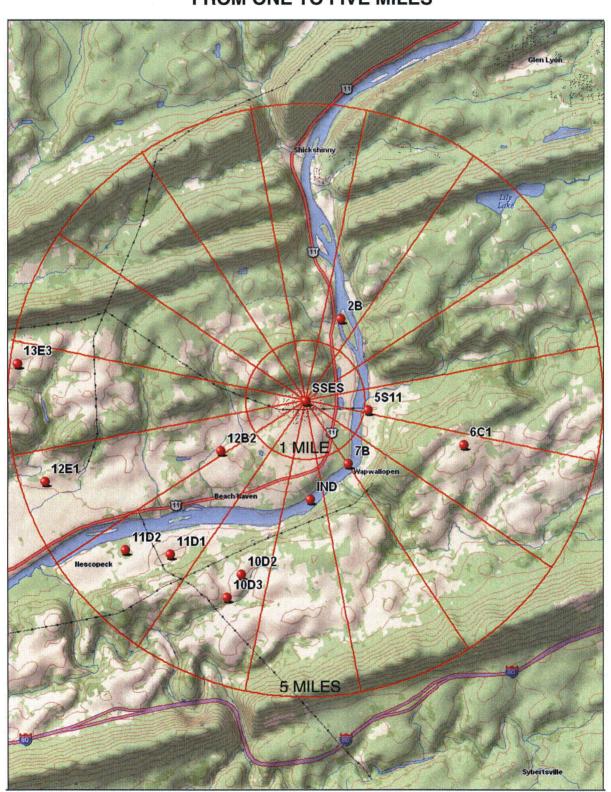


FIGURE 7 2007 ENVIRONMENTAL SAMPLING LOCATIONS GREATER THAN FIVE MILES

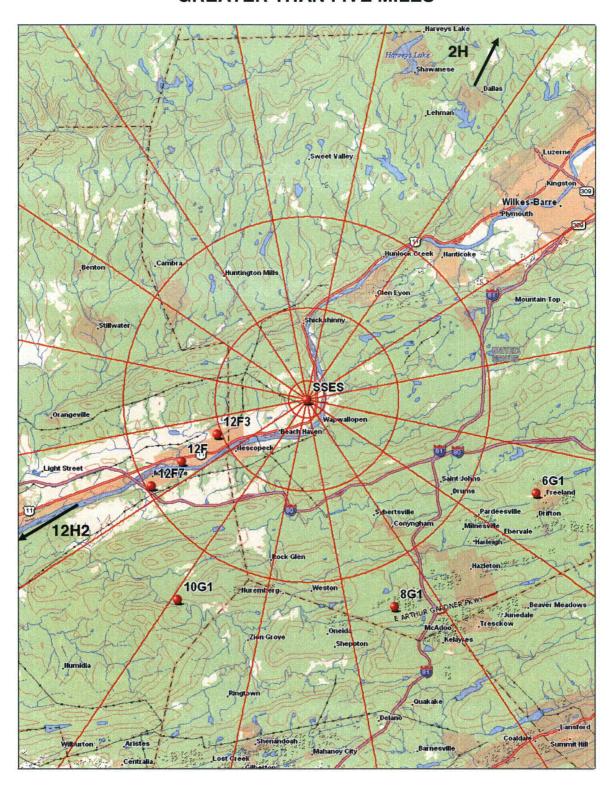

AMBIENT RADIATION MONITORING

INTRODUCTION

The primary method for the SSES REMP measurement of ambient radiation levels is the use of thermoluminescent dosimeters (TLDs). The TLDs are crystals (calcium sulfate) capable of detecting and measuring low levels of radiation by absorbing a portion of the radiation's energy that is incident upon them and storing the captured energy until the TLDs are processed (read). Processing involves heating the TLDs to release their stored energy in the form of light and measuring the intensity of the light that they emit. The intensity of the emitted light is proportional to the amount of radiation to which they were exposed. Calibration of the TLD processors permits a reliable relationship to be established between the light emitted and the amount of radiation dose received by the TLDs. The result permits accurate measurements of the ambient radiation in the environment.

Environmental TLDs are continually exposed to natural radiation from the ground (terrestrial radiation) and from the sky (cosmic) radiation. In addition, they also may be exposed to man-made radiation. Most of the environmental TLD's natural radiation exposure comes from sources in the ground. These terrestrial sources vary naturally with time due to changes in soil moisture, snow cover, etc. The natural-radiation picture is complicated because the factors affecting radiation reaching the TLDs from the ground vary differently with time from one location to another

due to locational differences in such factors as soil characteristics (amounts of organic matter, particle size, etc.), drainage opportunities, and exposure to sunlight. Environmental TLDs can also be affected by direct radiation (shine) from the SSES turbine buildings during operation, radwaste transfer and storage, and radioactive gaseous effluents from the SSES.

Unfortunately, TLDs do not have any inherent ability to indicate the source of the radiation to which they are exposed. The placement of numerous TLDs in the environment can facilitate decisionmaking about the possible radiation sources to which TLDs are exposed. However, a method for evaluating TLD data is still required. The SSES REMP relies on a statistically based approach to simultaneously compare indicator TLD data with control TLD data and operational TLD data with preoperational TLD data. This approach permits the flagging of environmental TLD doses that might have been produced by both man-made sources of radiation, as well as natural radiation sources. It also provides a means for attributing a portion of the total TLD dose to SSES operation if appropriate.

Interpretation of environmental TLD results is described in PPL Nuclear Engineering Study, EC-ENVR-1012 (Revision 0, January 1995).

Scope

Direct radiation measurements were made using Panasonic 710A readers and Panasonic UD-814 (calcium sulfate) thermoluminescent dosimeters (TLD). During 2007, the SSES REMP had 46 indicator, 6 special interest and 5 control TLD locations. Refer to Table C1 for TLD measurement locations. The TLD locations are placed on and around the SSES site as follows:

A site boundary ring (i.e. an inner ring) with at least 1 TLD in each of the 16 meteorological sectors, in the general area of the site boundary. Currently there are 30 locations. They are: (1S2, 2S2, 2S3, 3S2, 3S3, 4S3, 4S6, 5S4, 5S7, 6S4, 6S9, 7S6, 7S7, 8S2, 8A3, 9S2, 9B1, 10S1,10S2, 11S7, 12S1, 12S3, 12S7, 13S2, 13S5, 13S6, 14S5, 15S5, 16S1 and 16S2) near and within the site perimeter representing fence post doses from a SSES release.

An outer distance ring with at least 1 TLD in each of the 16 meteorological sectors, in the 3 to 9 mile range from the site. Currently there are 16 locations. They are: (1D5, 2F1, 3E1, 4E2, 5E2, 6E1, 7E1, 8D3, 9D4, 10D1, 11E1, 12D2, 13E4, 14D1, 15F1 and 16F1). These TLD's are located to measure possible exposures to close-in population.


The balance of TLD locations represents the special interest areas such as population centers, schools, residences and control locations. Currently there are six special interest locations (6A4, 15A3, 16A2, 8B2, 10B3 and 12E1) and 5 control locations (3G4, 4G1, 7G1, 12G1 and 12G4).

The specific locations were determined according to the criteria presented in the NRC Branch Technical Position on Radiological Monitoring (Revision 1, November 1979).

Monitoring Results

TLDs

The TLDs were exchanged quarterly and processed by the SSES Health Physics Dosimetry Group. Average quarterly ambient gamma radiation levels measured by environmental TLDs is shown in the bar graph below.

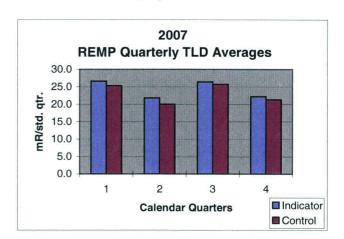

The average environmental results for all indicator and control TLD were 24.3 +/- 8.9 and 23.1 +/- 3.4 (mR/std.qtr.), respectively.


Indicator environmental TLD results for 2007 were examined quarterly on an individual location basis and compared with both current control location results and preoperational data. Very small SSES exposure contributions were identified during 2007 at ten onsite locations as follows: 1S2, 2S3, 6S4, 6S9, 7S6, 9S2, 10S2, 13S2, 13S5, and 16S1.

The highest, estimated, gamma radiation dose of 3.21 E-02 mrem for 2007 was at location 9S2. It is assumed that the occupancy time for a member of the public is no more than one hour each calendar quarter at location 9S2. This dose is approximately 0.13% of the 25 mrem whole-body SSES Technical Requirements (TRO 3.11.3) limit for all SSES sources of radioactivity and radiation.

Refer to the following for results of TLD measurements for 2007:

- Figure 8, trends quarterly TLD results for both preoperational and operational periods
- Appendix G, Table G Summary of Data Table, page G-3 shows the averages for TLD indicator and control locations for the entire year.
- Appendix H, Table H1, page H-3 shows a comparison of the 2007 mean indicator and control TLD results with the means for the preoperational and operational periods at the SSES.
- Appendix I, Table I-1, page I-3 through I-7 shows TLD results for all locations for each quarter of 2007.

FIGURE 8 - AMBIENT RADIATION LEVELS
BASED ON TLD DATA

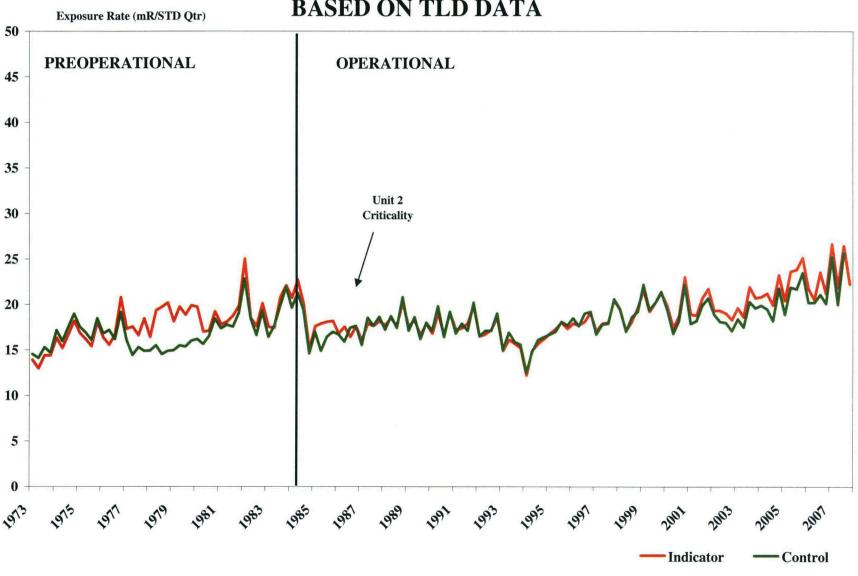

AQUATIC PATHWAY MONITORING

INTRODUCTION

In 2007 the SSES REMP monitored the following media in the aquatic pathway: surface water, drinking water, fish, sediment, fruits and vegetables. Some of the media (e.g., drinking water and fish) provide information that can be especially useful to the estimation of possible dose to the public from potentially ingested radioactivity, if detected. Other media, such as sediment, can be useful for trending radioactivity levels in the aquatic pathway, primarily because of their tendency to assimilate certain materials that might enter the surface water to which they are exposed. The results from monitoring all of these media provide a picture of the aquatic pathway that is clearer than that which could be obtained if one or more were not included in the REMP.

SSES Technical Requirements only require that fruit and vegetables be sampled at locations irrigated by Susquehanna River water from points downstream of the SSES discharge to the River. The land use census (Reference 11) conducted in 2007 looked at farms within 10 miles downstream of the SSES. The Zehner Farm (11D1-field east of Nescopeck) irrigated pumpkins, soybeans and rye in August 2007, using Susquehanna River water. Additionally the Lupini Farm (11D2-Route 93 field) irrigated green beans and potatoes in August 2007 using Susquehanna River water. No other fields within 10 miles downriver

of Susquehanna SES were irrigated in 2007.

The aquatic pathway in the vicinity of the SSES is the Susquehanna River. Monitoring of all of the aquatic media, except drinking water, is conducted both downstream and upstream of the location from which occasional SSES low-level radioactive discharges enter the river. The upstream monitoring locations serve as controls to provide data for comparison with downstream monitoring results. The potential exists for radioactive material that might be present in SSES airborne releases to enter the Susquehanna River upstream of the plant through either direct deposition (e.g., settling or washout) or by way of runoff from deposition on land adjacent to the river. However, direct deposition and runoff are considered to be insignificant as means of entry for SSES radioactivity into the Susquehanna River when compared to liquid discharges under normal conditions.

Lake Took-a-While (LTAW), which is located in PPL's Riverlands Recreation Area adjacent to the Susquehanna River, is also considered to be part of the aquatic pathway for monitoring purposes. Although it is not in a position to receive water discharged to the river from the SSES, it can receive storm runoff from the SSES. Storm runoff from the SSES site should not normally contain any measurable radioactivity from the plant. However, the SSES REMP, consistent with other

aspects of aquatic monitoring and the REMP, in general, goes beyond its requirements by monitoring LTAW.

Scope

Surface Water

Surface water was routinely sampled from the Susquehanna River at one indicator location (6S5/Outfall Area) and one control location (6S6/River Water Intake Line) during 2007. Sampling also took place at the following additional indicator locations: the SSES discharge line to the river (2S7), Lake Took-A-While (LTAW) and the Peach Stand Pond (4S7).

Drinking Water

Drinking water samples were collected at location 12H2, the Danville Municipal Water Authority's treatment facility on the Susquehanna River, in 2007. Treated water is collected from the end of the processing flowpath, representing finished water that is suitable for drinking. This is the nearest point downstream of the SSES discharge to the River at which drinking water is obtained. No drinking water control location is sampled. For all intents and purposes, control surface water sampling location (6S6) would be suitable for comparison.

Fish

Fish were sampled from the Susquehanna River in the spring and fall of 2007, at one indicator location, IND, downstream of the SSES liquid discharge to the River and one control location, 2H, sufficiently upstream to essentially preclude the likelihood that fish caught there would spend any time

below the SSES discharge. In addition, fish were also sampled in the fall from PPL's Lake Took-a-While, location LTAW. This location is not downstream of the SSES discharge. It is sampled because of its potential for receiving runoff from the SSES. LTAW is considered an indicator location.

Sediment

Sediment sampling was performed in the spring and fall at indicator locations 7B and 12F and control location 2B on the Susquehanna River.

Fruits and Vegetables

Fruits and vegetables were sampled at indicator locations 11D1 and 11D2. These locations were irrigated with Susquehanna River water in 2007. The edible portions are kept for analysis.

Sampling

Surface Water

Weekly water samples were collected at indicator location 6S5 for both biweekly and monthly compositing. Location 6S5 was considered a backup for location 2S7 in the event that water could not be obtained from the automatic samplers at these locations. Routine samples for 6S5 were collected from a boat, unless river conditions prohibited boating. When this occurs, samples are collected from an alternate shoreline site located below the Susquehanna SES discharge diffuser. The shoreline samples are collected at the Wetlands Cottage area, approximately 100-150 yards down river from the 6S5 site.

Indicator location 2S7 the SSES Cooling Tower Blowdown Discharge (CTBD) line, and control location 6S6, the SSES River Water Intake structure, were time -proportionally sampled using automatic continuous samplers. The samplers were typically set to obtain 30-60 ml aliquots every 20-25 minutes. Weekly, the water obtained by these samplers was retrieved for both biweekly and monthly compositing.

The other surface water monitoring locations, LTAW and Peach Stand Pond (4S7), were grab sampled once each quarter.

Drinking Water

Treated water was time-proportionally sampled by an automatic sampler. The sampler was typically set to obtain three 12-ml aliquots every twenty minutes. Weekly, the water obtained by this sampler was retrieved for monthly compositing.

Fish

Fish were obtained by electrofishing. Electrofishing stuns the fish and allows them to float to the surface so that those of the desired species and sufficient size can be sampled. Sampled fish include recreationally important species, such as smallmouth bass, and also channel catfish and shorthead redhorse. The fish are filleted and the edible portions are kept for analysis.

Sediment

Shoreline sediment was collected to depths of four feet of water.

Fruits and Vegetables

Pumpkins, soybeans, rye, green beans and potatoes which were irrigated with

river water downstream from SSES, were sampled during the harvest season.

Sample Preservation and Analysis

Surface and Drinking Water

Surface water samples were analyzed monthly for gamma-emitting radionuclides and tritium activities. One biweekly surface composite sample was analyzed for I-131 activity each month. Drinking water samples were analyzed monthly for beta, gamma-emitting radionuclides, and tritium activities.

Sediment and Fish

Fish are frozen until shipment. All samples are analyzed by gamma spectroscopy for the activities of any gamma emitting radionuclides that may be present.

Monitoring Results

Surface Water

Refer to the following for results of surface water analyses for 2007:

- Appendix G, Table G page G-3 and G-4, shows a summary of the 2007 surface water data.
- Appendix H, Tables H 3 and H 4, shows comparisons of iodine-131 and tritium monitoring results against past years data.
- Appendix I, Tables I-2 and I-3, shows specific results of tritium, gamma spectroscopic and iodine-131 analyses of surface water samples.

The Nuclear Regulatory Commission (NRC) requires that averages of the activity levels for indicator environmental monitoring locations and for control environmental monitoring locations of surface water, as well as other monitored media, be reported annually. Data from the following four surface water monitoring locations were averaged together as indicators for reporting purposes: location (6S5) on the Susquehanna River downstream of the SSES, Lake-Took-a While (LTAW) adjacent to the river, and the SSES cooling tower blowdown discharge (CTBD) line to the river (2S7), and the Peach Stand Pond (Secondary Sediment Pond).

Technically, the CTBD line is not part of the environment. The CTBD line is a below ground pipe to which the public has no access, contrary to the other environmental monitoring locations on the Susquehanna River to which the public does have access. However, currently there is no automatic composite sampling of an indicator location on the Susquehanna River, so the CTBD line from the SSES is included as an indicator monitoring location in the radiological environmental monitoring program.

Most of the water entering the Susquehanna River through the SSES CTBD line is simply water that was taken from the river upstream of the SSES, used for cooling purposes without being radioactively contaminated by SSES operation, and returned to the river. Batch discharges of relatively small volumes of slightly radioactively contaminated water are

made to the river through the SSES CTBD at times throughout each year. The water is released from tanks of radioactively contaminated water on site to the CTBD and mixes with the noncontaminated water already present in the CTBD. Flow rates from the tanks containing radioactively contaminated water being discharged to the CTBD vary based on the radioactivity level of the batch release. In addition, the minimum flow rate for the returning water in the CTBD is maintained at a flow rate of 5,000 gpm or higher. These requirements are in place to ensure adequate dilution of radioactively contaminated water by the returning noncontaminated water in the CTBD prior to entering the river.

At the point that CTBD water enters the river, additional, rapid dilution of the discharged water by the river is promoted by releasing it through a diffuser. The diffuser is a large pipe with numerous holes in it that is positioned near the bottom of the river. CTBD discharges exit the diffuser through the many holes, enhancing the mixing of the discharge and river waters. The concentrations of contaminants are reduced significantly as the discharged water mixes with the much larger flow of river water. The mean flow rate of the Susquehanna River in 2007 was approximately 7,210,000 gpm. The CTBD average flow during 2007 was 9,180 gpm. Based on the average river flow and the average CTBD flow during 2007, liquid discharges from the SSES blowdown line were diluted by approximately a factor of 800 after entering the river. The amount of radioactively contaminated water being discharged is

small. Nevertheless, sensitive analyses of the water samples can often detect the low levels of certain types of radioactivity in the CTBD water following dilution. Though the levels of radioactivity measured in the CTBD water are generally quite low, they tend to be higher than those in the river downstream of the SSES. Most radionuclides discharged from the SSES CTBD are at such low levels in the downstream river water that, even with the sensitive analyses performed, they cannot be detected.

When the radioactivity levels from the CTBD samples throughout the year are averaged with those obtained from actual downstream monitoring locations, the result is an overall indicator location average that is too high to be representative of the actual average radioactivity levels of the downstream river water. As the following discussions are reviewed, consideration should be given to this inflation of average radioactivity levels from the inclusion of CTBD (location 2S7) results in the indicator data that is averaged.

Surface Water Iodine-131

Bi-weekly (once per month) samples from surface water locations were analyzed for concentrations of iodine-131 activity (Table I-3 and Table G). The 2007 indicator values range from -0.109 to 1.66 pCi/l compared to -0.482 to 1.21 for 2006. Comparison of the 2007 mean iodine-131 activity of 0.66 pCi/l for all indicator locations to the average of the annual control mean of 0.36 pCi/l for pre-operational years suggests activity detected slightly above the preoperational control.

Throughout the course of a year, iodine-131 is typically measured at levels in excess of analysis MDCs in some samples obtained from control surface water monitoring locations on the Susquehanna River upstream of the SSES as well as indicator locations downstream of the SSES. As determined by measurements of samples obtained by the SSES REMP, the mean iodine-131 activity level from the CTBD for all of 2007 was 0.90 pCi/l compared to the control mean of 0.45 pCi/l for 2007. The 2007 mean iodine-131 activity of 0.42 pCi/l at the indicator 6S5 (Outfall Area) was slightly lower than the mean iodine-131 activity of 0.45 pCi/l at the control 6S6 (River Water Intake) location.

Iodine-131 from the discharge of medical wastes into the Susquehanna River upstream of the SSES is drawn into the SSES cooling tower basins through the SSES River Water Intake Structure. It is reasonable to assume that concentration of the already existing iodine-131 in the cooling tower basins occurs as it does for other substances found in the river. For example, the SSES routinely assumes concentration factors in the basin for calcium of four to five times the concentrations in the river water entering the basins, based on past measurements. This concentrating effect occurs because of the evaporation of the water in the basins, leaving behind most dissolved and suspended materials in the unevaporated water remaining in the basins. If a concentration factor of four for iodine-131 were to be applied to the 2007 mean iodine-131 activity level for the

control samples from the Susquehanna River, a mean concentration of 1.80 pCi/liter for iodine-131 in the basin water and the water being discharged from the basins would be expected. The actual 2007 mean of 0.90 pCi/l for the CTBD mean is half the expected mean.

Because iodine-131 is radioactive, unlike the calcium that has been measured, iodine-131 is removed from the water while it is in the basins through the radioactive decay process. Thus, it might be expected that the net concentration factor for iodine-131 would be somewhat less than that for calcium, considering this additional removal process. The extent to which the iodine-131 concentration factor is less than that for calcium would depend on the mean residence time for the water in the basins compared to iodine-131's radioactive half-life - the greater the ratio of the mean residence time to the half-life, the smaller the concentration factor. A mean residence time for water in the basins is expected to be about two days. This is only about one-fourth of the approximately eightday half-life of iodine-131. Thus, radioactive decay would not be expected to reduce the concentration factor for iodine-131 by a large amount. Therefore, the difference between the 2007 mean iodine-131 activity of about 0.90 pCi/l in the CTBD and the 2007 mean iodine-131 activity for the control location of 0.45 pCi/l is most probably the result of concentration in the basins. Additional support for this assumption is that iodine-131 was not reported in water discharged from the SSES to the Susquehanna River during 2007.

Surface Water Tritium

Monthly samples from all surface water locations were analyzed for concentrations of tritium activity (Table I-2 and Table G). Tritium was detected in the indicator location above MDC. The 2007 indicator values ranged from -147 to 15,300 pCi/l compared to -45 to 11,900 for 2006. Comparison of the 2007 mean tritium activity of 1,400 pCi/l for all indicator locations to the average of the annual preoperational control mean of 171 pCi/l indicates a contribution of tritium activity from the SSES.

Refer to Figure 10 which trends tritium activity levels separately for surface water indicator and control locations from 1972 through 2007.

The much higher levels of tritium observed in the CTBD line (location 2S7), when averaged with the low levels from the downstream location 6S5 sample analysis results distort the real environmental picture. The mean tritium activity level from indicator location 6S5 for 2007 was 65.0 pCi/liter, which is greater than the mean tritium activity of 8.7 pCi/l for the control location and is within the range of prior operational and preoperational periods.

Tritium activity levels reported for 2S7 are from the discharge line prior to dilution in the river. The highest quarterly average tritium activity reported at 2S7 during 2007 was approximately 6,692 pCi/liter for the fourth quarter. This is well below the NRC Reporting Levels for quarterly average activity levels of 20,000 pCi/liter when a drinking water

pathway exists or 30,000 pCi/liter when no drinking water pathway exists.

The tritium activity reported in the CTBD line from location 2S7 is attributable to the SSES. Refer to the "Dose from the Aquatic Pathway" discussion at the end of this section for additional information on the projected dose to the population from tritium and other radionuclides in the aquatic pathway attributable to the SSES.

No gamma-emitting radionuclides were detected in surface water samples above MDC, with the exception of iodine-131, K-40 and Th-228.

Drinking Water

Drinking water was monitored during 2007 at the Danville Water Company's facility 26 miles WSW of the SSES on the Susquehanna River at location 12H2.

There are no known drinking water supplies in Pennsylvania on the Susquehanna River upstream of the SSES and therefore no drinking water control monitoring locations. Danville drinking water analysis results may be compared to the results for surface water control monitoring locations.

Refer to the following for results of surface water analyses for 2007:

- Figure 11 trends gross beta activity levels for drinking water location 12H2 from 1977 through 2007.
- Appendix G, Table G page G-5 and G-6, shows a summary of the 2007 drinking water data.

- Appendix H, Table H 6 and H 7, shows comparisons of gross beta and tritium activity in drinking water for 2007 against past years' data.
- Appendix I, Table I-4 shows specific results of gross beta, tritium and gamma spectroscopic analyses of drinking water

Drinking Water Gross Beta

Monthly samples from the 12H2 drinking water location were analyzed for concentrations of gross beta activity (Table I-4). Beta activity was detected in the 12H2 location above MDC for 2007. The 2007 values ranged from 0.93 to 5.29 pCi/l compared to 0.73 to 5.84 for 2006.

Gross beta activity has been monitored in drinking water since 1977. Gross beta activity is typically measured at levels exceeding the MDCs in drinking water samples. The 2007 mean gross beta activity of 2.5 pCi/l is above the mean gross beta activity of 2.4 for 2006 but is within the range of the preoperational (1977-81) values of 2.2 to 3.2 pC/l.

Drinking Water Tritium

Monthly samples from the 12H2 drinking water location were analyzed for concentrations of tritium activity (Table I-4). Tritium activity was not detected above MDC in any of the 14 drinking water samples in 2007. The 2007 values ranged from -97.8 to 115 pCi/l compared to -132 to 62.5 for 2006.

The 2007 mean tritium activity of 30.6 pCi/l for drinking water was higher than

the mean tritium activity of -2.81 pCi/l for 2006 and is less than the preoperational (1977-81) values of 101 to 194 pCi/l. The 2007 mean tritium activity level for drinking water is higher than the 2007 mean tritium activity level of 8.7 pCi/l for the surface water control location.

Drinking Water Gamma Spectroscopic

No gamma-emitting radionuclides were detected in drinking water samples above the MDC.

Fish

Refer to the following for results of fish analyses for 2007:

- Table G page G-7 shows a summary of the 2007 fish data.
- Table H 8 page H-4 shows comparisons of potassium-40 monitoring results against past years' data.
- Table I-5 page I-11 shows specific results of gamma spectroscopic analyses of fish.

Fish Gamma Spectroscopic

Semi-annual samples from the indicator (IND) and control (2H) fish locations were analyzed for concentrations of gamma activity (Table I-5).

Four species of fish were sampled at each of one indicator location and one control location on the Susquehanna River in the spring 2007 and again in fall 2007. The species included the following: smallmouth bass, channel catfish, and shorthead redhorse. In addition, one largemouth bass was sampled from PPL's LTAW in October

2007. A total of 13 fish were collected and analyzed.

The only gamma-emitting radionuclide reported in excess of analysis MDCs in fish during 2007 was naturally occurring potassium-40. The 2007 indicator values ranged from 3,080 to 4,100 pCi/kg compared to 2,640 to 4,250 for 2006. The 2007 indicator and control means for the activity levels of potassium-40 in fish were 3,427 pCi/kg and 2,713 pCi/kg, respectively. Naturally occurring potassium-40 in fish is not attributable to the liquid discharges from the SSES to the Susquehanna River.

Sediment

Refer to the following for results of sediment analyses for 2007:

- Appendix G, Table G pages G-8 and G-9, shows a summary of the 2007 sediment data.
- Appendix H, Tables H 9, 10, 11 and 12, shows comparisons of potassium-40, radium-226, thorium-228, and cesium-137 monitoring results against past years' data.
- Appendix I, Table I-6 shows specific results of gamma spectroscopic analyses of sediment samples.

Sediment Gamma Spectroscopic

Semi-annual samples from all sediment locations were analyzed for concentrations of gamma activity (Table I-6). Naturally occurring potassium-40, radium-226, Ac-228, and thorium-228 were measured at activity levels above MDCs in some shoreline sediment

samples in 2007. The naturally occurring radionuclides in sediment are not attributable to the liquid discharges from the SSES to the Susquehanna River.

Cesium-137 was measured at activity levels slightly above analysis MDCs in 1 of 6 shoreline sample analyses in 2007. The 2007 indicator and control means for cesium-137 activity in sediment were 19.3 pCi/kg and 64 pCi/kg, respectively. The 2007 indicator and control means are lower than the respective means in 2006. These samples are within the annual mean for all prior operational as well as preoperational years of station operations. Typically cesium-137 has been observed in previous operational years in the 20 to 210 pCi/kg range and reported attributable to fall out from past weapons testing. Station operations does not typically release cesium-137 in liquid effluents; however, 7.6 E-7 Curies was reported as being released in liquid effluents during the first quarter of 2007. No Cs-137 was identified above analysis MDCs at any indicator locations in 2007.

Fruits and Vegetables

Refer to the following for results of fruits and vegetables for SSES:

- Appendix G, Table G pages G-14 and G-15, shows a summary of the 2007 fruits and vegetables.
- Appendix I, Table I-12 page I-22, shows specific gamma spectroscopic analysis of fruit/vegetable samples.

Fruit /Vegetable Gamma Spectroscopic

Pumpkin, soybeans and rye samples were collected from location 11D1. Green beans and potato samples were collected from location 11D2 and analyzed for concentrations of gamma emitting nuclide activity (Table I-12). Potassium-40 and thorium-228 were the only gamma-emitting radionuclides measured in fruits and vegetables at an activity level above MDC during 2007. The average potassium-40 concentration for the indicator samples was 5398 pCi/kg. The 2007 indicator values ranged from 2350 to 15,000 pCi/kg compared to 1820 to 16,600 pCi/kg for 2006.

Potassium-40 and/or thorium-228 in fruits and vegetables is not attributable to SSES operation because they are naturally occurring radionuclides.

Dose from the Aquatic Pathway

Tritium was the only radionuclide identified in 2007 by the SSES REMP in the aquatic pathway that was attributable to SSES operation and also included in the pathway to man.

The total tritium activity released from the SSES for the year was estimated based on REMP monitoring results and used in projecting maximum doses to the public. The annual mean activity level of tritium in the CTBD line (monitoring location 2S7) for 2007 was 3,582 pCi/l. The annual mean activity of tritium for control location 6S6 was 8.7 pCi/l. For the purpose of performing the dose calculation, tritium

was assumed to be present continuously in the CTBD line throughout 2007 at a level equivalent to the annual mean activity of 3,582 pCi/l. The annual mean flow rate for the CTBD line was 9,180 gpm. Using the proper unit conversions and multiplying 9,180 gpm times 3,582 pCi/l yields a value of 65.7 curies for the estimate of tritium released from SSES during 2007. This estimate is 4.3 curies less than the 70 curies of tritium determined by effluent monitoring that was released to the river by the SSES in 2007.

Given the total tritium activity released, the maximum whole-body and organ doses to hypothetical exposed individuals in four age groups (adult, teenager, child, and infant) were determined according to the methodology of the Offsite Dose Calculation manual using the RETDAS computer program. This is in accordance with SSES Technical Requirement 3.11.4.1.3.

The maximum dose obtained from the ingestion of tritium was estimated at the nearest downriver municipal water supplier via the drinking water pathway and near the outfall of the SSES discharge to the Susquehanna River via the fish pathway. The maximum whole body and organ doses (child) were each calculated as 0.0012 mrem.

FIGURE 10 - TRITIUM ACTIVITY IN SURFACE WATER


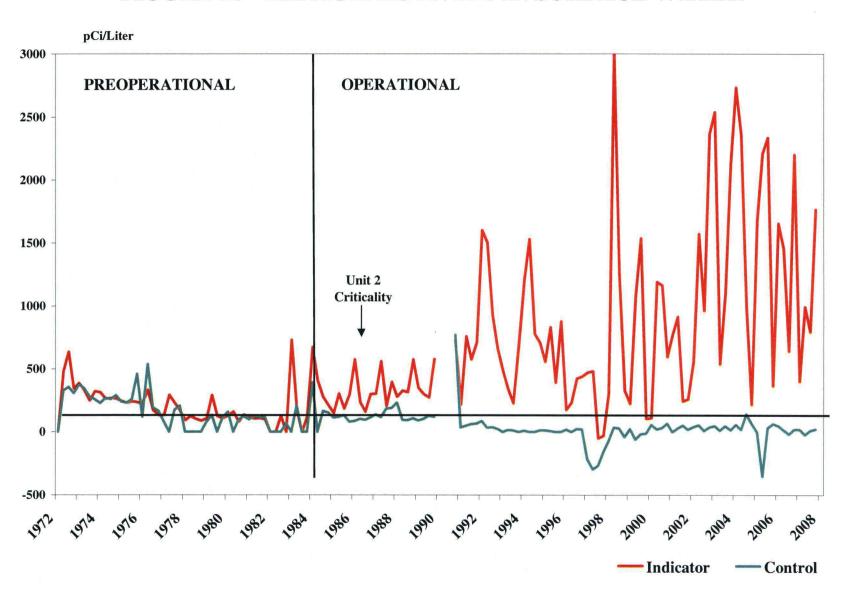


FIGURE 11 - GROSS BETA ACTIVITY IN DRINKING WATER

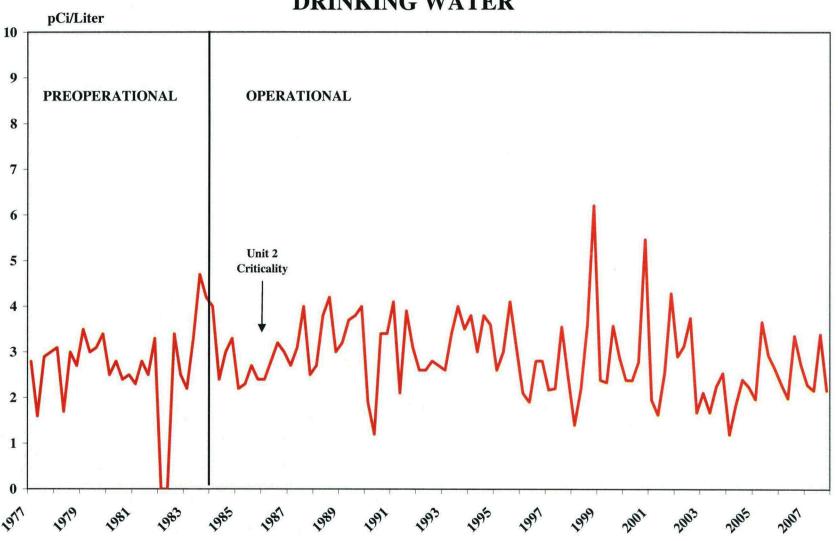

ATMOSPHERIC PATHWAY MONITORING

INTRODUCTION

Atmospheric monitoring by the SSES REMP involves the sampling and analysis of air. Because the air is the first medium that SSES vent releases enter in the pathway to man, it is fundamental that it be monitored. Mechanisms do exist for the transport of airborne contaminants to other media and their concentration in them. For example, airborne contaminants may move to the terrestrial environment and concentrate in milk. Concentrations of radionuclides can make the sampling and analysis of media like milk more sensitive approaches for the detection of radionuclides, such as iodine-131, in the pathway to man than the monitoring of air directly. (PPL also samples milk; refer to the Terrestrial Pathway Monitoring section of this report.) Nevertheless, the sensitivity of air monitoring can be optimized by the proper selection of sampling techniques and the choice of the proper types of analyses for the collected samples.

Scope

Air samples were collected on particulate filters and charcoal cartridges at indicator locations 3S2, 12S1, 13S6 and 12E1, and control locations 6G1 and 8G1.

Sampling and Analysis

Air

The SSES REMP monitored the air at four indicator locations and two control locations during 2007. The SSES Technical Requirements require monitoring at only a total of five sites. Monitoring is required at three locations at the SSES site boundary in different sectors with the greatest predicted sensitivities for the detection of SSES releases (3S2, 12S1, 13S6). Monitoring must be performed at the community in the vicinity of the SSES with the greatest predicted sensitivity (12E1). A control location that is expected to be unaffected by any routine SSES releases must be monitored (6G1, 8G1).

Airborne particulates were collected on glass fiber filters using low volume (typically 2.0 to 2.5 cfm sampling rates) air samplers that run continuously. Air iodine samples were collected on charcoal cartridges, placed downstream of the particulate filters.

Particulate filters and charcoal cartridges were exchanged weekly at the air monitoring sites. Sampling times were recorded on elapsed-time meters. Air sample volumes for particulate filters and charcoal cartridges were measured with dry-gas meters.

Air filters were analyzed weekly for gross beta activity, then composited quarterly and analyzed for the activities of gamma-emitting radionuclides. The charcoal cartridges were analyzed weekly for iodine-131.

Monitoring Results

Air Particulates

Refer to the following for results of air particulate analyses for 2007:

- Figure 12 trends gross beta activities separately for air particulate indicator and control locations from 1974 through 2007.
- Appendix G, Table G pages G-10 and G-11, shows a summary of the 2007 air particulate data.
- Appendix H, Tables H 13 and 14 page H-5, shows comparisons of gross beta and Beryllium-7 monitoring results against past years' data.
- Appendix I, Table I-8 pages I-14 and I-15, shows specific sample results of gross beta analyses for air particulate filters.

Air Particulate Gross Beta

Weekly samples from all air particulate filter locations were analyzed for concentrations of gross beta activity (Table I-8). Gross beta activity was observed at all locations above MDC for 2007. The 2007 indicator values ranged from 5.30E-3 to 32E-3 pCi/m³, compared to 4.79E-3 to 29E-3 pCi/m³ for 2006. The 2007 mean gross beta activity of 15.9E-3 pCi/m³ for all indicator locations compared to the average of the annual preoperational control mean of 62E-3 pCi/m³ indicates activity detected below the preoperational control. In addition, a comparison of the 2007 indicator mean

of 15.9E-3 pCi/m³ with the 2007 control locations mean of 13.6E-3 pCi/m³ indicates no appreciable effects from the operation of SSES.

Gross beta activity is normally measured at levels in excess of the analysis MDCs on the fiber filters. The highest gross beta activity levels that have been measured during the operational period of the SSES were obtained in 1986 following the Chernobyl accident in the former Soviet Union.

Note that prior to SSES operation, before 1982, the unusually high gross beta activities were generally attributable to fallout from atmospheric nuclear weapons tests. Typical gross beta activities measured on air particulate filters are the result of naturally occurring radionuclides associated with dust particles suspended in the sampled air. They are thus terrestrial in origin.

The SSES Technical Requirements Manual requires radionuclide analysis if any weekly gross beta result was greater than ten times the most recent years annual mean gross beta value for all air particulate sample control locations. This condition did not occur during 2007.

Air Particulate Gamma Spectroscopic

Quarterly gamma spectroscopic measurements of composited filters often show the naturally occurring radionuclide beryllium-7. Occasionally, other naturally occurring radionuclides, potassium-40 and radium-226, are also observed. Beryllium-7 is cosmogenic in

origin, being produced by the interaction of cosmic radiation with the earth's atmosphere. The other two gamma-emitting radionuclides originate from soil and rock.


Beryllium-7 was measured above analysis MDCs for all quarterly composite samples in 2007. The 2007 indicator and control means for beryllium-7 activity were 129 and 116 pCi/m³, respectively. Beryllium-7 activity levels for each 2007 calendar quarter at each monitoring location are presented in Table I-9 of Appendix I. Comparisons of 2007 beryllium-7 analysis results with previous years may be found in Table H 14 of Appendix H.

No other gamma-emitting radionuclides were reported for air in 2007. Beryllium-7 is not attributable to SSES operation.

Air Iodine

Iodine-131 has been detected infrequently from 1976, when it was first monitored, through 2007. Since operation of the SSES began in 1982, iodine-131 has only been positively detected in air samples in 1986 due to the Chernobyl accident. No iodine-131 was reported for the 2007 air monitoring results.

FIGURE 12 - GROSS BETA ACTIVITY IN AIR PARTICULATES

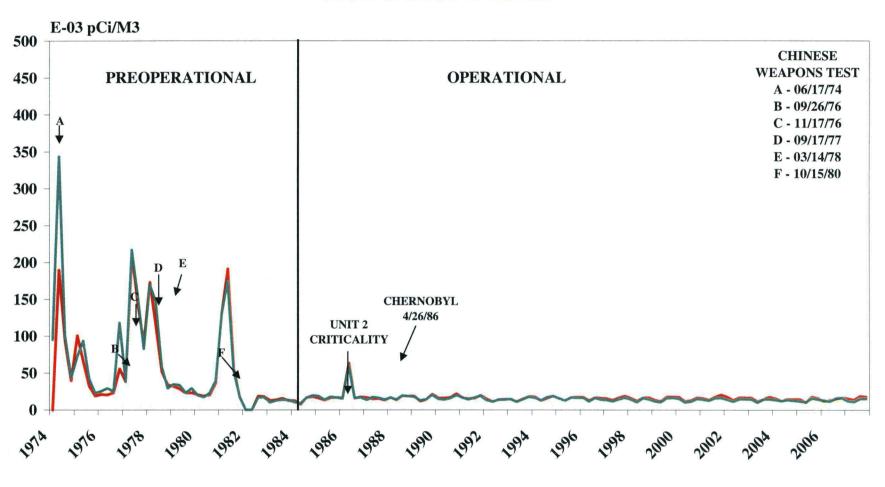

TERRESTRIAL PATHWAY MONITORING

INTRODUCTION

Soil and milk were monitored in the Terrestrial Pathway in 2007.

Soil can be a great accumulator of manmade radionuclides that enter it. The extent of the accumulation in the soil depends of course on the amount of the radionuclides reaching it, but it also depends on the chemical nature of those radionuclides and the particular characteristics of the soil. For example, the element cesium, and, therefore, cesium-137 can be bound very tightly to clay in soils. The amount of clay in soil can vary greatly from one location to another. In clay soils, cesium-137 may move very slowly and also may be taken up very slowly in plants as they absorb soil moisture.

Any medium, such as soil, that tends to accumulate radioactive materials can also provide more sensitivity for radionuclide detection in the environment than those media that don't. Such a medium facilitates the early identification of radionuclides in the environment, as well as awareness of changes that subsequently may occur in the environmental levels of the identified radionuclides.

The SSES REMP samples soil near two of the six REMP air-sampling stations. The purpose for soil sampling near the air sampling sites is to make it easier to correlate air sampling results with soil sampling results if any SSES related radioactive material were found in either medium. Sampling is performed at different depths near the surface to

help provide information on how recently certain radioactive materials may have entered the soil. Sampling at more than one depth also may help ensure the detection of materials that move relatively quickly through the soil. Such quick-moving materials may have already passed through the topmost layer of soil at the time of sampling.

Milk was sampled at four locations in 2007. SSES Technical Requirements require that the SSES REMP sample milk at the three most sensitive monitoring locations near the SSES and one control location distant from the SSES.

No requirement exists for the SSES REMP to monitor soil. All monitoring of the terrestrial pathway that is conducted by the SSES REMP in addition to milk (and broad leaf vegetation in certain cases when milk sampling not performed) is voluntary and reflects PPL's willingness to exceed regulatory requirements to ensure that the public and the environment are protected.

Scope

Soil

Soil was sampled in September 2007 in accordance with its scheduled annual sampling frequency, at the following two REMP air sampling locations: 12S1 (indicator) and 8G1 (control).

Several soil plugs were taken at selected spots at each monitoring location. The

plugs were separated into "top" (0-2 inches) and "bottom" (2-6 inches) segments. Each set of top and bottom segments was composited to yield 2 soil samples from each location for analysis. Since there are two monitoring locations, a total of 4 soil samples were analyzed in 2007.

Milk

Milk was sampled at least monthly at the following locations in 2007: 10D2, 10D3 (10D3 replaced 10D1) 13E3 and 10G1.

Milk was sampled bi-weekly from April through October when cows were more likely to be on pasture and monthly at other times. Locations 10D2, 10D3, and 13E3 are believed to be the most sensitive indicator sites available for the detection of radionuclides released from the SSES. Location 10G1 is the control location. Since there are four monitoring locations, a total of 84 cow milk samples were collected in 2007.

Sample Preservation and Analysis

All media in the terrestrial pathway are analyzed for the activities of gamma-emitting radionuclides using gamma spectroscopy. The other analysis that is routinely performed is the radiochemical analysis for iodine-131 in milk.

Monitoring Results

Refer to the following for results of the terrestrial pathway analyses for 2007:

- Figure 13 trends iodine-131
 activities separately for milk
 indicator and control locations from
 1977 through 2007.
- Appendix G, Table G pages G-12 through G-14, shows a summary of the 2007 terrestrial monitoring results for milk and soil.
- Appendix H, Tables H 15 through 19 pages H-6 and H-7, shows comparisons of terrestrial pathway monitoring results against past years' data.
- Appendix I, Tables I-10 and I-11 pages I-17 through I-21, shows results of specific sample analyses for terrestrial pathway media.

The only man-made radionuclides normally expected at levels in excess of analysis MDCs in the terrestrial pathway are strontium-90 and cesium-137. Both of these radionuclides are present in the environment as a residual from previous atmospheric nuclear weapons testing. Strontium-90 analyses are not now routinely performed for any media samples in the terrestrial pathway. Strontium-90 activity would be expected to be found in milk. SSES Technical Requirements do not require that milk be analyzed for strontium-90. Strontium-90 analyses may be performed at any time if the results of other milk analyses would show detectable levels of fission product activity, such as I-131, which might suggest the SSES as the source.

Cesium-137 normally has been measured in excess of analysis MDCs in most soil samples.

Certain naturally occurring radionuclides are also routinely found above analysis MDCs in terrestrial pathway media. Potassium-40, a primordial and very long-lived radionuclide, which is terrestrial in origin, is observed in all terrestrial pathway media. Other naturally occurring radionuclides often observed in soil are thorium-228 and radium-226.

Soil

Annual samples from the 12S1 and 8G1 soil locations were analyzed for concentrations of gamma emitting nuclides (Table I-11). The following gamma-emitting radionuclides are routinely measured in soil at levels exceeding analysis MDCs: naturally occurring potassium-40, radium -226, thorium-228 and man-made cesium-137. The 2007 analysis results were similar to those for previous years. No other gamma-emitting radionuclides were reported at levels above analysis MDCs.

The 2007 means for indicator and control location potassium-40 activity were 11,600 pCi/kg and 9,490 pCi/kg, respectively. This is not the result of SSES operation because the potassium-40 is naturally occurring.

The 2007 means for indicator and control location radium-226 activity were 1,150 pCi/kg and 1,900 pCi/kg, respectively. Radium-226 in soil is not the result of SSES operation because it is naturally occurring.

The 2007 means for indicator and control location thorium-228 activity were 785 pCi/kg and 866 pCi/kg, respectively. Thorium-228 in soil is not

the result of SSES operation because it is naturally occurring.

The 2007 means for indicator and control location cesium-137 activity were 59 pCi/kg and 131 pCi/kg, respectively. The 2007 indicator values ranged from 46 to 73 pCi/kg, compared to 156 to 190 pCi/kg for 2006. Typically cesium-137 has been observed in preoperational control samples at 200 to 1200 pCi/kg as well as prior operational years in the 70 to 1200 pCi/kg range. The measured activities of cesium-137 were also detected in previous years at expected levels due to residual fall out from past atmospheric weapons testing and the Chernobyl event. As a general rule, it takes approximately ten half lives for a radionuclide to decay to non-detectable levels. Cesium-137 with its 30 year half life (300 years to decay to nondetectable) it would still be present in samples in 2007. Cesium-137 in soil, although man-made, is not from Susquehanna station operations.


Milk

Semi-monthly or monthly samples from all milk locations were analyzed for concentrations of iodine-131 and other gamma-emitting nuclide activity (Table I-10). No detectable iodine-131 activity above MDC was observed at any location for 2007. The 2007 indicator values ranged from -0.48 to 0.58 pCi/l, compared to -1.36 to 0.66 pCi/l for 2006. Iodine-131 has been chemically separated in milk samples and counted routinely since 1977. Refer to Figure 13 which trends iodine-131 activity in milk for indicator and control locations from 1977 through 2007.

The preoperational years 1976, 1978, and 1980 were exceptional years in the sense that iodine-131 activity was observed in excess of MDCs due to fallout from atmospheric nuclear weapons testing. Iodine-131 activity was also measured at levels exceeding MDCs in milk samples in 1986 in the vicinity of the SSES as a result of the Chernobyl incident.

With the exception of the naturally occurring potassium-40, no gamma-emitting radionuclides were measured in excess of analysis MDCs in 2007. The 2007 means for indicator and control location potassium-40 activity were 1,301 pCi/liter and 1,304 pCi/liter, respectively. The potassium-40 activity in milk is not attributable to SSES operation because it is naturally occurring.

FIGURE 13 - IODINE-131 ACTIVITY IN MILK

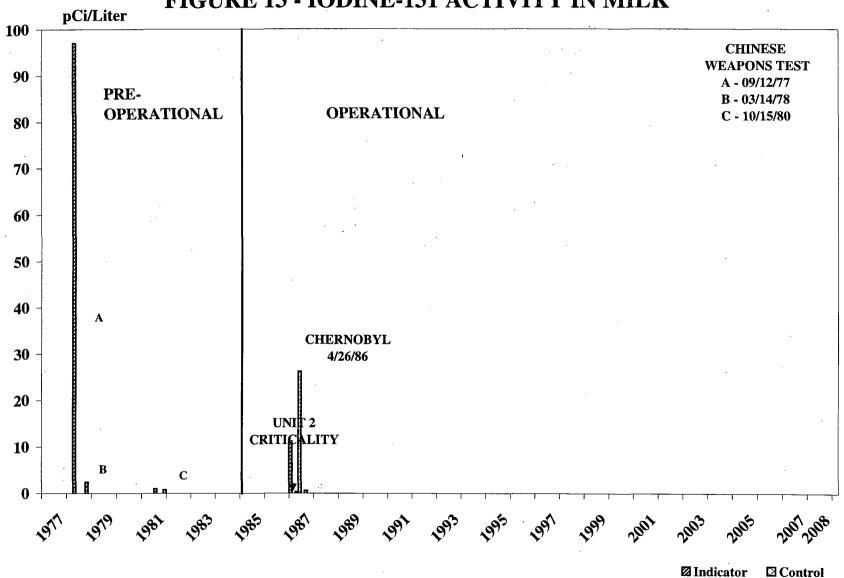

GROUND WATER MONITORING

INTRODUCTION

Normal operation of the SSES does not involve the release of radioactive material to ground water directly, or indirectly through the ground. As a result, there are no effluent monitoring data to compare with REMP ground water monitoring results. Ground water could conceivably become contaminated by leakage or spills from the plant or by the washout or deposition of radioactive material that might be airborne. If deposited on the ground, precipitation/soil moisture could aid in the movement of radioactive materials through the ground to water that could conceivably be pumped for drinking purposes. No use of ground water for irrigation near the SSES has been identified.

Primary release paths for recent groundwater contamination events at other nuclear facilities have been: 1) spent fuel pool leakage; 2) leaks from liquid radwaste discharge lines and; 3) leaks from cooling tower blowdown lines. The physical location of the spent fuel pools at Susquehanna and the fuel pool leakage collection system make it highly unlikely that the fuel pools would be a radiological contamination source for groundwater. Leaks from the liquid radwaste discharge line or the cooling tower blowdown line could impact ground water, but to date, there has been no indication of any radiological impacts on groundwater due to station operations.

Scope

Ground water in the SSES vicinity was sampled quarterly at 4 indicator locations (2S2, 4S4, 6S10 and 11S2) and one control location (12F3) during 2007.

With the exception of location 4S4, untreated ground water was sampled. Untreated means that the water has not undergone any processing such as filtration, chlorination, or softening. At location 4S4, the SSES Learning Center, well water actually is obtained from on-site and piped to the Learning Center after treatment. This treatment would not affect tritium analysis. This sampling is performed as a check to ensure that water has not been radioactively contaminated. Sampling is performed at the Learning Center to facilitate the sample collection process.

Sample Preservation & Analysis

Ground water samples were analyzed for gamma-emitting radionuclide and tritium activities. Gamma spectrometric analyses of ground water began in 1979 and tritium analyses in 1972, both prior to SSES operation.

Monitoring Results

Tritium activity levels in ground water have typically been observed to be lower than in surface water. A noticeable decline occurred between 1992 and 1993. Fewer measurements were above the analysis sensitivities after 1993.

Gamma-emitting radionuclides in excess of MDCs have been found in only a few samples in all the years that these analyses have been performed. The naturally occurring radionuclides potassium-40 and thorium-228 have been measured above their MDCs occasionally in ground water. Potassium-40 was reported in 1979, 1981, 1985, 1991, 1992, 1993, and 1997. Thorium-228 was found in 1985 and 1986. The man-made radionuclide cesium-137 has been detected only occasionally since 1979. Its presence has always been attributed to residual fallout from previous atmospheric nuclear weapons tests.

Results for the 2007 specific ground water sample analyses may be found in Table I-7 of Appendix I. A summary of the 2007 ground water monitoring data may be located in Appendix G, pages G-9 and G-10. Comparisons of 2007 monitoring results for tritium with those of past years may be found in Table H 20 of Appendix H.

In 2007, tritium was measured above MDC, in three samples at indicator locations 4S4 at concentrations of 140 and 146 and 11S2 at 143 pCi/l respectively. The activities were slightly above the detection limit. The 2007 indicator values ranged from 11.3

to 146 pCi/l, compared to -9.72 to 178 pCi/l for 2006. The 2007 mean tritium activity levels for indicator and control monitoring locations were 67.6 and 41.9 pCi/l, respectively. Both the 2007 indicator and control mean tritium activity levels are lower than their corresponding range for preoperational years.

The only REMP monitored pathway where tritium has been identified as a result of station operations is in the surface water pathway (Susquehanna River) downstream of the site, There have been no indications of any increases in ground water tritium concentrations above normal background levels (based on preoperational data) since inception of the REMP at PPL Susquehanna.

In 2007, six new ground water monitoring wells were installed at the PPL Susquehanna site. These wells were installed as part of the Action Plan associated with the NEI Initiative on the Protection of Ground Water. Initial results for these six wells are documented in the 2007 Radioactive Effluent Release Report. The six new wells were added to the ODCM in February 2008. Future results from these wells will be reported in the Annual Radiological Environmental Operating Report.

REFERENCES

- 1. Pennsylvania Power and Light Company, "Susquehanna Steam Electric Station, Environmental Report, Operating License Stage," May 1978.
- 2. Pennsylvania Power and Light Company, "Susquehanna Steam Electric Station, Final Safety Analysis Report".
- 3. United States Nuclear Regulatory Commission, Office of Nuclear Reactor Regulation, "Final Environmental Statement Related to the Operation of Susquehanna Steam Electric Station, Units 1 and 2," Docket Nos. 50-387 and 50-388, June 1981.
- 4. United States Nuclear Regulatory Commission, "An Acceptable Radiological Environmental Monitoring Program," Radiological Assessment Branch Technical Position, November 1979, Revision 1.
- 5. National Council on Radiation Protection and Measurements, "Environmental Radiation Measurement," NCRP Report No. 50, Washington, D.C., December 27, 1976.
- 6. Oakley, D.C., "Natural Radiation Exposure in the United States," ORP/SID 72-1 Office of Radiation Programs, U.S. Environmental Protection Agency, Washington, D.C., June 1972.
- 7. Denham, D.H., Roberts, M.C., Novitsky, W.M., Testa, E.D., "Investigation of Elevated Cesium-137 Concentrations in Small Game in Luzerne County, Pennsylvania." Proceedings of Papers presented at Health Physics Society Tenth Midyear Topical Symposium, October 11-13, 1976, pgs. 271-279.
- 8. Currie L.A., "Lower Limit of Detection: Definition and Elaboration of a Proposed Position for Radiological Effluent and Environmental Measurements," NUREG/CR-4007, September 1984.
- 9. PPL, "Susquehanna Steam Electric Station, 2006 Annual Radiological Environmental Operating Report," April 2007.
- 10. PPL, "Susquehanna Steam Electric Station, Radioactive Effluent Release Report," Data Period: January December 2007, April 2008.
- 11. Ecology III, "Susquehanna Steam Electric Station, 2007 Land Use Census," (Revision 2, March 10, 2008).
- 12. PPL, "Engineering Study, EC-ENVR-1012 (Revision 0, January 1995)," Interpretation of Environmental TLD Results.
- 13. PPL, Tritium Release REMP Calculation (RETDAS V.3.6.6) December 2007.

Appendix A Appendix A

APPENDIX A

2007 REMP SAMPLE COLLECTION, ANALYSIS TYPE, ANALYTICAL METHODS, PROGRAM CHANGES AND EXCEPTIONS

REMP Sample Collection, Analyses and Methods

An independent consulting group, Ecology III, working at Susquehanna's Environmental Laboratory, located approximately ¾ miles east of the SSES, collects and prepares the samples (except for TLD's which are handled by HP). Samples are brought to the laboratory, stored, and shipped to an outside independent analytical laboratory. The following table summarizes the REMP sample collection/analyses performed by Teledyne Brown Engineering, the independent radioanalytical laboratory for 2007. Note that TBE represents Teledyne Brown Engineering and E-III represents Ecology III, Inc.

TABLE A1 (Page 1 of 2)

	SOURCE OF REMP DATA FOR MONITORING YEAR 2007						
Sample Medium	Analysis	Analysis Frequency	Collection Procedure Number	Analytical Procedure Number			
Ambient Radiation	TLD	Quarterly	SSES, HP-TP-205	SSES,HP-TP-159 & 190			
Air	Gross Beta	Weekly	E-III, Appendix 2	TBE-2008 Gross Alpha and/or Beta Activity in Various Matrices			
Air	I-131	Weekly	E-III, Appendix 2	TBE-2012 Radioiodine in Various Matrices			
Air	Gamma	Quarterly	E-III, Appendix 2	TBE-2007 Gamma Emitting Radioisotope Analysis			
Drinking Water	Gross Beta	Monthly	E-III, Appendix 5	TBE-2008 Gross Alpha and/or Beta Activity in Various Matrices			
All Waters	Tritium	Monthly (LTAW, 4S7 and Groundwater Quarterly	E-III, Appendix 3, 4, 5, 6, 7 & 8	TBE-2010 Tritium and Carbon-14 Analysis by Liquid Scintillation			
Surface & Drinking Water	Gamma	Monthly (LTAW and 4S7 Quarterly)	E-III, Appendix 3, 4, 5, 6, & 7	TBE-2007 Gamma Emitting Radioisotope Analysis			

TABLE A1 (Page 2 of 2)

Sample	Analysis	Analysis	Collection	Analytical
Medium		Frequency	Procedure Number	Procedure Number
Ground Water	Gamma	Quarterly	E-III, Appendix 8	TBE-2007 Gamma Emitting Radioisotope Analysis
Surface Water (except LTAW and 4S7)	I-131	Monthly	E-III, Appendix 4, 5, 6, and 7	TBE-2012 Radioiodine in Various Matrices
Milk	Gamma	Monthly/ Semi-Monthly	E-III, Appendix 9	TBE-2007 Gamma Emitting Radioisotope Analysis
Milk	I-131	Monthly/ Semi-Monthly	E-III, Appendix 9	TBE-2012 Radioiodine in Various Matrices
Fish	Gamma	Semi-Annually (Spring/Fall)	E-III, Appendix 11	TBE-2007 gamma Emitting Radioisotope Analysis
Sediment	Gamma	Semi-Annually (Spring/Fall)	E-III, Appendix 12	TBE-2007 gamma Emitting Radioisotope Analysis
Fruits & Vegetables	Gamma	In Season (when irrigated)	E-III, Appendix 13	TBE-2007 gamma Emitting Radioisotope Analysis
Soil	Gamma	Annually	E-III, Appendix 14	TBE-2007 Gamma Emitting Radioisotope Analysis

PROGRAM CHANGES:

Direct Radiation Monitoring

Deleted TLD 11S3 at 0.3 mile in SW Sector (Security Fence) at the end of 4th quarter 2006 due to extension of the 500 kV switchgear yard an access road was removed making it dangerous to access for performing the quarterly TLD exchange. Existing TLD 11S7 at 0.4 mile in the

SW Sector (SSES Access Road-Gate 50) adequately satisfies the REMP monitoring requirements.

Air Monitoring

There were no changes to the air monitoring program for 2007.

Surface Water and Drinking Water Monitoring

Deleted surface water monitoring location 6S7 due to location is not required to support the REMP for 2007.

Milk

Discontinued milk sampling location 10D1 (R. & C. Ryman farm) and replaced with milk sampling location 10D3 (Drasher farm).

Ground Water Monitoring

In response to the NEI Groundwater Protection Initiative, six new groundwater monitoring wells were installed at the SSES in 2007. These new monitoring wells will not formally be added to the Offsite Dose Calculation Manual (ODCM) until 2008. Groundwater sampling (and corresponding results) conducted at locations not listed in the ODCM shall be documented in the Radioactive Effluent Release Report (RERR) for the applicable year. Reference the 2007 RERR for additional data and discussion on the six new groundwater monitoring wells.

Fruits & Vegetables

Lupini field – Route 93 (11D2) was added to the fruits and vegetable monitoring program in 2007. Lupini harvested potatoes and green beans irrigated with Susquehanna River water downstream of PPL Susquehanna discharge.

Soil Monitoring

There were no changes to the soil monitoring program in 2007.

Sediment Monitoring

There were no changes to the sediment monitoring program in 2007.

Fish Monitoring

There were no changes to the fish monitoring program for 2007.

PROGRAM EXCEPTIONS

The following are sampling and analysis exceptions for 2007.

TABLE A2 TRM SAMPLING DEVIATIONS

(Page 1 of 2)

Sample	Date	Location	Explanation
Туре			
Milk	May	10D1	On May 14, 2007 milk samples were unavailable from REMP dairy farm location 10D1 (R&C Ryman Farm) due to owners having discontinued dairy farming (dairy cows sold). Location 10D1 was an indicator milk sampling location as required by TRM Table 3.11.4.1-1. Location 10D1 was replaced by the dairy farm with the next highest dose potential and willing to participate in the SSES REMP milk sampling program. Based on review of 2006 annual average meteorological data, the dairy farm with the next highest dose potential (who are willing to participate in the REMP) is location 10D3 (C.K. Drasher farm). Replacement samples were obtained for the remainder of this monitoring period from location 10D3. There are no applicable actions to prevent recurrence associated with the above condition.
Air (Particulate & Iodine)	June	3S2 3S2,	Air monitoring station found inoperative on 6/27/2007 due to sampler electrical fault. Invalid sample obtained due to non-continuous operation and low sample volume collected. Corrective action was taken to replace the sample pump and timer box, restarted air monitor and verified proper air flow. Air monitor was restored to service immediately. Actions to prevent recurrence are not applicable. Due to a brief loss of 12kv power line on 8/25/07,
	riugusi	13S6, 12S1, 13S6Q	continuous sampling interrupted for approximately 6 minutes. Valid sample obtained. There are no applicable actions to prevent recurrence of the condition (power failure due to lightning storm).

TABLE A2 (Page 2 of 2)

Air	September	3S2	Air monitoring station found inoperative on 9/12/07
(Particulate			due to a timer box malfunction. Invalid sample
& Iodine)			obtained due to non-continuous operation and low
			sample volume collected. Corrective action was taken
			to replace the timer box, restarted air monitor and
			verified proper air flow. Air monitor was restored to
			service immediately. There are no applicable actions
			to prevent recurrence of the condition (replacement
			timer installed).
	November	12S1	Due to a loss of 12 kv power line on 11/20/07,
			continuous sampling interrupted for approximately 4
			hours and 10 minutes. Valid sample obtained. Actions
		,	to prevent recurrence are not applicable (occasional
			equipment power outages are unavoidable).
	November	12S1	Due to a planned 2 minute 12kv power outage on
			11/21/07, continuous sampling interrupted for
•			approximately 2 minutes. Sampler restored to service.
			Valid sample obtained (within ideal sample volume
			range). Actions to prevent recurrence are not
			applicable (equipment power outage was
			unavoidable).
	November	12S1	Due to a loss of 12 kv power line on 11/23/07,
			continuous sampling interrupted for approximately 2
			hours and 7 minutes. Valid sample obtained. Actions
		i	to prevent recurrence are not applicable (occasional
			equipment power outages are unavoidable).

TABLE A3

(Page 1 of 3)

NON-TRM SAMPLING OCCURRENCES

Sample Type	Date	Location	Explanation
Air (Particulate & Iodine)	February	6G1	Made adjustment to correct high (cfm) sampler air flow to within ideal sampling range on 2/7/07. No interruption in sampler operation. Valid sample collected. Actions to prevent recurrence are not applicable.
	February	6G1	Made adjustment to correct low (cfm) sampler air flow to within ideal sampling range on 2/21/07. No interruption in sampler operation. Valid sample collected. Actions to prevent recurrence are not applicable.
,	February	12S1	Due to a loss of 12 kv power line on 2/12/07, continuous sampling interrupted for approximately 2.7 hours. Valid sample obtained (within ideal sample volume range and deviation from continuous sampling within allowable 4 hour procedural limit). Actions to prevent recurrence are not applicable (occasional equipment power outages are unavoidable).
	June	6G1	Timer box failed to advance past 164 hours but did not affect air sampler operation. Timer box replaced. Air monitor operability verified. Valid sample collected for sampling period 5/30/07 to 6/6/07. Actions to prevent recurrence are not applicable.
	June	13S6Q	Timer box failed to advance but did not affect air sampler operation. Timer box replaced. Air monitor operability verified. Valid sample collected for sampling period 6/6/07 to 6/13/07. Actions to prevent recurrence are not applicable
	August	3S2, 13S6, 12S1, 13S6Q	Due to a brief power outage on 7/31/06, continuous sampling interrupted for approximately 29 minutes due to an electrical storm. Valid sample obtained (within ideal sample volume range and deviation from continuous sampling within allowable 4 hour procedural limit). Actions to prevent recurrence are not applicable (occasional equipment power outages are unavoidable).

TABLE A3 (Page 2 of 3)

Sample	Date	Location	Explanation
Type			
Surface Water	March	6S6	Composite water sampler (located at the river water intake structure) was found to have no sample flow due to blocked lines from turbid river conditions on 3/20/07. This resulted in an invalid sample for sampling period 3/13/07 to 3/20/07. Grab sample collected at alternate location 5S9 to represent sampling period 3/13/07 to 3/20/07 (week 3 of March composite, week 2 of March biweekly composite). Sample lines cleaned and the composite sampler restored to service on 3/21/07. Routine preventative maintenance performed to minimize recurrence.
	April	2S7	Composite water sampler (located in the cooling tower blowdown line) was found inoperative on 4/3/07 due to microprocessor malfunction. This resulted in an invalid sample for sampling period 3/27/07 to 4/3/07. Grab sample taken on 4/3/07 to represent week 1 of April monthly composite. Sample lines cleaned. Reprogrammed the sampler and restored to service on 4/4/07. Actions to prevent recurrence are not applicable
	April	2S7	Unable to calibrate sampler for required sample volume on 4/17/07. Backup composite sampler installed, reprogrammed and restored to service on 4/18/07. This resulted in a delayed start for week 4 of April composite sampling during the period 4/18/07 to 4/24/07. A new auto composite sampler was ordered and planned for installation upon receipt as action to prevent recurrence.
	April	6S6	Sampler discovered to have degraded flow through the auto composite sampler at the river water intake structure due to high river levels and turbid conditions on 4/20/07. Valid sample was obtained for sampling period 3/30/07 to 4/20/07 for the April monthly composite and biweekly composite. Sample lines were cleaned and sampler restored to service on 4/20/07. Routine preventative maintenance performed to minimize reoccurrence.

Table A3 (Page 3 of 3)

Surface Water	May	6S6	Degraded flow through the auto composite sampler at
(cont'd.)	14144	050	the river water intake structure due to high river levels
(cont d.)			and turbid conditions on 5/4/07. Valid sample was
·			obtained for sampling period 4/24/07 to 5/29/07 for the
			1
			May monthly composite and biweekly composite.
			Sample lines were cleaned and sampler restored to
			service on 5/18/07. Routine preventative maintenance
			performed to minimize recurrence.
	July	2S7	Auto composite sampler in the cooling tower blowdown
			line taken out of service for approximately 36 minutes
			on 7/3/07 to replaced old sampler with new sampler.
		·	Failed attempt to install new sampler. Old sampler
			reinstalled and placed in-service on 7/3/07. Defective
			(new) sampler returned to manufacturer for repair.
	July	2S7	Auto composite sampler in the cooling tower blowdown
			line taken out of service approximately 29 minutes on
			7/31/07 for installation of new composite sampler. New
			sampler installed and calibrated. Valid sample collected
		·	for sampling period 7/24/07 to 8/21/07.
	August	2S7	Auto composite sampler taken out of service for
			approximately 1 hour on 8/28/07. Reinitialized sampler
			and restored to service on 8/28/07.
	September	2S7	Sampler displayed a missed sample error message on
			9/24/07. Switched to upper supply line and recalibrated
			the sampler on 9/24/07. Valid sample collected during
·			the sampling period 8/21/07 to 9/24/07.
		L)

In 2007 the SSES REMP overall performance was as follows:

Sample Collection and Analysis

927 of 931 samples were collected for 99.6 % sample collection recovery.

1211 of 1215 analyses were performed on 927 samples for 99.7 % analysis data recovery.

	# of Samples Collected	# of Analyses	
Primary	879 of 883	1027 of 1031	
Replicate	48 of 48	62 of 62	
Split/Duplicate		122 of 122	
Total	927 of 931	1211 of 1215	

TLD Direct Radiation Measurements

228 of 228 TLDs placed in the field were recovered and analyzed for 100 % data recovery.

Equipment Operability Trending

Table A4 below depicts trending of REMP continuous air and automatic water composite sampling equipment operability on a year by year basis. Each discrepancy was reviewed to understand the causes of the program exception. It should be noted that deviations from continuous sampling are permitted for routine maintenance or equipment malfunctions for periods not to exceed 4 hours. Occasional equipment power outages/breakdowns were unavoidable.

Table A4
EQUIPMENT OPERABILITY TRENDING

(Page 1 of 1)

			Perce	nt (%) Operabi	ility
Sampling	Sample		2005	2006	2007
Medium	Location	Description			
	3S2	SSES Backup Met. Tower	99.5	100	96.1
	12S1	West Building	100	99.9	99.8
		Former Laydown Area, West of			
	13S6	Confers Lane	99.9	100	100
Air Particulate			4		
& Charcoal	12E1	Berwick Hospital	98.1	100	100
	6G1	Freeland Substation	100	99.8	100
		PPL Sys. Facilities Cntr, Humbolt			
	8G1	Industrial Park	98.6	100	100
		·			
Drinking Water	12H2	Danville Water Company	100	96 -	100
	2S7	Cooling Tower Blowdown	99.9	100	98.1
		Discharge Line			
Surface Water					
	6S6	River Water Intake Line	95.3	99.3	96.1

APPENDIX B

2007 REMP MONITORING SCHEDULE (SAMPLING AND ANALYSIS)

TABLE B1 (Page 1 of 2)

Annual Analytical Schedule for the PPL Susquehanna Steam Electric Station Radiological Environmental Monitoring Program – 2007

Media	No. of Locations	Sample Freq.(a)	Analyses Required	Analysis Freq. (a)
Airborne	6	W	Gross Beta (b)	W
Particulates	Ü	QC	Gamma Spectrometry	Q
Airborne Iodine	6	W	I-131	W
Sediment	3	SA	Gamma Spectrometry	SA
Fish	2	SA ·	Gamma Spectrometry	SA
	1	A	(on edible portion)	Α
Surface Water (c)	5	W for MC	Gamma Spectrometry Tritium	M, Q LTAW & 4S7 M, Q LTAW & 4S7
		W for BWC	I-131	M
Ground Water	5	Q	Gamma Spectrometry	Q
(Well)			Tritium	Q
Drinking Water (d)	1	W for MC	Gross Beta	M
			Gamma Spectrometry Tritium	M M
Cow Milk	4 ^(e)	M, SM ^(e)	I-131	M, SM
		,	Gamma Spectrometry	M, SM
Food Products (f) (Soybeans, Rye, Pumpkins, green beans and potatoes)	2	A	Gamma Spectrometry	A
Soil	2	A	Gamma Spectrometry	Α
Direct Radiation	57	Q	TLD	Q

- (a) W = weekly, BWC = bi-weekly composite (once per month), M = monthly, SM = semi-monthly, Q = quarterly, QC = quarterly composite, SA = semi-annually, A = annually, MC = monthly composite.
- (b) If the gross beta activity were greater than 10 times the yearly mean of the control sample, gamma analysis would be performed on the individual filter. Gross beta analysis performed 24 hours or more following filter change to allow for radon and thorium daughter decay.
- (c) Locations 6S6 and 2S7 are automatic composite samplers and time-proportional sampling was performed at these locations the entire year. Samples are collected weekly for bi-weekly composite and monthly composite samples. Location 6S5 is a sample from the Susquehanna River downriver of the SSES discharge diffuser. Station 6S5 was grab sampled weekly. 4S7 and LTAW were grab sampled quarterly.
- (d) Water from location 12H2 was retrieved weekly. Composite samples of the weekly collections at this location were made monthly (MC) for analysis.
 Sampling at 12H2 was performed using an automatic composite sampler (ACS) that was operated in the time-proportional mode.
- (e) Locations 10D1 (replaced by 10D3), 10D2, 10G1, and 13E3 were sampled semimonthly from April through October when cows are on pasture, monthly otherwise.
- (f) Location 11D1, (Zehner Farm), irrigated pumpkins, soybeans and rye, and Lupini Farm Route 93 Field (11D2) irrigated green beans and potatoes using Susquehanna River water downstream of the SSES. No other fields were identified using river water downstream of the SSES in 2007.

APPENDIX C

2007
REMP MONITORING LOCATION DESCRIPTIONS

TABLE C 1 (Page 1 of 5)

TLD Locations for the SSES Radiological Environmental Monitoring Program – 2007

Less Than One Mile from the SSES - See Figure 2

Location Code ^(a)	Distance ^(a) (miles)	Direction	Description
1S2	0.2	N	Perimeter Fence
2S2	0.9	NNE	Thomas Road
2S3	0.2	NNE	Perimeter Fence
3S2 ·	0.5	NE	SSES Backup Met Tower
3S3	0.9	NE	Riverlands Garden (Abandoned)
4S3	0.2	ENE	Post, West of SSES APF
4S6	0.7	ENE	Riverlands
5S4	0.8	Е	West of Environmental Laboratory
5S7	0.3	E	Perimeter Fence
6S4	0.2	ESE	Perimeter Fence (north)
6 S 9	0.2	ESE	Perimeter Fence (south)
7 S6	0.2	SE	Perimeter Fence
7S7	0.4	SE	End of Kline's Road
8S2	0.2	SSE	Perimeter Fence
9S2	0.2	S	Security Fence
10S1	0.4	SSW	Post - south of switching station
10S2	0.2	SSW	Security Fence
11S7	0.4	SW	SSES Access Road Gate #50
12S1	0.4	WSW	SSES West Building

TABLE C 1 (Page 2 of 5)

TLD Locations for the SSES Radiological Environmental Monitoring Program – 2007

Less Than One Mile from the SSES - See Figure 2

Less Than One whie from the 55E5 - See Figure 2			
Location Code ^(a)	Distance ^(a) (miles)	Direction	Description
12S3	0.4	WSW	Confer's Lane (east side)
13S2	0.4	W	Perimeter Fence
13S5	0.4	W	Perimeter Fence
13S6	0.4	W	Former Laydown Area - west of Confer's Lane
14S5	0.5	WNW	Beach Grove Road/Confer's Lane
15S5	0.4	NW	Perimeter Fence
16S1	0.3	NNW	Perimeter Fence (east)
16S2	0.3	NNW	Perimeter Fence (west)
6A4*	0.6	ESE	Restaurant (U.S. Route 11)
8A3	0.9	SSE	PPL Wetlands Sign (U. S. Route 11)
15A3*	0.9	NW	Hosler Residence
16A2*	0.8	NNW	Benkinney Residence

TABLE C 1 (Page 3 of 5)

TLD Locations for the SSES Radiological Environmental Monitoring Program – 2007

From One to Five Miles from the SSES - See Figure 3

Location Code ^(a)	Distance ^(a) (miles)	Direction	Description
12 S 7	1.1	WSW	Former Kisner Property
8B2*	1.4	SSE	Lawall Residence
9B1	1.3	S	Transmission Line - east of Route 11
10B3*	1.7	SSW	Castek Inc.
1D5	4.0	N	Shickshinny/Mocanaqua Sewage Treatment Plt.
8D3	4.0	SSE	Mowry Residence
9D4	3.6	S	Country Folk Store
10D1	3.0	SSW	R. & C. Ryman Farm
12D2	3.7	WSW	Dagostin Residence
14D1	3.6	WNW	Moore's Hill/Mingle Inn Roads Intersection
3E1	4.7	NE	Webb Residence - Lilly Lake
4E2	4.7	ENE	Ruckles Hill/Pond Hill Roads Intersection
5E2	4.5	Е	Bloss Farm
6E1	4.7	ESE	St. James Church
7E1	4.2	SE	Harwood Transmission Line Pole #2
11E1	4.7	SW	Thomas Residence
12E1*	4.7	WSW	Berwick Hospital
13E4	4.1	W	Kessler Farm

TABLE C 1 (Page 4 of 5)

TLD Locations for the SSES Radiological Environmental Monitoring Program – 2007

Greater than Five Miles from the SSES - See Figure 4

Location Code ^(a)	Distance ^(a) (miles)	Direction	Description
2F1	5.9	NNE	St. Adalberts Cemetery
15F1	5.4	NW	Zawatski Farm
16F1	7.8	NNW	Hidlay Residence
3G4**	17	NE	Wilkes Barre Service Center
4G1**	14	ENE	Mountaintop - Crestwood Industrial Park
7G1**	14	SE	Hazleton PP&L Complex
12G1**	15	WSW	PPL Service Center, Bloomsburg
12G4**	10	WSW	Naus Residence

TABLE C 1 (Page 5 of 5)

TLD Locations for the SSES Radiological Environmental Monitoring Program – 2007

a) All distances from the SSES to monitoring locations are measured from the standby gas treatment vent at 44200/N34117 (Pa. Grid System). The location codes are based on both distance and direction from the SSES. The letters in the location codes indicate if the monitoring locations are on site (within the site boundary) or, if they are not on site, the approximate distances of the locations from the SSES as described below:

S - on site	E - 4-5 miles
A - <1 mile	F - 5-10 miles
B - 1-2 miles	G - 10-20 miles
C - 2-3 miles	H - >20 miles
D - 3-4 miles	*- Special interest areas (other than
	controls)
•	** - Control TLDs

The numbers preceding the letters in the location codes provide the directions of the monitoring locations from the SSES by indicating the sectors in which they are located. A total of 16 sectors (numbered 1 through 16) equally divide an imaginary circle on a map of the SSES and its vicinity, with the SSES at the center of the circle. The middle of sector 1 is directed due north (N). Moving clockwise from sector 1, the sector immediately adjacent to sector 1 is sector 2, the middle of which is directed due north, northeast (NNE). Continuing to move clockwise, the sector numbers increase to 16, which is the north, northwest sector.

The numbers following the letters in the location codes are used to differentiate sampling locations found in the same sectors at approximately the same distances from the SSES.

TABLE C 2 (Page 1 of 4)

Sampling Locations for the SSES Radiological Environmental Monitoring Program – 2007

Less Than One Mile from the SSES - See Figure 5

Ecs Indi O	Less Than One which the SOLD - See Figure 5						
Location Code ^(a)	Distance ^(a) (miles)	Direction	Description				
	SURFACE WATER						
2S7	0.1	NNE	Cooling Tower Blowdown Line				
5S9	0.8	E	Environmental Lab Boat Ramp (alternate for 6S6)				
6S5	0.9	ESE	Outfall Area				
6S6*	0.8	ESE	River Water Intake Line				
LTAW	0.7	NE	Lake Took-A-While (on site)				
4S7	0.4	ENE	Peach Stand Pond				
FISH							
LTAW	0.7	NE - ESE	Lake Took-A-While (on site)				
ÄIR							
12S1	0.4	WSW	SSES West Building				
13S6	0.4	W	Former Laydown Area, West of Confers Lane				
3S2	0.5	NE	Back-up Meteorological Tower				
SOIL							
12S1	0.4	WSW	SSES West Building				

TABLE C 2 (Page 2 of 4)

Sampling Locations for the SSES Radiological Environmental Monitoring Program – 2007

Less Than One Mile from the SSES - See Figure 5

Ettis Thun C	Less Than One while from the BBBb - Bee Figure 5											
Location Code ^(a)	Distance ^(a) (miles)	Direction	Description									
		GŔ	OUND WATER									
2S2	0.9	NNE	SSES Energy Information Center									
4\$4	0.5	ENE	SSES Learning Center									
6S10	0.4	ESE	Sewage Treatment Plant (STP) Well									
11S2	0.4	SW	Tower's Club (Well)									
From One to	Five Miles Fro	m the SSES -										
	t kan an ar i da a a a a a a a a a a a a a a a a a a		FISH ^(b)									
.IND	0.9 - 1.4	ESE	At or Below the SSES Discharge Diffuser									
		S	EDIMENT ^(c)									
2B*	1.6	NNE	Gould Island									
7B	1.2	SE	Bell Bend									
	e de la companya de La companya de la co		AIR									
12E1	4.7	WSW	Berwick Hospital									
			MILK									
10D1	3.0	SSW	R. & C. Ryman Farm (replaced by 10D3)									
10D2	3.5	SSW	Raymond Ryman Farm									
10D3	3.5	SSW	Kevin & Charles Drasher									
13E3	5.0	W	J. Dent Farm									
		FŘŮÍT	S/VEGETABLES									
11D1	3.3	SW	Zehner Farm									
11D2	3.5	SW	Lupini Farm – Route 93 Field									

TABLE C 2 (Page 3 of 4)

Sampling Locations for the SSES Radiological Environmental Monitoring Program – 2007

Greater than Five Miles from the SSES - See Figure 7

Greater than	Tive whies if o	ii the bbbb	See Light /
Location Code ^(a)	Distance ^(a) (miles)	Direction	Description
	The second party of the party of the second pa	The same DRIF	KING WATER
12H2	26	WSW	Danville Water Co. (treated)
			FISHX
2H*	30	NNE	Near Falls, Pa.
		Š	EDIMENT ^(c)
12F	6.9	WSW	Old Berwick Test Track
			AIR
6G1*	13.5	ESE	Freeland Substation
8G1*	12	SSE	PPL SFC - Humbolt Industrial Park
			SOIL
8G1*	12	SSE	PPL SFC - Humbolt Industrial Park
			MILK
10G1*	14	SSW	Davis Farm
		GRO	OUND WATER
12F3*	5.2	WSW	Berwick Water Company

TABLE C 2 (Page 4 of 4)

Sampling Locations for the SSES Radiological Environmental Monitoring Program – 2007

a) All distances from the SSES to monitoring locations are measured from the standby gas treatment vent at 44200/N34117 (Pa. Grid System). The location codes are based on both distance and direction from the SSES. The letters in the location codes indicate if the monitoring locations are on site (within the site boundary) or, if they are not on site, the approximate distances of the locations from the SSES as described below:

S - on site	E - 4-5 miles
A - <1 mile	F - 5-10 miles
B - 1-2 miles	G - 10-20 miles
C - 2-3 miles	H - >20 miles
D - 3-4 miles	* - Control locations

The numbers preceding the letters in the location codes provide the directions of the monitoring locations from the SSES by indicating the sectors in which they are located. A total of 16 sectors (numbered 1 through 16) equally divide an imaginary circle on a map of the SSES and its vicinity, with the SSES at the center of the circle. The middle of sector 1 is directed due north (N). Moving clockwise from sector 1, the sector immediately adjacent to sector 1 is sector 2, the middle of which is directed due north, northeast (NNE). Continuing to move clockwise, the sector numbers increase to 16, which is the north, northwest sector.

The numbers following the letters in the location codes are used to differentiate sampling locations found in the same sectors at approximately the same distances from the SSES.

- b) No actual location is indicated since fish are sampled from the Susquehanna River at or below the SSES discharge diffuser.
- No permanent locations exist; samples are taken based on availability.
 Consequently, it is not necessary to assign a number following the letter in the location code.

APPENDIX D

2007 LAND USE CENSUS RESULTS

2007 LAND USE CENSUS RESULTS

A Land Use Survey, conducted during the 2007 growing season around the SSES, was performed by Ecology III, Inc. to comply with the Offsite Dose Calculation Manual. The purpose of the survey was to document the nearest milk animal, residence, and garden greater than 50 m² (approx. 500 ft²) producing broad leaf vegetation within a distance of 8 km (approx. 5 miles) in each of the 16 meteorological sectors surrounding the SSES.

SUMMARY OF CHANGES FROM 2006 TO 2007

Residence Census:

The residence census was conducted from 26 July through 15 August 2007. Distances of the nearest residences from the Susquehanna SES in the 16 different sectors ranged from 0.5 (J.Futoma, Sector 7 and R. Panetta, Sector 6) to 2.1 miles (D. Barberi, Sector 4), with an average of approximately 1.0 miles.

There were no changes from the 2006 census.

Garden Census:

The garden census was conducted on 23 July through 15 August 2007. Distances of the nearest gardens from the Susquehanna SES in the 16 different sectors ranged from 0.6 miles (T. Scholl, Sector 7) to 4.0 miles (P. Culver, Sector 16), with an average of 2.0 miles.

Changes from the 2006 census included: Sector 5 –L. Kozlowski and W. Witts replaced W. Daily (closer garden), Sector 9 –A. Kamir replaced T. Stemrich (closer garden), Sector 15 –D. Goff replaced R. Reider (closer garden).

Dairy Animal Census:

Seven dairy animal sites were identified in the census conducted from 23 through 31 July 2007. Cows were present at all sites; no dairy goats were found. Changes from 2006 census included two dairies that ceased operations before 2007 census: C. and R. Ryman (location 10D1) and H. Shoemaker (location 16E1). The Drasher Farm (10D3 resumed dairy operations in 2006, but after the 2006 Land Use Census was completed. The Davis Farm (Sector 10) was included in the dairy census as a control location in the REMP milk sampling program.

Irrigation

Two farms irrigated crops using Susquehanna River water downriver from the Susquehanna SES in 2007: Zehner Farm (location 11D1 – field east of Nescopeck) and the Lupini Field – Route 93 (11D2). Zehner irrigated pumpkins, soybeans, and rye, and Lupini irrigated string beans and potatoes. No other farms irrigated this year because

soil moisture was sufficient for the crops. Overall results of the survey are summarized below:

TABLE D1

(Page 1 of 1)

Nearest residence, garden, and dairy animal in each of the 16 meteorological sectors within a 5-mile radius of the Susquehanna Steam Electric Station, 2007.

<u>SECTOR</u>	<u>DIRECTION</u>	NEAREST RESIDENCE	NEAREST <u>GARDEN</u>	NEAREST DAIRY ANIMAL
1	N	1.3 mi	3.2 mi	>5.0 mi
2	NNE	1.0 mi	2.3 mi ⁱ	>5.0 mi
3	NE	0.9 mi	2.6 mi	>5.0 mi
4	ENE	2.1 mi	2.4 mi ^{a,c,d,j}	>5.0 mi
5	E -	1.4 mi	1.4 mi	4.5 mi. ^g
6	ESE	0.5 mi	2.5 mi	4.2 mi ^g
7	SE	0.5 mi	0.6 mi	>5.0 mi
8	SSE	0.6 mi	2.9 mi	>5.0 mi
9	S	1.0 mi	1.2 mi	>5.0 mi
10	SSW	0.9 mi	1.2 mi	3.1 mi ^g
11	SW	1.5 mi	1.9 mi	>5.0 mi
12	WSW	1.3 mi	1.3 mi	1.7 mi ^{i,g}
13	W	1.2 mi	1.2 mi	5.0 mi
14	WNW	0.8 mi	1.3 mi	>5.0 mi
15	NW	0.7 mi	1.8 mi	>5.0 mi
16	NNW	0.6 mi	4.0 mi	>5.0 mi

^a Chickens raised for consumption at this location.

b Ducks raised for consumption at this location.*

^c Eggs consumed from chickens at this location.

^d Geese raised for consumption at this location.

^e Pigs raised for consumption at this location.*

f Turkeys raised for consumption at this location.*

g Fruits/vegetables raised for consumption at this location.

h Rabbits raised for consumption at this location.*

ⁱ Beef cattle raised for consumption at this location.

^j Goats raised for consumption at this location.*

^k Pheasants raised for consumption at this location.*

Sheep raised for consumption at this location.*

^m Guinea hen raised for consumption at this location.*

^{*}No locations were identified as raising rabbits, dairy goats, pheasants, sheep, turkeys, pigs, ducks and guinea hens during 2007.

APPENDIX E

INTENTIONALLY LEFT BLANK

APPENDIX F

INTENTIONALLY LEFT BLANK

APPENDIX G

2007 SSES REMP SUMMARY OF DATA

The averages for indicator and control locations reported in the Summary of Data Table, which summarizes the entire year's results for the SSES REMP, were calculated using all measured values, when available, whether or not they were reported in Appendix I tables. Values below the MDCs, even zeroes and negatives, were part of the averaging process for these analysis results. When no measured results are available in these cases, "LLD" is reported.

Preferably, the averages reported in the Summary of Data table for sample media that are normally collected continuously are determined using only results from continuously collected samples. Occasionally, grab samples are taken for these media when equipment malfunctions or other anomalies preclude or otherwise perturb routine continuous sampling. These grab samples are taken to minimize the time periods when no sampling is being performed, or, in some instances, when continuous sampling is considered to be nonrepresentative.

Because grab samples are snapshots of the media over brief periods, it is preferable not to average the analysis results of these samples with those for continuously collected composite samples. However, when equipment malfunctions are protracted, relatively large periods of time could be entirely unrepresented by averages if the results from grab sample analyses are not considered.

Allowing analysis results for grab samples to be weighted equally with those representing relatively large periods of time would tend to bias the resulting averages unjustifiably towards the conditions at the times that the grabs are obtained. Averages obtained in this way might less accurately reflect the conditions for the combined period of continuous sampling and grab sampling than if only the results from continuous sampling were used. On the other hand, using weighting factors for the analysis results of grab samples derived from the actual time it takes to collect those samples would lead to the grab sample analysis results having a negligible effect on the overall average and not justifying the effort involved.

Grab samples collected in lieu of normal continuous sampling are typically obtained at regular intervals corresponding to the intervals (weekly) at which the continuously collected samples would usually be retrieved for eventual compositing. For example, grab samples are collected once a week but may be composited monthly in place of continuously collected samples that would normally be retrieved weekly and composited monthly. Since each grab sample is used to represent an entire week, albeit imperfect, it is reasonable to weight the analysis results the same. Thus, the results of one weekly grab are given approximately one-fourth the weight of the results for a monthly composite sample collected continuously for each of the four weeks in a month. Similarly, the analysis results of a composite of four weekly grab samples would carry the same weight as the analysis results for a composite of four weeks of continuously collected sample.

TABLE G

SUMMARY OF DATA FOR SSES

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 1 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)		LOWER LIMIT OF DETECTION (LLD) (2)	N	ATOR MEAN (RANG		NAME DISTANCE A				MEAN MEAN (3) RANGE	N	OL LOC IEAN (I RANGE	•	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Ambient Radiation (mR/std. qtr.)	TLD	228		2.43E+01 (1.67E+01	•	/ 208) 5.20E+01)	9S2 0.2	mi	S	4.57E+01 (4.23E+01	` '	2.31E+01 (1.74E+01	•	/ 20) 2.82E+01)	0
Surface Water (pCi/l)	Tritium	47	2000	1.40E+03 (-1.47E+02	•	/ 33) 1.53E+04)	2S7 0.1	mi	NNE	3.58E+03 (-6.96E+01	(13 / 13) - 1.53E+04)	8.73E+00 (-1.87E+02	(14	/ 14) 8.60E+01)	0
	Iodine-131	37	1	6.61E-01 (-1.09E-01	•	/ 24) 1.66E+00)	2S7 0.1	mi	NNE	9.03E-01 (-4.22E-02	(12 / 12) - 1.66E+00)	4.50E-01 (-1.54E-01	(13	/ 13) 1.44E+00)	0
•	Gamma Spec														
	K-40	47		2.17E+01 (-2.26E+01	•	/ 33) 1.55E+02)	4\$7 0.4	mi	ENE	5.08E+01 (5.57E+00	(4 / 4) - 1.40E+02)	1.71E+01 (-2.09E+01	(14		0
	Mn-54	47	15	-2.22E-01 (-3.20E+00	(33	/ 33) 2.80E+00)	2S7 0.1	mi	NNE	-2.97E-02 (-9.64E-01	(13 / 13) - 1.94E+00)	-4.25E-01 (-1.93E+00	(14	/ 14) 2.12E+00)	0 .
	Co-58	47	15	7.29E-03 (-4.31E+00	•	/ 33) 5.38E+00)	LTAW on site		NE-ESE	3.46E-01 (-2.65E+00	(4 / 4) - 5.38E+00)	-1.95E-01 (-1.20E+00	(14	/ 14) 1.30E+00)	0
	Fe-59	47	30	6.81E-01 (-8.19E+00	(33	/ 33) 8.88E+00)	6S6 0.8	mi	ESE	3.25E+00 (-1.71E+00	(14 / 14) - 8.78E+00)	3.25E+00 (-1.71E+00	(14	/ 14) 8.78E+00)	0
	Co-60	47	15	5.78E-02 (-3.00E+00	(33	/ 33) 3.74E+00)	LTAW on site		NE-ESE	3.40E-01 (-2.01E+00	(4 / 4) - 3.74E+00)	-1.71E-01 (-2.16E+00	(14	/ 14) 1.71E+00)	0
	Zn-65	47	30 -	-3.51E+00 (-1.11E+01	(33	/ 33) 6.89E+00)	4 S 7 0.4	mi	ENE	5.48E-01 (-4.55E+00	(4 / 4) - 6.89E+00)	-2.60E+00 (-8.31E+00	(14	/ 14) 2.50E+00)	. 0

TABLE G

SUMMARY OF DATA FOR SSES

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 2 of 13

MEDIUM OR PATHWAY TOTAL NUMBER OF SAMPLED OF ANALYSES DETECTION (UNIT OF MEASUREMENT) PERFORMED (1) (LLD) (2)			ALL INDICATOR LOCATIONS MEAN (3) RANGE	LOCATION WI NAME DISTANCE AND DIRECTION	TH HIGHEST MEAN MEAN (3) RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Surface Water (cont.) (pCi/l)	Zr-95 4	7 30	2.49E-01 (33 / 33) (-3.10E+00 - 5.39E+00)	2S7 0.1 mi NNE	5.53E-01 (13 / 13) (-1.73E+00 - 4.79E+00)	3.11E-01 (14 / 14) (-4.86E+00 - 2.41E+00)	0
	Nb-95 4	7 15	1.26E+00 (33 / 33) (-4.26E+00 - 9.20E+00)	4S7 0.4 mi ENE	3.25E+00 (4 / 4) (-1.63E+00 - 9.20E+00)	6.03E-01 (14 / 14) (-9.69E-01 - 1.63E+00)	0
	Cs-134 4	7 15	-1.55E+00 (33 / 33) (-8.45E+00 - 3.67E+00)	LTAW on site NE-ESE	1.07E-01 (4 / 4) (-2.51E+00 - 2.73E+00)	-1.02E+00 (14 / 14) (-5.88E+00 - 2.15E+00)	0
	Cs-137 4	7 18	-2.36E-01 (33 / 33) (-3.82E+00 - 2.40E+00)	6S5	4.04E-01 (12 / 12) (-5.57E-01 - 2.40E+00)	1.72E-01 (14 / 14) (-1.17E+00 - 1.82E+00)	0
•	Ba-140 4	7 60	-2.05E+00 (33 / 33) (-2.20E+01 - 2.04E+01)	LTAW on site NE-ESE	5.39E+00 (4 / 4) (-8.79E+00 - 2.04E+01)	-2.17E+00 (14 / 14) (-2.85E+01 - 9.09E+00)	0
	La-140 4	7 15	-5.38E-01 (33 / 33) (-6.73E+00 - 4.57E+00)	2S7 0.1 mi NNE	8.14E-01 (13 / 13) (-3.35E+00 - 4.57E+00)	5.76E-01 (14 / 14) (-7.34E+00 - 5.73E+00)	. 0

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 3 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AN TOTAL NUMBE OF ANALYSES PERFORMED (R OF DETECTION	ALL INDICATOR LOCATIONS MEAN (3) RANGE	LOCATION WI NAME DISTANCE AND DIRECTION	TH HIGHEST MEAN MEAN (3) RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Potable Water (pCi/l)	Gross Beta	12 4	2.48E+00 (12 / 12) (9.31E-01 - 5.29E+00)	12H2 26 . mi WSW	2.48E+00 (12 / 12) (9.31E-01 - 5.29E+00)		0
	Tritium	12 2000	3.06E+01 (12 / 12) (-9.78E+01 - 1.15E+02)	12H2 26 mi WSW	3.06E+01 (12 / 12) (-9.78E+01 - 1.15E+02)		0
	Gamma Spec K-40	12	3.43E+01 (12 / 12) (-4.60E+01 - 1.96E+02)	12H2 26 mi WSW	3.43E+01 (12 / 12) (-4.60E+01 - 1.96E+02)		.0
	Mn-54	12 15	-6.20E-01 (12 / 12) (-1.53E+00 - 8.01E-02)	12H2 26 mi WSW	-6.20E-01 (12 / 12) (-1.53E+00 - 8.01E-02)		0
	Co-58	12 15	-6.09E-01 (12 / 12) (-2.81E+00 - 9.93E-01)	12H2 26 mi WSW	-6.09E-01 (12 / 12) (-2.81E+00 - 9.93E-01)		0
	Fe-59	12 30	1.09E+00 (12 / 12) (-4.72E+00 - 8.44E+00)	12H2 26 mi WSW	1.09E+00 (12 / 12) (-4.72E+00 - 8.44E+00)		0
	Co-60	12 15	-4.77E-03 (12 / 12) (-8.82E-01 - 8.09E-01)	12H2 26 mi WSW	-4.77E-03 (12 / 12) (-8.82E-01 - 8.09E-01)		0
	Zn-65	12 30	1.12E+00 (12 / 12) (-4.19E+00 - 7.06E+00)	12H2 26 mi WSW	1.12E+00 (12 / 12) (-4.19E+00 - 7.06E+00)		0
	Zr-95	12 30	7.93E-01 (12 / 12) (-2.08E+00 - 6.02E+00)	12H2 26 mi WSW	7.93E-01 (12 / 12) (-2.08E+00 - 6.02E+00)	·	0

TABLE G

SUMMARY OF DATA FOR SSES

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 4 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND LOWER LIMIT TOTAL NUMBER OF OF ANALYSES DETECTION (1) PERFORMED (1) (LLD) (2)		ALL INDICATOR LOCATIONS MEAN (3) RANGE	LOCATION WI NAME DISTANCE AND DIRECTION	TH HIGHEST MEAN MEAN (3) RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Potable Water (cont) (pCi/l)	Nb-95 1	2 15	1.06E+00 (12 / 12) (-1.62E+00 - 7.31E+00)	12H2 26 mi WSW	1.06E+00 (12 / 12) (-1.62E+00 - 7.31E+00)	Only indicator stations sampled for this medium.	0
	.Cs-134 1:	2 15	-7.92E-01 (12 / 12) (-5.94E+00 - 2.05E+00)	12H2 26 mi WSW	-7.92E-01 (12 / 12) (-5.94E+00 - 2.05E+00)		0
÷ .	Cs-137 1	2 18	-3.49E-02 (12 / 12) (-2.60E+00 - 1.94E+00)	12H2 26 mi WSW	-3.49E-02 (12 / 12) (-2.60E+00 - 1.94E+00)		0
	Ba-140 1	2 60	-3.02E-02 (12 / 12) (-8.48E+00 - 8.76E+00)	12H2 26 mi WSW	-3.02E-02 (12 / 12) (-8.48E+00 - 8.76E+00)	•	0
	La-140 1	2 15	-1.12E+00 (12 / 12) (-8.85E+00 - 3.47E+00)	12H2 26 mi WSW	-1.12E+00 (12 / 12) (-8.85E+00 - 3.47E+00)		0

TABLE G

SUMMARY OF DATA FOR SSES

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 5 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)	OF DETECTION	ALL INDICATOR LOCATIONS MEAN (3) RANGE	LOCATION W NAME DISTANCE AND DIRECTION	ITH HIGHEST MEAN MEAN (3) RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Fish	Gamma Spec						
(pCi/kg wet)	K-40 1	3	3.43E+03 (7 / 7) (3.08E+03 - 4.10E+03)	LTAW on site NE-ESE	3.48E+03 (1 / 1) (3.48E+03 - 3.48E+03)	2.71E+03 (6 / 6) (7.67E+02 - 3.64E+03)	0
	Mn-54 1	3 130	1.01E+01 (7 / 7) (-1.61E+01 - 3.34E+01)	LTAW on site NE-ESE	1.74E+01 (1 / 1) (1.74E+01 - 1.74E+01)	3.48E+00 (6 / 6) (-7.69E+00 - 1.22E+01)	0
	Co-58 1	3 130	5.77E-01 (7 / 7) (-8.02E+00 - 8.51E+00)	IND 0.9-1.4 mi ESE	1.90E+00 (6 / 6) (-8.02E+00 - 8.51E+00)	-1.31E+01 (6 / 6) (-3.76E+01 - 1.25E+01)	0
	Fe-59 1	3 260	-9.24E+00 (7 / 7) (-1.07E+02 - 7.65E+01)	2H 30 mi NNE	1.71E+01 (6 / 6) (-1.90E+01 - 3.41E+01)	1.71E+01 (6 / 6) (-1.90E+01 - 3.41E+01)	0
	Co-60 1	3 130	-4.99E-01 (7 / 7) (-2.46E+01 - 1.62E+01)	LTAW on site NE-ESE	8.78E+00 (1 / 1) (8.78E+00 - 8.78E+00)	-1.26E+00 (6 / 6) (-4.07E+01 - 2.48E+01)	0 .
	Zn-65 1	3 260	-5.97E+01 (7 / 7) (-1.35E+02 - 2.38E+01)	2H 30 mi NNE	-2.75E+01 (6 / 6) (-8.67E+01 - 5.55E+01)	-2.75E+01 (6 / 6) (-8.67E+01 - 5.55E+01)	0
	Zr-95 1	3	-6.62E+00 (7 / 7) (-7.61E+01 - 9.74E+01)	LTAW on site NE-ESE	9.74E+01 (1 / 1) (9.74E+01 - 9.74E+01)	-1.01E+00 (6 / 6) (-2.06E+01 - 1.38E+01)	0
	Nb-95 1	3	1.77E+01 (7 / 7) (-1.52E+01 - 4.69E+01)	LTAW on site NE-ESE	3.38E+01 (1 / 1) (3.38E+01 - 3.38E+01)	1.54E+01 (6 / 6) (-8.39E+00 - 4.50E+01)	0
	Cs-134 1	3 130	-1.53E+00 (7 / 7) (-5.02E+01 - 1.52E+01)	IND 0.9-1.4 mi ESE	1.37E-01 (6 / 6) (-5.02E+01 - 1.52E+01)	-4.24E+00 (6 / 6) (-2.50E+01 - 1.94E+01)	0
	Cs-137 1	3 150	1.16E+01 (7 / 7) (-1.48E+01 - 3.45E+01)	LTAW on site NE-ESE	1.96E+01 (1 / 1) (1.96E+01 - 1.96E+01)	-2.89E+00 (6 / 6) (-2.24E+01 - 2.07E+01)	0
	Ba-140 1	3	-1.50E+01 (7 / 7) (-2.03E+02 - 1.44E+02)	IND 0.9-1.4 mi ESE	1.64E+01 (6 / 6) (-1.34E+02 - 1.44E+02)	-5.59E+01 (6 / 6) (-3.10E+02 - 2.25E+02)	0
	La-140 1	3	3.83E+01 (7 / 7) (-7.64E+01 - 1.83E+02)	LTAW on site NE-ESE	5.62E+01 (1 / 1) (5.62E+01 - 5.62E+01)	-2.78E+01 (6 / 6) (-1.13E+02 - 9.67E+01)	0

${\bf OPERATIONAL\ RADIOLOGICAL\ ENVIRONMENTAL\ MONITORING\ PROGRAM-2007}$

NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 6 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)	LOWER LIMIT OF DETECTION (LLD) (2)	ALL INDICATOR LOCATIONS MEAN (3) RANGE	NAME DISTANCE A	LOCATION WI	TH HIGHEST MEAN MEAN (3) RANGE	CO	VTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Sediment	Gamma Spec Be-7	5	1.99E+02 (4 / 4)	7B		2.10E+02 (2 / 2)	-1.23E+	02 (2 / 2)	0 .
(pCi/kg dry)	Be-/	0	(4.20E+01 - 3.77E+02)	1.2	mi SE	(4.20E+01 - 3.7		` /	U
	K-40	6	1.11E+04 (4 / 4) (9.32E+03 - 1.40E+04)	2B 1.6	mi NNE	1.30E+04 (2 / 2) (1.14E+04 - 1.4	1.30E-4 6E+04) (1.14E-4		0
	Mn-54	6	-8.74E+00 (4 / 4) (-3.17E+01 - 1.64E+01)	7B 1.2	mi SE	1.35E+00 (2 / 2) (-1.37E+01 - 1.6	-2.63E ₄ 4E+01) (-2.92E ₄	` '	0
	Co-58	6	7.01E+00 (4 / 4) (-8.92E+00 - 4.11E+01)	7B 1.2	mi SE	1.61E+01 (2 / 2) (-8.92E+00 - 4.1	-6.31E4 1E+01) (-1.73E4		0
	Fe-59	6	-4.58E+01 (4 / 4) (-5.61E+014.00E+01)	2B 1.6	mi NNE	-1.13E+01 (2 / 2) (-2.95E+01 - 6.8	-1.13E ₄ 1E+00) (-2.95E ₄	/	0 .
	Co-60	6	-5.95E+00 (4 / 4) (-2.20E+01 - 1.28E+01)	7B 1.2	mi SE	6.29E+00 (2 / 2) (-2.17E-01 - 1.2	-1.28E+ 8E+01) (-1.68E+	• /	0
	Zn-65	6	1.30E+01 (4 / 4) (-1.74E+01 - 5.89E+01)	12F 6.9	mi WSW	2.85E+01 (2 / 2) (-1.85E+00 - 5.8	-2.09E+ 9E+01) (-7.53E+	,	0
	Zr-95	6	3.58E+01 (4 / 4) (1.92E+01 - 5.23E+01)	7B 1.2	mi SE	3.90E+01 (2 / 2) (2.57E+01 - 5.2	-1.53E+ 3E+01) (-1.54E+	` '	0
	Nb-95	6	1.86E+01 (4 / 4) (-7.88E+00 - 5.67E+01)	2B 1.6	mi NNE	5.98E+01 (2 / 2) (3.15E+01 - 8.8	5.98E+ 0E+01) (3.15E+	, ,	0
	Cs-134	6 150	3.29E+00 (4 / 4) (-3.82E+01 - 5.69E+01)	12F 6.9	mi WSW	2.80E+01 (2 / 2) (-9.61E-01 - 5.6	-1.01E- 9E+01) (-4.02E-	- (- ' - /	0
	Cs-137	6 180	1.93E+01 (4 / 4) (-1.72E+01 - 5.97E+01)	2B 1.6	mi NNE	6.40E+01 (2 / 2) (3.01E+00 - 1.2	6.40E- 5E+02) (3.01E-		0
	Ba-140	6	-2.34E+02 (4 / 4) (-5.44E+02 - 1.56E+01)	2B 1.6	mi NNE	-1.84E+01 (2 / 2) (-3.09E+015.	-1.84E+ 96E+00) (-3.09E+	-01 (2 / 2) -015.96E+00)	0

TABLE G

SUMMARY OF DATA FOR SSES

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 7 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND LOWER LIMIT TOTAL NUMBER OF OF ANALYSES DETECTION PERFORMED (1) (LLD) (2)		ALL INDICATOR LOCATIONS MEAN (3) RANGE	NAME DISTANCE AN	LOCATION WI	TH HIGHEST MEAN MEAN (3) RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)	
Sediment (cont) (pCi/kg dry)	La-140	6	· -2.73E+01 (4 / 4) (-1.04E+02 - 2.87E+01)	7B 1.2	mi SE	1.50E-01 (2 / 2) (-2.84E+01 - 2.87E+01)	-8.88E+01 (2 / 2) (-1.46E+023.16E+01)	0 ·	
	Ra-226	6	2.27E+03 (4 / 4) (1.90E+03 - 2.53E+03)	2B 1.6	mi NNE	2.46E+03 (2 / 2) (1.94E+03 - 2.98E+03)	2.46E+03 (2 / 2) (1.94E+03 - 2.98E+03)	0	
	Th-228	6	9.96E+02 (4 / 4) (7.27E+02 - 1.20E+03)	7 B 1.2	mi SE	1.19E+03 (2 / 2) (1.18E+03 - 1.20E+03)	1.08E+03 (2 / 2) (9.11E+02 - 1.24E+03)	0	
	Ac-228	6	1.00E+03 (4 / 4) (6.56E+02 - 1.36E+03)	2B 1.6	mi NNE	1.21E+03 (2 / 2) (1.18E+03 - 1.24E+03)	1.21E+03 (2 / 2) (1.18E+03 - 1.24E+03)	0	
Ground Water (pCi/l)	Gamma Spec K-40	20	1.43E+01 (16 / 16) (-3.89E+01 - 7.10E+01)	4S4 0.5	mi ENE	2.72E+01 (4 / 4) (4.53E+00 - 7.10E+01)	6.05E+00 (4 / 4) (-4.97E+01 - 3.80E+01)	0	
	Mn-54	20 15	-9.72E-02 (16 / 16) (-2.19E+00 - 3.17E+00)	11S2 0.4	mi SW	5.72E-01 (4 / 4) (-1.18E+00 - 3.17E+00)	-9.03E-01 (4 / 4) (-1.38E+00 - 6.29E-02)	. 0	
	Co-58	20 15	-7.92E-01 (16 / 16) (-2.96E+00 - 1.91E+00)	4S4 0.5	mi ENE	-5.28E-02 (4 / 4) (-1.77E+00 - 1.91E+00)	-1.42E+00 (4 / 4) (-1.75E+008.72E-01)	. 0	
	Fe-59	20 30	1.70E+00 (16 / 16) (-3.19E+00 - 8.70E+00)	2S2 0.9	mi NNE	2.91E+00 (4 / 4) (1.12E+00 - 6.55E+00)	1.02E+00 (4 / 4) (-3.38E+00 - 7.21E+00)	. 0	
	Co-60	20 15	-6.52E-01 (16 / 16) (-4.61E+00 - 1.65E+00)	2S2 0.9	mi NNE	9.97E-02 (4 / 4) (-1.11E+00 - 9.08E-01)	1.52E-02 (4 / 4) (-3.27E-01 - 7.36E-01)	0	
	Zn-65	20 30	-3.02E+00 (16 / 16) (-1.65E+01 - 6.53E+00)	2S2 0.9	mi NNE	8.73E-01 (4 / 4) (-2.08E+00 - 6.53E+00)	-8.48E-01 (4 / 4) (-4.52E+00 - 1.51E+00)	0	
	Zr-95	20 30	-5.01E-02 (16 / 16) (-5.44E+00 - 3.10E+00)	2S2 0.9	mi NNE	1.08E+00 (4 / 4) (-1.29E+00 - 2.86E+00)	3.98E-02 (4 / 4) (-1.15E+00 - 2.26E+00)	0	
	Nb-95	20 15	6.84E-01 (16 / 16) (-1.65E+00 - 4.27E+00)	4S4 0.5	mi ENE	1.37E+00 (4 / 4) (2.23E-01 - 2.90E+00)	7.46E-01 (4 / 4) (-3.79E-01 - 2.27E+00)	0	
	Cs-134	20 15	-5.55E-01 (16 / 16) (-4.88E+00 - 5.51E+00)	6S10 0.4	mi ESE	6.72E-01 (4 / 4) (-4.06E+00 - 5.51E+00)	-3.05E-01 (4 / 4) (-9.87E-01 - 4.85E-01)	0	

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 8 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	TOTAL NUMBER OF OF ANALYSES DETECTION		DETECTION	ALL INDICATOR LOCATIONS MEAN (3) RANGE	NAME DISTANCE	LOCATION WITH HIGHEST MEAN NAME MEAN (3) DISTANCE AND DIRECTION RANGE			IEAN (3)	CONTROL L MEAN RANG	I (3)	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Ground Water (cont) (pCi/l)	Cs-137	20	18	7.21E-01 (16 / 16) (-6.17E-01 - 7.44E+00)	4S4 0.5	mi	ENE	1.72E+00 (-6.17E-01	(4 / 4) - 7.44E+00)	-4.85E-01 (4 (-1.20E+00 -	1 / 4) 5.12E-01)	0
	Ba-140	20	60	-1.73E+00 (16 / 16) (-1.35E+01 - 6.61E+00)	11S2 0.4	mi	sw	1.35E+00 (-6.36E+00	(4 / 4) - 6.61E+00)	-7.36E+00 (4 (-1.85E+01 -	4 / 4) 2.83E+00)	0
	La-140	20	15	-7.54E-01 (16 / 16) (-7.06E+00 - 5.41E+00)	6 S 10 0.4	mi	ESE	1.68E+00 (-2.59E+00	(4 / 4) - 5.41E+00)	`	1 / 4) 7.29E-02)	0
	H-3	20	2000	6.76E+01 (16 / 16) (1.13E+01 - 1.46E+02)	4S4 0.5	mi	ENE	1.20E+02 (8.89E+01	(4 / 4) - 1.46E+02)	4.19E+01 (4 (-1.17E+01 -	1 / 4) 1.01E+02)	0
Air Particulates (E-03 pCi/m3)	Gross Beta	312	10	1.59E+01 (208 / 208) (5.30E+00 - 3.21E+01)	13S6 0.4	mi	w	1.64E+01 (5.57E+00	(52 / 52) - 2.71E+01)	1.37E+01 (104 (5.46E+00 -	,	0 ·
Air Iodine (E-03 pCi/m3)	I-131	312	70	-1.34E-01 (208 / 208) (-1.15E+01 - 1.58E+01)	3S2 0.5	mi	NE	-1.62E-02 (-1.09E+01	(52 / 52) - 1.58E+01)	-2.44E-01 (104 (-1.12E+01 -	, ·	0
Air Particulates Quarterly Composite (E-03 pCi/m3)	Gamma Spec Be-7	24	·	1.29E+02 (16 / 16) (9.55E+01 - 2.09E+02)	3S2 0.5	mi	NE	1.52E+02 (1.18E+02	(4 / 4) 2.09E+02)	`	3 / 8) 1.37E+02)	0
	K-40	24		1.24E+00 (16 / 16) (-1.17E+01 - 1.09E+01)	6G1 13.5	mi	ESE	4.44E+00 (-6.11E-01	(4 / 4) - 7.91E+00)	3.76E+00 (8 (-3.34E+00 -	3 / 8) 1.28E+01)	0
	Mn-54	24		-1.17E-01 (16 / 16) (-9.33E-01 - 7.36E-01)	6G1 13.5	mi	ESE	4.55E-01 (1.32E-01	(4 / 4) - 6.75E-01)	2.37E-01 (8 (-2.08E-01 -	8 / 8) 6.75E-01)	0

TABLE G

SUMMARY OF DATA FOR SSES

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 9 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)	LOWER LIMIT OF DETECTION (LLD) (2)	ALL INDICATOR LOCATIONS MEAN (3) RANGE	LOCATION NAME DISTANCE AND DIRECTIO	WITH HIGHEST MEAN MEAN (3) N RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Air Particulates (cont) Quarterly Composite (E-03 pCi/m3)	Co-58 24	ı	-1.30E-01 (16 / 16) (-2.27E+00 - 1.20E+00)	3S2 0.5 mi NE	6.83E-01 (4 / 4) (4.86E-02 - 1.20E+00)	-3.56E-01 (8 / 8) (-1.85E+00 - 4.99E-01)	0
	Fe-59 24		-1.41E-01 (16 / 16) (-7.57E+00 - 7.06E+00)	12E1 4.7 mi WSW	3.05E+00 (4 / 4) (1.05E+00 - 7.06E+00)	1.61E+00 (8 / 8) (-1.59E+00 - 7.78E+00)	0
	Co-60 24	ŀ	-1.03E-01 (16 / 16) (-6.41E-01 - 3.55E-01)	13S6 0.4 mi W	1.53E-01 (4 / 4) (-5.79E-02 - 3.55E-01)	1.11E-01 (8 / 8) (-2.10E-01 - 6.11E-01)	0
	Zn-65 24	ı	3.59E-01 (16 / 16) (-3.09E+00 - 1.89E+00)	12S1 0.4 mi WSW	9.62E-01 (4 / 4) (-6.12E-01 - 1.81E+00)	6.79E-01 (8 / 8) (-1.64E+00 - 3.23E+00)	0
	Zr-95 24	ļ	-5.66E-01 (16 / 16) (-5.02E+00 - 2.72E+00)	6G1 13.5 mi ESE	8.21E-01 (4 / 4) (5.01E-01 - 1.20E+00)	4.78E-01 (8 / 8) (-7.98E-01 - 1.20E+00)	0
	Nb-95 24	ŀ	1.86E-01 (16 / 16) (-1.54E+00 - 2.74E+00)	12E1 4.7 mi WSW	1.17E+00 (4 / 4) (-1.25E+00 - 2.74E+00)	2.83E-01 (8 / 8) (-7.91E-01 - 1.26E+00)	0
	Cs-134 24	50	1.86E-01 (16 / 16) (-2.45E-01 - 1.98E+00)	12E1 4.7 mi WSW	7.38E-01 (4 / 4) (-5.71E-02 - 1.98E+00)	4.00E-01 (8 / 8) (-2.88E-01 - 1.01E+00)	0
	Cs-137 24	60	4.06E-02 (16 / 16) (-9.14E-01 - 9.63E-01)	6G1 13.5 mi ESE	1.97E-01 (4 / 4) (-3.28E-01 - 6.55E-01)	8.60E-02 (8 / 8) (-3.28E-01 - 6.55E-01)	0
	Ba-140 24	ŀ	3.78E+01 (16 / 16) (-1.66E+02 - 3.21E+02)	13S6 0.4 mi W	1.49E+02 (4 / 4) (-5.50E+01 - 3.21E+02)	5.43E+00 (8 / 8) (-2.31E+02 - 2.15E+02)	0
	La-140 24	1	5.09E+00 (16 / 16) (-8.13E+01 - 9.61E+01)	12S1 0.4 mi WSW	2.90E+01 (4 / 4) (2.37E+01 - 4.11E+01)	-2.92E+00 (8 / 8) (-4.73E+01 - 5.16E+01)	0

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 10 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBE OF ANALYSES PERFORMED (1	R OF DETECTION	ALL INDICATOR LOCATIONS MEAN (3) RANGE	NAME DISTANCE AI	LOCATION WI	TH HIGHEST MEAN MEAN (3) RANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Milk (pCi/l)	I-131	84 1	4.22E-02 (63 / 63) (-4.78E-01 - 5.76E-01)	10D2 3.1	mi SSW	8.39E-02 (21 / 21) (-4.30E-01 - 5.76E-01)	-1.59E-02 (21 / 21) (-3.36E-01 - 2.89E-01)	0
	Gamma Spec K-40	84	1.30E+03 (63 / 63) (1.07E+03 - 2.06E+03)	10D1 3	mi SSW	1.41E+03 (6 / 6) (1.20E+03 - 2.06E+03)	1.30E+03 (21 / 21) (1.08E+03 - 1.43E+03)	0
	Mn-54	84	-6.78E-01 (63 / 63) (-5.78E+00 - 3.32E+00)	10D2 3.1	mi SSW	-2.32E-01 (21 / 21) (-3.35E+00 - 3.32E+00)	-4.13E-01 (21 / 21) (-4.38E+00 - 4.53E+00)	0
	Co-58	84	-3.12E-01 (63 / 63) (-5.40E+00 - 5.54E+00)	13E3 5	mi W	7.47E-01 (21 / 21) (-1.13E+00 - 5.54E+00)	-9.30E-01 (21 / 21) (-3.33E+00 - 1.90E+00)	0
	Fe-59	84	1.18E+00 (63 / 63) (-1.48E+01 - 1.49E+01)	10D3 3.5	mi SSW	1.81E+00 (15 / 15) (-5.48E+00 - 1.49E+01)	5.21E-01 (21 / 21) (-6.35E+00 - 9.67E+00)	0 '
•	Co-60	84	1.28E-01 (63 / 63) (-4.49E+00 - 4.21E+00)	13E3 5	mi W	9.19E-01 (21 / 21) (-2.64E+00 - 4.21E+00)	5.25E-01 (21 / 21) (-3.95E+00 - 8.13E+00)	0
	Zn-65	84	-4.48E+00 (63 / 63) (-2.56E+01 - 6.24E+00)	10D3 3.5	mi SSW	-1.50E+00 (15 / 15) (-1.08E+01 - 5.66E+00)	-4.71E+00 (21 / 21) (-2.68E+01 - 4.24E+00)	0
	Zr-95	84	5.63E-01 (63 / 63) (-8.32E+00 - 1.10E+01)	13E3 5	mi W	8.00E-01 (21 / 21) (-8.32E+00 - 9.86E+00)	-9.28E-01 (21 / 21) (-8.96E+00 - 5.15E+00)	0
	Nb-95	84	6.09E-01 (63 / 63) (-4.16E+00 - 4.46E+00)	10D3 3.5	mi SSW	8.26E-01 (15 / 15) (-1.54E+00 - 4.36E+00)	2.68E-01 (21 / 21) (-4.05E+00 - 4.51E+00)	.0
	Cs-134	84 15	-2.06E+00 (63 / 63) (-1.15E+01 - 4.99E+00)	10D1 3	mi SSW	-1.47E+00 (6 / 6) (-3.75E+00 - 5.43E-01)	-1.55E+00 (21 / 21) (-8.09E+00 - 2.36E+00)	0
	Cs-137	84 18	4.55E-01 (63 / 63) (-5.36E+00 - 6.53E+00)	10D2 3.1	mi SSW	1.60E+00 (21 / 21) (-3.38E+00 - 6.53E+00)	3.93E-01 (21 / 21) (-6.92E+00 - 3.79E+00)	0
	Ba-140	84 60	4.75E-01 (63 / 63) (-1.98E+01 - 2.71E+01)	10D2 3.1	mi SSW	1.49E+00 (21 / 21) (-1.98E+01 - 2.71E+01)	6.12E-01 (21 / 21) (-2.64E+01 - 2.27E+01)	. 0
	La-140	84 15	3.75E-01 (63 / 63) (-5.57E+00 - 8.24E+00)	13E3 5	mi W	1.28E+00 (21 / 21) (-3.94E+00 - 8.24E+00)	-1.47E+00 (21 / 21) (-6.93E+00 - 2.45E+00)	0

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 11 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)	LOWER LIMIT OF DETECTION (LLD) (2)	M	ATOR LOCATIONS IEAN (3) RANGE	NAME DISTANCE A				IEAN IEAN (3) RANGE	M	OL LOCATION IEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Soil	Gamma Spec								ė.			<u></u>
(pCi/kg dry)	K-40 4		1.16E+04 (1.14E+04	(2 / 2) - 1.18E+04)	12S1 0.4	mi	wsw	1.16E+04 (1.14E+04	(2 / 2) - 1.18E+04)	9.49E+03 (9.09E+03	(2 / 2) - 9.89E+03)	0
	Mn-54 4		1.07E+01 (9.97E+00	(2 / 2) - 1.15E+01)	8G1 12	mi	SSE	3.45E+01 (2.99E+01	(2 / 2) - 3.90E+01)	3.45E+01 (2.99E+01	(2 / 2) - 3.90E+01)	0
	Co-58 4		-1.65E+01 (-3.04E+01	(2 / 2) 2.67E+00)	8G1 12	mi	SSE	1.23E+01 (1.16E+01	(2 / 2) - 1.29E+01)	1.23E+01 (1.16E+01	(2 / 2) - 1.29E+01)	0
	Fe-59 4	•	-3.75E+01 (-4.63E+01	(2· / 2) 2.87E+01)	8G1 12	mi	SSE	5.23E+01 (-3.44E+00	(2 / 2) - 1.08E+02)	5.23E+01 (-3.44E+00	(2 / 2) - 1.08E+02)	0
	Co-60 4		1.13E+01 (1.44E+00	(2 / 2) - 2.12E+01)	12S1 0.4	mi	wsw	1.13E+01 (1.44E+00	(2 / 2) - 2.12E+01)	6.01E+00 (1.61E+00	(2 / 2) - 1.04E+01)	0 .
	Zn-65 4		-5.21E+01 (-6.01E+01	(2 / 2) 4.40E+01)	8G1 12	mi	SSE	-3.03E+01 (-4.40E+01	(2 / 2) 1.66E+01)	-3.03E+01 (-4.40E+01	(2 / 2) 1.66E+01)	0
	Zr-95 4		1.96E+01 (1.54E+01	(2 / 2) - 2.37E+01)	12S1 0.4	mi	wsw	1.96E+01 (1.54E+01	(2 / 2) - 2.37E+01)	4.75E+00 (-4.80E+00	(2 / 2) - 1.43E+01)	0
	Nb-95 4		4.08E+01 (2.34E+01	(2 / 2) - 5.82E+01)	12S1 0.4	mi	wsw	4.08E+01 (2.34E+01	(2 / 2) - 5.82E+01)	1.50E+01 (-6.33E+00	(2 / 2) - 3.64E+01)	0
	Cs-134 4		-2.70E+00 (-1.67E+01	(2 / 2) - 1.13E+01)	12S1 0.4	mi	WSW	-2.70E+00 (-1.67E+01	(2 / 2) - 1.13E+01)	-1.97E+01 (-3.01E+01	(2 / 2) 9.33E+00)	0
	Cs-137 4		5.93E+01 (4.61E+01	(2 / 2) - 7.25E+01)	8G1 12	mi	SSE	1.31E+02 (1.10E+02	(2 / 2) - 1.52E+02)	1.31E+02 (1.10E+02	(2 / 2) - 1.52E+02)	0
	Ba-140 4	•	-9.30E+01 (-2.38E+02	(2 / 2) - 5.21E+01)	8G1 12	mi	SSE	1.33E+02 (1.20E+02	(2 / 2) - 1.46E+02)	1.33E+02 (1.20E+02	(2 / 2) - 1.46E+02)	0
	La-140 4		-2.37E+01 (-8.07E+01	(2 / 2) - 3.34E+01)	8G1 12	mi	SSE	2.52E+01 (-2.05E+01	(2 / 2) - 7.08E+01)	2.52E+01 (-2.05E+01	(2 / 2) - 7.08E+01)	0

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 12 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)	LOWER LIMIT OF DETECTION (LLD) (2)	M	TOR LOCATIONS EAN (3) KANGE	NAME DISTANCE A				EAN EAN (3) KANGE	M	OL LOCATION IEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Soil (cont) (pCi/kg dry)	Ra-226	1	1.15E+03 (1.13E+03	(2 / 2) - 1.17E+03)	8G1 12	mi	SSE	1.90E+03 (1.25E+03	(2 / 2) - 2.55E+03)	1.90E+03 (1.25E+03	(2 / 2) - 2.55E+03)	0
	Th-228	!	7.85E+02 (7.42E+02	(2 / 2) - 8.27E+02)	8G1 12	mi	SSE	8.66E+02 (8.59E+02	(2 / 2) - 8.72E+02)	8.66E+02 (8.59E+02	(2 / 2) - 8.72E+02)	0
Food/Garden Crops	Gamma Spec											
(pCi/kg wet)	Be-7	5	4.87E+01 (1.50E+01	(5 / 5) - 9.30E+01)	11D1 3.3	mi	sw	6.50E+01 (3.91E+01	(3 3) - 9.30E+01)			0
	K-40	5	5.40E+03 (2.35E+03	(5 / 5) - 1.50E+04)	11D1 3.3	mi	sw	7.15E+03 (2.35E+03	(3 / 3) - 1.50E+04)			0
	Mn-54	5	. 2.40E+00 (-4.95E-01	(5 / 5) - 3.42E+00)	11D1 3.3	mi	sw	3.19E+00 (2.75E+00	(3 / 3) - 3.42E+00)	•	•	0 .
	Co-58	5	1.62E+00 (-3.32E+00	(5 / 5) - 7.73E+00)	11D2 3.5	mi	sw	2.21E+00 (-3.32E+00	(2 / 2) - 7.73E+00)			0
	Fe-59	5	2.04E+00 (-2.13E+01	(5 / 5) - 2.08E+01)	11D1 3.3	mi	sw	1.28E+01 (2.20E-02	(3 / 3) - 2.08E+01)			0
	Co-60	5	4.65E+00 (-3.04E-01	(5 / 5) - 1.49E+01)	11D2 3.5	mi	sw	7.79E+00 (6.83E-01	(2 / 2) - 1.49E+01)			0
	Zn-65	5	-6.45E+00 (-4.55E+01	(5 / 5) - 1.75E+01)	× 11D2 3.5	mi	sw	-5.26E+00 (-5.51E+00	(2 / 2) 5.00E+00)	•		0
	Zr-95	5	5.23E+00 (-3.62E+00	(5 / 5) - 2.06E+01)	11D2 3.5	mi	sw	8.49E+00 (-3.62E+00	(2 / 2) - 2.06E+01)			0
	Nb-95	5	4.63E+00 (-1.26E+00	(5 / 5) - 1.21E+01)	11D2 3.5	mi	SW	4.92E+00 (3.41E-01	(2 / 2) - 9.50E+00)			0
	I-131	5	-5.87E+00 (-1.35E+01	(5 / 5) 1.07E+00)	11D1 3.3	mi	sw	-3.29E+00 (-5.59E+00	(3 / 3) 1.07E+00)	*		0

OPERATIONAL RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM - 2007 NAME OF FACILITY: SUSQUEHANNA STEAM ELECTRIC STATION

LOCATION OF FACILITY: LUZERNE COUNTY, PENNSYLVANIA

Reporting Period:

December 26, 2006 to

January 18, 2008

Page 13 of 13

MEDIUM OR PATHWAY SAMPLED (UNIT OF MEASUREMENT)	ANALYSIS AND TOTAL NUMBER OF ANALYSES PERFORMED (1)	LOWER LIMIT OF DETECTION (LLD) (2)	M	TOR LOCATIONS EAN (3) LANGE	NAME DISTANCE A				EAN EAN (3) AANGE	CONTROL LOCATION MEAN (3) RANGE	NUMBER OF NONROUTINE REPORTED MEASUREMENTS(4)
Food/Garden Crops (cont)										·	•
(pCi/kg wet)	Cs-134 5	5	-1.23E+00	(5 / 5)	11D2			4.39E+00	(2 / 2)		0
		*	(-8.19E+00	- 5.53E+00)	3.5	mi	SW	(3.24E+00	- 5.53E+00)		
	Cs-137 5	5	-2.32E+00	(5 / 5)	11D2			1.22E+00	(2 / 2)		0
			(-6.14E+00	- 6.17E+00)	3.5	mi	SW	(-3.73E+00	- 6.17E+00)		
	Ba-140 5	5	1.21E+01	(5 / 5)	11D1			2.08E+01	(3 / 3)		0
			(-3.65E+01	- 5.63E+01)	3.3	mi	SW	(-2.77E+00	- 5.63E+01)		
	La-140 5	5	-3.48E+00	(5 / 5)	11D1			-2.01E+00	(3 / 3)		0
			(-1.80E+01	- 6.55E+00)	3.3	mi	sw	(-1.80E+01	- 6.55E+00)		

^{1.} The total number of analyses does not include duplicates, splits, or repeated analyses.

^{2.} The Technical Requirement LLD's are shown when applicable.

^{3.} The mean and range are based on all available measured results. The ratio indicated in parentheses is the total number of results used to calculate the mean to the total number of samples.

^{4.} USNRC Reporting Levels are specified in the Technical Requirements (i.e.; when Reporting Levels in Technical Requirements are exceeded).

APPENDIX H

COMPARISON OF INDICATOR AND CONTROL 2007 REMP ANNUAL MEANS FOR SELECTED MEDIA ANALYSIS RESULTS WITH MEANS FROM PREOPERATIONAL AND PRIOR OPERATIONAL PERIODS The data presented in the following tables were included if specific analysis results routinely exceeded the applicable MDCs in 2007 and/or routinely may have done so in previous years. The comparisons may be useful for observing any step changes that may occur in the environment over a long period. However, the importance attached to these comparisons should be tempered by the understanding that changes in methods of analysis, typical MDCs achieved by the analyses, and averaging methods over the years may tend to blur the picture in some cases.

AMBIENT RADIATION MONITORING

TABLE H 1

AMBIENT RADIATION LEVELS AS MEASURED BY TLDS (mR/STD QTR)										
Location	Location Indicator Control									
Period	Pre-Op	Operational Pre-Op Oper				ational				
	1978-81	1982-06	2007	1978-81	1982-06	2007				
Range	18.5-19.2	14.7-23.2		15.0-17.9	14.8-21.5					
Mean	18.9	18.7	24.3	16.3	18.3	23.1				

AQUATIC PATHWAY MONITORING

TABLE H 3

SURFACE WATER IODINE-131 ACTIVITIES (pCi/l)										
Location Indicator Control										
Period	Pre-Op	Operatio	onal	Pre-Op	Operat	ional				
	1979-81	1982-06	2007	1979-81	1982-06	2007				
Range	0.24-0.37	0.06-1.00		0.29-0.43	0.03-1.0					
Mean	0.29	0.38	0.66	0.36	0.33	0.45				

TABLE H 4

SURFACE WATER TRITIUM ACTIVITIES (pCi/l)										
Location Indicator Control										
Period	Pre-Op	Operation	Operati	tional						
	1978-81	1982-06*	2007	1978-81	1982-06*	2007				
Range	101-122	126-2104		119-319	-239 - +212					
Mean	109	782	1400	171	46	8.7				

^{*1990} results were not averaged with 1982-01 data because the validity of the 1990 values is questionable in some instances. Laboratory analysis error is suspected. See the 1990 Annual Report.

TABLE H 6

DRINKING WATER GROSS BETA ACTIVITIES (pCi/l)									
Period Preoperational Operational									
	1977 - 81	1982 - 06	2007						
Range	2.2 - 3.2	1.9 - 5.4							
Mean	2.7	3.0	2.5						

TABLE H 7

DRINKING WATER TRITIUM ACTIVITIES (pCi/l)									
Period Preoperational Operational									
	1977 – 81	1982 - 06	2007						
Range	101 – 194	-247 - +220							
Mean	132	59	30.6						

TABLE H 8

FISH POTASSIUM-40 ACTIVITIES (pCi/g wet)										
Location	Indicator Control									
Period	Pre-Op	Operati	onal	Pre-Op	Opera	tional				
	1977-81	1982-06	2007	1977-81	1982-06	2007				
Range	2.7 - 3.5	3.1 - 5.3		2.8 - 3.6	3.0 - 4.2					
Mean	3.2	3.7	3.4	3.2	3.5	2.7				

TABLE H 9

19. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	SEDIMENT POTASSIUM-40 ACTIVITIES (pCi/g dry)									
Location	Indicator Control									
Period	Pre-Op	Operation	onal	Pre-Op	Opera	tional				
	1978-81	1982-06	2007	1978-81	1982-06	2007				
Range	8.6-10.4	7.4-13.6		7.5-11.0	6.2-15.7					
Mean	9.3	10.9	11.1	7.7	11.1	13.0				

TABLE H 10

	SEDIMENT	RADIUM-22	6 ACTIV	ITIES (pCi/g	dry)	
Location		Indicator			Control	
Period	Pre-Op	Operati	onal	Pre-Op	Operation	onal
	1978-81	1982-06	2007	1978-81	1982-06	2007
Range	0.5-0.7	0.5-2.4		0.6-1.9	0.4-2.9	
Mean	0.6	1.6	2.3	0.7	1.6	2.5

SE.	DIMENT THORIU	M-228 ACTIVIT	TIES (pCi/g dry)	
Location	Indic	ator	Contro	ol
Period	1984 – 06*	2007	1984 - 06*	2007
Range	0.9 - 3.2		0.8 - 3.1	
Mean	1.3	1.0	1.4	1.1

^{*}Th-232 was reported instead of Th-228 in 1990.

TABLE H 12

	SEDIMEN	T CESIUM:1	37 ACTI	VITIES (pCi/s	g dry)				
Location		Indicator			Control	ontrol			
Period	Pre-Op	Operation	onal	Pre-Op	Operational				
	1978-81	1982-06	2007	1978-81	1982-06	2007			
Range	0.08-0.15	0.02-0.17		0.08-0.21	0.06-0.21				
Mean	0.10	0.08	0.02	0.11	0.10	0.06			

ATMOSPHERIC PATHWAY MONITORING

TABLE H 13

AIRI	PARTICULA	TE GROSS	BETA A	CTIVITIES (E-3 pCi/m ³)	
Location		Indicator	•		Control	
Period	Pre-Op	Operation	onal	Pre-Op	Operati	onal
	1978-81	1982-06	2007	1978-81	1982-06	2007
Range	24 - 97	13 - 28.8		24 - 102	12 – 27.7	
Mean	61	16.0	16	62	15.2	14

AIR	PARTICULA	TE BERYLI	JUM-7 /	ACTIVITIES	(E-3 pCi/m ³)	
Location		Indicator			Control	
Period	Pre-Op	Operation	onal	Pre-Op	Operati	onal
	1978-81	1982-06*	2007	1978-81	1982-06*	2007
Range	69 - 81	50 - 137		59 - 85	49 - 126	
Mean	76	96	129	72	90	116

^{*1990} results were not averaged with 1982-01 data because the validity of the 1990 values is questionable in some instances. Laboratory analysis error is suspected. See the 1990 Annual Report.

TERRESTRIAL PATHWAY MONITORING

TABLE H 15

	SOIL P	OTASSIUM	-40 ACT	IVITIES (pCi	/g dry)	
Location		Indicator			Control	
Period	Pre-Op	Operation	onal	Pre-Op	Opera	tional
	1979&81	1984-06	2007	1979&81	1984-06	2007
Range	9.2 - 9.7	9.4-15.3		9.1-11.0	7.4-14.1	
Mean	9.5	12.0	11.6	10.1	10.3	9.5

TABLE H 16

and the state of t	SOLR	ADIUM-226	ACTIVI	TIES (pCi/g o	lry)	
Location		Indicator			Control	
Period	Pre-Op	Operatio	onal	Pre-Op Operational		onal
	1979&81	1984-06*	2007	1979&81	1984-06*	2007
Range	0.8 - 1.3	0.8 - 3.1		0.8 - 1.2	1.0 - 2.2	
Mean	1.1	1.7	1.2	1.0	1.8	1.9

^{*} Radium-226 was not detected (ND) in 2002, 2003, 2004, or 2005.

TABLE H 17

	SOILTH	IORIUM-228	ACTIV	ITIES (pCi/g	dry)		
Location		Indicator			Control		
Period	Pre-Op	Operation	onal	Pre-Op	Operati	rational	
,	1979&81	1984-06	2007	1979&81	1984-06	2007	
Range	0.9 - 1.3	0.8 - 2.0			0.7 - 2.4	·	
Mean	1.1	1.0	0.8	1.0	1.0	0.9	

	SOIL C	ESIUM-137	ACTIVI'	TIES (pCi/g o	l r y)	
Location		Indicator			Control	
Period	Pre-Op	Operation	onal	Pre-Op Operational		onal
	1979&81	1982-06	2007	1979&81	1982-06	2007
Range	0.5 - 0.7	0.02 - 0.45		0.2 - 1.2	0.07 - 1.2	
Mean	0.6	0.19	0.06	0.7	0.34	0.13

TABLE H 19

And house of the property of	MILK	POTASSIU	M-40 A(TIVITIES ()	oCi/l)	T WAS THE L
Location	Location Indicator Control					
Period	Pre-Op	Operatio	onal	Pre-Op	Opera	tional
	1978-81	1985-06	2007	1978-81	1985-06	2007
Range	1222-1500	1241-1422		1273-1500	1247-1472	
Mean	1325	1337	1300	1390	1343	1300

THE STATE OF THE S	GROUND	WATER TRI	CIUM A	CTIVITIES (рСіЛ)	rational	
Location		Indicator			Control		
Period	Pre-Op	Operatio	nal	Pre-Op	Operatio	nal	
	1980-81	1982-06	2007	1980-81	1982-06	2007	
Range	94-109	-206 - +180		117 - 119	-206 - +260		
Mean	101	53.0	67.6	118	55.7	41.9	

APPENDIX I

SPECIFIC ANALYSIS RESULTS TABULATED BY
MEDIA AND SAMPLING PERIOD

Results of analyses are generally reported in the following tables to two significant figures. Random uncertainties of counting are reported to the same decimal place as the result.

Calculated values for analysis results are reported with the random uncertainty of counting at two standard deviations (2S), determined by considering both the sample and background count rates. The uncertainty of an activity is influenced by the volume or mass of the sample, the background count rate, the count times, the method used to round off the value obtained to reflect its degree of significance, and other factors. The uncertainties of activities determined by gamma spectrometric analyses are also influenced by the relative concentrations of the radionuclides in the sample, the energies and intensities of the gammas emitted by those radionuclides, and the assumptions used in selecting the radionuclides to be quantitatively determined.

Results reported as less than (<) in these tables are below the minimum detectable concentrations (MDCs). The MDC is an estimate of the detection capabilities of the overall measurement method, taking into account not only the counting system, but also the characteristics of the sample being counted. When the MDC is used as the level to decide whether or not to enter a measured value into a table, there is a 50% chance that the value will be entered when the actual sample activity is equivalent to the MDC. There is only a five percent chance that a value representing a fluctuation in background activity will be entered as sample activity in such an instance.

Measured values for the activities of specific radionuclides, such as the man-made gamma-emitting radionuclides iodine-131 and cesium-137, only appear in the following tables for each specific medium when the levels that are measured exceed the MDC values for those measurements and those radionuclides are actually identified as present in the samples. Measured values for the analyses that are not radionuclide specific, such as gross alpha and beta analyses, also are presented in the tables for specific media only when the levels that are measured actually exceed the MDCs.

TAB. 1-1

ENVIRONMENTAL THERMOLUMINESCENT DOSIMETRY RESULTS SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results (1) are in mR/std. qtr (2) \pm 2S (3)

•	First Quarter	Second Quarter	Third Quarter	Fourth Quarter
	01/30/07 to 04/19/07	04/19/07 to 07/19/07	07/19/07 to 10/11/07	10/11/07 to 01/18/08
Location	•			
ONSITE				
1S2 +	30.1 ± 1.2	25.4 ± 2.0	31.6 ± 3.3	25.1 ± 0.9
2\$2 +	25.0 ± 1.9	20.1 ± 2.4	24.1 ± 2.2	19.9 ± 1.1
2S3 +	29.0 ± 2.8	24.0 ± 1.8	27.5 ± 1.3	24.8 ± 2.9
3S2 +	24.5 ± 1.9	17.9 ± 1.6	21.6 ± 1.1	19.0 ± 1.8
3S3 +	23.2 ± 1.2	18.3 ± 1.8	22.3 ± 1.7	19.3 ± 0.7
4S3 +	28.8 ± 2.4	23.2 ± 1.0	27.6 ± 0.9	24.0 ± 1.8
4S6 +	24.1 ± 2.4	20.1 ± 2.0	23.2 ± 1.1	19.9 ± 1.8
5S4 +	22.9 ± 1.7	16.7 ± 0.6	21.6 ± 1.7	17.8 ± 0.5
5S7 +	24.4 ± 1.4	19.2 ± 2.0	22.8 ± 1.5	20.5 ± 2.0
6S4 +	31.6 ± 1.2	26.6 ± 1.4	29.7 ± 1.7	27.0 ± 1.6
6S9 +	30.7 ± 3.3	26.5 ± 2.8	30.2 ± 1.3	27.1 ± 2.2
7S6 +	29.6 ± 2.8	25.3 ± 0.6	29.9 ± 1.5	25.7 ± 0.5
7S7 +	23.6 ± 1.4	18.5 ± 1.0	22.2 ± 1.5	18.9 ± 1.1
8S2 +	28.9 ± 2.4	25.4 ± 1.8	28.1 ± 1.5	25.8 ± 2.2
9S2 +	42.3 ± 1.4	44.5 ± 3.4	52.0 ± 5.2	44.1 ± 2.9
10S1 +	24.6 ± 2.6	18.8 ± 2.0	23.0 ± 2.8	18.5 ± 0.7
10S2 +	35.7 ± 3.1	33.0 ± 1.0	39.7 ± 2.2	36.1 ± 2.2
11S7 +	25.2 ± 1.7	20.5 ± 1.4	24.6 ± 2.8	20.5 ± 1.3
12S1 +	26.4 ± 1.2	20.6 ± 0.8	24.3 ± 1.3	21.4 ± 0.9
12S3 +	29.0 ± 3.3	24.0 ± 3.6	26.0 ± 0.9	22.6 ± 1.5
12S7 +	24.3 ± 1.7	18.9 ± 1.2	23.0 ± 1.1	19.5 ± 1.1
13S2 +	31.5 ± 2.4	27.3 ± 1.2	32.3 ± 2.0	27.4 ± 2.0
13S5 +	30.9 ± 1.7	27.2 ± 3.0	30.9 ± 2.2	27.7 ± 3.3
13S6 +	29.2 ± 1.2	23.8 ± 1.6	27.6 ± 1.5	23.5 ± 1.1
14S5 +	29.5 2.4	22.6 ± 1.6	26.1 ± 1.7	23.5 ± 0.7
15S5 +	26.9 ± 3.6	21.0 ± 1.0	25.1 ± 1.1	21.1 ± 0.7
16S1 +	30.5 ± 3.6	25.0 ± 1.8	28.7 ± 1.1	25.3 ± 2.2
16S2 +	30.2 ± 2.4	24.5 ± 0.6	29.5 ± 2.8	25.0 ± 1.6

See the comments at the end of this table.

TABLE I-1
ENVIRONMENTAL THERMOLUMINESCENT DOSIMETRY RESULTS
SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results (1) are in mR/std. qtr (2) \pm 2S (3)

	First Quarter	Second Quarter	Third Quarter	Fourth Quarter
	01/30/07 to 04/19/07	04/19/07 to 07/19/07	07/19/07 to 10/11/07	10/11/07 to 01/18/08
Location	•			
0-1 MILE OFFSITE				
6A4 +	26.9 ± 1.9	21.4 ± 1.6	27.6 ± 1.5	21.7 ± 1.6
8A3 +	23.9 ± 1.7	17.4 ± 1.0	22.3 ± 2.0	18.8 ± 1.8
15A3 +	23.7 ± 1.4	18.8 ± 1.8	22.3 ± 0.9	19.3 ± 1.5
16A2 +	23.0 ± 1.2	17.7 ± 1.0	22.4 ± 2.2	18.3 ± 0.7
1-2 MILES OFFSITE				
8B2 +	24.3 ± 2.1	18.7 ± 0.8	23.7 ± 0.9	19.4 ± 1.1
9B1 +	23.1 ± 1.9	17.5 ± 1.4	22.5 ± 1.7	18.9 ± 1.3
10B3 +	23.7 ± 1.2	18.3 ± 2.0	22.1 ± 2.0	18.8 ± 1.1
2-4 MILES OFFSITE				
1D5 +	26.2 ± 1.7	21.0 ± 1.4	26.6 ± 2.2	21.0 ± 1.7
8D3 +	24.9 ± 2.1	20.9 ± 2.2	25.4 ± 1.5	20.2 ± 0.7
9D4 +	24.5 ± 1.7	21.1 ± 1.2	25.3 ± 1.3	20.7 ± 1.1
10D1 +	24.3 ± 1.7	19.4 ± 1.2	25.4 ± 1.1	20.5 ± 1.7
12D2 +	26.2 ± 1.4	20.6 ± 0.8	26.0 ± 1.7	21.4 ± 2.0
14D1 +	25.4 ± 1.7	20.9 ± 0.6	26.2 ± 1.7	21.3 ± 1.3
4-5 MILES OFFSITE				
3E1 +	21.7 ± 0.5	17.5 ± 0.8	22.1 ± 2.0	18.3 ± 0.7
4E2 +	25.1 ± 1.9	20.8 ± 1.0	25.5 ± 1.5	21.0 ± 0.4
5E2 +	24.9 ± 1.9	20.7 ± 2.0	24.7 ± 3.5	20.4 ± 1.3
6E1 +	26.4 ± 1.4	23.2 ± 1.2	28.2 ± 2.4	21.8 ± 1.1
7E1 +	24.6 ± 1.9	19.7 ± 0.6	26.5 ± 2.4	21.0 ± 0.6
11E1 +	22.3 ± 1.7	16.8 ± 1.2	22.1 ± 0.9	17.3 ± 0.9
12E1 +	23.7 ± 2.4	18.1 ± 1.2	23.8 ± 1.7	19.0 ± 0.5
13E4 +	25.8 ± 2.4	22.3 ± 1.4	26.8 ± 3.0	22.2 ± 1.8
3-10 MILES OFFSITE				
2F1 +	24.4 ± 2.1	19.9 ± 1.2	25.0 ± 0.9	19.6 ± 1.1
· 15F1 +	24.4 ± 2.4	20.8 ± 1.0	26.4 ± 2.0	21.5 ± 1.1
16F1 +	27.5 ± 3.6	22.3 ± 1.0	26.9 ± 1.3	21.9 ± 1.3

See the comments at the end of this table.

ENVIRONMENTAL THERMOLUMINESCENT DOSIMETRY RESULTS SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results (1) are in mR/std. qtr (2) \pm 2S (3)

	First Quarter	Second Quarter	Third Quarter	Fourth Quarter
	01/30/07 to 04/19/07	04/19/07 to 07/19/07	07/19/07 to 10/11/07	10/11/07 to 01/18/08
Location				
10-20 MILES				
3G4 +	27.5 ± 1.7	20.6 ± 0.8	26.2 ± 1.7	· 22.1 ± 1.3
4G1 +	24.8 ± 0.2	21.0 ± 1.2	26.2 ± 2.0	22.4 ± 1.3
7G1 +	24.2 ± 1.4	19.7 ± 0.8	25.1 ± 2.4	19.8 ± 0.7
12G1 +	23.5 ± 0.9	17.4 ± 1.6	22.6 ± 1.7	18.6 ± 1.1
12G4 +	26.3 ± 2.4	21.4 ± 1.8	28.2 ± 1.7	23.5 ± 2.6
e the comments a	t the end of this table.			
Location				
dicator				
verage (4)	26.6 ± 16.2	21.8 ± 12.9	26.4 ± 15.1	22.2 ± 12.2
ontrol		•		
verage (4)	25.3 ± 3.4	20.0 ± 2.9	25.7 ± 4.3	21.3 ± 3.4

COMMENTS

- (1) Individual monitor location results are normally the average of the elemental doses of six calcium elements from the two TLDs assigned to each monitoring location.
- (2) A standard (std.) quarter (qtr.) is considered to be 91.25 days. Results obtained for monitoring periods of other durations are normalized by multiplying them by 91.25/x, where x is the actual duration in days of the period.
- (3) Uncertainties for individual monitoring location results are two standard deviations of the elemental doses of six calcium elements from the two TLDs assigned to each monitoring location, representing the variability between the elemental doses of each of the six TLD elements.
- (4) Uncertainties associated with quarterly indicator and control averages are two standard deviations, representing the variability between the results of the individual monitoring locations.

TABLE I-2 TRITIUM AND GAMMA SPECTROSCOPIC ANALYSES OF SURFACE WATER

SUSQUEHANNA STEAM ELECTRIC STATION - 2007 Results in pCi/liter ± 2S

LOCATION	COLLECT	ON DATE	TRITIUM	OTHER ACTIVITY	COMMENTS
6S6	12/26/06	01/23/07	<123	TH-228 11.1 ± 5.5	
2\$7	12/26/06	01/23/07	181 ± 84.1		•
6S5	01/02/07	01/23/07	<123		
6S6	01/23/07	02/27/07	<131		
2\$7	01/23/07	02/27/07	195 ± 92.5		
6S5	01/30/07	02/27/07	< 135		
4S7	02/20/07	02/20/07	172 ± 99.2	•	
LTAW	02/20/07	02/20/07	174 ± 85.3		
6S6	02/27/07	03/13/07 *	<132	TH-228 8.6 ± 5.1	*Refer to Appendix A, Table A3 for exceptions.
2S7	02/27/07	03/27/07	3400 ± 322		, , , , , , , , , , , , , , , , , , , ,
6S5	03/06/07	03/27/07	<135	•	
6S6	03/13/07	03/20/07 *	<139		*Refer to Appendix A, Table A3 for exceptions.
6S6	03/20/07	03/27/07 *	<136		*Refer to Appendix A, Table A3 for exceptions.
6S6	03/27/07	04/24/07	<97		, , , , , , , , , , , , , , , , , , , ,
2S7	03/27/07	04/03/07 *	163 ± 68.9	$K-40\ 155 \pm 26$, $TH-288\ 6.6 \pm 2.6$	*Refer to Appendix A, Table A3 for exceptions.
2S7	04/04/07	04/24/07	15300 ± 1250	TH-228 4.5 ± 2.6	,, , , , , , , , , , , , , , , , , , , ,
6S5	04/03/07	04/24/07	122 ± 62.7		
6S6	04/24/07	05/29/07	<125		
2S7	04/24/07	05/29/07	877 ± 118		
6S5	05/01/07	05/29/07	<125		·
4 S 7	05/15/07	05/15/07	<125		
LTAW	05/15/07	05/15/07	$130 \pm 73.7 \pm 5.5$	•	
6S6	05/29/07	06/26/07	<112	K-40 96.3 ± 41	
2 \$7	05/29/07	06/26/07	<116		
6S5	06/05/07	06/26/07	<113		•



TRITIUM AND GAMMA SPECTROSCOPIC ANALYSES OF SURFACE WATER

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

LOCATION	COLLECT	ION DATE	TRITIUM	OTHER ACTIVITY	COMMENTS
686	06/26/07	07/24/07	<117		
2S7	06/26/07	07/24/07	5780 ± 504		
6 S 5	07/03/07	07/24/07	<119		
6 S6	07/24/07	08/21/07	<132		
2 \$7	07/24/07	08/21/07	2130 ± 208		•
6S5	07/31/07	08/21/07	447 ± 97.8		
6S6	08/21/07	09/24/07	<123		
2S7	08/21/07	09/24/07	686 ± 121	TH-228 9.4 ± 3.1	
6S5	08/28/07	09/24/07	<126	K-40 46.1 ± 31, TH-228 8.3 ± 3.4	
4S7	09/18/07	09/18/07	243 ± 85.9	•	
LTAW	09/18/07	09/18/07	<131		
6S6	09/24/07	10/30/07	<123		
2S7	09/24/07	10/30/07	9000 ± 771	TH-228 6.8 ± 2.7	'
6S5	10/02/07	10/30/07	<126	TH-228 6.6 ± 3.0	
4S 7	10/16/07	10/16/07	226 ± 85.5		
LTAW	10/16/07	10/16/07	<127		
6S6	10/30/07	11/27/07	<129		
287	10/30/07	11/27/07	8220 ± 710		
6S5	11/06/07	11/27/07	<130		
6S6	11/27/07	12/24/07	<122		
2S7	11/27/07	12/24/07	2030 ± 214		•
6S5	12/04/07	12/24/07	<120	TH-228 3.9 ± 2.5	

TABLE I-3 IODINE-131 ANALYSES OF SURFACE WATER

SUSQUEHANNA STEAM ELECTRIC STATION - 2007 Results in pCi/liter ± 2S

COLLECTION DATE	I-131	COMMENTS
04/00/07 04/40/07	2.50	
01/02/07 - 01/16/07	<0.73	
02/13/07 - 02/20/07	0.77 ± 0.37	
03/06/07 - 03/20/07	<0.65	
03/06/07 - 03/20/07	<0.17	
03/06/07 - 03/20/07	<0.40	
04/03/07 - 04/17/07	<0.77	
04/03/07 - 04/17/07	<0.59	•
04/10/07 - 04/17/07	<0.51	
05/01/07 - 05/15/07	<0.69	
05/01/07 - 05/15/07		
05/08/07 - 05/15/07	<0.48	
06/05/07 - 06/19/07	<0.83	
06/05/07 - 06/19/07	<0.88	
06/12/07 - 06/19/07	<0.57	
07/03/07 - 07/17/07	<0.56	
		•
	01/02/07 - 01/16/07 01/02/07 - 01/16/07 01/02/07 - 01/16/07 01/02/07 - 01/16/07 02/06/07 - 02/20/07 02/06/07 - 02/20/07 02/13/07 - 02/20/07 03/06/07 - 03/20/07 03/06/07 - 03/20/07 03/06/07 - 03/20/07 04/03/07 - 04/17/07 04/03/07 - 04/17/07 04/10/07 - 04/17/07 05/01/07 - 05/15/07 05/01/07 - 05/15/07 05/08/07 - 06/19/07	01/02/07 - 01/16/07



IODINE-131 ANALYSES OF SURFACE WATER

SUSQUEHANNA STEAM ELECTRIC STATION - 2007 Results in pCi/liter ± 2S

LOCATION	COLLECTION DATE	I-131	COMMENTS
6S6	08/07/07 - 08/21/07	0.97 ± 0.47	•
2S7	08/07/07 - 08/21/07	1.46 ± 0.59	
6S5	08/14/07 - 08/21/07	1.49 ± 0.42	
000	00/14/07 - 00/21/07	1.43 ± 0.42	
6S6	09/04/07 - 09/18/07	1.44 ± 0.50	
2S7	09/04/07 - 09/18/07	1.24 ± 0.48	
6S5	09/11/07 - 09/18/07	0.64 ± 0.31	
6S6	10/08/07 - 10/23/07	0.85 ± 0.51	
2S7	10/08/07 - 10/23/07	1.41 ± 0.51	
6S5	10/16/07 - 10/23/07	<0.73	
6S6	11/06/07 - 11/20/07	<0.62	
2S7	11/06/07 - 11/20/07	1.15 ± 0.49	
6S5	11/13/07 - 11/20/07	<0.48	
•			
6S6	12/04/07 - 12/18/07	<0.74	
2S7	12/04/07 - 12/18/07	<0.73	
6S5	12/11/07 - 12/18/07	<0.54	

TABLE I-4 GROSS BETA, TRITIUM, GAMMA SPECTROSCOPIC ANALYSES OF DRINKING WATER SUSQUEHANNA STEAM ELECTRIC STATION - 2007

LOCATION	COLLECTION DATE	GR-BETA	TRITIUM	OTHER ACTIVITY	COMMENTS	-
12H2	12/26/2006 - 1/23/07	2.22 ± 1.27	<150			
12H2	01/23/07 - 02/27/07	2.90 ± 1.46	<131			
12H2	02/27/07 - 03/27/07	<1.94	<136			
12H2	03/27/07 - 04/24/07	<1.94	<96		•	
12H2	04/24/07 - 05/29/07	2.58 ± 1.32	<123			
12H2	05/29/07 - 06/26/07	2.44 ± 1.58	<110			
12H2	06/26/07 - 07/24/07	3.26 ± 1.52	<115			
12H2	07/24/07 - 08/21/07	5.29 ± 1.63	<103			
12H2	08/21/07 - 09/24/07	<2.47	<120			-
12H2	09/24/07 - 10/30/07	3.42 ± 1.60	<122			
12H2	10/30/07 - 11/27/07	<2.23	<121			
12H2	11/27/07 - 12/24/07	<2.02	<119			



GAMMA SPECTROSCOPIC ANALYSES OF FISH

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results in pCi/kg (wet) \pm 2S

LOCATION	SAMPLE TYPE	COLLECTION DATE	K-40	COMMENTS
IND	Smallmouth Bass	04/27/07 - 04/27/07	3290 ± 632	
IND	Shorthead Redhorse	04/27/07 - 04/27/07	3080 ± 532	
IND	Channel Catfish	04/27/07 - 04/27/07	3400 ± 593	
2H	Smallmouth Bass	05/08/07 - 05/08/07	767 ± 386	
2H	Shorthead Redhorse	05/07/07 - 05/07/07	3060 ± 907	
2H	Channel Catfish	05/08/07 - 05/08/07	3640 ± 546	
IND	Smallmouth Bass	10/25/07 - 10/25/07	4100 ± 686	•
IND	Shorthead Redhorse	10/25/07 - 10/25/07	3480 ± 842	
IND	Channel Catfish	10/25/07 - 10/25/07	3160 ± 1110	•
2H	Smallmouth Bass	10/31/07 - 10/31/07	2760 ± 971	
2H	Shorthead Redhorse	10/31/07 - 10/31/07	2780 ± 947	
2H	Channel Catfish	10/31/07 - 10/31/07	3270 ± 802	
LTAW	Largemouth Bass	10/26/07 - 10/26/07	3480 ± 1350	

TABLE 1-6 GAMMA SPECTROSCOPIC ANALYSES OF SHORELINE SEDIMENT

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results in pCi/kg (dry) $\pm 2S$

LOCATION	COLLECTION DATE	K-40	Cs-137	Ra-226	Th-228	OTHER ACTIVITY
2B	5/2/2007	14,600 ± 1450	125 ± 73.4	2980 ± 1540	1240 ± 105	Ac-228 1240 ± 327
7B	5/2/2007	14,000 ± 1360	<68.9	2250 ± 1380	1200 ± 99.9	Ac-228 1360 ± 257
12F	5/2/2007	$9,960 \pm 995$	<53.7	1900 ± 984	727 ± 72.0	Ac-228 656 ± 186
2B	11/1/2007	11,400 ± 1750	<102	<1920	911 ± 146	Ac-228 1180 ± 344
7B	11/1/2007	11,300 ± 1840	<86.2	<1600	1180 ± 164	Ac-228 993 ± 342
12F	11/1/2007	9,320 ± 1680	<72.4	<1610	875 ± 142	Ac-228 1010 ± 291



TRITIUM AND GAMMA SPECTROSCOPIC ANALYSES OF GROUND WATER

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

LOCATION	COLLECTION DATE	TRITIUM	OTHER ACTIVITY
12F3	3/12/2007	<130	
2S2	3/12/2007	<133	
4S4 Treated	3/12/2007	<131	
6S10	3/12/2007	<139	
11S2	3/13/2007	<134	•
12F3	6/18/2007	<101	K-40 51.5 ± 23.7
2S2	6/18/2007	<99.7	
4S4 Treated	6/18/2007	140 ± 66.7	
6S10	6/18/2007	<100	
11S2	6/18/2007	143 ± 69.2	
12F3	8/13/2007	<103	Th-228 20.4 ± 10.8
2S2	8/13/2007	<105	
4S4 Treated	8/13/2007	146 ± 70.3	
6S10	8/13/2007	<104	
11S2	8/13/2007	<106	
12F3	11/5/2007	<125	
2S2	11/5/2007	<128	
4S4 Treated	11/5/2007	<125	
6S10	11/5/2007	<127	
11S2	11/5/2007	<130	

TABLE I-8 GROSS BETA ANALYSES OF AIR PARTICULATE FILTERS

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results in E-03 pCi/Cu. M. ± 2S

-	COLLECTION							
MOI	NTH DATE	6G1	8G1	3S2	12E1	12S1	13S6	COMMENTS
JAN	12/27/06 - 1/3/07	13.7 ± 2.37	12.7 ± 2.16	16.1 ± 2.47	14.2 ± 2.24	17.9 ± 2.64	16.6 ± 2.40	
	1/3/07 - 1/10/07	10.0 ± 2.20	9.3 ± 1.96	13.7 ± 2.35	10.6 ± 2.04	12.2 ± 2.12	9.8 ± 2.01	
	1/10/07 - 1/17/07	6.5 ± 1.83	10.3 ± 2.08	11.7 ± 2.29	11.9 ± 2.18	10.2 ± 2.06	12.3 ± 2.23	
	1/17/07 - 1/24/07	14.1 ± 2.20	9.4 ± 1.98	16.6 ± 2.50	13.8 ± 2.36	13.8 ± 2.21	13.7 ± 2.24	
	1/24/07 - 1/31/07	14.2 ± 2.18	13.2 ± 2.21	15.4 ± 2.45	19.2 ± 2.64	15.2 ± 2.44	12.7 ± 2.15	
FEB	1/31/07 - 2/7/07	17.4 ± 2.38	16.2 ± 2.38	20.8 ± 2.75	17.4 ± 2.60	19.8 ± 2.72	19.1 ± 2.53	
	2/7/07 - 2/13/07	15.1 ± 2.67	15.7 ± 2.70	17.8 ± 2.73	15.4 ± 2.63	16.8 ± 2.70	14.0 ± 2.53	
	2/13/07 - 2/21/07	12.9 ± 2.18	13.9 ± 2.19	14.7 ± 2.17	13.2 ± 2.11	15.2 ± 2.23	17.2 ± 2.37	
	2/21/07 - 2/28/07	8.9 ± 1.91	6.7 ± 1.72	11.5 ± 2.14	8.91 ± 1.99	10.7 ± 2.12	11.0 ± 2.06	
MAR	2/28/07 - 3/8/07	10.4 ± 1.81	10.7 ± 1.85	11.5 ± 1.93	11.2 ± 1.93	13.8 ± 2.12	14.1 ± 2.09	
	3/8/07 - 3/14/07	16.2 ± 2.68	13.6 ± 2.52	15.5 ± 2.70	15.6 ± 2.72	17.8 ± 2.88	19.1 ± 2.88	
	3/14/07 - 3/21/07	11.0 ± 2.18	9.3 ± 2.07	13.6 ± 2.41	11.4 ± 2.32	12.7 ± 2.38	13.4 ± 2.39	
	3/21/07 - 3/28/07	13.2 ± 2.14	13.6 ± 2.17	22.2 ± 2.68	19.9 ± 2.59	19.5 ± 2.55	20.4 ± 2.58	
	3/28/07 - 4/4/07	12.1 ± 2.10	11.9 ± 2.07	14.0 ± 2.36	11.6 ± 2.14	13.0 ± 2.21	13.4 ± 2.23	`
APR	4/4/07 - 4/11/07	6.2 ± 1.73	5.5 ± 1.68	6.51 ± 1.81	6.15 ± 1.83	5.57 ± 1.81	6.17 ± 1.82	
	4/11/07 - 4/18/07	6.0 ± 1.68	6.1 ± 1.67	7.24 ± 1.83	5.3 ± 1.72	6.57 ± 1.84	6.36 ± 1.78	
	4/18/07 - 4/25/07	8.3 ± 2.08	10.7 ± 2.24	9.91 ± 2.27	9.29 ± 2.30	12.9 ± 2.48	11.2 ± 2.34	•
	4/25/07 - 5/2/07	7.8 ± 1.81	8.4 ± 1.83	9.39 ± 1.90	8.85 ± 1.90	10.0 ± 2.09	9.91 ± 1.90	
MAY	5/2/07 - 5/9/07	8.5 ± 1.90	10.3 ± 2.00	10.6 ± 2.11	8.93 ± 1.97	10.1 _{,±} 2.12	9.75 ± 2.00	
	5/9/07 - 5/16/07	12.7 ± 2.18	12.8 ± 2.15	13.1 ± 2.26	15.6 ± 2.40	15.9 ± 2.38	14.4 ± 2.34	<i>,</i>
	5/16/07 - 5/23/07	9.1 ± 1.97	11.3 ± 2.08	11.6 ± 2.25	11.9 ± 2.23	10.6 ± 2.10	10.7 ± 2.16	
	5/23/07 - 5/30/07	18.8 ± 2.52	16.9 ± 2.40	22.5 ± 2.79	21.3 ± 2.73	23.0 ± 2.80	22.7 ± 2.80	
JUN	5/30/07 - 6/6/07	14.1 ± 2.40	16.2 ± 2.46	17.2 ± 2.69	14.4 ± 2.57	14.7 ± 2.49	17.7 ± 2.66	
	6/6/07 - 6/13/07	12.3 ± 2.22	10.7 ± 2.12	11.2 ± 2.28	11.6 ± 2.29	12.9 ± 2.33	11.7 ± 2.31	
	6/13/07 - 6/20/07	15.9 ± 2.64	12.9 ± 2.38	22.1 ± 3.02	21.4 ± 3.04	27.1 ± 3.16	29.6 ± 3.32	
	6/20/07 - 6/27/07	13.7 ± 2.24	14.0 ± 2.22	12.0 ± 4.41	14.6 ± 2.41	14.7 ± 2.35	16.9 ± 2.49	



GROSS BETA ANALYSES OF AIR PARTICULATE FILTERS

SUSQUEHANNA STEAM ELECTRIC STATION - 2007 Results in E-03 pCi/Cu. M. ± 2S

	COLLECTION							
MON	NTH DATE	6G1	8G1	3S2	12E1	12S1	13S6	COMMENTS
JUL	6/27/07 - 7/5/07	9.7 ± 1.83	10.7 ± 1.93	12.3 ± 1.91	11.1 ± 1.94	9.55 ± 1.68	12.1 ± 2.08	
	7/5/07 - 7/11/07	21.4 ± 2.86	20.3 ± 2.84	24.2 ± 2.90	21.0 ± 2.83	24.3 ± 3.11	23.7 ± 3.11	
	7/11/07 - 7/18/07	15.5 ± 2.38	15.9 ± 2.44	13.7 ± 2.23	15.0 ± 2.39	14.0 ± 2.41	14.8 ± 2.47	
	7/18/07 - 7/25/07	11.3 ± 2.14	12.4 ± 2.20	13.4 ± 2.34	11.7 ± 2.18	14.5 ± 2.39	14.7 ± 2.44	· ·
	7/25/07 - 8/1/07	17.6 ± 2.46	15.0 2.31	18.1 ± 2.53	16.7 ± 2.44	17.7 ± 2.53	17.1 ± 2.50	
AUG	8/1/07 - 8/8/07	25.1 ± 2.86	22.5 ± 2.72	27.5 ± 3.02	21.7 ± 2.68	25.8 ± 2.95	25.6 ± 2.99	
	8/8/07 - 8/15/07	13.0 ± 2.21	12.9 ± 2.19	14.2 ± 2.35	14.1 ± 2.29	19.3 ± 2.64	14.5 ± 2.17	
	8/15/07 - 8/22/07	10.6 ± 2.09	9.7 ± 2.00	12.8 ± 2.25	10.2 ± 2.07	13.2 ± 2.35	13.7 ± 2.31	
	8/22/07 - 8/29/07	16.5 ± 2.39	13.1 ± 2.20	25.2 ± 2.88	27.9 ± 2.92	25.9 ± 2.92	28.8 ± 3.01	
	8/29/07 - 9/5/07	20.7 ± 2.61	18.6 ± 2.47	21.1 ± 2.69	18.4 ± 2.48	19.0 ± 2.60	19.2 ± 2.59	
SEP	9/5/07 - 9/12/07	19.1 ± 2.63	17.8 ± 2.58	32.1 ± 6.87	21.6 ± 2.75	24.1 ± 3.01	22.4 ± 2.93	
	9/12/07 - 9/19/07	7.9 ± 1.98	7.8 ± 2.12	11.1 ± 2.22	11.9 ± 2.21	9.4 ± 2.20	10.9 ± 2.33	
	9/19/07 - 9/26/07	17.0 ± 2.63	18.6 ± 2.95	21.6 ± 2.89	22.3 ± 3.10	22.1 ± 3.00	21.5 ± 3.05	
	9/26/07 - 10/3/07	15.2 ± 2.42	19.2 ± 2.63	19.1 ± 2.61	17.3 ± 2.70	18.7 ± 2.67	16.6 ± 2.61	ŕ
OCT	10/3/07 - 10/10/07	16.3 ± 2.33	14.7 ± 2.29	18.9 ± 2.55	15.9 ± 2.55	21.1 ± 2.76	22.7 ± 2.85	•
	10/10/07 - 10/17/07	12.6 ± 2.12	14.8 ± 2.24	14.1 ± 2.25	12.1 ± 2.20	15.9 ± 2.41	17.1 ± 2.49	
	10/17/07 - 10/24/07	23.8 ± 2.79	23.0 ± 2.84	24.2 ± 2.89	21.2 ± 2.81	24.7 ± 3.03	25.8 ± 3.06	
	10/24/07 - 10/31/07	11.5 ± 2.18	11.3 ± 2.17	11.6 ± 2.17	11.2 ± 2.19	12.8 ± 2.31	14.3 ± 2.41	
NOV	10/31/07 - 11/7/07	16.4 ± 2.36	17.0 ± 2.42	16.6 ± 2.40	18.7 ± 2.58	17.9 ± 2.54	19.7 ± 2.68	
	11/7/07 - 11/14/07	18.5 ± 2.44	18.2 ± 2.42	15.4 ± 2.32	15.3 ± 2.36	17.1 ± 2.45	18.9 ± 2.62	
	11/14/07 - 11/21/07	11.5 ± 1.98	9.4 ± 1.81	10.5 ± 1.90	10.1 ± 1.97	13.4 ± 2.14	12.4 ± 2.13	
	11/21/07 - 11/28/07	15.0 ± 2.33	13.7 ± 2.26	17.1 ± 2.49	17.0 ± 2.55	21.1 ± 2.80	17.9 ± 2.64	•
DEC	11/28/07 - 12/5/07	12.7 ± 2.16	12.3 ± 2.12	14.3 ± 2.27	14.3 ± 2.34	15.0 ± 2.38	16.3 ± 2.49	
	12/5/07 - 12/12/07	15.6 ± 2.47	15.3 ± 2.40	22.0 ± 2.68	15.1 ± 2.32	21.9 ± 2.74	17.8 ± 2.52	
	12/12/07 - 12/19/07	14.3 ± 2.27	18.0 ± 2.38	16.6 ± 2.26	16.6 ± 2.30	16.3 ± 2.28	16.7 ± 2.31	
	12/19/07 -12/26/07	18.2 ± 2.64	19.6 ± 2.66	22.3 ± 2.72	19.8 ± 2.61	24.4 ± 2.85	20.4 ± 2.64	

TABLE I-9 GAMMA SPECTROSCOPIC ANALYSES OF COMPOSITED AIR PARTICULATE FILTERS

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results in E-03 pCi/Cu. M. ± 2S

LOCATION	COLLECTION DATE	Be-7	OTHER ACTIVITY
6G1	12/27/06 - 3/28/07	98.7 ± 24.5	
8G1	12/27/06 - 3/28/07	98.9 ± 24.2	
3S2	12/27/06 - 3/28/07	118 ± 20.6	
12E1	12/27/06 - 3/28/07	96.6 ± 18.2	
12S1	12/27/06 - 3/28/07	117 ± 23.7	
13S6	12/27/06 - 3/28/07	103 ± 23.1	
6G1	3/28/07 - 6/27/07	120 ± 35.3	
8G1	3/28/07 - 6/27/07	115 ± 34.8	
3S2	3/28/07 - 6/27/07	153 ± 34.7	
12E1	3/28/07 - 6/27/07	125 ± 33.8	
12S1	3/28/07 - 6/27/07	132 ± 36.1	
13S6	3/28/07 - 6/27/07	126 ± 39.0	
6G1	6/27/07 - 9/26/07	106 ± 25.6	
8G1	6/27/07 - 9/26/07	137 ± 30.6	
3S2	6/27/07 - 9/26/07	209 ± 37.6	
12E1	6/27/07 - 9/26/07	142 ± 31.4	
12S1	6/27/07 - 9/26/07	129 ± 25.6	·
13S6	6/27/07 - 9/26/07	119 ± 23.6	
6G1	9/26/07 - 12/26/07	131 ± 32.1	
8G1	9/26/07 - 12/26/07	120 ± 34.1	
3S2	9/26/07 - 12/26/07	127 ± 23.3	
12E1	9/26/07 - 12/26/07	137 ± 26.1	
12S1	9/26/07 - 12/26/07	95.5 ± 23.3	
13S6	9/26/07 - 12/26/07	128 ± 26.4	



IODINE-131, AND GAMMA SPECTROSCOPIC ANALYSES OF MILK

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

LOCATION	COLLECTION DATE	K-40	OTHER ACTIVITY	COMMENTS
10G1	01/08/07	1220 ± 127		
10D1	01/08/07	2060 ± 217	Th-228 13.9 ± 8.85	
10D2	01/08/07	1120 ± 132		
13E3	01/08/07	1420 ± 157		
10G1	02/05/07	1130 ± 186		
10D1	02/05/07	1300 ± 157		
10D2	02/05/07	1200 ± 187		
13E3	02/05/07	1390 ± 175		
10G1	03/05/07	1080 ± 159	: 7. :	
10D1	03/05/07	1440 ± 163		•
10D2	03/05/07	1190 ± 177		
13E3	03/05/07	1180 ± 140		
10G1	04/02/07	1270 ± 97.7		
10D1	04/02/07	1200 ± 121		
10D2	04/02/07	1180 ± 107		
13E3	04/03/07	1280 ± 130		
10G1	04/16/07	1410 ± 170		
10D1	04/16/07	1210 ± 128		
10D2	04/16/07	1080 ± 161		
13E3	04/16/07	1410 ± 151		
10G1	04/30/07	1260 ± 175		
10D1	04/30/07	1240 ± 152		
10D2	04/30/07	1070 ± 158	Th-228 16.0 ± 9.80	
13E3	04/30/07	1350 ± 198		•

TABLE I-10 IODINE-131, AND GAMMA SPECTROSCOPIC ANALYSES OF MILK

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

LOCATION	COLLECTION DATE	K-40	OTHER ACTIVITY	COMMENTS
10G1	05/14/07	1380 ± 165		
10D2	05/14/07	1260 ± 158		
10D3*	05/15/07	1330 ± 145		*Refer to Appendix A, Table A2 for exceptions.
13E3	05/14/07	1390 ± 169		· ·
10G1	05/28/07	1390 ± 121		
10D2	05/28/07	1240 ± 135		
10D3	05/28/07	1420 ± 141		
13E3	05/28/07	1330 ± 167		•
10G1	06/11/07	1310 ± 59.4		
10D2	06/11/07	1230 ± 55.1		
10D3	06/11/07	1300 ± 52.0		
13E3	06/11/07	1440 ± 53.2		
10G1	06/25/07	1210 ± 130		
10D2	06/25/07	1240 ± 108	Th-228 15.4 ± 7.40	
10D3	06/25/07	1290 ± 123		
13E3	06/25/07	1350 ± 122	Th-228 11.1 ± 6.12	
10G1	07/09/07	1240 ± 190		
10D2	07/09/07	1220 ± 123		
10D3	07/09/07	1360 ± 147		
13E3	07/09/07	1380 ± 146		



IODINE-131, AND GAMMA SPECTROSCOPIC ANALYSES OF MILK

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

OCATIO <u>N</u>	COLLECTION DATE	K-40	OTHER ACTIVITY	COMMENTS
10G1	07/23/07	1370 ± 163		
10D2	07/23/07	1130 ± 162		
10D3	07/23/07	1270 ± 144		
13E3	07/23/07	1400 ± 157		
10G1	08/06/07	1200 ± 132	+ 50,	
10D2	08/06/07	1330 ± 147		
10D3	08/06/07	1290 ± 145		
13E3	08/06/07	1310 ± 147		
10G1	08/20/07	1430 ± 173	Th-228 14.3 ± 8.65	
10D2	08/20/07	1210 ± 153		
10D3	08/20/07	1270 ± 187		
13E3	08/20/07	1320 ± 197	•	
10G1	09/04/07	1430 ± 191		
10D2	09/04/07	1380 ± 139		
10D3	09/04/07	1250 ± 163		
13E3	09/04/07	1250 ± 138		
10G1	09/17/07	1280 ± 149		
10D2	09/17/07	1220 ± 114		•
10D3	09/17/07	1420 ± 138		
13E3	09/17/07	1400 ± 168		•

TABLE I-10 IODINE-131, AND GAMMA SPECTROSCOPIC ANALYSES OF MILK

SUSQUEHANNA STEAM ELECTRIC STATION - $2007\,$

Results in	pCi/liter ±	2S
------------	-------------	----

OCATION	COLLECTION DATE	K-40	OTHER ACTIVITY	COMMENTS
LOCATION	COLLECTION DATE	11-40	OTHER ACTIVITY	COMMENTS
10G1	10/01/07	1270 ± 151		
10D2	10/01/07	1200 ± 132		
10D3	10/01/07	1220 ± 149		
13E3	10/01/07	1420 ± 167		
10G1	10/15/07	1430 ± 196		
10D2	10/15/07	1170 ± 221		
10D3	10/15/07	1650 ± 135		
13E3	10/15/07	1290 ± 171		
10G1	10/29/07	1390 ± 138		
10D2	10/29/07	1240 ± 51.2		
10D3	10/29/07	1300 ± 152		
13E3	10/29/07	1550 ± 50.6	Th-228 5.75 ± 3.17	
10G1	11/12/07	1320 ± 152		•
10D2	11/12/07	1170 ± 117		
10D3	11/12/07	1160 ± 149	•	
13E3	11/12/07	1370 ± 124		
10G1	12/10/07	1370 ± 151		
10D2	12/10/07	1130 ± 162		
10D3	12/10/07	1220 ± 136		
13E3	12/10/07	1350 ± 132		



GAMMA SPECTROSCOPIC ANALYSES OF SOIL

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results in pCi/kg (dry) ± 2S

					1
LOCATION	COLLECTION DATE	K-40	Cs-137	Th-228	OTHER ACTIVITY
8G1 TOP	10/3/2007	9,890 ± 1100	152 ± 58.2	872 ± 86.5	Ac-228 757 ± 238 Ra-226 2550 ± 882
8G1 BOT	10/3/2007	9090 ± 954	110 ± 55.1	859 ± 83.4	Ac-228 690 ± 181
12S1 TOP	10/3/2007	11,800 ± 1480	<85.4	827 ± 133	Ac-228 953 ± 356
12S1 BOT	10/3/2007	11,400 ± 1210	<62.1	742 ± 90.3	Ac-228 983 ± 190

TABLE I-12 GAMMA SPECTROSCOPIC ANALYSES OF FOOD PRODUCTS (FRUITS AND VEGETABLES)

SUSQUEHANNA STEAM ELECTRIC STATION - 2007

Results in pCi/kg (wet) $\pm 2S$

-	LOCATION	SAMPLE TYPE	COLLECTION DATE	K-40	OTHER ACTIVITY	
	11D2	Green Beans	08/15/07	2360 ± 451	Th-228 75.2 ± 40.4	
	11D1	Pumpkin	09/19/07	2350 ± 342		
	11D2	Potato	9/20/2007	3170 ± 363	Th-228 37.9 ± 23.8	
	11D1	Rye	11/13/2007	4110 ± 357		
	11D1	Soy Beans	11/14/2007	15000 ± 526		



TYPICAL MINIMUM DETECTABLE CONCENTRATIONS OF NUCLIDES SEARCHED FOR BUT NOT FOUND BY GAMMA SPECTROMETRY IN THE VICINITY OF SUSQUEHANNA STEAM ELECTRIC STATION, 2007

	Fish	Sediment	Surface Water	Ground Water	Potable Water	
Nuclide	(pCi/kg wet)	(pCi/kg dry)	(pCi/l)	(pCi/l)	(pCi/l)	
Mn-54	52.0	65.9	4.0	3.9	3.4	
Co-58	55.0	72.6	4.4	4.1	3.8	
Fe-59	167.0	193.0	12.3	11.5	10.5	
Co-60	47.8	68.9	4.1	4.0	3.4	
Zn-65	102.0	155.0	8.6	8.3	7.5	
Zr-95	105.0	138.0	7.7	7.4	6.8	
Nb-95	67.0	92.1	4.6	4.4	3.9	
Ru-103	N/A	N/A	N/A	N/A	N/A	
I-131	541.0	330.0	15.9	11.3	18.9	
Cs-134	50.0	65.2	3.8	3.7	3.1	
Cs-137	53.0	75.6	4.2	4.2	3.5	
Ba-140	786.0	542.0	31.3	25.3	33.7	
La-140	247.0	182.0	10.2	8.0	11.3	
Ce-141	N/A	N/A	N/A	N/A	N/A	

	Air Particulate	Milk	Fruit/Veg.	Soil	Air Iodine	
Nuclide	(E-3 pCi/m3)	(pCi/l)	(pCi/kg wet)	(pCi/kg dry)	(E-3 pCi/m3)	
Vin-54	1.5	6.0	18.3	57.7		
Co-58	2.7	6.1	20.1	59.6		
Fe-59	11.0	18.1	54.9	174.0		
Co-60	1.3	6.5	21.7	52.6		
Zn-65	3.7	14.6	44.8	118.0		
Zr-95	4.9	10.9	34.8	92.0		
Nb-95	2.9	6.4	21.5	59.4		
Ru-103	N/A	N/A	N/A	· N/A		
-131	1.5	0.6	40.9	208.0	13.5	
Cs-134	1.6	5.4	17.8	54.0		
Cs-137	1.3	6.4	19.4	70.0		
3a-140	373.0	30.9	105.0	398.0		
₋a-140	136.0	8.8	30.9	118.0		
Ce-141	N/A	N/A	N/A	N/A		

APPENDIX J

PERFORMANCE SUMMARY FOR THE RADIOANALYSES OF SPIKED ENVIRONMENTAL SAMPLE MEDIA = 2007.

TELEDYNE BROWN ENGINEERING

The data in the tables that follow show how well Teledyne Brown Engineering Environmental Services (TBE) performed in the analysis of radioactively spiked media. Tables J-1 through J-4 provide the performance results for TBE. In addition to the Analytics' spikes analyzed as part of PPL's REMP Laboratory Spike Program (Table J-3), TBE analyzed spikes procured independently from Analytics as part of their respective Quality Control Spike Programs (Table J-2), as well as spikes prepared as part of the following programs:

- 1. The Proficiency Testing Program of Environmental Resource Associates (Table J-1)
- 2. The Mixed Analyte Performance Evaluation Program (MAPEP) of the DOE (Table J-4)

It should be noted that program #1 above only provides spiked water for analyses. No other media are included in the spikes provided by this program. The following characteristics are important for the spiked environmental media:

- 1. When practical, the level of activity in, at least, some of the spiked environmental media should be within the range between required analysis sensitivities for the SSES REMP and the Reporting Levels, if applicable, of the NRC.
- 2. The spikes should be preserved in a manner as similar as possible to the way that actual samples of those media are prepared.
- 3. The variety of radionuclides with which environmental media are spiked should be as extensive as practical, including as many of the activation and fission products that could be detected in the vicinity of the SSES as reasonable.

The spiked environmental media prepared by Analytics according to the requirements of PPL's REMP Laboratory Spike Program are intended to incorporate characteristics #1, #2, and #3 to the greatest degree that is practical.

The criteria for the acceptability of the analyses results for the spikes prepared as part of the PPL REMP Laboratory Spike Program (Table J-3) has been established by PPL. They are based on criteria that were originally developed by the NRC. The NRC bases these criteria on an empirical relationship that combines prior experience and accuracy needs. As the resolution of the measurement process improves (relative measurement uncertainty becomes smaller), the criteria for determining acceptability become tighter. Conversely, as the resolution of the process becomes poorer (relative measurement uncertainty becomes bigger), the criteria are widened.

The criteria for acceptability of DOE (MAPEP) program – Table J-4 is based on control limits based on percentiles of historic data distributions.

Note that comment numbers at the extreme right side of the tables denote unacceptable results in Tables J-1 through J-4. Discussions relevant to these comment numbers follow the presentations of the data, as applicable.

TABLE J-1
ENVIRONMENTAL RESOURCE ASSOCIATES (ERA)
PROFICIENCY TESTING PROGRAM - 2007
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (TBE)
(Page 1 of 2)

Month/Year	<u> </u>	Identificatio No.	n Medium	Units	Nuclide	ERA Known Result (b)	TBE Results (a)	TBE/ERA Ratio	ERA Control Limits	Evaluation (c)
July 2007	٠.	Rad 70	Water	pCi/l	Sr-89	58.2	58.6	1.01	49.5 - 66.9	A
•				pCi/l	Sr-90	19.0	18.7	0.98	10.3 - 27.7	Α
				pCi/l	Ba-133	19.4	18.6	0.96	10.7 - 28.1	Α
•				pCil	Cs-134	68.9	→ 57.6	0.84	60.2 - 77.6	N (1)
				pCi/l	Cs-137	61.3	55.4	0.90	52.6 - 70.0	Α
	•			pCi/l	Co-60	33.5	31.3	0.93	24.8 - 42.2	Α .
*			•	pCi/l	Zn-65	54.6	49.0	0.90	45.2 - 64.0	Α.
•	•		*	pCi/l	Gr-A	27.1	26.8	0.99	15.4 - 38.8	Α
•				pCi/l	Gr-B	11.5	12	1.04	2.84 - 20.2	Α
			•	pCi/l	I-131	26.5	31.1	1.17	21.3 - 31.7	Α
		•		pCi/l	U-Nat	25.1	23.5	0.94	19.9 - 30.3	. A
				pCi/l	H-3	1770	1700	0.96	1180 - 2360	Α .
*.	•		•		•					
October 2007		RAD 71	Water	pCi/l	Sr-89	27.4	27.07	0.99	19.3 - 33.9	Α
	•			pCi/l	Sr-90	18.2	17.40	0.96	12.9 - 21.6	Α
				pCi/l	Ba-133	12.6	12.57	1.00	8.64 - 15.5	Α
				pCi/l	Cs-134	71.1	63.33	0.89	58.0 - 78.2	Α.
				pCi/l	Cs-137	180	168	0.93	162 - 200	· A
			•	pCi/l	Co-60	23.2	21.93	0.95	19.9 - 28.3	Α
•	٠.			pCi/l	Zn-65	· 251	245.33	0.98	226 - 294	Α .
				pCi/l	Gr-A	58.6	55.60	0.95	30.6 - 72.9	. A
		,	*	pCi/l	Gr-B	9.73	15.23	1.57	4.26 - 18.2	Α
	•	•		pCi/l	I-131	28.9	27.43	0.95	24.0 - 33.8	Α
••				pCi/l	U-Nat	27.5	29.24	1:06	22.1 - 30.8	Α
			v [*]	pCi/l	H-3	9700	9263.3	0.95	· 8430 - 10700	Α

TABLE J-1

ENVIRONMENTAL RESOURCE ASSOCIATES (ERA)
PROFICIENCY TESTING PROGRAM - 2007
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (TBE)
(Page 2 of 2)

COMMENTS

- (1) The Cs-134 TBE found/ERA known ratio is 83.6%, which TBE considers acceptable. NCR 07-07
- (a) Teledyne Brown Engineering reported result.
- (b) The ERA known value is equal to 100% of the parameter present in the standard as determined by gravimetric and/or volumetric measurements made during standard preparation.
- (c) ERA evaluation: A=acceptable. Reported result falls within the Warning Limits. N=not acceptable. Reported result falls outside of the Control Limits. CE=check for Error. Reported result falls within the Control Limits and outside of the Warning Limit.

QUALITY CONTROL SPIKE PROGRAM TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES

(Page 1 of 5)

			\ <u>-</u>	ugo 1 01 5)				
Month/Year	Identification	Medium	Units	Nuclide	Analytics Calculated Results (b)	TBE Results (a)	TBE / Analytics Ratio (c)	Evaluation (d
March 2007	E5255-396	Milk	pCi/l	Sr-89	137	125	0.91	Α
			pCi/l	Sr-90	10	10.8	1.08	Α
	E5256-396	Milk	pCi/l	1-131	85.2	107	1.26	W
				Ce-141	297	269	0.91	Α
	•			Cr-51	245	244	1:00	Α
				Cs-134	112	98.1	0.88	Α
				Cs-137	234	227	0.97	A
				Co-58	98.8	92.5	0.94	Α
				Mn-54	182	182:0	1.00	- A
•	•			Fe-59	106	108.0	1.02	Α
				Zn-65	1000	985	0.99	Α
				Co-60	152	143	0.94	Α
•	E5258-396	AP	pCi	Ce-141	245	252	1.03	Α
			pCi	Cr-51	202	204	- 1.01	Α
		,	pCi	Cs-134	92.3	74.9	0.81	Α
		.*	pCi	Cs-137	197.0	. 190.0	0.96	A
		•	pCi	Co-58	81.6	79.7	0.98	A
•	· ·	•	pCi	Mn-54	151	156	1.03	A
			рСi	Fe-59	87.2	99.1	1.14	Α
	**		pCi	[*] Zn-65	826	894	1.08	A
		.*	pCi	Co-60	126	122	0.97	Α
· :	E5257-396	Charcoal	pCi	I-131	71,3	34.7	0.49	N (1)
June 2007	E5384-396	Milk	pCi/l	Sr-89	95.2	98.3	1.03	Α .
	•	•	pCi/l	Sr-90	12.9	. 16.1	1.25	W

TABLE J-2
ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007
TELEDYNE

QUALITY CONTROL SPIKE PROGRAM TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES

(Page 2 of 5)

	*		/1 (age 2 or 3)				
Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (b)	TBE Results (a)	TBE / Analytics Ratio (c)	Evaluation (d)
June 2007	E5385-396	Milk	pCi/l	1-131	70.1	71.0	1.01	Α
			pCi/l	Ce-141	200	176	0.88	Α
			pCi/l	Cr-51	512	459	0.90	Α
			pCi/l	Cs-134	242	197	0.81	Α
			pCi/l	Cs-137	169	158	0.93	Α
			pCi/l	Co-58	198	180	0.91	Α
			pCi/l	Mn-54	166	163	0.98	Α
			pCi/l	Fe-59	167	158	0.95	Α
			pCi/l	Zn-65	334	318	0.95	Α
			pCi/l	Co-60	238	212	0.89	Α
	E5387-396	AP	pCi	Ce-141	105	87.5	0.83	Α
			pCi	Cr-51	268	232	0.87	Α
			pCi	Cs-134	127	101	0.80	Α
			pCi	Cs-137	88.5	78.9	0.89	Α
		•	рСі	Co-58	104.0	91.8	0.88	Α
			рСі	Mn-54	87	85.6	0.99	· A
			рСі	Fe-59	87.3	89.8	1.03	Α
			рСі	Zn-65	175	178	1.02	Α
			pCi	Co-60	125	1,11	0.89	Α
	E5386-396	Charcoal	, pCi	I-131	79.1	79.3	1.00	Α

QUALITY CONTROL SPIKE PROGRAM TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES

(Page 3 of 5)

Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (b)	TBE Results (a)	TBE / Analytics Ratio (c)	Evaluation (d)
September 2007	E5492-396	Milk	pCi/l	Sr-89	94.9	99	1.04	Α
·			pCi/l	Sr-90	13.1	13.9	1.06	Α
	E5493-396	Milk	pCi/l	I-131	85.2	81.9	0.96	Α
			pCi/l	Ce-141	211	200	0.95	Α
			pCi/l	Cr-51	· 289	271	0.94	Α .
			pCi/l	Cs-134	147	131	0.89	A .
			pCi/l	Cs-137	131	131	1.00	Α
			pCi/l	Co-58	114	114	1.00	Α
			pCi/l	Mn-54	168	171	1.02	Α
			pCi/l	Fe-59	111	117	1.05	Α
			pCi/l	Zn-65	202	212	1.05	Α
			pCi/l	Co-60	148	143	0.97	Α
	E5495-396	AP	pCi	Ce-141	136	128	0.94	Α
			pCi	Cr-51	186	181	0.97	Α
			pCi	Cs-134	94.7	85.9	0.91	Α
			pCi	Cs-137	83.9	83.2	0.99	Α
			pCi	Co-58	73.3	69.4	0.95	Α
			pCi	Mn-54	108	112	1.04	Α
	•		pCi	Fe-59	71.1	79.6	1.12	Α
			pCi	Zn-65	130	159	1.22	W
			pCi	Co-60	95.2	92.0	0.97	Α
								
~	E5494-396	Charcoal	pCi	I-131	69.5	70.8	1.02	. A .
December 2007	E5749-396	Milk	pCi/l	Sr-89	93.7	87.6	0.93	Α
			pCi/l	Sr-90	15.20	15.5	1.02	Α

TABLE J-2

ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007 TELEDYNE

QUALITY CONTROL SPIKE PROGRAM TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES

(Page 4 of 5)

			(P)	age 4 of 5)				•
Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (b)	TBE Results (a)	TBE / Analytics Ratio (c)	Evaluation (d)
		·	•		· ·			4
December 2007	E-5750-396	Milk	pCi/l	I-131	60.8	60.6	1.00	Α
٠.			pCi/l	Ce-141	141	137	0.97	Α
			pCi/l	Cr-51	512	497	0.97	Α
			pCi/l	Cs-134	137	117	0.85	Α
			pCi/l	Cs-137	166	166	1.00	Α .
•			pCi/l	Co-58	174	159	0.91	Α
	٠.		pCi/l	Mn-54	190	190	1.00	\mathbf{A}_{\cdot}
			pCi/l	Fe-59	148	149	1.01	Α
			pCi/l	Zn-65	234	231	0.99	A
			pCi/l	Co-60	211	198	0.94	Α
	E5752-396	AP	рСì	Ce-141	93.4	88.6	0.95	Α
•			pCi	Cr-51	340	352	1.04	Α
			pCi	Cs-134	91.2	84.6	0.93	Α
			pCi	Cs-137	110.0	111	1.01	Α.
		•	pCi	Co-58	116.0	114	0.98	Α
			pCi.	Mn-54	126	135	1.07	Α
·	•		рСі	Fe-59	98.5	119	1.21	W
•			pCi	Zn-65	155	172	1.11	Α
• •			pCi	Co-60	141	137	0.97	Α
	E5751-396	Charcoal	pCi	I-131	74.1	65.8	0.89	Α

TABLE J-2

ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007 TELEDYNE

QUALITY CONTROL SPIKE PROGRAM TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (Page 5 of 5)

COMMENTS

- (1) New technician counted charcoal cartridge on the back rather than the face, resulting in low activity. If the charcoal cartridge had been counted on the face, the ratio would have been approximately 1.07, which is acceptable. NCR 07-02
- (a) Teledyne Brown Engineering reported result.
- (b) The Analytics known value is equal to 100% of the parameter present in the standard as determined by gravimetric and/or volumetric measurements made during standard preparation.
- (c) Ratio of Teledyne Brown Engineering to Analytics results.
- (d) Analytics evaluation based on TBE internal QC limits: A= Acceptable. Reported result falls within ratio limits of 0.80-1.20. W-Acceptable with warning. Reported result falls within 0.70-0.80 or 1.20-1.30. N = Not Acceptable. Reported result falls outside the ratio limits of < 0.70 and > 1.30.

TABLE J-3

PPL REMP LABORATORY SPIKE PROGRAM

ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007

TELEDYNE BROWN ENGINEERING ENV SERVICES

(Page 1 of 5)

Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (a)	TBE Results (a)	TBE/Analytics Ratio
March-07	E5302-186	Sediment	pCi/kg	Ce-141	292 ± 10	289 ± 25	0.99
			pCi/kg	Cr-51	241 ± 8	291 ± 102	1.21
			pCi/kg	Cs-134	110 ± 4	. 103 ± 9	0.94
			pCi/kg	Cs-137	329 ± 11	326 ± 18	0.99
			pCi/kg	Co-58	97 ± 3	94.9 ± 14	0.98
			pCi/kg	Mn-54	180 ± 6	181 ± 14	1.01
			pCi/kg	Fe-59	104 ± 3	107 ± 22	1.03
			pCi/kg	Zn-65	986 ± 33	1050 ± 42	1.06
			pCi/kg	Co-60	150 ± 5	151 ± 12	1.01
March-07	E5298-186	Milk	pCi/l	I-131	84.9 ± 3	80.7 ± 2	0.95
			pCi/l	Ce-141	364 ± 12	359 ± 11	0.99
			pCi/l	Cr-51	300 ± 10	281 ± 41	0.94
			pCi/l	Cs-134	137 ± 5	123 ± 5	0.90
			pCi/l	Cs-137	288 ± 10	297 ± 9	1.03
			pCi/l	Co-58	121 ± 4	118 ± 7	0.98
			pCi/l	Mn-54	224 ± 7	238 ± 8	1.06
•			pCi/l	Fe-59	130 ± 4	142 ± 9	1.09
			pCi/l	Zn-65	1230 ± 41	1300 ± 25	1.06
			pCi/l	Co-60	187 ± 6	180 ± 5	0.96
September-07	E5449-186	AP Filter	pCi	Ce-141	. 93 ± 1 .	99.1 ± 3	1.07
•			pCi	Cr-51	128 ± 1	131 ± 17	1.02
	•		pCi	Cs-134	65 ± 1	57.7 ± 2	0.89
			pCi	Cs-137	58 ± 1	65.2 ± 3	1.12
			рСi	Co-58	51 ± 1	54.5 ± 3	1.07
			pCi	Mn-54	74 ± 1	88.3 ± 3	1.19
			pCi	Fe-59	49 ± 1	59.9 ± 3	1.22
			pCi	Zn-65	90 ± 1	117 ± 5	1.30
			pCi	Co-60	66 ± 1	68.5 ± 2	1.04

TABLE J-3
PPL REMP LABORATORY SPIKE PROGRAM
ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007
TELEDYNE BROWN ENGINEERING ENV SERVICES
(Page 2 of 5)

Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (a)	TBE Results (a)	TBE/Analytics Ratio
September-07	E5450-186	AP Filter	pCi	Ce-141	191 ± 1	203 ± 4	1.06
0.010			pCi	Cr-51	261 ± 1	277 ± 2	1.06
			pCi	Cs-134	133 ± 1	125 ± 8	0.94
			pCi	Cs-137	118 ± 1	132 ± 3	1.12
			pCi	Co-58	103 ± 1	109 ± 3	1.06
			pCi	Mn-54	151 ± 1	180 ± 3	1.19
			pCi	Fe-59	100 ± 1	121 ± 5	1.21
		•	pCi	Zn-65	183 ± 1	233 ± 6	1.27
••			pCi	Co-60	134 ± 1	145 ± 2	1.08
September-07	E5451-186	AP Filter	pCi	Ce-141	148 ± 1	163 ± 3	1.10
·			pCi	Cr-51	203 ± 1	218 ± 18	1.07
•			pCi	Cs-134	103 ± 1	95.7 ± 2	0.93
			pCi	Cs-137.	91 ± 1	106 ± 3	1.16
			⁻ pCi	Co-58	80 ± 1	85.9 ± 3	. 1.07
		•	pC i	Mn-54	117 ± 1	145 ± 3	1.24
		•	pCi	Fe-59	78 ± 1	97.4 ± 4	1.25
			рСі	Zn-65	142 ± 1	188 ± 6	1.32
			pCi	Co-60	104 ± 1	115 ± 2	1.11
March-07	E5303-186	Water	pCi/l	H-3	5010 ± 167	4420 ± 527	0.88
September-07	É5455-186	Water	pCi/l	H-3	1400 ± 465	1500 ± 175	1.07
March-07	E5299-186	Charcoal	pCi	I-131	83.9 ± 3	35.3 ± 3	0.42 (1)
	E5300-186	Charcoal	pCi	l-131	90.6 ± 3	39.6 ± 4	0.44 (1)
	E5301-186	Charcoal	pCi	I-131	95.9 ± 3	39.2 ± 5	0.41 (1)

TABLE J-3
PPL REMP LABORATORY SPIKE PROGRAM
ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007
TELEDYNE BROWN ENGINEERING ENV SERVICES
(Page 3 of 5)

Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (a)	TBE Results (a)	TBE/Analytics Ratio
June-07	E5378-186	Charcoal	pCi	I-131	79.0 ± 3	78.3 ± 8	0.99
	E5406-186	Charcoal	pCi	I-131	79.0 ± 3	77.4 ± 8	0.98
	E5407-186	Charcoal	pCi	I-131	79.0 ± 3	73.4 ± 6	0.93
September-07	E5452-186	Charcoal	pCi	I-131	69.9 ± 2	69.9 ± 6	1.00
	E5453-186	Charcoal	pCi	I-131	69.8 ± 2	78.5 ± 8	1.12
	E5454-186	Charcoal	pCi	I-131	69.7 ± 2	69.5 ± 8	1.00
September-07	E5448-186	Milk	pCi/l	I-131 Ce-141 Cr-51 Cs-134 Cs-137 Co-58 Mn-54 Fe-59 Zn-65 Co-60	90.2 ± 3 211 ± 7 289 ± 10 147 ± 5 130 ± 4 114 ± 4 167 ± 6 110 ± 4 202 ± 7 148 ± 5	80.7 ± 3 198 ± 15 296 ± 64 133 ± 6 122 ± 10 109 ± 9 170 ± 11 114 ± 14 216 ± 18 141 ± 8	0.89 0.94 1.02 0.90 0.94 0.96 1.02 1.04 1.07

TABLE J-3

PPL REMP LABORATORY SPIKE PROGRAM

ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007

TELEDYNE BROWN ENGINEERING ENV SERVICES

(Page 4 of 5)

Month/Year	Identification No.	Medium	Units	Nuclide	Analytics Calculated Results (a)	TBE Results (a)	TBE/Analytics Ratio
					(1)		
December-07	E5765-186	Milk	pCi/l	I-131	58.7 ± 2	67.4 ± 4	1.15
			pCi/l	Ce-141	154 ± 5	142 ± 10 .	0.92
			pCi/l	Cr-51	559 ± 19	510 ± 5	0.91
			pCi/l	Cs-134	150 ± 5	116 ± 4	0.77
			pCi/l	Cs-137	181 ± 6	169 ± 7	0.93
			pCi/l	Co-58	190 ± 6	176 ± 8	0.93
			pCi/l	Mn-54	207 ± 7	194 ± 7	0.94
•			pCi/l	Fe-59	162 ± 5	157 ± 10	0.97
			pCi/l	Zn-65	255 ± 9	258 ± 12	1.01
•*			pCi/l	Co-60	231 ± 8	206 ± 6	0.89

TABLE J-3

PPL REMP LABORATORY SPIKE PROGRAM ANALYTICS ENVIRONMENTAL RADIOACTIVITY CROSS CHECK PROGRAM - 2007 TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (Page 5 of 5)

COMMENTS

(1) Generated NCR 08-02 to address failure of Analytics charcoal cartridges.

TABLE J-4
DOE - MAPEP
MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (TBE)
(Page 1 of 4)

Identification				MAPEP Known	•	•		
Month/Year	No	Medium	Units	Nuclide	Result(b)	Results(a)	Control Limits	Evaluation(c)
February 2007	06-MaW17	Water	Bq/l	Am-241	1.71	1.92	1.20 - 2.22	Α
•			Bq/l	Cs-134	83.5	74.5	58.5 - 108.6	Α
			Bq/l	Cs-137	163.0	162	114-1 - 211.9	Α
			Bq/l	Co-57	143.7	140	100.6 - 186.8	Α
*			Bq/l	Co-60	26.9	27.9	18.8 - 35.0	Α
			Bq/l	H-3	283.0	346	198.1 - 367.9	Α
	•		Bq/l	Fe-55	129.3	146	90.5 - 168.1	Α
			Bq/l	Mn-54	123.8	125	86.7 - 160.9	Α .
			Bq/l	Ni-63	130.4	122	91.3 - 169.5	Α
			Bq/l	Pu-238	2.25	1.99	1.58 - 2.93	Α
			Bq/l	Pu-239/240	2.22	1.98	1.55 - 2.89	Α
			Bq/l	Sr-90	8.87	8.90	6.21- 11.53	Α
			Bq/l	Tc-99	10.5	11.5	7.4 - 13.7	Α
			Bq/l	U-234/233	2.49	2.48	1.74 - 3.24	Α
•			Bq/l	U-238	2.48	2.47	1.74 - 3.22	Α
			Bq/l	Zn-65	114.8	117	80.4 - 149.2	Α
	06-GrW17	Water	Bq/I	Gr-Alpha	0.327	0.502	>0.0 - 0.654	A
			Bq/l	Gr-Beta	0.851	0.975	0.426 - 1.277	Α

TABLE J-4

DOE - MAPEP

MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM

TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (TBE)

(Page 2 of 4)

	Identification	I			MAPEP Known	TBE		
Month/Year	No.	Medium	Units	Nuclide	Result(b)	Results(a)	Control Limits	Evaluation(c)
	06-MaS17	Soil	Bq/kg	Am-241	34.8	34.2	24.4 - 45.2	Α
			Bq/kg	Cs-134	327.4	322	229.2 - 425.6	Α .
			Bq/kg	Cs-137	799.7	893	559.8 - 1039.6	A
			Bq/kg	Co-57	471.2	508.3	329.8 - 612.6	. A
			Bq/kg	Co-60	274.7	300.3	192.3 - 357.1	Α
			Bq/kg	Fe-55	807.6	NR ·	565.3 - 1049.9	NR
			Bq/kg	Mn-54	685.2	779	479.6 - 890.8	Α
			Bq/kg	Ni-63	585.0	489	409.5 - 760.5	A
			Bq/kg	Pu-238	31.3	NR	21.9 - 40.7	N (1)
			Bq/kg	Pu-239/240	44.5	39.9	31.2 - 57.9	A
			Bq/kg	K-40	602	682	421 - 783	A
			Bq/kg	Sr-90	319.0	293	223.3 - 414.7	A
			Bq/kg	Tc-99	false positive test	5.20		Ä
			Bq/kg	U-234/233	185.0	126	129.5 - 240.5	N (1)
			Bq/kg	U-238	192.4	138	134.7 - 250.1	W (1)
			Bq/kg	Zn-65	536.8	618.7	375.8 - 697.8	A
				\$				
	06-RdF17	AP	Bq	Am-241	0.0977	0.083	0.0684 - 0.1270	Α
			Bq	Cs-134	1.4960	3.230	2.9372 - 5.4548	W
			Bq	Cs-137	2.5693	2.453	1.7985 - 3.3401	Α
			Bq	Co-57	2.8876	3.067	2.0213 - 3.7539	. A
4			Bq	Co-60	2.9054	2.767	2.0338 - 3.7770	Α
			Bq	Mn-54	3.5185	3.557	2.4630 - 4.5741	Α
			Bq	Pu-238	0.0669	0.063	0.0468 - 0.0870	Α
			Bq	Pu-239/240	0.0839	0.076	0.0587 - 0.1091	Α
			Bq	Sr-90	0.6074	0.584	0.4252 - 0.7896	Α
			Bq	U-234/233	0.0981	0.097	0.0687 - 0.1275	Α
		-	Bq	U-238	0.1021	0.110	0.0715 - 0.1327	Α
			Bq	Zn-65	2.6828	2.463	1.8780 - 3.4876	A

TABLE J-4
DOE - MAPEP
MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM
TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (TBE)
(Page 3 of 4)

Identification				MAPEP Known				
Month/Year	No.	Medium	Units	Nuclide	Result(b)	Results(a)	Control Limits	Evaluation(c)
	06-GrF17	AP	Bq	Gr-Alpha	0.601	0.353	>0.0 - 1.202	A
			Bq	Gr-Beta	0.441	0.500	0.221 - 0.662	Α
February 2007	06-RdV17	Vegetation	Bq/kg	Am-241	0.1806	NR	0.1264 - 0.2348	NR
•		ū	Bq/kg	Cs-134	6.2101	6.207	4.3471 - 8.0731	Α
•			Bq/kg	Cs-137	6.9949	7.80	4.8964 - 9.0934	Α
			Bq/kg	Co-57	8.1878	8.64	5.7315 - 10.6441	Α
			Bq/kg	Co-60	5.8215	6.10	4.0751 - 7.5680	Α
,			Bq/kg	Mn-54	8.4492	9.41	5.9144 - 10.9840	· A
			Bq/kg	Pu-238	0.1484	0.134	0.1039 - 0.1929	Α
			Bq/kg	Pu-239/240	0.2135	0.174	0.1495 - 0.2776	Α
			Bq/kg	K-40	Not evaluated by MAPEP	63.5	•	
			Bq/kg	Sr-90	1.5351	1.51	1.0746 - 1.9956	Α
			Bq/kg	U-234/233	0.2624	0.231	0.1837 - 0.3411	Α
			Bq/kg	U-238	0.2724	0.192	0.1907 - 0.3541	W
			Bq/kg	Zn-65	5.6991	7.15	3.9894 - 7.4088	W
May 2006	06-RdF16	AP	Bq	Am-241	0.142	0.124	0.099 - 0.185	Α
•			Bq	Cs-134	3.147	2.62	2.203 - 4.091	Α
			Bq	Cs-137	1.805	1.98	1.263 - 2.346	Α .
			Bq	Co-57	2.582	2.65	1.807 - 3.357	Α
			Bq	Co-60	1.577	1.63	1.104 - 2.050	Α
			Bq	Mn-54	1.92	2.10	1.34 - 2.50	Α
			Bq	Pu-238	0.118	0.118	0.083 - 0.153	Α
only 1 series pr	rovided in 2007		Bq	Pu-239/240	NA ·	0.00822		Α
			Bq	Sr-90	0.62	0.549	0.43 - 0.81	A
			Bq	U-234/233	0.134	0.140	0.094 - 0.174	Α
			Bq	U-238	0.139	0.136	0.097 - 0.181	Α
		•	Bq	Zn-65	NA	-0.163		Α
	06-GrF16	AP	Bq	Gr-A	0.290	0.134	>0.0 - 0.580	A
			Вq	Gr-B	0.359	0.358	0.180 - 0.538	Α

TABLE J-4

DOE - MAPEP

MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM TELEDYNE BROWN ENGINEERING ENVIRONMENTAL SERVICES (TBE)

(Page 4 of 4)

COMMENTS

- (1) Evaluated as a false negative by MAPEP. We did not report the nuclide due to one low result in the three samples analyzed. The MAPEP known value was 31.1. The three results, including the outlier, averaged 25.6 Bq/kg, which would have been acceptable. Uranium failure and warning due to not performing microwave digestion on the samples. Next set with be microwave digested. NCR 07-03 generated by TBE to investigate.
- (a) Teledyne Brown Engineering reported result.
- (b) The MAPEP known value is equal to 100% of the parameter present in the standard as determined by gravimetric and/or volumetric measurements made during standard preparation.
- (c) DOE/MAPEP evaluation: A=acceptable, W=acceptable with warning, N=not acceptable.
- NR = not reported, no evaluation was done by MAPEP.