

# **Environmental Impact Statement for the Dewey-Burdock Project in Custer and Fall River Counties, South Dakota**

## **Supplement to the Generic Environmental Impact Statement for *In-Situ* Leach Uranium Milling Facilities**

Draft Report for Comment

Chapters 1 to 4

## AVAILABILITY OF REFERENCE MATERIALS IN NRC PUBLICATIONS

### NRC Reference Material

As of November 1999, you may electronically access NUREG-series publications and other NRC records at NRC's Public Electronic Reading Room at <http://www.nrc.gov/reading-rm.html>. Publicly released records include, to name a few, NUREG-series publications; *Federal Register* notices; applicant, licensee, and vendor documents and correspondence; NRC correspondence and internal memoranda; bulletins and information notices; inspection and investigative reports; licensee event reports; and Commission papers and their attachments.

NRC publications in the NUREG series, NRC regulations, and Title 10, "Energy," in the *Code of Federal Regulations* may also be purchased from one of these two sources.

1. The Superintendent of Documents  
U.S. Government Printing Office  
Mail Stop SSOP  
Washington, DC 20402-0001  
Internet: [bookstore.gpo.gov](http://bookstore.gpo.gov)  
Telephone: 202-512-1800  
Fax: 202-512-2250
2. The National Technical Information Service  
Springfield, VA 22161-0002  
[www.ntis.gov](http://www.ntis.gov)  
1-800-553-6847 or, locally, 703-605-6000

A single copy of each NRC draft report for comment is available free, to the extent of supply, upon written request as follows:

Address: U.S. Nuclear Regulatory Commission  
Office of Administration  
Publications Branch  
Washington, DC 20555-0001

E-mail: [DISTRIBUTION.RESOURCE@NRC.GOV](mailto:DISTRIBUTION.RESOURCE@NRC.GOV)  
Facsimile: 301-415-2289

Some publications in the NUREG series that are posted at NRC's Web site address <http://www.nrc.gov/reading-rm/doc-collections/nuregs> are updated periodically and may differ from the last printed version. Although references to material found on a Web site bear the date the material was accessed, the material available on the date cited may subsequently be removed from the site.

### Non-NRC Reference Material

Documents available from public and special technical libraries include all open literature items, such as books, journal articles, transactions, *Federal Register* notices, Federal and State legislation, and congressional reports. Such documents as theses, dissertations, foreign reports and translations, and non-NRC conference proceedings may be purchased from their sponsoring organization.

Copies of industry codes and standards used in a substantive manner in the NRC regulatory process are maintained at—

The NRC Technical Library  
Two White Flint North  
11545 Rockville Pike  
Rockville, MD 20852-2738

These standards are available in the library for reference use by the public. Codes and standards are usually copyrighted and may be purchased from the originating organization or, if they are American National Standards, from—

American National Standards Institute  
11 West 42<sup>nd</sup> Street  
New York, NY 10036-8002  
[www.ansi.org](http://www.ansi.org)  
212-642-4900

Legally binding regulatory requirements are stated only in laws; NRC regulations; licenses, including technical specifications; or orders, not in NUREG-series publications. The views expressed in contractor-prepared publications in this series are not necessarily those of the NRC.

The NUREG series comprises (1) technical and administrative reports and books prepared by the staff (NUREG-XXXX) or agency contractors (NUREG/CR-XXXX), (2) proceedings of conferences (NUREG/CP-XXXX), (3) reports resulting from international agreements (NUREG/IA-XXXX), (4) brochures (NUREG/BR-XXXX), and (5) compilations of legal decisions and orders of the Commission and Atomic and Safety Licensing Boards and of Directors' decisions under Section 2.206 of NRC's regulations (NUREG-0750).

**DISCLAIMER:** This report was prepared as an account of work sponsored by an agency of the U.S. Government. Neither the U.S. Government nor any agency thereof, nor any employee, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product, or process disclosed in this publication, or represents that its use by such third party would not infringe privately owned rights.

# **Environmental Impact Statement for the Dewey-Burdock Project in Custer and Fall River Counties, South Dakota**

## **Supplement to the Generic Environmental Impact Statement for *In-Situ* Leach Uranium Milling Facilities**

Draft Report for Comment

Chapters 1 to 4

Manuscript Completed: October 2012  
Date Published: November 2012

Office of Federal and State Materials and  
Environmental Management Programs

## COMMENTS ON DRAFT REPORT

Any interested party may submit comments on this report for consideration by the NRC staff. Comments may be accompanied by additional relevant information or supporting data. Please specify the report number NUREG-1910, Supplement 4, in your comments, and send them by the end comment period specified in the *Federal Register* notice announcing the availability of this report to the following address:

Cindy Bladey, Chief  
Rules, Announcements, and Directives Branch  
Division of Administrative Services  
Office of Administration  
Mail Stop: TWB-05-B01M  
U.S. Nuclear Regulatory Commission  
Washington, DC 20555-0001

For any questions about the material in this report, please contact:

Haimanot Yilma  
Mail Stop T8F5  
U.S. Nuclear Regulatory Commission  
Washington, DC 20555-0001  
Phone: 301-415-8029  
E-mail: [Haimanot.Yilma@nrc.gov](mailto:Haimanot.Yilma@nrc.gov)

Please be aware that any comments that you submit to the NRC will be considered a public record and entered into the Agencywide Documents Access and Management System (ADAMS). Do not provide information you would not want to be publicly available.

1 **ABSTRACT**

2 The U.S. Nuclear Regulatory Commission (NRC) issues licenses for the possession and use  
3 of source material provided that proposed facilities meet NRC regulatory requirements and will  
4 be operated in a manner that is protective of public health and safety and the environment.  
5 Under the NRC environmental protection regulations in 10 CFR Part 51, which implement the  
6 National Environmental Policy Act of 1969 (NEPA), issuance of a license to possess and use  
7 source material for uranium milling, as defined in 10 CFR Part 40, requires an environmental  
8 impact statement (EIS) or a supplement to an EIS.  
9

10 In May 2009, NRC issued NUREG–1910, the Generic Environmental Impact Statement for  
11 *In-Situ* Leach Uranium Facilities (GEIS) (NRC, 2009). In the GEIS, NRC assessed the  
12 potential environmental impacts from the construction, operation, aquifer restoration, and  
13 decommissioning of an *in-situ* leach uranium recovery facility [also known as an *in-situ* recovery  
14 (ISR) facility] located in four specified geographic regions of the western United States. As part  
15 of this assessment, NRC determined which potential impacts will be essentially the same for all  
16 ISR facilities and which will result in varying levels of impact for different facilities, thus requiring  
17 further site-specific information to determine potential impacts. The GEIS provides a starting  
18 point for NRC NEPA analyses for site-specific license applications for new ISR facilities, as well  
19 as for applications to amend or renew existing ISR licenses.  
20

21 By letter dated August 10, 2009, Powertech (USA), Inc. (Powertech, referred to herein as the  
22 applicant) submitted a license application to NRC for a new source and byproduct material  
23 license for the Dewey-Burdock ISR Project. The proposed Dewey-Burdock ISR Project will be  
24 located in Fall River and Custer Counties, South Dakota, which is in the Nebraska-South  
25 Dakota-Wyoming Uranium Milling Region identified in the GEIS. The NRC staff prepared this  
26 draft Supplemental Environmental Impact Statement (SEIS) to evaluate the potential  
27 environmental impacts from the applicant proposal to construct, operate, conduct aquifer  
28 restoration, and decommission an ISR uranium facility at the proposed Dewey-Burdock ISR  
29 Project. This draft SEIS describes the environment potentially affected by the proposed site  
30 activities, presents the potential environmental impacts resulting from reasonable alternatives to  
31 the proposed action, and describes the applicant environmental monitoring program and  
32 proposed mitigation measures. In conducting its analysis in this draft SEIS, the NRC staff  
33 evaluated site-specific data and information to determine whether the applicant’s proposed  
34 activities and site characteristics were consistent with those evaluated in the GEIS. NRC staff  
35 then determined relevant sections, findings, and conclusions in the GEIS that could be  
36 incorporated by reference and areas that required additional analysis. Based on its  
37 environmental review, the preliminary NRC staff recommendation is that a source and  
38 byproduct material license for the proposed action be issued as requested, unless safety issues  
39 mandate otherwise.  
40

41 **Paperwork Reduction Act Statement**

42  
43 This NUREG contains and references information collection requirements that are subject to the  
44 Paperwork Reduction Act of 1995 (44 U.S.C. 3501 et seq.). These information collections were  
45 approved by the Office of Management and Budget (OMB), approval numbers 3150-0014,  
46 3150-0020, 3150-0021, and 3150-0008.  
47  
48

1 Public Protection Notification

2  
3 NRC may not conduct or sponsor, and a person is not required to respond to, a request for  
4 information or an information collection requirement unless the requesting document displays a  
5 currently valid OMB control number.

6  
7 **References**

8  
9 10 CFR Part 40. Code of Federal Regulations, Title 10, *Energy*, Part 40. “*Domestic Licensing*  
10 *of Source Material.*” Washington, DC: U.S. Government Printing Office.

11  
12 10 CFR Part 51. Code of Federal Regulations, Title 10, *Energy*, Part 51. “*Environmental*  
13 *Protection Regulations for Domestic Licensing and Related Regulatory Functions.*”  
14 Washington, DC: U.S. Government Printing Office.

15  
16 NRC. NUREG–1910, “Generic Environmental Impact Statement for *In-Situ* Leach Uranium  
17 Milling Facilities.” ML091480244, ML091480188. Washington, DC: NRC. May 2009.

18

# CONTENTS

Section	Page
ABSTRACT .....	iii
FIGURES .....	xix
TABLES .....	xxiii
EXECUTIVE SUMMARY .....	xxvii
ABBREVIATIONS/ACRONYMS .....	xlvii
1 INTRODUCTION.....	1-1
1.1 Background .....	1-1
1.2 Proposed Action .....	1-1
1.2.1 BLM's Proposed Action .....	1-3
1.3 Purpose of and Need for the Proposed Action.....	1-3
1.3.1 BLM's Purpose and Need.....	1-3
1.4 Scope of the SEIS.....	1-3
1.4.1 Relationship to the GEIS .....	1-4
1.4.2 Public Participation Activities .....	1-5
1.4.3 Issues Studied in Detail .....	1-6
1.4.4 Issues Outside the Scope of the SEIS .....	1-7
1.4.5 Related NEPA Reviews and Other Related Documents .....	1-7
1.5 Applicable Regulatory Requirements .....	1-10
1.6 Licensing and Permitting .....	1-10
1.6.1 NRC Licensing Process.....	1-11
1.6.2 Status of Permitting With Other Federal and State Agencies.....	1-12
1.7 Consultation .....	1-13
1.7.1 Endangered Species Act of 1973 Consultation .....	1-13
1.7.2 National Historic Preservation Act of 1966 Consultation .....	1-14
1.7.3 Coordination With Other Federal, Tribal, State, and Local Agencies .....	1-15
1.7.3.1 Coordination With U.S. Bureau of Land Management .....	1-15
1.7.3.2 Coordination With the U.S. Army Corps of Engineers.....	1-16
1.7.3.3 Coordination With the U.S. Forest Service.....	1-16
1.7.3.4 Coordination With the U.S. Geological Survey.....	1-16
1.7.3.5 Interactions With Tribal Governments .....	1-16
1.7.3.6 Coordination With South Dakota Department of Environmental and Natural Resources.....	1-22
1.7.3.7 Coordination With South Dakota Game Fish and Parks .....	1-22
1.7.3.8 Coordination With South Dakota State Historical Society Archaeological Research Center.....	1-23
1.7.3.9 Coordination With Localities.....	1-23
1.8 Structure of the SEIS .....	1-23
1.9 References .....	1-24
2 <i>IN-SITU</i> URANIUM RECOVERY AND ALTERNATIVES.....	2-1
2.1 Alternatives Considered for Detailed Analysis .....	2-1
2.1.1 The Proposed Action (Alternative 1).....	2-1
2.1.1.1 Proposed ISR Facility and Waste Disposal Options .....	2-2
2.1.1.1.1 Site Description .....	2-3
2.1.1.1.2 Construction Activities.....	2-6
2.1.1.1.2.1 Buildings .....	2-7

## CONTENTS (continued)

Section	Page
2.1.1.1.2.2 Access Roads.....	2-10
2.1.1.1.2.3 Wellfields .....	2-11
2.1.1.1.2.3.1 Injection and Production Wells .....	2-11
2.1.1.1.2.3.2 Monitoring Wells.....	2-16
2.1.1.1.2.3.3 Pumping Tests .....	2-17
2.1.1.1.2.3.4 Wellfield Hydrogeologic Data Packages .....	2-18
2.1.1.1.2.3.5 Well Construction, Development, and Testing ....	2-18
2.1.1.1.2.3.6 Pipelines.....	2-20
2.1.1.1.2.3.7 Power Lines.....	2-21
2.1.1.1.2.4 Liquid Waste Disposal Systems .....	2-21
2.1.1.1.2.4.1 Deep Class V Injection Well Option.....	2-22
2.1.1.1.2.4.2 Land Application Option .....	2-25
2.1.1.1.2.4.3 Combined Deep Class V Injection Well and Land Application Option .....	2-28
2.1.1.1.2.5 Schedule.....	2-28
2.1.1.1.3 Operation Activities .....	2-29
2.1.1.1.3.1 Uranium Mobilization .....	2-29
2.1.1.1.3.1.1 Lixiviant Chemistry .....	2-29
2.1.1.1.3.1.2 Lixiviant Injection and Production .....	2-29
2.1.1.1.3.1.3 Excursion Monitoring.....	2-30
2.1.1.1.3.2 Uranium Processing .....	2-31
2.1.1.1.3.2.1 Ion Exchange .....	2-31
2.1.1.1.3.2.2 Elution .....	2-33
2.1.1.1.3.2.3 Precipitation, Drying, and Packaging.....	2-33
2.1.1.1.3.3 Management of Production of Bleed and Other Liquid Effluents .....	2-34
2.1.1.1.3.4 Schedule.....	2-34
2.1.1.1.4 Aquifer Restoration Activities .....	2-35
2.1.1.1.4.1 Groundwater Restoration Methods.....	2-36
2.1.1.1.4.1.1 Deep Class V Injection Well Option.....	2-36
2.1.1.1.4.1.2 Land Application Option .....	2-36
2.1.1.1.4.1.3 Optional Groundwater Sweep .....	2-37
2.1.1.1.4.2 Restoration Monitoring and Stabilization ....	2-37
2.1.1.1.4.3 Schedule.....	2-38
2.1.1.1.5 Decontamination, Decommissioning, and Reclamation Activities .....	2-38
2.1.1.1.5.1 Radiological Surveys and Contamination Control.....	2-39



## CONTENTS (continued)

Section	Page
2.1.1.1.5.2	Wellfields ..... 2-39
2.1.1.1.5.3	Process Buildings and Equipment and Other Structures ..... 2-40
2.1.1.1.5.4	Engineered Structures and Access Roads.. 2-40
2.1.1.1.5.5	Final Contouring and Revegetation ..... 2-41
2.1.1.1.5.6	Schedule..... 2-41
2.1.1.1.6	Effluents and Waste Management ..... 2-41
2.1.1.1.6.1	Gaseous or Airborne Particulate Emissions ..... 2-41
2.1.1.1.6.1.1	Nonradiological Emissions .... 2-42
2.1.1.1.6.1.2	Radioactive Emissions ..... 2-47
2.1.1.1.6.2	Liquid Wastes ..... 2-48
2.1.1.1.6.3	Solid Wastes..... 2-50
2.1.1.1.7	Transportation ..... 2-52
2.1.1.1.8	Financial Surety ..... 2-53
2.1.1.2	Alternative Liquid Waste Disposal Options ..... 2-54
2.1.1.2.1	Evaporation Ponds..... 2-54
2.1.1.2.2	Surface Water Discharge ..... 2-58
2.1.2	No-Action (Alternative 2) ..... 2-59
2.2	Alternatives Eliminated From Detailed Analysis..... 2-59
2.2.1	Conventional Mining and Milling..... 2-59
2.2.2	Conventional Mining and Heap Leaching..... 2-61
2.2.3	Alternative Lixiviants..... 2-61
2.2.4	Alternative Sites..... 2-62
2.2.5	Alternative Well Completion Methods..... 2-62
2.3	Comparison of the Predicted Environmental Impacts ..... 2-62
2.4	Preliminary Recommendation ..... 2-68
2.5	References ..... 2-69
3	DESCRIPTION OF THE AFFECTED ENVIRONMENT ..... 3-1
3.1	Introduction ..... 3-1
3.2	Land Use ..... 3-1
3.2.1	Rangeland ..... 3-3
3.2.2	Hunting and Recreation..... 3-4
3.2.3	Minerals and Energy..... 3-4
3.3	Transportation ..... 3-9
3.4	Geology and Soils ..... 3-12
3.4.1	Geology ..... 3-12
3.4.1.1	The Black Hills (Western South Dakota–Northeastern Wyoming... 3-12
3.4.1.2	Dewey-Burdock Geology ..... 3-15
3.4.2	Soils..... 3-19
3.4.3	Seismology..... 3-19
3.5	Water Resources..... 3-20
3.5.1	Surface Waters..... 3-20
3.5.2	Wetlands and Waters of the United States..... 3-27
3.5.3	Groundwater..... 3-29
3.5.3.1	Regional Aquifer Systems ..... 3-29

## CONTENTS (continued)

Section	Page
3.5.3.2	Aquifer Systems in the Vicinity of the Proposed Dewey-Burdock Project ..... 3-33
3.5.3.3	Uranium-Bearing Aquifers ..... 3-35
3.5.3.4	Other Surrounding Aquifers for Water Supply ..... 3-37
3.5.3.5	Groundwater Quality ..... 3-37
3.6	Ecology ..... 3-39
3.6.1	Terrestrial Ecology ..... 3-41
3.6.1.1	Vegetation ..... 3-41
3.6.1.2	Wildlife ..... 3-43
3.6.1.2.1	Big Game ..... 3-43
3.6.1.2.2	Avian Species ..... 3-44
3.6.1.2.3	Other Mammals, Reptiles, and Amphibians ..... 3-48
3.6.2	Aquatic ..... 3-52
3.6.3	Protected Species ..... 3-54
3.7	Meteorology, Climatology, and Air Quality ..... 3-60
3.7.1	Meteorology and Climatology ..... 3-60
3.7.1.1	Temperature ..... 3-61
3.7.1.2	Wind ..... 3-61
3.7.1.3	Precipitation ..... 3-62
3.7.1.4	Evaporation ..... 3-62
3.7.2	Air Quality ..... 3-62
3.8	Noise ..... 3-67
3.9	Historic and Cultural Resources ..... 3-70
3.9.1	Cultural History ..... 3-71
3.9.1.1	Prehistoric Periods ..... 3-72
3.9.1.2	Protohistoric/Historic Era ..... 3-73
3.9.2	Historic and Cultural Resources Identified ..... 3-73
3.9.2.1	Archaeological Sites ..... 3-74
3.9.2.2	Historic District, Historic Standing Structures, and Bridge Structure ..... 3-79
3.9.3	Places of Cultural Significance ..... 3-81
3.9.4	Tribal Consultation ..... 3-83
3.10	Visual and Scenic Resources ..... 3-84
3.11	Socioeconomics ..... 3-86
3.11.1	Demographics ..... 3-87
3.11.2	Income ..... 3-87
3.11.3	Housing ..... 3-88
3.11.4	Employment Structure ..... 3-89
3.11.5	Local Finance ..... 3-90
3.11.6	Education ..... 3-90
3.11.7	Health and Social Services ..... 3-92
3.12	Public and Occupational Health ..... 3-93
3.12.1	Baseline Radiological Conditions ..... 3-94
3.12.1.1	Soils ..... 3-95
3.12.1.2	Sediment and Surface Water ..... 3-98
3.12.1.3	Air (Ambient Gamma, Radon, and Particulates) ..... 3-99
3.12.1.4	Groundwater ..... 3-100

## CONTENTS (continued)

Section	Page
3.12.1.5 Vegetation, Livestock, and Fish.....	3-101
3.12.2 Public Health and Safety .....	3-102
3.12.3 Occupational Health and Safety .....	3-103
3.13 Waste Management .....	3-104
3.13.1 Liquid Waste Disposal .....	3-105
3.13.2 Solid Waste Disposal.....	3-105
3.14 References .....	3-106
4 ENVIRONMENTAL IMPACTS OF CONSTRUCTION, OPERATIONS, AQUIFER RESTORATION, AND DECOMMISSIONING ACTIVITIES AND MITIGATIVE ACTIONS ..	4-1
4.1 Introduction .....	4-1
4.2 Land Use Impacts .....	4-2
4.2.1 Proposed Action (Alternative 1).....	4-3
4.2.1.1 Disposal Via Class V Injection Wells .....	4-4
4.2.1.1.1 Construction Impacts .....	4-4
4.2.1.1.2 Operations Impacts .....	4-6
4.2.1.1.3 Aquifer Restoration Impacts .....	4-7
4.2.1.1.4 Decommissioning Impacts .....	4-7
4.2.1.2 Disposal Via Land Application .....	4-8
4.2.1.2.1 Construction Impacts .....	4-8
4.2.1.2.2 Operations Impacts .....	4-9
4.2.1.2.3 Aquifer Restoration Impacts .....	4-10
4.2.1.2.4 Decommissioning Impacts .....	4-10
4.2.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-11
4.2.2 No-Action (Alternative 2) .....	4-12
4.3 Transportation Impacts.....	4-12
4.3.1 Proposed Action (Alternative 1).....	4-13
4.3.1.1 Disposal Via Class V Injection Wells .....	4-14
4.3.1.1.1 Construction Impacts .....	4-14
4.3.1.1.2 Operations Impacts .....	4-16
4.3.1.1.3 Aquifer Restoration Impacts .....	4-19
4.3.1.1.4 Decommissioning Impacts .....	4-20
4.3.1.2 Disposal Via Land Application .....	4-22
4.3.1.2.1 Construction Impacts .....	4-22
4.3.1.2.2 Operations Impacts .....	4-23
4.3.1.2.3 Aquifer Restoration Impacts .....	4-25
4.3.1.2.4 Decommissioning Impacts .....	4-26
4.3.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-27
4.3.2 No-Action (Alternative 2) .....	4-27
4.4 Geology and Soils Impact .....	4-28
4.4.1 Proposed Action (Alternative 1).....	4-30
4.4.1.1 Disposal Via Class Injection Wells.....	4-31
4.4.1.1.1 Construction Impacts .....	4-31
4.4.1.1.2 Operations Impacts .....	4-32
4.4.1.1.3 Aquifer Restoration Impacts .....	4-33

## CONTENTS (continued)

Section	Page
4.4.1.1.4 Decommissioning Impacts .....	4-34
4.4.1.2 Disposal Via Land Application .....	4-34
4.4.1.2.1 Construction Impacts .....	4-35
4.4.1.2.2 Operations Impacts .....	4-35
4.4.1.2.3 Aquifer Restoration Impacts .....	4-36
4.4.1.2.4 Decommissioning Impacts .....	4-36
4.4.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-37
4.4.2 No-Action (Alternative 2) .....	4-37
4.5 Water Resources Impacts .....	4-38
4.5.1 Surface Water and Wetlands Impacts .....	4-38
4.5.1.1 Proposed Action (Alternative 1) .....	4-39
4.5.1.1.1 Disposal Via Class V Injection Wells.....	4-40
4.5.1.1.1.1 Construction Impacts.....	4-40
4.5.1.1.1.2 Operations Impacts .....	4-43
4.5.1.1.1.3 Aquifer Restoration Impacts .....	4-44
4.5.1.1.1.4 Decommissioning Impacts.....	4-45
4.5.1.1.2 Disposal Via Land Application.....	4-45
4.5.1.1.2.1 Construction Impacts.....	4-46
4.5.1.1.2.2 Operational Impacts .....	4-46
4.5.1.1.2.3 Aquifer Restoration Impacts .....	4-47
4.5.1.1.2.4 Decommissioning Impacts.....	4-48
4.5.1.1.3 Disposal Via Combination of Class V Injection and Land Application.....	4-48
4.5.1.2 No-Action (Alternative 2).....	4-49
4.5.2 Groundwater Impacts .....	4-49
4.5.2.1 Proposed Action (Alternative 1) .....	4-52
4.5.2.1.1 Disposal Via Class V Injection Wells.....	4-53
4.5.2.1.1.1 Construction Impacts.....	4-53
4.5.2.1.1.2 Operations Impacts .....	4-55
4.5.2.1.1.2.1 Shallow (Near-Surface) Aquifers .....	4-56
4.5.2.1.1.2.2 Operations Impacts to Production and Surrounding Aquifers.....	4-57
4.5.2.1.1.2.3 Operations Impacts to Deep Aquifers Below the Production Aquifers .....	4-63
4.5.2.1.1.3 Aquifer Restoration Impacts .....	4-64
4.5.2.1.1.4 Decommissioning Impacts.....	4-67
4.5.2.1.2 Disposal Via Land Application.....	4-67
4.5.2.1.2.1 Construction Impacts.....	4-67
4.5.2.1.2.2 Operations Impacts .....	4-68
4.5.2.1.2.2.1 Shallow (Near-Surface) Aquifers .....	4-69

## CONTENTS (continued)

Section	Page
4.5.2.1.2.2.2	Operations Impacts to Production and Surrounding Aquifers..... 4-70
4.5.2.1.2.2.3	Operations Impacts to Deep Aquifers Below the Production Aquifers ..... 4-71
4.5.2.1.2.3	Aquifer Restoration Impacts ..... 4-71
4.5.2.1.2.4	Decommissioning Impacts..... 4-72
4.5.2.1.3	Disposal Via Combination of Class V Injection and Land Application..... 4-73
4.5.2.2	No-Action (Alternative 2)..... 4-73
4.6	Ecological Resources Impacts ..... 4-74
4.6.1	Proposed Action (Alternative 1)..... 4-76
4.6.1.1	Disposal Via Class V Injection Wells ..... 4-77
4.6.1.1.1	Construction Impacts ..... 4-77
4.6.1.1.1.1	Construction Impacts on Terrestrial Ecology..... 4-78
4.6.1.1.1.1.1	Construction Impacts on Vegetation ..... 4-78
4.6.1.1.1.1.2	Construction Impacts on Wildlife ..... 4-81
4.6.1.1.1.3	Aquatic Ecology..... 4-90
4.6.1.1.1.4	Threatened and Endangered Species ..... 4-91
4.6.1.1.2	Operations Impacts ..... 4-96
4.6.1.1.3	Aquifer Restoration Impacts ..... 4-97
4.6.1.1.4	Decommissioning Impacts ..... 4-98
4.6.1.2	Disposal Via Land Application ..... 4-99
4.6.1.2.1	Construction Impacts ..... 4-99
4.6.1.2.2	Operations Impacts ..... 4-104
4.6.1.2.3	Aquifer Restoration Impacts ..... 4-105
4.6.1.2.4	Decommissioning Impacts ..... 4-106
4.6.1.3	Disposal Via Combination of Class V Injection and Land Application ..... 4-106
4.6.2	No-Action (Alternative 2) ..... 4-106
4.7	Air Quality Impacts ..... 4-108
4.7.1	Proposed Action (Alternative 1)..... 4-109
4.7.1.1	Disposal Via Class V Injection Wells ..... 1-113
4.7.1.1.1	Construction Impacts ..... 1-113
4.7.1.1.2	Operations Impacts ..... 4-116
4.7.1.1.3	Aquifer Restoration Impacts ..... 4-118
4.7.1.1.4	Decommissioning Impacts ..... 4-120
4.7.1.2	Disposal Via Land Application ..... 4-121
4.7.1.2.1	Construction Impacts ..... 4-121
4.7.1.2.2	Operation Impacts ..... 4-123
4.7.1.2.3	Aquifer Restoration Impacts ..... 4-124
4.7.1.2.4	Decommissioning Impacts ..... 4-125

## CONTENTS (continued)

Section	Page
4.7.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-126
4.7.2 No-Action (Alternative 2) .....	4-127
4.8 Noise Impacts .....	4-127
4.8.1 Proposed Action (Alternative 1).....	4-129
4.8.1.1 Disposal Via Class V Injection Wells .....	4-129
4.8.1.1.1 Construction Impacts .....	4-129
4.8.1.1.2 Operations Impacts .....	4-131
4.8.1.1.3 Aquifer Restoration Impacts .....	4-133
4.8.1.1.4 Decommissioning Impacts .....	4-133
4.8.1.2 Disposal Via Land Application .....	4-134
4.8.1.2.1 Construction Impacts .....	4-134
4.8.1.2.2 Operations Impacts .....	4-135
4.8.1.2.3 Aquifer Restoration Impacts .....	4-136
4.8.1.2.4 Decommissioning Impacts .....	4-137
4.8.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-137
4.8.2 No-Action (Alternative 2) .....	4-138
4.9 Historic and Cultural Resources Impacts .....	4-138
4.9.1 Proposed Action (Alternative 1).....	4-140
4.9.1.1 Disposal Via Class V Injection Wells .....	4-140
4.9.1.1.1 Construction Impacts .....	4-140
4.9.1.1.2 Operations Impacts .....	4-149
4.9.1.1.3 Aquifer Restoration Impacts .....	4-149
4.9.1.1.4 Decommissioning Impacts .....	4-149
4.9.1.2 Disposal Via Land Application .....	4-149
4.9.1.2.1 Construction Impacts .....	4-150
4.9.1.2.2 Operations Impacts .....	4-151
4.9.1.2.3 Aquifer Restoration Impacts .....	4-151
4.9.1.2.4 Decommissioning Impacts .....	4-151
4.9.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-151
4.9.2 No-Action (Alternative 2) .....	4-152
4.10 Visual and Scenic Resources Impacts .....	4-152
4.10.1 Proposed Action (Alternative 1).....	4-154
4.10.1.1 Disposal Via Class V Injection Wells .....	4-154
4.10.1.1.1 Construction Impacts .....	4-154
4.10.1.1.2 Operations Impacts .....	4-155
4.10.1.1.3 Aquifer Restoration Impacts .....	4-156
4.10.1.1.4 Decommissioning Impacts .....	4-156
4.10.1.2 Disposal Via Land Application .....	4-157
4.10.1.2.1 Construction Impacts .....	4-157
4.10.1.2.2 Operations Impacts .....	4-158
4.10.1.2.3 Aquifer Restoration Impacts .....	4-159
4.10.1.2.4 Decommissioning Impacts .....	4-159
4.10.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-160

## CONTENTS (continued)

Section	Page
4.10.2 No-Action (Alternative 2) .....	4-160
4.11 Socioeconomics Impacts.....	4-160
4.11.1 Proposed Action (Alternative 1).....	4-161
4.11.1.1 Construction Impacts .....	4-161
4.11.1.1.1 Demographics .....	4-162
4.11.1.1.2 Income .....	4-163
4.11.1.1.3 Housing .....	4-163
4.11.1.1.4 Employment Structure.....	4-163
4.11.1.1.5 Local Finance.....	4-163
4.11.1.1.6 Education .....	4-164
4.11.1.1.7 Health and Social Services .....	4-164
4.11.1.2 Operations Impacts.....	4-164
4.11.1.2.1 Demographics .....	4-165
4.11.1.2.2 Income .....	4-165
4.11.1.2.3 Housing .....	4-166
4.11.1.2.4 Employment Structure.....	4-166
4.11.1.2.5 Local Finance.....	4-166
4.11.1.2.6 Education .....	4-167
4.11.1.2.7 Health and Social Services .....	4-167
4.11.1.3 Aquifer Restoration Impacts .....	4-167
4.11.1.4 Decommissioning Impacts .....	4-168
4.11.2 No Action (Alternative 2).....	4-168
4.12 Environmental Justice Impacts.....	4-168
4.12.1 Analysis of Impacts.....	4-169
4.12.2 Proposed Action (Alternative 1).....	4-173
4.12.3 No Action (Alternative 2).....	4-175
4.13 Public and Occupational Health and Safety Impacts .....	4-175
4.13.1 Proposed Action (Alternative 1).....	4-177
4.13.1.1 Disposal Via Class V Injection Wells .....	4-177
4.13.1.1.1 Construction Impacts .....	4-177
4.13.1.1.2 Operations Impacts .....	4-179
4.13.1.1.2.1 Radiological Impacts From Normal Operations .....	4-179
4.13.1.1.2.2 Radiological Impacts From Accidents ....	4-182
4.13.1.1.2.3 Nonradiological Impacts From Normal Operations .....	4-185
4.13.1.1.2.4 Nonradiological Impacts From Accidents.....	4-187
4.13.1.1.3 Aquifer Restoration Impacts .....	4-188
4.13.1.1.4 Decommissioning Impacts .....	4-188
4.13.1.2 Disposal Via Land Application .....	4-189
4.13.1.2.1 Construction Impacts .....	4-189
4.13.1.2.2 Operations Impacts .....	4-190
4.13.1.2.2.1 Radiological Impacts From Normal Operations .....	4-190
4.13.1.2.2.2 Radiological Impacts From Accidents ....	4-191

## CONTENTS (continued)

Section	Page
4.13.1.2.2.3 Nonradiological Impacts From Normal Operations .....	4-191
4.13.1.2.2.4 Nonradiological Impacts From Accidents During Operations .....	4-191
4.13.1.2.3 Aquifer Restoration Impacts .....	4-192
4.13.1.2.4 Decommissioning Impacts .....	4-192
4.13.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-193
4.13.2 No-Action (Alternative 2) .....	4-193
4.14 Waste Management Impacts.....	4-193
4.14.1 Proposed Action (Alternative 1).....	4-196
4.14.1.1 Disposal Via Class V Injection Wells .....	4-196
4.14.1.1.1 Construction Impacts .....	4-196
4.14.1.1.2 Operations Impacts .....	4-197
4.14.1.1.3 Aquifer Restoration Impacts .....	4-198
4.14.1.1.4 Decommissioning Impacts .....	4-199
4.14.1.2 Disposal Via Land Application .....	4-202
4.14.1.2.1 Construction Impacts .....	4-202
4.14.1.2.2 Operations Impacts .....	4-202
4.14.1.2.3 Aquifer Restoration Impacts .....	4-203
4.14.1.2.4 Decommissioning Impacts .....	4-204
4.14.1.3 Disposal Via Combination of Class V Injection and Land Application .....	4-207
4.14.1.4 Alternative Wastewater Disposal Options.....	4-208
4.14.1.4.1 Evaporation Ponds.....	4-209
4.14.1.4.2 Surface Water Discharge .....	4-210
4.14.2 No-Action (Alternative 2) .....	4-212
4.15 References .....	4-212
5 CUMULATIVE IMPACTS .....	5-1
5.1 Introduction .....	5-1
5.1.1 Other Past, Present, and Reasonably Foreseeable Future Actions.....	5-1
5.1.1.1 Uranium Recovery Sites .....	5-2
5.1.1.2 Coal Mining .....	5-7
5.1.1.3 Oil and Gas Production.....	5-8
5.1.1.4 Wind Power .....	5-9
5.1.1.5 Transportation Projects.....	5-11
5.1.1.6 Other Mining .....	5-12
5.1.1.7 Environmental Impact Statements as Indicators of Past, Present, and Reasonably Foreseeable Future Actions .....	5-12
5.1.2 Methodology .....	5-12
5.2 Land Use .....	5-18
5.3 Transportation .....	5-21
5.4 Geology and Soils .....	5-25
5.5 Water Resources.....	5-28
5.5.1 Surface Waters and Wetlands.....	5-28
5.5.2 Groundwater.....	5-30



## CONTENTS (continued)

Section	Page
5.6 Ecological Resources.....	5-34
5.6.1 Terrestrial Ecology.....	5-34
5.6.2 Aquatic Ecology.....	5-36
5.6.3 Protected Species .....	5-37
5.7 Air Quality.....	5-38
5.7.1 Non-Greenhouse Gas Emissions .....	5-39
5.7.2 Global Climate Change and Greenhouse Gas Emissions.....	5-42
5.8 Noise .....	5-43
5.9 Historic and Cultural Resources.....	5-45
5.10 Visual and Scenic Resources.....	5-49
5.11 Socioeconomics .....	5-51
5.11.1 Population .....	5-51
5.11.2 Employment.....	5-52
5.11.3 Housing.....	5-53
5.11.4 Education .....	5-53
5.11.5 Public Services .....	5-53
5.11.6 Local Finance.....	5-54
5.12 Environmental Justice .....	5-55
5.13 Public and Occupational Health and Safety .....	5-56
5.14 Waste Management .....	5-58
5.15 References.....	5-61
6 MITIGATION .....	6-1
6.1 Introduction .....	6-1
6.2 Mitigation Measures Proposed by Powertech.....	6-2
6.3 Potential Mitigation Measures Identified by NRC .....	6-12
6.4 References.....	6-18
7 ENVIRONMENTAL MEASURES AND MONITORING PROGRAMS .....	7-1
7.1 Introduction .....	7-1
7.2 Radiological Monitoring.....	7-1
7.2.1 Airborne Radiation Monitoring.....	7-2
7.2.2 Soils and Sediment Monitoring.....	7-2
7.2.3 Vegetation, Food, and Fish Monitoring.....	7-2
7.2.4 Surface Water Monitoring.....	7-4
7.2.5 Groundwater Monitoring.....	7-4
7.3 Physiochemical Monitoring.....	7-4
7.3.1 Wellfield Groundwater Monitoring .....	7-8
7.3.1.1 Background Groundwater Sampling.....	7-8
7.3.1.2 Groundwater Quality Monitoring .....	7-9
7.3.2 Wellfield and Pipeline Flow and Pressure Monitoring .....	7-12
7.3.3 Surface Water Monitoring.....	7-12
7.3.4 Groundwater Monitoring (Project-Wide).....	7-13
7.3.5 Meteorological Monitoring .....	7-14
7.4 Ecological Monitoring.....	7-15
7.4.1 Vegetation Monitoring.....	7-15
7.4.2 Wildlife Monitoring .....	7-16

## CONTENTS (continued)

Section	Page
7.5	Land Application Monitoring ..... 7-16
7.5.1	Groundwater ..... 7-17
7.5.1.1	Alluvial Monitor Wells ..... 7-17
7.5.1.2	Bedrock Aquifer Monitoring ..... 7-20
7.5.1.3	Vadose Zone Monitoring ..... 7-20
7.5.2	Surface Water ..... 7-21
7.5.3	Process-Related Liquid Waste ..... 7-21
7.5.4	Soil ..... 7-21
7.5.5	Biomass ..... 7-22
7.6	Class V Deep Injection Well Monitoring ..... 7-23
7.6.1	Injection Pressure Monitoring ..... 7-24
7.6.2	Annulus Monitoring System ..... 7-24
7.6.3	Mechanical Integrity Demonstration ..... 7-25
7.6.3.1	Internal Mechanical Integrity Demonstration ..... 7-25
7.6.3.2	External Mechanical Integrity Demonstration ..... 7-25
7.6.4	Injection Zone Pressure Monitoring ..... 7-25
7.6.5	Injectate Monitoring ..... 7-25
7.7	References ..... 7-26
8	COST-BENEFIT ANALYSIS ..... 8-1
8.1	Introduction ..... 8-1
8.2	Proposed Action (Alternative 1) ..... 8-1
8.2.1	Benefits of the Proposed Action ..... 8-1
8.2.2	Benefits From Uranium Production ..... 8-3
8.2.3	Costs to the Local Communities ..... 8-3
8.3	Evaluation of Findings of the Proposed Dewey-Burdock Project ..... 8-4
8.4	No Action (Alternative 2) ..... 8-4
8.5	References ..... 8-6
9	SUMMARY OF ENVIRONMENTAL IMPACTS ..... 9-1
9.1	Proposed Action (Alternative 1) ..... 9-1
9.2	No Action (Alternative 2) ..... 9-2
9.3	References ..... 9-2
10	LIST OF PREPARERS ..... 10-1
10.1	U.S. Nuclear Regulatory Commission Contributors ..... 10-1
10.2	Center for Nuclear Waste Regulatory Analyses (CNWRA <sup>®</sup> ) Contributors ..... 10-2
10.3	CNWRA Consultants and Subcontractors ..... 10-3
11	DISTRIBUTION LIST ..... 11-1
11.1	Federal Agency Officials ..... 11-1
11.2	Tribal Government Officials ..... 11-2
11.3	State Agency Officials ..... 11-7
11.4	Local Agency Officials ..... 11-7
11.5	Other Organizations and Individuals ..... 11-8

## CONTENTS (continued)

Section	Page
APPENDIX A—CONSULTATION CORRESPONDENCE .....	A-1
APPENDIX B—ALTERNATE CONCENTRATION LIMITS .....	B-1
APPENDIX C—NONRADIOLOGICAL AIR EMISSIONS ESTIMATES .....	C-1
APPENDIX D—DOCUMENTS RELATED TO HISTORIC AND CULTURAL RESOURCES ..	D-1



## FIGURES

Figure	Page
1.1-1	Geographic Location of the Proposed Dewey-Burdock ISR Project ..... 1-2
2.1-1	Projected Schedule for Construction, Operation, Aquifer Restoration, and Decommissioning Activities for the Proposed Dewey-Burdock ISR Project..... 2-2
2.1-2	Map Showing Location of the Dewey-Burdock ISR Project Within the Nebraska-South Dakota-Wyoming Uranium Milling Region..... 2-4
2.1-3	Dewey-Burdock ISR Project Permit Boundary Showing Dewey Area and Burdock Area, Location of BLM-Managed Land Within Burdock Area, and Position of Parcels of the Black Hills National Forest Bordering the Permit Area ..... 2-5
2.1-4	General Site Plan for the Burdock Central Processing Plant ..... 2-8
2.1-5	General Site Plan for the Dewey Satellite Facility ..... 2-9
2.1-6	Map of Dewey-Burdock ISR Project Area Showing Locations of the Dewey Satellite Facility, Burdock Central Plant, Mapped Ore Bodies, and Proposed Wellfields ..... 2-12
2.1-7	Schematic Diagram of Typical Well Placement..... 2-13
2.1-8	Schematic Diagram of Typical Five-Spot Wellfield Pattern ..... 2-14
2.1-9	Schematic of Typical Injection Well Construction..... 2-19
2.1-10	Location of Deep Injection Wells and Ponds for the Deep Injection Well Disposal Option ..... 2-23
2.1-11	Schematic of the Design of Deep Injection Well ..... 2-24
2.1-12	Location of Land Application Irrigation Areas and Ponds for the Land Application Liquid Waste Disposal Option ..... 2-26
2.1-13	Overall Process Flow Diagram..... 2-32
3.2-1	Map Showing Proposed Dewey-Burdock ISR Project Permit Boundary, Location of BLM-Managed Land, Position of Parcels of the Black Hills National Forest Bordering the Permit Area to the East and North, and Locations of Residences Within the Proposed Permit Area ..... 3-2
3.2-2	Recreational Areas, Federal Lands, Coal Fields, and ISR Facilities Near the Dewey-Burdock ISR Project..... 3-5
3.2-3	Map Showing Locations of Historical Underground and Open Pit Mine Workings in the Eastern Part of the Proposed Dewey-Burdock ISR Project Site ..... 3-7
3.2-4	Map Showing Plugged and Abandoned Oil and Gas Test Wells Within 2 km [1.2 mi] of the Proposed Dewey-Burdock ISR Project Boundary ..... 3-8
3.2-5	Pending Oil and Gas Lease Tracts in Custer County, South Dakota ..... 3-10
3.3-1	Transportation Corridor of the South Dakota-Nebraska-Wyoming Uranium Milling Region Surrounding the Proposed Dewey-Burdock ISR Project ..... 3-11
3.4-1	Outcrop Map of the Inyan Kara Group in the Black Hills of Western South Dakota and Northeastern Wyoming Showing the Locations of Principal Uranium Mining Districts ..... 3-13
3.4-2	Principal Stratigraphic Units in the Black Hills Area of Western South Dakota and Northeastern Wyoming..... 3-14
3.4-3	Map Showing Site Surface Geology Within and Surrounding the Proposed Dewey-Burdock ISR Project Area ..... 3-16
3.4-4	Stratigraphic Units Present at the Proposed Dewey-Burdock ISR Project Site ..... 3-17
3.5-1	Watersheds Within the Nebraska-South Dakota-Wyoming Uranium Milling Region..... 3-21

## FIGURES (continued)

Figure	Page
3.5-2	Map Showing Locations of Beaver Creek, Pass Creek, and the Cheyenne River in Relation to the Proposed Dewey-Burdock ISR Project and Water Quality Sampling Locations for Surface Water and Groundwater ..... 3-22
3.5-3	Map Showing Modeled 100-Year Flood Inundation Boundary of Stream Channels Within the Proposed Dewey-Burdock ISR Project Area ..... 3-24
3.5-4	Schematic Diagram Showing Simplified Hydrogeologic Setting of the Black Hills Area ..... 3-30
3.5-5	Hydrostratigraphic Units Presented at the Proposed Dewey-Burdock ISR Project Site ..... 3-31
3.5-6	Isopach Map of the Fuson Shale at the Proposed Dewey-Burdock ISR Project..... 3-34
3.5-7	Map of the Proposed Dewey-Burdock ISF Project Area Showing the Approximate Locations of Fully Saturated Portions of the Fall River Formation and Chilson Member of the Lakota Formation ..... 3-36
3.6-1	Ecoregions for the Nebraska-South Dakota-Wyoming Uranium Milling Region ..... 3-40
3.6-2	Sage-Grouse Lek Areas for the Nebraska-South Dakota-Wyoming Uranium Milling Region..... 3-45
3.6-3	Occupied Sage-Grouse Leks Near the Proposed Dewey-Burdock ISR Project ..... 3-46
3.7-1	Annual Wind Rose Generated From Onsite Data ..... 3-63
3.12-1	Map Showing Gamma-Ray Count Rates Obtained From GPS-Based Gamma Survey at the Proposed Dewey-Burdock ISR Project Site ..... 3-96
4.5-1	Map Showing Locations Identified as Jurisdictional Wetlands on Ephemeral Tributaries to Beaver Creek and Pass Creek and Their Relation to Proposed Site Facilities in the Proposed Dewey-Burdock ISR Project Area ..... 4-41
4.6-1	Map of Dewey-Burdock Planned Facilities and Vegetation Communities for the Deep Class V Injection Well Disposal Option..... 4-79
4.6-2	Map of Raptor Nest Locations in the Dewey-Burdock Project Area and Planned Facilities for the Deep Class V Injection Well Disposal Option ..... 4-88
4.6-3	Map of Dewey-Burdock Planned Facilities and Vegetation Communities for the Land Application Option ..... 4-100
4.6-4	Map of Raptor Nest Locations in the Dewey-Burdock Project Area and Planned Facilities for the Land Application Option ..... 4-103
4.7-1	Locations Where Nonradiological Combustion Estimates Were Calculated Using the AERMOD Dispersion Model..... 4-111
4.13-1	Map Showing Isodose Contours Obtained From MILDOS Modeling at the Proposed Dewey-Burdock ISR Project Site ..... 4-181
5.1-1	Nebraska-South Dakota-Wyoming Uranium Milling Region General Map With Current and Potential Future Uranium Milling Site Locations..... 5-3
5.1-2	Map Showing the Nebraska-South Dakota-Wyoming Uranium Milling Region and Uranium Milling Sites in the Black Hills Uranium Districts in South Dakota and Wyoming ..... 5-4
5.1-3	Oilfields, Coalfields, and Uranium Occurrences Near the Proposed Dewey-Burdock ISR Project ..... 5-6

## FIGURES (continued)

Figure		Page
5.1-4	Existing, Pending, and Future Projects Within and in the Vicinity of the Proposed Dewey-Burdock ISR Project.....	5-10
5.1-5	Map Showing Proposed New Rail Construction for DM&E's Power River Basin Expansion Project From Wall, South Dakota, West Into the Power River Basin .....	5-13
5.3-1	Map Showing Location of Dewey Road and Pass Creek in Relation to the Proposed Dewey Conveyor Project .....	5-24
7.2-1	Locations of Operational Air Monitoring Stations at the Proposed Dewey-Burdock ISR Project Site .....	7-3
7.2-2	Locations of Operational Surface Water Monitoring Sites.....	7-5
7.2-3	Locations of Operational Domestic and Stock Monitoring Wells.....	7-6
7.2-4	Locations of Operational Groundwater Monitoring Wells .....	7-7
7.5-1	Map of Dewey Land Application Areas Showing the Perimeter of Operational Pollution (POP) and Proposed Alluvial Monitor Wells .....	7-18
7.5-2	Map of Burdock Land Application Areas Showing the Perimeter of Operational Pollution (POP) and Proposed Alluvial Monitor Wells .....	7-19





## TABLES

Table	Page
1.4-1	<i>In-Situ</i> Leach GEIS Range of Expected Impacts in the Nebraska-South Dakota-Wyoming Uranium Milling Region..... 1-4
1.6-1	Environmental Approvals for the Dewey-Burdock Project..... 1-12
2.1-1	Nonradiological Combustion Emission Mass Flow Rate Estimates (Metric Tons per Year) From Stationary Sources for Various Phases of the Proposed Action..... 2-42
2.1-2	Nonradiological Combustion Emission Mass Flow Rate Estimates (Metric Tons per Year) From Mobile Sources for Various Phases of the Proposed Action ..... 2-43
2.1-3	Total (i.e. Peak Year) Nonradiological Combustion Emission Mass Flow Rate (Metric Tons per Year) Estimates for All Phases and Both Stationary and Mobile Sources..... 2-44
2.1-4	Annual Greenhouse Gas Emission Estimates in Metric Tons/Year for the Proposed Action ..... 2-45
2.1-5	Fugitive Emission Mass Flow Rate Estimates (Metric Tons per Year) From Travel on Unpaved Roads ..... 2-45
2.1-6	Onsite Fugitive Emission Mass Flow Rate Estimates (Metric Tons per Year) From Wind Erosion for the Deep Class V Well and Land Application Disposal Options ..... 2-46
2.1-7	Estimated Daily One-Way Vehicle Trips for the Proposed Dewey-Burdock ISR Project Waste Management Options..... 2-53
2.1-8	Comparison of Different Liquid Wastewater Disposal Options..... 2-55
2.3-1	Summary of Impacts for the Proposed Dewey-Burdock ISR Project ..... 2-63
3.2-1	Dwellings Within the Proposed Dewey-Burdock ISR Project Area and a 1.6-km [1.0-mi] Radius of the Proposed Permit Boundary ..... 3-3
3.3-1	Annual Average Daily Traffic in the Vicinity of the Proposed Dewey-Burdock ISR Project ..... 3-12
3.5-1	Summary of Key Parameters and Constituents of Concern in Surface Waters in Streams at the Proposed Dewey-Burdock ISR Project ..... 3-25
3.5-2	Summary of Key Radionuclides of Concern in Surface Waters in Streams at the Proposed Dewey-Burdock ISR Project ..... 3-26
3.5-3	Summary of 2007 Wetland Delineation Survey Results..... 3-28
3.5-4	Baseline Groundwater Samples With Values Exceeding the MCLs for Arsenic (0.01 mg/L), Lead (0.015 mg/L), Uranium (Total, 0.03 mg/L), Ra-226 (Dissolved, 5 pCi/L), and Gross Alpha (Total, 15 pCi/L) ..... 3-38
3.6-1	Total Acreage of Vegetation Communities and Percentage of Permit Area ..... 3-42
3.6-2	Raptor Nest Locations and Activity Observed for the Proposed Dewey-Burdock Project (July 2007–August 2008) ..... 3-47
3.6-3	Breeding Bird Species Observed Within the Proposed Dewey-Burdock Project Area in June 2008 ..... 3-49
3.6-4	Small Mammal Abundance Based on Trappings During Baseline Studies Conducted for the Proposed Dewey-Burdock Project in September 2007 ..... 3-51
3.6-5	Total Lagomorphs Observed During Spotlight Surveys and Abundance Indices Within the Proposed Dewey-Burdock Project in September 2007 ..... 3-51
3.6-6	Threatened or Endangered Animals That Occur in Custer and Fall River Counties or Were Observed in the Proposed Dewey-Burdock ISR Project Area ..... 3-54
3.6-7	BLM Special Status Species That May Occur Within the Project Area ..... 3-55

## TABLES (continued)

Table	Page
3.6-8	Species Tracked by the South Dakota National Heritage Program Observed in the Proposed Dewey-Burdock Project Area ..... 3-57
3.7-1	Site and Regional Monthly Temperature Information in °C ..... 3-61
3.7-2	Annual Air Pollutant Emissions in Metric Tons From the EPA’s National Emission Inventory for Counties in the Black Hills-Rapid City Intrastate Air Quality Control Region ..... 3-64
3.7-3	Existing Conditions—Ambient Air Quality Monitoring Data ..... 3-64
3.7-4	National Ambient Air Quality Standards (NAAQS) ..... 3-65
3.7-5	Prevention of Significant Deterioration (PSD) Class I and Class II Standards ..... 3-66
3.8-1	Noise Abatement Criteria: 1-Hour, A-Weighted Sound Levels in Decibels (dBA) .... 3-69
3.9-1	List of Historic Properties Within or Adjacent to the APE That Are Currently Listed in the NRHP or Sites Recommended Eligible for Listing in the NRHP ..... 3-74
3.9-2	Dewey-Burdock Burial, Cairn, and Other Sites Within or Adjacent to the APE ..... 3-75
3.9-3	List of Historic Structures Within the APE That Are Currently Listed in the NRHP or Structures Eligible for Listing in the NRHP ..... 3-80
3.11-1	Total Population and Percent Growth in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming 2000 to 2020 ..... 3-87
3.11-2	Demographic Profile of the 2010 Population in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming ..... 3-88
3.11-3	2010 Income Information for Counties Within the Region of Influence ..... 3-88
3.11-4	Housing in Custer and Fall Counties, South Dakota, and Weston County, Wyoming ..... 3-89
3.11-5	School Districts in Counties Located Within 80 km [50 mi] of the Proposed Dewey-Burdock ISR Project ..... 3-91
3.11-6	Hospitals, Clinics, and Health Services in Hot Springs, Custer City, and Edgemont, South Dakota, and Newcastle, Wyoming ..... 3-92
3.11-7	Police, Fire Department, and Ambulance Services in Hot Springs, Custer City, and Edgemont, South Dakota, and Newcastle, Wyoming ..... 3-93
3.12-1	Summary Statistics of Gamma-Ray Count Rates in Proposed Land Application Areas, Surface Mine Areas, and the Remainder of the Permit Area at the Proposed Dewey-Burdock Project ..... 3-97
3.12-2	Total Recordable Incidence Rates and Total Lost-Time Incidents for the Category “Other Metal ore Mining” ..... 3-104
4.2-1	Breakdown of Land Disturbance for the Class V Injection Well and Land Application Disposal Options at the Proposed Dewey-Burdock ISR Project ..... 4-4
4.2-2	Significance of Environmental Land Use Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-11
4.3-1	Estimated Daily Traffic on Regional Roads for the Construction Phase of the Proposed Dewey-Burdock ISR Project ..... 4-15
4.3-2	Estimated Daily Traffic on Regional Roads for the Operations Phase of the Proposed Dewey-Burdock ISR Project ..... 4-16
4.3-3	Estimated Daily Traffic on Regional Roads for the Aquifer Restoration Phase of the Proposed Dewey-Burdock ISR Project ..... 4-20
4.3-4	Estimated Daily Traffic on Regional Roads for the Decommissioning Phase of the Proposed Dewey-Burdock ISR Project ..... 4-21

## TABLES (continued)

Table	Page
4.3-5	Significance of Transportation Environmental Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-28
4.4-1	Significance of Geology and Soils Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-38
4.5-1	Significance of Environmental Surface Water and Wetland Impacts for the Proposed Liquid Waste Disposal for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-49
4.5-2	Significance of Environmental Groundwater Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-74
4.6-1	Disturbed Land by Vegetation Type for Dewey-Burdock Deep Class V Injection Well Disposal Option..... 4-78
4.6-2	Reclamation Seed Mixture ..... 4-81
4.6-3	BLM Seasonal Wildlife Stipulations ..... 4-86
4.6-4	Disturbed Land by Vegetation Type for Dewey-Burdock Land Application Option ..... 4-101
4.6-5	Significance of Ecological Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-107
4.7-1	NAAQS Pollutant Concentrations From the Nonradiological Combustion Emissions From Stationary and Mobile Sources for the Peak Year of the Proposed Action ..... 4-112
4.7-2	Significance of the Air Quality Environmental Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-127
4.8-1	Significance of Environmental Noise Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project.... 4-138
4.9-1	Historic Properties Within or Adjacent to the APE That Are Currently Listed in NRHP or Sites Recommended As Eligible for Listing in the NRHP ..... 4-142
4.9-2	Burial, Cairn, and Other Sites Within or Adjacent to APE ..... 4-146
4.9-3	List of Unevaluated Sites Within 76 m [250 ft] of Project Activity Areas..... 4-148
4.9-4	Significance of Historic and Cultural Resources Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project ..... 4-152
4.10-1	Significance of Visual and Scenic Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project.... 4-160
4.12-1	Percent Living in Poverty and Percent Minority in 2010 ..... 4-170
4.12-2	Demographic Profile Comparison of the 2000 and 2010 Population in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming..... 4-172
4.12-3	Housing in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming, in 2010 ..... 4-174
4.13-1	Generic Accident Dose Analysis for ISR Operations ..... 4-183
4.13-2	Significance of Occupational and Public Health and Safety Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project..... 4-194

## TABLES (continued)

Table	Page
4.14-1	Significance of Environmental Impacts on Liquid Waste Management for the Proposed Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project..... 4-208
5.1-1	Past, Existing, and Potential Uranium Recovery Sites in the Nebraska-South Dakota-Wyoming Uranium Milling Region..... 5-5
5.1-2	Status of Permitted Oil and Gas Wells in Fall River and Custer Counties, South and Niobrara and Weston Counties, Wyoming ..... 5-9
5.1-3	Summary of Wind Energy in South Dakota, Wyoming, and Nebraska ..... 5-11
5.1-4	Draft and Final NEPA Documents Related to the Nebraska-South Dakota-Wyoming Uranium Milling Region ..... 5-14
5.1-5	Cumulative Impacts on Environmental Resources..... 5-16
6.2-1	Summary of Mitigation Measures Proposed by Powertech..... 6-2
6.3-1	Summary of Mitigation Measures Identified by NRC..... 6-13
7.3-1	Background Water Quality Parameters and Indicators for Operational Groundwater Monitoring..... 7-9
7.3-2	Impoundments and Stream Sampling Locations Proposed for Operational Monitoring ..... 7-12
7.3-3	Monitor Wells Proposed for Operational Monitoring..... 7-14
7.5-1	Proposed Alluvial Monitor Wells in the Dewey Area ..... 7-20
7.5-2	Proposed Alluvial Monitor Wells in the Burdock Area ..... 7-20
7.5-3	NRC Radionuclide Discharge Limits for Land Application ..... 7-21
7.5-4	Soil Sampling Parameters ..... 7-22
7.5-5	Biomass Sampling Parameters ..... 7-22
7.6-1	Composition Parameters for Class V Injectate Monitoring..... 7-26
8.2-1	Towns Near the Proposed Dewey-Burdock ISR Project..... 8-3
8.3-1	Summary of Costs and Benefits of the Proposed Dewey-Burdock ISR Project..... 8-5
9-1	Summary of Environmental Impacts of the Proposed Action ..... 9-3

## EXECUTIVE SUMMARY

### BACKGROUND

By letter dated August 10, 2009, Powertech (USA), Inc. (Powertech) submitted an application to the U.S. Nuclear Regulatory Commission (NRC) for a new source and byproduct material license for the Dewey-Burdock *In-Situ* Uranium Recovery Project, located in Fall River and Custer Counties, South Dakota. The applicant is proposing to recover uranium using the *in-situ* leach (ISL) [also known as *in-situ* recovery (ISR)] process. The proposed Dewey-Burdock ISR Project would include processing facilities and sequentially developed wellfields sited in two contiguous areas, the Burdock area and the Dewey area. Proposed facilities include a central processing plant in the Burdock area, a satellite facility in the Dewey area, wellfields, Class V deep injection wells and/or land application areas for disposal of liquid wastes, and the attendant infrastructure (e.g., pipelines and surface impoundments).

The Atomic Energy Act of 1954 (AEA), as amended by the Uranium Mill Tailings Radiation Control Act of 1978, authorizes NRC to issue licenses for the possession and use of source material and byproduct material. These statutes require NRC to license facilities, including ISR operations, in accordance with NRC regulatory requirements to protect public health and safety from radiological hazards. Under the NRC environmental protection regulations in 10 CFR Part 51, which implement the National Environmental Policy Act of 1969 (NEPA), preparation of an environmental impact statement (EIS) or supplement to an EIS is required for issuance of a license to possess and use source material for uranium milling [10 CFR 51.20(b)(8)].

In May 2009, the NRC staff issued NUREG–1910, the Generic Environmental Impact Statement for *In-Situ* Leach Uranium Milling Facilities (herein referred to as the GEIS) (NRC, 2009). In the GEIS, NRC assessed the potential environmental impacts from the construction, operation, aquifer restoration, and decommissioning of an ISR facility located in four specified geographic regions of the western United States. The proposed Dewey-Burdock ISR Project is located within the Nebraska-South Dakota-Wyoming Uranium Milling Region identified in the GEIS. The GEIS provides a starting point for NRC NEPA analyses for site-specific license applications for new ISR facilities, as well as for applications that amend or renew existing ISR licenses. This Supplemental EIS (SEIS) incorporates by reference information from the GEIS and also uses information from the applicant's license application and other independent sources to fulfill the requirements set forth in 10 CFR 51.20(b)(8).

This draft SEIS includes the NRC staff analysis that considers and weighs the environmental effects of the proposed action, the environmental impacts of alternatives to the proposed action, and mitigation measures to either reduce or avoid adverse effects. It also includes the NRC staff's preliminary recommendation regarding the proposed action.

This draft SEIS was prepared in cooperation with the U.S. Bureau of Land Management (BLM). BLM has requested to be and is acting as a cooperating agency with NRC to evaluate the impacts of Powertech's Plan of Operations (POO) in accordance with the National Memorandum of Understanding with NRC. BLM manages 97 ha [240 ac] of land within the proposed Dewey-Burdock ISR Project area. Under 43 CFR Part 3809, BLM is required to review the environmental impacts of federal actions on surface lands to assure that there is no "unnecessary or undue degradation of public lands." To fulfill this requirement, the applicant submitted a POO to BLM for the Dewey-Burdock ISR Project on August 26, 2009. Powertech modified the POO and resubmitted it to BLM on January 28, 2011.

## **PURPOSE AND NEED FOR THE PROPOSED ACTION**

NRC regulates uranium milling, as defined in 10 CFR 40.4, including the ISR process, under 10 CFR Part 40, "Domestic Licensing of Source Material." The applicant is seeking an NRC source and byproduct material license to authorize commercial-scale ISR uranium recovery at the proposed Dewey-Burdock ISR Project. The purpose and need for the proposed federal action is to either grant or deny the applicant a license to use ISR technology to recover uranium and produce yellowcake at the proposed project. Yellowcake is the uranium oxide product of the ISR milling process used to produce various products including fuel for commercially operated nuclear power reactors.

This definition of purpose and need reflects the Commission's recognition that, unless there are findings in either the AEA-required safety review or in the NEPA environmental analysis that would lead NRC to reject a license application, NRC has no role in a company's business decision to submit a license application to operate an ISR facility at a particular location.

The BLM purpose and need for the proposed action is to provide for orderly, efficient, and environmentally responsible mining of the uranium resource. The uranium resource is needed to fulfill market demands for this product for power generation and other needs. These public lands are open to mineral entry, and the applicant has filed mining claims on them. Within the proposed project area, Powertech maintains the mining claims associated with 1,708 ha [4,220 ac] of federal minerals that the U.S. Government reserved under the Stock-Raising Homestead Act. The BLM federal decision is to either approve the Powertech-modified POO subject to mitigation included in the license application and this draft SEIS, or deny approval of the POO. BLM's responsibility to respond to the POO establishes the need for the action. The mining claimant has the right to mine and develop the mining claims as long as it can be done without causing unnecessary or undue degradation of the public lands and follows pertinent laws and regulations under 43 CFR Part 3800.

## **THE PROJECT AREA**

The proposed Dewey-Burdock ISR Project is located in Custer and Fall River Counties, South Dakota, within the Great Plains physiographic province on the edge of the Black Hills uplift. The proposed site is located approximately 21 km [13 mi] north-northwest of the city of Edgemont, approximately 64 km [40 mi] west of the city of Hot Springs, and approximately 80 km [50 mi] southwest of the city of Custer. The total land area of the proposed Dewey-Burdock Project is 4,282 ha [10,580 ac]. Sections within the proposed project area are split estate, in which two or more parties own the surface and subsurface mineral rights. The surface rights are both publicly and privately owned. Approximately 4,185 ha [10,340 ac] of land is privately owned, and the remaining 97 ha [240 ac] of surface rights are owned by the U.S. Government and administered by BLM. The subsurface mineral rights are owned by various private entities and federally reserved by the U.S. Government.

The proposed Dewey-Burdock ISR Project will consist of processing facilities and sequentially developed wellfields in two contiguous areas: the Burdock area and the Dewey area. Planned facilities associated with the proposed project include buildings associated with a central processing plant in the Burdock area and a satellite facility in the Dewey area; surface impoundments; wellfields and their associated infrastructure (e.g., wells, header houses, and pipelines); Class V deep injection wells and/or land application areas for disposal of liquid wastes; and access roads. The applicant estimated that the land surface area that would be

1 affected by proposed ISR operations would be approximately 98 ha [243 ac] if Class V deep  
2 injection wells alone are used to dispose of process-related liquid wastes and approximately  
3 566 ha [1,398 ac] if land application alone is used to dispose of liquid wastes.

#### 4 **IN-SITU RECOVERY PROCESS**

5  
6  
7 During the ISR process, an oxidant-charged solution, called a lixiviant, is injected into the  
8 production zone aquifer (uranium ore body) through injection wells. Typically, a lixiviant  
9 uses native groundwater (from the production zone aquifer), carbon dioxide, and sodium  
10 carbonate/bicarbonate, with an oxygen or hydrogen peroxide oxidant. As the lixiviant circulates  
11 through the production zone, it oxidizes and dissolves the mineralized uranium, which is present  
12 in a reduced chemical state. The resulting uranium-rich solution is drawn to recovery wells by  
13 pumping and then transferred to a processing facility via a network of pipelines, which may be  
14 buried just below the ground surface. At the processing facility, the uranium is removed from  
15 solution (typically via ion exchange). The resulting barren solution is then recharged with the  
16 oxidant and reinjected to recover more uranium.

17  
18 During production, the uranium recovery solution continually moves through the aquifer from  
19 injection wells to recovery wells. These wells can be arranged in a variety of geometric patterns  
20 depending on the location and orientation of the ore body, aquifer permeability, and operator  
21 preference. Wellfields are typically designed in a five-spot or seven-spot pattern, with each  
22 recovery (i.e., production) well located inside a ring of injection wells. Monitoring wells are  
23 installed in the production zone aquifer and surround the wellfield pattern area. Monitoring  
24 wells are screened (i.e., open to allow water to enter) in the appropriate stratigraphic horizon  
25 to detect the potential migration of lixiviant away from the production zone. Monitor wells are  
26 also installed in the overlying and underlying aquifers to detect the potential vertical  
27 migration of lixiviant outside the production zone. The uranium that is recovered from the  
28 solution is processed, dried into yellowcake, packaged into NRC- and U.S. Department of  
29 Transportation (USDOT)-approved 208-L [55-gal] steel drums, and trucked offsite to a licensed  
30 conversion facility.

31  
32 Once production is complete, the production zone groundwater is restored to NRC-approved  
33 groundwater protection standards, which are protective of the surrounding groundwater. The  
34 site is decommissioned according to an NRC-approved decommissioning plan and in  
35 accordance with NRC-approved standards. Once decommissioning is approved, the site may  
36 be released for public use.

#### 37 **ALTERNATIVES**

38  
39  
40 The NRC environmental review regulations that implement NEPA in 10 CFR Part 51 require  
41 NRC to consider reasonable alternatives, including the No-Action alternative, to a proposed  
42 action. The NRC staff considered a range of alternatives that would fulfill the underlying  
43 purpose and need for the proposed action. From this analysis, a set of reasonable alternatives  
44 was developed, and the impacts of the proposed action were compared with the impacts that  
45 would result if a given alternative was implemented. This SEIS evaluates the potential  
46 environmental impacts of the proposed action and the No-Action alternative and also considers  
47 alternative wastewater disposal options to the proposed action. Under the No-Action  
48 alternative, the applicant would not construct and operate ISR facilities at the proposed site.  
49 Other alternatives considered at the proposed Dewey-Burdock ISR Project site but eliminated  
50 from detailed analysis include conventional mining and milling, conventional mining and heap

1 leach processing, alternative lixiviants, alternative site locations, and alternative well completion  
2 methods. These alternatives were eliminated from detailed study because they either would not  
3 meet the purpose and need of the proposed project or would cause greater environmental  
4 impacts than the proposed action. This SEIS also discusses alternative wastewater disposal  
5 options (evaporation ponds and surface water discharge) that were not included in the  
6 proposed action.

## 8 **SUMMARY OF ENVIRONMENTAL IMPACTS**

10 This draft SEIS includes the NRC staff analysis that considers and weighs the environmental  
11 impacts from the construction, operation, aquifer restoration, and decommissioning of ISR  
12 operations at the proposed Dewey-Burdock ISR Project site and the No-Action alternative. This  
13 draft SEIS also describes mitigation measures for the reduction or avoidance of potential  
14 adverse impacts that (i) the applicant has committed to in its NRC license application, (ii) will be  
15 required under other federal and state permits or processes, or (iii) are additional measures  
16 NRC staff identified as having the potential to reduce environmental impacts but that the  
17 applicant did not commit to in its application. The draft SEIS uses the assessments and  
18 conclusions reached in the GEIS in combination with site-specific information to assess and  
19 categorize impacts.

21 As discussed in the GEIS and consistent with NUREG-1748 (NRC, 2003), the significance of  
22 potential environmental impacts is categorized as follows:

24 **SMALL:** The environmental effects are not detectable or are so minor that they will  
25 neither destabilize nor noticeably alter any important attribute of the resource.

27 **MODERATE:** The environmental effects are sufficient to alter noticeably, but not  
28 destabilize, important attributes of the resource.

30 **LARGE:** The environmental effects are clearly noticeable and are sufficient to  
31 destabilize important attributes of the resource.

33 Chapter 4 of this draft SEIS provides the NRC evaluation of the potential environmental impacts  
34 from the construction, operation, aquifer restoration, and decommissioning of the proposed  
35 Dewey-Burdock ISR Project. The significance of impacts from the ISR facility lifecycle is listed  
36 next, followed by a summary of impacts by environmental resource area and ISR phase for the  
37 proposed action.

### 39 **Impacts by Resource Area and ISR Facility Phase**

#### 41 **Land Use**

43 **Construction:** Impacts will be SMALL. If deep well disposal via Class V injection wells alone is  
44 used to dispose of liquid wastes, approximately 98 ha [243 ac] or 2.3 percent of the proposed  
45 project area will be disturbed by the construction phase. If land application alone is used to  
46 dispose of liquid wastes, the construction phase will disturb approximately 566 ha [1,398 ac] or  
47 13.2 percent of the proposed project area. Topsoil will be stripped and stockpiled to build  
48 surface facilities, develop the initial wellfields and the attendant infrastructure, and construct  
49 access roads. Livestock grazing and recreational activities will be excluded from fenced areas  
50 surrounding the central plant, satellite facility, surface impoundments, and wellfields.



1 Operation: Impacts will be SMALL. Land use impacts during the operations phase will be  
2 limited to the wellfields and will be similar to, or less than, those during the construction phase.  
3 Wellfields will be sequentially developed resulting in the disturbance of approximately 57 ha  
4 [140 ac]. Land disturbance and access restrictions will result from drilling new wells and  
5 constructing additional header houses and pipelines. Livestock grazing and recreational  
6 activities will continue to be restricted from the central plant, satellite facility, surface  
7 impoundments, and wellfields. Potential land application areas may also be fenced to control  
8 livestock access.

9  
10 Aquifer Restoration: Impacts will be SMALL. Land use impacts will be similar to, or less than  
11 those described for the operations phase. Land use impacts will decrease as fewer wells and  
12 pump houses are used and overall equipment traffic and use diminish. Access to wellfields  
13 and surface facilities will continue to be restricted. No additional land will be disturbed to  
14 construct facilities.

15  
16 Decommissioning: Impacts will be SMALL to MODERATE. Land use impacts during the  
17 decommissioning phase will be similar to those experienced during the construction phase.  
18 Decommissioning the buildings, wellfields, storage ponds, and access roads and removing  
19 potentially contaminated soil will result in a temporary, short-term increase in land-disturbing  
20 activities. Upon completion of the plugging and abandonment of wells, the soil will be  
21 returned to areas in the wellfield where it had been removed and reseeded. At the end of  
22 decommissioning, because the reclaimed land will be released for other uses and no longer  
23 restricted, the land use impact in disturbed areas will be MODERATE until vegetation becomes  
24 reestablished. After vegetation is reestablished in reclaimed areas, the land will be returned to  
25 a condition that can support a variety of land uses; therefore, the impact will be SMALL.

## 26 **Transportation**

27  
28  
29 Construction: Impacts will be SMALL to MODERATE. Dewey Road, the road nearest the  
30 proposed site, will experience a sixteenfold increase in daily vehicle traffic during the ISR  
31 construction phase. This increase in traffic will accelerate degradation of road surfaces,  
32 increase the generation of dust, and increase the potential for traffic accidents and wildlife or  
33 livestock kills. The well-traveled regional roads will not be significantly impacted by the  
34 construction traffic.

35  
36 Operation: Impacts will be SMALL to MODERATE. Dewey Road, the road nearest the  
37 proposed site, will experience a fivefold increase in daily vehicle traffic during the ISR  
38 operations phase. This increase in traffic will accelerate degradation of road surfaces, increase  
39 the generation of dust, and increase the potential for traffic accidents and wildlife or livestock  
40 kills. Additionally, the transport of yellowcake product, hazardous materials, uranium-loaded  
41 resins from the Dewey Unit to the Burdock Unit, and wastes could result in spills or leakage if an  
42 accident occurred; however, this risk was determined to be low and will be further limited by  
43 compliance with existing NRC and USDOT transportation regulations and the implementation of  
44 best management practices (BMPs) for containing leakage and spills.

45  
46 Aquifer Restoration: Impacts will be SMALL. Transportation impacts will be less than those  
47 estimated for the construction and operation phases because the need to transport yellowcake  
48 product, hazardous materials, and uranium-loaded resins between units will decrease as aquifer  
49 restoration progressed. The decrease in the supply shipments, waste shipments, and employee

1 commuting (because fewer workers will be involved) will reduce the potential for spills or  
2 leakage from accidents.  
3

4 Decommissioning: Impacts will be SMALL. Transportation impacts will be less than those  
5 during the construction and operation phases because the transport of yellowcake product and  
6 processing chemicals will end during decommissioning. Access roads will either be reclaimed  
7 or left in place for future use. Waste shipments will increase temporarily, but will still represent a  
8 small contribution to daily traffic. Fewer workers will be employed, further reducing the potential  
9 transportation impact during this phase.

## 10 **Geology and Soils**

11 Construction: Impacts will be SMALL. Earthmoving activities associated with construction of  
12 the Burdock central plant and Dewey satellite plant facilities, access roads, wellfields, pipelines,  
13 and surface impoundments will include topsoil clearing and land grading. Topsoil removed  
14 during these activities will be stored and reused later to restore disturbed areas. The limited  
15 areal extent of the construction area, the soil stockpiling procedures, the implementation of  
16 BMPs, the short duration of the construction phase, and mitigative measures such as  
17 reestablishment of native vegetation will further minimize the potential impact on soils.  
18

19 Operation: Impacts will be SMALL. The operation phase will not remove rock matrix or  
20 structure and will not dewater production zone aquifers. Therefore, no significant matrix  
21 compression or ground subsidence is expected. The occurrence of potential spills during  
22 transfer of uranium-bearing lixiviant to and from the Burdock central plant and Dewey satellite  
23 facility will be mitigated by implementing onsite standard procedures and by complying with  
24 NRC requirements for spill response and reporting of surface releases and cleanup of any  
25 contaminated soils. The U.S. Environmental Protection Agency (EPA) will determine the  
26 suitability of deep geologic formations for deep Class V disposal of liquid waste before issuing a  
27 underground injection control (UIC) permit for Class V injection wells. Treated wastewater  
28 disposed of in Class V injection wells will be required to meet release standards as referenced  
29 in 10 CFR Part 20, Subparts D and K and Appendix B. Potential soil contamination in  
30 proposed land application areas will be mitigated by implementing soil collection and monitoring  
31 procedures. Treated wastewater applied to land application areas will be required to meet NRC  
32 release limit criteria, as referenced in 10 CFR Part 20, Appendix B, and applicable state  
33 groundwater quality standards under a Groundwater Discharge Permit (GDP) issued by South  
34 Dakota Department of Environmental and Natural Resources (SDDENR).  
35  
36  
37

38 Aquifer Restoration: Impacts will be SMALL. During aquifer restoration, the processes of  
39 groundwater sweep and groundwater transfer will not remove rock matrix or structure. The  
40 formation groundwater pressure within the extraction zone will be decreased during restoration  
41 as groundwater is removed to ensure the direction of groundwater flow is into the wellfields to  
42 reduce the potential for lateral migration of constituents. However, the change in groundwater  
43 pressure will not result in collapse of overlying rock strata as it is supported by the rock matrix of  
44 the formation. The potential impact to soils from spills, leaks, and land application of treated  
45 wastewater will be comparable to that described for the operations phase. The NRC  
46 requirements for spill response and recovery and routine monitoring programs will also apply.  
47

48 Decommissioning: Impacts will be SMALL. Disruption or displacement of soils will occur during  
49 dismantling of the facilities and reclamation of the land; however, the disturbed lands will be

1 restored to their preextraction land use. Topsoil will be reclaimed and the surface regraded to  
2 the original topography.

### 3 4 **Surface Waters and Wetlands**

5  
6 Construction: Impacts will be SMALL. The occurrence of surface water at the proposed  
7 Dewey-Burdock site is limited, and surface water flow in channels is intermittent. The applicant  
8 will construct ISR processing and support facilities on level areas and outside the 100-year  
9 floodplain. National Pollutant Discharge Elimination System (NPDES) permits issued by  
10 SDDENR will set limits to control the amount of pollutants that can enter surface water bodies.  
11 Implementation of a storm water pollution management plan (SWMP) will control storm water  
12 runoff during construction and ensure that surface water runoff from disturbed areas meets  
13 NPDES permit limits. U.S. Army Corps of Engineers permits under Section 404 of the Clean  
14 Water Act will be required before conducting work in jurisdictional wetlands identified in the  
15 project area.

16  
17 Operation: Impacts will be SMALL. The applicant's SDDENR-approved NPDES permit and  
18 SWMP will be in place to mitigate impacts to surface water from erosion, runoff, and  
19 sedimentation. The applicant will implement an emergency response plan to identify and clean  
20 up accidental spills and leaks. Processing facilities and chemical and fuel storage tanks will  
21 have secondary containment to contain potential spills. Operations will create liquid wastes that  
22 will be contained in radium-settling and storage ponds for eventual Class V injection well  
23 disposal and/or land application. Radium settling and storage ponds will be constructed with  
24 liners, underdrains, and leak detection systems. Liquid waste applied to land application areas  
25 will be required to meet NRC release limit criteria for radiological contaminants, as referenced in  
26 10 CFR Part 20, Appendix B. SDDENR will require liquid waste applied to land application  
27 areas to meet applicable state discharge requirements under a GDP.

28  
29 Aquifer Restoration: Impacts will be SMALL. Impacts will be similar to those during the  
30 operations phase because the same infrastructure will be used and the same activities will be  
31 conducted. The applicant's SDDENR-approved NPDES permit and SWMP will be in place to  
32 mitigate impacts to surface water from erosion, runoff, and sedimentation. Restoration of  
33 groundwater aquifers will create wastewater that will be contained in radium settling and storage  
34 ponds for eventual Class V injection well disposal and/or land application. Radium settling and  
35 storage ponds will be constructed with liners, underdrains, and leak detection systems. Treated  
36 wastewater applied to land application areas will be required to meet NRC release limit criteria  
37 for radiological contaminants, as referenced in 10 CFR Part 20, Appendix B. SDDENR will  
38 require wastewater applied to land application areas to meet applicable state discharge  
39 requirements under a GDP.

40  
41 Decommissioning: Impacts will be SMALL. The impacts will be similar to those during the  
42 construction phase. Activities to cleanup, recontour, and reclaim the land surface during  
43 decommissioning will mitigate long-term impacts to surface water. The applicant's SDDENR-  
44 approved NPDES permit and SWMP will be in place to mitigate impacts to surface water from  
45 erosion, runoff, and sedimentation.

### 46 47 **Groundwater**

48  
49 Construction: Impacts will be SMALL. The primary impact to groundwater during the  
50 construction phase will be from the consumptive use of groundwater, introduction of drilling

1 fluids into the environment during well installation, and from surface spills of fuels and  
2 lubricants. The applicant is required to obtain water appropriation use permits from SDDENR  
3 prior to withdrawing water from aquifers. During well installation, drilling fluids (mud) will have  
4 the potential to impact surficial aquifers; however, all wells will undergo mechanical integrity  
5 tests of the casing and therefore ensure against well leakage prior to entering service. Impacts  
6 to groundwater from surface spills of fuels and lubricants will be mitigated by the applicant's  
7 implementation of BMPs and by following a spill prevention program that will require an  
8 immediate cleanup response to prevent soil contamination or infiltration to groundwater.

9  
10 Operation: Impacts will be SMALL. The operations phase may impact near-surface (alluvial)  
11 aquifers, production zone aquifers containing the orebodies and surrounding aquifers, and deep  
12 aquifers below the ore production zone used for the disposal of liquid wastes.

13  
14 Alluvial aquifers are separated from production zone and surrounding aquifers by thick aquitards  
15 (confining units) and, therefore, are not hydraulically connected to production zone and  
16 surrounding aquifers. In addition, alluvial aquifers do not serve as a water supply for domestic  
17 use or livestock. The impacts from spills and leaks will be SMALL. The applicant's leak  
18 detection and cleanup program will include rapid response and remediation to minimize impacts  
19 to soils and groundwater. Liquid waste applied to land application areas will be required to meet  
20 NRC release limit criteria for radiological contaminants, as referenced in 10 CFR Part 20,  
21 Appendix B and applicable state discharge requirements under a GDP issued by SDDENR.

22  
23 The applicant has committed to removing and replacing existing domestic wells drawing water  
24 from production zone aquifers within the project area from private use prior to ISR operations.  
25 In addition, the applicant will monitor all domestic wells within 2 km [1.2 mi] of the project  
26 boundary during operations and replace these wells in the event of significant drawdown or  
27 degradation of water quality. Water levels in affected wells will recover with time after ISR  
28 operations and aquifer restoration activities are complete.

29  
30 The establishment of an inward hydraulic gradient during wellfield operations along with the  
31 applicant-installed groundwater monitoring network to detect potential vertical and horizontal  
32 excursions will limit the potential for undetected lixiviant excursions that could degrade  
33 groundwater quality. Because the ore production zones are overlain and underlain by  
34 impermeable shale layers, this further ensures the hydraulic isolation of the ore production  
35 zones, which helps to limit potential groundwater contamination in surrounding aquifers.

36  
37 Liquid wastes generated from operation of the proposed Dewey-Burdock ISR Project will be  
38 disposed of via Class V deep well injection, land application, or a combination of Class V deep  
39 well injection and land application. The groundwater in deep formations targeted for Class V  
40 deep well injection must not be a potential underground source of drinking water. Class V  
41 injection wells will be permitted in accordance with the EPA Underground Injection Control  
42 Program. Liquid wastes injected into Class V injection wells may not be classified as hazardous  
43 under the Resource Conservation and Recovery Act. NRC will require the liquid waste pumped  
44 into Class V injection wells to be treated and monitored to verify it meets NRC release  
45 standards in 10 CFR Part 20, Subparts D and K and Appendix B.

46  
47 Aquifer Restoration: Impacts will be SMALL to MODERATE. Groundwater restoration will be  
48 initiated once a wellfield is no longer being used to produce uranium. Larger withdrawals will  
49 produce larger drawdowns in production aquifers during aquifer restoration, resulting in a  
50 greater impact on yields of nearby wells. As with operations, the applicant will monitor all

1 domestic wells within 2 km [1.2 mi] of the project boundary during aquifer restoration and  
2 replace these wells in the event of significant drawdown or degradation of water quality. Water  
3 levels in affected wells will recover with time after ISR operations and aquifer restoration  
4 activities are complete. Natural recovery and the well monitoring measures established by the  
5 applicant will reduce impacts to nearby wells, ensuring the long-term environmental impact from  
6 consumptive use will be SMALL.

7  
8 During aquifer restoration, hydraulic control for the former production zone will be maintained;  
9 this will be accomplished by maintaining an inward hydraulic gradient through a production  
10 bleed. During aquifer restoration activities, water will be pumped from the wellfield (without  
11 reinjection), resulting in an influx of “fresh” groundwater into the affected (mined) portion of the  
12 aquifer. Hydraulic connection (leakage) between production aquifers (Fall River and Chilson  
13 aquifers) through the intervening confining unit (Fuson Shale) in the Burdock area may impact  
14 aquifer restoration. The Fall River aquifer is hydraulically connected to abandoned open pit  
15 mines in the Burdock area. Water in the abandoned open pit mines has elevated dissolved  
16 uranium and gross alpha concentrations exceeding EPA-regulated maximum concentration  
17 levels. If contaminants are drawn into production zones within the Chilson aquifer from  
18 abandoned open pit mines through the hydraulically connected Fall River aquifer during aquifer  
19 restoration, the impacts will be MODERATE.

20  
21 During the aquifer restoration phase, disposal of liquid wastes via Class V injection wells, land  
22 application, or a combination of Class V injection wells and land application will occur as  
23 described for ISR operations. The goal of aquifer restoration will be to restore groundwater  
24 quality in the ore production zone to Commission-approved background conditions under  
25 10 CFR Part 40, Appendix A, Criterion 5B(5). If the aquifer cannot be restored to background  
26 conditions, then NRC will require that either the production zone be returned to maximum  
27 contaminant levels in 10 CFR Part 40, Appendix A, Table 5C or to NRC-approved alternate  
28 concentration limits. Postrestoration groundwater quality will be protective of public health and  
29 the environment.

30  
31 Decommissioning: Impacts will be SMALL. The potential impact to groundwater quality during  
32 decommissioning and reclamation is comparable to that described in the construction phase.  
33 Groundwater consumptive use will be less than that of the operation and restoration phases. All  
34 monitoring, injection, and production wells will be plugged and abandoned in accordance with  
35 UIC program requirements. Wells will be filled with cement and clay to ensure groundwater  
36 does not flow through the abandoned wells. Abandoned wells will be properly isolated from the  
37 flow domain. NRC will review and approve the wellfield restoration efforts to ensure that  
38 restoration standards were followed and public health and safety is protected.

### 39 40 Ecological Resources

41  
42 Construction: Impacts will be SMALL to MODERATE. Construction disturbance under current  
43 development plans, which require vegetative removal, will affect approximately 98 ha [243 ac] if  
44 deep well injection is used to dispose of treated wastewater or approximately 566 ha [1,398 ac]  
45 if land application or a combination of deep well injection and land application is used to dispose  
46 of treated wastewater. Some habitat loss or alteration, displacement of wildlife, and mortality  
47 due to encounters with vehicles or heavy equipment will occur, though wildlife species will likely  
48 disperse from the area once construction commences. Following recommended fencing and  
49 power line construction designs will minimize impediments to game and avian movement.  
50 Mitigation will control the introduction and spread of undesirable and invasive, nonnative plants;

1 reduce the likelihood of injury or mortality to wildlife; and ensure no loss of aquatic habitat.  
2 Impacts to wildlife and habitat will be minimized with mitigation measures and the timely  
3 reseeding of disturbed areas following construction. Any trees with raptor nests will not be  
4 removed, and following U.S. Fish and Wildlife Service (FWS) and South Dakota Game Fish and  
5 Parks (SDGFP) seasonal noise, vehicular traffic, and human proximity guidelines will help to  
6 ensure the continued nesting success of area raptors. No federally threatened or endangered  
7 species are known to occur within the proposed project area. Impacts to state-protected  
8 species will not noticeably affect species' populations within the vicinity of the proposed  
9 project site.

10  
11 Operation: Impacts will be SMALL to MODERATE. Ecological impacts due to noise, vehicles,  
12 structures, and the presence of humans will be similar to, but less than, those experienced  
13 during construction for either disposal option because fewer earthmoving activities will occur.  
14 However, larger areas of habitat will be converted to crops and animals will be disturbed with  
15 irrigation activities during the land application disposal option. The applicant will reseed  
16 disturbed areas with SDDENR- or BLM-approved seed mixtures to restore habitat. Spill  
17 detection and response plans will reduce the potential impact to terrestrial and aquatic species.  
18 Fencing and netting will limit wildlife access to liquid waste holding ponds. Potential conflicts  
19 between active raptor nest sites and project-related activities will continue to be mitigated by  
20 annual raptor monitoring and mitigation plans.

21  
22 Aquifer Restoration: Impacts will be SMALL to MODERATE. Impacts will be similar to those  
23 experienced during the operations phase with no major differences in type or degree of impact.  
24 The existing infrastructure will be used during this phase, and mitigation measures will continue  
25 to apply from the construction and operations phases.

26  
27 Decommissioning: Impacts will be SMALL to MODERATE. Temporary disturbances to land  
28 and soils during decommissioning could displace vegetation and wildlife species that had  
29 recolonized the proposed project area since initiation of ISR activities. Shrubland vegetative  
30 communities will be more difficult to reestablish and achieve full site recovery. The applicant  
31 commits to vegetation reestablishment efforts to be ongoing throughout the ISR facility life  
32 cycle. However, new vegetative growth could be affected by future grazing, droughts, or  
33 intense winters, thus reducing the rate of plant productivity and delaying full recovery,  
34 Revegetation and recontouring will restore habitat previously altered during construction  
35 and operations.

### 36 37 Air Quality

38  
39 Construction: Impacts will be SMALL to MODERATE. The proposed Dewey-Burdock ISR  
40 Project is located in the Black Hills-Rapid City Intrastate Air Quality Control Region, which is  
41 classified as being in attainment for all National Ambient Air Quality Standards (NAAQS)  
42 primary pollutants. Air emissions during the construction phase of the proposed project will  
43 consist primarily of combustion emissions from drill rigs and fugitive road dust. The magnitude  
44 of the pollutant concentrations around the proposed project site from the construction phase  
45 combustion emissions are below NAAQS and Prevention of Significant Deterioration (PSD)  
46 Class II regulatory thresholds. This also holds true for the peak year pollutant emission levels.  
47 The peak year accounts for when all four phases occur simultaneously and represents the  
48 highest amount of emissions the proposed action will generate in any one project year. The  
49 construction phase and peak year fugitive dust concentrations are also below NAAQS and PSD  
50 Class II thresholds. However, the mass of particulate matter generated from fugitive emissions

1 is much greater than that generated from combustion emissions. In addition, these fugitive dust  
2 emission sources are spread out over a large area and tend to generate emissions sporadically.  
3 Due to the level and nature of these fugitive emissions, there is potential for short-term,  
4 intermittent impacts to localized areas in and around the site particularly when vehicles travel on  
5 unpaved roads. Wind Cave National Park, a Class I area located about 47 km [29 mi] northeast  
6 of the proposed project area, has experienced visibility impacts from air pollution. The initial air  
7 dispersion modeling the applicant conducted only considered the area in and around the  
8 proposed site. The applicant committed to perform additional air dispersion modeling before the  
9 final SEIS is prepared (Powertech, 2012). Meanwhile, based on the modeling results from a  
10 similar project, the Dewey-Burdock ISR Project will contribute to visibility impacts at Wind Cave  
11 National Park but the impact magnitude will be minimal.

12  
13 The deep Class V injection well disposal option has more combustion emissions than the land  
14 application option due to the contribution of the deep well drill rig. The land application option  
15 has more fugitive emissions due to the greater amount of land disturbed. However, these  
16 differences are relatively small and NRC staff do not expect to see any appreciable difference in  
17 the overall air emission levels between the two disposal options. Therefore, the impact  
18 magnitudes are expected to be the same.

19  
20 Operation: Impacts will be SMALL to MODERATE. Combustion emission and fugitive dust  
21 emission pollutant levels will be less than those experienced during construction. ISR facilities  
22 are not major point source emitters of regulated pollutants. Combustion emissions in this phase  
23 are basically evenly divided between light duty vehicles and construction and field equipment.  
24 The combustion and fugitive dust emissions around the proposed site will be below NAAQS and  
25 PSD Class II regulatory thresholds. However, due to the level and nature of the fugitive  
26 emissions, there is potential for short-term, intermittent impacts to localized areas in and around  
27 the site particularly when vehicles travel on unpaved roads. The Dewey-Burdock ISR Project  
28 will contribute to visibility impacts at Wind Cave National Park but the impact magnitude will  
29 be minimal.

30  
31 The land application disposal option has more fugitive emissions than the Class V injection well  
32 option due to the greater amount of land disturbed. However, this difference is relatively small  
33 and NRC staff do not expect to see any appreciable difference in the overall air emission  
34 levels between the two disposal options. Therefore, the impact magnitudes are expected to  
35 be the same.

36  
37 Aquifer Restoration: Impacts will be SMALL to MODERATE. Combustion emission and fugitive  
38 emission levels for the aquifer restoration phases are the lowest relative to the other three  
39 phases. For the aquifer restoration phase, combustion emissions are primarily from light duty  
40 vehicles and wind erosion can generate more fugitive emissions than travel on unpaved roads.  
41 Fugitive emissions can result in short-term, intermittent impacts to localized areas. The  
42 proposed project can contribute to visibility impacts at Wind Cave National Park, but the impact  
43 magnitude will be minimal.

44  
45 The land application disposal option can generate up to about twice the amount of fugitive  
46 emissions compared to the Class V injection well disposal option. Although there is some  
47 difference in the overall fugitive dust emissions levels between the two disposal options, the  
48 impact magnitude is expected to be similar.

49

1 Decommissioning: Impacts will be SMALL to MODERATE. The decommissioning phase  
2 pollutant sources and emission levels closely match those from the operation phase. Therefore,  
3 the decommissioning phase will produce the same impact magnitude as the operation phase.  
4 As in the operation phase described previously, NRC staff do not expect to see any appreciable  
5 difference in the overall decommissioning phase air emission levels between the Class V  
6 injection well and land application disposal options.

## 7 8 **Noise** 9

10 Construction: Impacts will be SMALL. Increased traffic, as well as use of drill rigs, heavy  
11 trucks, bulldozers, and other equipment to construct and operate the wellfields, drill wells,  
12 access roads, and build the central plant and satellite facility, will generate noise audible above  
13 ambient (background) levels. The sound from construction activities will return to background  
14 levels at a distance of approximately 305 m [1,000 ft]. Two onsite dwellings will be impacted by  
15 noise above background levels from heavy equipment use. The Daniels residence is within  
16 305 m [1,000 ft] of wellfields B-WF6 and B-WF7 in the Burdock area, and the Beaver Creek  
17 Ranch Headquarters is within 305 m [1,000 ft] of land application areas in the Dewey area.  
18 Increased noise levels at these residences during construction will be short term (1 to 2 years)  
19 and mitigated by using sound abatement controls on operating equipment. Administrative and  
20 engineering controls will be expected to maintain noise levels in work areas below Occupational  
21 Health and Safety Administration (OSHA) regulatory limits and be mitigated by use of personal  
22 hearing protection. Noise impacts to raptors will be mitigated by adhering to FWS and SDGFP  
23 seasonal noise guidelines, locating all planned facilities outside of BLM-recommended buffer  
24 zones of all raptor nests, and following an FWS-approved raptor monitoring and mitigation plan.  
25

26 Operation: Impacts will be SMALL. Impacts from traffic-related noise will be similar to those  
27 during construction. Because wellfields will be developed and operated sequentially, potential  
28 noise impacts at the Daniels residence will be short term (1 to 2 years each for wellfields B-WF6  
29 and B-WF-7). In addition, the Daniels residence will not be occupied year round. Residents at  
30 the Beaver Creek Ranch Headquarters will only be exposed to noise from nearby land  
31 application areas during the growing season (May 11 to September 24). Noise impacts will be  
32 mitigated by using sound abatement controls on operating equipment. The central plant and  
33 satellite facility will generate indoor noise audible to workers. OSHA regulatory limits will be  
34 maintained and mitigated by use of personal hearing protection. Potential noise-related impacts  
35 to active raptor nest sites will continue to be mitigated by adherence to timing and spatial  
36 restrictions within specified distances of active raptor nests as determined by appropriate  
37 regulatory agencies (e.g., FWS, SDGFP, and BLM).  
38

39 Aquifer Restoration: Impacts will be SMALL. Noise impacts will be similar to, or less than,  
40 those experienced during the operations phase. Pumps and other wellfield equipment  
41 contained in buildings would reduce the potential sound impact to an offsite individual. Because  
42 the aquifers in wellfields will be restored sequentially, potential noise impacts at the Daniels  
43 residence will be short term (1 to 2 years each for wellfields B-WF6 and B-WF7). In addition,  
44 the Daniels residence will not be occupied year round. During aquifer restoration, residents at  
45 the Beaver Creek Ranch Headquarters will only be exposed to noise from nearby land  
46 application areas during the growing season (May 11 to September 24). Noise impacts will be  
47 mitigated by using sound abatement controls on operating equipment. Noise impacts from  
48 traffic will be SMALL because there will be fewer vehicular trips than during the operations  
49 phase. Potential noise-related impacts to active raptor nest sites will continue to be mitigated by



1 adherence to timing and spatial restrictions within specified distances of active raptor nests as  
2 determined by appropriate regulatory agencies (e.g., FWS, SDGFP, and BLM).

3  
4 Decommissioning: Impacts will be SMALL. Noise impacts will either be similar to, or less than,  
5 those experienced during the construction phase. Noise during this phase will be temporary,  
6 and when decommissioning and reclamation activities are complete, the noise levels will return  
7 to baseline. Noise impacts from traffic will be SMALL because there will be fewer shipments to  
8 and from the proposed site as decommissioning progressed. Potential noise-related impacts to  
9 active raptor nest sites will continue to be mitigated by adherence to timing and spatial  
10 restrictions within specified distances of active raptor nests as determined by appropriate  
11 regulatory agencies (e.g., FWS, SDGFP, and BLM).

### 12 **Historic and Cultural Resources**

13  
14  
15 Construction: Impacts will be SMALL to LARGE. Archaeological and historic sites may  
16 potentially be disturbed during construction. Within the area of potential effect at the proposed  
17 Dewey-Burdock site, 18 historic sites are either listed in the National Register of Historic Places  
18 (NRHP) or eligible for listing in the NRHP. Based on the proposed location of ISR facilities and  
19 infrastructure, avoidance of 12 of these sites is possible during the construction phase and,  
20 therefore, no impacts are anticipated. Avoidance and mitigation, such as fencing and data  
21 recovery excavations, are recommended for the remaining six NRHP-eligible sites. In addition,  
22 avoidance is recommended for two unevaluated historic burial sites located in proximity to  
23 proposed construction activities until their NRHP eligibility is determined. Avoidance and  
24 mitigation is also recommended for 4 unevaluated site located within 76 m [250 ft] of proposed  
25 wellfields or land application areas.

26  
27 Prior to construction, an agreement between NRC, South Dakota State Historic Preservation  
28 Office (SD SHPO), BLM, interested Native American tribes, the applicant, and other interested  
29 parties will be established outlining the mitigation process for each affected resource. Prior to  
30 construction, the applicant will also develop an Unexpected Discovery Plan that will outline the  
31 steps required if unexpected historical and cultural resources are encountered.

32  
33 Consultation efforts to identify properties of religious and cultural significance to Native  
34 American tribes have not been completed. Thus, NRC cannot determine effects to these  
35 properties at this time. Section 106 consultation between NRC, SD SHPO, BLM, tribal  
36 representatives, and the applicant regarding potential impacts to these sites is ongoing.

37  
38 Operation: Impacts will be SMALL. Minimal impacts will result during the operations phase  
39 because impacts to cultural resources will be mitigated before facility construction and identified  
40 resources will be avoided. If historical or cultural resources are encountered during operations,  
41 the Unexpected Discovery Plan will be implemented. Work would stop in the immediate area,  
42 and appropriate agencies would be notified.

43  
44 Aquifer Restoration: Impacts will be SMALL. Impacts to historical and cultural resources  
45 during the aquifer restoration phase will be similar to operations. Minimal impacts will  
46 result because impacts to cultural resources will be mitigated before facility construction, and  
47 identified resources will be avoided. If historical or cultural resources are encountered during  
48 operations, the Unexpected Discovery Plan will be implemented. Work would stop in the  
49 immediate area, and appropriate agencies would be notified.

50

1 Decommissioning: Impacts will be SMALL. Minimal impacts will result during the  
2 decommissioning phase because impacts to cultural resources will be mitigated prior to facility  
3 construction. If historical or cultural resources are encountered during operations, the  
4 Unexpected Discovery Plan will be implemented. Work would stop in the immediate area, and  
5 appropriate agencies would be notified.  
6

## 7 Visual/Scenic Resources

8

9 Construction: Impacts will be SMALL. During facilities construction, short-term (1 to 2 years)  
10 visual and scenic impacts will result from construction equipment and fugitive dust emissions.  
11 Temporary and short-term visual impacts during the construction period in each wellfield  
12 will result from header house construction, well drilling, and construction of access roads  
13 and electrical distribution lines. Dust suppression and selecting building materials and paint that  
14 complement the natural environment will reduce overall visual and scenic impacts of  
15 project construction. Center pivot irrigation systems in proposed land application areas in the  
16 Dewey area will be visible to travelers on Dewey Road; however, Dewey Road is a lightly  
17 traveled county road with few residences. Proposed activities at the project will be consistent  
18 with the BLM visual classification of this area.  
19

20 Operation: Impacts will be SMALL. Visual impacts will be similar to, or less than, those  
21 experienced during construction. Less heavy machinery will be used, and standard dust control  
22 measures (e.g., water application and speed limits) will be implemented to reduce visual  
23 impacts from fugitive dust. Wellfields will be developed sequentially, and there will be no large  
24 expanse of land undergoing development at one time. Buildings and other structures will be  
25 painted so they blend in to the natural landscape, and power lines and pipelines will be buried  
26 where appropriate. Center pivot irrigation systems in proposed land application areas in the  
27 Dewey area will be visible to travelers on Dewey Road; however, Dewey Road is a lightly  
28 traveled county road with few residences. Proposed activities at the project will be consistent  
29 with the BLM visual classification of this area.  
30

31 Aquifer Restoration: Impacts will be SMALL. Visual impacts will be similar to, or less than,  
32 those experienced during the operations phase. Aquifer restoration activities will use in-place  
33 infrastructure; therefore, no modifications to either scenery or topography will occur. There will  
34 be less vehicular traffic, creating less of a visual impact. The applicant identified mitigation  
35 measures, such as dust suppression, which will be used to further reduce visual impacts.  
36

37 Decommissioning: Impacts will be SMALL. Temporary impacts to the visual landscape will be  
38 comparable to those during the construction phase. Reclamation will return the visual  
39 landscape to baseline contours and will reduce the visual impact by removing buildings and the  
40 associated infrastructure. Implementation of mitigation measures (e.g., dust suppression) will  
41 further reduce the visual impacts from decommissioning.  
42

## 43 Socioeconomics

44

45 Construction: Impacts will be SMALL. Because of the small size of the construction workforce  
46 (86 workers) and because of the short duration of the ISR construction phase (1 to 2 years), the  
47 overall potential socioeconomic impact, including the effects of ISR facility construction on  
48 demographic conditions, income, housing, employment rate, local finance, education, and  
49 health and social services, will be SMALL.  
50

1 Operation: Impacts will be SMALL. Because of the small size of the operations workforce (84  
2 workers), the migration of workers and their families to nearby towns will have a SMALL impact  
3 on demographics. Although wage rates will be higher for Dewey-Burdock employees than for  
4 workers in similar skilled positions in Fall River, Custer, and Weston Counties, the operations  
5 workforce will be small in comparison to the combined labor force in the counties; therefore,  
6 income impacts will be SMALL. The impact on housing will be SMALL because of available  
7 housing in the immediate area surrounding the proposed ISR facility. Operation of the proposed  
8 Dewey-Burdock ISR Project will create new jobs, but because of the small workforce size and  
9 because most skilled workers will be drawn from areas outside of the region of influence,  
10 impacts on employment will not be noticeable. The local economy will experience a SMALL  
11 beneficial impact from the purchasing of local goods and services and an increase in sales and  
12 income tax revenues. An increased demand for schools will have a SMALL impact on  
13 education because the current school systems are not at full capacity and can accommodate  
14 more students. Increased demand for health and social services will have a SMALL impact.

15  
16 Aquifer Restoration: Impacts will be SMALL. Impacts will be less than those experienced  
17 during the operations phase. Fewer workers will be required, which will reduce pressure on  
18 housing, education, and health and social services.

19  
20 Decommissioning: Impacts will be SMALL. Impacts will be less than those during the  
21 construction and operations phases because fewer workers will be required. Demand for  
22 housing, education, and health and social services will also be reduced.

## 23 Environmental Justice

24  
25  
26 All Phases: The percentage of minority populations living in affected block groups in the vicinity  
27 of the proposed Dewey-Burdock ISR Project site in Custer and Fall River Counties in South  
28 Dakota and Weston County in Wyoming does not significantly exceed the percentage of  
29 minority populations recorded at the state and county level and is well below the national level.  
30 Furthermore, the percentage of low-income populations living in affected census tracts in the  
31 vicinity of the proposed project site in Custer, Fall River, and Weston Counties does not  
32 significantly exceed the percentage of low-income populations recorded at the state or county  
33 level. Therefore, there will be no disproportionately high and adverse impacts to minority and  
34 low-income populations from the construction, operation, aquifer restoration, and  
35 decommissioning of the proposed Dewey-Burdock ISR facility.

36  
37 The closest population to the proposed Dewey-Burdock ISR Project that could be impacted by  
38 environmental justice concerns is the Pine Ridge Indian Reservation located approximately 80  
39 km [50 mi] east in Shannon County, South Dakota. Based on 2010 United States Census  
40 Bureau data, this reservation has both minority {greater than 95 percent Native American  
41 (Oglala Sioux Tribe)} and low-income populations. Environmental justice impacts to Native  
42 American tribes living in the vicinity of the proposed project will be no different than those  
43 experienced by other populations. The proposed action may potentially affect certain sites of  
44 religious and cultural significance to Native American tribes; however, the impacts to such sites  
45 could be reduced through mitigation strategies developed through the National Historic  
46 Preservation Act Section 106 consultation process.

## **Public and Occupational Health**

**Construction:** Impacts will be SMALL. Construction activities, including the use of construction equipment and vehicles, will disturb the topsoil and create fugitive dust emissions. Fugitive dust generated from construction activities will be short term (1 to 2 years), and the levels of radioactivity in soils at the proposed project site are low; therefore direct exposure, inhalation, and ingestion of fugitive dust will not result in a radiological dose to workers and the public. Construction equipment will be diesel powered and will exhaust particulate diesel emissions. The potential impacts and potential human exposures from these emissions will be SMALL, because of the short duration of the release and because the emissions will be readily dispersed into the atmosphere.

**Operation:** The radiological impacts from normal operations will be SMALL. Public and occupational exposure rates at ISR facilities during normal operations have historically been well below regulatory limits. Dose assessments using the MILDOS computer code indicate that the 10 CFR Part 20 public dose limit of 1 mSv/yr [100 mrem/yr] will not be exceeded at any property boundary. The remote location of the proposed Dewey-Burdock site and the use of the proposed ISR technology coupled with the applicant procedures to minimize exposure demonstrate that the potential impact on public and occupational health and safety from facility operation will be SMALL. The radiological impacts from accidents will be SMALL for workers (if the applicant's radiation safety and incident response procedures in an NRC-approved radiation protection plan are followed) and SMALL for the public because of the facility's remote location. The nonradiological public and occupational health and safety impacts from normal operations and accidents, due primarily to risk of chemical exposure, will be SMALL if handling and storage procedures are followed.

**Aquifer Restoration:** Impacts will be SMALL. Impacts will be similar to, but less than, those during the operations phase. The reduction or elimination of some operational activities will further reduce the magnitude of potential worker and public health impacts and safety hazards.

**Decommissioning:** Impacts will be SMALL. Impacts will be similar to those experienced during construction. Soil and facility structures will be decontaminated, and lands will be restored to preoperational conditions.

## **Waste Management**

**Construction:** Impacts will be SMALL. Small-scale and incremental wellfield development will generate small volumes of construction waste. Waste will primarily consist of building materials, piping, and other solid wastes. No byproduct material will be generated during construction. Nonhazardous solid waste will be disposed of at a nearby municipal solid waste landfill with available capacity to accommodate estimated construction-phase waste volumes.

**Operation:** Impacts will be SMALL. Liquid byproduct material, including production bleed, waste brine streams from elution and precipitation, resin transfer wash, laundry water, plant wash-down water, and laboratory chemicals will be treated and disposed using Class V injection wells. If a permit cannot be obtained from EPA for Class V injection, the applicant would pursue land application of treated liquid effluent. If the capacity of either method is limited, the applicant will pursue a combination of both Class V injection and land application. Deep well injection in a Class V well requires an EPA permit, and wastes will have to meet EPA permit conditions and NRC effluent discharge limits in 10 CFR Part 20, Appendix B (both would limit potential

1 impacts). Land application will require SDDENR-permitting of discharge water, and the land  
2 application area would be monitored to assess compliance with NRC and SDDENR  
3 requirements that would limit impacts. Solids classified as byproduct material will be sent to a  
4 licensed facility for disposal. A preoperational agreement with a licensed facility to accept  
5 wastes the proposed action generates will avoid capacity impacts. Capacity is available for  
6 disposal of nonradiological, nonhazardous wastes at regional municipal landfills. Capacity will  
7 be sufficient for disposal of low volumes of generated hazardous wastes.

8  
9 Aquifer Restoration: Impacts will be SMALL based on the type and quantity of waste expected  
10 to be generated and the available capacity for disposal. Waste disposal procedures will be the  
11 same as those during the operations phase, resulting in similar impacts. One exception is the  
12 addition of reverse osmosis treatment of aquifer restoration water if a Class V deep disposal  
13 well is used. The applicant proposal includes adequate disposal capacity, and the applicant is  
14 required to comply with EPA Class V disposal permit conditions, NRC effluent limits, and other  
15 NRC safety regulations. Although the wastewater volume could increase during aquifer  
16 restoration activities, this will be offset by the reduction in production capacity from completion  
17 of wellfield production and removal from service.

18  
19 Decommissioning: Impacts will be SMALL to MODERATE. Safe handling, storage, and  
20 disposal of decommissioning wastes will be described in a required decommissioning plan for  
21 NRC review before decommissioning activities begin. A preoperational agreement with a  
22 licensed disposal facility to accept solid byproduct material will ensure that sufficient disposal  
23 capacity will be available at the time of decommissioning. Equipment and building materials  
24 that meet release criteria will be reused, recycled, or disposed as construction waste at a  
25 landfill. The available local landfill capacity may be insufficient to accommodate all  
26 decommissioning nonhazardous solid waste from the proposed Dewey Burdock ISR Project.  
27 The potential impacts on waste management resources will depend on the long-term status of  
28 the existing local landfill resources. If the capacity of the Newcastle or Custer-Fall River landfills  
29 is expanded prior to project decommissioning, the impacts to local landfills will be SMALL. If  
30 capacity at either landfill is not expanded prior to the Dewey-Burdock decommissioning, the  
31 NRC staff conclude the Newcastle landfill will have no disposal capacity at the time of  
32 decommissioning. Impacts to the Custer-Fall River landfill are expected to be MODERATE  
33 because the increase in solid waste disposal will more rapidly consume storage capacity during  
34 the last years of the landfill's projected operational life. The disposal of any waste from the  
35 Dewey-Burdock facility in the Rapid City landfill will have a SMALL impact due to the projected  
36 operational life and available capacity of that landfill.

### 37 38 **CUMULATIVE IMPACTS**

39  
40 Chapter 5 of this SEIS provides the NRC evaluation of potential cumulative impacts from  
41 the construction, operations, aquifer restoration, and decommissioning of the proposed  
42 Dewey-Burdock ISR Project considering other past, present, and reasonably foreseeable future  
43 actions. Cumulative impacts from past, present, and reasonably foreseeable future actions  
44 were considered and evaluated in this draft SEIS, regardless of what agency (federal or  
45 nonfederal) or person undertook the action. The NRC staff determined that the SMALL to  
46 MODERATE impacts from the proposed Dewey-Burdock ISR Project are not expected to  
47 contribute perceptible increases to the SMALL to LARGE cumulative impacts, due primarily to  
48 ongoing uranium and oil and gas exploration activities, potential wind energy projects, and  
49 proposed infrastructure and transportation projects.

50

---

## 1 **SUMMARY OF COSTS AND BENEFITS OF THE PROPOSED ACTION**

2  
3 The implementation of the proposed action would generate primarily regional and local costs  
4 and benefits. The regional benefits of building the proposed project would be increased  
5 employment, economic activity, and tax revenues in the region around the proposed site. Costs  
6 associated with the proposed Dewey-Burdock ISR Project are, for the most part, limited to the  
7 immediate area surrounding the site. The NRC staff determined the benefit from constructing  
8 and operating the facility would outweigh the economic, environmental, and social costs.  
9

## 10 **COMPARISON OF ALTERNATIVES**

11  
12 For the No-Action alternative, the applicant would not construct or operate ISR facilities at the  
13 proposed Dewey-Burdock ISR Project site. As a result, no uranium ore would be recovered  
14 from the proposed site. This alternative would result in neither positive nor negative impacts to  
15 any resource area.  
16

## 17 **PRELIMINARY RECOMMENDATION**

18  
19 After weighing the impacts of the proposed action and comparing the alternatives, the NRC  
20 staff, in accordance with 10 CFR 51.71(f), set forth its preliminary NEPA recommendation  
21 regarding the proposed action (issuing a source material license for the proposed Dewey-  
22 Burdock ISR Project). Unless safety issues mandate otherwise, the preliminary NRC staff  
23 recommendation to the Commission related to the environmental aspects of the proposed  
24 action is that a source and byproduct material license for the proposed action be issued as  
25 requested.  
26

27 The NRC staff conclude that the overall benefits of the proposed action outweigh the  
28 environmental disadvantages and costs based on the following:  
29

- 30 • Potential adverse impacts to all environmental resource areas are expected to be  
31 SMALL, with the exception of  
32
  - 33 1. Land use resources during decommissioning. Land disturbance during  
34 decommissioning will be MODERATE until vegetation is reestablished in seeded  
35 areas (see SEIS Sections 4.2.1.1.4, 4.2.1.2.4, and 4.2.1.3).  
36
  - 37 2. Transportation resources during construction and operation. Increases in  
38 traffic during construction and operations will have a MODERATE impact on  
39 Dewey Road, the road nearest the proposed site (see SEIS Sections 4.3.1.1.1,  
40 4.3.1.2.1, 4.3.1.1.2, 4.3.1.2.2, and 4.3.1.3).  
41
  - 42 3. Groundwater resources during aquifer restoration. During aquifer restoration in  
43 the Burdock area, drawdown-induced migration of contaminants into the  
44 production zone (i.e., the Chilson aquifer) from abandoned open pit mines could  
45 adversely affect restoration goals and have a MODERATE impact (see SEIS  
46 Sections 4.5.2.1.1.3, 4.5.2.1.2.3, and 4.5.2.1.3).  
47
  - 48 4. Ecological resources during construction, operations, aquifer restoration, and  
49 decommissioning. Under the land application and combined Class V deep well  
50 disposal and land application options, construction, operations, and aquifer

1 restoration activities would have a MODERATE impact on vegetation, small- to  
2 medium-sized mammals, raptors, nongame and migratory birds, and reptiles (see  
3 SEIS Sections 4.6.1.2.1, 4.6.1.2.2, 4.6.1.2.3, and 4.6.1.3). Under all disposal  
4 options, land-disturbing activities during decommissioning would have a  
5 MODERATE impact on vegetation until it is reestablished (see SEIS  
6 Sections 4.6.1.1.4, 4.6.1.2.4, and 4.6.1.3).

7  
8 5. Air quality during construction, operations, aquifer restoration, and  
9 decommissioning. During all phases of the ISR lifecycle, there will be the  
10 potential for MODERATE air impacts from short-term, intermittent fugitive dust  
11 emissions (see SEIS Sections 4.7.1.1.1 through 4.7.1.1.4, 4.7.1.2.1 through  
12 4.7.1.2.4, and 4.7.1.3).

13  
14 6. Historical and cultural resources during construction. Construction could have a  
15 MODERATE or LARGE impact on 18 historic properties—those sites currently  
16 listed or eligible for listing on the NRHP—and other unevaluated historic, cultural,  
17 and religious properties in the project area (see SEIS Sections 4.9.1.1.1,  
18 4.9.1.2.1, and 4.9.1.3).

19  
20 7. Waste management resources during decommissioning. Impacts from disposal  
21 of nonhazardous solid waste may be MODERATE depending on the long-term  
22 status of existing local landfill resources (see SEIS Sections 4.14.1.1.4  
23 and 4.14.1.2.4).

- 24  
25 • Regarding groundwater, the portion of the aquifer(s) designated for uranium recovery  
26 must be exempted as underground sources of drinking water prior to the start of ISR  
27 operations. Additionally, the applicant will be required to monitor for excursions of  
28 lixiviant from the production zones and to take corrective actions in the event of an  
29 excursion. Prior to operations, the applicant will be required to provide detailed  
30 hydrologic pump test data packages and operational plans for each wellfield at the  
31 proposed project. The applicant will also be required to restore groundwater parameters  
32 affected by ISR operations to levels that are protective of human health and safety.  
33  
34 • The costs associated with the proposed project are, for the most part, limited to the area  
35 surrounding the site.  
36  
37 • The regional benefits of building the proposed project will be increased employment,  
38 economic activity, and tax revenues in the region around the proposed site.  
39

40 This preliminary recommendation is based on NRC staff's independent review of (i) the license  
41 application the applicant submitted; (ii) applicant responses to NRC staff requests for additional  
42 information; (iii) consultation with federal, state, tribal, and local agencies; and (iv) the  
43 assessments summarized in this draft SEIS, including the potential mitigation measures  
44 identified in the license application and this draft SEIS.

## 45 46 **References**

47  
48 10 CFR Part 40. Code of Federal Regulations, Title 10, *Energy*, Part 40. "*Domestic Licensing*  
49 *of Source Material.*" Washington, DC: U.S. Government Printing Office.  
50

- 
- 1 10 CFR Part 51. Code of Federal Regulations, Title 10, *Energy*, Part 51. “*Environmental*  
2 *Protection Regulations for Domestic Licensing and Related Regulatory Functions.*”  
3 Washington, DC: U.S. Government Printing Office.  
4
- 5 43 CFR Part 3800. Code of Federal Regulations, Title 43, *Public Lands: Interior*, Part 3800.  
6 “*Mining Claims Under the General Mining Laws.*” Washington, DC: U.S. Government  
7 Printing Office.  
8
- 9 43 CFR Subpart 3809. Code of Federal Regulations, Title 43, *Public Lands: Interior*, Subpart  
10 3809. “*Subsurface Management.*” Washington, DC: U.S. Government Printing Office.  
11
- 12 NRC. NUREG–1910, “Generic Environmental Impact Statement for *In-Situ* Leach Uranium  
13 Milling Facilities.” ML091480244, ML091480188. Washington, DC: NRC. May 2009.  
14
- 15 NRC. NUREG–1748, “Environmental Review Guidance for Licensing Actions Associated With  
16 NMSS Programs.” Washington, DC: NRC. August 2003.



## ABBREVIATIONS/ACRONYMS

ACHP	Advisory Council on Historic Preservation
ACL	alternate concentration limit
ADAMS	Agencywide Documents Access and Management System
AEA	Atomic Energy Act
AET, Inc.	American Engineering Testing, Inc.
ALAC	Archaeology Laboratory Augustana College
ALARA	as low as reasonably achievable
AUM	animal unit month
APE	area of potential effect
ARC	Archaeological Research Center
ARPA	Archaeological Resources Protection Act
ARSD	Administrative Rules of South Dakota
ASLB	Atomic Safety and Licensing Board
AWEA	American Wind Energy Association
BGEPA	Bald and Golden Eagle Protection Act
bgs	below ground surface
BHNF	Black Hills National Forest
BLM	U.S. Bureau of Land Management
BMP	best management practice
BNSF	Burlington Northern Santa Fe
CAB	Commission-approved background
CCSDWPC	Custer County, South Dakota, Weed and Pest Control
CFR	<i>U.S. Code of Federal Regulations</i>
CEQ	Council on Environmental Quality
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CESQC	conditionally exempt small quantity generator
CNWRA	Center for Nuclear Waste Regulatory Analyses
cpm	counts per minute
CPP	central processing plant
dba	decibels
DM&E	Dakota Minnesota and Eastern (Railroad)
DOE	U.S. Department of Energy
EFRC	Energy Fuels Resources Corporation
EIA	Energy Information Administration
EIS	environmental impact statement
E.O.	Executive Order
EPA	U.S. Environmental Protection Agency
ESA	Endangered Species Act
ESRI	Environmental Systems Research Institute
FACU	facultative upland
FACW	facultative wet
FHWA	Federal Highway Administration
FR	<i>Federal Register</i>

## ABBREVIATIONS/ACRONYMS (continued)

FRA	Federal Railroad Administration
FWS	U.S. Fish and Wildlife Service
GCRP	U.S. Global Change Research Program
GDP	Groundwater Discharge Permit
GEIS	generic environmental impact statement
GHG	greenhouse gas
GPS	global-positioning-system
HABS	Historic American Buildings Survey
HDPE	high-density polyethylene
ID	well identification
IQR	interquartile range
ISL	<i>in-situ</i> leach
ISR	<i>in-situ</i> recovery
IX	ion exchange
MBTA	Migratory Bird Treaty Act
MCL	maximum contaminant level
MILDOS	computer code
MIT	mechanical integrity test
MOA	Memorandum of Agreement
mya	million years ago
NAAQS	National Ambient Air Quality Standards
NAGPRA	Native American Graves Protection and Repatriation Act
NAU	Rapid City Campus of the National American University
NCRP	National Council on Radiation Protection and Measurements
NEPA	National Environmental Policy Act
NESHAP	National Emission Standards for Hazardous Air Pollutants
NHPA	National Historic Preservation Act of 1966, as amended
NOGCC	Nebraska Oil and Gas Conservation Commission
NPDES	national pollutant discharge elimination system
NPWRC	Northern Prairie Wildlife Research Center
NRC	U.S. Nuclear Regulatory Commission
NRCS	National Resource Conservation Service
NRHP	National Register of Historic Places
OBL	obligate
OMB	Office of Management and Budget
OSHA	Occupational Safety and Health Administration
OTGR	Office of Tribal Government Relations
OW	Open Water
PABJh	Palustrine Aquatic Bed Intermittently Flooded Diked
PEM	Palustrine Emergent
PEMC	Seasonally Flooded
POO	Plan of Operations

## ABBREVIATIONS/ACRONYMS (continued)

POP	Perimeter of Operational Pollution
Powertech	Powertech (USA) Inc.
PRB	Powder River Basin
PSD	Prevention of Significant Deterioration
PUB	Palustrine Unconsolidated Bottom
PUS	Palustrine Unconsolidated Shore
PUSA	Palustrine Unconsolidated Shore Temporarily Flooded
R2EM	Riverine Lower Perennial Emergent
R4SB7	Riverine Intermittent Streambed Vegetated
R4US	Riverine Intermittent Unconsolidated Streambed
RCRA	Resource Conservation and Recovery Act
RMP	regional management plan
RO	reverse osmosis
ROI	region of influence
ROW	right of way
SDCL	South Dakota Codified Law
SDDENR	South Dakota Department of Environment and Natural Resources
SDDOA	South Dakota Department of Agriculture
SDDOE	South Dakota Department of Education
SDDOH	South Dakota Department of Health
SDDOL	South Dakota Department of Labor
SDDOT	South Dakota Department of Transportation
SDDLRL	South Dakota Department of Labor and Regulation
SDDRR	South Dakota Department of Revenue and Regulation
SDGFP	South Dakota Game, Fish, and Parks
SDGS	South Dakota Geological Survey
SDNHP	South Dakota Natural Heritage Program
SDRMP	South Dakota Resource Management Plan
SD SHPO	South Dakota State Historic Preservation Office
SDSMT	South Dakota School of Mines and Technology
SDSU	South Dakota State University
SDWA	Safe Drinking Water Act
SEA	U.S. Department of Transportation Section of Environmental Analysis
SEIS	supplemental environmental impact statement
SER	safety evaluation report
SERP	safety and environmental review panel
SF	satellite facility
SMCL	secondary maximum concentration limit
SNAP	Supplemental Nutrition Assistance Program
SOW	statement of work
SPAW	soil-plant-atmosphere-water
SQR	scenic quality rating
SRI	SRI Foundation
STB	Surface Transportation Board
SUNSI	sensitive unclassified non-safeguards information
SWMP	storm water pollution management plan

## ABBREVIATIONS/ACRONYMS (continued)

TANF	Temporary Assistance for Needy Families
TCP	traditional cultural property
TDS	total dissolved solids
TEDE	total effective dose equivalent
THPO	Tribal Historic Preservation Office
TLD	thermoluminescent dosimeter
TVA	Tennessee Valley Authority
UCL	upper control limit
UDEQ	Utah Department of Environmental Quality
UMTRCA	Uranium Mill Tailings Radiation Control Act
UIC	underground injection control
UPL	upland
USACE	U.S. Army Corps of Engineers
USCB	U.S. Census Bureau
USDA	U.S. Department of Agriculture
USDOT	U.S. Department of Transportation
USDW	underground source of drinking water
USFS	U.S. Forest Service
USGS	U.S. Geological Survey
UXC	The Ux Consulting Company
VRM	Visual Resource Management
WDAI	Wyoming Department of Administration and Information
WDEQ	Wyoming Department of Environmental Quality
WDTI	Western Dakota Technical Institute
WDWS	Wyoming Department of Workforce Services
WGFD	Wyoming Game and Fish Department
WIA	walk-in hunting area
WSDOT	Washington State Department of Transportation
WUS	waters of the United States
WYOGCC	Wyoming Oil and Gas Conservation Commission

# 1 INTRODUCTION

## 1.1 Background

The U.S. Nuclear Regulatory Commission (NRC) and U.S. Bureau of Land Management (BLM) as a cooperating agency prepared this Supplemental Environmental Impact Statement (SEIS) in response to an application Powertech (USA) Inc. (Powertech, or the applicant) submitted on August 10, 2009, to develop and operate the Dewey Burdock *In-Situ* Uranium Recovery (ISR) Project (herein referred to as the Dewey-Burdock ISR Project), located in Custer and Fall River Counties, South Dakota (Powertech, 2009a–c). Figure 1.1-1 shows the geographic location of the proposed project. This site-specific SEIS is a supplement to the Generic Environmental Impact Statement for *In-Situ* Leach Uranium Milling Facilities (herein referred to as the GEIS) prepared in accordance with the process described in GEIS Section 1.8 (NRC, 2009a) and as detailed in Section 1.4.1 of this chapter. The NRC’s Office of Federal and State Materials and Environmental Management Programs prepared this SEIS as required by Title 10, Energy, of the *U.S. Code of Federal Regulations* (10 CFR), Part 51. These regulations implement the requirements of the *National Environmental Policy Act of 1969* (NEPA), as amended (Public Law 91-190), which requires the Federal Government to assess the potential environmental impacts of major federal actions that may significantly affect the human environment.

BLM has requested to be and is acting as a cooperating agency with NRC to evaluate the impacts of the Plan of Operations for the proposed Dewey-Burdock ISR Project in accordance with the National Memorandum of Understanding between the two agencies. BLM manages 97 ha [240 ac] of land within the proposed Dewey-Burdock ISR Project area. The applicant controls the locatable mineral rights on this land through Federal Lode Claims and secures access to mineral rights through the terms of the 1872 Mining Law. Under 43 CFR Part 3800, Mining Claims Under the General Mining Laws, BLM is required to review the environmental impacts of federal actions on surface lands to assure that there is no “unnecessary or undue degradation of public lands.” To fulfill this requirement, the applicant submitted a Plan of Operations to BLM for the Dewey-Burdock ISR Project on August 26, 2009. The Plan of Operations was modified and resubmitted to BLM on January 28, 2011.

The GEIS (NRC, 2009a) used the terms “*in-situ* leach (ISL) process” and “11e.(2) byproduct material” to describe the uranium milling technology and waste stream generated by the uranium recovery process. For the purposes of this SEIS, “*in-situ* recovery” or ISR is synonymous with “*in-situ* leach” or ISL. This SEIS also uses the term “byproduct material” instead of “11e.(2) byproduct material” to describe the waste stream generated by this milling process to be consistent with the definition in 10 CFR 40.4.

## 1.2 Proposed Action

On August 10, 2009, the applicant initiated the proposed action by submitting an application for an NRC source and byproduct material license to construct and operate an ISR facility at the proposed Dewey-Burdock ISR Project site and to conduct aquifer restoration, site decommissioning, and reclamation activities. Based on the application, the NRC’s federal decision is to either grant or deny the license. The applicant’s proposal is discussed in detail in SEIS Section 2.1.1.

1  
2

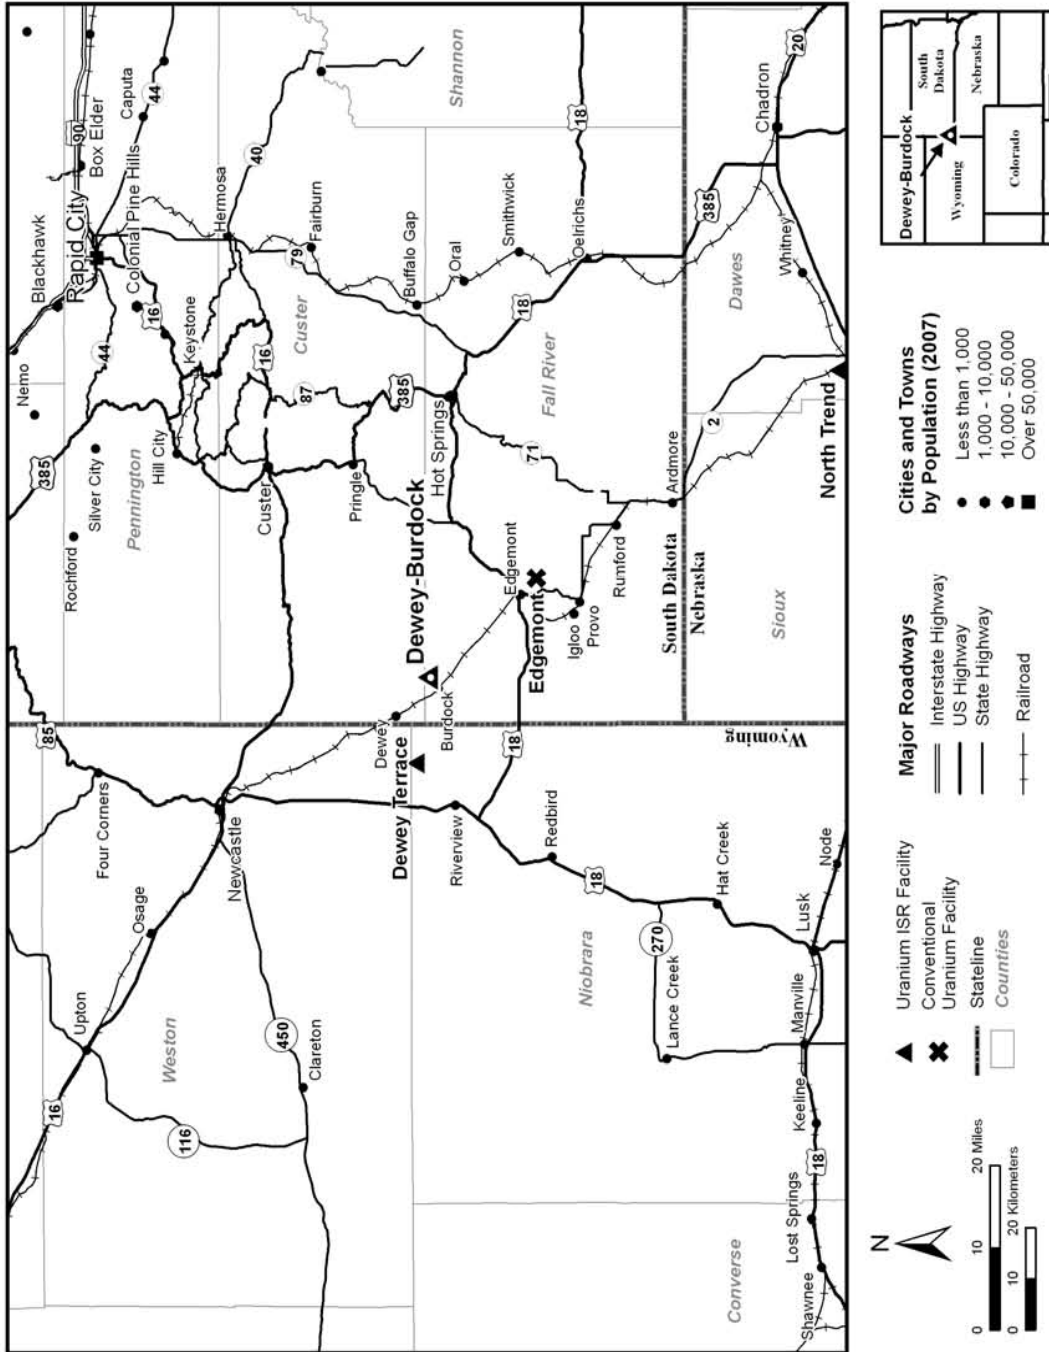


Figure 1.1-1. Geographic Location of the Proposed Dewey-Burdock ISR Project. Sources: Environmental Systems Research Institute (2008); Powertech (2009b).

### 1.2.1 BLM's Proposed Action

The BLM's federal decision is to either approve the applicant's Plan of Operations (submitted August 26, 2009, modified and resubmitted January 28, 2011) subject to mitigation included in the license application and this draft SEIS or deny approval of the Plan of Operations if it is found that the applicant's proposal would result in unnecessary or undue degradation of the public lands. The total amount of BLM managed land expected to be disturbed by the applicant over the life of the proposed project is 4.7 ha [11.63 ac]. This disturbance includes an access road, overhead power lines, operational wellfields, groundwater monitoring wells, and underground pipeline installations.

### 1.3 Purpose of and Need for the Proposed Action

NRC regulates uranium milling, including the ISR process, under 10 CFR Part 40, Domestic Licensing of Source Material. The applicant is seeking an NRC source material license to authorize commercial-scale ISR uranium recovery at the proposed Dewey-Burdock ISR Project site. The purpose and need for the proposed federal action is to provide an option that allows the applicant to recover uranium and produce yellowcake slurry at the proposed project site. Yellowcake is the uranium oxide product of the ISR milling process that is used to produce various products including fuel for commercially operated nuclear power reactors.

This definition of purpose and need reflects the Commission's recognition that, unless there are findings in the safety review required by the *Atomic Energy Act of 1954* (AEA), as amended, or findings in the NEPA environmental analysis that would lead NRC to reject a license application, NRC has no role in a company's business decision to submit a license application to operate an ISR facility at a particular location.

#### 1.3.1 BLM's Purpose and Need

The BLM purpose and need for the proposed action is to provide for orderly, efficient, and environmentally responsible mining of the uranium resource. The uranium resource is needed to fulfill market demands for this product for power generation and other needs. The proposed Dewey-Burdock ISR Project area contains BLM-administered public lands open to mineral entry, and the applicant has filed mining claims on them. In addition, the applicant maintains the unpatented mining claims associated with 1,708 ha [4,220 ac] of federal minerals that the U.S. Government reserved under the Stock-Raising Homestead Act. The BLM federal decision is either to approve the revised applicant Plan of Operations subject to mitigation included in the license application and this draft SEIS, or deny approval of the Plan of Operations. BLM's responsibility to respond to the applicant's Plan of Operations establishes the need for the action. The mining claimant (Powertech) has the right to mine and develop the mining claims as long as it can be done without causing unnecessary or undue degradation and is in accordance with pertinent laws and regulations under 43 CFR Part 3800.

### 1.4 Scope of the SEIS

NRC staff prepared this SEIS to analyze the potential environmental impacts (i.e., direct, indirect, and cumulative impacts) of the proposed action and of reasonable alternatives to the proposed action. The scope of this SEIS considers both radiological and nonradiological (including chemical) impacts associated with the proposed action and its alternatives. This SEIS also considers unavoidable adverse environmental impacts, the relationship between

1 short-term uses of the environment and long-term productivity, and irreversible and irretrievable  
2 commitments of resources.

3

#### 4 **1.4.1 Relationship to the GEIS**

5 As discussed in Section 1.1, this SEIS is a supplement to the GEIS published as a final report in  
6 May 2009. The final GEIS assessed the potential environmental impacts associated with the  
7 construction, operation, aquifer restoration, and decommissioning of an ISR facility that could  
8 be located in four specific geographic regions of the western United States. The proposed  
9 Dewey-Burdock ISR Project is located in the Nebraska-South Dakota-Wyoming Uranium Milling  
10 Region, one of the regions considered in the GEIS. Table 1.4-1 summarizes the expected  
11 environmental impacts by resource area in the Nebraska-South Dakota-Wyoming Uranium  
12 Milling Region based on the GEIS analyses (NRC, 2009a).

13

**Table 1.4-1. *In-Situ* Leach GEIS Range of Expected Impacts in the  
Nebraska-South Dakota-Wyoming Uranium Milling Region**

<b>Resource Area</b>	<b>Construction</b>	<b>Operation</b>	<b>Aquifer Restoration</b>	<b>Decommissioning</b>
Land Use	S	S	S	S to M
Transportation	S to M	S to M	S to M	S
Geology and Soils	S	S	S	S
Surface Water	S to M	S to M	S to M	S to M
Groundwater	S	S to L	S to M	S
Terrestrial Ecology	S to M	S	S	S
Aquatic Ecology	S	S	S	S
Threatened and Endangered Species	S to L	S	S	S
Air Quality	S	S	S	S
Noise	S to M	S to M	S to M	S
Historical and Cultural Resources	S to L	S	S	S
Visual and Scenic Resources	S	S	S	S
Socioeconomics	S to M	S to M	S	S to M
Public Health and Safety	S	S to M	S	S
Waste Management	S	S	S	S

Source: NRC (2009a)  
S: SMALL Impact, M: MODERATE Impact, L: LARGE Impact

14

15

16



1 Scoping provides an opportunity for the public and other stakeholders to identify key issues and  
2 concerns they believe should be addressed in an EIS. The NRC staff consider the GEIS  
3 scoping process to be sufficient for the purposes of defining the scope of this SEIS.  
4 NRC accepted public comments on the scope of the GEIS from July 24, 2007  
5 to November 30, 2007, and held three public scoping meetings in Albuquerque and Gallup,  
6 New Mexico, and Casper, Wyoming to aid in this effort. In addition, NRC held eight public  
7 meetings to solicit comments on the draft GEIS, after its publication in July 2008. One public  
8 meeting was held in Spearfish, South Dakota, on August 25, 2008. Comments on the draft  
9 GEIS were accepted from July 28, 2008 until November 8, 2008. Public comments made  
10 during the scoping meetings and on the draft GEIS are available on the NRC website  
11 (<http://www.nrc.gov/reading-rm/adams.html>). Transcripts of the scoping meetings and draft  
12 GEIS comment meeting held in South Dakota are available on the NRC web site  
13 (<http://www.nrc.gov/materials/uranium-recovery/geis/pub-involve-process.html>). The scoping  
14 summary report was provided in GEIS Appendix A, and GEIS Appendix G provides responses  
15 to public comments (NRC, 2009a).

16  
17 This SEIS was prepared to fulfill the requirement in 10 CFR 51.20(b)(8) and 43 CFR 3809 to  
18 prepare either an Environmental Impact Statement (EIS) or supplement to an EIS for the  
19 issuance of a source material license for an ISR uranium recovery facility (NRC, 2009a) and for  
20 BLM's approval of the applicant's Plan of Operations. The GEIS provides a starting point for the  
21 NRC/BLM NEPA analyses for site-specific license applications for new ISR facilities, as well as  
22 applications to amend or renew existing ISR licenses. As discussed in the GEIS, the GEIS  
23 provides criteria for each environmental resource area to assess the significance level of  
24 impacts (i.e., SMALL, MODERATE, or LARGE).

25  
26 NRC staff applied these criteria to the site-specific conditions at the proposed Dewey-Burdock  
27 ISR Project. This SEIS tiers from or incorporates by reference the GEIS relevant information,  
28 findings, and conclusions concerning environmental impacts. The extent to which NRC  
29 incorporates GEIS impact conclusions depends on the consistency between (i) the applicant's  
30 proposed facility, activities, and conditions at the proposed Dewey-Burdock ISR Project and  
31 (ii) the general ISR facility description and activities in the GEIS and information or conclusions  
32 in the GEIS. NRC determinations of potential environmental impacts and the discussion of  
33 which GEIS impact conclusions were incorporated by reference are discussed in SEIS  
34 Chapter 4. GEIS Section 1.8.3 describes the use of tiering and incorporation by reference in  
35 using the GEIS for environmental reviews of site-specific ISR license applications  
36 (NRC, 2009a).

#### 37 38 **1.4.2 Public Participation Activities**

39 As part of the preparation of this SEIS, NRC staff met with federal, state, tribal, and local  
40 agencies and authorities over the course of an expanded visit to the proposed Dewey-Burdock  
41 ISR Project site and vicinity in November and December 2009 (NRC, 2009b). Attempts to  
42 arrange for an initial briefing meeting with the Oglala Sioux Tribe were unsuccessful at that time.  
43 The purpose of these meetings was to gather additional site-specific information to support the  
44 NRC staff's environmental review and to help the staff determine consistency between  
45 site-specific and local information and corresponding information in the GEIS. As part of  
46 information gathering, the NRC staff also contacted potentially interested Native American tribes  
47 and local authorities, entities, and public interest groups in person, by email, and by telephone.  
48 Additionally, in January and February 2010, the NRC staff published an advertisement in six  
49 newspapers circulated near the proposed project area (Rapid City Journal, Edgemont Herald

1 Tribune, Custer Chronicle, Hot Springs Star, Lakota Country Times, and the Native Sun)  
2 soliciting public comments on the proposed action; five comments were received from this effort.  
3

4 NRC published a Notice of Opportunity for Hearing on the Dewey-Burdock ISR Project license  
5 application in the Federal Register (FR) on January 5, 2010 (75 FR 467). Hearing requests  
6 from Consolidated Petitioners and the Oglala Sioux Tribe were received on March 8, 2010, and  
7 April 6, 2010, respectively (Consolidated Petitioners, 2010; Oglala Sioux Tribe, 2010). NRC  
8 also published a Notice of Intent to prepare this SEIS on January 20, 2010 (75 FR 3261).  
9

### 10 **1.4.3 Issues Studied in Detail**

11 To meet its NEPA obligations related to its review of the Dewey-Burdock ISR Project license  
12 application, the NRC staff conducted an independent, detailed, and comprehensive evaluation  
13 of the potential environmental impacts from construction, operation, aquifer restoration, and  
14 decommissioning of an ISR facility at the proposed site and from reasonable alternatives. As  
15 discussed in GEIS Section 1.8.3, the GEIS (i) evaluated the types of environmental impacts that  
16 may occur from ISR uranium milling facilities, (ii) identified and assessed generic impacts (the  
17 same or similar) at all ISR facilities (or those with specified facility or site characteristics), and  
18 (iii) identified the scope of environmental impacts that needed to be addressed in site-specific  
19 environmental reviews. Therefore, although all of the environmental resource areas identified in  
20 the GEIS would be addressed in site-specific reviews, certain resource areas would require a  
21 more detailed analysis, because the GEIS determined a range in the significance of impacts  
22 (e.g., SMALL to MODERATE, SMALL to LARGE) could result, depending upon site-specific  
23 conditions (see Table 1.4-1).  
24

25 Based on the GEIS analysis, this SEIS provides a more detailed analysis of the following  
26 resource areas:  
27

- 28 • Land use
- 29 • Transportation
- 30 • Surface water and wetlands
- 31 • Groundwater
- 32 • Geology and soils
- 33 • Terrestrial ecology
- 34 • Threatened and endangered species
- 35 • Noise
- 36 • Visual and scenic resources
- 37 • Historical and cultural resources
- 38 • Socioeconomics
- 39 • Public health and safety
- 40 • Waste management  
41

42 In addition, site-specific analyses of cumulative impacts and environmental justice concerns that  
43 were not part of the GEIS are presented in this SEIS. NRC also considers the effects  
44 the proposed action could have on global climate; the analysis estimates the potential effect of  
45 the facility's greenhouse gas emissions based on a 10-year licensing period.  
46

#### 1 1.4.4 Issues Outside the Scope of the SEIS

2 Some issues and concerns raised during the public scoping process on the GEIS (NRC, 2009a,  
3 Appendix A) were determined to be outside the scope of the GEIS. These issues and concerns  
4 (e.g., general support or opposition for uranium milling, impacts associated with conventional  
5 uranium milling, comments regarding the alternative sources of uranium feed material,  
6 comments regarding energy sources, requests for compensation for past mining impacts, and  
7 comments regarding the credibility of NRC) are also outside the scope of this SEIS.  
8

#### 9 1.4.5 Related NEPA Reviews and Other Related Documents

10 A number of NEPA documents (environmental assessments) and EISs and other documents  
11 were reviewed and used in the development of this SEIS. The related NEPA reviews are  
12 described next.  
13

14 **NUREG–1910, Generic Environmental Impact Statement for *In-Situ* Leach Uranium Milling**  
15 **Facilities, Final Report (NRC, 2009a).** As previously discussed, this GEIS was prepared to  
16 assess the potential environmental impacts from the construction, operation, aquifer restoration,  
17 and decommissioning of an ISR facility located in one of four different geographic regions of the  
18 western United States, including the Nebraska-South Dakota-Wyoming Uranium Milling Region  
19 where the proposed Dewey-Burdock ISR Project would be located. The environmental analysis  
20 in this SEIS both tiers and incorporates by reference from the GEIS. [Agencywide Documents  
21 Access and Management System (ADAMS) Accession No. Volume 1, ML091480244;  
22 Volume II, ML091480188]  
23

24 **NUREG–0706, Final Generic Environmental Impact Statement on Uranium Milling**  
25 **(NRC, 1980).** This EIS provided a detailed evaluation of the impacts and effects of  
26 anticipated conventional uranium milling operations in the United States through the year 2000,  
27 including analysis of tailings disposal programs. NUREG–0706 concluded the environmental  
28 impacts of underground mining and conventional milling would be more severe than using  
29 ISR technology. As described in SEIS Section 2.2.1, conventional mining and milling were  
30 considered, but eliminated from the detailed analysis at the proposed Dewey-Burdock ISR  
31 Project. (ADAMS Accession No. Volume I, ML032751663; Volume II, ML032751667;  
32 Volume III, ML032751669)  
33

34 **NUREG–1508, Final Environmental Impact Statement To Construct and Operate the**  
35 **Crownpoint Uranium Solution Mining Project, Crownpoint, New Mexico (NRC, 1997).**  
36 This EIS evaluated the use of ISR technology at the Church Rock and Crownpoint sites at  
37 Crownpoint, New Mexico. Alternative uranium mining methods were not evaluated, because  
38 the uranium ore located at the proposed sites was too deep to be extracted economically and  
39 the final EIS concluded underground mining would have more significant environmental impacts  
40 than ISR recovery. (ADAMS Accession No. ML082170248)  
41

42 **Environmental Impact Statement for the Moore Ranch ISR Project in Campbell County,**  
43 **Wyoming, Supplement to the GEIS (NUREG–1910, Supplement 1), Final Report (NRC,**  
44 **2010a).** NRC prepared this EIS as a supplement to the GEIS based on its review of an  
45 application from Energy Metals Corporation (now Uranium One) for a source material license for  
46 the proposed Moore Ranch ISR Project, which is located in Campbell County, Wyoming. The  
47 proposed Moore Ranch ISR project would encompass 2,877 ha [7,110 ac] of privately owned  
48 and State of Wyoming lands. However, Uranium One estimates that only 61 ha [150 ac] would  
49 be disturbed as a result of the project. (ADAMS Accession No. ML102290470)

1 **Draft Environmental Impact Statement for the Dewey Conveyor Project (BLM, 2009).**

2 BLM, in cooperation with the U.S. Forest Service (USFS), prepared this draft EIS to evaluate  
3 the environmental impacts of the proposed Dewey Conveyor Project. GCC Dacotah Inc.  
4 proposed the Dewey Conveyor Project as a means to transport limestone along a 10.6-km  
5 [6.6-mi] conveyor from a future quarry location in Custer County, South Dakota, to a rail  
6 load-out facility near Dewey, South Dakota. The proposed route of the conveyor crosses  
7 BLM-administered public lands and USFS-administered National Forest System lands north of  
8 the proposed Dewey-Burdock ISR Project. (ADAMS Accession No. ML12209A089)

9  
10 **South Dakota Resource Management Plan, Final Environmental Impact Statement**  
11 **(BLM, 1985).** BLM prepared the South Dakota Resource Management Plan (SDRMP) to

12 address future management options for 113,584 ha [280,672 ac] of public land surface and  
13 2,142,455 ha [5,294,122 ac] of federal mineral estate BLM administers through its South Dakota  
14 Resource Area Office in Belle Fourche, South Dakota. The SDRMP focuses on alternative  
15 approaches to management of vegetation apportionment and land actions. The plan  
16 includes resource management options for lands within and in the vicinity of the proposed  
17 Dewey-Burdock ISR Project area in Fall River and Custer Counties. The proposed  
18 Dewey-Burdock ISR Project is in conformance with the SDRMP as discussed on pages 14  
19 and 44–47 of the SDRMP (ADAMS Accession No. ML12209A099)

20  
21 **Newcastle Resource Management Plan (BLM, 2000).** BLM prepared this resource  
22 management plan to provide management direction for approximately 118,236 ha [292,168 ac]  
23 of BLM-administered public land surface and 687,507 ha [1,698,866 ac] of federal mineral  
24 estate the Newcastle Field Office administers in Crook, Niobrara, and Weston Counties in  
25 northeast Wyoming. The plan includes resource management objectives and management  
26 actions for lands adjacent to the proposed Dewey-Burdock ISR Project in Niobrara and  
27 Weston Counties. (ADAMS Accession No. ML12209A101)

28  
29 **Proposed Resource Management Plan and Final Environmental Impact Statement for**  
30 **Public Lands Administered by the Bureau of Land Management Rawlins Field Office**  
31 **(BLM, 2008).** BLM prepared this resource management plan to direct the management of

32 1.4 million ha [3.5 million ac] of BLM-administered public surface land and 1.8 million ha  
33 [4.5 million ac] of BLM-administered federal mineral estate in Albany, Carbon, Laramie, and  
34 Sweetwater Counties in southwestern Wyoming. The plan established guidance, objectives,  
35 policies, and management actions for public lands the Rawlins Field Office administers.  
36 (ADAMS Accession No. ML12209A103)

37  
38 **Black Hills National Forest Land and Resource Management Plan (USFS, 1997).** USFS  
39 prepared this plan to provide guidance for all resource management activities in the Black Hills  
40 National Forest. The plan (i) establishes goals, objectives, standards, and guidelines for  
41 resource management and (ii) describes resource management practices, levels of resource  
42 production, people-carrying capacities, and the availability and suitability of lands for  
43 resource management. (ADAMS Accession No. ML12209A110)

44  
45 **Black Hills National Forest, Phase I Amendment: 1997 Land and Resource Management**  
46 **Plan Environmental Assessment (USFS, 2001).** USFS prepared a Phase I Amendment to  
47 the Black Hills National Forest Land and Resource Management Plan to address short-term  
48 concerns with sensitive species that occur or potentially occur in the Black Hills. (ADAMS  
49 Accession No. ML12209A113)

50

1 **Black Hills National Forest, Phase II Amendment: 1997 Land and Resource Management**  
2 **Plan Final Environmental Impact Statement (USFS, 2005).** USFS prepared a Phase II  
3 Amendment to the Black Hills National Forest Land and Resource Management Plan to address  
4 long-term concerns with sensitive species that occur or potentially occur in the Black Hills. The  
5 Phase II Amendment includes provisions to conserve species and protect communities,  
6 property, and other forest values by reducing fire and insect hazards. (ADAMS Accession  
7 No. ML12209A121)  
8

9 **Updated Land and Resource Management Plan for the Nebraska National Forest (USFS,**  
10 **2009).** USFS prepared this revised management plan to provide guidance for all resource  
11 management activities in the Nebraska National Forest. The plan describes management  
12 standards and guidelines, resource management practices, levels of resource production,  
13 people-carrying capacities, and the availability and suitability of lands for resource  
14 management. The Nebraska National Forest encompasses the Buffalo Gap National Grassland  
15 of southwestern South Dakota, which is located south of the proposed Dewey-Burdock ISR  
16 Project area. (ADAMS Accession No. ML12209A127)  
17

18 **NRC's Safety Evaluation Report (SER) for the Dewey-Burdock Project, Fall River and**  
19 **Custer Counties, South Dakota.** The NRC staff are preparing an SER for the Dewey-Burdock  
20 license application. In the SER, the NRC staff evaluates whether the licensee's proposed  
21 action can be accomplished in accordance with the applicable regulations in 10 CFR Part 20;  
22 10 CFR Part 40; and 10 CFR Part 40, Appendix A. Areas of review include the applicant's  
23 proposed facility design and operations, health and environmental protection, and accident  
24 analyses. The SER also provides the staff's analysis of the applicant's initial estimate of the  
25 funding needed to complete site decommissioning and reclamation. The SER will soon be  
26 available for public review.  
27

28 **Environmental Impact Statement for the Nichols Ranch ISR Project in Campbell and**  
29 **Johnson Counties, Wyoming, Supplement to the GEIS (NUREG-1910, Supplement 2),**  
30 **Final Report (NRC, 2011a).** NRC prepared this EIS as a supplement to the GEIS based on its  
31 review of an application from Uranerz Energy Corporation for a source material license for the  
32 proposed Nichols Ranch ISR Project, which is located in Campbell and Johnson Counties,  
33 Wyoming. The proposed Nichols Ranch ISR project would encompass approximately 1,251 ha  
34 [3,091 ac] of privately owned land and approximately 113 ha [280 ac] of BLM-managed land.  
35 The proposed project would consist of two noncontiguous mining units: the Nichols Ranch Unit  
36 would contain the central processing plant, and the Hank Unit would contain a satellite  
37 ion-exchange facility. (ADAMS Accession No. ML103440120)  
38

39 **Environmental Impact Statement for the Lost Creek ISR Project in Sweetwater County,**  
40 **Wyoming, Supplement to the GEIS (NUREG-1910, Supplement 3), Final Report (NRC,**  
41 **2011b).** NRC prepared this EIS as a supplement to the GEIS based on its review of an  
42 application from Lost Creek ISR, LLC for a source material license for the proposed Lost Creek  
43 ISR Project located in Sweetwater County, Wyoming. The proposed project site covers  
44 approximately 1,708 ha [4,220 ac] with approximately 1,450 ha [3,583 ac] of federal owned,  
45 BLM-managed land and 259 ha [640 ac] of land owned by the State of Wyoming, Office of State  
46 Lands and Investment. Planned facilities associated with the project include a well field with  
47 injection, production, and monitor wells; header houses; a central processing plant; an access  
48 road network; and pipeline system. (ADAMS Accession No. ML11125A006)

## 1 **1.5 Applicable Regulatory Requirements**

2 NEPA establishes national environmental policy and goals to protect, maintain, and enhance  
3 the environment. NEPA provides a process for implementing these specific goals for those  
4 federal agencies responsible for an action. This SEIS was prepared in accordance with NEPA  
5 requirements, NRC-implementing regulations in 10 CFR Part 51, and other regulations that  
6 were in effect at the time of writing. GEIS Appendix B summarizes other federal statutes,  
7 implementing regulations, and Executive Orders that are potentially applicable to environmental  
8 reviews for the construction, operation, decommissioning, and groundwater restoration of an  
9 ISR facility.

10  
11 GEIS Sections 1.6.3.3 and 1.7.5.3 summarize the State of South Dakota's statutory authority  
12 pursuant to the ISR process, relevant state agencies that are involved in the permitting of an  
13 ISR facility, and the range of state permits that would be required (NRC, 2009a). These  
14 agencies and their permitting authority are as follows:

- 15  
16 • Under the South Dakota Mined Land Reclamation Act (South Dakota Codified Law  
17 Chapter 45-6B), the South Dakota Board of Minerals and Environment is charged with  
18 issuing state permits and developing licensing requirements for ISR facilities.  
19
- 20 • The South Dakota Department of Environmental and Natural Resources (SDDENR) is in  
21 charge of issuing the air quality permit through the National Ambient Air Quality  
22 Standards program as well as issuing a surface water discharge permit through the  
23 National Pollutant Discharge Elimination System (NPDES) program and a groundwater  
24 discharge plan permit for land application of treated wastewater.  
25
- 26 • The South Dakota State Historical Society, within the Department of Tourism and State  
27 Development, is in charge of administering the South Dakota State Historic Preservation  
28 Office (SD SHPO), which coordinates, plans, and manages historic preservation  
29 programs across the state.

## 30 **1.6 Licensing and Permitting**

31 NRC has statutory authority through the AEA and Uranium Mill Tailings Radiation Control Act to  
32 regulate uranium ISR facilities. In addition to obtaining an NRC license, uranium ISR facilities  
33 must obtain the necessary permits from the appropriate federal, state, tribal, and local  
34 governmental agencies. The NRC licensing process for ISR facilities was described in GEIS  
35 Section 1.7.1. GEIS Sections 1.7.2 through 1.7.5 describe the role of the other federal, state,  
36 and tribal agencies in the ISR permitting process.

37  
38 This section of the SEIS summarizes the status of the NRC licensing process at the proposed  
39 Dewey-Burdock ISR Project site and the status of the applicant permitting with respect to other  
40 applicable federal, tribal, and state requirements. Section 1.6.1 describes the NRC licensing  
41 process and Section 1.6.2 describes the status of other required permits.  
42

### 1.6.1 NRC Licensing Process

By letter dated August 10, 2009, the applicant submitted a license application to NRC for the Dewey-Burdock ISR Project (Powertech, 2009a). As discussed in GEIS Section 1.7.1, NRC initially conducts an acceptance review of a license application to determine whether the application is complete enough to support a detailed technical review. The NRC staff accepted the Dewey-Burdock ISR Project license application for detailed technical review by letter dated October 2, 2009 (NRC, 2009c).

The NRC's detailed technical review of the Dewey-Burdock ISR Project license application includes both a safety review and an environmental review. These two reviews are conducted in parallel (see GEIS Figure 1.7-1). The safety review focuses on assessing compliance with the applicable regulatory requirements in 10 CFR Part 20 and 10 CFR Part 40, Appendix A. The environmental review is conducted in accordance with the regulations in 10 CFR Part 51.

The NRC hearing process (10 CFR Part 2) applies to licensing actions and offers stakeholders a separate opportunity to raise concerns associated with the proposed action. In accordance with the regulation, NRC published a Notice of Opportunity for Hearing on the Dewey-Burdock ISR Project license application in the FR on January 5, 2010 (see 75 FR 467). NRC received a request for hearing from Consolidated Petitioners (Theodore P. Ebert, David Frankel, Gary Heckenlaible, Susan Henderson, Dayton Hyde, Liliias C. Jones Jarding, Clean Water Alliance, and Aligning for Responsible Mining) on March 8, 2010 (Consolidated Petitioners, 2010). Additionally, the Oglala Sioux Tribe filed a petition to intervene on April 6, 2010 (Oglala Sioux Tribe, 2010).

Regulations in 10 CFR Part 2 specify that a petition for review and request for hearing must include a showing that the petitioner has standing and that the Atomic Safety and Licensing Board (ASLB) would rule on a petitioner's standing by considering (i) the nature of the petitioner's right under the AEA or NEPA to be made a party to the proceeding, (ii) the nature and extent of the petitioner's property, financial, or other interest in the proceeding, and (iii) the possible effect of any decision or order that may be issued in the proceeding on the petitioner's interest. All of the individual Consolidated Petitioners based their claim of standing on the possibility that contamination from the applicant's proposed ISR operation would contaminate the aquifer or surface water from which Consolidated Petitioners obtain their water (Consolidated Petitioners, 2010). The Oglala Sioux Tribe's central standing claim is interest in protecting cultural and historical resources that have been or might be found in the proposed Dewey-Burdock ISR Project site, which the Oglala Sioux Tribe claims is within the aboriginal territory of the Oglala Sioux Tribe under the 1868 Fort Laramie Treaty (Oglala Sioux Tribe, 2010). In addition, the Oglala Sioux Tribe bases its claim of standing on possible groundwater contamination from the proposed Dewey-Burdock ISR Project (Oglala Sioux Tribe, 2010).

On August 5, 2010, ASLB ruled that three individuals (Susan Henderson, Dayton Hyde, and David Frankel) and the two organizations (Clean Water Alliance and Aligning for Responsible Mining) among the Consolidated Petitioners demonstrated standing to be parties to the licensing proceeding, and one of their contentions as pled and three of their contentions as modified by ASLB were admissible (ASLB, 2010). Three other members of the Consolidated Petitioners (Gary Heckenlaible, Liliias C. Jones Jarding, and Theodore P. Ebert) did not demonstrate standing and were not admitted as parties to the licensing proceeding (ASLB, 2010). ASLB also found that the Oglala Sioux Tribe demonstrated standing to be admitted as a party to the licensing proceeding and three of their contentions as pled and one as modified by ASLB were admissible (ASLB, 2010).

## 1 1.6.2 Status of Permitting With Other Federal and State Agencies

2 In addition to obtaining a source material license from NRC prior to conducting ISR operations  
 3 at the Dewey-Burdock ISR Project, the applicant is required to obtain necessary permits and  
 4 approvals from other federal and state agencies to address (i) the underground injection of  
 5 solutions and liquid effluent from the ISR process, (ii) the exemption of all or a portion of the ore  
 6 zone aquifer from regulation under the *Safe Drinking Water Act*, and (iii) the discharge of storm  
 7 water during construction and operation of the ISR facility. Table 1.6-1 lists the status of the  
 8 required permits and approvals.  
 9

**Table 1.6-1. Environmental Approvals for the Dewey-Burdock Project**

Issuing Agency	Description	Status
South Dakota Department of Environment and Natural Resources (SDDENR)  Joe Foss Building 523 East Capitol Pierre, SD 57501	Uranium Exploration Permit	Application submitted July 2008; approved by South Dakota Board of Minerals and Environment November 2008.
	Scenic and Unique Lands Designation	Submitted August 2008; SDDENR determined lands described by applicant do not constitute special, exceptional, critical, and unique; February 2009.
	Large-Scale Mine Permit	Application not yet submitted (expected July 2012).
	Water Appropriation Permits <ul style="list-style-type: none"> <li>• Madison</li> <li>• Inyan Kara</li> </ul>	Applications submitted June 2012.
	Underground Injection Control Class III Permit	Application submitted April 2009 and deemed incomplete; revised application submitted February 2010 and deemed incomplete. Rules tolled by Senate Bill 158, March 2011.
	Air Quality Permit	Application not yet submitted.
	Groundwater Discharge Permit	Submitted June 2012 and under review.
	National Pollutant Discharge Elimination System Water Discharge Permit	Application not yet submitted.



**Table 1.6-1. Environmental Approvals for the Dewey-Burdock Project (continued)**

<b>Issuing Agency</b>	<b>Description</b>	<b>Status</b>
U.S. Nuclear Regulatory Commission Washington, DC 20555	Source Materials License (10 CFR Part 40)	Submitted August 10, 2009. Deemed complete October 2009.
U.S. Environmental Protection Agency 1595 Wynkoop Street Denver, CO 80202-1129	Aquifer Exemption (40 CFR Parts 144 and 146) and Underground Injection Control Class III Permit	Application submitted December 2008 and under review.
	Underground Injection Control Class V Permit	Application submitted March 2010 and under review.
Custer County 420 Mount Rushmore Road Custer, SD 57730-1309	Building Permits	Applications not yet submitted.
Fall River County County Courthouse Hot Springs, SD 57730-1309	Building Permits	Not required.
U.S. Bureau of Land Management South Dakota Field Office	Plan of Operations	Application submitted August 2009; revised document submitted January 2011 and under review.
Source: Powertech (2010); Revised June 2012		

## 1 1.7 Consultation

2 As a federal agency, NRC is required to comply with consultation requirements in Section 7 of  
3 the *Endangered Species Act of 1973* (ESA), as amended, and Section 106 of the *National*  
4 *Historic Preservation Act of 1966* (NHPA), as amended. The GEIS took a programmatic look at  
5 the environmental impacts of ISR uranium milling within four distinct geographic regions and  
6 acknowledged that each site-specific review would include its own consultation process with  
7 relevant agencies. Section 7 (ESA) and Section 106 (NHPA) consultations conducted for the  
8 proposed Dewey-Burdock ISR Project are summarized in Sections 1.7.1 and 1.7.2. Copies of  
9 the consultation correspondence are provided in SEIS Appendix A. Section 1.7.3 describes  
10 NRC coordination with other federal, tribal, state, and local agencies conducted during the  
11 development of the SEIS.  
12

### 13 1.7.1 Endangered Species Act of 1973 Consultation

14 The ESA was enacted to prevent the further decline of endangered and threatened species and  
15 to restore those species and their critical habitats. ESA Section 7 requires consultation with the  
16 U.S. Fish and Wildlife Service (FWS) to ensure that actions it authorizes, permits, or otherwise  
17 carries out will not jeopardize the continued existence of any listed species or adversely modify  
18 designated critical habitats.  
19

20 By letter dated March 15, 2010, NRC staff initiated consultation with FWS, requesting  
21 information on endangered or threatened species and critical habitat in the proposed  
22 Dewey-Burdock ISR Project area (NRC, 2010b). NRC received a response from the FWS  
23 South Dakota Field Office, dated March 29, 2010, that (i) listed the threatened and endangered

1 species that may occur in the project area and (ii) provided maps showing the location of  
2 wetlands within the two proposed initial mine units at the Dewey-Burdock ISR Project  
3 (FWS, 2010).

4  
5 In accordance with ESA Section 7, FWS determined that the whooping crane (*Grus americana*)  
6 and black-footed ferret (*Mustela nigripes*) are federally listed species that may occur within  
7 Custer County. The whooping crane generally migrates through the eastern portion of  
8 Custer County, and the black-footed ferret is currently only found in the Wind Cave National  
9 Park. FWS had no information to indicate that these species are located within the project  
10 boundaries. No federally listed endangered species occur in Fall River County; however, the  
11 greater sage-grouse (*Centrocercus urophasianus*) is a candidate species that historically  
12 occurred in this area and has a potential to be present within the proposed area of review of the  
13 Dewey-Burdock ISR Project. At the present time, candidate species have no legal protection  
14 under ESA. By email dated August 27, 2012, the FWS South Dakota Field Office confirmed  
15 that there are no additional updates or changes to these federally listed species in the proposed  
16 Dewey-Burdock ISR Project area (FWS, 2012).

17  
18 In accordance with NEPA regulations and other environmental laws and rules [e.g., Fish and  
19 Wildlife Coordination Act and Executive Order 11990 (Protection of Wetlands)], FWS  
20 encouraged the following when reviewing potential impacts to wetlands at the proposed  
21 Dewey-Burdock ISR Project: (i) avoidance of wetlands, if possible; (ii) minimization of impacts  
22 to wetlands if they cannot be avoided; and (iii) replacement of wetland values that may be  
23 impacted by the project (FWS, 2010).

## 24 25 **1.7.2 National Historic Preservation Act of 1966 Consultation**

26 In accordance with 36 CFR Part 800.1(a), Section 106 of NHPA requires that federal agencies  
27 take into account the effects of their undertakings on historic properties and afford the Advisory  
28 Council on Historic Preservation (ACHP) an opportunity to comment on such undertakings. The  
29 Section 106 process seeks the views of consulting parties including the federal agency, the  
30 State Historic Preservation Officer (SHPO), Indian tribes and Native Hawaiian organizations,  
31 Tribal Historic Preservation Officers (THPO), local government leaders, the applicant,  
32 cooperating agencies, and the public. The goal of consultation is to identify historic properties  
33 potentially affected by the undertaking, assess the effects of the undertaking on these  
34 properties, and seek ways to avoid, minimize, or mitigate any adverse effects on historic  
35 properties. As detailed in 36 CFR Part 800.2(c)(1)(i), the role of the South Dakota State Historic  
36 Preservation Office (SD SHPO) in the Section 106 process is to advise and assist federal  
37 agencies in carrying out their Section 106 responsibilities. As part of the 106 consultation  
38 process for the proposed Dewey-Burdock ISR Project, NRC continues consultation with  
39 potentially affected Native American tribes and consulting parties. These interactions are  
40 detailed in SEIS Section 1.7.3.5.

41  
42 NRC staff met with members of the SD SHPO office on December 2, 2009, to discuss  
43 site-specific issues, including the SD SHPO review process, cumulative impacts to historic sites,  
44 and best management practices (NRC, 2009b). NRC and SD SHPO staff also discussed the  
45 possibility of entering into a programmatic agreement or memorandum of agreement, pursuant  
46 to Section 106, with all consulting parties to set forth procedures and mitigation measures to  
47 preserve existing historic and cultural resources at the proposed Dewey-Burdock ISR Project  
48 site. The NRC staff continue to consult with the SD SHPO to evaluate the effects of the  
49 proposed project on historic and cultural resources.

### 1 **1.7.3 Coordination With Other Federal, Tribal, State, and Local Agencies**

2 The NRC staff interacted with multiple federal, tribal, state, and local agencies and/or  
3 entities during preparation of this SEIS to gather information on potential issues, concerns,  
4 and environmental impacts related to the proposed Dewey-Burdock ISR Project. The  
5 consultation and coordination process included, but was not limited to, discussions with  
6 BLM; tribal governments (see SEIS Section 1.7.3.5); SDDENR; South Dakota Game, Fish and  
7 Parks (SDGFP); and local organizations (e.g., Custer County, Town of Edgemont).  
8

#### 9 **1.7.3.1 Coordination With U.S. Bureau of Land Management**

10 U.S. Bureau of Land Management (BLM) is serving as a cooperating agency in the NEPA  
11 assessment and licensing process for the proposed Dewey-Burdock ISR Project because BLM  
12 has jurisdiction over the locatable mineral rights on federal land that the applicant holds within  
13 the proposed project area. As discussed in Section 1.3, the BLM's responsibility for the  
14 proposed action is to fulfill its statutory responsibilities to regulate mining on federal lands as  
15 described in 43 CFR Part 3809.  
16

17 BLM is responsible for administering the National System of Public Lands and the federal  
18 minerals underlying these lands. BLM is also responsible for managing split estate situations  
19 where federal minerals underlie a surface that is privately held or owned by state or local  
20 government. In situations where BLM administers the surface rights, operators on mining  
21 claims, including ISR uranium facilities, must submit a Plan of Operations and obtain BLM  
22 approval before beginning operations beyond those for casual use. BLM also reviews and  
23 approves Plans of Operations on split estate lands patented under the Stock-Raising  
24 Homestead Act but only where the surface owners and the claimant cannot come to terms on  
25 access or surface damages. In this case there are no surface owner/mining claimant conflicts  
26 and as a result the proposed development activity on the split estate lands is not subject to BLM  
27 approval. The proposed Dewey-Burdock ISR Project site contains approximately 97 ha [240 ac]  
28 of BLM-administered surface lands.  
29

30 The U.S. government reserved 1,708 ha [4,220 ac] of mineral estate under the Stock-Raising  
31 Homestead Act, when the surface was originally patented. The applicant maintains the  
32 unpatented mining claims associated with the 1,708 ha [4,220 ac] of federal minerals.  
33 In addition, the applicant maintains unpatented mining claims on the 97 ha [240 ac] of  
34 BLM-administered surface lands. The statutory responsibilities pertaining to mining claims  
35 under the General Mining Laws are described in 43 CFR Part 3800.  
36

37 NRC has coordinated with BLM during preparation of this SEIS. Numerous conference calls  
38 and meetings have been held, and a Memorandum of Understanding between NRC and BLM  
39 was negotiated.  
40

41 The NRC staff met with the staff of South Dakota BLM field office on December 1, 2009. BLM  
42 staff indicated that the applicant's Plan of Operations for the proposed Dewey-Burdock ISR  
43 Project had been received, but review had not been initiated at the time of the meeting. BLM  
44 staff noted that an ethnographic study was conducted prior to preparation of the draft EIS for the  
45 GCC Dacotah Inc. Dewey Conveyor Project to assess the traditional use of the area by tribes in  
46 North Dakota and South Dakota (BLM, 2009; Sprague, 2008). The proposed route of the  
47 conveyor project crosses BLM-administered public lands and USFS-administered National  
48 Forest System lands north of the proposed Dewey-Burdock ISR Project. Most of the tribal  
49 members interviewed knew their people had regular ceremonial, cultural, and religious activity in

1 the Black Hills prior to the establishment of reservations; however, no one could pinpoint  
2 present cultural, ceremonial, or religious use in the proposed area. (Sprague, 2008, p. 14).  
3 During the meeting, BLM provided NRC staff with guidance documents and with information on  
4 oil and gas leases in the proposed project area. Additionally, BLM staff expressed concerns  
5 related to water quality and hydrology, land use, and cumulative effects.  
6

### 7 **1.7.3.2 Coordination With the U.S. Army Corps of Engineers**

8 NRC staff met with U.S. Army Corps of Engineers (USACE) staff on December 2, 2009, in  
9 Pierre, South Dakota, to discuss wetlands and surface water bodies within and in the vicinity of  
10 the proposed Dewey-Burdock ISR Project site. USACE regulates, monitors, and oversees  
11 “jurisdictional waters of the United States,” which are subject to the Clean Water Act. USACE  
12 requires issuance of a Section 404 Permit prior to discharge of dredge or fill material into waters  
13 determined to be jurisdictional waters of the United States. In August 2008, the applicant  
14 requested that USACE evaluate the proposed Dewey-Burdock ISR Project site to determine  
15 whether jurisdictional waters of the United States are present. By letter dated January 14, 2009,  
16 USACE documented the presence of 20 wetlands within the project area and determined that  
17 4 were jurisdictional waters; these are Beaver Creek, an unnamed tributary to Beaver Creek,  
18 Pass Creek, and an unnamed tributary to Pass Creek (Powertech, 2009b, Appendix 3.5–H).  
19

### 20 **1.7.3.3 Coordination With the U.S. Forest Service**

21 NRC staff met with USFS staff on December 3, 2009, in Hot Springs, South Dakota.  
22 USFS manages wildlife habitat on and uses of USFS lands. USFS has no permitting authority  
23 for the proposed Dewey-Burdock ISR Project; however, it expressed concerns that construction  
24 and operational activities could impact the nearby Black Hills National Forest and Buffalo Gap  
25 National Grasslands. USFS staff noted a concern about the cumulative groundwater effects of  
26 the project on the USFS-managed aquatic recreation areas of Cascade Springs and Keith Park  
27 Springs. USFS also expressed concerns about potential effects the project could have on  
28 Craven Canyon, known to have traditional cultural significance to Native American tribes.  
29

### 30 **1.7.3.4 Coordination With the U.S. Geological Survey**

31 NRC staff met with U.S. Geological Survey (USGS) staff on December 1, 2009, in Rapid City,  
32 South Dakota, to discuss geological and hydrological aspects of the proposed Dewey-Burdock  
33 ISR Project. USGS staff provided information on the regional hydrology of the Black Hills area,  
34 including major hydrostratigraphic units, regional hydrological gradients, and major sources of  
35 municipal drinking water in the region. With respect to the proposed Dewey-Burdock ISR  
36 Project, USGS staff expressed a concern that contaminated groundwater may travel from the  
37 project area and discharge into Beaver Creek within the proposed project area and the  
38 Cheyenne River south of the proposed project area.  
39

### 40 **1.7.3.5 Interactions With Tribal Governments**

41 Under Section 106 of the NHPA, NRC is required to conduct consultation with Native American  
42 tribes to determine whether a proposed federal action will affect historic properties. In  
43 conjunction with the tribal government consultation process, NRC staff met with Office of Tribal  
44 Government Relations (OTGR) staff on December 2, 2009, in Pierre, South Dakota, to discuss  
45 issues and concerns that tribal governments in South Dakota may have with the proposed  
46 Dewey-Burdock ISR Project. OTGR staff noted that tribal governments would be most  
47 interested in potential harm to the environment from the proposed project. OTGR staff

1 suggested tribal organizations should have the opportunity to express their concerns with the  
2 proposed project and should be contacted prior to NRC outreach activities associated with  
3 the project.  
4

5 The SD SHPO identified 20 Native American tribes that might attach historic, cultural, and  
6 religious significance to historic properties within the proposed Dewey-Burdock ISR Project  
7 area. The NRC staff contacted the 20 tribal governments by letters dated March 19, 2010;  
8 September 10, 2010; and March 4, 2011 (NRC, 2010c,d, 2011c). The staff invited the tribes to  
9 participate as consulting parties in the NHPA Section 106 process and requested assistance in  
10 identifying tribal historic sites or cultural resources that may be affected by the proposed action.  
11 Specifically, NRC staff solicited information regarding properties of religious and cultural  
12 significance to tribes. The contacted tribes follow.  
13

- 14 • Cheyenne River Sioux Tribe
- 15 • Crow Creek Sioux Tribe
- 16 • Flandreau Santee Sioux Tribe
- 17 • Lower Brule Sioux Tribe
- 18 • Oglala Sioux Tribe
- 19 • Rosebud Sioux Tribe
- 20 • Sisseton Wahpeton Sioux Tribe
- 21 • Standing Rock Sioux Tribe
- 22 • Yankton Sioux
- 23 • Three Affiliated Tribes (Mandan, Hidasta, and Arikara Nation)—North Dakota
- 24 • Turtle Mountain Band of Chippewa—North Dakota
- 25 • Spirit Lake Tribe—North Dakota
- 26 • Lower Sioux Indian Community—Minnesota
- 27 • Fort Peck Assiniboine and Sioux—Montana
- 28 • Northern Cheyenne Tribe—Montana
- 29 • Northern Arapaho Tribe—Wyoming
- 30 • Eastern Shoshone Tribe—Wyoming
- 31 • Santee Sioux Tribe—Nebraska
- 32 • Ponca Tribe—Nebraska
- 33 • Crow Tribe—Montana

34  
35 By letter dated April 7, 2010, the Turtle Mountain Band of Chippewa–North Dakota responded to  
36 NRC and stated that the proposed project would not have an effect on historic properties of  
37 importance to the Turtle Mountain Band of Chippewa Indians. The THPO also stated that  
38 “determination of No Historic Properties Affected is granted for the project to proceed” (Turtle  
39 Mountain Band of Chippewa Indians, 2010).  
40

41 NRC staff continued its efforts to engage in consultation with tribes that might be affected by the  
42 proposed action with follow-up telephone calls and by sending emails to further gather  
43 information related to identification efforts and coordinate meetings.  
44

45 On September 10, 2010, NRC staff sent another letter inviting the tribes to participate in  
46 consultation to help facilitate the identification of areas on the proposed Dewey-Burdock  
47 site that the tribes believe have traditional religious or cultural significance (NRC, 2010d).  
48 NRC staff also followed up with phone calls and emails to ensure tribal officials received  
49 this correspondence.

1 By letter dated September 20, 2010, Mr. Perry “No Tears” Brady of the Three Affiliated Tribes  
2 (Mandan, Hidatsa, and Arikara Nations–North Dakota) responded that the tribe had determined  
3 there would be no adverse effects on historic or cultural resources important to the Mandan,  
4 Hidasta, and Arikara Nations within the proposed project area (Three Affiliated Tribes, 2010).

5  
6 The Sisseton Wahpeton Oyate, Rosebud Sioux Tribe, Lower Brule Sioux Tribe, and  
7 Yankton Sioux Tribe, responded by letters dated November 2, 2010; November 7, 2010;  
8 November 15, 2010; and December 3, 2010, respectively, expressing interest in becoming  
9 consulting parties to the proposed project (Sisseton Wahpeton Oyate, 2010; Rosebud Sioux  
10 Tribe, 2010; Lower Brule Sioux Tribe, 2010; Yankton Sioux Tribe, 2010). The Sisseton  
11 Wahpeton Oyate and Rosebud Sioux THPOs recommended that NRC undertake group  
12 consulting, whereby a number of tribal representatives would participate in a meeting, possibly  
13 hosted by the Oglala Sioux Tribe. The Yankton Sioux Tribe THPO requested face-to-face  
14 consultation and expressed concerns regarding protection of traditional cultural properties  
15 (TCPs) within the project area. While the term TCP does not appear in the NHPA or its  
16 implementing regulations, the tribes apply this term to historic properties of religious and cultural  
17 significance to Indian tribes that may be affected by an undertaking. The NRC uses the term in  
18 this context.

19  
20 By letter dated January 31, 2011, the Oglala Sioux Tribe THPO accepted the invitation to  
21 participate as a consulting party and stated that the proposed Dewey-Burdock Project  
22 represents a substantial potential threat to the preservation of cultural and historic resources of  
23 the Oglala Sioux Tribe (Oglala Sioux Tribe, 2011). The THPO also stated that the proposed  
24 project site is located within an area of which Sioux Tribes, along with the Cheyenne, Arapahoe,  
25 Crow, and Arikara Tribes, possess intimate cultural knowledge (Oglala Sioux Tribe, 2011). The  
26 THPO stated that impacts resulting from the proposed project include not only site-specific  
27 physical impacts, but intangible impacts to the integrity of the area from cultural, historical,  
28 spiritual, and religious perspectives. The letter also requested NRC’s assistance in facilitating a  
29 site visit and regional meeting to provide all affected tribes an opportunity to review and identify  
30 the cultural and historic resources at stake.

31  
32 Mr. Hubert B. Two Leggins (Crow Tribal Cultural Resource Director/Renewable Resource  
33 Supervisor) of the Crow Tribe of Montana responded by email dated March 9, 2011, indicating  
34 that the Dewey-Burdock Project area has religious and cultural significance to the Crow Tribe  
35 (Crow Tribe, 2011). Mr. Two Leggins accepted the invitation for formal consultation and stated  
36 that the Crow Tribe wanted to be a consulting party.

37  
38 By letter dated May 12, 2011, NRC staff invited THPOs and/or Cultural Resources Officers to an  
39 informal information gathering meeting on June 8, 2011, at the Prairie Winds Casino and Hotel  
40 on the Pine Ridge Reservation in South Dakota (NRC, 2011d). The purpose of the meeting was  
41 to help NRC identify tribal historic sites and cultural resources that may be affected by  
42 actions associated with the proposed Dewey-Burdock ISR Project and with the Crow Butte  
43 North Trend and Crow Butte license renewal ISR projects in Nebraska. Representatives of six  
44 tribes (Oglala Sioux, Standing Rock Sioux, Flandreau-Santee Sioux, Sisseton-Wahpeton Oyate,  
45 Cheyenne River Sioux, and Rosebud Sioux) attended. BLM and SD SHPO staff also attended.

46  
47 During the June 8<sup>th</sup> meeting, tribal officials expressed concerns about the identification and  
48 preservation of historic properties of traditional religious and cultural importance to tribes at the  
49 proposed Dewey-Burdock and Crow Butte sites. Tribal officials stated that historic and cultural  
50 resource studies of the sites should be conducted with tribal involvement. The SD SHPO stated  
51 that Tribal representatives would need access to the Dewey-Burdock site to assist in

1 identification of historic properties. A transcript of this meeting (NRC, 2011e) is available  
2 through the NRC Agencywide Documents Access and Management System database on the  
3 NRC website (<http://www.nrc.gov/reading-rm/adams.html>).  
4

5 In conjunction with the June 8, 2011, information gathering meeting, the applicant hosted a visit  
6 to the Dewey-Burdock ISR Project site on June 9, 2011. Tribal officials, NRC staff, and BLM,  
7 SD SHPO, and South Dakota Historical Society Archaeological Research Center (ARC) staff  
8 interacted with the applicant's personnel and archaeologists from Archaeology Laboratory of  
9 Augustana College during the site visit. The Level III cultural resource evaluations at the site  
10 were conducted by the Archaeology Laboratory of Augustana College. The Level III cultural  
11 resource evaluations are described in SEIS Section 3.9.2. The Dewey-Burdock site visits  
12 included a presentation of the proposed project identifying the location of facilities and wellfields.  
13 Augustana College staff provided an overview of the results of archaeological and cultural  
14 evaluations. At the conclusion of the presentations, participants toured the proposed Dewey-  
15 Burdock ISR Project site stopping at several locations to view and investigate cultural and  
16 historic features identified during the Level III cultural resource evaluations, including stone  
17 circles and rock alignments.  
18

19 To facilitate the identification of possible historic properties of importance to Native American  
20 tribes within the area of potential effect (APE), the NRC began efforts to open the Dewey-  
21 Burdock site to tribal representatives for a survey. On August 12, 2011, NRC staff sent a letter  
22 requesting the applicant submit a written plan for acquiring information on historic properties  
23 within the APE (NRC, 2011f).  
24

25 On October 28, 2011, NRC staff sent a letter to the tribes stating that the staff had requested  
26 the applicant undertake studies and surveys to provide information on properties of traditional  
27 religious and cultural importance to tribes at the proposed Dewey-Burdock site, as is  
28 permissible under 36 CFR 800.2(c)(4) (NRC, 2011g). The letter informed the tribes that the  
29 applicant had engaged the services of SRI Foundation (SRI) of Rio Rancho, New Mexico, to  
30 collect information concerning historic properties that may be located in the proposed project  
31 area. The letter also informed the tribes that NRC had authorized SRI, acting on behalf of the  
32 applicant, to contact tribes to obtain information. The letter stated further that NRC would  
33 remain legally responsible for all findings and determinations and for maintaining  
34 government-to-government relationships with the involved tribes.  
35

36 By letter dated January 19, 2012, NRC staff invited the THPOs to a tribal consultation on  
37 February 14–15, 2012, at the Ramkota Best Western Hotel in Rapid City, South Dakota  
38 (NRC, 2012a). The purpose of the meeting was to hear the views of interested tribes about the  
39 general types and descriptions of historic properties of religious and cultural significance that  
40 may be affected by the proposed project and how these properties can be identified and  
41 evaluated as part of the ongoing consultations under Section 106 of NHPA. The meeting was  
42 attended by officials from 13 tribes (Cheyenne River Sioux, Crow Creek Sioux, Crow Tribe of  
43 Montana, Eastern Shoshone, Fort Peak Assiniboine Sioux, Northern Arapaho, Northern  
44 Cheyenne, Oglala Sioux, Rosebud Sioux, Yankton Sioux, Sisseton-Wahpeton Sioux, Santee  
45 Sioux Nation, and Standing Rock Sioux). In addition to applicant, SRI, and NRC staffs, BLM  
46 and U.S. Environmental Protection Agency (EPA) Region 8 staffs were also in attendance.  
47

48 During the February 14–15<sup>th</sup> meeting, the tribes provided the following information to NRC and  
49 BLM staffs: (i) the tribes expressed an interest in developing a confidentiality agreement before  
50 submitting any traditional cultural studies to NRC; (ii) tribal representatives stated that the  
51 purpose of any future meetings be made clearer to ensure that tribal participants have

1 appropriate levels of decision-making authority; (iii) tribal representatives volunteered to develop  
2 project-specific statements of work (SOWs) to conduct traditional religious and cultural  
3 properties studies for the proposed Dewey-Burdock Project; and (iv) tribal representatives  
4 requested another meeting to review draft SOWs the tribes and the applicants prepared for  
5 each of the three projects suggesting March 14–15, 2012, as possible meeting dates.  
6

7 Due to conflicts with many participating tribal representatives, the proposed March 14–15, 2012,  
8 meeting was cancelled. NRC staff transmitted the applicant's SOW for the Dewey-Burdock  
9 project to the THPOs for review and consideration by letter dated March 9, 2012 (NRC, 2012b).  
10 The NRC staff proposed to host a conference call to discuss the proposed SOW in April 2012.  
11 On April 5, 2012, NRC staff sent a letter inviting the tribes to participate in a teleconference on  
12 April 24, 2012, to discuss the applicant's SOW to identify historic properties (NRC, 2012c).  
13

14 On April 24, 2012, the NRC staff held a teleconference with staff from Powertech, Cameco, SRI,  
15 SD SHPO, EPA Region 8, BLM, and eight tribes (Northern Cheyenne, Oglala Sioux, Rosebud  
16 Sioux, Northern Arapaho, Sisseton-Wahpeton, Standing Rock Sioux, Yankton Sioux, and  
17 Cheyenne and Arapaho). During the call, the consulting parties discussed the following aspects  
18 of the applicant's SOW: (i) adequacy of compensation for tribal officials conducting the field  
19 work, (ii) confidentiality of information gathered by the tribes, (iii) amount of acreage to be  
20 covered during fieldwork, and (iv) tribal involvement in making eligibility determinations.  
21

22 The following steps were discussed at the April 24, 2012, teleconference: (i) tribal  
23 representatives would continue to develop a draft tribal SOW; (ii) tribes would hold an intertribal  
24 teleconference to discuss a draft tribal SOW; (iii) tribes would provide a copy of a draft SOW to  
25 the NRC, once it was approved by all tribal officials; (iv) NRC would distribute a draft tribal SOW  
26 to consulting parties (applicant, BLM, EPA, SD SHPO); (v) NRC would arrange another meeting  
27 with consulting parties to finalize an SOW, agreeable to the parties, for the identification of  
28 potential historic properties; (vi) the applicant would schedule fieldwork for a historic property  
29 survey at the proposed Dewey-Burdock site; (vii) tribes would write preliminary and final reports  
30 for submission to the NRC to provide tribal views on effects of the undertaking on such  
31 properties; and (viii) NRC would assess effects on properties under NHPA and develop an  
32 impact determination pursuant to NEPA based on information provided by the tribes. The tribes  
33 also requested that two tribal representatives be provided access to conduct a reconnaissance  
34 visit to the Dewey-Burdock license area, for the purpose of securing information that would  
35 enable the tribes to complete a detailed proposed SOW for the project area. The applicant  
36 agreed to the request, and the Dewey-Burdock Project tribal reconnaissance visit took place on  
37 Saturday, May 26, 2012.  
38

39 On June 19, 2012, the tribes provided NRC staff with a preliminary tribal SOW for identifying  
40 properties of religious and cultural significance at the Dewey-Burdock ISR Project site.  
41 Subsequently, NRC staff held teleconferences on August 9, 2012, and August 21, 2012, to  
42 solicit additional details on the SOWs prepared by the applicant and tribes. Representatives of  
43 the tribes and staff from the NRC, Powertech, SRI, SD SHPO, EPA Region 8, and BLM  
44 attended these teleconferences. Discussions centered on (i) defining the areas of potential  
45 effects (direct and indirect) that would be included in the proposed surveys, (ii) the need to  
46 provide survey cost estimates, and (iii) the need to provide a survey schedule that met the NRC  
47 licensing review schedule and completion of its scheduled NEPA review. The participating  
48 tribes requested an opportunity to revise the applicant's proposed SOW for completing a  
49 tribal survey for the Dewey-Burdock ISR Project. During the August 21, 2012,  
50 teleconference, NRC staff agreed to meet with tribal representatives in Bismarck,



1 North Dakota on September 5, 2012 to develop a revised SOW for completion of a field survey  
2 in the fall of 2012.

3  
4 The applicant informed NRC by letter dated August 29, 2012, that it was unable to reach an  
5 agreement with the tribes on a SOW and it would be unable to provide information to the NRC  
6 on properties of religious and cultural significance to the tribes that may be affected by the  
7 proposed Dewey-Burdock ISR Project (Powertech, 2012). The applicant indicated that  
8 additional efforts on its part to negotiate a mutually acceptable SOW are unlikely to be  
9 productive. The applicant, however, committed to support efforts to complete identification of  
10 historic properties by offering up to \$100,000 in funding to tribal representatives to carry out  
11 fieldwork and reporting activities, with the stipulation that the work be completed in fall 2012.  
12 The applicant committed to working with NRC and BLM to provide access for tribal  
13 representatives to the project area to carry out work agreed to by the tribes.

14  
15 On September 5, 2012, NRC staff met with representatives of seven tribes (Yankton Sioux,  
16 Sisseton-Wahpeton Oyate Sioux, Rosebud Sioux, Standing Rock Sioux, Northern Cheyenne,  
17 Oglala Sioux, and Crow Nation) at the Kelly Inn in Bismarck, North Dakota. During this meeting,  
18 participants discussed the how to proceed with development of a SOW to identify religious and  
19 cultural properties within the APE. The APE is the area in which properties of cultural  
20 significance may be affected by the undertaking, including direct effects (such as destruction,  
21 damage, or alteration of all or part of a property) and indirect effects (such as visual, audible,  
22 and atmospheric changes which affect the character or setting of a property). All parties agreed  
23 that a survey was necessary and that a revised SOW be prepared to focus survey efforts on  
24 identifying properties directly affected by ISR activities. All parties also agreed that further  
25 consultation would be required to develop a SOW to address survey efforts for identifying  
26 properties indirectly affected by the proposed project. The area of potential indirect effect could  
27 include properties that are well beyond the proposed license area. In addition, the parties  
28 acknowledged the need for a Programmatic Agreement for any future disturbances outside of  
29 areas directly affected by the proposed project.

30  
31 By letter dated September 18, 2012, NRC staff asked participants in the September 5, 2012,  
32 meeting in Bismarck, North Dakota to designate a preferred contractor to submit a proposal for  
33 a survey on their behalf. The NRC staff requested that a cost estimate based on the area of  
34 direct effect that may be disturbed during the initial phase of the Dewey-Burdock ISR Project be  
35 included in the proposal (NRC, 2012d). The letter included NRC staff's written response to four  
36 NHPA-related concerns the tribes raised at the September 5, 2012, meeting in Bismarck,  
37 North Dakota. The letter stated (i) the NRC agrees that a Programmatic Agreement will need to  
38 be developed to address the phased identification and evaluation of historic properties; (ii) the  
39 NRC will continue to consult with BLM, SD SHPO, and the tribes on all issues arising under  
40 Section 106 of the NHPA, including potential indirect effects; and (iii) NRC intends to keep  
41 survey information confidential to the fullest extent allowed by law.

42  
43 On September 27, 2012, NRC received a proposal and cost estimate from the tribes for a  
44 traditional cultural properties survey for the proposed Dewey-Burdock Project. The proposal  
45 and cost estimate was prepared by Makoche Wowapi/Mentz-Wilson Consultants, LLP, the  
46 contractor selected by tribes to complete the cultural resources survey of the proposed project.  
47 By letter dated October 4, 2012, NRC transmitted the tribe's proposal and cost estimate to the  
48 applicant for review and comment (NRC, 2012e).

49  
50 NRC informed the tribes by letter dated October 12, 2012 that significant differences exist in the  
51 proposal submitted by Makoche Wowapi/Mentz-Wilson Consultants, LLP and the applicant's

1 proposal described in its letter to NRC dated August 29, 2012 (NRC, 2012f; Powertech, 2012).  
2 NRC indicated that resolving these differences will not support completion of a field survey at  
3 the Dewey-Burdock site in the fall 2012. NRC requested that the tribes provide their ideas on  
4 alternative methods for identifying potential properties of traditional religious and cultural  
5 importance to the tribes. NRC suggested that alternative methods might include opening the  
6 site to interested tribal specialists over a period of several weeks with payment for survey costs  
7 made to individual tribes or seeking ethnohistoric and ethnographic information from tribal  
8 specialists in interviews at tribal headquarters.

9  
10 The Section 106 consultation process is ongoing. The NRC staff will continue to consult with  
11 BLM, SD SHPO, and the tribes on all issues arising under Section 106 of the NHPA. The staff  
12 will also consult with ACHP as necessary. Results of the consultation will be presented in the  
13 final SEIS.

#### 14 **1.7.3.6 Coordination With South Dakota Department of Environment and** 15 **Natural Resources** 16

17 NRC staff met with SDDENR in Pierre, South Dakota, on December 2, 2009, to discuss  
18 SDDENR's role in NRC's environmental review process for the proposed Dewey-Burdock ISR  
19 Project. SDDENR, the primary state permitting agency, will make determinations on issuance  
20 of the following state permits for the proposed Dewey-Burdock ISR Project: (i) mining permit,  
21 (ii) NPDES surface water discharge permit, (iii) air quality permit, (iv) water appropriation permit,  
22 and (v) groundwater discharge permit for land application of treated wastewater.

23  
24 Discussions between NRC and SDDENR staffs focused on geological and hydrological issues  
25 with the proposed Dewey-Burdock site, including (i) the adequacy of subsurface  
26 characterization, (ii) groundwater flow rates within and in the vicinity of the project area,  
27 (iii) potential complications in hydrology caused by past exploratory drill holes, (iv) potential  
28 hydrologic connection of production zones and abandoned onsite surface mines, and (v) the  
29 effectiveness of confining layers in isolating ore-bearing aquifers. NRC and SDDENR staffs  
30 also discussed the applicant's Class III UIC permit application (Powertech, 2010) and the water  
31 appropriation and waste management permitting processes for the proposed project. Potential  
32 risks to wildlife from wastewater surface impoundments associated with the proposed project  
33 were also discussed. SDDENR would coordinate with SDGFP to mitigate the potential effects  
34 of surface impoundments on wildlife; mitigation measures discussed included the use of netting  
35 and fencing to protect wildlife and implementing protocols to assess the effects of wastewater  
36 constituents on wildlife.

#### 37 **1.7.3.7 Coordination With South Dakota Game Fish and Parks** 38

39 NRC staff met with SDGFP staff on November 30, 2009, to discuss potential impacts  
40 on ecological resources at the proposed Dewey-Burdock ISR Project. SDGFP manages  
41 South Dakota's wildlife resources, parks, and outdoor recreational areas. SDGFP does not  
42 issue permits related to the proposed project; however, it oversees the management of  
43 state-listed threatened species and species of local concern. In addition, SDGFP consults  
44 closely with SDDENR on activities that could affect ecological resources within the proposed  
45 project area. Conversations between NRC and SDGFP staffs focused primarily on threatened  
46 or potentially threatened and endangered species (e.g., the plains topminnow, sage-grouse, and  
47 black-footed ferret) and species of local concern (e.g., raptors). SDGFP expressed a major  
48 concern: the potential effects on birds flying through the proposed project area and drinking  
49 at exposed wastewater evaporation ponds. SDGFP suggested two measures to mitigate effects

1 on bird populations: (i) testing to determine the toxicity of constituents in the evaporation ponds  
2 and (ii) using netting and fencing to restrict wildlife access to exposed ponds. SDGFP also  
3 noted the need for testing and monitoring of soils at the proposed site to identify any buildup of  
4 salts and metals that could result from proposed land application of treated wastewater.

### 5 6 **1.7.3.8 Coordination With South Dakota State Historical Society Archaeological** 7 **Research Center**

8 NRC staff met with staff of the ARC on November 30, 2009, to discuss historic and cultural  
9 resources at the proposed Dewey-Burdock Project. ARC is the lead agency for archaeological  
10 investigations pertaining to mineral exploration and mining in South Dakota. ARC described the  
11 results of a Level III Cultural Resources Evaluation conducted by the Archaeology Laboratory of  
12 Augustana College within the proposed project area. ARC also described stipulations of a  
13 Memorandum of Agreement executed between the applicant and ARC concerning avoidance  
14 and mitigation measures, which the applicant had committed to performing if historic or  
15 archaeological sites are encountered during ISR activities at the proposed site (Powertech,  
16 2009b, Appendix 4.10–B). ARC’s evaluation of the applicant’s request for determination of the  
17 proposed project area as special, exceptional, critical, or unique lands was also discussed.

18  
19 NRC staff returned on June 7, 2011, to meet with the Assistant State Archaeologist to review  
20 and gather additional information on cultural and historic resources related to the proposed  
21 Dewey-Burdock ISR Project site. During this visit, the results of the Level III Cultural Resources  
22 Evaluation conducted by archaeologists from the Archaeology Laboratory of Augustana College  
23 were discussed in more detail. Discussions focused on the recorded occurrence of cairn  
24 features at several identified archaeological sites at the proposed site and the potential for these  
25 types of features to contain human burials. A cairn is a manmade pile of rocks or stones often  
26 erected as a marker. NRC staff and the Assistant State Archaeologist also discussed the  
27 potential for historic properties of religious and cultural importance to Native American tribes to  
28 be present on or adjacent to the proposed project site.

### 29 30 **1.7.3.9 Coordination With Localities**

31 The NRC staff held meetings with the Edgemont Area Chamber of Commerce in Edgemont,  
32 South Dakota, and Custer County Planning and Economic Development in Custer,  
33 South Dakota, on December 3, 2009, to discuss site-specific issues related to the proposed  
34 Dewey-Burdock ISR Project. Meetings with these entities focused on local economics, housing  
35 availability, and community services. Members of the Edgemont Area Chamber of Commerce  
36 described current infrastructure projects that would support growth and economic development  
37 in Edgemont and the surrounding area. Discussions with Custer County Planning and  
38 Economic Development staff focused on available housing, land, and medical services to  
39 handle the anticipated population increase from the proposed project.

## 40 **1.8 Structure of the SEIS**

41 As noted in Section 1.4.1 of this document, the GEIS (NRC, 2009a) evaluated the broad  
42 impacts of ISR projects in a four-state region where such projects are anticipated, but did not  
43 reach site-specific decisions for new ISR projects. The NRC staff evaluated the extent to which  
44 information and conclusions in the GEIS could be incorporated by reference into this SEIS. The  
45 NRC staff also determined whether any new and significant information existed that would  
46 change the expected environmental impact beyond what was evaluated in the GEIS.

1 Chapter 2 of this SEIS describes the proposed action and reasonable alternatives considered  
2 for the proposed Dewey-Burdock ISR Project, Chapter 3 describes the affected environment,  
3 and Chapter 4 evaluates the environmental impacts of implementing the proposed action and  
4 alternatives. Cumulative impacts are discussed in Chapter 5, while Chapter 6 summarizes  
5 mitigation measures to reduce adverse environmental impacts at the proposed project.  
6 Chapter 7 describes the environmental measurement and monitoring programs proposed for  
7 the Dewey-Burdock ISR Project. A cost-benefit analysis is provided in Chapter 8, and  
8 environmental consequences from the proposed action and alternatives are summarized in  
9 Chapter 9.

## 10 **1.9 References**

11 10 CFR Part 2. Code of Federal Regulations, Title 10, *Energy*, Part 2. “*Rules of Practice for*  
12 *Domestic Licensing Proceedings and Issuance of Orders.*” Washington, DC: U.S. Government  
13 Printing Office.

14  
15 10 CFR Part 20. Code of Federal Regulations, Title 10, *Energy*, Part 20. “*Standards for*  
16 *Protection Against Radiation.*” Washington, DC: U.S. Government Printing Office.

17  
18 10 CFR Part 40. Code of Federal Regulations, Title 10, *Energy*, Part 40. “*Domestic Licensing*  
19 *of Source Material.*” Washington, DC: U.S. Government Printing Office.

20  
21 10 CFR Part 40. Appendix A. Code of Federal Regulations, Title 10, *Energy*, Part 40.  
22 Appendix A. “*Criteria Relating to the Operation of Uranium Mills and to the Disposition of*  
23 *Tailings or Wastes Produced by the Extraction and Concentration of Source Material from Ores*  
24 *Processed Primarily from their Source Material Content.*” Washington, DC: U.S. Government  
25 Printing Office.

26  
27 10 CFR Part 51. Code of Federal Regulations, Title 10, *Energy*, Part 51. “*Environmental*  
28 *Protection Regulations for Domestic Licensing and Related Regulatory Functions.*”  
29 Washington, DC: U.S. Government Printing Office.

30  
31 36 CFR Part 800. Code of Federal Regulations, Title 36, *Parks, Forests, and Public Property*,  
32 Part 800. “*Protection of Historic Properties.*” Washington, DC: U.S. Government Printing  
33 Office.

34  
35 40 CFR Part 144. Code of Federal Regulations, Title 40, *Protection of the Environment*,  
36 Part 144. “*Underground Injection Control Program.*” Washington, DC: U.S. Government  
37 Printing Office.

38  
39 40 CFR Part 146. Code of Federal Regulations, Title 40, *Protection of the Environment*,  
40 Part 146. “*Underground Injection Control Program: Criteria and Standards.*” Washington, DC:  
41 U.S. Government Printing Office.

42  
43 43 CFR Part 3800. Code of Federal Regulations. Title 43, *Public Lands: Interior*, Part 3800.  
44 “*Mining Claims Under the General Mining Laws.*” Washington, DC: U.S. Government  
45 Printing Office.

46  
47 43 CFR Subpart 3809. Code of Federal Regulations. Title 43, *Public Lands: Interior*,  
48 Subpart 3809. “*Subsurface Management.*” Washington, DC: U.S. Government Printing Office.

- 1 75 FR 467. *Federal Register*, Vol. 75, No. 2, p. 467–471. “Notice of Opportunity for Hearing,  
2 License Application Request of Powertech (USA) Inc. Dewey-Burdock *In-Situ* Uranium  
3 Recovery Facility in Fall River and Custer Counties, SD, and Order Imposing Procedures for  
4 Access to Sensitive Unclassified Non-Safeguards Information (SUNSI) for Contention  
5 Preparation.” January 5, 2010.  
6
- 7 75 FR 3261. *Federal Register*, Vol. 75, No. 12, p. 3261–3262, “Powertech (USA) Inc.,  
8 Dewey-Burdock Project, New Source Material License Application, Notice of Intent To Prepare  
9 a Supplemental Environmental Impact Statement.” January 20, 2010.  
10 ASLB (Atomic Safety and Licensing Board). “Memorandum and Order (Ruling on  
11 Petitions to Intervene and Requests for Hearing).” In the Matter of Powertech (USA), Inc.  
12 (Dewey-Burdock *In-Situ* Uranium Recovery Facility). Docket No. 40-9075-MLA. ASLBP  
13 No. 10–898–02–MLA–BD01. ML102170300. August 5, 2010.  
14
- 15 BLM (U.S. Bureau of Land Management). “Draft Environmental Impact Statement, Dewey  
16 Conveyor Project.” ML12209A089. DOI–BLM–MT–040–2009–002–EIS. Belle Fourche,  
17 South Dakota: BLM Field Office, U.S. Department of Interior. January 2009.  
18 <[http://www.blm.gov/pgdata/etc/medialib/blm/mt/field\\_offices/south\\_dakota/dakotah.Par.28318.  
19 File.dat/DeweyDEIS.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/mt/field_offices/south_dakota/dakotah.Par.28318.File.dat/DeweyDEIS.pdf)> (25 July 2012).  
20
- 21 BLM. “Proposed Resource Management Plan and Final Environmental Impact Statement for  
22 Public Lands Administered by the Bureau of Land Management Rawlins Field Office.”  
23 ML12209A103. Rawlins, Wyoming: BLM, Rawlins Field Office. 2008.  
24 <[http://www.blm.gov/pgdata/etc/medialib/blm/wy/programs/planning/rmps/rawlins/feis.Par.3853  
26 2.File.dat/009\\_Chapter-3.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wy/programs/planning/rmps/rawlins/feis.Par.3853<br/>25 2.File.dat/009_Chapter-3.pdf)> (19 November 2009).  
27
- 27 BLM. “Newcastle Resource Management Plan.” ML12209A101. Newcastle, Wyoming: BLM,  
28 Newcastle Field Office. 2000. <<http://www.blm.gov/rmpweb/Newcastle/rmp.pdf>>  
29 (16 October 2009).  
30
- 31 BLM. “South Dakota Resource Management Plan, Final Environmental Impact Statement.”  
32 ML12209A099. Miles City District, Montana: BLM, South Dakota Resource Area. 1985.  
33 <[http://www.blm.gov/pgdata/etc/medialib/blm/mt/blm\\_programs/planning/sd\\_rmp.Par.92799.File  
35 .dat/finalchapter3.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/mt/blm_programs/planning/sd_rmp.Par.92799.File<br/>34 .dat/finalchapter3.pdf)> (03 November 2009).  
36
- 36 Consolidated Petitioners. “Consolidated Request for Hearing and Petition for Leave to  
37 Intervene.” In the Matter of Powertech USA (*In-Situ* Leach, Dewey Burdock, South Dakota).  
38 Docket No. 40-9075-MLA. ML100680010. March 8, 2010.  
39
- 40 Crow Tribe. “Crow Tribe Response to Formal Section 106 Consultation Letter.” E-mail  
41 (March 9). ML110690166. Crow Agency, Montana: Crow Tribe. 2011.  
42
- 43 ESRI (Environmental Systems Research Institute). “ArcGIS 9 Media Kit, ESRI Data and  
44 Maps 9.3.” Redlands, California: Environmental Systems Research Institute. 2008.  
45
- 46 Executive Order 11990. *Protection of Wetlands*. 42 FR 26961. May 24, 1977.  
47
- 48 FWS (U.S. Fish and Wildlife Service). “Re: Follow Up for the Proposed Dewey-Burdock *In-Situ*  
49 Recovery Project, Fall River and Custer Counties, South Dakota.” Email (August 27) Terry  
50 Quesinberry, Fish and Wildlife Biologist. ADAMS Accession No. ML12240A317.  
51 Pierre, South Dakota: FWS. 2012.

- 1 FWS. "Environmental Comments on Powertech Dewey-Burdock Project, Custer and Fall River  
2 County, South Dakota." ML100970556. Washington, DC: FWS. March 29, 2010.  
3
- 4 Lower Brule Sioux Tribe. "Lower Brule Sioux Tribe Response to Formal Section 106  
5 Consultation Letter." ML103340146. Lower Brule, South Dakota: Lower Brule Sioux Tribe.  
6 November 15, 2010.  
7
- 8 NRC (U.S. Nuclear Regulatory Commission). "Government to Government Consultation on  
9 February 14-15, 2012." ML120330066. Letter to Tribal Historic Preservation Officers.  
10 Washington, DC: NRC. 2012a.  
11
- 12 NRC. "Transmittal of Applicant's Statement of Work Regarding Crow Butte and Dewey-Burdock  
13 Projects." Letter to Tribal Historic Preservation Officers. ML120730509. Washington, DC:  
14 2012b.  
15
- 16 NRC. "Transmittal of a Letter Sent to THPOs Regarding Teleconference on Crow Butte and  
17 Dewey-Burdock Projects." Letter to Tribal Historic Preservation Officers. ML12130A067.  
18 Washington, DC: NRC. 2012c.  
19
- 20 NRC. "Request for a Proposal with Cost Estimate; Proposed Dewey Burdock In-Situ Recovery  
21 Project." Letter to Tribal Historic Preservation Officers. ML12264A594. Washington, DC:  
22 NRC. 2012d.  
23
- 24 NRC. "Transmittal of Tribe's Proposal and Cost Estimate for the Proposed Dewey-Burdock ISR  
25 Project." Letter to R. Blubaugh, Vice President – Health, Safety, and Environmental Resources,  
26 Powertech (USA) Inc. from K. Hsueh, Chief, Nuclear Regulatory Commission, Environmental  
27 Review Branch, Division of Waste Management and Environmental Protection, Office of Federal  
28 and State Materials and Environmental Management Programs. ML12278A185. Washington,  
29 DC: NRC. 2012e.  
30
- 31 NRC. "Transmittal of Tribe's Proposal and Cost Estimate for the Proposed Dewey-Burdock ISR  
32 Project." Letter to TribalHistoric Preservation Officers. ML12286A310. Washington, DC: NRC.  
33 2012f.  
34
- 35 NRC. NUREG–1910, "Environmental Impact Statement for the Nichols Ranch ISR Project in  
36 Campbell and Johnson Counties, Wyoming." Supplement to the Generic Environmental Impact  
37 Statement for *In-Situ* Leach Uranium Milling Facilities. Final Report. Supplement 2.  
38 ML103440120. Washington, DC: NRC, Office of Federal and State Materials and  
39 Environmental Management Programs. January 2011a.  
40
- 41 NRC. NUREG–1910, "Environmental Impact Statement for the Lost Creek ISR Project in  
42 Sweetwater County, Wyoming." Supplement to the Generic Environmental Impact Statement  
43 for *In-Situ* Leach Uranium Milling Facilities. Final Report. Supplement 3. ML1125A006.  
44 Washington, DC: NRC, Office of Federal and State Materials and Environmental Management  
45 Programs. June 2011b.  
46
- 47 NRC. "Letter Invitations (March 4) for Formal Consultation Under the Section 106 of the  
48 National Historic Preservation Act to Crow Tribe (ML110550535), Ponca Tribe (ML110550372),  
49 and Santee Sioux Tribe (ML110550172)." Washington, DC: NRC. 2011c.  
50

1 NRC. "Letter Invitations (May 12) for Informal Information Gathering Meeting Pertaining to the  
2 Dewey-Burdock, Crow Butte North Trend, and Crow Butte License Renewal *In-Situ* Uranium  
3 Recovery Projects to Yankton Sioux Tribe (ML111320395), Santee Sioux Tribe (ML110950627),  
4 Lower Sioux Indian Community (ML111320035), Crow Tribe (ML111320087), Cheyenne River  
5 Sioux Tribe (ML111320116), Fort Peak Tribes (ML111320117), Northern Cheyenne Tribe  
6 (ML111320127), Crow Creek Sioux Tribe (ML111320145), Northern Arapaho Tribe  
7 (ML111320180), Flandreau Santee Sioux Tribe (ML111320183), Apache Tribe (ML111320201),  
8 Cheyenne and Arapaho Tribes (ML 111320221), Oglala Sioux Tribe (ML111320232), Eastern  
9 Shoshone Tribe (ML111320251), Lower Brule Sioux Tribe (ML111320264), Comanche Nation  
10 (ML111320280), Rosebud Sioux Tribe (ML111320299), Kiowa Indian Tribe (ML111320309),  
11 Sisseton-Wahpeton Oyate (ML111320342), Pawnee Nation (ML111320343), Standing Rock  
12 Sioux Tribe (ML111320375), Ponca Tribe (ML111320446), and Spirit Lake Tribe  
13 (ML111320496)." Washington, DC: NRC. 2011d.

14  
15 NRC. "Informal Information Gathering Meeting Pertaining to Dewey-Burdock, Crow Butte North  
16 Trend, and Crow Butte License Renewal *In-Situ* Uranium Recovery Projects." Official Transcript  
17 of Proceedings, June 8, 2011, Work Order Number NRC-904. ML111721938. Washington,  
18 DC: Neal R. Gross and Co., Inc., Court Reporters and Transcribers. 2011e.

19  
20 NRC. "NRC Information Request Relating to Section 106 and NEPA Reviews for the Proposed  
21 Dewey-Burdock Project." Letter (August 12) to Richard Blubaugh, Powertech (USA) Inc.  
22 ML112170237. Washington, DC: NRC. 2011f.

23  
24 NRC. "Information Related to Traditional Cultural Properties; Dewey-Burdock, Crow Butte North  
25 Trend, and Crow Butte License Renewal ISR Projects." Letters (October 28) sent to Eastern  
26 Shoshone Tribe (ML113000142), Standing Rock Sioux Tribe (ML113010079), Cheyenne River  
27 Sioux Tribe (ML113000088), Rosebud Sioux Tribe (ML113010057), Santee Sioux Tribe of  
28 Nebraska (113010062), Kiowa Indian Tribe of Oklahoma (ML113000160), Pawnee Nation of  
29 Oklahoma (ML113010046), Ponca Tribe of Nebraska (ML113010054), Fort Peak Tribes  
30 (ML113000151), Northern Arapaho Business Committee (ML113010031), Cheyenne and  
31 Arapaho Tribes (ML113000084), Comanche Nation (ML113000093), Flandreau-Santee Sioux  
32 Tribe (ML113010110), Three Affiliated Tribes (ML113010094), Sisseton-Wahpeton Lakota Tribe  
33 (ML113010129), Northern Cheyenne Tribe (ML113010034), Crow Creek Sioux Tribe  
34 (ML113000128), Yankton Sioux Tribe (ML113010101), Crow Tribe (ML13000098), Lower Brule  
35 Sioux Tribe (ML113000168), Spirit Lake Tribe (ML113010134), Lower Sioux Tribe  
36 (ML113010118), Apache Tribe of Oklahoma (ML112990285), and Oglala Sioux Tribe  
37 (ML112980555). Washington, DC: NRC. 2011g.

38  
39 NRC. NUREG-1910, "Environmental Impact Statement for the Moore Ranch ISR Project in  
40 Campbell County, Wyoming." Supplement to the Generic Environmental Impact Statement for  
41 *In-Situ* Leach Uranium Milling Facilities. Final Report. Supplement 1. ML102290470.  
42 Washington, DC: NRC, Office of Federal and State Materials and Environmental Management  
43 Programs. August 2010a.

44  
45 NRC. "Request for Information Regarding Endangered or Threatened Species and Critical  
46 Habitat for the Powertech Inc. Proposed Dewey-Burdock *In-Situ* Recovery Facility Near  
47 Edgemont South Dakota." Docket 040-0 9075. ML100331503. Washington, DC: NRC.  
48 March 15, 2010b.

49

- 1 NRC. "Request for Additional Information Regarding Tribal Historic and Cultural Resources  
2 Potentially Affected by the Powertech (USA) Inc. Proposed Dewey-Burdock *In-Situ* Recovery  
3 Facility." ML100331999. Washington, DC: NRC. March 19, 2010c.  
4
- 5 NRC. "Letter Invitations (September 10) for Formal Consultation Under the Section 106 of the  
6 National Historic Preservation Act to Cheyenne River Sioux Tribe (ML102520239), Crow Creek  
7 Sioux Tribe (ML102520156), Eastern Shoshone Tribe (ML102520553), Flandreau-Santee Sioux  
8 Tribe (ML102520194), Lower Brule Sioux Tribe (ML102520220), Lower Sioux Indian  
9 Community (ML102520486), Mandan, Hidatsa, and Arikara Nation (ML102520368), Northern  
10 Arapaho Tribe (ML102520520), Northern Cheyenne Tribe (ML102520504), Rosebud Sioux  
11 Tribe (ML102520282), Sisseton-Wahpeton Oyate (ML102520298), Spirit Lake Tribe  
12 (ML102520393), Standing Rock Sioux Tribe (ML102520308), Yankton Sioux Tribe  
13 (ML102520319), and Oglala Sioux Tribe (ML102460395)." Washington, DC: NRC. 2010d.  
14
- 15 NRC. NUREG–1910, "Generic Environmental Impact Statement for Uranium Milling  
16 Facilities—Final Report." ML091480244, ML091480188. Washington, DC: NRC. May 2009a.  
17
- 18 NRC. "Site Visit to the Proposed Dewey-Burdock Uranium Project, Fall River and  
19 Custer Counties, South Dakota, and Meetings with Federal, State, and County Agencies,  
20 and Local Organizations, November 30–December 4, 2009." ML093631627. Washington, DC:  
21 NRC. 2009b.  
22
- 23 NRC. "Acceptance Review of License Amendment Request for Dewey-Burdock Project." Letter  
24 (October 2) to Powertech (USA) Inc. ML092610201. Washington, DC: NRC. 2009c.  
25
- 26 NRC. NUREG–1508, "Final Environmental Impact Statement To Construct and Operate the  
27 Crownpoint Uranium Solution Mine Project, Crownpoint, New Mexico." ML082170248.  
28 Washington, DC: NRC. February 1997.  
29
- 30 NRC. NUREG–0706, "Final Generic Environmental Impact Statement on Uranium Milling  
31 Project M–25." ML032751663, ML0732751667, ML032751669. Washington, DC: NRC.  
32 September 1980.  
33
- 34 Oglala Sioux Tribe. "Oglala Sioux Tribe Response to Formal Section 106 Consultation Letter."  
35 ML110340107. Pine Ridge, South Dakota: Oglala Sioux Tribe. January 31, 2011.  
36
- 37 Oglala Sioux Tribe. "Petition To Intervene and Request for Hearing of the Oglala Sioux Tribe."  
38 In the Matter of Powertech (USA) Inc. (Dewey-Burdock *In-Situ* Uranium Recovery Facility).  
39 Docket No. 40–9075–MLA. ML100960645. Pine Ridge, South Dakota: Oglala Sioux Tribe.  
40 April 6, 2010.  
41
- 42 Powertech (USA) Inc. "Re: Information Needed to Complete Section 106 for Dewey-Burdock."  
43 Letter (August 29) from Powertech. ML12243A156. Greenwood Village, Colorado: Powertech.  
44 August 29, 2012.  
45
- 46 Powertech. "Revised Dewey-Burdock Project Underground Injection Control Permit  
47 Application." Greenwood Village, Colorado: Powertech. February 2010.  
48  
49  
50



- 1 Powertech. "Application for Source Materials License, Dewey-Burdock Uranium Project  
2 Application for NRC Uranium Recovery License—Environmental Report." Letter (August 10) to  
3 NRC Submitting Source Material Licensing Application. Docket No. 040-09075. ML092870153.  
4 Greenwood Village, Colorado: Powertech. 2009a.  
5
- 6 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
7 and Custer Counties, South Dakota—Environmental Report." Docket No. 040-09075.  
8 ML092870160. Greenwood Village, Colorado: Powertech. 2009b.  
9
- 10 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
11 and Custer Counties, South Dakota—Technical Report." Docket No. 040-09075.  
12 ML092870160. Greenwood Village, Colorado: Powertech. 2009c.  
13
- 14 Rosebud Sioux Tribe. "Tribal Consultation Response from Rosebud Sioux Tribe THPO for  
15 Dewey-Burdock Project." ML103270443. Rosebud, South Dakota: Rosebud Sioux Tribe.  
16 November 7, 2010.  
17
- 18 Sisseton Wahpeton Oyate. "Tribal Consultation Response from Sisseton Wahpeton Oyate  
19 THPO for Dewey-Burdock Project." ML103200287. Sisseton, South Dakota: Sisseton  
20 Wahpeton Oyate THPO. November 2, 2010.  
21
- 22 South Dakota Codified Law Chapter 45-6B. *Mined Land Reclamation*. South Dakota  
23 Legislature, South Dakota Codified Laws.  
24
- 25 Sprague, D. "Area of Potential Effects (APE) and Interviews with Tribal Members (Draft)." On  
26 file. Belle Fourche, South Dakota: Bureau of Land Management South Dakota Field Office.  
27 2008.  
28
- 29 Three Affiliated Tribes. "Three Affiliated Tribes Response to Formal Section 106  
30 Consultation Letter (September 20)." ML102780369. New Town, North Dakota: Three  
31 Affiliated Tribes—Mandan Hidatsa Arikara Nations. 2010.  
32
- 33 Turtle Mountain Band of Chippewa Indians. "Tribal Consultation Response From Turtle  
34 Mountain Band of Chippewa Indians for Dewey-Burdock Project." ML101100137. Belcourt,  
35 North Dakota: Turtle Mountain Band of Chippewa Indians. April 7, 2010.  
36
- 37 USFS (U.S. Forest Service). "Updated Land and Resource Management Plan for the Nebraska  
38 National Forests and Grasslands, Rocky Mountain Region." ML12209A127. 2009.  
39 <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/fsm9\\_027969.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fsm9_027969.pdf)> (09 December 2009).  
40
- 41 USFS. "Black Hills National Forest, Phase II Amendment: 1997 Land and Resource  
42 Management Plan Final Environmental Impact Statement." ML12209A121. 2005.  
43 <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/stelprdb5176525.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/stelprdb5176525.pdf)> (16 October 2009).  
44
- 45 USFS. "Black Hills National Forest, Phase I Amendment: 1997 Land and Resource  
46 Management Plan Environmental Assessment." ML12209A113. 2001.  
47 <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/fsm9\\_011960.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fsm9_011960.pdf)> (16 October 2009).  
48
- 49 USFS. "Black Hills National Forest Land and Resource Management Plan." ML12209A110.  
50 1997. <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/fsm9\\_011921.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fsm9_011921.pdf)>  
51 (03 November 2009).

- 1 Yankton Sioux Tribe. "Yankton Sioux Tribe Response to Formal Section 106 Consultation
- 2 Letter (December 3)." ML110030430. Marty, South Dakota: Yankton Sioux Tribe. 2010.

## 2 *IN-SITU* URANIUM RECOVERY AND ALTERNATIVES

This chapter describes the proposed federal action, which is to issue a U.S. Nuclear Regulatory Commission (NRC) source and byproduct material license to Powertech (USA) Inc. (Powertech), herein referred to as the applicant. The applicant would use its NRC license in connection with the construction, operation, aquifer restoration, and decommissioning of the Dewey-Burdock *In-Situ* Recovery (ISR) Project. In addition, the U.S. Bureau of Land Management (BLM) will utilize this analysis in its determination of whether or not to approve the applicant's modified Plan of Operations. This chapter also discusses alternatives to the proposed action. The alternatives analyzed in this Supplemental Environmental Impact Statement (SEIS) include a consideration of the No-Action alternative as required under the National Environmental Policy Act of 1969 (NEPA). Under the No-Action alternative, NRC would not issue a license to the applicant. The No-Action alternative is included to provide a basis for comparing and evaluating the potential impact of the proposed action and alternatives.

Section 2.1 of this SEIS describes the alternatives considered for detailed analysis, including the proposed action. Section 2.2 describes those alternatives that were considered but eliminated from detailed analysis. Section 2.3 compares the predicted environmental impacts of the proposed action and other alternatives. Section 2.4 sets forth the preliminary NRC staff recommendation on the proposed federal action. Section 2.5 provides the references cited for this chapter.

### 2.1 Alternatives Considered for Detailed Analysis

NRC staff used a variety of sources to determine a range of alternatives for detailed analysis in this SEIS. These sources include (i) the application's environmental report (Powertech, 2009a), technical report (Powertech, 2009b), and a supplemental report to the application (Powertech, 2009c); (ii) the applicant's responses to NRC staff requests for additional information (Powertech, 2010a–c, 2011); (iii) the scoping and draft comments on NUREG–1910, Generic Environmental Impact Statement for *In-Situ* Leach Uranium Milling Facilities (GEIS) (NRC, 2009a); (iv) the information gathered during the NRC staff site visits in November and December 2009 (NRC, 2009b); and (v) multidisciplinary discussions held among NRC staff and various stakeholders. This SEIS evaluates the potential environmental impacts from two alternatives: the Proposed Action (Alternative 1) and the No-Action alternative (Alternative 2).

#### 2.1.1 The Proposed Action (Alternative 1)


Under the proposed action, NRC would issue the applicant a source material license. The applicant would use its NRC license in connection with the construction, operation, aquifer restoration, and decommissioning of an ISR facility at the Dewey-Burdock ISR Project site. The project site is in Fall River and Custer Counties, South Dakota, as described in the license application. The applicant also is seeking BLM approval of its modified Plan of Operations subject to mitigation included in the license application and this draft SEIS. The applicant's proposed project would include processing facilities and sequentially developed wellfields sited in two contiguous areas: the Burdock area and the Dewey area. As uranium recovery activities cease at a wellfield, the area will be restored and reclaimed while a new wellfield and its supporting infrastructure is developed. Under the applicant's proposal, ISR methods would be used to extract uranium from sandstone-hosted uranium ore bodies in the Fall River Formation and the Chilson Member of the Lakota Formation that make up the Inyan Kara Group. The extracted uranium would be loaded onto ion exchange (IX) resin at a central processing plant in

1 the Burdock area and a satellite facility in the Dewey area. All processing of the uranium-loaded  
 2 IX resin, including elution (stripping uranium off the resin), precipitation, drying, and packaging  
 3 of the final “yellowcake” product, would take place at the Burdock central processing plant. The  
 4 applicant proposes the following options (discussed in SEIS Section 2.1.1.1.6.2) for the disposal  
 5 of liquid wastewater generated during uranium recovery: deep well disposal via Class V  
 6 injection wells, land application, or a combination of deep well disposal via Class V injection  
 7 wells and land application. Alternative wastewater disposal options for the proposed action  
 8 are evaporation ponds and surface water discharge, and these are discussed in SEIS  
 9 Section 2.1.1.2.

10  
11  
12  
13  
14  
15  
16  
17

**2.1.1.1 Proposed ISR Facility and Waste Disposal Options**

The proposed Dewey-Burdock ISR Project includes buildings, infrastructure, wellfields, and options for waste disposal, which are described in the following sections. The general ISR process was detailed in GEIS Chapter 2 (NRC, 2009a) and will not be repeated here. The projected schedule for the proposed action is shown in Figure 2.1-1.

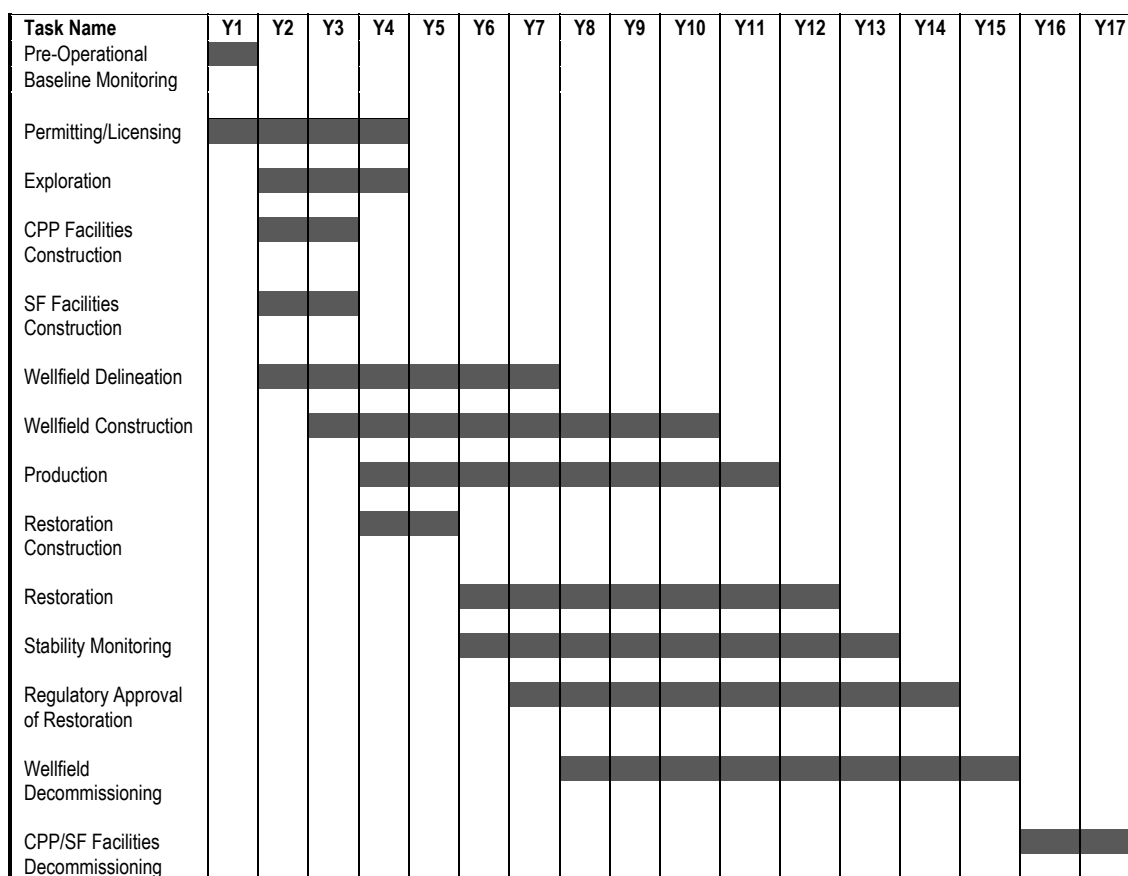

18  
19  
20  
21  
22

**Figure 2.1-1. Projected Schedule for Construction, Operation, Aquifer Restoration, and Decommissioning Activities for the Proposed Dewey-Burdock ISR Project.**  
 Source: Modified From Powertech (2009a, 2011).

#### 2.1.1.1.1 Site Description


The proposed Dewey-Burdock ISR Project is approximately 21 km [13 mi] north-northwest of Edgemont, South Dakota, in northern Fall River and southern Custer Counties, South Dakota (Figure 2.1-2). The project area is within the Nebraska-South Dakota-Wyoming Uranium Milling Region, described in the GEIS (NRC, 2009a). The proposed license area encompasses 4,282 ha [10,580 ac] of mostly privately owned land and is contained within two contiguous areas: the Burdock area and the Dewey area (Figure 2.1-3). The Burdock area (Township 7 South, Range 1 East, all or portions of Sections 1–3, 10–12, and 14–15; Township 6 South, Range 1 East, all or portions of Sections 27 and 34–35) would occupy the eastern part of the overall project area. The Dewey area (Township 7 South, Range 1 East, all or portions of Sections 4–5; Township 6 South, Range 1 East, all or portions of Sections 20–21 and 28–33) would occupy the western part of the overall project area. BLM manages approximately 97.1 ha [240 ac] of the permit area located in Township 7 South, Range 1 East, portions of Sections 3, 10, 11, and 12 (Figure 2.1-3). The U.S. Forest Service manages parcels of the Black Hills National Forest that lie adjacent to the eastern and northern boundaries of the proposed project area.

The proposed Dewey-Burdock ISR Project area is located within the Great Plains physiographic province on the southwestern edge of the Black Hills Uplift (Powertech, 2009a). The vegetation is a mix of short grasses and shrubs typical of semiarid steppe land along with ponderosa pine forest toward the Black Hills. The elevation within the project area ranges from approximately 1,097 to 1,189 m [3,600 to 3,900 ft] above mean sea level, with the highest elevations along the pine breaks that overlap the project area's eastern boundary. Topography in the project area and surrounding lands is primarily gently rolling in the western quarter, with more varied terrain in the pine breaks and dissected hills in the rest of the area. Two main streams pass through the proposed project area: Beaver Creek (perennial) and Pass Creek (intermittent) (Figure 2.1-3). Pass Creek joins Beaver Creek southwest of the proposed project area. Approximately 4 km [2.5 mi] south of the confluence of Beaver and Pass Creeks, Beaver Creek flows into the Cheyenne River. The primary land use within and surrounding the project area is cattle grazing (Powertech, 2009a).

Material shipment and employee commutes to and from the proposed Dewey-Burdock ISR Project area would be primarily from Edgemont, Hot Springs, and Custer in South Dakota and Newcastle in Wyoming (Figure 2.1-2). The main highways that would be used to access the proposed project site are U.S. Highway 18, which connects Edgemont with Hot Springs, and State Highway 89, which connects Edgemont via U.S. Highway 18 with Custer (see Figure 2.1-2). Most traffic would travel to the proposed site via Fall River County Road 6463 (referred to herein as Dewey Road), which extends northwestward from Edgemont to the abandoned community of Burdock, located in the southwest corner of the Burdock area (Powertech, 2009a). This road is a two-lane, all-weather gravel road.

Dewey Road continues north from Burdock to the Fall River-Custer County line where it becomes Custer County Road 769 and continues on to the community of Dewey, a total distance of about 37 km [23 mi] from Edgemont. Dewey Road closely follows the tracks of the Burlington Northern Santa Fe Railroad (see Figure 2.1-3), which runs northward from Edgemont to Newcastle, Wyoming. The community of Dewey is about 3.2 km [2 mi] from the northwest corner of the proposed Dewey-Burdock ISR Project boundary. Some traffic is expected to

1

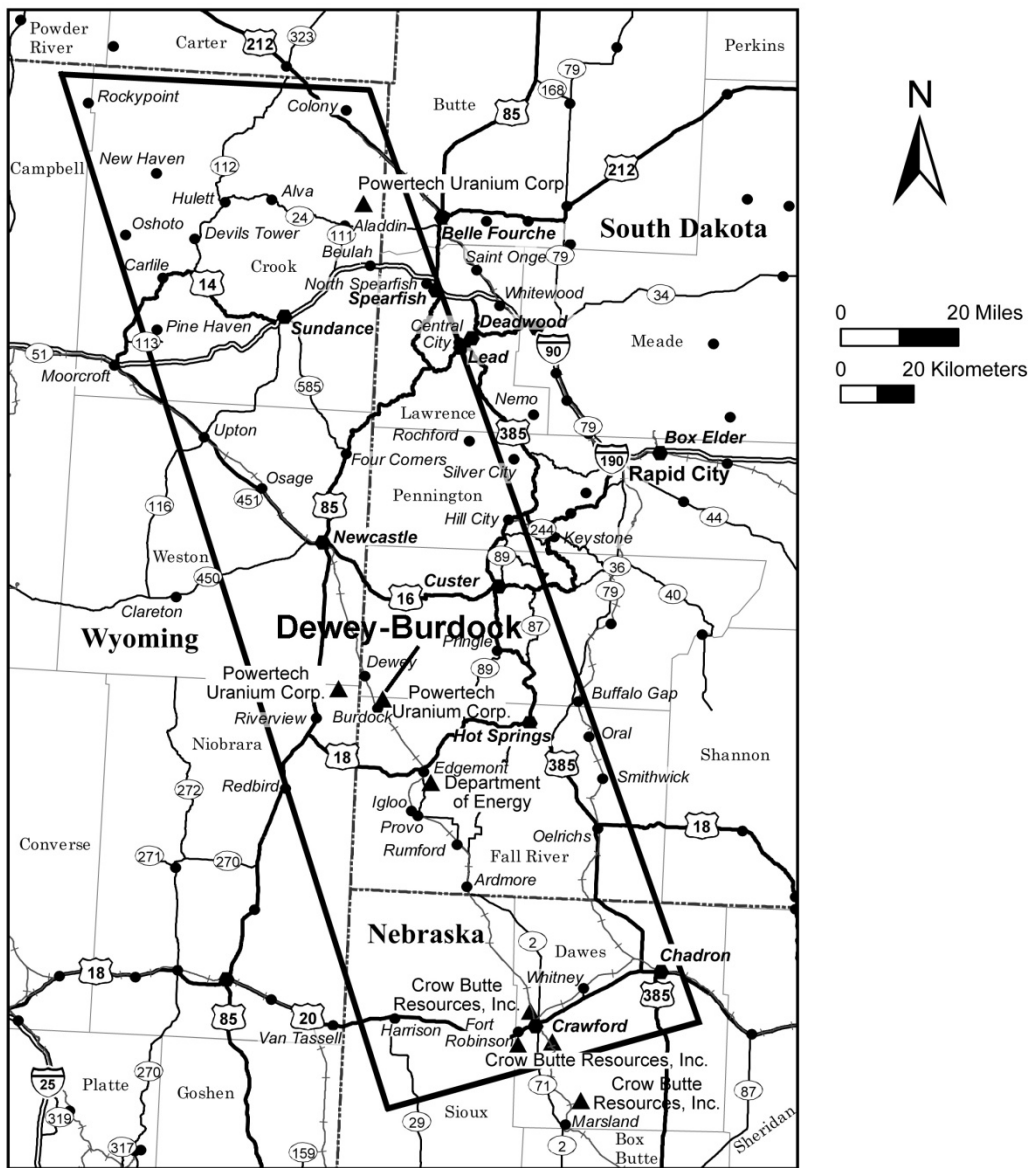

**SOUTH DAKOTA - NEBRASKA REGION**

- |  |                      |                             |
|--|----------------------|-----------------------------|
| ▲ Ur milling Sites (NRC)                 | — State Highway      | <b>Cities by Population</b> |
| ▭ South Dakota - Nebraska Milling Region | —+— Railroad         | ■ Over 50,000               |
| ▬ Interstate Highway                     | - - - State Boundary | ◆ 10,001 - 50,000           |
| — US Highway                             | □ Counties           | ● 1,000 - 10,000            |
|  |                      | ● Less than 1,000           |

**Figure 2.1-2. Map Showing Location of the Dewey-Burdock ISR Project Within the Nebraska-South Dakota-Wyoming Uranium Milling Region. Source: Modified From NRC (2009a).**

2  
3

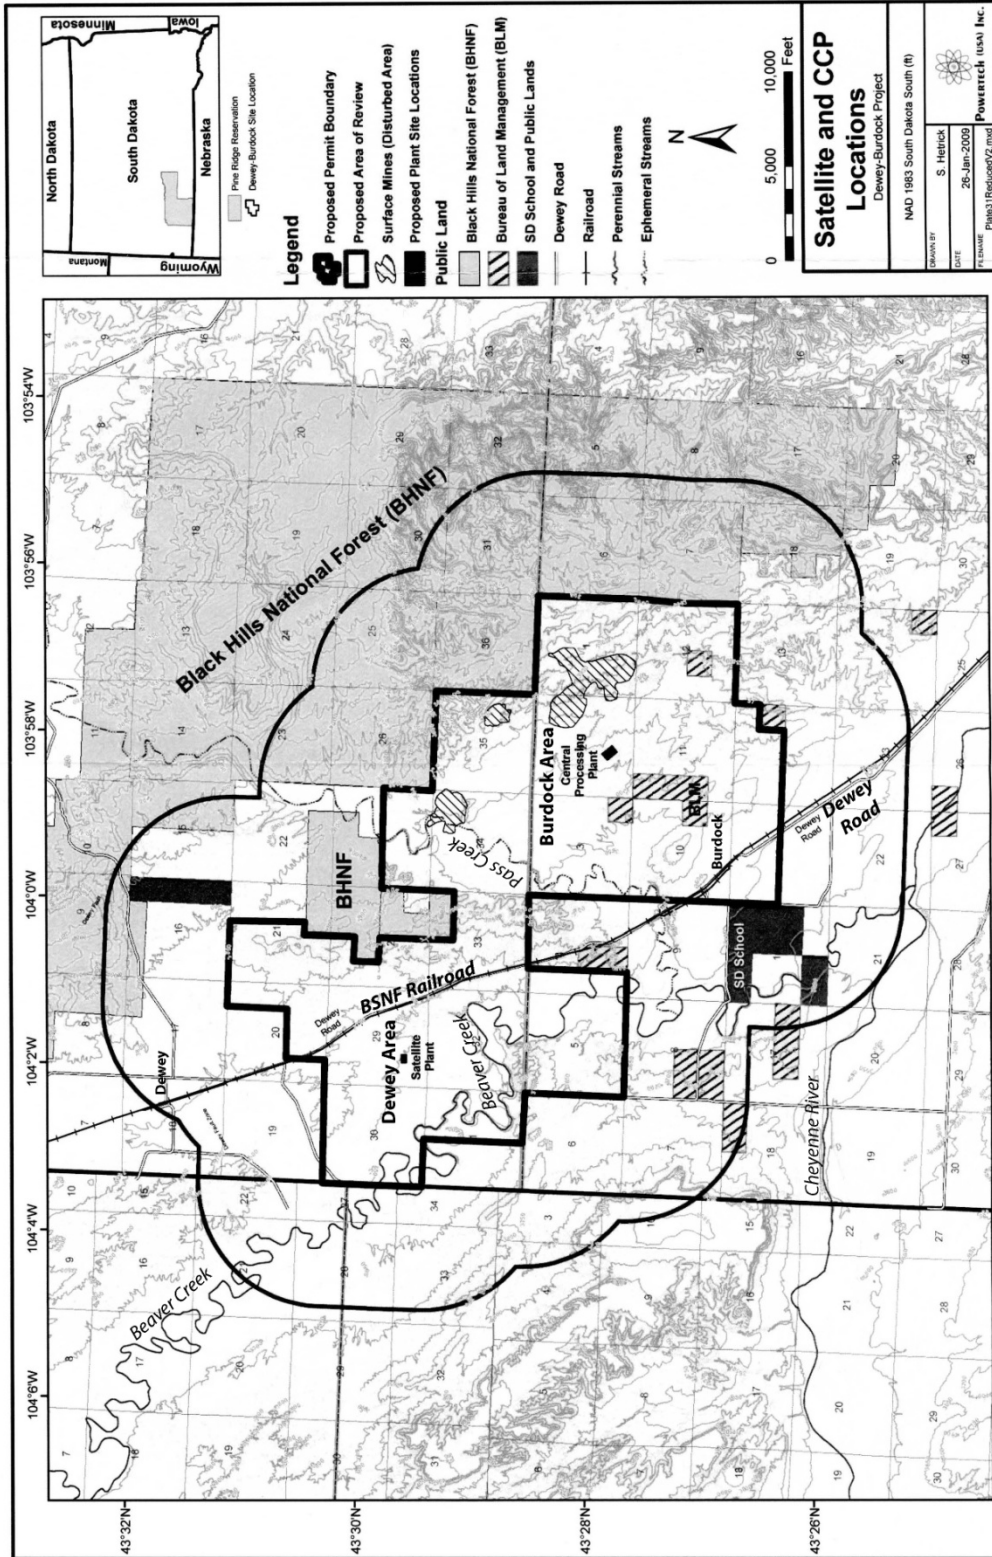


Figure 2.1-3. Dewey-Burdock ISR Project Permit Boundary Showing Dewey Area and Burdock Area, Location of BLM-Managed Land Within Burdock Area, and Position of Parcels of the Black Hills National Forest Bordering the Permit Area.

Source: Modified From Powertech (2009a).

1  
2  
3

1 access the site by traveling south from Newcastle along U.S. Highway 85, Old Highway 85, and  
2 Dewey Road (Powertech, 2010a). In addition, commuters who reside in the vicinity of Custer  
3 could use Pleasant Valley Road to access the proposed site from the north (Powertech, 2010a);  
4 however, this route would require much longer commute times than using the paved highways  
5 (State Highway 89 and U.S. Highway 18) to reach Edgemont, and then Dewey Road to access  
6 the proposed site from the south.

#### 7 8 2.1.1.1.2 Construction Activities 9

10 As described in GEIS Section 2.3, the general construction activities associated with ISR  
11 facilities are drilling wells; clearing and grading associated with road construction; excavating  
12 and building foundations and surface impoundments; assembling buildings; trenching; and  
13 laying pipelines (NRC, 2009a). The facilities to be constructed as part of the proposed  
14 Dewey-Burdock ISR Project are the central processing plant, satellite facility, and associated  
15 infrastructure, such as wellfields, pipelines, power lines, header houses, ponds, center pivot  
16 circles (land application), and access roads (Powertech, 2009a). Surface facilities, underground  
17 infrastructure, and access roads at the proposed Dewey-Burdock site would be designed and  
18 built using standard construction techniques. Construction vehicles would include bulldozers,  
19 drilling rigs, water trucks, forklifts, pump hoist trucks, pickup and flatbed trucks, and other  
20 support vehicles. Construction-related activities at the proposed project would continue  
21 throughout much of the life of the project, as wellfields are sequentially developed and  
22 additional wells, underground piping, and surface structures are added and then  
23 subsequently decommissioned.

24  
25 The applicant is proposing deep well injection via Class V injection wells, land application, or a  
26 combination of both methods as options for liquid waste disposal (Powertech, 2009a, 2011).  
27 The proposed Dewey-Burdock ISR Project area encompasses 4,282 ha [10,580 ac]. The  
28 applicant estimates that the land disturbed by the proposed project, excluding wellfields, would  
29 be approximately 42 ha [103 ac] if deep well injection alone is used to dispose of liquid waste  
30 and approximately 509 ha [1,258 ac] if land application alone is used to dispose of liquid waste  
31 (Powertech, 2010a). These estimates include site facilities, pipeline installation, access roads,  
32 impoundments, and center pivot circles for land application. As wellfields and supporting  
33 infrastructure are developed and constructed over the life of the project, the total disturbed area  
34 is estimated to increase to a maximum of 98 ha [243 ac] for the deep well disposal option with  
35 eight Class V injection wells and to a maximum of 566 ha [1,398 ac] for the land application  
36 option (Powertech, 2010a).

37  
38 The applicant intends to salvage and manage topsoil from building sites, permanent storage  
39 areas, access roads, and chemical storage areas prior to construction, in accordance with  
40 South Dakota Department of Environment and Natural Resources (SDDENR) requirements  
41 under Administrative Rules of South Dakota (ARSD) 74:29:07:07 and South Dakota Codified  
42 Law (SDCL) 45-6B-40. For topsoil stripping, earthmoving equipment, such as rubber-tired  
43 scrapers and front-end loaders, would be used. In the wellfields, topsoil removal would be  
44 limited to header house locations and access roads. Over the life of the project, the applicant  
45 estimates that 5.3 ha [13 ac] of topsoil would be stripped, stockpiled, and replaced (Powertech,  
46 2009b). Stockpiles for salvaged topsoil would be situated to minimize losses from wind and  
47 water erosion. To minimize sediment runoff, berms would be constructed around the perimeter  
48 of stockpiles, and the stockpiles would be vegetated with an approved seed mix. All  
49 stockpiles of topsoil would be identified with visible signs per SDDENR requirements under  
50 ARSD 74:29:07:07 (Powertech, 2009b).

51



#### 2.1.1.1.2.1 Buildings

The Dewey-Burdock ISR Project would consist of a central processing plant in the Burdock area and a satellite facility in the Dewey area (Figure 2.1-3). The Burdock central plant would fully process pregnant lixiviant (i.e., uranium-bearing solution) and would process uranium-loaded resin from the Dewey satellite facility. Major process equipment housed in the Burdock central plant would include the IX system; an elution, precipitation, and thickening circuit; a chemical addition system; a filtration system for the liquid waste stream circuit; and the yellowcake filtering, drying, and packaging system. The Dewey satellite facility would house an IX system; a lixiviant (leaching solution) make-up circuit; and a treatment circuit for the liquid waste stream. Uranium-loaded resin from the Dewey satellite facility would be transported to the Burdock central plant in tanker trucks for final processing and packaging. Both the central processing plant and satellite facility would have a resin transfer system and loading area. (Powertech, 2009a)

The general layout of the Burdock central plant is shown in Figure 2.1-4 and includes the placement of an office building, maintenance shop and warehouse, and central processing plant.

These facilities would be located on approximately 2.7 ha [6.7 ac] within Section 2, Township 7 South, Range 1 East and would be surrounded by a controlled access area fence. The central processing plant would be within an approximately 32-m × 114-m [105-ft × 375-ft], pre-engineered, metal building that would house the major process equipment. The entire perimeter of the central processing plant floor would be surrounded by 15.2-cm [6-in] containment curbs and sloped toward trench drains and sumps to contain spilled and leaked fluids. Spilled and leaked fluids would be removed from the sumps by pumps and transported to the appropriate liquid waste treatment and disposal system or recycled back to the appropriate uranium recovery process component. Bulk storage tanks for the processing chemicals, such as sulfuric and/or hydrochloric acid, sodium hydroxide, and hydrogen peroxide, would be located outside the central processing plant. The storage tanks would be placed in concrete secondary containment basins, designed to contain 110 percent of the tank volume, and would be designed to withstand a 25-year, 24-hour storm event. The secondary containment basins would be separated physically from the containment basins for all other chemical systems. Carbon dioxide would be stored outside the central plant. Oxygen would be stored either near the central plant or within wellfields. Because oxygen is combustible, it would be stored at a safe distance from the central plant and other chemical storage areas. (Powertech, 2009a)

Other substances stored at the Burdock central plant would include petroleum products (gasoline, diesel) and propane. Due to the flammable and/or combustible nature of these materials, all bulk quantities of these substances would be stored outside of the central processing plant. All gasoline and diesel storage tanks would be located aboveground and within secondary containment structures, designed and constructed to meet U.S. Environmental Protection Agency (EPA) requirements.

The general layout of the Dewey satellite facility is shown in Figure 2.1-5, which also shows the placement of the IX processing facility and administrative building. These facilities would be located on an estimated 1.2-ha [2.9-ac] area within Section 29, Township 6 South, Range 1 East and would be surrounded by a controlled access area fence. The IX processing facility

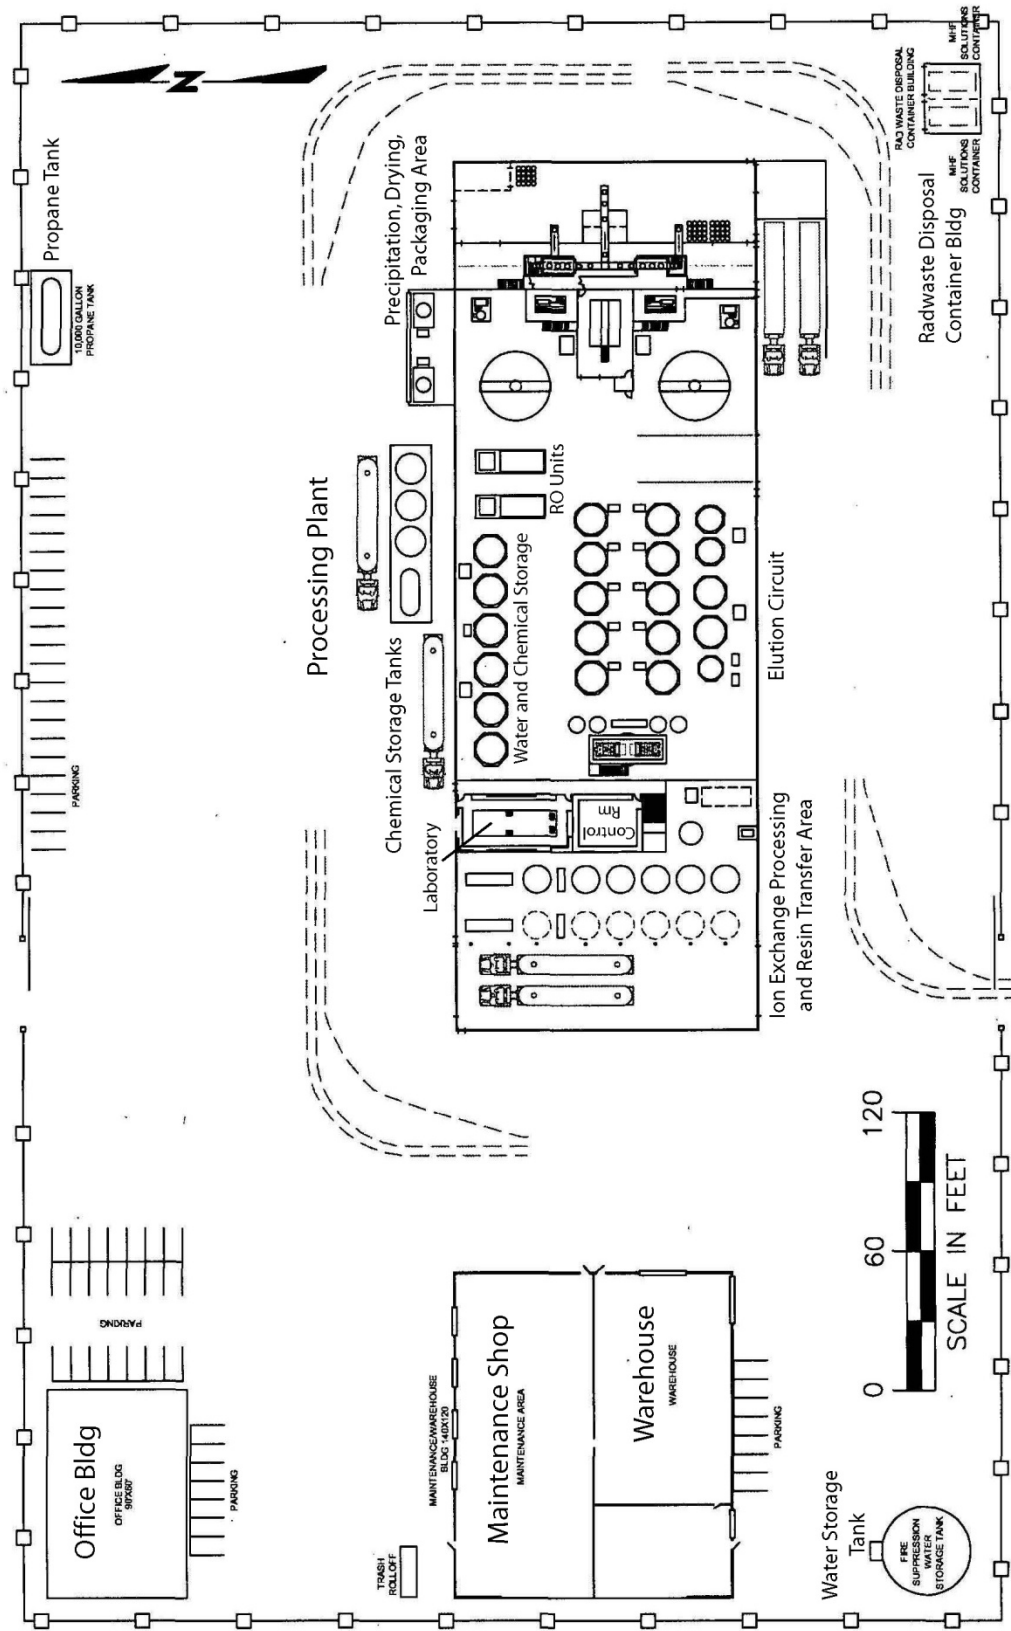


Figure 2.1-4. General Site Plan for the Burdock Central Processing Plant. Source: Modified From Powertech (2009b).

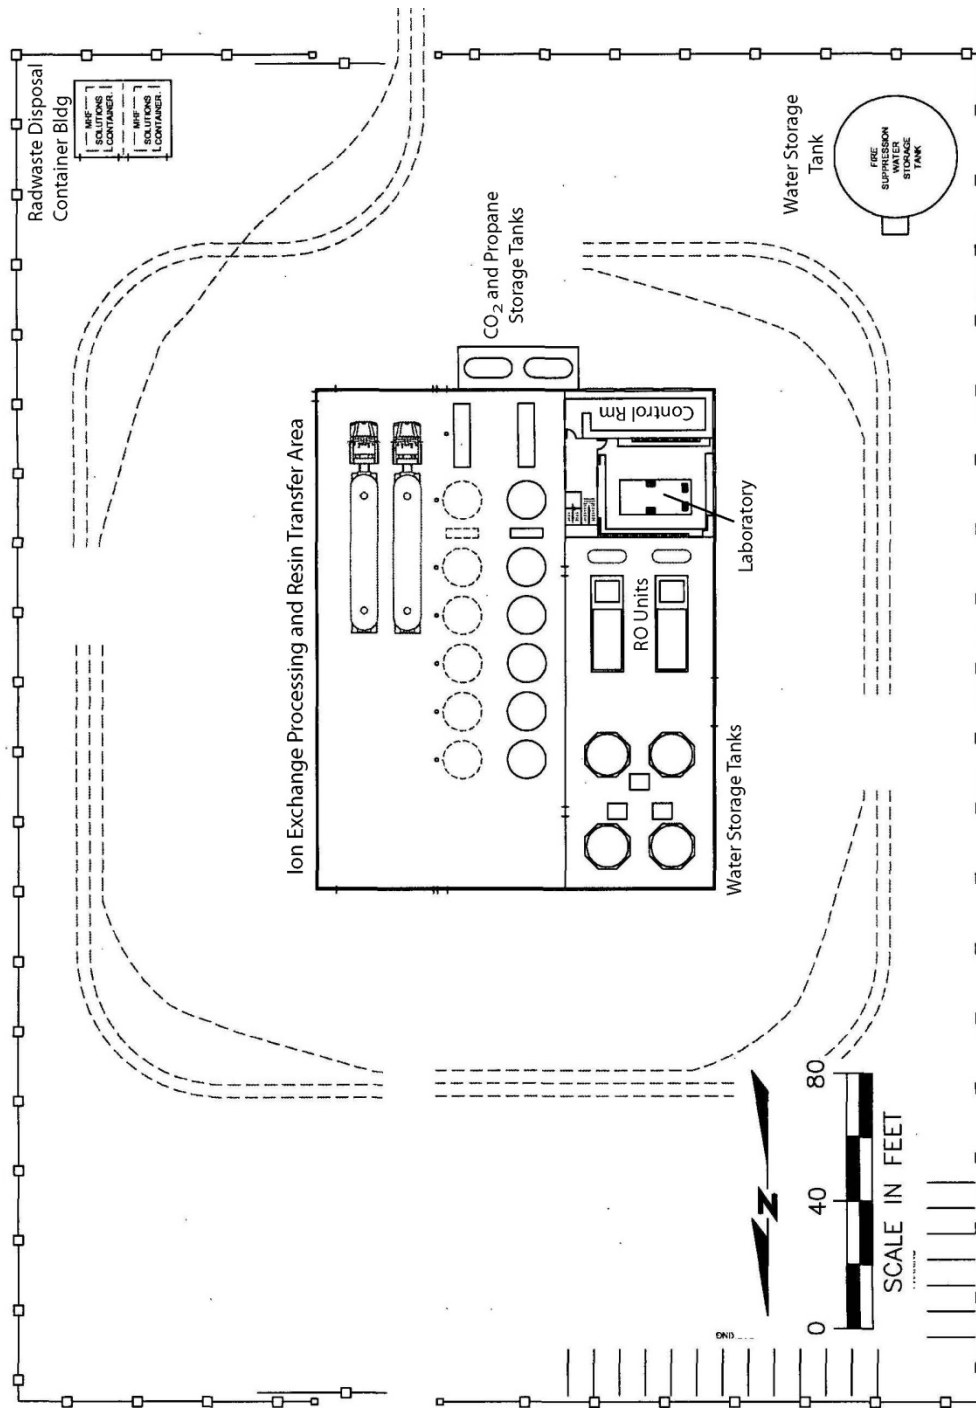


Figure 2.1-5. General Site Plan for the Dewey Satellite Facility.  
Source: Modified From Powertech (2009b).

1 would be within an approximately 38-m × 43-m [125-ft × 140-ft], pre-engineered, metal building.  
2 A 15.2-cm [6-in]-high containment curb would be constructed around the perimeter wall of the  
3 processing building slab. The satellite facility floor would be sloped toward trench drains and  
4 sumps to contain spilled and leaked fluids. Spilled and leaked fluids would be removed from the  
5 sumps by pumps and transported to the appropriate liquid waste treatment and disposal system  
6 or recycled back to the appropriate process component. Bulk storage tanks for oxygen and  
7 carbon dioxide would be located outside the IX processing building in concrete secondary  
8 containment basins designed to contain 110 percent of the tank volume plus withstand a  
9 25-year, 24-hour storm event. (Powertech, 2009a)

10  
11 Byproduct material, consisting of contaminated used equipment parts, personal protective  
12 equipment, and wastes from cleanup of spills or other housekeeping activities, would be stored  
13 in designated byproduct storage buildings. The Burdock central plant site and the Dewey  
14 satellite facility site will each have one byproduct storage building (Figures 2.1-4 and 2.1-5).  
15 These buildings would consist of a concrete slab with a containment curb surrounding the  
16 perimeter. Byproduct material would be stored in rolloff containers (bins), which would be both  
17 liquid tight and fully enclosed. The storage buildings would accommodate two 15-m<sup>3</sup> [20-yd<sup>3</sup>]  
18 bins. The concrete slabs would be designed so the rolloff bins could be externally  
19 decontaminated before being transported from the proposed facility. (Powertech, 2009b)

#### 20 21 2.1.1.1.2.2 Access Roads

22  
23 As described in SEIS Section 2.1.1.1.1, the main highway that would be used to access the  
24 proposed Dewey-Burdock ISR Project is U.S. Highway 18, which connects Edgemont with  
25 Hot Springs to the east of the proposed site. Material shipment and employee commutes to  
26 and from the project area would be primarily via Dewey Road (Fall River County Road 6463  
27 and Custer County Road 769), which extends northwestward from Edgemont to the  
28 community of Dewey, which is about 3.2 km [2 mi] from the northwest corner of the  
29 Dewey-Burdock ISR Project boundary.

30  
31 The proposed Dewey-Burdock ISR Project would utilize existing roads to the greatest degree  
32 possible. However, the construction of additional access roads would be required. A main  
33 access road to the proposed central processing plant in the Burdock area would be constructed  
34 off Dewey Road in Township 7 South, Range 1 East, Section 10, near the abandoned  
35 community of Burdock (see figures in Sections 2.1.1.1.2.4.1 and 2.1.1.1.2.4.2). This access  
36 road would join with several preexisting roads that traverse the Burdock area. A main access  
37 road to the proposed satellite facility in the Dewey area would be constructed farther to the  
38 north, off Dewey Road in Township 6 South, Range 1 East, Section 20 (see figures in  
39 Sections 2.1.1.1.2.4.1 and 2.1.1.1.2.4.2). This access road would connect with several  
40 preexisting roads that traverse the Dewey area. The preexisting roads within the Burdock and  
41 Dewey areas would be used to the fullest extent possible to provide access to the proposed  
42 facility structures and wellfields and to limit the construction of new roads. Secondary roads  
43 would be constructed to provide access to other proposed facilities (such as header houses)  
44 and wellfields not currently accessible by existing roads. The applicant would secure approvals  
45 from private landowners and BLM, as well as required county permits, prior to constructing any  
46 access roads within the proposed project area (Powertech, 2009a). Construction of access  
47 roads within the proposed project area would be kept to a minimum.  
48  
49

### 2.1.1.1.2.3 Wellfields


The proposed locations of wellfields in the Dewey and Burdock areas are shown in Figure 2.1-6. Exploratory drilling, conducted by the applicant and the Tennessee Valley Authority (TVA), has demonstrated that commercially extractable uranium ore bodies at the proposed site are located in sandstones in the Fall River Formation and the Chilson Member of the Lakota Formation that make up the Inyan Kara Group. The uranium mineralization occurs along a large U-shaped trend that is 8 km [5 mi] long and 5 to 6 km [3 to 4 mi] wide (Figure 2.1-6). Mineralized sands within the project area occur at depths of less than 30 m [100 ft] in the outcrop area of the Fall River Formation in the eastern portion of the Burdock area and at depths of up to 244 m [800 ft] in the Chilson Member of the Lakota Formation in the northwestern portion of the Dewey area (Powertech, 2009c, 2011). The geology, hydrology, and characteristics of the uranium mineralization at the Dewey-Burdock site are detailed in SEIS Sections 3.4 and 3.5. The applicant estimated the mineable resource within the permit area at 3.45 million kg [7.6 million lb] of  $U_3O_8$  with an average grade of 0.21 percent (Powertech, 2009a).

Extraction is proposed at 10 wellfields in the Burdock area and at 4 wellfields in the Dewey area, as shown in Figure 2.1-6 (Powertech, 2011). The initial Burdock wellfield (B-WF1) would be located over mapped ore bodies within the Chilson Member of the Lakota Formation; the initial Dewey wellfield (D-WF1) would be located over mapped ore bodies within the Fall River Formation (Powertech, 2011). Wellfield construction would affect an area of 15.9 ha [39.3 ac] in D-WF1 and an area of 7.1 ha [17.6 ac] in B-WF1 (Powertech, 2010c). Prior to finalizing the design of wellfields, the applicant would conduct closely spaced and localized delineation drilling to refine information on the location, grade, thickness, and production capability of the ore. The applicant estimated that 248 delineation holes (77 holes at B-WF1 and 171 holes at D-WF1) would be drilled during the construction phase of the proposed project (Powertech, 2010c). To estimate and manage ore production, geologic and geophysical data from the drill holes would be analyzed to determine the depth of the mineralized zone and confining units, identify and locate potential barriers to groundwater flow caused by clay stringers, and determine the thickness and grade of ore deposits. After field data are collected, delineation drill holes would be plugged and abandoned in place, according to SDDENR regulations under ARSD 74:11:08 (Powertech, 2009a). The applicant would design the production well spacing and the size and depth of the well screen intervals for each well based on the results of the delineation drilling data. The wellfields would be located over the delineated mineralization zones, to facilitate extraction of 0.45 million kg [1 million lb] of  $U_3O_8$  per year, which is the design capacity of the facilities (Powertech, 2009a).

Two types of wells would be installed as part of the operations at the proposed Dewey-Burdock ISR Project: dual-purpose injection/production wells and monitoring wells. Injection wells would be used to introduce lixiviant into the uranium mineralization; production wells would be used to extract uranium-bearing solutions; and monitoring wells would be used to identify and assess impacts of ongoing operations and detect groundwater excursions.

#### 2.1.1.1.2.3.1 Injection and Production Wells

The applicant plans to construct wellfields consisting of a series of injection and production wells laid out in geometric-shaped patterns across target uranium mineralization zones (Powertech, 2009a). The applicant estimated 100 production wells and 194 injection wells would be installed at the initial wellfields during the construction phase of the proposed project (Powertech, 2010c). The wells would be "cased" by lowering a pipe into the borehole either during or after drilling to

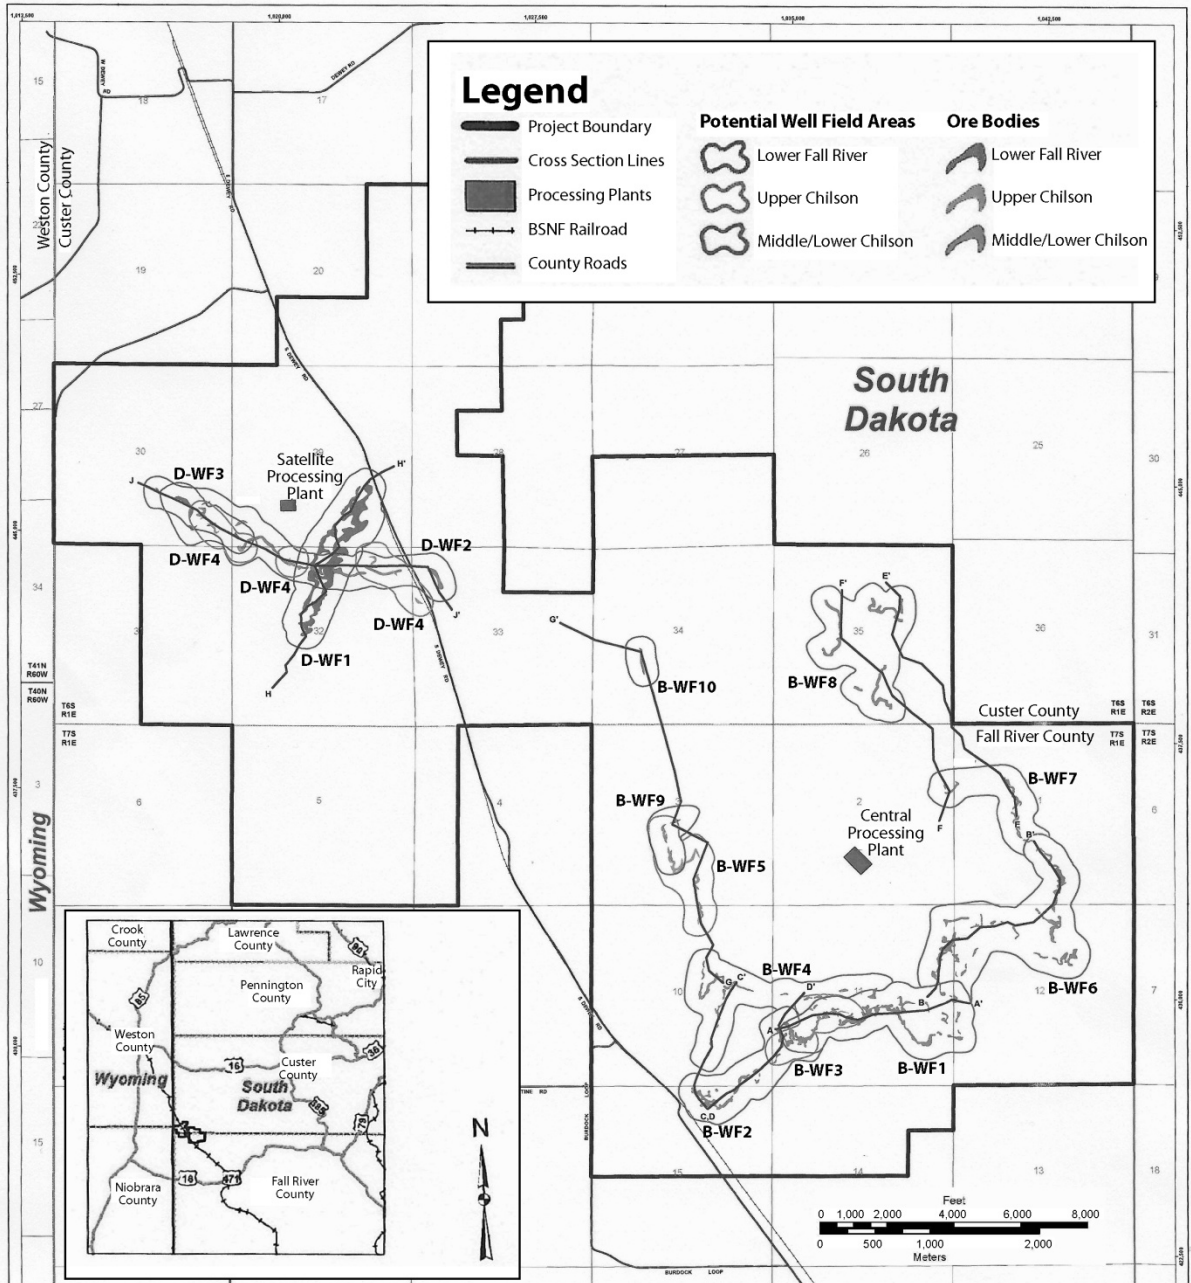


**Figure 2.1-6. Map of Dewey-Burdock ISR Project Area Showing Locations of the Dewey Satellite Facility, Burdock Central Plant, Mapped Orebodies, and Proposed Wellfields.**

**Source: Modified From Powertech (2011).**

- 1
- 2 prevent the sides of the borehole from caving, prevent loss of drilling fluids into porous
- 3 formations, and prevent unwanted fluids from entering the borehole. The base of the well
- 4 casing at all injection and production wells would extend to or below the confining unit overlying
- 5 the mineralized zone. The screened interval of injection and production wells would be
- 6 completed only across the targeted ore zone (Figure 2.1-7). Wells will be designed and
- 7 constructed so they can be used as either injection or production wells. The dual use of wells

1

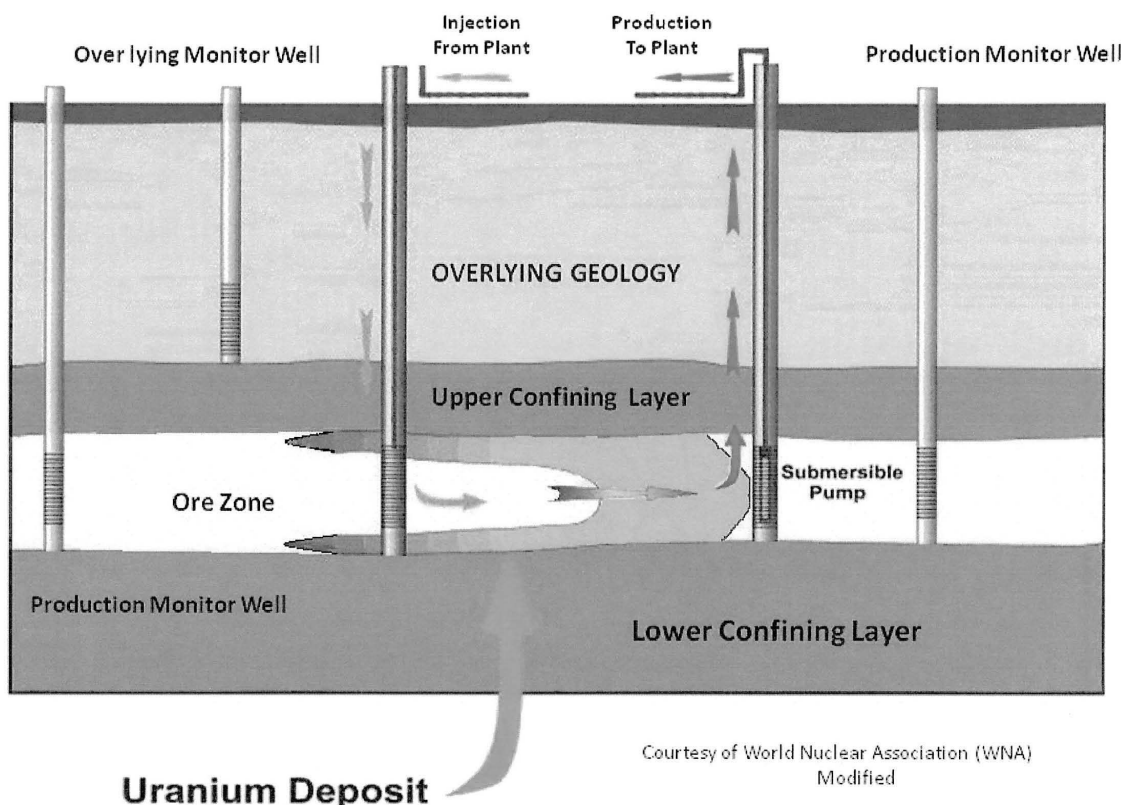

**Figure 2.1-7. Schematic Diagram of Typical Well Placement.**

Source: Powertech (2009a).

2

3 allows wellfield flow patterns to be changed to improve uranium production at the proposed  
4 project. Dual-use wells also result in more effective restoration of groundwater quality during  
5 the aquifer restoration phase of the ISR process (see SEIS Section 2.1.1.1.4).

6

7 Wellfield patterns and well spacing at the proposed Dewey-Burdock ISR Project site may vary at  
8 each wellfield due to variations in the lateral distribution and ore grade within the mineralized  
9 zone (Powertech, 2009a). The applicant plans to utilize a five-spot square pattern where  
10 injection wells would be at the corners of a 30-m [100-ft] wide square and a production well  
11 would be placed in the center of the square (Figure 2.1-8). Rectangular, hexagonal, or  
12 triangular configurations may be used depending on the geometry and characteristics of the ore  
13 body as it is mapped during delineation drilling and prior to final wellfield design.

14

15 The applicant may elect to space the injection wells as close as 15 m [50 ft] apart for efficient  
16 uranium recovery based on the results of delineation drilling, thus increasing the overall number  
17 of wells needed for this process (Powertech, 2009c).

18

19 Production and injection wells would be connected to manifolds in a wellfield header house;  
20 header houses distribute injection fluid to injection wells and collect production solution from  
21 recovery wells. The header house would include manifolds, valves, flow meters, pressure  
22 meters, and booster pumps. Oxygen would be incorporated into the lixiviant at the header  
23 house before it is injected into the production formation. Typically, one header house would  
24

24

1

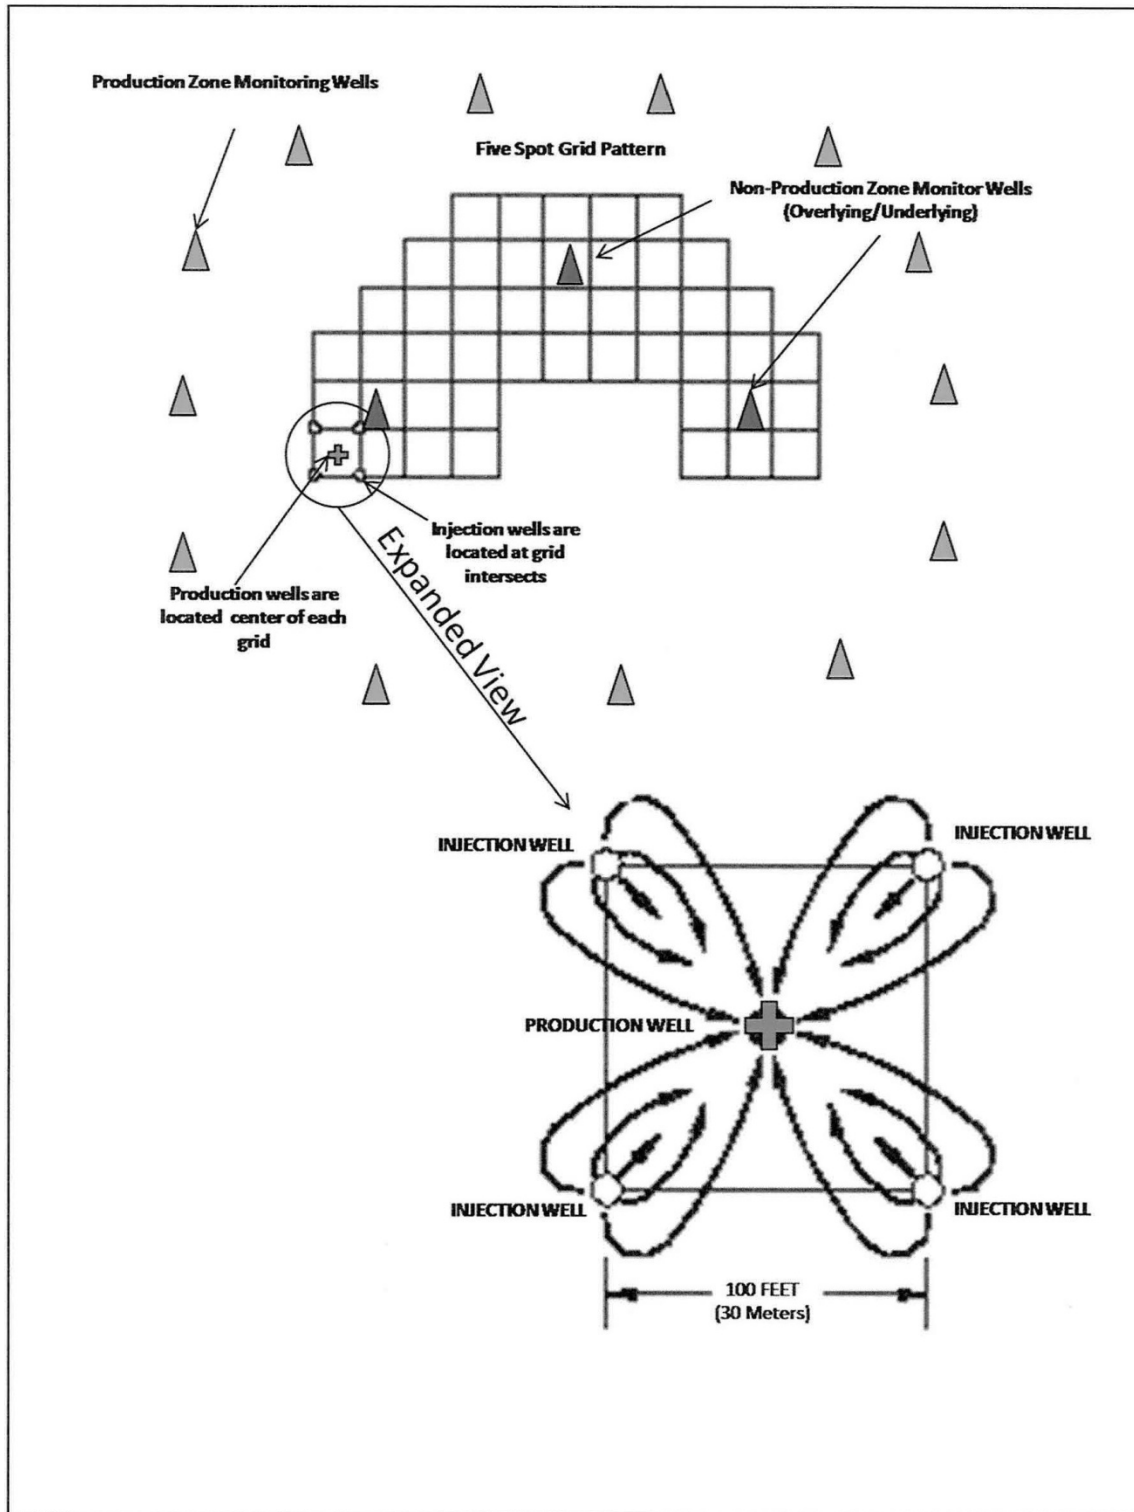


Figure 2.1-8. Schematic Diagram of Typical Five-Spot Wellfield Pattern. Source: Modified From Powertech (2009a).

2



1 serve up to 20 production wells and 80 injection wells. Additional header houses would be  
2 constructed as the wellfield expands (Powertech, 2009a).

3  
4 The applicant estimates that, at full production, wellfields in the proposed Dewey and Burdock  
5 areas would operate at an average production flow rate of 15,140 Lpm [4,000 gpm] (Powertech,  
6 2011). The typical production flow rate would be approximately 9,084 Lpm [2,400 gpm] from the  
7 Burdock wellfields and approximately 6,056 Lpm [1,600 gpm] from the Dewey wellfields  
8 (Powertech, 2011). To create an overall hydraulic cone of depression, more water would be  
9 withdrawn than injected into each wellfield. Under this pressure gradient, the groundwater  
10 movement would flow toward the center of the production zone and control the movement of  
11 production solution. The difference between the amount of water withdrawn and injected is  
12 referred to as the wellfield “bleed.” The applicant’s projected production bleed for the proposed  
13 Dewey-Burdock ISR Project would be approximately 0.875 percent of the total production flow  
14 rate, or approximately 79.5 Lpm [21 gpm] at the Burdock wellfields and approximately 53 Lpm  
15 [14 gpm] at the Dewey wellfields (Powertech, 2011). The bleed rate would be adjusted, as  
16 necessary, during production to maintain the wellfield cone of depression.

17  
18 An EPA-administered underground injection  
19 control (UIC) program regulates the design,  
20 construction, testing, operation, and closure of  
21 injection wells. Injection wells for uranium  
22 extraction are classified under UIC as Class III  
23 wells; these wells are located in the aquifer(s)  
24 containing the uranium that will be recovered.  
25 The proposed operation requires the applicant  
26 to obtain a UIC permit from EPA to use Class III  
27 injection wells. Before ISR operations begin,  
28 the portion of the aquifer(s) designated for  
29 uranium recovery must be exempted from the  
30 underground source of drinking water (USDW)  
31 designation, in accordance with the Safe  
32 Drinking Water Act (SDWA) and pursuant to 40  
33 CFR Part 146. A USDW is defined as an  
34 aquifer or its portion that: (1)(i) supplies any  
35 public water system; or (ii) that contains a  
36 sufficient quantity of groundwater to supply a  
37 public water system; and (a) currently supplies  
38 drinking water for human consumption; or (b)  
39 contains fewer than 10,000 mg/L (10,000 ppm)  
40 total dissolved solids; and that (2) is not an  
41 exempted aquifer. An aquifer or aquifer portion  
42 that meets the criteria for a USDW may be  
43 determined to be an “exempted aquifer” if:  
44 (i)(a) it does not currently serve as a source of  
45 drinking water and (b) it cannot now and will not in the future serve as a source of drinking water  
46 because it is mineral, hydrocarbon, or geothermal energy producing; or (ii) can be demonstrated  
47 by a permit applicant as part of a permit application for a Class III operation to contain minerals  
48 that, considering their quantity and location, are expected to be commercially producible. The  
49 applicant, therefore, must obtain an aquifer exemption from EPA before initiating  
50 ISR operations.

The EPA Underground Injection Control (UIC) Program is responsible for regulating construction, operation, permitting, and closure of injection wells that place fluids underground. The types of injection wells regulated by the EPA UIC Program are defined below:

**Class I** (Industrial and Municipal Waste Disposal Wells) are used to inject hazardous and nonhazardous wastes into deep, isolated rock formations that are thousands of meters [feet] below the lowermost USDW.

**Class II** (Oil- and Gas-Related Injection Wells) are used to inject fluids associated with oil and natural gas production.

**Class III** (Mining Wells) are used to inject fluids to dissolve and extract minerals such as uranium, salt, copper, and sulfur.

**Class IV** (Shallow Hazardous and Radioactive Injection Wells) are shallow wells used to inject hazardous and nonhazardous or radioactive wastes into or above a geologic formation that contains a USDW.

**Class V** wells are used to inject nonhazardous fluids underground. Most are used to dispose of wastes into or above USDWs.

**Class VI** (CO<sub>2</sub> Geosequestration Wells) are deep wells used to inject carbon dioxide into deep geologic formations for long- term storage.

1 Once exempted, the defined aquifer(s) or its portion would no longer be protected as a USDW  
2 under SDWA. For example, at the proposed Dewey-Burdock ISR Project, portions of the  
3 Fall River and Chilson aquifers could potentially be exempted in defined areas related to  
4 commercial mineral production uranium recovery operations. The remaining portion of the  
5 Fall River and Chilson aquifers, beyond the designated exempted area, would still be  
6 considered a USDW and continue to be protected under the SDWA.

#### 7 8 2.1.1.1.2.3.2 Monitoring Wells 9

10 The applicant has proposed installing production zone monitoring wells at the periphery of each  
11 production area (Figure 2.1-8). This perimeter monitoring well “ring” would be utilized for early  
12 detection of horizontal excursions from within the sand unit or aquifer where production is  
13 occurring. An excursion is declared when the concentrations of certain indicator parameters  
14 exceed upper control limits established by the license and verified by NRC and EPA or the  
15 state. The purpose of the monitoring well ring is to ensure that groundwater quality in aquifers  
16 outside exempted zones is not impacted by ISR operations.

17  
18 In some areas of the proposed Dewey-Burdock ISR Project site, multiple ore bodies are  
19 vertically stacked within the Fall River Formation or the Chilson Member of the Lakota  
20 Formation with no substantial confining layers between the ore bodies. In these areas, the  
21 perimeter production zone monitor wells would be screened across the full thickness of the  
22 stacked ore bodies and the ore bodies treated as a single production zone (Powertech, 2011).  
23 In other areas of the project site, stacked ore bodies within the Fall River and Chilson Member  
24 are separated by low permeability units that may act as localized confining units (Powertech,  
25 2011). If delineation drilling and pump testing demonstrate that localized confining units provide  
26 hydraulic separation between ore bodies within one of the primary production units (e.g., the  
27 Fall River or Chilson), then monitor wells could be located and screened only within the portion  
28 of the unit in which the orebody is located (Powertech, 2011).

29  
30 Production zone monitor wells would be located at a maximum of 122 m [400 ft] from the  
31 production area (Powertech, 2009a, 2009c, 2011). The spacing between monitor wells would  
32 also be 122 m [400 ft] (Powertech, 2009a). To support the proposed spacing of monitor wells,  
33 the applicant conducted numerical simulations using site-specific hydrogeologic data and  
34 proposed production flow rates to evaluate groundwater conditions related to ISR at the  
35 proposed Dewey-Burdock ISR Project (Powertech, 2011). Results of the simulations indicated  
36 that the proposed maximum monitor well spacing of 122 m [400 ft] would be adequate to detect  
37 a potential excursion (Powertech, 2011).

38  
39 Production zone monitoring wells will be installed before production activities begin; required  
40 groundwater sampling and hydrologic tests will be conducted on samples taken from the  
41 monitoring wells. The applicant estimates that approximately 100 monitoring wells will be  
42 installed in the initial wellfields during the construction phase of the proposed project  
43 (Powertech, 2010c).

44  
45 The applicant plans to design and install two types of nonproduction zone monitoring wells;  
46 these wells are labeled “overlying” and “underlying.” Placement of overlying and underlying  
47 monitor wells is designed to correspond to the site-specific lithology and the hydrologic  
48 characteristics within the production zone(s) of each wellfield. The screened intervals of  
49 overlying wells would be located in the sand unit or aquifer immediately above the ore-bearing  
50 sandstone (Figure 2.1-7). The overlying nonproduction monitoring wells are designed to  
51 monitor any upward movement of leach fluids away from the production zone and identify

1 leakage from production and injection well casings before fluids could enter the overlying  
2 aquifer. In the sand unit or aquifer immediately above the ore-bearing sandstone, overlying  
3 nonproduction zone monitoring wells would be evenly distributed with a minimum placement  
4 of one well for every 1.6 ha [4 ac] of production area in accordance with guidance in  
5 NUREG–1569 (NRC, 2003a). When additional aquifers exist above the first sand unit or aquifer  
6 above the ore-bearing sandstone, additional monitoring wells would be located in these  
7 aquifers, with a minimum placement of one well for every 3.2 ha [8 ac] of production area in  
8 accordance with guidance in NUREG–1569 (Powertech, 2011, Figure TR RAI 5.7.8-12-1).

9  
10 The applicant would complete underlying nonproduction monitor wells in the first sand unit or  
11 aquifer underlying the ore-bearing sandstone. Where the production zone in the Chilson  
12 Member of the Lakota Formation is bounded below by the Morrison Formation, no underlying  
13 nonproduction monitor wells would be installed. In this case, the thickness {approximately 30 m  
14 [100 ft]} and relatively impermeable nature of the Morrison Formation minimize concerns about  
15 vertical excursion of lixiviant (Powertech, 2011). The underlying nonproduction monitoring wells  
16 are designed to monitor any downward movement of leach fluids from the production zone and  
17 to identify leakage from production and injection well casings before fluids could enter the  
18 underlying aquifer. Underlying nonproduction monitoring wells would be evenly distributed  
19 through the production area with a minimum placement of one well for every 1.6 ha [4 ac] of  
20 production area (Powertech, 2009a, 2011).

21  
22 The production zone monitor ring and overlying and underlying monitor wells will be designed  
23 for each wellfield based on site-specific lithologic and hydrologic characteristics of production  
24 zones gathered during delineation drilling and hydrologic testing. The location and/or number of  
25 monitoring wells will be determined after pump testing is complete to demonstrate that  
26 monitoring wells are hydrologically connected to injection and production wells (see following  
27 section). The applicant must present each monitoring well program to EPA for administrative  
28 approval before installing proposed wells. In addition, wells completed in overlying and  
29 underlying aquifers are subject to sampling procedures, remedial actions, and reporting  
30 requirements prescribed in NRC and EPA rules and regulations. (Powertech, 2009b)

### 31 32 2.1.1.1.2.3.3 Pumping Tests

33  
34 Prior to operation of each wellfield, the applicant would design and implement pumping tests to  
35 establish that the production and injection wells are hydraulically connected to the perimeter  
36 production zone monitor wells and hydraulically isolated from nonproduction zone monitor wells  
37 in underlying and overlying sand units (Powertech, 2011). The pumping test system for each  
38 wellfield would include production zone pumping wells and monitor wells. Monitor wells would  
39 include (i) perimeter production zone monitor wells; (ii) monitor wells within the production zone  
40 at a minimum density of one per 1.6 ha [4 ac]; (iii) monitor wells in the immediately overlying  
41 and underlying nonproduction zone sand unit at a minimum density of one per 1.6 ha [4 ac];  
42 (iv) monitor wells in the subsequently overlying nonproduction sand unit at a minimum density of  
43 one per 3.2 ha [8 ac]; and (v) monitor wells in alluvium, if present, at a minimum density of one  
44 per 3.2 ha [8 ac] (Powertech, 2011). As described in SEIS Section 2.1.1.1.2.3, delineation  
45 drilling data would provide detailed lithologic information to map production zones targeted for  
46 ISR operations and define the overlying and underlying sand units and confining layers to be  
47 monitored. The delineation drilling data would be used to determine the location and screened  
48 intervals of pumping and monitor wells for each wellfield during pumping tests.

49

1 The pumping test data would be used to evaluate and confirm hydraulic connection between  
2 the production zone and perimeter production zone monitor wells and hydraulic isolation  
3 (i.e., confinement) between the production zone and overlying and underlying sand units. In  
4 addition, the pumping test data would be used to demonstrate that solutions can be controlled  
5 with typical wellfield bleed rates and to detect and identify leakage due to anomalies such as  
6 improperly plugged wells and exploration boreholes (Powertech, 2011).

#### 7 8 2.1.1.1.2.3.4 Wellfield Hydrogeologic Data Packages 9

10 The applicant's delineation drilling results and pumping test data would be included in  
11 wellfield hydrogeologic data packages, which would be submitted for review and evaluation  
12 to the Safety and Environmental Review Panel (SERP), which is established by NRC  
13 requirements (Powertech, 2011). The wellfield hydrogeologic data package would describe  
14 the wellfield, including (i) production and injection well patterns and location of monitor wells;  
15 (ii) documentation of wellfield geology (e.g., geologic cross sections and isopach maps of  
16 production zone sand and overlying and underlying confining units); (iii) pumping test results;  
17 and (iv) sufficient information to demonstrate that perimeter production zone monitor wells  
18 adequately communicate with the production zone (Powertech, 2011).


19  
20 The SERP would review the wellfield hydrogeologic test results and documentation to determine  
21 whether monitoring wells are hydrologically connected to the injection and production wells.  
22 The wellfield hydrogeologic data package and written SERP evaluation would be maintained on  
23 site and be available for NRC review. By license condition, wellfields in the partially saturated  
24 portion of the Dewey-Burdock Project area, specifically wellfields B-WF6, B-WF7, and B-WF8  
25 (see Figure 2.1-6), will be prohibited from operating until NRC staff have reviewed and approved  
26 the hydrogeologic data packages for those wellfields (NRC, 2012).

#### 27 28 2.1.1.1.2.3.5 Well Construction, Development, and Testing 29

30 The applicant intends to use standard mud rotary drilling techniques and equipment to construct  
31 production, injection, and monitor wells. Wells would be drilled to the bottom of the target  
32 completion interval with a small rotary drilling unit, using bentonite or polymer drilling mud with  
33 pH adjusted water and mixed to control viscosity (Powertech, 2008). A temporary mud pit, to  
34 contain the drilling mud, would be excavated adjacent to the drill site. During excavation of mud  
35 pits, topsoil would be separated from the subsoil with a backhoe. The subsoil would be  
36 deposited next to the mud pit, and the topsoil would be stored at a separate location until the  
37 well site is restored. Residual cuttings and drilling fluids are typically held in the mud pit after  
38 drilling and construction activities are completed (NRC, 2009a). Depending on state and local  
39 regulations, such mud pits are backfilled and graded or are alternatively emptied and cleaned,  
40 and residual solids and liquids transported and disposed of offsite (NRC, 2006). After well  
41 drilling is completed at the proposed project, the applicant proposes to redeposit the excavated  
42 subsoil in the mud pit followed by topsoil application and grading, usually within 30 days of the  
43 initial excavation of the mud pit (Powertech, 2009a).

44  
45 All production, injection, and monitoring wells will be cased and cemented to prevent fluids  
46 migrating into or between USDWs in accordance with EPA requirements in 40 CFR 146.32. A  
47 schematic for a completed well is shown in Figure 2.1-9. Before an injection, production, or  
48 monitoring well enters service, the applicant proposes to perform mechanical integrity tests  
49 (MITs) using pressure-packer tests (Powertech, 2009a). The mechanical integrity of wells is  
50 tested to verify that the well casing will not fail, which could cause water loss and fluid migration  
51 across confining units during injection, recovery, and monitoring operations (NRC, 2009a).

1  
2

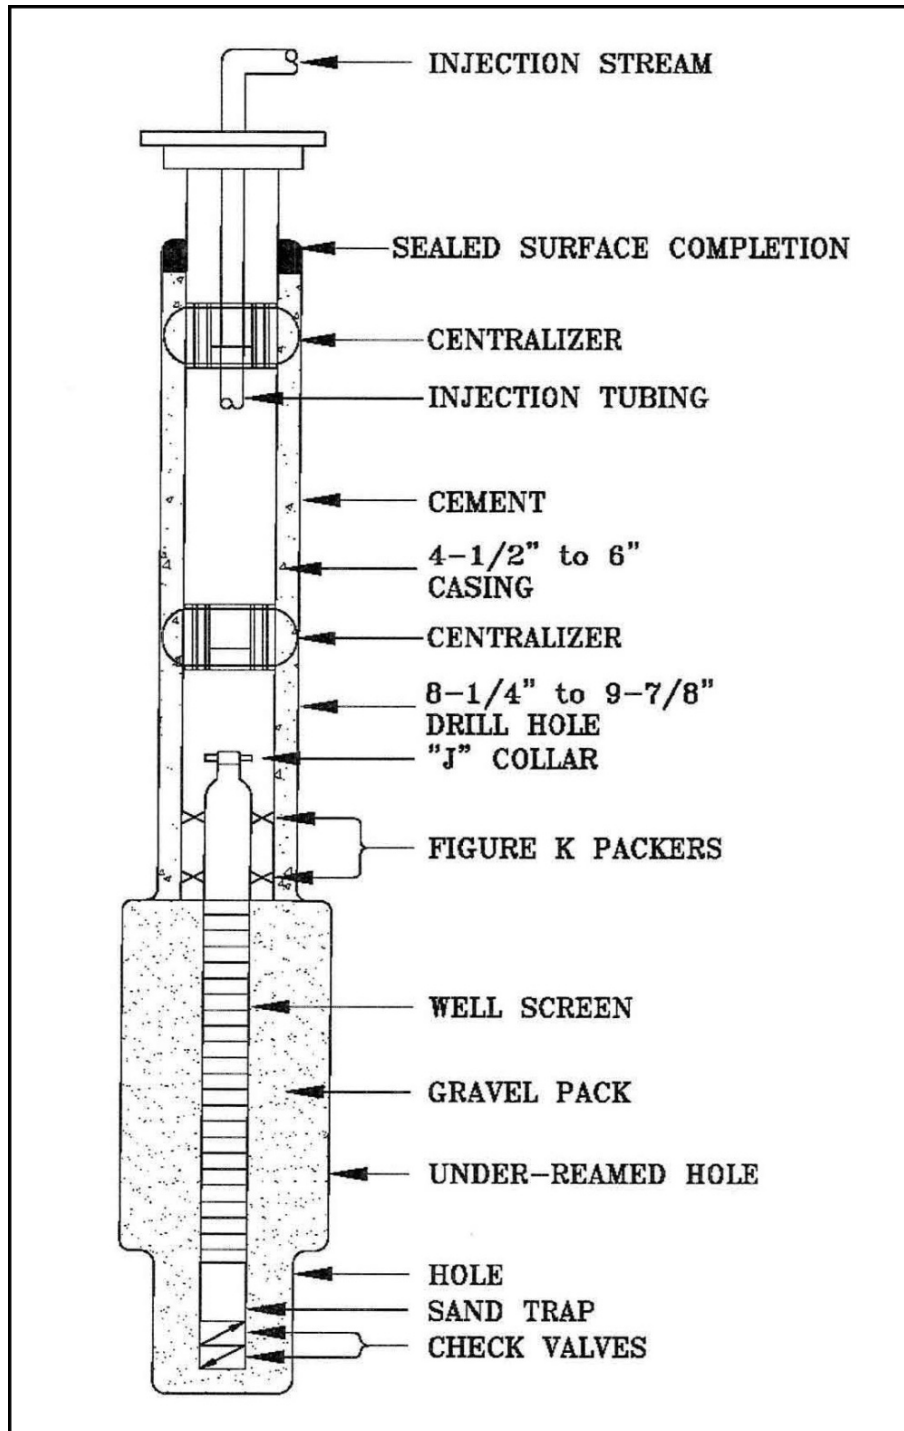

**Figure 2.1-9. Schematic of Typical Injection Well Construction (the Design of a Typical Production and Monitor Well Would Be Identical Except for the Addition of a Submersible Pump in the Production Well). Source: Powertech (2009a).**

3

1 MITs are performed by sealing a casing bottom with a plug, a downhole packer, or other  
2 suitable sealing device. The casing is then filled with water, and the top of the casing is sealed  
3 with a threaded cap or mechanical seal. The well casing is then pressurized with water and air,  
4 and a calibrated pressure gauge monitors the mechanical integrity of the well casing. Internal  
5 casing pressure is increased to 125 percent of the maximum operating pressure of the well,  
6 125 percent of the maximum operating pressure rating of the well casing, or 90 percent of the  
7 formation fracture pressure, whichever is less (Powertech, 2009a). If obvious leaks are present  
8 or the pressure drops by more than 10 percent during a 10-minute period, the seals and fittings  
9 on the packer system must be checked and reset and another test is conducted. A well casing  
10 that maintains a high level of pressure demonstrates acceptable mechanical integrity, and the  
11 well would be qualified for service at the facility.

12  
13 To ensure the continued integrity of the wellfields, the applicant will test the mechanical integrity  
14 of all active wells at least once every 5 years or after any rework that may need to be performed  
15 on the well. The applicant will document the details of the MITs (specifically, the well  
16 designation, date of test, test duration, and beginning and ending pressures), and the individual  
17 conducting the test will sign the test report. MIT results will be maintained onsite and will be  
18 available for NRC inspection. MIT results will also be reported quarterly to EPA, in accordance  
19 with the EPA UIC regulations in 40 CFR 146.33.

20  
21 In addition to conducting pressure tests on new wells to establish mechanical integrity, the  
22 applicant will conduct an MIT following any repair to a well that involves the use of a downhole  
23 tool or underreaming tool (Powertech, 2009a). Downhole and underreaming tools will be used  
24 to repair or replace the well casing, screen assembly, or the gravel/sand pack. A well that  
25 shows evidence of subsurface damage will be subjected to an MIT before being returned to  
26 service. If, following repair, a well does not demonstrate acceptable MIT mechanical integrity,  
27 the well will be plugged and abandoned. The applicant plans to plug wells in accordance with  
28 EPA regulations in 40 CFR 146.10 (Powertech, 2009a). The applicant's commitment to MIT  
29 procedures and frequencies, as described previously, will be included as a standard license  
30 condition for the proposed action (NRC, 2012).

#### 31 32 2.1.1.1.2.3.6 Pipelines

33  
34 As part of the underground infrastructure at ISR facilities, a network of process pipelines and  
35 cables are typically installed connecting (i) the central uranium processing facility or the satellite  
36 facility and the header houses for transferring lixiviant; (ii) the header houses and wellfields for  
37 injecting and recovering lixiviant; and (iii) the central plant and wastewater disposal facilities  
38 (e.g., deep injection wells or land application areas) (NRC, 2009a). The piping and metering  
39 system for production and injection solutions at the proposed Dewey-Burdock ISR Project would  
40 require buried trunk lines to connect the Dewey satellite facility and its related operating  
41 wellfield areas and the Burdock central processing plant and its related wellfields to the  
42 metering and flow distribution headers inside the header houses. Piping would also be  
43 installed to transport liquid waste streams from the Burdock central processing plant and  
44 Dewey satellite facility to their respective wastewater disposal facilities (i.e., deep injection  
45 wells and/or land application areas).

46  
47 The applicant proposes to install up to eight underground pipelines between the Burdock central  
48 processing plant and the Dewey satellite facility to transport various fluids used during ISR  
49 operations (Powertech, 2011). Conduits for electronic communication and control purposes  
50 would also be installed between the central plant and satellite facility. The plant-to-plant  
51 pipelines would transport fluids including but not limited to (i) barren and pregnant lixiviant,

1 (ii) restoration water, (iii) reverse osmosis reject brines, (iv) wastewater from well drilling and  
2 maintenance operations, and (v) supply water from the Madison Formation or other aquifers.

3  
4 High density polyethylene (HDPE) pipe with heat-welded joints is used to connect the wells,  
5 header houses, and processing facilities; the piping is buried approximately 1.5 m [5 ft] below  
6 grade to prevent freezing (Powertech, 2009b). Trenches containing pipelines are typically  
7 backfilled with native soil and graded to surrounding ground topography (Powertech, 2009b).  
8 The same procedure used in mud pit excavation during well construction will be used to  
9 preserve topsoil; topsoil is stored separately from subsoil and replaced on the subsoil after the  
10 pipeline ditch is backfilled.

11  
12 HDPE piping to be used at the proposed project is designed to withstand operating pressures of  
13  $10.5\text{--}21.1\text{ kg/cm}^2$  {150–300 pounds per square inch [psig]}, although the applicant expects  
14 actual operating pressures to be less than  $0.7\text{ kg/cm}^2$  [100 psig] (Powertech, 2009b). At the  
15 header house, the piping would be connected to manifolds equipped with control valves, flow  
16 meters, check valves, pressure sensors, oxygen and carbon dioxide feed systems (injection  
17 only), and programmable logic controllers. Sensors will measure and record pipeline pressures  
18 to monitor for potential leaks and spills resulting from failure of fittings and valves. Electrical  
19 power to the header houses would be delivered by overhead power lines and buried cable.  
20 Electrical power to individual wells would be delivered by buried cable from the header house.  
21 As the wellfield expands, additional header houses would be constructed and connected to one  
22 another via buried header piping. The header piping is designed to accommodate  
23 injection and production flow rates of 7,570 Lpm [2,000 gpm] and operating pressures of  
24  $10.5\text{--}21.1\text{ kg/cm}^2$  [150–300 psig]. The only exposed pipes at the proposed project site would  
25 be at the central plant, satellite facility, wellheads, and wellfield header houses.

#### 26 27 2.1.1.1.2.3.7 Power Lines

28  
29 The applicant plans to use existing power line corridors wherever possible when constructing  
30 new power lines. However, a new power line corridor will be constructed alongside Dewey  
31 Road between the Dewey and Burdock areas to connect the Dewey satellite facility and the  
32 Burdock central processing plant. This proposed corridor will be approximately 9 m [30 feet] in  
33 width; the poles will be approximately 0.3 m [1.0 ft] in diameter and will be placed every  
34 30–91 m [100–300 ft]. No access roads will be built during construction of the power lines and  
35 minimal disturbance to the ground surface is anticipated.

#### 36 37 2.1.1.1.2.4 Liquid Waste Disposal Systems

38  
39 The applicant plans to dispose of liquid wastes generated during uranium recovery  
40 operations through deep injection wells, land application, or a combination of both methods.  
41 Project-generated liquid wastes would include bleed water from the production wells,  
42 groundwater generated during aquifer restoration, process solutions (e.g., resin transfer water  
43 and brine generated from the elution and precipitation circuits), affected well development  
44 water, laboratory wastewater, laundry water, and plant washdown water. The applicant's  
45 preferred option for disposal is deep injection using Class V wells (Powertech, 2009c, 2011).  
46 Liquid waste injected into potential Class V injection wells at the proposed Dewey-Burdock ISR  
47 Project site must not be hazardous or radioactive, as defined at 40 CFR 144.3. SDDENR  
48 regulates land application under a Groundwater Discharge Permit (GDP). Details about the  
49 permitting process and applicable requirements for the deep Class V injection well and land  
50 application disposal options are presented in Section 2.1.1.1.6.2.

#### 2.1.1.1.2.4.1 Deep Class V Injection Well Option

The applicant proposes to inject up to 1,135 Lpm [300 gpm] of liquid waste into the Minnelusa and/or Deadwood Formations using a maximum of eight deep Class V injection wells (Powertech, 2011). The proposed locations of the first four Class V injection wells (two near the Burdock central plant and two near the Dewey satellite facility) are shown in Figure 2.1-10.

Deep injection well design and construction must meet EPA requirements (Powertech, 2009c). The proposed deep injection well disposal design is shown in Figure 2.1-11; in this design a cemented steel casing extends from the base of the well to the surface, an internal tubing string is fit with the casing, and a packer seals the casing, just above the point of injection. Fluid is injected through the tubing and through the packer and exits into the injection zone by perforations in the casing (see Figure 2.1-11). Pressure on the fluid-filled annulus between the tubing and well casing must be continuously maintained and monitored to detect leakage of the injection tubing or well casing. The constant pressure on the annulus will be maintained at a minimum of 100 psi above the injection tubing pressure to prevent injected waste fluid from migrating into overlying formations. Operational procedures include MIT of the casing to ensure against well leakage and reporting of MIT test results to EPA as described in SEIS Section 2.1.1.1.2.3.5. The applicant's Class V injection well monitoring program is described in detail in SEIS Section 7.6.

The Class V injection well disposal option requires surface impoundments or ponds for storage and settling of radium before injection into deep disposal wells (Powertech, 2009c, 2011). As described in SEIS Section 2.1.1.2.1, these ponds are designed following NRC requirements (NRC, 2003a, 2008; 10 CFR Part 40, Appendix A, Criterion 5). Deep injection well pond design for the proposed project would include the following:

- Two 0.93-ha [2.3-ac] radium settling ponds, one each in the Dewey and Burdock areas, each with a storage capacity of 1.96 ha-m [15.9 ac-ft]. These ponds would contain production bleed and restoration water and allow radium to settle out of solution.
- Two 0.4-ha [1.0-ac] outlet ponds, one each in the Dewey and Burdock areas, each with a storage capacity of 0.63 ha-m [5.1 ac-ft]. These ponds would intercept treated water from the radium settling ponds and store storm water falling on the radium settling ponds.
- Two 0.45-ha [1.1-ac] surge ponds, one each in the Dewey and Burdock areas, each with a storage capacity of 1.04 ha-m [8.4 ac-ft]. These ponds would contain treated water that is pumped to the disposal wells.
- A 0.61-ha [1.5-ac] central plant pond in the Burdock area with a capacity of 1.96 ha-m [15.9 ac-ft]. This pond would contain brine produced at the Burdock central plant.
- Two 0.93-ha [2.3-ac] spare ponds, one each in the Dewey and Burdock areas, each having a capacity of 1.96 ha-m [15.9 ac-ft]. These ponds would be used for emergency containment should a pond liner fail.

Under these design conditions, ponds for Class V injection well disposal would occupy a total of 2.75 ha [6.8 ac] in the Dewey area and a total of 3.36 ha [8.3 ac] in the Burdock area (Powertech, 2010a). Based on the design for the Class V injection well disposal option, the



1

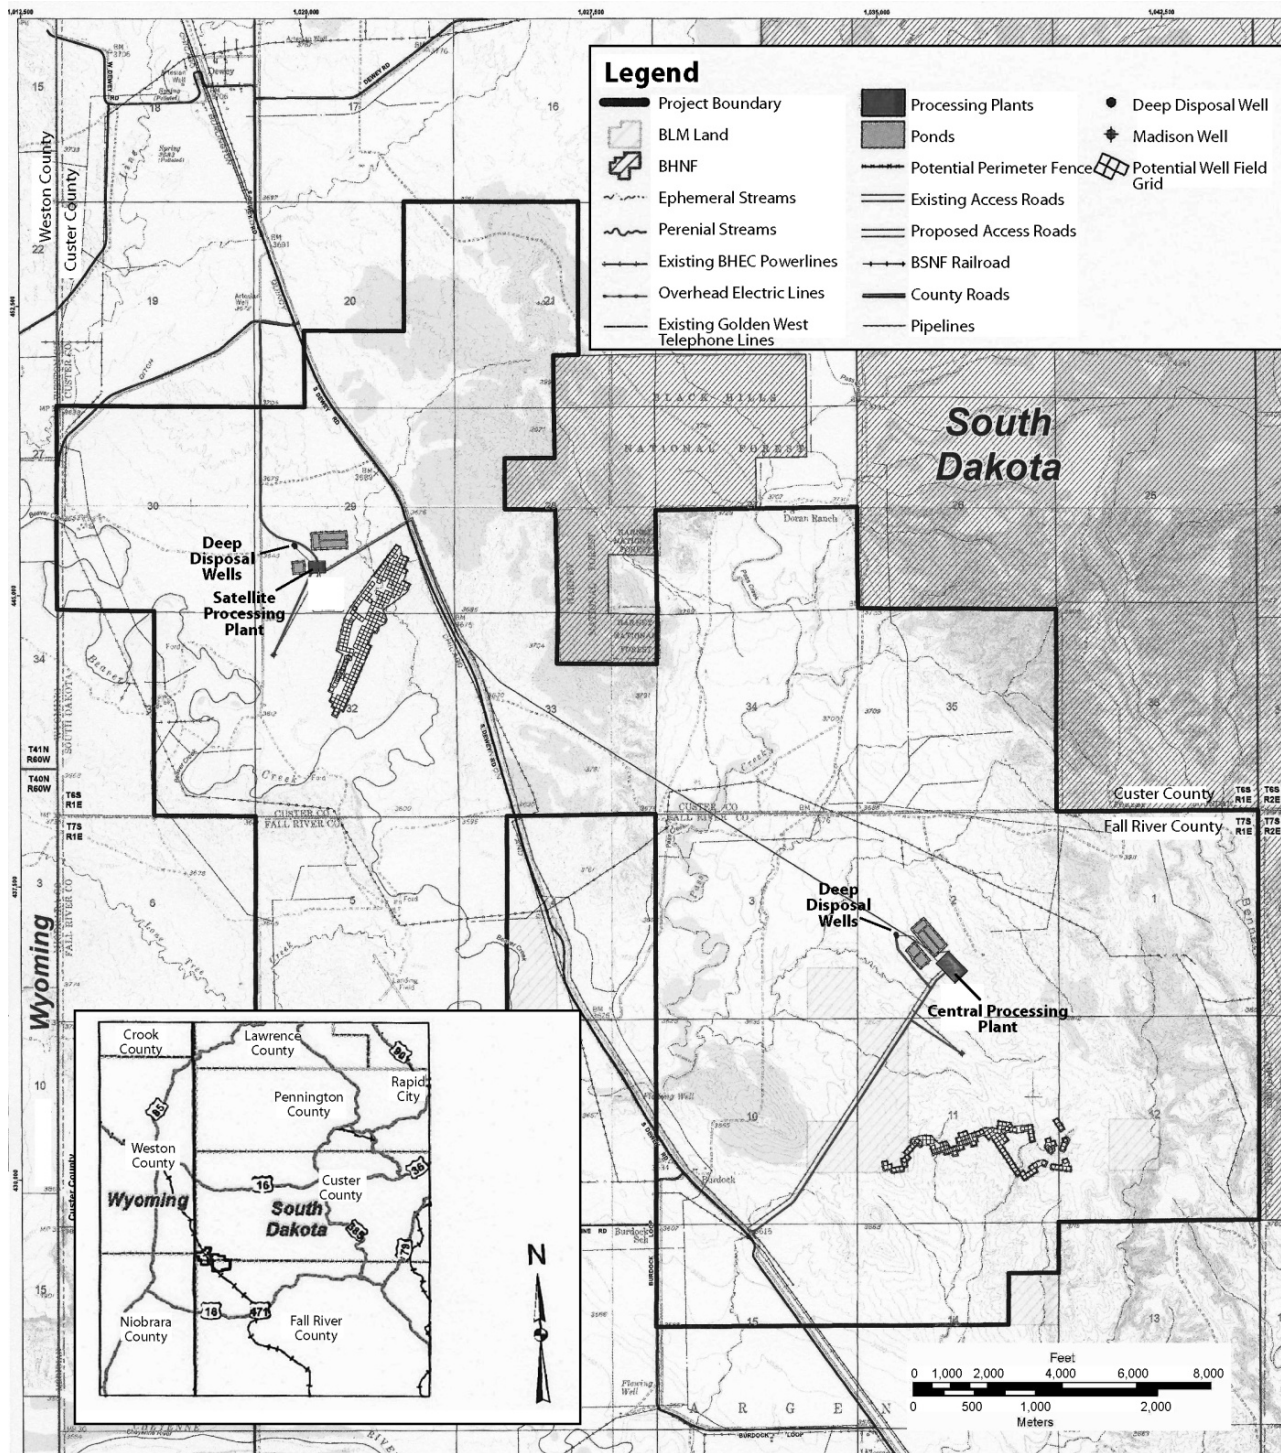


Figure 2.1-10. Location of Deep Injection Wells and Ponds for the Deep Injection Well Disposal Option.

Source: Modified From Powertech (2011).

2  
3

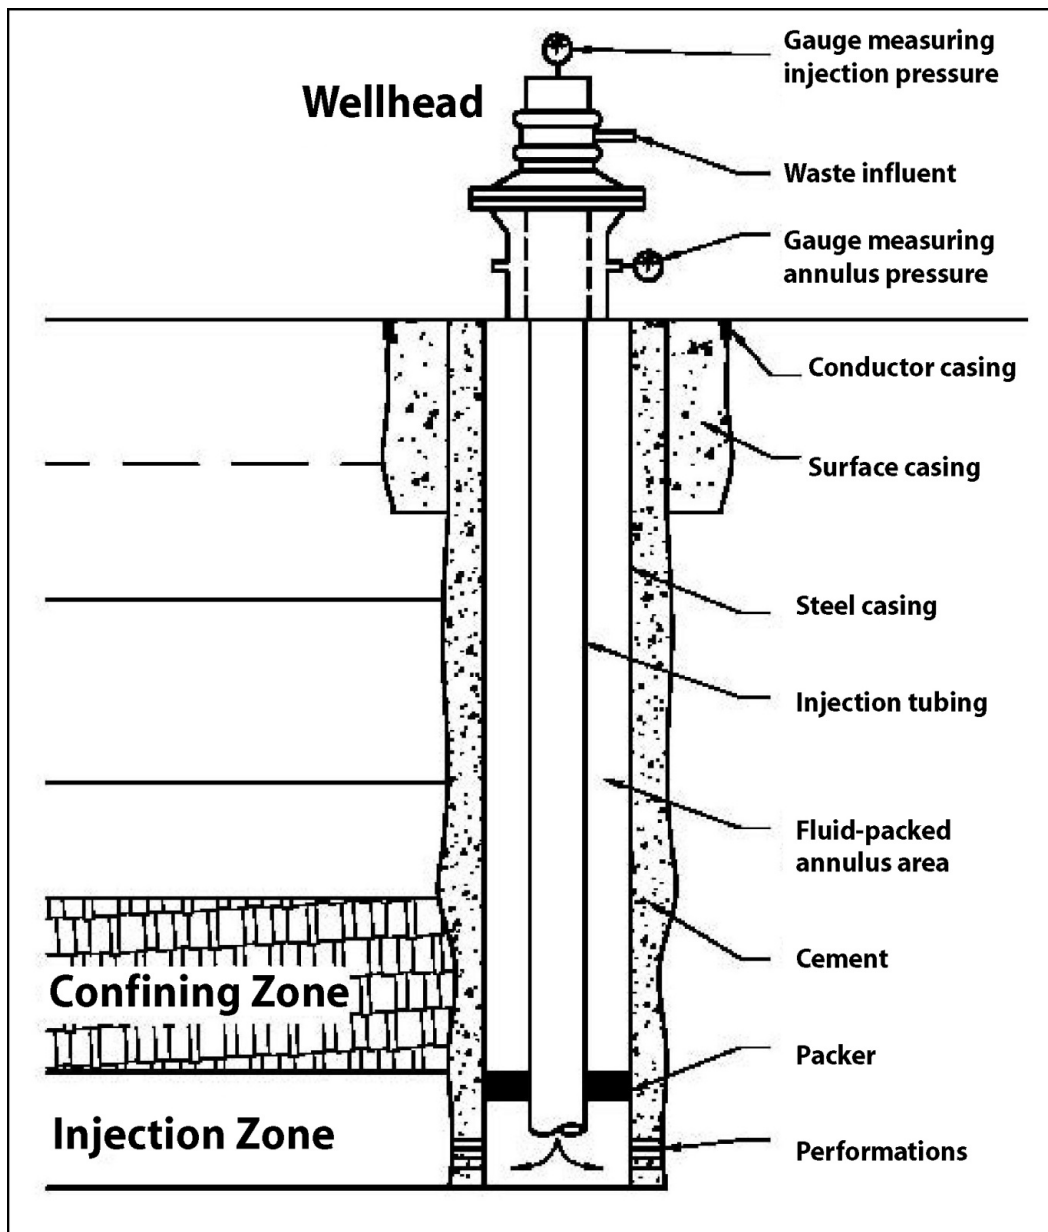


Figure 2.1-11. Schematic of the Design of Deep Injection Well.  
 Source: Powertech (2009c).

1 applicant would need to acquire the necessary permits from EPA to ensure compliance with  
 2 40 CFR Part 61, Subpart W. All ponds would be designed to store the amount of water  
 3 discharged to them while maintaining 1 m [3.3 ft] of freeboard (i.e., distance from the water level  
 4 to the top of the embankment). Control structures, such as collector ditches and berms, would  
 5 be used to prevent surface runoff for events up to and including a 100-year, 24-hour rainfall  
 6 event from entering the ponds (Powertech, 2011). The radium settling, spare, and central plant  
 7 ponds would be constructed with a lining system consisting of the following: (i) an 80-mil HDPE  
 8 primary liner; (ii) a 60-mil HDPE secondary liner; (iii) a 0.3-m [1-ft]-thick clay liner below the  
 9 secondary liner; (iv) a geonet drainage layer sandwiched between the primary and secondary  
 10 HDPE liners; and (v) a leak detection sump and access port system (Powertech, 2009c). All  
 11 other ponds would contain treated water for deep Class V well injection. These ponds would

1 include a single 40-mil HDPE liner underlain by a 0.3-m [1-ft]-thick clay liner. All ponds would  
2 be fenced to restrict and control access.

3  
4 An inspection program for all ponds would be implemented in accordance with Regulatory  
5 Guide 3.11 (NRC, 2008). Inspections would include (i) daily inspections of the liner, liner  
6 slopes, and other earthwork features; (ii) daily inspections of pond freeboard; (iii) monthly  
7 inspections of leak detection systems or daily checks for water accumulation in leak detection  
8 systems; and (iv) quarterly inspections of embankment settlement and slope stability  
9 (Powertech, 2011). If inspections reveal damage or defects that could result in leakage, this  
10 information would be reported to NRC within 24 hours, and appropriate repairs would be  
11 implemented. Significant water found in the standpipes of the leak detection system would be  
12 sampled immediately for chloride and conductivity to determine whether the water in the  
13 detection system is from the pond. If analysis confirms a leak, a second sample would be  
14 collected and analyzed within 24 hours. If the second analysis confirms a leak, the pond would  
15 be taken out of service and the leak reported to NRC within 24 hours. The pond taken out of  
16 service because of a leak would be drained by transferring its contents to a spare pond  
17 until repaired.

#### 18 19 2.1.1.1.2.4.2 Land Application Option

20  
21 For the land application option, liquid waste would be treated in lined settling ponds followed by  
22 seasonal application of the treated waste through center pivot irrigation sprinklers (Powertech,  
23 2009c, 2011). The applicant will treat all land application water to meet the requirements of  
24 10 CFR Part 20, Appendix B, Table 2, Column 2, which are the established limits for discharge  
25 of radionuclides to the environment and include limits for natural uranium, Ra-226, Pb-210, and  
26 Th-230 (Powertech, 2011, 2012). This will be accomplished by IX for uranium removal followed  
27 by radium removal through co-precipitation with barium sulfate in radium settling ponds. It is not  
28 anticipated that Th-230 and Pb-210 will be present at concentrations above the limits  
29 (Powertech, 2012a).

30  
31 Two land application (irrigation) areas, one in the Dewey area and one in the Burdock area, are  
32 proposed for the land application option (Figure 2.1-12). The applicant estimates that the  
33 maximum area for land application of treated wastewater would be 426 ha [1,052 ac], including  
34 all normally operating irrigation pivots, standby irrigation pivots, and areas constructed to  
35 contain surface runoff (Powertech, 2010a). The total irrigated area at any given time in  
36 the Dewey area would be 127.5 ha [315 ac], consisting of four 20.23-ha [50-ac] pivots,  
37 four 10.12-ha [25-ac] pivots, and one 6.1-ha [15-ac] pivot (Powertech, 2009c). In addition,  
38 one 20-ha [50-ac] pivot would be on standby. The total irrigated area at any given time in the  
39 Burdock area would also be 127.5 ha [315 ac] but would consist of six 20.23-ha [50-ac] pivots  
40 and one 6.1-ha [15-ac] pivot. In addition, two, 10.12-ha [25-ac] pivots and one 6.1-ha [15-ac]  
41 pivot would be on standby. Runoff from precipitation events or snowmelt on land application  
42 areas will be conveyed to catchment areas downgradient of land application areas and allowed  
43 to evaporate or infiltrate (Powertech, 2012a).

44  
45 Potential wellfields areas at the proposed Dewey-Burdock site (see Figure 2.1-6) overlap with  
46 portions of proposed land applications areas illustrated in Figure 2.1-12 (Powertech, 2011). In  
47 the Dewey area, only land application areas designated for standby operation overlap with  
48 potential wellfields. Standby land application areas would serve as contingency areas and  
49 generally would not be used at the same time as the wellfields (Powertech, 2011). In the  
50 Burdock area, there is limited potential overlap between proposed land application areas and

1  
2

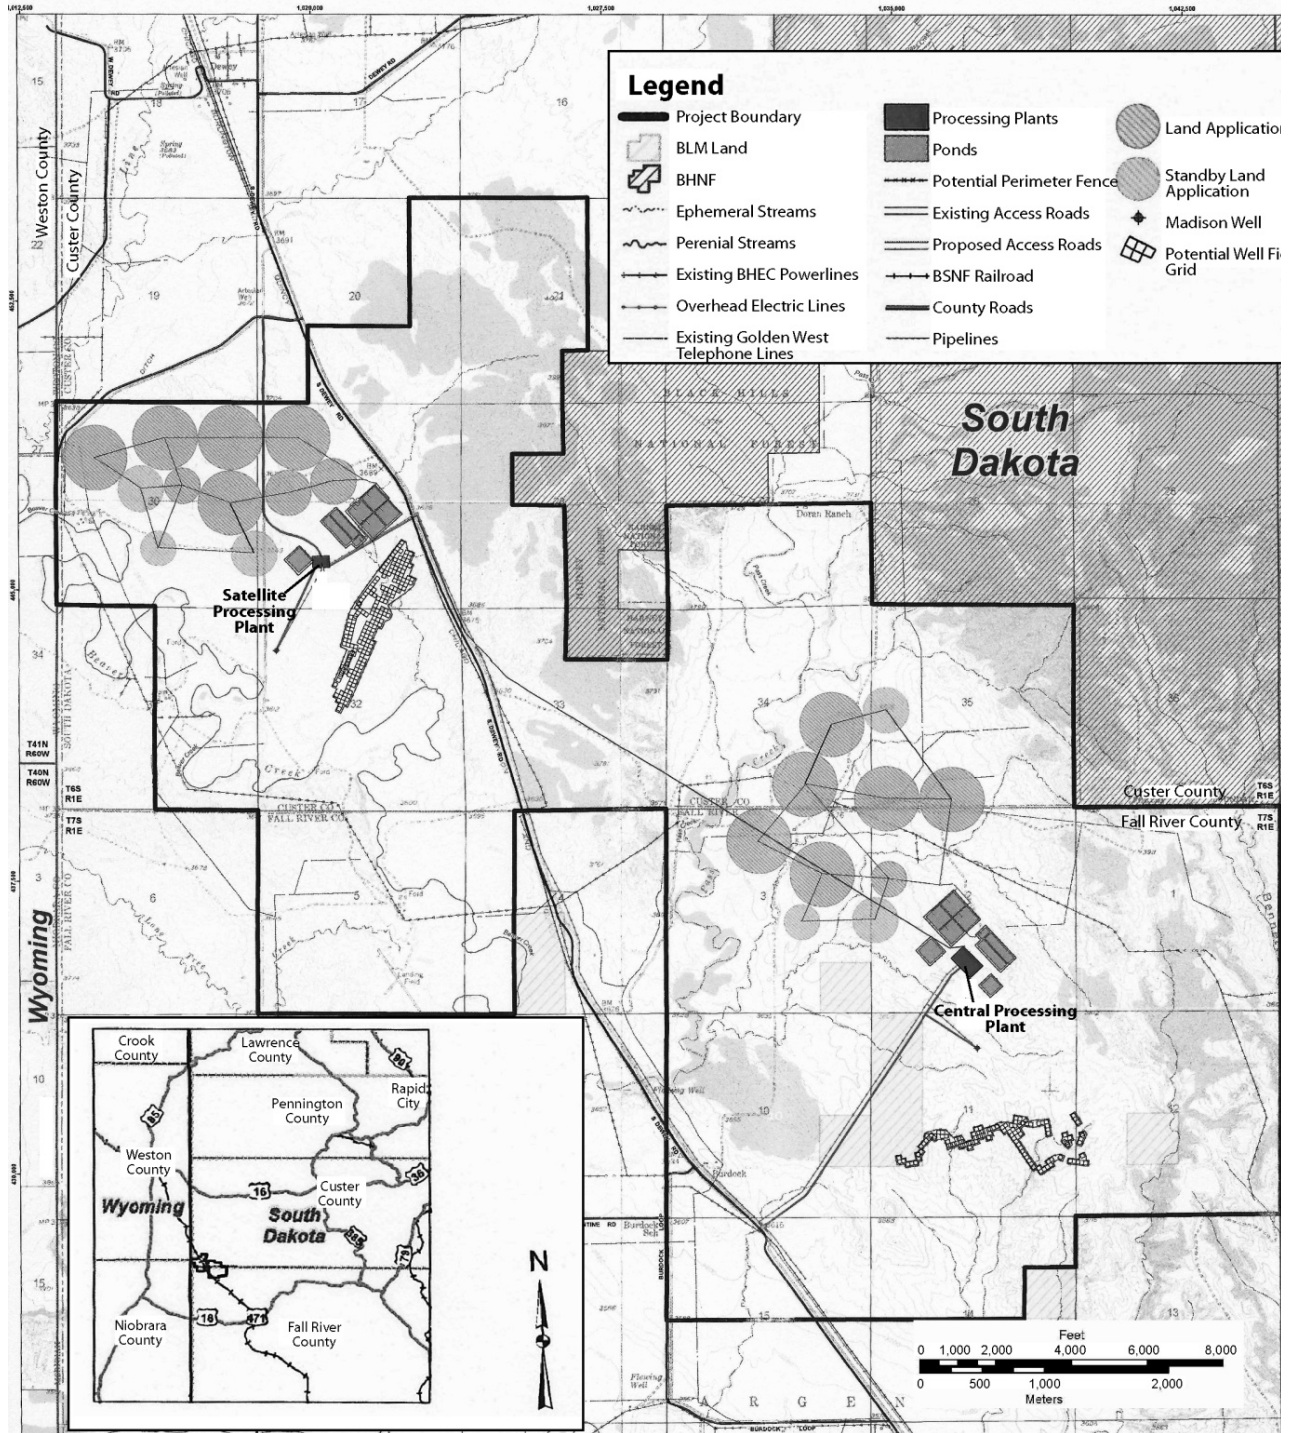


Figure 2.1-12. Location of Land Application Irrigation Areas and Ponds for the Land Application Liquid Waste Disposal Option. Source: Modified from Powertech (2011).

3

1 proposed wellfields. Overlap in the Burdock area is expected to be limited to areas where  
2 perimeter monitor wells are located (Powertech, 2011).

3  
4 The center pivot irrigation systems would typically operate 24 hours per day during the growing  
5 season, which is approximately April through October (Powertech, 2011). The applicant used  
6 the SPAW (Soil-Plant-Atmosphere-Water) model to estimate the disposal capacity for the land  
7 application option (Powertech, 2011). The model predicted that each land application area  
8 would be able to dispose of approximately 1,124 Lpm [297 gpm] from March 29 to May 10;  
9 approximately 2,472 Lpm [653 gpm] from May 11 to September 24; and approximately  
10 1,124 Lpm [297 gpm] from September 25 to October 31. During winter months (i.e., November  
11 through March), when land application would not be used, treated liquid waste would be  
12 temporarily stored in ponds located near the Burdock central plant and Dewey satellite facility  
13 (Powertech, 2011). The available storage pond capacity for the treated liquid waste during the  
14 nonirrigation winter months would be approximately 62.9 ha-m [510 ac-ft]. In comparison, the  
15 applicant estimated the maximum capacity required to store liquid waste throughout the winter  
16 months to be approximately 26.6 ha-m [216 ac-ft] using the SPAW model (Powertech, 2011).

17  
18 In addition to ponds for storage during nonirrigation periods, the land application option requires  
19 ponds to permit radium to settle out to levels allowable for land application (Figure 2.1-12). As  
20 with the Class V injection well disposal option, pond design would be completed following NRC  
21 requirements (NRC, 2003a, 2008; 10 CFR Part 40, Appendix A, Criterion 5). Land application  
22 pond design for the proposed project would include the following (Powertech, 2009c, 2011):  
23

- 24 • Two 1.62-ha [4.0-ac] radium settling ponds, one each in the Dewey and Burdock areas,  
25 each with a storage capacity of 4.86 ha-m [39.4 ac-ft]. These ponds would contain  
26 production bleed and restoration water and settle radium out of solution.  
27
- 28 • Two 0.32-ha [0.8-ac] outlet ponds, one each in the Dewey and Burdock areas, each with  
29 a storage capacity of 0.60 [4.9 ac ft]. These ponds would intercept treated water from  
30 the radium settling ponds and store storm water falling on the radium settling ponds.  
31
- 32 • Two sets of storage ponds would be used to store treated water during the  
33 nonirrigation season:
  - 34 — A system of four 1.78-ha [4.4-ac] ponds constructed in the Dewey area, each  
35 having a capacity of 7.87 ha-m [63.8 ac-ft].  
36
  - 37 — A system of four 1.78-ha [4.4-ac] ponds constructed in the Burdock area, each  
38 having a capacity of 7.87 ha-m [63.8 ac-ft].  
39
- 40
- 41 • Two 1.78-ha [4.4-ac] spare storage ponds, one each in the Dewey and Burdock areas,  
42 each having a storage capacity of 7.87 ha-m [63.8 ac-ft]. These ponds would be used  
43 for emergency containment should any of the storage ponds fail or portions of the land  
44 application system become temporarily inoperable.  
45
- 46 • A 1.09-ha [2.7-ac] central plant pond in the Burdock area having a capacity of 4.46 ha-m  
47 [36.2 ac-ft]. This pond would contain brine produced at the Burdock central plant.  
48

- Two 1.62-ha [4.0-ac] spare ponds, one each in the Dewey and Burdock areas, each having a capacity of 4.86 ha-m [39.4 ac-ft]. These ponds would be used for emergency containment should a liner on the radium settling ponds fail.

Under these design conditions, land application ponds would occupy 12.5 ha [30.8 ac] in the Dewey area and 13.6 ha [33.5 ac] in the Burdock area (Powertech, 2010a). Based on the design for the land application option, the applicant would need to acquire the necessary permits from EPA to ensure compliance with 40 CFR Part 61, Subpart W. All ponds would be designed to store the amount of water discharged to them while maintaining 1 m [3.3 ft] of freeboard. Control structures, such as collector ditches and berms, would be used to prevent surface runoff for events up to and including a 100-year, 24-hour rainfall event from entering the ponds (Powertech, 2011). As with the Class V injection well option, the radium settling, spare, and central plant ponds would be constructed with a lining system consisting of the following: (i) an 80-mil HDPE primary liner; (ii) a 60-mil HDPE secondary liner; (iii) a 0.3-m [1-ft]-thick clay liner below the secondary liner; (iv) a geonet drainage layer sandwiched between the primary and secondary HDPE liners; and (v) a leak detection sump and access port system (Powertech, 2009c). All other ponds would be constructed with a lining system consisting of a single 40-mil HDPE liner underlain by a 0.3-m [1-ft]-thick clay liner. All ponds would be fenced to restrict and control access.

As described in SEIS Section 2.1.1.1.2.4.1 for the deep Class V injection well option, an inspection and reporting program for land application ponds would be implemented in accordance with Regulatory Guide 3.11 (NRC, 2008). Inspections would include (i) daily inspections of the liner, liner slopes, and other earthwork features; (ii) daily inspections of pond freeboard; (iii) monthly inspections of leak detection systems or daily checks for water accumulation in leak detection systems; and (iv) quarterly inspections of embankment settlement and slope stability (Powertech, 2011).

#### 2.1.1.1.2.4.3 Combined Deep Class V Injection Well and Land Application Option

If Class V injection wells are permitted and constructed but lack sufficient capacity to dispose of the entire waste stream, the applicant would combine the use of Class V injection wells and land application for liquid waste disposal (Powertech, 2011). For the combined waste disposal option, land application facilities and infrastructure (e.g., irrigation areas, storage ponds, center pivot irrigation systems) would be constructed and operated on an as-needed basis depending on the capacity of the Class V injection wells to dispose of the liquid waste stream. As described in the previous section, SDDENR would regulate land application under a GDP. In addition, pond design for the combined Class V injection well and land application option would be completed following NRC regulations and requirements (NRC, 2003a, 2008; 10 CFR Part 40, Appendix A, Criterion 5).

#### 2.1.1.1.2.5 Schedule

The applicant estimates that constructing the buildings, initial wellfields, and waste disposal systems for the proposed Dewey-Burdock ISR Project would take approximately 2 years (Figure 2.1-1). Wellfields would be developed sequentially along with supporting infrastructure, including header houses and pipelines. The construction of subsequent wellfields would begin during the operational stage of the initial wellfields in the Dewey and Burdock areas.

The applicant estimates that 86 workers will be directly involved in the construction phase of the proposed project (Powertech, 2009a). Workers are expected to come from the nearby towns of

1 Edgemont, Hot Springs, and Custer, South Dakota, and Newcastle, Wyoming. These towns are  
2 21 to 80 km [13 to 50 mi] from the proposed project site.

### 3 4 2.1.1.1.3 Operation Activities

5  
6 As discussed in GEIS Section 2.4, uranium extraction by the ISR process involves two primary  
7 operations. First, uranium mobilization occurs in underground aquifers when lixiviant (leaching  
8 solution) is injected into the orebody and uranium-laden solutions are recovered (NRC, 2009a).  
9 The uranium-laden solutions, referred to as pregnant lixiviant, are then pumped from the  
10 production wells into IX systems within surface facilities, where uranium is recovered and  
11 prepared for shipment (NRC, 2009a). The applicant proposes to conduct operations at the  
12 proposed Dewey-Burdock ISR Project consistent with those activities described in the GEIS  
13 (Powertech, 2009a). These activities are described in the following sections.

#### 14 15 2.1.1.1.3.1 Uranium Mobilization

16  
17 Uranium mobilization would consist of the following steps: (i) injection of lixiviant into the  
18 production zone, (ii) oxidation and formation of uranium-bearing aqueous complexes  
19 underground, and (iii) extraction (production) and transport of the pregnant lixiviant to the  
20 processing facility. The uranium mobilization steps and excursion monitoring of lixiviant are  
21 described in the following sections.

##### 22 23 2.1.1.1.3.1.1 Lixiviant Chemistry

24  
25 The applicant proposes to add lixiviant, consisting of varying concentrations of oxygen and  
26 carbon dioxide, to the groundwater acquired from onsite wells to promote the dissolution and  
27 mobilization of uranium (Powertech, 2009a). The oxygen in the lixiviant oxidizes the uranium  
28 from the relatively insoluble, reduced tetravalent state ( $U^{4+}$ ) to the more soluble, oxidized  
29 hexavalent state ( $U^{6+}$ ). The carbon dioxide in the lixiviant provides a source of carbonate and  
30 bicarbonate ions that react with the oxidized uranium to form either dissolved uranyl tricarbonate  
31 complexes  $[UO_2(CO_3)_3^{-4}]$  or uranyl dicarbonate complexes  $[UO_2(CO_3)_2^{-2}]$ . The relative  
32 abundance of each dissolved uranyl carbonate complex is a function of pH and total carbonate  
33 strength. GEIS Table 2.4-1 summarizes typical lixiviant chemistry (NRC, 2009a). As noted in  
34 GEIS Section 2.4.1.1, the principal geochemical reactions caused by the lixiviant are  
35 (i) oxidation and subsequent dissolution of uranium and other metals from the orebody and  
36 (ii) their subsequent extraction (NRC, 2009a).

##### 37 38 2.1.1.1.3.1.2 Lixiviant Injection and Production

39  
40 Lixiviant is pumped down injection wells to the mineralized zones hosted in sandstones in the  
41 Fall River and Chilson Member of the Lakota Formations, where it would oxidize and dissolve  
42 uranium from the formations. The uranium-bearing solution migrates through the pore spaces  
43 in the sandstone and is recovered by production wells. The applicant has estimated that  
44 approximately 191 production wells and approximately 406 injections wells would be installed  
45 annually over the 8-year operational life of the proposed project (Powertech, 2010c). The  
46 applicant estimates production flow rates of 9.084 Lpm [2,400 gpm] in the Burdock area and  
47 6,056 Lpm [1,600 gpm] in the Dewey area (Powertech, 2011). Uranium-enriched pregnant  
48 lixiviant would be pumped from production wells to the Burdock central plant or the Dewey  
49 satellite facility for uranium extraction by IX. The resulting barren lixiviant would then be

1 refortified with oxygen and carbon dioxide and reinjected into the wellfield to dissolve additional  
2 uranium. This process would continue until further uranium recovery is uneconomical.

3  
4 Production wells are normally positioned to pump pregnant lixiviant from a number of injection  
5 wells. As described in SEIS Section 2.1.1.1.2.3.1, square well patterns and sometimes  
6 hexagons or triangles would be utilized to access all economically recoverable portions of the  
7 uranium ore body. As described in GEIS Section 2.4.3, the production wells at an ISR facility  
8 extract slightly more water than is reinjected into the host aquifer to create a net inward flow of  
9 groundwater into the wellfield, which minimizes the potential movement of lixiviant and its  
10 associated contaminants out of the wellfield. This excess water, referred to as production  
11 bleed, is byproduct material that must be properly managed (NRC, 2009a). The applicant  
12 proposes to withdraw 0.5 to 3 percent more groundwater than is reinjected (Powertech, 2009a).  
13 Production bleed rates would be controlled by withdrawing a small portion of the barren solution  
14 from the IX circuit, which would then be disposed of via Class V deep well injection and/or land  
15 application in both the Dewey and Burdock areas. Production bleed is detailed in SEIS  
16 Section 2.1.1.1.3.3.

#### 17 18 2.1.1.1.3.1.3 Excursion Monitoring

19  
20 GEIS Section 2.4.1.4 describes how ISR operations potentially affect the groundwater quality  
21 near a site, if lixiviant moves from the production zone resulting in either a vertical or lateral  
22 excursion (NRC, 2009a). The applicant proposes to implement an operational groundwater  
23 monitoring program that meets the requirements of 10 CFR Part 40, Appendix A, Criteria 7 and  
24 7A. This program would be designed to detect and correct any condition that could lead to  
25 excursions [the unintended spread of lixiviant either horizontally or vertically outside of the  
26 production zone (Powertech, 2009a)]. As described in GEIS Section 2.4.3, excursions may be  
27 caused by improper water balance between injection and recovery rates, undetected high  
28 permeability strata or geological faults, improperly abandoned exploration drill holes,  
29 discontinuities within the confining layers, poor well integrity, or unintentional disruption  
30 (fracturing) of the ore zone or confining units (NRC, 2009a). The applicant's proposed  
31 excursion monitoring program includes monitoring (i) flow rates, (ii) operating pressures of  
32 injection, production, and monitoring wells, and (iii) the flow rates and operating pressures of the  
33 main pipelines leading to and from the Burdock central plant and the Dewey satellite facility.

34  
35 The applicant estimated that approximately 57 monitoring wells would be installed annually over  
36 the 8-year operational life of the project (Powertech, 2010c). The applicant proposes to sample  
37 the monitoring wells in the ore zone and overlying and underlying aquifers at approximately 2-  
38 week intervals (Powertech, 2009a). Samples from these wells would be analyzed for chloride,  
39 conductivity, and total alkalinity, and the data would be compared to the upper control limits  
40 (UCLs) for these constituents (Powertech, 2011). The applicant would establish UCLs after  
41 background water quality is established for the monitor wells in a particular wellfield, as  
42 described in SEIS Section 7.3.1.2. The water level in each monitor well would also be  
43 measured and recorded prior to each sampling event. Water level and analytical monitoring  
44 data for the UCL parameters would be retained onsite for NRC review.

45  
46 An excursion occurs when two or more excursion indicators in a monitoring well exceed their  
47 UCLs (NRC, 2003b). If the concentration of two or three excursion indicators exceeds  
48 established UCL concentrations during a sampling event, a second sample would be taken  
49 within 48 hours after results of the first analysis are received and analyzed (Powertech, 2011).  
50 If an excursion is not confirmed by a second sample, a third sample would be taken within



1 48 hours after the second set of sampling data are received. If the second or third samples  
2 produce results where two or more excursion indicators exceed the UCL concentrations, the  
3 well producing these results would be placed on excursion status and corrective action would be  
4 required. The first sample results would be considered in error if the second and third samples  
5 do not confirm the results from the first sample.  
6

7 If an excursion is detected, the applicant would be required to notify NRC within 24 hours by  
8 telephone or email, and in writing within 7 days; corrective actions should begin immediately.  
9 Corrective actions would include increasing sampling frequency to weekly, increasing the  
10 pumping rates of production wells in the area of the excursion to increase the net bleed, and  
11 pumping individual wells to enhance recovery of solutions. If these actions do not retrieve the  
12 excursion within 60 days, the applicant would suspend injection of lixiviant into the production  
13 zone adjacent to the excursion until the excursion is retrieved and the UCL parameters are no  
14 longer exceeded. Within 60 days of a confirmed excursion, the applicant would be required to  
15 file a written report to NRC describing the event and the corrective action taken (NRC, 2003b).  
16

#### 17 2.1.1.1.3.2 Uranium Processing

18

19 Uranium would be recovered from the pregnant lixiviant and processed into yellowcake in  
20 a multistep process (NRC, 2009a). The steps include (i) loading of uranium complexes onto IX  
21 resin, (ii) eluting (recovering) uranium complexes from the resin, and (iii) precipitating, drying,  
22 and packaging of uranium. Figure 2.1-13 shows the general flow of the uranium processing  
23 steps for the proposed Dewey-Burdock Project.  
24

#### 25 2.1.1.1.3.2.1 Ion Exchange

26

27 Recovery of uranium from the pregnant lixiviant solution would be accomplished via an IX  
28 process. Pregnant lixiviant would be pumped from the wellfields into the IX columns, which  
29 contain uranium-specific IX resin beads (Dowex 21K XLT or equivalent) (Powertech, 2009a).  
30 As the lixiviant flows through the resin beads, the dissolved uranium complexes in the solution  
31 would attach to the resin beads by displacing a chloride ion or bicarbonate ion. The resin would  
32 be considered loaded when uranium complexes occupy most of the available sites on the  
33 resin beads.  
34

35 The proposed IX systems at both the Dewey satellite facility and Burdock central plant consist of  
36 eight fixed-bed IX columns (Powertech, 2009a). The columns would be operated as four sets of  
37 two vessels in series (Figure 2.1-13). The IX vessels are designed to operate in pressurized  
38 downflow mode, and each would contain approximately 14.15 m<sup>3</sup> [500 ft<sup>3</sup>] of IX resin. The  
39 barren lixiviant leaving the IX system will normally contain less than 2 mg/L [2 ppm] uranium  
40 (NRC, 2009a).  
41

42 After the barren lixiviant leaves the IX vessels, the production bleed would be removed and  
43 routed to the liquid waste system for deep well injection and/or land application. Carbon dioxide  
44 would then be added to the barren lixiviant to return the carbonate/bicarbonate concentration to  
45 the desired level. The lixiviant solution would then be pumped back to the wellfield, where  
46 oxygen would be added prior to reinjection into the wellfields to repeat the leaching cycle.  
47  
48

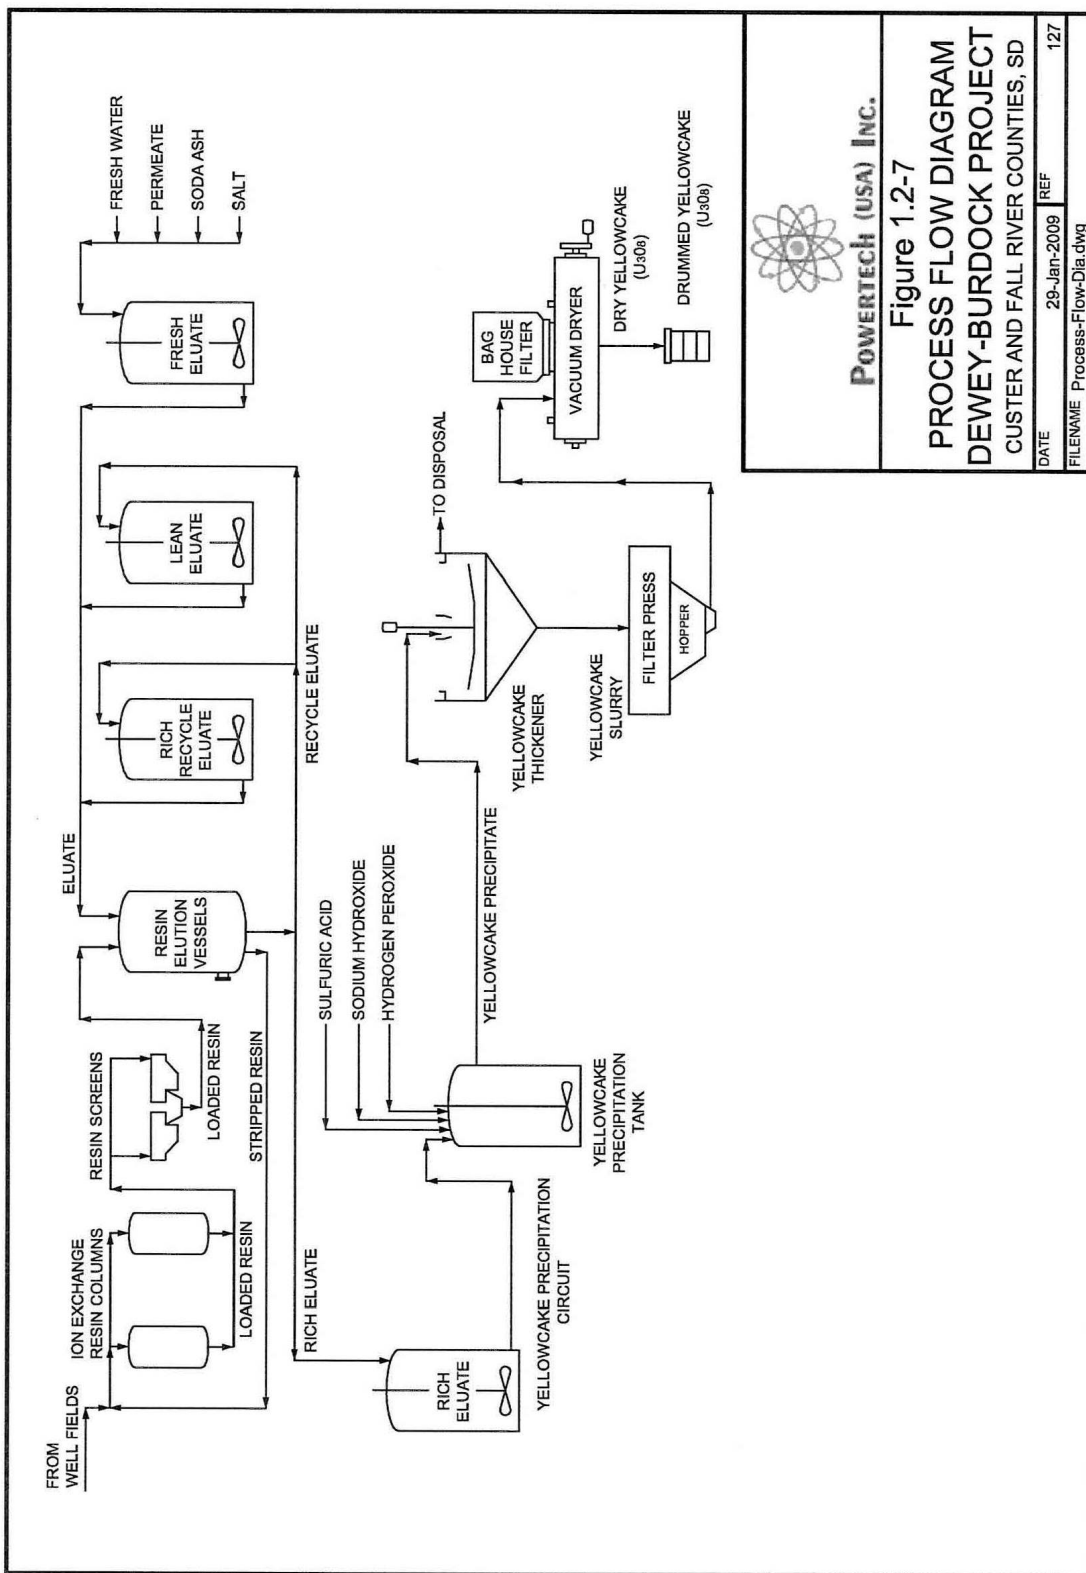


Figure 2.1-13. Overall Process Flow Diagram.  
Source: Powertech (2009a).

#### 2.1.1.1.3.2.2 Elution

GEIS Section 2.4.2.2 describes the elution circuit at ISR facilities (NRC, 2009a). The proposed elution circuit at the Burdock central plant is designed to accept and elute uranium-loaded resin from the Burdock central plant and the Dewey satellite facility (Powertech, 2009a).

At the Burdock central plant, resin transfer out of the IX vessels into the elution circuit would be accomplished via resin-transfer piping. Transfer of loaded resin from the Dewey satellite facility to the elution circuit at the Burdock central plant would be accomplished via resin-transfer trucks. Resin-transfer trucks would have one or more compartments with minimum capacities of 14.15 m<sup>3</sup> [500 ft<sup>3</sup>] per compartment (Powertech, 2009a). The resin would be hydraulically removed from the compartments and screened for debris and other particulates before transfer into the elution vessels.

An elution process removes the uranyl dicarbonate and uranyl tricarbonate ions from the resin and restores the resin to its chloride form for reuse. Fresh eluant would be prepared by combining saturated chloride (salt) solution and saturated sodium carbonate (soda ash) solution with water, forming a solution that is approximately 10 percent sodium chloride and 2 percent sodium carbonate. The elution circuit proposed for use at the Dewey-Burdock ISR Project is illustrated in Figure 2.1-13. The elution process involves recycling eluant passing through the resin elution vessel to maximize the removal of uranium from the uranium-loaded resins. The applicant estimates the proposed process will remove more than 95 percent of the uranyl carbonate complexes from the resin (Powertech, 2009a).

#### 2.1.1.1.3.2.3 Precipitation, Drying, and Packaging

GEIS Section 2.4.2.3 describes precipitation, drying, and packaging at ISR facilities (NRC, 2009a). The proposed precipitation and drying process at the Burdock central plant uses rich eluate, which has been transferred from the rich eluate tank to a precipitation tank (Figure 2.1-13). Precipitation and drying would be initiated by adding sulfuric or hydrochloric acid to the rich eluate in the precipitation tank to breakdown the carbonate portion of the dissolved uranyl carbonate complex. The proposed process uses hydrogen peroxide to precipitate out the uranium as uranium peroxide (UO<sub>4</sub>). Next, sodium hydroxide is added to adjust the pH before the precipitated uranyl peroxide or yellowcake slurry settles. After settling, the yellowcake slurry is pumped to a gravity thickener (Figure 2.1-13). The thickened slurry is pumped to a filter press to remove excess water. The yellowcake slurry is washed with fresh water to remove impurities, especially chloride, and air dried to further reduce the moisture content.

After air drying is complete, the next step of the proposed process moves the filtered yellowcake to a rotary vacuum dryer housed in a separate room of the central plant. The dryer operates at a temperature of approximately 232 °C [450 °F] at full vacuum and has a production rate of 998 dry kg [2,200 dry lb] per day (Powertech, 2009a). The dryer would be operated under a vacuum to reduce the ability of water-soluble uranium oxides and other compounds to form and to pull solids and water vapor toward the center of the system, which helps to prevent unwanted releases. Vapor is pulled from the dryers by sealed liquid ring vacuum pumps and filtered through baghouse filters located on the tops of the dryers; this removes particles larger than 1 micron [ $3.9 \times 10^{-5}$  in] in size. The vapor exiting the baghouses would be cooled using condensers to remove water vapor and any remaining smaller sized particulates. Any water

1 in the condensers would be collected and pumped to the solids removal tank in the  
2 wastewater system.

3  
4 Following the drying stage, the yellowcake would be packaged in approved 208-L [55-gal] steel  
5 drums and stored within a restricted storage area until shipment offsite (Powertech, 2009a).  
6 Onsite inventory of drummed yellowcake typically would not exceed 90,718 kg [200,000 lb].  
7 Packaged yellowcake would be shipped offsite via truck to licensed uranium conversion facilities  
8 for further processing. Conversion facilities are currently located in Metropolis, Illinois, and Port  
9 Hope, Ontario, Canada. The applicant projects an annual production of 453,600 kg/yr  
10 [1 million lb/yr] of yellowcake (as  $U_3O_8$ ) over the 8-year projected operational life of the  
11 proposed Dewey-Burdock ISR Project (Powertech, 2009a).

#### 12 13 2.1.1.1.3.3 Management of Production Bleed and Other Liquid Effluents

14  
15 As stated in GEIS Section 2.4.3, uranium mobilization would produce excess water that must be  
16 properly managed (NRC, 2009a). The production wells at any ISR facility extract slightly more  
17 water than is reinjected into the host aquifer, which creates a net inward flow of groundwater  
18 into the wellfield. This excess water, referred to as production bleed, is byproduct material that  
19 must be properly managed. At the proposed Dewey-Burdock ISR Project, the applicant  
20 proposes to use the process described in SEIS Section 2.1.1.1.3.2.1. As part of normal  
21 operations, the production bleed is diverted from the IX circuit after the uranium is recovered,  
22 but before the lixiviant is recharged. The applicant estimates the production bleed would be  
23 approximately 0.5 to 3.0 percent of the production flow rate of 9,084 Lpm [2,400 gpm] in the  
24 Burdock area and 6,056 Lpm [1,600 gpm] in the Dewey area (Powertech, 2011). The typical  
25 production bleed would be approximately 0.875 percent of the production flow rate, or  
26 approximately 79.5 Lpm [21 gpm] in the Burdock area and approximately 53 Lpm [14 gpm] in  
27 the Dewey area (Powertech, 2011). The bleed rate would be adjusted as necessary to maintain  
28 the wellfield cone of depression. The applicant proposes to dispose of production bleed from  
29 the Burdock and Dewey areas by deep Class V well injection and/or land application (see SEIS  
30 Section 2.1.1.1.6.2).

31  
32 Other liquid waste streams, including spent elution circuit bleed, liquids from process drains,  
33 groundwater generated during aquifer restoration, well development water, pumping test water,  
34 and washdown water, would be produced as part of the proposed Dewey-Burdock ISR Project.  
35 As described in SEIS Section 2.1.1.1.6.2, these waste streams would be handled in the same  
36 manner as the production bleed.

#### 37 38 2.1.1.1.3.4 Schedule

39  
40 The applicant currently plans to develop 10 wellfields in the Burdock area and 4 wellfields in the  
41 Dewey area (Figure 2.1-6). The applicant anticipates that production activities in the initial  
42 wellfields would commence 2 years after construction begins (Figure 2.1-1). Wellfield  
43 operations would continue for 8 years as additional wellfields are completed along the uranium  
44 roll fronts in both the Burdock and Dewey areas. The applicant estimated that 84 workers would  
45 be directly involved in the operations phase of the proposed Dewey-Burdock ISR Project  
46 (Powertech, 2009a). As during the construction phase, some workers would come from the  
47 towns of Edgemont, Hot Springs, and Custer, South Dakota, and Newcastle, Wyoming, each of  
48 which is 21 to 80 km [13 to 50 mi] away from the proposed project site.

#### 2.1.1.1.4 Aquifer Restoration Activities

GEIS Section 2.5 described aquifer restoration activities within wellfields that ensure water quality in surrounding aquifers would not be adversely affected by the uranium recovery operations (NRC, 2009a). At the end of the uranium recovery process, constituents that were mobilized by the lixiviant remain in the production aquifer. The primary goal of aquifer restoration is to return groundwater quality within the production zone of wellfields to the preoperational water quality conditions or to standards consistent with NRC requirements at 10 CFR Part 40, Appendix A, Criterion 5B(5) (Powertech, 2009b, 2011). 10 CFR Part 40, Appendix A, Criterion 5B(5) requires that groundwater quality in the exempted ore-bearing aquifer be restored to (i) a Commission-approved background (CAB) concentration; (ii) the maximum contaminant levels (MCLs) listed in 10 CFR Part 40, Appendix A, Table 5C, for constituents listed in Table 5C and if the background level of the constituents fall below the listed value; or (iii) an alternate concentration limit (ACL) established by the Commission, if the constituent background level and the values listed in Table 5C are not reasonably achievable. The ACL development is described in SEIS Appendix B. These groundwater quality standards would be implemented, as part of the aquifer restoration phase, to ensure public health and safety. The applicant would also be required to provide financial sureties to cover the costs of both planned and delayed restoration programs, in accordance with 10 CFR Part 40, Appendix A, Criterion 9. NRC reviews financial sureties annually.

Under the Federal UIC program (40 CFR Parts 144 to 146), the exempted production aquifer(s) would no longer be protected under the SDWA as a source of drinking water. In compliance with 40 CFR 146.4, the exempted aquifer(s) does not currently serve as a source of drinking water and cannot now and would not in the future serve as a source of drinking water. Hence, groundwater in exempted aquifers cannot be considered as a source of drinking water after restoration. However, outside of the aquifer exemption boundary, the aquifer is still protected as a source of drinking water, and UIC regulation 40 CFR 144.12 prohibits the movement of any contaminant into the underground source of drinking water located outside the aquifer exemption boundary. Contaminant is defined broadly in the UIC regulations (40 CFR 144.3) to include “any physical, chemical, biological, or radiological substance or matter in water.” Therefore, groundwater at the aquifer exemption boundary must meet 10 CFR Part 40, Appendix A, Criterion 5B(5) water quality requirements.

Before beginning wellfield operations, the applicant must determine background water quality by sampling and analysis of water quality indicator constituents in the mineralized zone(s) and underlying and overlying aquifers across each wellfield (Powertech, 2009b). The applicant would establish target restoration goals [CAB concentrations per 10 CFR Part 40, Appendix A, Criterion 5B(5)] as a function of the average background water quality and the variability in each parameter based on statistical methods (Powertech, 2011). SEIS Section 7.3.1.1 describes these background water quality parameters and methods to be used to establish groundwater restoration targets for the proposed Dewey-Burdock ISR Project.

Background water quality samples obtained from monitoring wells placed in the ore-bearing aquifers, as well as the underlying and overlying aquifers (where present), will be used to define excursion parameters and UCLs. UCLs must be established before ISR operations begin because they are used to control and manage any excursions that may occur during the ISR operation and restoration phases. Groundwater monitoring for selected constituents, throughout the life of the proposed project, is discussed in SEIS Section 7.3.1.2.

#### 2.1.1.1.4.1 Groundwater Restoration Methods

The applicant proposes to begin restoring the initial wellfields in the Burdock and Dewey areas immediately after production activities are terminated (Powertech, 2009a). As new wellfields are opened, the applicant plans to operate one wellfield in restoration and one wellfield in production in both areas during the life of the project. The methods selected for groundwater restoration would depend on the liquid waste disposal option (see SEIS Section 2.1.1.1.2.4). For the Class V injection well option, groundwater treatment using reverse osmosis (RO) with permeate injection would be the primary restoration method (Powertech, 2011).

If land application is used for liquid waste disposal, then groundwater sweep with injection of clean makeup water from the Madison Formation would be used to restore the aquifer. In either case, the applicant proposes to remove at least six pore volumes during aquifer restoration. A pore volume is the volume of water required to replace the water in the volume of aquifer that was mined. Restoration monitoring and stabilization would also be part of the overall restoration program. The groundwater restoration methods and the monitoring and stabilization program proposed for the proposed Dewey-Burdock ISR Project are described in the following sections.

##### 2.1.1.1.4.1.1 Deep Class V Injection Well Option

For the deep Class V injection well disposal option, the primary method of aquifer restoration would be RO treatment with permeate injection. In this method, water would be pumped from the wellfields to the Burdock central processing plant or the Dewey satellite facility for treatment. The water would be treated in IX columns to remove uranium and other dissolved ions and then passed through high pressure RO membranes, which would remove more than 90 percent of the remaining dissolved constituents. The treated effluent, or permeate, would be returned to the wellfields for injection. The RO reject, or brine, would undergo radium removal in the radium settling ponds and then would be disposed of in one or more deep Class V injection wells. The total liquid waste flow rate would be approximately 746 Lpm [197 gpm] during concurrent uranium production and aquifer restoration and approximately 568 Lpm [150 gpm] during aquifer restoration alone (Powertech, 2011). These liquid waste flow rates are lower than the proposed disposal capacity of up to 1,135 Lpm [300 gpm] for the Class V injection well disposal option (see SEIS Section 2.1.1.1.2.4.1).

About 70 percent of the water withdrawn from the wellfields and passed through the RO membranes will be recovered as permeates. Before reinjection into the wellfields, the permeate would be supplemented with makeup water from wells in the Madison Formation and injected into the wellfields at an amount slightly less than the amount withdrawn to maintain a slight restoration bleed. The restoration bleed would maintain hydraulic control of the wellfields during aquifer restoration and would typically be 1 percent of the restoration flow.

##### 2.1.1.1.4.1.2 Land Application Option

For the land application disposal option, the primary method of aquifer restoration would be groundwater sweep with Madison Formation water injection (Powertech, 2011). In this method, water would be pumped to the Burdock central processing plant or Dewey satellite facility for removal of uranium and other dissolved species in IX columns. The partially treated water would undergo radium removal in the radium settling ponds and then would be disposed of in land application areas. The typical liquid waste flow rates for the land application option would be approximately 2,070 Lpm [547 gpm] during concurrent uranium production and aquifer restoration and approximately 1,892 Lpm [500 gpm] during aquifer restoration alone. The

1 combined disposal capacities of the Burdock and Dewey land application areas would be  
2 sufficient to dispose of the liquid waste streams during the spring, summer, and fall months (see  
3 SEIS Section 2.1.1.1.2.4.2). In addition, excess capacity would be present during these months  
4 to dispose of stored liquid waste from the winter months. None of the water recovered from the  
5 wellfields would be reinjected back into the wellfields. Instead, makeup water for the Madison  
6 Formation would be injected into the wellfields at a flow rate sufficient to maintain the restoration  
7 bleed, which would typically be 1 percent of the restoration flow rate (Powertech, 2011).  
8

#### 9 2.1.1.1.4.1.3 Optional Groundwater Sweep

10  
11 Although a 1 percent restoration bleed would typically be used to maintain hydraulic control of  
12 wellfields, higher bleed rates may be required to recover flare (i.e., outward spreading) of  
13 lixiviant from the wellfield pattern areas during aquifer restoration. If necessary, the applicant  
14 has proposed to increase the restoration bleed by withdrawing up to one pore volume of water  
15 through groundwater sweep over the course of aquifer restoration, which would result in an  
16 average restoration bleed of approximately 17 percent, or approximately 159 Lpm [42 gpm]  
17 of water being removed from the production aquifer under both disposal options  
18 (Powertech, 2011).  
19

#### 20 2.1.1.1.4.2 Restoration Monitoring and Stabilization

21  
22 During aquifer restoration, lixiviant injection stops and groundwater transfer, sweep, and/or  
23 treatment are used to attempt to restore the production aquifer groundwater quality to original  
24 background levels. Stopping lixiviant injection reduces the potential for an excursion and  
25 reduces the frequency of sampling the monitoring wells. The applicant's restoration monitoring  
26 program for the proposed project would include taking samples from monitoring wells, overlying  
27 aquifer wells, and underlying aquifer wells every 60 days during the restoration phase of  
28 operations (Powertech, 2009b). The samples would be analyzed to determine whether  
29 background water quality conditions have been restored in the wells. Water levels in wells  
30 would be measured prior to sampling. If unforeseen conditions, such as snowstorms, flooding,  
31 and equipment malfunctions, make monitoring impossible for 65 days, the applicant would be  
32 required to report this condition to NRC (Powertech, 2009b).  
33

34 The applicant would maintain hydraulic control of each wellfield through the end of aquifer  
35 restoration. Verification of hydraulic control would be performed through water level  
36 measurements in perimeter monitor wells (Powertech, 2011). Water levels in the perimeter  
37 monitor wells would be measured continuously using pressure transducers to confirm hydraulic  
38 wellfield control. Aquifer restoration would be complete when the applicant demonstrates that  
39 water quality conditions have been restored in accordance with 10 CFR Part 40, Appendix A,  
40 Criterion 5B(5) requirements. These standards are either CAB water quality; water quality  
41 equivalent to the MCLs provided in the table in 10 CFR Part 40, Appendix A, Criterion 5C; or  
42 water quality equivalent to or an ACL NRC established in accordance with Criterion 5B(6). The  
43 NRC process for reviewing and approving ACLs is found in SEIS Appendix B.  
44

45 After NRC determines the production area is restored, the applicant would implement a  
46 groundwater stability monitoring program for a minimum of 12 months. The results of the  
47 monitoring program determine whether the approved standards for each constituent have been  
48 met and whether any adjacent nonexempt aquifers are affected (Powertech, 2009b, 2011).  
49 Over the 12-month minimum stability monitoring period, there would be an initial sampling event

1 at the beginning of the stability monitoring period followed by the sampling events described  
2 next (Powertech, 2011):  
3

- 4 • Perimeter monitor wells in the production zone and monitor wells in the overlying and  
5 underlying aquifers would continue to be sampled once every 60 days for the UCL  
6 indicator excursion parameters of chloride, total alkalinity, and conductivity. The  
7 applicant would contact NRC if any of the wells cannot be monitored within 65 days of  
8 the last sampling event due to unforeseen conditions, such as snowstorms, flooding, and  
9 equipment malfunctions.
- 10
- 11 • Quarterly, the production zone wells would be sampled and analyzed for the water  
12 quality parameters listed in SEIS Table 7.3-1. The criteria to establish successful  
13 stability are as follows: for each sampling event, the mean concentration of each water  
14 quality parameter must meet the target restoration goal established for that parameter.  
15

16 If the analytical results from the stability monitoring program meet the target restoration  
17 goals and do not exhibit significant increasing trends, the applicant would (i) submit  
18 supporting documentation to NRC showing that the restoration parameters have remained  
19 at to below the restoration standards and (ii) request that the wellfield be declared restored  
20 (Powertech, 2011).  
21

#### 22 2.1.1.1.4.3 Schedule 23

24 The applicant estimates that wellfield restoration in the Burdock and Dewey areas would  
25 commence immediately after production activities in the wellfields end. The applicant projected  
26 that restoration of the first wellfields would begin 2 years after production activities commence  
27 and would continue for 9 years (see Figure 2.1-1). As additional wellfields are brought into  
28 production in the Burdock and Dewey areas, the applicant would operate simultaneously one  
29 wellfield in restoration phase for each wellfield in production phase. The applicant estimates  
30 nine workers would be directly involved in aquifer restoration activities (Powertech, 2009a).  
31 Most workers would come from Edgemont, Hot Springs, and Custer, South Dakota, and  
32 Newcastle, Wyoming, which are 13 to 80 km [21 to 50 mi] from the proposed project site.  
33

#### 34 2.1.1.1.5 Decontamination, Decommissioning, and Reclamation Activities 35

36 Decommissioning of the proposed Dewey-Burdock ISR Project would require an NRC-approved  
37 decommissioning plan. All decommissioning activities would be carried out in accordance with  
38 10 CFR Part 40 and other applicable regulatory standards (Powertech, 2009b). GEIS  
39 Section 2.6 (NRC, 2009a) describes the general processes for the decontamination,  
40 decommissioning, and reclamation of an ISR facility. NRC regulations require a licensee to  
41 submit a detailed decommissioning plan for NRC review and approval at least 12 months  
42 before final decommissioning is planned. NRC evaluates a proposed decommissioning plan,  
43 and if approved, the plan becomes an amendment to the license. Only after receiving NRC  
44 approval of a plan may a licensee initiate the decommissioning process. Unless the  
45 Commission approves an alternative schedule for completion of decommissioning, pursuant to  
46 10 CFR 40.42(i), the licensee would be required by 10 CFR 40.42(h)(1) to complete  
47 decommissioning as soon as practicable but no later than 2 years after approval of the  
48 decommissioning plan.  
49

50 Before the property is released for unrestricted use, the licensee would conduct a  
51 comprehensive radiation survey to establish that the levels of various constituents are within



1 limits identified in 10 CFR Part 40, Appendix A. The applicant would be required to return all  
2 lands to their previous land use, unless the landowner justified an alternative and the state  
3 approved the alternative. For example, a landowner could decide to retain access roads. The  
4 goal of the decommissioning and reclamation process would be to return disturbed lands to a  
5 production use equal to or better than that which existed prior to uranium recovery. As part of  
6 the decommissioning and reclamation process, the applicant would (i) plug and abandon wells,  
7 (ii) reclaim disturbed lands, (iii) remove contaminated equipment and materials, (iv) establish  
8 appropriate cleanup criteria for structures, (v) decontaminate to NRC requirements items  
9 to be released for unrestricted use, and (vi) survey soils and structures to identify  
10 residual contamination.

11  
12 On BLM-administered land, the licensee must comply with reclamation requirements in  
13 43 CFR Part 3800 to assure that there is no unnecessary or undue degradation of public  
14 surface lands. These reclamation requirements include standards for (i) plugging and  
15 abandoning wells, (ii) removing pipelines, (iii) replacing topsoil, (iv) controlling weeds,  
16 (v) restoring acceptable physical and chemical properties to affected soils, (vi) restoring land to  
17 blend with adjoining topography, and (vii) seeding and restoring native vegetation.  
18 The following sections describe the general decommissioning activities proposed for the  
19 Dewey-Burdock ISR Project.

#### 20 21 2.1.1.1.5.1 Radiological Surveys and Contamination Control

22  
23 The applicant proposes to conduct pre-decommissioning radiological surveys of the  
24 Dewey-Burdock ISR Project to identify areas that would need to be cleaned to applicable  
25 regulatory limits (NRC, 2009a). Decommissioning surveys of soils, structures, and equipment  
26 would be required. The results of these surveys would be used to determine how best to handle  
27 contaminated soils, structures, or other materials.

28  
29 The applicant has committed to conducting land cleanup in accordance with 10 CFR Part 40,  
30 Appendix A, Criterion 6(6) and SDDENR regulations (Powertech, 2011). Radiation surveys  
31 would be conducted to determine whether any contaminated areas exist. The most likely areas  
32 of contaminated soils would be wellfield surfaces and mud pits, surface impoundment bottoms  
33 and berms, process building areas, storage yards, transportation routes for uranium recovery  
34 products or contaminated materials, and pipeline runs. Areas near deep Class V disposal  
35 wells and areas used for land application of treated water would also be surveyed and  
36 decontaminated as necessary. NRC would review and approve survey and sampling results.  
37 Contaminated soil would be removed and disposed, as byproduct material, at a licensed  
38 disposal facility. Pond liners and leak detection systems would also be surveyed. If radiological  
39 contamination were found, the liners and detection systems would be removed and disposed of  
40 in a licensed disposal facility.

#### 41 42 2.1.1.1.5.2 Wellfields

43  
44 Wellfield decommissioning and surface reclamation would be initiated when the regulatory  
45 agencies concur that the groundwater in a wellfield has been adequately restored and that the  
46 water quality is stable (NRC, 2009a). Decommissioning and decontamination of wellfields  
47 would include well abandonment; the removal of piping, tanks, ancillary buildings, and  
48 equipment; cleaning surface soils to the radiological standards provided in 10 CFR Part 40,  
49 Appendix A, Criterion 6; and revegetation of disturbed areas (Powertech, 2009b). To prevent  
50 adverse impacts to groundwater quality, all production, injection, and monitoring wells, as well

1 as all drill holes, would be abandoned in place according to SDDENR regulations established in  
2 ARSD 74:11:08 (Powertech, 2009a). Well abandonment would require plugging wells with  
3 bentonite or cement grout (Powertech, 2009b, 2011). Prior to abandonment wells must be  
4 opened to remove debris and equipment (e.g., tubing, pumps, and screens) to prevent  
5 obstacles from interfering with plugging operations. Wellhead casing would be removed to a  
6 depth of 1 m [3 ft] below the ground surface and set in a cement plug 2 m [6 ft] below ground  
7 surface on each well or borehole plugged and abandoned (Powertech, 2009b, 2011).

8  
9 Wellfield reclamation would involve removing surface and subsurface equipment including  
10 injection and production feed lines, header houses, electrical and control distribution systems,  
11 well boxes and wellhead equipment, and buried piping. NRC decommissioning guidelines  
12 require surveying all piping, equipment, buildings, and wellhead machinery for contamination  
13 prior to release. If still usable, wellfield piping, well heads, and associated equipment would be  
14 moved to new production areas. When the final production area is reclaimed, all contaminated  
15 piping, well heads, and associated equipment that is not salvageable would be removed to an  
16 NRC-approved disposal facility. A final background gamma survey would identify contaminated  
17 earthen materials requiring removal (Powertech, 2009b). As final steps, the wellfield surface  
18 would be recontoured where necessary and revegetated (Powertech, 2009b).

19  
20 The applicant would be required to provide a land reclamation plan to NRC for review and  
21 approval within 12 months before wellfield reclamation begins. The plan would include  
22 descriptions of the areas to be reclaimed, the planned reclamation activities, methods to protect  
23 workers and the environment against radiation hazards, and a cost estimate for reclamation  
24 (Powertech, 2009b).

#### 25 26 2.1.1.1.5.3 Process Buildings and Equipment and Other Structures

27  
28 After groundwater is restored in the final production area, the Burdock central plant, the  
29 Dewey satellite facility, and auxiliary facilities associated with both areas would be  
30 decommissioned. All processing equipment associated with the central plant and the satellite  
31 facility would be dismantled and either sold to another NRC-licensed facility or decontaminated  
32 in accordance with NRC regulations and guidance documents. Materials that cannot be  
33 decontaminated would be disposed of at an NRC-approved facility. Decontaminated materials  
34 would be reused, sold, or removed and disposed of offsite. After the dismantling and removal of  
35 buildings is completed, the former building sites would be contoured to blend in with the  
36 surrounding terrain. Gamma surveys would be conducted to verify that radiation levels are  
37 within acceptable limits (Powertech, 2009b).

#### 38 39 2.1.1.1.5.4 Engineered Structures and Access Roads

40  
41 After final site decontamination and decommissioning is complete, site access and wellfield  
42 access roads would be reclaimed. If landowners prefer, the roads may be left in place for their  
43 private use. BLM, however, requires complete reclamation of roads on BLM-managed lands.  
44 Where the access roads are reclaimed, they would be ripped up and/or disked to relieve  
45 compaction; gravel would be removed from road surfaces. Culverts would also be removed,  
46 and pre-mining drainage patterns would be reestablished. In addition to being graded, all roads  
47 and ditches would be recontoured to blend in with the surrounding terrain; topsoil would be  
48 reapplied uniformly onto road surfaces prior to revegetation (Powertech, 2009b).

#### 2.1.1.1.5.5 Final Contouring and Revegetation

Once the proposed Dewey-Burdock Project is complete, all disturbed lands will be returned to their preproduction uses for livestock grazing and as wildlife habitat. Surface reclamation and decommissioning efforts would be conducted to return the disturbed lands to their original or better condition. Disturbed lands would be restored to blend with the contour of adjoining topography. Topsoil removed and stored during construction would be reapplied during the reclamation process. Soil amendments, which may include chemical amendments, may be necessary to restore acceptable physical and chemical properties to any soils exhibiting salinity and/or sodium accumulations or other obstacles to reclamation. Revegetation of the project area is the final state of reclamation and would involve seeding the area with a seed mixture approved by SDDENR, the local conservation district, BLM, and landowners. SDDENR would determine when revegetation is complete and when the conditions for bond release have been met (Powertech, 2009b).

#### 2.1.1.1.5.6 Schedule

The applicant estimates that decommissioning of the Burdock central plant and Dewey satellite facility would take 2 years to complete. There would be some overlap between wellfield decommissioning and the groundwater restoration activities as shown in Figure 2.1-1. Wellfield decommissioning is estimated to continue for 8 years and would proceed sequentially as production and restoration activities are completed in each wellfield. The applicant estimates that nine workers would be directly involved in the reclamation and decommissioning phases of the proposed project (Powertech, 2009a). The majority of these workers would come from towns such as Edgemont, Hot Springs, and Custer, South Dakota, and Newcastle, Wyoming, each of which is 13 to 80 km [21 to 50 mi] from the proposed project site.

#### 2.1.1.1.6 Effluents and Waste Management

All phases of the proposed action, construction, operation, aquifer restoration, and decommissioning would generate effluents and waste streams that must be handled and disposed of properly. This section describes the types and volumes of effluents or wastes the applicant estimates would be generated during the life of the proposed Dewey-Burdock ISR Project. Definitions of the liquid and solid wastes that would be generated are found in the text box in SEIS Section 2.1.1.1.6.2. The proposed disposal methods and locations for liquid and solid wastes are described in SEIS Section 3.13. The potential impacts of generating and disposing of these types of waste are detailed in SEIS Section 4.14. Air quality and air emission impacts are provided in SEIS Sections 3.7 and 4.7. Transportation of waste materials for offsite disposal is described in SEIS Section 2.1.1.1.7. Regional transportation conditions are found in SEIS Section 3.3, and the potential impacts on transportation are detailed in SEIS Section 4.3.

##### 2.1.1.1.6.1 Gaseous or Airborne Particulate Emissions

Gaseous or airborne particulate emissions generated during the life of the Dewey-Burdock ISR Project would primarily consist of fugitive dusts, combustion engine exhaust, radon gas emissions from various stages of the processing system, and uranium particulate emissions from yellowcake drying (Powertech, 2009a).

1 2.1.1.1.6.1.1 Nonradiological Emissions

2  
 3 Fugitive dust and engine exhaust emissions would be generated primarily from vehicle traffic,  
 4 ground-surface-disturbing construction and decommissioning activities, and diesel construction  
 5 equipment including well drill rigs and water trucks (Powertech, 2009a). Combustion emissions  
 6 include greenhouse gases and National Ambient Air Quality Standards-regulated pollutants.  
 7 Fugitive dust sources include vehicular travel on unpaved roads and land disturbance  
 8 associated with the construction of wellfields, roads, and support facilities. The applicant  
 9 proposes imposing speed limits on unpaved roads, encouraging carpooling, and promptly  
 10 restoring disturbed areas to limit dust generation, traffic, and erosion (Powertech, 2009a).  
 11 Combustion emission sources from onsite and offsite sources would include construction  
 12 equipment and trucks transporting materials and product. Point or stationary source emissions  
 13 would be limited to equipment like propane heaters and emergency generators. These  
 14 stationary emissions would represent a small portion of the overall emissions. SEIS  
 15 Section 3.7.2.1 identifies the prevailing wind direction as from the southeast, which would result  
 16 in dust being moved in a northwest direction. All four phases of the proposed action are  
 17 expected to produce nonradiological emissions.

18  
 19 Combustion exhaust emission estimates for non-greenhouse gases would be produced by  
 20 (i) stationary sources, (ii) mobile construction and drilling field equipment, and (iii) other mobile  
 21 sources excluding commuters. Table 2.1-1 presents estimates for combustion emission mass  
 22 flow rates (i.e., mass of pollutant generated annually) from stationary sources during each of the  
 23 four phases of the proposed action. Table C–1 details these stationary sources estimates.  
 24 Table 2.1-2 presents estimates for combustion emission mass flow rates from mobile sources  
 25 for each phase. Two types of construction phase emission estimates were provided in Table  
 26 2.1-2. The construction phase in project year one consists of two main activities: facilities  
 27 construction and wellfield construction. Therefore, one emission estimate includes both  
 28 activities. Facilities construction will be completed at the end of project year one. The  
 29 construction phase associated with the

30  
 31 remaining life of the project is limited to wellfield construction. Therefore, the other emission  
 32 estimate is for wellfield construction only. Table C–2 details the mobile source estimates.  
 33 Commuter traffic was not included in the combustion emission estimates for mobile sources,  
 34 because the magnitude of proposed road vehicle activity is small relative to existing regional  
 35 road traffic (see SEIS Section 4.3) and the EPA regulates emission standards for the  
 36 manufacture of new motor vehicles. The calculation of the mobile emission inventory in  
 37 Table 2.1-2 incorporates mitigation that the applicant has committed to perform. These

**Table 2.1-1. Nonradiological Combustion Emission Mass Flow Rate Estimates (Metric Tons per Year\*) From Stationary Sources for Various Phases of the Proposed Action**

Project Phase	PM <sub>10</sub> †	SO <sub>2</sub> †	NOx†	CO†	TOC†	Aldehydes
Construction	0	0	0	0	0	0
Operations	0.135	0.00212	2.40	1.35	0.187	0.00
Aquifer Restoration	0	0	0	0	0	0
Decommissioning	0	0	0	0	0	0

Source: Modified from Powertech (2010a)

\*To convert metric tons to short tons, multiply by 1.10231.

†PM<sub>10</sub> = particulate matter 10 micrometers or less; SO<sub>2</sub> = sulfur dioxide; NOx = nitrogen oxide; CO = carbon monoxide; TOC = total organic carbon

**Table 2.1-2. Nonradiological Combustion Emission Mass Flow Rate Estimates (Metric Tons\* per Year) From Mobile Sources for Various Phases of the Proposed Action**

Pollutant	Phase					Total‡
	Construction†		Operation	Aquifer Restoration	Decommissioning	
	Facilities and Wellfields	Wellfield Only				
Particulate Matter PM <sub>10</sub>	3.8	3.4	0.8	0.09	0.5	4.8
Particulate Matter PM <sub>2.5</sub>	3.7	3.2	0.8	0.09	0.5	4.6
Sulfur Dioxide	10.3	9.16	1.8	0.09	2.0	13.0
Nitrogen Oxides	65.2	57.5	13.7	1.1	11.5	83.8
Carbon Monoxide	67.2	62.7	9.1	0.7	6.6	79.1
Total Hydrocarbon	21.2	16.7	17.8	2.3	5.9	42.7
Formaldehyde	2.4	2.2	0.7	0	0.5	3.4

Source: Modified from Powertech (2012)  
 \*To convert metric tons to short tons, multiply by 1.10231.  
 †Two types of construction phase emission estimates were provided. Construction (facilities and wellfields) only occurs in project year 1 (i.e., facility construction complete after project year 1). In subsequent project years, construction (wellfield only) occurs.  
 ‡Total accounts for when all four phases occur simultaneously and represents the highest amount of mobile source emissions the proposed action would generate in any one project year. Project year 1 only includes the construction phase (i.e., no overlap with other phases), and facilities construction only occurs in project year 1. Therefore, the construction—wellfield only—is used when calculating the total.

1  
 2 mitigation commitments are described in SEIS Section 4.7, and the manner in which the  
 3 mitigation was incorporated into the calculation of the emission inventory is provided in  
 4 Section C.2.1.

5  
 6 ISR phases may occur simultaneously. To account for overlapping phases, a total emission  
 7 estimate was calculated by adding together the annual emissions from all four phases. This  
 8 total or peak year estimate accounts for when all four phases occur simultaneously and  
 9 represents the highest amount of emissions the proposed action would generate in any one  
 10 project year. Table 2.1-3 contains the peak year estimate for when the stationary (see  
 11 Table 2.1-1) and mobile source (see Table 2.1-2) emissions are combined.

12  
 13 Expressing the proposed project's emissions in concentrations can help characterize the  
 14 magnitude of the emission levels because regulatory standards, such as NAAQS and  
 15 Prevention of Significant Deterioration, are also expressed in concentrations. The AERMOD  
 16 dispersion model was used to predict pollutant concentrations at 47 locations on and in the  
 17 vicinity of the proposed site based on the annual emission mass flow rates from the sources in  
 18 Tables 2.1-1 and 2.1-2. These concentrations were calculated for the construction, operation,  
 19 aquifer restoration, and decommissioning phases and based on the emission estimates from  
 20 stationary and mobile sources. Figure 4.7-1 in this SEIS identifies the locations. Tables C-5 to  
 21 C-8 detail the modeling results. This modeling used the initial emission inventory the applicant  
 22 provided (Powertech, 2010a). However, the applicant revised the mobile source emission  
 23 inventory in part to incorporate mitigation and improve the accuracy (Powertech, 2012b).  
 24 Section C.2.1 describes the differences between the initial and revised emission inventory. The

**Table 2.1-3. Total (i.e., Peak Year) Nonradiological Combustion Emission Mass Flow Rate (Metric Tons\* per Year) Estimates for All Phases and Both Stationary and Mobile Sources**

Pollutant	Total (i.e., Peak Year)
Particulate Matter PM <sub>10</sub> †	4.9
Sulfur Dioxide	13.0
Nitrogen Oxides	86.2
Carbon Monoxide	80.4
Total Hydrocarbon	42.9
Formaldehyde	3.4
Source: Stationary source values from Powertech (2010a) and mobile source values from Powertech (2012)	
*To convert metric tons to short tons, multiply by 1.10231.	
†Stationary source emission inventory for PM <sub>2.5</sub> not available.	
‡Stationary source value was for total organic carbon rather than total hydrocarbon.	

1  
 2 applicant committed to perform air dispersion modeling using the revised emission inventory  
 3 before preparing the final SEIS (Powertech, 2012b). However, this updated modeling has not  
 4 yet been provided to NRC. Therefore, the modeling results based on the initial inventory were  
 5 used to generate the peak year pollution concentrations for the updated emission inventory.  
 6 Section C.2.3 explains this process. Table 4.7-1 in this SEIS contains the peak year pollutant  
 7 concentrations from combustion emission from stationary and mobile sources. This table also  
 8 compares these concentrations to NAAQS and Prevention of Significant Deterioration  
 9 standards. These standards are described in SEIS Section 3.7.2. Tables 2.1-1 to 2.1-3 and  
 10 Table 4.7-1 summarize the detailed emission estimates presented in Appendix C.

11  
 12 Combustion exhaust estimates for greenhouse gas emissions fall into three source categories.  
 13 The first category consists of stationary sources. The second category consists of mobile  
 14 sources, which include construction and drilling equipment and other mobile sources excluding  
 15 commuter vehicles. Emissions from commuter traffic are not included in the combustion  
 16 emission estimates, because the amount of proposed road vehicle activity is small relative to  
 17 existing regional road traffic (see SEIS Section 4.3) and the EPA regulates emission standards  
 18 for the manufacture of new motor vehicles. The third category consists of indirect emissions  
 19 from electricity consumption (i.e., emissions associated with the production of the electricity that  
 20 the proposed project consumes). Table 2.1-4 presents the greenhouse gas emission estimates  
 21 for the proposed action. Emission estimates are provided for each of the three source  
 22 categories for each of the four phases of the proposed action. Table 2.1-4 summarizes  
 23 the detailed emission estimates presented in Appendix C. Chlorofluorocarbon and  
 24 hydrochlorofluorocarbon greenhouse gases were not included in the analysis, because these  
 25 emissions are not expected.

26  
 27 NRC staff believes that any emissions of volatile organic compounds from the potential land  
 28 application of liquid byproduct material described in SEIS Section 2.1.1.1.6.2 would be  
 29 negligible. The ISR process as described in SEIS Section 2.1.1.1.3.2 does not introduce or  
 30 utilize volatile organic compounds. Furthermore, the list of constituents in the example ISR  
 31 liquid waste stream from the GEIS does not include any volatile organic compounds (NRC,  
 32 2009a, Table 2.7-3). As described in Table 2.1-8, both NRC and SDDENR regulate land  
 33 application of this liquid waste stream.

34  
 35 Fugitive dust emissions would be mainly produced by vehicle travel on unpaved roads and wind  
 36 erosion to disturbed land. Table 2.1-5 contains the fugitive emission mass flow rate estimates  
 37 from travel on unpaved roads. This table provides emission estimates for the projected related

1

**Table 2.1-4 Annual Greenhouse Gas Emission Estimates in Metric Tons/Year\* for the Proposed Action**

	Stationary Sources			Mobile Sources			Electrical Consumption			All Sources			Total
	CO <sub>2</sub> †	CH <sub>4</sub> †	N <sub>2</sub> O†	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub> e
Construction	0	0	0	21,841	6.14	2.67	542	0.09	0.5	22,383	6.23	3.17	23,748
Operations	2,242	0.19	0	21,704	15.21	5.38	22,098	2.4	23.8	46,044	17.8	29.2	55,764
Aquifer Restoration	0	0	0	534	3.62	1.17	6,685	0.7	7.2	7,219	4.32	8.37	9,949
Decommissioning	0	0	0	3,383	2.64	1.03	542	0.09	0.5	3,925	2.73	1.53	4,564

Source: Modified from Powertech (2010a)  
 \*To convert metric tons to short tons, multiply by 1.10231.  
 †CO<sub>2</sub> = carbon dioxide; CH<sub>4</sub> = methane; N<sub>2</sub>O = nitrous oxide

2

3

**Table 2.1-5. Fugitive Emission Mass Flow Rate Estimates (Metric Tons\* per Year) from Travel on Unpaved Roads**

Phase	Onsite Fugitive Emissions		Offsite Fugitive Emissions	
	Particulate Matter PM <sub>10</sub>	Particulate Matter PM <sub>2.5</sub>	Particulate Matter PM <sub>10</sub>	Particulate Matter PM <sub>2.5</sub>
Construction: Facilities + Wellfields	290.7	29.1	159.7	16.0
Construction: Wellfields Only	229.5	22.9	95.3	9.5
Operation	155.6	15.6	132.6	13.3
Aquifer Restoration	11.8	1.2	12.0	1.2
Decommissioning	84.9	8.5	60.5	6.0
Total†	481.8	48.2	300.4	46

Source: Modified from Powertech (2012)  
 \*To convert metric tons to short tons, multiply by 1.10231.  
 †Calculation for total (i.e., peak year) emissions used construction (wellfield only). Construction of facilities only occurs in project year one, and construction is the only phase that occurs in project year one. Therefore, facility construction emissions do not overlap with other phases.

4

5 vehicle traffic both onsite and offsite. The offsite project fugitive emissions are mostly from

6 commuter vehicles. The onsite emissions include the commuter vehicles and the various

7 construction and drill field equipment. This table also provides a peak year estimate for when all

8 four phases occur simultaneously. Just like the combustion emissions, two types of

9 construction phase estimates were provided. The calculation of the fugitive emission inventory

10 in Table 2.1-5 incorporates mitigation that the applicant has committed to perform. The

11 mitigation commitment is described in SEIS Section 4.7, and the manner in which the mitigation

12 was incorporated into the calculation of the emission inventory is provided in Section C.4.

13 Table 2.1-6 contains the fugitive mass flow rate emissions from wind erosion. The annual wind

14 erosion estimates levels did not vary much over the span of the project. The amount of fugitive

15 emissions from wind erosion is a function of the amount of disturbed land. The two liquid waste

16 disposal options, deep Class V well disposal and land application, did vary in the amount of land

17 disturbed. Therefore, the information in Table 2.1-6 is provided for each liquid waste

18 disposal option.

19

20

**Table 2.1-6. Onsite Fugitive Emission Mass Flow Rate Estimates (Metric Tons\* per Year) from Wind Erosion for the Deep Class V Well and Land Application Disposal Options**

Pollutant	Deep Class V Well Disposal	Land Application Disposal
Particulate Matter PM <sub>10</sub> †	10.1	29.7
Particulate Matter PM <sub>2.5</sub> ‡	1.5	4.4

Source: Modified from Powertech (2012) and Inter-Mountain Labs (2012)  
 \*To convert metric tons to short tons, multiply by 1.10231.  
 †Annual values varied slightly over the project lifetime. Reported values are maximums. Minimum values could be as much as 2.5 metric tons lower.  
 ‡Annual values varied slightly over the project lifetime. Reported values are maximums. Minimum values could be as much as 0.4 metric tons lower.

1  
 2 The applicant revised the initial fugitive emission inventory at the same time the combustion  
 3 emission inventory was updated (Powertech, 2012b). The information in Tables 2.1-5 and 2.1-6  
 4 comes from the revised emission inventory. The applicant revised the inventory in part to  
 5 incorporate mitigation and improve accuracy. Section C.2.4 describes the differences between  
 6 the initial and revised inventory. The applicant committed to perform air dispersion modeling  
 7 using the revised emission inventory before the final SEIS is prepared (Powertech, 2012b).

8  
 9 GEIS Section 1.7.2 describes air permitting. Briefly, the Clean Air Act permitting process is  
 10 divided into two programs: the New Source Review program (preconstruction) and the Title V  
 11 program (operation). The New Source Review requires stationary air pollution sources to obtain  
 12 permits prior to construction. Three types of New Source Review permits exist: (i) Prevention  
 13 of Significant Deterioration, (ii) nonattainment New Source Review, and (iii) minor New  
 14 Source Review. In attainment areas (i.e., those areas where air quality meets the National  
 15 Ambient Air Quality Standards), Prevention of Significant Deterioration permits are required  
 16 for major stationary pollutant sources that are new or making major modifications. Classification  
 17 as a major source in an attainment area is based on the potential to emit either 90.7 or  
 18 227 metric tons [100 or 250 short tons] of a regulated pollutant, depending on the source.  
 19 In nonattainment areas, the nonattainment New Source Review permits are required for  
 20 major stationary pollutant sources that are new or making major modifications. Classification  
 21 as a major source in a nonattainment area is generally based on the potential to emit  
 22 90.7 metric tons [100 short tons] of a regulated pollutant. This threshold can be lower for  
 23 areas with more serious nonattainment problems. A minor New Source Review permit  
 24 supplements the Prevention of Significant Deterioration and nonattainment New Source  
 25 Review programs. The New Source Review permit provides regulators (i.e., SDDENR for the  
 26 Dewey-Burdock project) a method to implement permit conditions as needed to limit emissions  
 27 from sources not covered by those two programs. Title V permits are required for stationary  
 28 sources that, during operation, have the potential to emit 90.7 metric tons [100 short tons] of any  
 29 air permit (lower thresholds for areas that are in nonattainment). (NRC, 2009a)

30  
 31 SDDENR, the regulatory authority for the Clean Air Act permitting process, has not yet  
 32 conducted the New Source Review for the proposed Dewey-Burdock ISR Project (see  
 33 Table 1.6-1). The applicant stated that the process will be conducted following the SDDENR  
 34 and EPA procedures and timelines and would include emission estimates and dispersion  
 35 modeling results to support the review process (Powertech, 2010a).

36  
 37



#### 2.1.1.1.6.1.2 Radioactive Emissions

Radon gas emissions are most likely to occur during the operation and aquifer restoration stages of the proposed action, as detailed in SEIS Section 4.13. Radon releases may occur in the wellfield when the pregnant lixiviant is brought to the surface from the ore zone aquifer. Radon would also be released to air from radium settling ponds (Sections 2.1.1.1.2.4.1 and 2.1.1.1.2.4.2). Radon gas release could also occur when the downflow IX columns are taken offline for resin transfer and opened to the atmosphere. Radon gas would disperse quickly into the air. The use of general area and local ventilation systems would control radon buildup within the onsite facilities. General area ventilation could involve forced air ventilation of work areas in process buildings. Local ventilation for process vessels, where radon releases are more likely, may involve ducting or piping radon from the point of release through fans that exhaust to the outside, where the radon would disperse quickly into the air.

The applicant estimates an annual release of 34,077 GBq [921 curies] of Rn-222 from the proposed Dewey-Burdock ISR Project (Powertech, 2009b). Wellfield operations would account for 52 percent of the released radon, 47 percent would be the result of processing activities, and land application activities would produce the remainder. Potential dose impacts from radon releases were calculated at the site boundary in 16 compass directions each from the Burdock central plant and the Dewey satellite facility (Powertech, 2011). Results indicated that the 10 CFR Part 20 public dose limit of 1 mSV/yr [100 mrem/yr] is not exceeded at any property boundary. The applicant's calculations are discussed in SEIS Section 4.13.

An additional potential source for airborne particulate emissions is the yellowcake dryer, which would be located at the proposed Burdock central plant. The applicant proposes to use vacuum dryer technology for yellowcake drying operations at the Burdock central plant (Powertech, 2009a). NUREG-1569 (NRC, 2003a) provides guidance for evaluating air emissions at *in-situ* leach (ISL) facilities; dust emissions produced in the drying stage are negligible, where a vacuum dryer is used to dry yellowcake. A vacuum dryer utilizes a heat source contained in a separate, isolated system, which ensures no radioactive materials are trapped in the heating system or the exhaust it generates, as detailed in NUREG/CR-6733 (Mackin, et al., 2001). The applicant's proposed dryer contains a drying chamber where yellowcake slurry is added and is subjected to vacuum pressure (Powertech, 2009a). The dryer would retain all yellowcake dusts that could be produced during loading and unloading operations. The proposed dryer is designed so that moisture from the yellowcake is the only source of vapor in the system. Vapor exiting the dryer is filtered through a baghouse filter above the dryer, which removes particulates down to a size of approximately 1 micron [ $3.9 \times 10^{-5}$  in]. Vapor exiting the baghouse filter is then cooled using a condenser to remove water vapor and remaining small particulates (Powertech, 2009a). Water from the condenser would be collected and pumped to the solids removal tank in the wastewater disposal system. The overhead baghouse system collects dust in the baghouse filter and returns it to the drying chamber. The applicant proposes routine monitoring and analysis of the drying system exhaust to detect the presence of natural uranium, Th-230, Ra-226, and Pb-210 (Powertech, 2009a). The proposed monitoring ensures releases of Th-230, Ra-226, and Pb-210 are (detected and kept) as low as is reasonably achievable. The monitoring system would be instrumented to operate automatically and to shut down if malfunctions such as heating or vacuum system failures occur. Monitoring results must be submitted to NRC in semiannual reports.

1 2.1.1.1.6.2 Liquid Wastes

2  
 3 The applicant expects to generate liquid wastes  
 4 during all phases of uranium recovery at the  
 5 proposed Dewey-Burdock ISR Project. These  
 6 wastes include well development and well test  
 7 waters, storm water runoff, waste petroleum  
 8 products and chemicals, sanitary wastewater,  
 9 production bleed, process solutions and  
 10 laboratory chemicals, plant washdown water, and  
 11 restoration water. Process solutions include  
 12 process bleed, elution and precipitation brines,  
 13 and resin transfer wash. NRC classifies  
 14 wastewater generated during or after the uranium  
 15 extraction phase of site operations as byproduct  
 16 material; however, storm water runoff, domestic  
 17 sewage, waste petroleum, and hazardous waste  
 18 are not byproduct material. Byproduct material  
 19 does not meet the definition of solid waste in  
 20 40 CFR 261.4(a)(4) and therefore is not regulated  
 21 as hazardous waste under Resource  
 22 Conservation and Recovery Act (RCRA)  
 23 regulations. Liquid byproduct material generated  
 24 by the proposed Dewey-Burdock ISR Project will  
 25 contain chemical and radiological constituents  
 26 including uranium and radium (Powertech, 2011).

27  
 28 The applicant proposed deep Class V well  
 29 injection, land application, or a combination of  
 30 these processes for managing liquid byproduct  
 31 material. The particular waste management  
 32 option used will affect how wastes are treated and  
 33 will determine the final disposal method. As  
 34 described in SEIS Chapter 1, the proposed options require the applicant to obtain all applicable  
 35 federal and South Dakota permits, in addition to an NRC license, before it operates the facility.  
 36 Alternative wastewater disposal options are described in SEIS Section 2.1.1.2. However, the  
 37 applicant did not propose using these alternative methods.

38  
 39 The applicant’s proposed deep Class V well injection disposal option involves drilling wells at  
 40 the project site to dispose of liquid byproduct material. A typical deep injection well design is  
 41 shown in Figure 2.1-11. The applicant submitted a permit application to EPA to construct four  
 42 to eight UIC Class V deep injection wells to inject liquid byproduct material into the  
 43 Minnelusa and Deadwood Formations; the application is currently under review (Powertech,  
 44 2011, Appendix 2.7-L). The first four of the proposed wells are detailed in the permit  
 45 application. The depth from the ground surface to the disposal horizon for the 4 wells ranges  
 46 from 492 to 1,076 m [1,615 to 3,530 ft] (Powertech, 2011, Appendix 2.7–L). For disposal using  
 47 a UIC Class V well, an EPA permit, if granted, would prohibit injection of any material defined as  
 48 hazardous waste as defined by RCRA regulations in 40 CFR 261.3. Additionally, if a license  
 49 was granted, NRC would require the effluent pumped into deep injection wells to be treated and

These terms define the various types of solid and liquid wastes generated at the Dewey-Burdock ISR Project:

**Liquid wastes**

Liquid byproduct material: All liquid wastes resulting from the proposed action, except for sanitary wastewater and well development and testing wastewater

Sanitary wastewater: Ordinary sanitary septic system wastewater; this wastewater is not hazardous waste and not byproduct material wastewater

Well development and testing wastewaters: Wastewater produced during well development and pumping tests; this water is not hazardous waste or byproduct material and would not require treatment before disposal

**Solid wastes**

Solid byproduct material: All solid wastes resulting from the proposed action

Nonhazardous solid waste: Solid waste that is not hazardous waste, including domestic/municipal wastes (trash), construction/demolition debris, septic solids, and radioactive facilities and equipment resulting from the proposed action that meet the criteria for unrestricted release specified in the NRC license (see NRC, 1993)

Hazardous waste: RCRA or state-defined hazardous waste that is not byproduct material, and includes universal hazardous wastes

1 monitored to verify it meets NRC release standards in 10 CFR Part 20, Subparts D and K, and  
2 Appendix B.

3  
4 The applicant has proposed to manage liquid byproduct material under the Class V injection  
5 well disposal option using a system of storage ponds, treatment methods, and deep injection  
6 wells. During the operations phase, the applicant proposes to combine the plant wastewater  
7 stream (including the waste brine streams from elution and precipitation, resin transfer wash,  
8 laundry water, plant washdown water, and laboratory chemicals) with the production bleed and  
9 well development waster. Wastewater would be redirected back to the central processing plant  
10 for ion-exchange treatment to remove uranium, the wastewater would then be mixed with  
11 barium chloride, and finally wastewater would be discharged into lined settling ponds  
12 (i.e., radium removal ponds) (Powertech, 2009b, 2010a, 2011). The barium chloride chemically  
13 binds to radium in solution and deposits as a sludge that would be removed and sent to a  
14 licensed disposal facility (Powertech, 2010a). Following radium removal processing, the  
15 applicant would then inject the combined waste streams in the Class V deep injection wells.  
16 During the aquifer restoration phase, the applicant proposes to manage aquifer restoration  
17 wastewater (i.e., liquid byproduct material) by treating the wastewater by reverse osmosis and  
18 reinjecting the treated water back into the aquifer production zone undergoing restoration (see  
19 SEIS Section 2.1.1.1.4.1.1). The applicant would combine the contaminants removed from  
20 water with operational wastewater and transfer the combined wastewater to the radium settling  
21 ponds for further treatment prior to disposal in the Class V injection wells. The applicant's  
22 Class V injection well monitoring program which includes monitoring of injection pressure at the  
23 wellhead, the fluid-filled annulus pressure between the casing and injection tubing string (see  
24 Figure 2.1-11), and injection zone pressure is described in detail in SEIS Section 7.6.

25  
26 The applicant's proposal includes options for managing liquid byproduct material by land  
27 application independently and in conjunction with deep Class V injection well disposal. For land  
28 application, the applicant would need to obtain a state GDP and comply with applicable state  
29 discharge requirements for land application of treated wastewater. The applicant submitted a  
30 GDP application for the proposed project in March 2012; SDDENR is currently reviewing the  
31 application (Powertech, 2012a). In the land application option, the applicant would route the  
32 central plant wastewater stream, which includes waste brine streams from elution and  
33 precipitation, resin transfer wash, laundry water, plant washdown water, and laboratory  
34 chemicals, into a storage pond. Wastewater would be redirected back to the central processing  
35 plant for IX treatment to remove uranium, the wastewater would be mixed with barium chloride,  
36 and finally wastewater would be discharged into lined settling ponds (i.e., radium removal  
37 ponds). In the application, the applicant proposes to sample water from the ponds to verify it is  
38 within South Dakota and NRC discharge limits. Treated wastewater would be pumped through  
39 center pivot sprinklers to irrigate alfalfa during the growing season (May 11 to September 24).  
40 The applicant plans to irrigate soils beyond the growing season (relying on evaporation to  
41 remove water) as conditions permit (e.g., irrigation becomes ineffective during winter freezes).

42  
43 The applicant proposes regular monitoring of air, soil, crops and livestock, surface water, and  
44 groundwater to identify the presence of NRC- and SDDENR-regulated constituents. Monitoring  
45 results must be reported to NRC semiannually (see SEIS Chapter 7). As part of the  
46 decommissioning phase, NRC would require radiological surveys of land application areas to  
47 ensure that the soil concentration limits in 10 CFR Part 40, Appendix A, Criterion 6-(6) are met.  
48 If soil concentration limits are exceeded, NRC would require the removal of contaminated  
49 materials, which could add to the total amount of material for disposal at a licensed facility. In  
50 addition, the applicant proposes to dispose of any pond liners and precipitated solids

1 accumulated in radon settling ponds as solid byproduct material, as described in SEIS  
2 Section 2.1.1.1.6.3.

3  
4 The amount of liquid byproduct material produced by the proposed action varies by ISR lifecycle  
5 phase, disposal option, and aquifer restoration method. The applicant estimated the maximum  
6 estimated flow of produced liquid byproduct material at any time considering concurrent uranium  
7 recovery operations and aquifer restoration activities. For the Class V injection well option, the  
8 applicant's maximum calculated liquid byproduct material production is 749 L/min [197 gal/min]  
9 (Powertech, 2011). For the land application option, the applicant's maximum calculated liquid  
10 byproduct material production is 2,080 L/min [547 gal/min] (Powertech, 2011).

11  
12 The applicant proposes to dispose of sanitary wastewater from restrooms and lunchrooms into  
13 onsite septic systems located near the Burdock central plant and Dewey satellite facility. The  
14 applicant is required to obtain a permit from the State of South Dakota to construct the onsite  
15 septic systems (Powertech, 2009b). The applicant also proposes to collect and route storm  
16 water for discharge to surface water (Powertech, 2009a). The applicant is required to obtain a  
17 National Pollutant Discharge Elimination System (NPDES) permit to discharge storm water to  
18 surface water from the State of South Dakota.

#### 19 20 2.1.1.1.6.3 Solid Wastes

21  
22 As described in GEIS Section 2.7.3, all phases of the operational lifecycle of an ISR facility  
23 generate solid wastes (NRC, 2009a). Solid byproduct material includes spent resin, empty  
24 chemical containers and packaging, pipes and fittings, tank or storage pond sediments,  
25 contaminated soil from leaks and spills, and contaminated construction and demolition debris.  
26 Nonhazardous solid waste includes septic solids, municipal solid waste (general trash), and  
27 other solid wastes. Solid hazardous waste includes used batteries and light bulbs.

28  
29 Solid byproduct material does not meet the NRC criteria for unrestricted release and must be  
30 disposed of at a licensed disposal site, in accordance with the requirements of 10 CFR Part 40,  
31 Appendix A, Criterion 2. The applicant estimates the proposed Dewey-Burdock facility will  
32 produce 22 m<sup>3</sup> [29 yd<sup>3</sup>] of solid byproduct material from radium settling ponds annually from the  
33 deep Class V injection well option and 50 m<sup>3</sup> [66 yd<sup>3</sup>] of solid byproduct material from the land  
34 application option (Powertech, 2011). Assuming a 10-year operational period, the NRC staff  
35 calculated total radium settling byproduct material accumulation as 222 m<sup>3</sup> [290 yd<sup>3</sup>] from the  
36 deep Class V injection well option and 500 m<sup>3</sup> [660 yd<sup>3</sup>] from the land application option. The  
37 applicant plans to store these wastes temporarily onsite. The applicant proposes to transport  
38 these materials offsite to a licensed facility for disposal in accordance with U.S. Department of  
39 Transportation (USDOT) requirements using shipment capacities of 23 m<sup>3</sup> to 33 m<sup>3</sup> [30 yd<sup>3</sup> to  
40 40 yd<sup>3</sup>] (Powertech, 2010a, 2011). It is estimated that one to three shipments of operational  
41 byproduct material would occur per year.

42  
43 The NRC staff calculated the amount of solid byproduct material that would be generated from  
44 decommissioning activities using the financial assurance information the applicant submitted;  
45 the land application option estimate is 1,580 m<sup>3</sup> [2,067 yd<sup>3</sup>] and the deep Class V injection well  
46 disposal option estimate is 1,419 m<sup>3</sup> [1,856 yd<sup>3</sup>] (Powertech, 2011). These estimates apply to  
47 decommissioning wellfields, removal of constructed ponds, pond liners, and equipment and  
48 IX resin. The applicant anticipates that decommissioning of facilities will take 2 years; therefore,  
49 the annual byproduct waste generation estimate for decommissioning is 790 m<sup>3</sup> [1,034 yd<sup>3</sup>] for  
50 the land application option and 710 m<sup>3</sup> [928 yd<sup>3</sup>] for the deep Class V injection well disposal  
51 option. At this time, the applicant does not have an agreement in place with a licensed site to

1 accept its solid byproduct material for disposal. If an NRC license is granted, an NRC license  
2 condition would require the applicant to have a byproduct material disposal agreement in place  
3 before operations begin. The applicant assumes it will obtain an agreement for disposal of  
4 byproduct material at the White Mesa site in Blanding, Utah, which is detailed in SEIS  
5 Section 3.13. SEIS Section 4.14 describes the impacts of solid byproduct material disposal.  
6

7 During all phases of the proposed project, the applicant expects to produce nonhazardous solid  
8 waste. This waste could be composed of municipal waste (facility trash), septic solids, and  
9 other solid wastes, such as uncontaminated equipment, hardware, and packing materials. The  
10 applicant proposes to collect nonhazardous solid waste at designated onsite areas and dispose  
11 of this material at the Custer-Fall River Waste Management District landfill in Edgemont,  
12 South Dakota, or at the Newcastle Solid Waste Facility, if additional capacity is needed  
13 (Powertech, 2010a). SEIS Section 3.13 provides additional descriptions of the local solid waste  
14 facilities. The applicant estimates the proposed action will generate approximately 184 t [203 T]  
15 of nonhazardous solid waste annually during the construction phase (Powertech, 2010a). The  
16 NRC staff calculates the annual volume of construction debris as 144 m<sup>3</sup> [188 yd<sup>3</sup>], which  
17 assumes a density of 1,281 kg/m<sup>3</sup> [1.08 T/yd<sup>3</sup>]. During the operational period, the applicant  
18 estimates that less than 1.4 t [3,000 lb] per week of nonhazardous solid waste will be generated.  
19 The mass of nonhazardous solid waste is equivalent to an annual volume of 150 m<sup>3</sup> [196 yd<sup>3</sup>],  
20 assuming a density of 475 kg/m<sup>3</sup> [800 lb/yd<sup>3</sup>].  
21

22 The NRC staff used the data in the applicant's financial assurance section of the application  
23 (Powertech, 2011) to estimate the total amount of nonhazardous solid waste that would be  
24 generated during the proposed 2-year decommissioning period; these totals are 12,496 m<sup>3</sup>  
25 [16,344 yd<sup>3</sup>] for the land application option and 10,427 m<sup>3</sup> [13,638 yd<sup>3</sup>] for the deep Class V  
26 injection well disposal option. The NRC staff calculates the annual decommissioning  
27 nonhazardous solid waste as 6,248 m<sup>3</sup> [8,172 yd<sup>3</sup>] for the land application option and 5,213 m<sup>3</sup>  
28 [6,819 yd<sup>3</sup>] for the deep Class V injection well disposal option by dividing the total estimates by  
29 the applicant's proposed 2-year decommissioning period. The applicant's nonhazardous solid  
30 waste estimates for decommissioning include plant building materials and equipment and  
31 wellfield equipment that do not contain radioactive materials or that meet NRC limits for  
32 unrestricted release.  
33

34 The applicant's proposal describes hazardous waste that would be generated as waste oil,  
35 cleaning solvents, and used batteries (Powertech, 2009a). The applicant has estimated the  
36 proposed Dewey-Burdock ISR Project would generate less than 100 kg [220 lb] per month of all  
37 forms of hazardous waste, a quantity that the applicant expects would allow the facility to be  
38 classified as a Conditionally Exempt Small Quantity Generator (CESQG) under RCRA and  
39 South Dakota regulations (Powertech, 2009a). A CESQG (i) must determine whether its waste  
40 is hazardous; (ii) must not generate more than 100 kg [220 lb] per month of hazardous waste or,  
41 except with regard to spills, more than 1 kg [2.2 lb] of acutely hazardous waste; (iii) may not  
42 accumulate more than 1,000 kg [2,205 lb] of hazardous waste onsite at any time; and (iv) must  
43 treat or dispose of its hazardous waste in a treatment storage or disposal facility that meets the  
44 requirements specified in 40 CFR 261.5. If the facility fails to meet any of these four criteria, it  
45 would lose CESQG status. Without CESQG classification it would be fully regulated as either  
46 (i) a small-quantity generator of more than 100 kg [220 lb], but less than 1,000 kg [2,205 lb] of  
47 nonacute hazardous waste per calendar month or (ii) a large-quantity generator of 1,000 kg  
48 [2,205 lb] or more of nonacute hazardous waste per calendar month. Any hazardous wastes,  
49 such as organic solvents, paints, used oil and paint thinners, empty chemical containers, tank

1 sediments/sludges, chemical wastes, or spent batteries, must be disposed of in accordance with  
2 applicable local, state, and federal regulatory requirements.

#### 3 4 2.1.1.1.7 Transportation

5  
6 The applicant proposes using trucks to transport construction equipment and materials,  
7 operational processing supplies, IX resins, yellowcake product, and waste materials. The  
8 applicant commits to complying with all applicable USDOT and NRC packaging and  
9 transportation requirements for shipments of hazardous chemicals and radioactive materials  
10 (Powertech, 2009b). During all phases of the facility lifecycle, both temporary and permanent  
11 workers would commute to and from the facility and generate additional traffic on local roads.

12  
13 The applicant proposes using trucks to ship construction supplies and the vehicles used to  
14 construct facilities and wellfields at the proposed site. As stated previously, the applicant  
15 proposes phased wellfield development. After the processing facilities are constructed, the  
16 remaining wellfield construction activities and associated transportation would occur over a  
17 number of years (Figure 2.1-1). The applicant estimated 205 workers would commute during  
18 the construction period and estimated potential traffic assuming there would be no carpooling.  
19 The applicant's estimate of construction-related traffic is presented in Table 2.1-7.

20  
21 During operations, the applicant plans to use tanker trucks to transfer uranium-loaded and  
22 barren IX resins between the Burdock central processing plant and the Dewey satellite facility.  
23 The applicant estimates that each day, one uranium-loaded resin truck will travel from the  
24 satellite facility to the central processing plant and one barren resin truck will travel from the  
25 central processing plant to the satellite facility. The applicant proposes to ship yellowcake  
26 product from the central processing plant to a conversion facility located in Metropolis, Illinois, or  
27 Port Hope, Ontario, Canada. The NRC staff estimates the shipment distances from the  
28 proposed site to Metropolis, Illinois, and Port Hope, Ontario, to be approximately 2,270 km  
29 [1,410 mi] for either location (NRC, 2009a). The applicant proposes loading yellowcake into  
30 sealed 210-L [55-gal] drums and shipping by certified carrier. Assuming a proposed production  
31 rate of 0.45 million kg [1 million lb] of yellowcake per year, the applicant estimates  
32 approximately 25 yellowcake shipments annually. Proposed chemical supply shipments to the  
33 Dewey-Burdock facility include carbon dioxide, oxygen, salt, soda ash, barium chloride,  
34 hydrogen peroxide, sulfuric acid, hydrochloric acid, sodium hydroxide, and fuel. Shipments of  
35 waste products, including byproduct material, nonhazardous solid wastes, and hazardous  
36 wastes would originate at the proposed site for disposal at licensed disposal facilities during the  
37 plant operations. Estimates of traffic for all phases of the facility lifecycle are provided in  
38 Table 2.1-7. Based on the information in Table 2.1-7, the total daily operations phase truck  
39 traffic is estimated at 2 one-way trips per day for either waste disposal option.

40  
41 During the decommissioning phase, the applicant proposes to decommission and dismantle  
42 structures and equipment, and to reclaim land surfaces. The applicant also proposes to ship  
43 some materials and equipment offsite for recycling or reuse. The applicant expects that waste  
44 materials, which will include byproduct material (e.g., contaminated facilities and equipment,  
45 pond bottoms, and excavated soils), nonradiological and nonhazardous solid waste, and  
46 hazardous solid waste, will be shipped offsite to licensed disposal facilities. Traffic estimates for  
47 the decommissioning phase are provided in Table 2.1-7. The total daily decommissioning  
48 phase truck traffic estimates are 1.2 one-way trips per day for the land application option and  
49 1.1 one-way trips per day for the Class V injection well disposal option.  
50

**Table 2.1-7. Estimated Daily One-Way Vehicle Trips for the Proposed Dewey-Burdock ISR Project Waste Management Options**

<b>Cargo</b>	<b>Land Application Option</b>	<b>Deep Class V Injection Well Option</b>
Construction Equipment/Supplies	9	9
Construction/Employee Commuting	205	205
Remote Ion-Exchange Shipments	1	1
Processing Chemicals	0.92	0.92
Processing Byproduct Material	0.0085*	0.0037*
Yellowcake	0.1†	0.1†
Operations Employee Commuting	60	60
Aquifer Restoration Employee Commuting	15	15
Decommissioning Nonhazardous Solid Waste	1.0‡	0.87‡
Decommissioning Byproduct Material	0.13‡	0.12‡
Decommissioning Recycle/Reuse Equipment	0.07§//	0.07§//
Decommissioning Employee Commuting	15	15

Source: Powertech, 2009b, 2010a. The applicant's reported vehicle trips from these references were not reported for each waste disposal option, and therefore the NRC staff assumed that the reported vehicle trips applied to both disposal options.  
 \*The NRC staff divided the applicant's annual byproduct material estimate by the reported truck capacity and an assumed 260 shipping days per year.  
 †The NRC staff divided the applicant's annual yellowcake production rate by the reported truck capacity and an assumed 260 shipping days per year.  
 ‡The NRC staff divided the estimated waste for each option by the proposed 2-year decommissioning period, by the proposed truck capacity, and by an assumed 260 shipping days per year.  
 §The NRC staff divided the applicant's estimated shipments by the proposed 2-year decommissioning period and an assumed 260 shipping days per year.

2.1.1.1.8 Financial Surety

As stated in GEIS Section 2.10, NRC regulations at 10 CFR Part 40, Appendix A, Criterion (9) require applicants to assure that sufficient funds will be available to carry out decommissioning, reclamation of disturbed areas, waste disposal, dismantling and disposal of all facilities including buildings and wellfields, and groundwater restoration by independent third parties (NRC, 2009a). NRC regulations require the applicant to establish financial surety arrangements to cover such costs before operations begin at the proposed Dewey-Burdock ISR Project. The applicant must also maintain these surety arrangements until NRC determines the applicant has complied with its reclamation plan.

The amount of funds covered by the applicant's surety arrangements will be based on Commission-approved cost estimates in a Commission-approved plan. The initial surety estimate would be based on the decommissioning costs projected after the first year of operation. These costs would cover dismantling and decommissioning of the Burdock central

1 plant, the initial wellfield in the Burdock area, the Dewey satellite facility, and the initial wellfield  
2 in the Dewey area. These costs would also cover reclamation of the entire site.

3  
4 NRC and SDDENR would require annual revisions to the applicant's financial surety mechanism  
5 to ensure that funds are available for the decommissioning of existing and planned operations  
6 and existing and planned construction. The applicant would thereafter submit a reclamation  
7 performance bond, irrevocable letter of credit, or other surety instrument to NRC and SDDENR.  
8 NRC reviews financial surety arrangements and decommissioning plans in detail as part of its  
9 review for the safety evaluation report. For additional information on financial surety  
10 requirements, see 10 CFR Part 40, Appendix A, Criterion (9) and GEIS Section 2.10.

### 11 **2.1.1.2 Alternative Liquid Waste Disposal Options**

12  
13  
14 Liquid wastes are expected to be generated during the operations and aquifer restoration  
15 phases of the proposed Dewey-Burdock ISR Project. The applicant is required to manage and  
16 dispose of liquid byproduct material in compliance with applicable state and federal regulations,  
17 as established by license and permit. SEIS Section 2.1.1.1.6.2 describes the characteristics  
18 and quantities of the proposed liquid waste streams and the proposed approach for the  
19 applicant to apply for a permit to dispose of these waste streams using Class V deep injection  
20 wells. If EPA does not grant the applicant a UIC permit, the applicant would need to rely solely  
21 on the proposed land application or seek an NRC license amendment to approve another  
22 disposal option before it initiated operations. Historically, ISR facilities have used evaporation  
23 ponds and surface water discharge to manage and dispose of liquid wastes. Some licensed  
24 ISR facilities have used Class I deep disposal wells; however, Class I deep disposal wells are  
25 not permitted in South Dakota. For this reason, Class I deep disposal wells are not discussed  
26 as a potential option for the proposed Dewey-Burdock ISR Project.

27  
28 The following subsections describe alternative wastewater disposal options. These options  
29 were mentioned in the GEIS. Table 2.1-8 compares the characteristics of several wastewater  
30 disposal options (NRC, 2009a). Potential environmental impacts of the waste management  
31 options are analyzed in SEIS Section 4.14.1.

#### 32 **2.1.1.2.1 Evaporation Ponds**

33  
34  
35 One commonly used method for disposal of liquid wastes involves pumping liquids into one or  
36 more ponds and allowing natural solar radiation to reduce the volume through evaporation. The  
37 waste streams are not always treated prior to being discharged into evaporation ponds, and  
38 radionuclides and other metals are concentrated as the liquids evaporate. The basic design  
39 criteria for an evaporation pond system are contained in 10 CFR Part 40, Appendix A,  
40 Criteria 5A and 5E. NRC regulations set standards for the location of the pond(s) and the  
41 design and construction of the necessary clay or geosynthetic liner systems and embankments  
42 for the ponds (NRC, 2003a, 2008). NRC regulations also establish criteria for pond inspection  
43 and maintenance. The NRC guidance in Regulatory Guide 3.11 (NRC, 2008) recommends  
44 considering applicable EPA regulations in any impoundment design.

45  
46 The effectiveness of evaporation ponds depends on evaporation rates and how quickly liquid  
47 wastes are generated. The evaporation rate varies seasonally and is dependent on  
48 temperature and relative humidity; the rate is highest during warm, dry conditions and is lower  
49



1

**Table 2.1-8. Comparison of Different Liquid Wastewater Disposal Options**

	<b>Class V Injection Well</b>	<b>Evaporation Ponds</b>	<b>Land Application</b>	<b>Discharge to Surface Waters</b>
Land Size/ Footprint	13.4 ha [33 ac]  Applicant estimate of proposed additional disposal option-specific land required including impoundments (e.g., radium settling, central plant pond, outlet pond, surge pond, reserve capacity)	40.5 ha [100 ac]  Individual pond: 0.4 to 2.5 ha [1 to 6.25 ac], max 16.2 ha [40 ac]  Pond system: about 40 ha [100 ac]	481 ha [1,188 ac]  Applicant estimate of proposed additional disposal-option-specific land required including 55.1 ha [136 ac] for impoundments (e.g., radium settling, central plant pond, outlet pond, surge pond, reserve capacity) and 426 ha [1052 ac] for land application areas	13.4 ha [33 ac]  Assumed by NRC to be similar to applicant estimate for Class V injection option  Potential additional separate storage facilities (impoundments, tanks) to maintain separate waste streams
Relevant Regulations and Permits	10 CFR Part 20, Subparts D and K and Appendix B  UIC Class V permit (EPA)  NPDES permit (SDDENR)  Large-Scale Mine Permit (SDDENR)	10 CFR Part 40, Appendix A  Large-Scale Mine Permit (SDDENR)  NESHAPS permit (40 CFR Part 61, Subpart W)  Contract for byproduct material disposal (liners, sludges)	10 CFR Part 20, Subparts D and K and Appendix B  10 CFR Part 40, Appendix A, Criterion 6(6)  Groundwater discharge permit (SDDENR)  NESHAPS permit (40 CFR Part 61)  Large-Scale Mine Permit (SDDENR)	10 CFR Part 20, Subparts D and K and Appendix B  NPDES permit (SDDENR)  No release to navigable waters standard in 40 CFR Part 440.34(b)(1)  Large-Scale Mine Permit (SDDENR)
Construction Requirements	Land clearing and excavation equipment for pad, mud pits, radium-settling basins, treatment facilities  Drilling rig	Land clearing and excavation equipment to prepare surface for pond(s)  Construction equipment to construct pond liner(s)	Land clearing and excavation equipment for roads, radium settling basins, treatment facilities	Land clearing and excavation equipment for roads, radium-settling basins, treatment facilities

2

**Table 2.1-8. Comparison of Different Liquid Wastewater Disposal Options (continued)**

	<b>Class V Injection Well</b>	<b>Evaporation Ponds</b>	<b>Land Application</b>	<b>Discharge to Surface Waters</b>
Is wastewater storage required prior to disposal?	Yes, storage/surge tank(s)  Radium settling basins, treatment facility if needed to reduce radium, uranium, and other contaminant concentrations	No additional storage needed; evaporation pond provides necessary storage prior to disposal	Yes, storage/surge tank(s)  Radium-settling basins, treatment facility if needed to reduce radium, uranium, and other contaminant concentrations	Yes, applicant may elect to maintain separate “process” and “mine” wastewater streams  Radium-settling basins, treatment facility if needed to reduce radium, uranium, and other contaminant concentrations
Wastewater Treatment Issues	Decontamination through ion exchange and radium settling during operations and reverse osmosis during aquifer restoration. Effluent must meet 10 CFR Part 20, Appendix B effluent limits. May add antifouling agent to reduce scaling in well.	No additional treatment is required (optional)	Decontamination through ion exchange and radium settling during operations and aquifer restoration	Decontamination through ion exchange/reverse osmosis; additional treatment to meet conditions of NPDES discharge permit
Decommissioning Issues	Radium-settling basin liners and sludges, treatment of building debris to be disposed as byproduct material, additional transportation of wastes to licensed disposal facility  Plug and abandon well in accordance with South Dakota Well Construction Standards Sections 74:02:04:67 and 74:02:04:69	Pond liners and sludges to be disposed as byproduct material; additional transportation of wastes to licensed disposal facility	Radium-settling basin liners and sludges, treatment of building debris to be disposed as byproduct material, additional transportation of wastes to licensed disposal facility  Application soils to be disposed as byproduct material if limits exceeded  Additional transportation of wastes to licensed disposal facility	Radium-settling basin liners and sludges, treatment of building debris to be disposed as byproduct material, additional transportation of wastes to licensed disposal facility

**Table 2.1-8. Comparison of Different Liquid Wastewater Disposal Options (continued)**

	<b>Class V Injection Well</b>	<b>Evaporation Ponds</b>	<b>Land Application</b>	<b>Discharge to Surface Waters</b>
Environmental Benefits	Wastewater treated to 10 CFR Part 20, Appendix B effluent limits	Containment during storage, waste volume reduction, liquid waste form converted to solid prior to final disposal	Wastewater treatment to reduce uranium, radium, and other constituents  Limited construction needed for land application area	Wastewater treated to meet conditions of an NPDES discharge permit
Climatic Influences	Deeper drilling requires larger rig, longer rig time, higher diesel emissions (CO <sub>2</sub> emission estimate for one deep well was approximately 1,000 × typical production well)*  Additional equipment needed to construct wastewater storage and treatment facilities	Additional equipment needed to construct evaporation ponds	Additional equipment needed to construct wastewater storage and treatment facilities	Additional equipment needed to construct wastewater storage and treatment facilities
Health and Safety Issues	Potential leaks from wastewater storage and treatment facilities  Additional waste volume during decommissioning	Potential leaks from evaporation ponds  Additional waste volume during decommissioning	Potential leaks from wastewater storage and treatment facilities  Additional waste volume during decommissioning	Potential leaks from wastewater storage and treatment facilities  Additional waste volume during decommissioning

Source: NRC (2009a)

1  
2 during cool, humid conditions. When the evaporation rate is low or seasonal conditions reduce  
3 evaporation, the operator can increase the size and the surface area of the evaporation ponds  
4 to augment evaporation.

5  
6 Evaporation ponds are commonly used at facilities that employ a combination of waste disposal  
7 methods. Historically, the area of individual evaporation ponds at uranium ISR facilities has  
8 ranged from 0.04 to 2.5 ha [0.1 to 6.2 ac] (NRC, 1997, 1998a,b; Sanford Cohen and Associates,  
9 2008). The total footprint of the evaporation pond system for all liquid byproduct material  
10 streams at an ISR facility has been estimated to be as high as 40 ha [100 ac] (NRC, 1997).  
11

1 The applicant will design, construct, and monitor a leak detection system and conduct routine  
2 inspections, with special inspections as described in NRC guidance to identify and repair leaks  
3 that might occur in the evaporation pond system (NRC, 2008). NRC guidance recommends that  
4 an applicant's design incorporate sufficient freeboard (the distance from the water level to top of  
5 the embankment) of about 1 to 2 m [3 to 6 ft], depending on the size of the individual pond, so  
6 that precipitation or wind-driven waves would not overtop the embankment (NRC, 2008). In  
7 addition, sufficient reserve capacity in the evaporation pond system must be maintained to allow  
8 the entire contents of one or more ponds to be transferred to other ponds in the event of a leak  
9 requiring corrective action and liner repair (NRC, 2009a). When necessary, an applicant would  
10 install perimeter fencing to ensure safety. These requirements would be written as conditions in  
11 an NRC license, and enforcement would be managed through the NRC inspection program.  
12

13 The applicant may need to demonstrate that radionuclides, such as radon, released to the air  
14 from ponds met 40 CFR Part 61 requirements, in particular the provisions of Subpart W that  
15 incorporates the requirements of 40 CFR Part 192 (NRC, 2008; Sanford Cohen and Associates,  
16 2008). In developing the impoundment design, the applicant would also need to consider EPA  
17 surface impoundment regulations for surface impoundments in 40 CFR Part 264 (NRC, 2008).  
18

19 Because ponds are open to the air, dust and dirt can blow into ponds and the concentrations of  
20 dissolved solids may increase due to evaporation, resulting in the precipitation of salts from the  
21 solution. Ponds may require periodic cleaning to maintain good repair and the necessary  
22 freeboard; additionally, accumulated salts and solids may need to be disposed of as byproduct  
23 material at a licensed disposal facility. Similarly, when the operations and aquifer restoration  
24 phases end, the pond liners and any accumulated materials would need to be disposed of as  
25 byproduct material. To provide an example of decommissioning waste volume, the volume of  
26 byproduct material that would be generated during decommissioning and reclamation of  
27 evaporation ponds at the Smith Ranch ISR facility in Converse County, Wyoming, was  
28 estimated in 2007 at 52 m<sup>3</sup> [68 yd<sup>3</sup>] (NRC, 2009a).  
29

30 During the winter months in South Dakota, where temperatures are generally below freezing,  
31 ponds could ice over, thereby reducing evaporation to zero. To maintain year-round liquid  
32 disposal capability using evaporation ponds at the proposed Dewey-Burdock ISR Project  
33 facilities, the applicant would likely need to have either sufficient storage capacity or at least one  
34 other disposal option available. Deep Class V well injection and land application are proposed  
35 as optional methods. The applicant currently does not consider evaporation ponds a viable  
36 liquid waste disposal option at the proposed Dewey-Burdock site (Powertech, 2009b). This is  
37 due to unfavorable climatic conditions at the site; notably, the short period of high temperatures,  
38 long periods of sub-freezing temperatures, and strong winds.  
39

#### 40 2.1.1.2.2 Surface Water Discharge

41

42 Another disposal method historically used at uranium ISR facilities is treatment of liquid waste  
43 and discharge at the surface. EPA, in accordance with 40 CFR 440.34, does not allow new ISL  
44 facilities to discharge process waste water to navigable waters. For release of this effluent to  
45 non-navigable surface waters, the effluent would be pretreated to meet the NRC release  
46 requirements in 10 CFR Part 20, Subparts D and K and Appendix B and the provisions of  
47 10 CFR Part 40, Appendix A. The regulations at 10 CFR 20.2007 require compliance with other  
48 applicable federal, state, and local regulations. This would include EPA effluent discharge  
49 regulations for ISL facilities at 40 CFR Part 440, Subpart C and the SDDENR requirements  
50 imposed by an NPDES water discharge permit. The NPDES permit specifies effluent limits to  
51 ensure water quality standards are maintained. Pretreatment of the liquid effluent using IX

1 columns, reverse osmosis, and barium/radium sulfate precipitation is typically incorporated into  
2 the surface water discharge process to decrease uranium and radium levels in the wastewater  
3 below the permitted discharge limits. Like the land application wastewater disposal option, this  
4 treatment might require additional land for the construction of radium settling basins and storage  
5 reservoirs (NRC, 2003a). An applicant would need to control (i) byproduct material remaining at  
6 storage facilities and within tanks, impoundments, and radium-settling basins until the site and  
7 facilities are decommissioned (NRC, 2003a) or (ii) the radioactivity at storage facilities and  
8 within tanks, impoundments, and radium settling basins until the site and facilities are  
9 decommissioned (NRC, 2003a; Sanford Cohen and Associates, 2008).

### 10 11 **2.1.2 No-Action (Alternative 2)**

12  
13 Under the No-Action alternative, NRC would not approve the license application for the  
14 proposed Dewey-Burdock ISR Project and BLM would not approve the applicant's modified  
15 Plan of Operations. The No-Action alternative would result in the applicant not constructing or  
16 operating the proposed Dewey-Burdock ISR Project. No buildings, access roads, wellfields,  
17 pipelines, or liquid waste disposal systems would be constructed. No uranium would be  
18 recovered from the subsurface ore bodies; therefore, injection, production, and monitoring wells  
19 would not be installed to operate the facility. No lixiviant would be introduced into the  
20 subsurface, and no facilities would be constructed to process extracted uranium or store  
21 chemicals. Because no uranium would be recovered, neither aquifer restoration nor  
22 decommissioning activities would occur. No liquid effluents or solid wastes would be generated.  
23 The No-Action alternative is included to provide a basis for comparing and evaluating the  
24 potential impacts of the other alternatives, including the proposed action.

## 25 26 **2.2 Alternatives Eliminated From Detailed Analysis**

27  
28 As required by NEPA regulations, the NRC staff considered alternatives to issuing the applicant  
29 a license. The range of alternatives was determined by considering the purpose and need for  
30 the proposed action and the private party's objective in extracting uranium from a particular ore  
31 body. In a site-specific environmental review the identification of reasonable alternatives  
32 depends on the proposed action, as well as site conditions. This section describes alternatives  
33 to the proposed action that were considered by the NRC, but not subjected to detailed analyses  
34 for the reasons described in the following sections. Sections 2.2.1 and 2.2.2 describe different  
35 mining techniques and associated milling alternatives for the proposed project site.  
36 Section 2.2.3 discusses the use of different lixiviant chemistry. Section 2.2.4 describes  
37 alternative site locations for the central plant and satellite facility within the proposed project  
38 area. Section 2.2.5 details the use of alternative well completion methods at the proposed  
39 project site.

### 40 41 **2.2.1 Conventional Mining and Milling**

42  
43 Uranium ore deposits may be accessed either by open pit surface mining or by underground  
44 mining techniques. Open pit mining is used to extract shallow ore deposits—generally deposits  
45 less than 168 m [550 ft] below ground surface (EPA, 2008a). To access shallow deposits, the  
46 topsoil is removed and stockpiled for later site reclamation, while the overburden (the remainder  
47 of the material overlying the deposit) is removed via mechanical shovels and scrapers, via  
48 trucks or loaders, or by blasting (EPA, 1995, 2008a). The depth to which an orebody is surface  
49 mined depends on the ore grade, the nature of the overburden, and the ratio of overburden to  
50 be removed to one unit of ore extracted (EPA, 1995).

1  
2 Underground mining techniques vary depending on the size, depth, orientation, and grade of the  
3 orebody; the stability of the subsurface strata; and economic factors (EPA, 1995, 2008b). In  
4 general, underground mining involves sinking a shaft near the ore body and then extending  
5 levels horizontally from the main shaft at different depths to access the ore. Ore and waste rock  
6 are removed through shafts by elevator or by using trucks to carry these materials up inclines to  
7 the surface (EPA, 2008a).

8  
9 In addition, when the open pit or underground workings are established, the mine may need to  
10 be dewatered to allow the extraction of the uranium ore. Dewatering is accomplished by either  
11 pumping water directly from the open pit or pumping interceptor wells to lower the water table  
12 (EPA, 1995). The mine water usually requires treatment prior to discharge because it becomes  
13 contaminated with radioactive constituents, metals, and suspended and dissolved solids.  
14 Discharge of these mine waters may have subsequent impacts to surface water drainages and  
15 sediments, as well as to near-surface sources of groundwater (EPA, 1995).

16  
17 Following the completion of mining, either by open pit or underground techniques, the mine will  
18 be reclaimed. Stockpiled overburden is reintroduced into the mined area, either during or  
19 following extraction operations, and topsoil is reapplied in an attempt to reestablish topography  
20 consistent with the surroundings. When dewatering ceases, the water table may rebound and  
21 fill portions of the open pit and underground workings. Historically, uranium mines have had  
22 negative impacts on local groundwater supplies and the waste materials from the mines have  
23 contaminated lands surrounding the mines (EPA, 2008b).

24  
25 Ore extracted from an open pit or underground mine is processed in a conventional mill. As  
26 discussed in GEIS Appendix C (NRC, 2009a), ore processing at a conventional mill involves a  
27 series of steps (handling and preparation, concentration, and product recovery). While  
28 conventional milling techniques recover approximately 90 percent of the uranium content of the  
29 feed ore (NRC, 2009a), the process generates substantial wastes, known as tailings, because  
30 roughly 95 percent of the ore rock is disposed as waste (NRC, 2006). The conventional mill  
31 process also consumes large amounts of water. For example, the water usage estimate for the  
32 proposed Pinon Ridge Mill in Colorado is approximately 534 Lpm [141 gpm] (EFRC, 2009).

33  
34 Tailings are disposed of in lined impoundments; NRC reviews the design and construction of  
35 impoundments to ensure safe disposal of the tailings (NRC, 2009a). Reclamation of the tailings  
36 pile generally involves evaporation of liquids in the tailings and settlement of the tailings over  
37 time. The tailings pile is then covered with a thick radon barrier and earthen material or rocks  
38 for erosion control. The area surrounding the reclaimed tailings piles would be fenced off in  
39 perpetuity and the site transferred to either a state or federal agency for long-term care  
40 (EIA, 1995). The costs associated with final mill decommissioning and tailings reclamation can  
41 run into the tens of millions of dollars (EIA, 1995).

42  
43 In the final GEIS on uranium milling (NRC, 1980), NRC evaluated the potential environmental  
44 impacts of conventional uranium milling operations in a programmatic context, including the  
45 management of mill tailings. This GEIS evaluated the nature and extent of conventional  
46 uranium milling as part of the development of regulatory requirements for the management and  
47 disposal of mill tailings and for mill decommissioning. The impacts from operating a  
48 conventional mill are significantly greater than for operating an ISR facility. For example, at the  
49 proposed Dewey-Burdock ISR Project, approximately 75 ha [185 ac] would be used for uranium  
50 extraction operations. This would include wellfields, the central processing plant, a satellite  
51 facility, and pipeline infrastructure (Powertech, 2010a). A conventional mill requires much more

1 land; approximately 300 ha [741 ac] would be affected by construction and milling operations  
2 and related activities would use approximately an additional 150 ha [370 ac] (NRC, 1980). The  
3 deposition of windblown tailings could further restrict land use near the tailings. In conventional  
4 mill modeling, levels of contamination extend several hundred meters [feet] beyond the model  
5 site boundary evaluated in the GEIS for conventional milling. Because of these factors,  
6 conventional milling was eliminated from detailed analysis in the SEIS.

### 7 8 **2.2.2 Conventional Mining and Heap Leaching** 9

10 Heap leaching is discussed in GEIS Appendix C. For low-grade ores, heap leaching is a viable  
11 alternative. Heap leaching is typically used when the ore body is small and situated far from the  
12 milling site. After extraction by conventional open pit or underground mining, the low-grade ore  
13 is crushed to approximately 2.6 cm [1 in] in size and mounded above grade on a prepared pad.  
14 A sprinkler or drip system positioned over the top continually distributes leach solution over the  
15 mound. Depending on the lime content, an acid or alkaline solution is used. The leach solution  
16 trickles through the ore and mobilizes the uranium, as well as other metals, into solution. The  
17 solution is collected at the base of the mound by a manifold and is then processed to extract the  
18 uranium. The uranium recovery from heap leaching ranges from 50 to 80 percent, resulting in a  
19 final tailings material of around 0.01 percent  $U_3O_8$  content. When heap leaching is complete,  
20 the depleted materials are byproduct material that must be placed in a conventional mill tailings  
21 impoundment unless NRC grants an exemption for disposal in place. The impacts from heap  
22 leaching may be less than those associated with conventional milling; however, the impacts  
23 from open pit or underground mining are substantial. For these reasons, which are the same  
24 as those listed in SEIS Section 2.2.1, this alternative is not subjected to detailed analysis in  
25 this document.

### 26 27 **2.2.3 Alternative Lixivants** 28

29 Alternative lixiviant chemistry was considered for the operations phase of the applicant's  
30 proposed project. Alternative chemistry includes acid leach solutions and ammonia-based  
31 lixivants (Powertech, 2009a). Acid-based lixivants, such as sulfuric acid, dissolve heavy  
32 metals and other solids associated with uranium in the host rock and other chemical  
33 constituents that require additional remediation and have greater environmental impacts. At a  
34 small-scale research facility in Wyoming, acid-based solutions were used to test their  
35 effectiveness as a lixiviant in the ISR process. During operations, significant problems  
36 developed. The mineral gypsum precipitated on the well screens and in the aquifer, which  
37 plugged the wells and reduced the efficiency of the wellfield restoration. Aquifer restoration had  
38 limited success, because of the gradual dissolution of the precipitated gypsum, which resulted in  
39 increased salinity and sulfate levels in the affected groundwater (Uranium One Americas, 2009).  
40 Because it is technically more difficult to restore acid mine sites, the use of an acid-based  
41 lixiviant was eliminated from detailed analysis in the SEIS.

42  
43 Ammonia-based lixivants have been used at ISR operations in Wyoming. However, operational  
44 experience has shown that ammonia tends to adsorb onto clay minerals in the subsurface and  
45 then slowly desorbs from the clay during restoration. This requires that a much larger volume of  
46 groundwater be removed and processed during aquifer restoration (Mudd, 2001). Because of  
47 the greater consumptive use of groundwater to meet groundwater restoration requirements, the  
48 use of an ammonia-based lixiviant was eliminated from detailed analysis.

## 2.2.4 Alternative Sites

Alternative sites within the proposed Dewey-Burdock ISR Project area were evaluated for the locations of the central plant and satellite facility (Powertech, 2009a). The applicant considered site-specific conditions in choosing the proposed central plant and satellite facility locations. The applicant made siting decisions to avoid proximity to historical and cultural resources, to avoid construction and operations in areas of historical environmental disturbance from past surface mining, to protect wildlife by avoidance of nesting sites for raptors, to avoid proximity to drainages, and to utilize surface and subsurface geological characteristics efficiently.

Based on the site-specific conditions used to choose the proposed locations of the Burdock central plant and Dewey satellite facility, alternative sites were not chosen for detailed analysis.

## 2.2.5 Alternative Well Completion Methods

Within the Dewey-Burdock ISR Project area, there is at least one area where one production zone overlies another (Powertech, 2009a). The applicant proposed the following preferred scenario for well completion for areas that contain more than one ore-bearing sand. First, the production and injection wells would be completed within the lowest ore sand. After the uranium has been recovered in the lowest sand, the production and injection wells would be completed in the next ore-bearing sand upward. After recovering the uranium from all the ore-bearing sands, restoration would begin by restoring the uppermost sandstone horizon first and working down to the lowermost sandstone horizon. The monitoring well ring design would correspond to the depth of uranium-bearing sand undergoing production or restoration.

Two alternative well completion methods were considered for areas within the project area containing more than one ore-bearing sand or production zone. The first alternative considered completion of wells across multiple sand horizons using the same wells and same monitoring ring. This alternative was not selected for detailed analysis due to the difficulties in (i) ensuring that the injection and production fluids would be efficiently distributed through the various sands and (ii) monitoring the performance of the wellfield. The second alternative considered construction of larger wellfields and monitoring rings to encompass more reserves. Under this alternative, wells would be completed in the same manner as the applicant's preferred option. This method was considered and rejected due to (i) the increase in scale, (ii) the potential difficulties in evaluating pump tests, (iii) the increase in time and activities associated with installing and producing the wellfield, and (iv) delay in final restoration and reclamation of the wellfield. Therefore, this alternative well completion method was not selected for detailed analysis.

## 2.3 Comparison of the Predicted Environmental Impacts

NUREG-1748 (NRC, 2003b) categorizes the significance of potential environmental impacts as follows:

**SMALL:** The environmental effects are not detectable or are so minor that they will neither destabilize nor noticeably alter any important attribute of the resource considered.

**MODERATE:** The environmental effects are sufficient to alter noticeably, but not destabilize, important attributes of the resource considered.



1  
2           LARGE:       The environmental effects are clearly noticeable and are sufficient to  
3                           destabilize important attributes of the resource considered.  
4

5 Chapter 4 presents a detailed evaluation of the environmental impacts from the proposed action  
6 and the No-Action alternative on resource areas at the proposed Dewey-Burdock ISR Project.  
7 Table 2.3-1 compares the significance level (SMALL, MODERATE, or LARGE) of potential  
8 environmental impacts of the proposed action and the No-Action alternative and identifies the  
9 section in Chapter 4 where more detailed information can be found. For each resource area,  
10 the NRC staff identifies the significance level during each phase of the ISR process:  
11 construction, operation, aquifer restoration, and decommissioning. The predicted  
12 environmental impact to each resource area for the proposed action can also be found in the  
13 Executive Summary.  
14  
15

**Table 2.3-1. Summary of Impacts for the Proposed Dewey-Burdock ISR Project**

Section 4.2 Land Use Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.2.1.1.1	SMALL 4.2.1.2.1	SMALL 4.2.1.3	NONE 4.2.2
Operations	SMALL 4.2.1.1.2	SMALL 4.2.1.2.2	SMALL 4.2.1.3	NONE 4.2.2
Aquifer Restoration	SMALL 4.2.1.1.3	SMALL 4.2.1.2.3	SMALL 4.2.1.3	NONE 4.2.2
Decommissioning	SMALL to MODERATE 4.2.1.1.4	SMALL to MODERATE 4.2.1.2.4	SMALL to MODERATE 4.2.1.3	NONE 4.2.2
Section 4.3 Transportation Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL to MODERATE 4.3.1.1.1	SMALL to MODERATE 4.3.1.2.1	SMALL to MODERATE 4.3.1.3	NONE 4.3.2
Operations	SMALL to MODERATE 4.3.1.1.2	SMALL to MODERATE 4.3.1.2.2	SMALL to MODERATE 4.3.1.3	NONE 4.3.2
Aquifer Restoration	SMALL 4.3.1.1.3	SMALL 4.3.1.2.3	SMALL 4.3.1.3	NONE 4.3.2
Decommissioning	SMALL 4.3.1.1.4	SMALL 4.3.1.2.4	SMALL 4.3.1.3	NONE 4.3.2

16

**Table 2.3-1. Summary of Impacts for the Proposed Dewey-Burdock ISR Project (continued)**

Section 4.4 Geology and Soils Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.4.1.1.1	SMALL 4.4.1.2.1	SMALL 4.4.1.3	NONE 4.4.2
Operations	SMALL 4.4.1.1.2	SMALL 4.4.1.2.2	SMALL 4.4.1.3	NONE 4.4.2
Aquifer Restoration	SMALL 4.4.1.1.3	SMALL 4.4.1.2.3	SMALL 4.4.1.3	NONE 4.4.2
Decommissioning	SMALL 4.4.1.1.4	SMALL 4.4.1.2.4	SMALL 4.4.1.3	NONE 4.4.2
Section 4.5.1 Water Resources Impacts (Surface Water and Wetlands)				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.5.1.1.1.1	SMALL 4.5.1.1.2.1	SMALL 4.5.1.1.3	NONE 4.5.1.2
Operations	SMALL 4.5.1.1.1.2	SMALL 4.5.1.1.2.2	SMALL 4.5.1.1.3	NONE 4.5.1.2
Aquifer Restoration	SMALL 4.5.1.1.1.3	SMALL 4.5.1.1.2.3	SMALL 4.5.1.1.3	NONE 4.5.1.2
Decommissioning	SMALL 4.5.1.1.1.4	SMALL 4.5.1.1.2.4	SMALL 4.5.1.1.3	NONE 4.5.1.2
Section 4.5.2 Water Resources Impacts (Groundwater)				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.5.2.1.1.1	SMALL 4.5.2.1.2.1	SMALL 4.5.2.1.3	NONE 4.5.2.2
Operations	SMALL 4.5.2.1.1.2	SMALL 4.5.2.1.2.2	SMALL 4.5.2.1.3	NONE 4.5.2.2
Aquifer Restoration	SMALL to MODERATE 4.5.2.1.1.3	SMALL to MODERATE 4.5.2.1.2.3	SMALL to MODERATE 4.5.2.1.3	NONE 4.5.2.2
Decommissioning	SMALL 4.5.2.1.1.4	SMALL 4.5.2.1.2.4	SMALL 4.5.2.1.3	NONE 4.5.2.2

**Table 2.3-1. Summary of Impacts for the Proposed Dewey-Burdock ISR Project (continued)**

Section 4.6 Ecological Resources Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.6.1.1.1	SMALL to MODERATE 4.6.1.2.1	SMALL to MODERATE 4.6.1.3	NONE 4.6.2
Operations	SMALL 4.6.1.1.2	SMALL to MODERATE 4.6.1.2.2	SMALL to MODERATE 4.6.1.3	NONE 4.6.2
Aquifer Restoration	SMALL 4.6.1.1.3	SMALL to MODERATE 4.6.1.2.3	SMALL to MODERATE 4.6.1.3	NONE 4.6.2
Decommissioning	SMALL to MODERATE 4.6.1.1.4	SMALL to MODERATE 4.6.1.2.4	SMALL to MODERATE 4.6.1.3	NONE 4.6.2
Section 4.7 Air Quality Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL to MODERATE 4.7.1.1.1	SMALL to MODERATE 4.7.1.2.1	SMALL to MODERATE 4.7.1.3	NONE 4.7.2
Operations	SMALL to MODERATE 4.7.1.1.2	SMALL to MODERATE 4.7.1.2.2	SMALL to MODERATE 4.7.1.3	NONE 4.7.2
Aquifer Restoration	SMALL to MODERATE 4.7.1.1.3	SMALL to MODERATE 4.7.1.2.3	SMALL to MODERATE 4.7.1.3	NONE 4.7.2
Decommissioning	SMALL to MODERATE 4.7.1.1.4	SMALL to MODERATE 4.7.1.2.4	SMALL to MODERATE 4.7.1.3	NONE 4.7.2
Section 4.8 Noise Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.8.1.1.1	SMALL 4.8.1.2.1	SMALL 4.8.1.3	NONE 4.8.2
Operations	SMALL 4.8.1.1.2	SMALL 4.8.1.2.2	SMALL 4.8.1.3	NONE 4.8.2
Aquifer Restoration	SMALL 4.8.1.1.3	SMALL 4.8.1.2.3	SMALL 4.8.1.3	NONE 4.8.2
Decommissioning	SMALL 4.8.1.1.4	SMALL 4.8.1.2.4	SMALL 4.8.1.3	NONE 4.8.2

**Table 2.3-1. Summary of Impacts for the Proposed Dewey-Burdock ISR Project (continued)**

Section 4.9 Historical and Cultural Resources Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL to LARGE 4.9.1.1.1	SMALL to LARGE 4.9.1.2.1	SMALL to LARGE 4.9.1.3	NONE 4.9.2
Operations	SMALL 4.9.1.1.2	SMALL 4.9.1.2.2	SMALL 4.9.1.3	NONE 4.9.2
Aquifer Restoration	SMALL 4.9.1.1.3	SMALL 4.9.1.2.3	SMALL 4.9.1.3	NONE 4.9.2
Decommissioning	SMALL 4.9.1.1.4	SMALL 4.9.1.2.4	SMALL 4.9.1.3	NONE 4.9.2
Section 4.10 Visual and Scenic Resources Impacts				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.10.1.1.1	SMALL 4.10.1.2.1	SMALL 4.10.1.3	NONE 4.10.2
Operations	SMALL 4.10.1.1.2	SMALL 4.10.1.2.2	SMALL 4.10.1.3	NONE 4.10.2
Aquifer Restoration	SMALL 4.10.1.1.3	SMALL 4.10.1.2.3	SMALL 4.10.1.3	NONE 4.10.2
Decommissioning	SMALL 4.10.1.1.4	SMALL 4.10.1.2.4	SMALL 4.10.1.3	NONE 4.10.2
Section 4.11 Socioeconomic Impacts (Demographics)				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
Construction <i>Demographics</i>	SMALL 4.11.1.1.1			NONE 4.11.2
<i>Income</i>	SMALL 4.11.1.1.2			
<i>Housing</i>	SMALL 4.11.1.1.3			
<i>Employment Rate</i>	SMALL 4.11.1.1.4			
<i>Local Finance</i>	SMALL 4.11.1.1.5			
<i>Education</i>	SMALL 4.11.1.1.6			
<i>Health and Social Services</i>	SMALL 4.11.1.1.7			
Operations <i>Demographics</i>	SMALL 4.11.1.2.1			NONE
<i>Income</i>	SMALL 4.11.1.2.2			
<i>Housing</i>	SMALL 4.11.1.2.3			

**Table 2.3-1. Summary of Impacts for the Proposed Dewey-Burdock ISR Project (continued)**

<i>Employment Rate</i>	SMALL 4.11.1.2.4			4.11.2
<i>Local Finance</i>	SMALL 4.11.1.2.5			
<i>Education</i>	SMALL 4.11.1.2.6			
<i>Health and Social Services</i>	SMALL 4.11.1.2.7			
Aquifer Restoration	SMALL 4.11.1.3			NONE 4.11.2
Decommissioning	SMALL 4.11.1.4			NONE 4.11.2
<b>Section 4.12 Environmental Justice Impacts</b>				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
Construction	SMALL 4.12.1			NONE 4.12.2
Operations	SMALL 4.12.1			NONE 4.12.2
Aquifer Restoration	SMALL 4.12.1			NONE 4.12.2
Decommissioning	SMALL 4.12.1			NONE 4.12.2
<b>Section 4.13 Public and Occupational Health and Safety Impacts</b>				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.13.1.1.1	SMALL 4.13.1.2.1	SMALL 4.13.1.3	NONE 4.13.2
Operations	SMALL 4.13.1.1.2	SMALL 4.13.1.2.2	SMALL 4.13.1.3	NONE 4.13.2
Aquifer Restoration	SMALL 4.13.1.1.3	SMALL 4.13.1.2.3	SMALL 4.13.1.3	NONE 4.13.2
Decommissioning	SMALL 4.13.1.1.4	SMALL 4.13.1.2.4	SMALL 4.13.1.3	NONE 4.13.2
<b>Section 4.14 Waste Management Impacts</b>				
	Proposed Action (Alternative 1)			No Action (Alternative 2)
	Deep Well Disposal Via Class V Injection Option	Land Application Option	Combined Disposal Via Class V Injection and Land Application Option	
Construction	SMALL 4.14.1.1.1	SMALL 4.14.1.2.1	SMALL 4.14.1.3	NONE 4.14.2
Operations	SMALL 4.14.1.1.2	SMALL 4.14.1.2.2	SMALL 4.14.1.3	NONE 4.14.2
Aquifer Restoration	SMALL 4.14.1.1.3	SMALL 4.14.1.2.3	SMALL 4.14.1.3	NONE 4.14.2
Decommissioning	SMALL to MODERATE 4.14.1.1.4	SMALL to MODERATE 4.14.1.2.4	SMALL to MODERATE 4.14.1.3	NONE 4.14.2

## 2.4 Preliminary Recommendation

After weighing the impacts of the proposed action and comparing the alternatives, NRC staff, in accordance with 10 CFR 51.71(f), set forth a preliminary NEPA recommendation regarding the proposed action. Unless safety issues mandate otherwise, the preliminary NRC staff recommendation to the Commission related to the environmental aspects of the proposed action is that a source and byproduct material license for the proposed action be issued as requested. The NRC staff conclude that the applicable environmental monitoring program described in Chapter 7 and the proposed mitigation measures discussed in Chapter 4 will eliminate or substantially lessen potential adverse environmental impacts associated with the proposed action.

The NRC staff conclude that the overall benefits of the proposed action outweigh the environmental disadvantages and costs based on the following:

- Potential adverse impacts to all environmental resource areas are expected to be SMALL, with the exception of
  1. Land use resources during decommissioning. Land disturbance during decommissioning will be MODERATE until vegetation is reestablished in seeded areas (see SEIS Sections 4.2.1.1.4, 4.2.1.2.4, and 4.2.1.3).
  2. Transportation resources during construction and operation. Increases in traffic during construction and operations will have a MODERATE impact on Dewey Road, the road nearest the proposed site (see SEIS Sections 4.3.1.1.1, 4.3.1.2.1, 4.3.1.2.2, and 4.3.1.3).
  3. Groundwater resources during aquifer restoration. During aquifer restoration in the Burdock area, drawdown-induced migration of contaminants into the production zone (i.e., the Chilson aquifer) from abandoned open pit mines could adversely affect restoration goals and have a MODERATE impact (see SEIS Sections 4.5.2.1.1.3, 4.5.2.1.2.3, and 4.5.2.1.3).
  4. Ecological resources during construction, operations, aquifer restoration, and decommissioning. Under the land application and combined Class V deep well disposal and land application options, construction, operations, and aquifer restoration activities will have a MODERATE impact on vegetation, small- to medium-sized mammals, raptors, nongame and migratory birds, and reptiles (see SEIS Sections 4.6.1.2.1, 4.6.1.2.2, 4.6.1.2.3, and 4.6.1.3). Under all disposal options, land-disturbing activities during decommissioning will have a MODERATE impact on vegetation until it is reestablished (see SEIS Sections 4.6.1.1.4, 4.6.1.2.4, and 4.6.1.3).
  5. Air quality during construction, operations, aquifer restoration, and decommissioning. During all phases of the ISR lifecycle, there will be the potential for MODERATE air impacts from short-term, intermittent fugitive dust emissions (see SEIS Sections 4.7.1.1.1 through 4.7.1.1.4, 4.7.1.2.1 through 4.7.1.2.4, and 4.7.1.3).

1           6.       Historical and cultural resources during construction. Construction could have a  
2           MODERATE or LARGE impact on 18 historic properties—those sites currently  
3           listed or eligible for listing on the National Register of Historic Places (NRHP)—  
4           and other unevaluated historic, cultural, and religious properties in the project  
5           area (see SEIS Sections 4.9.1.1.1, 4.9.1.2.1, and 4.9.1.3).

6  
7           7.       Waste management resources during decommissioning. Impacts from disposal  
8           of nonhazardous solid waste could be MODERATE depending on the long-term  
9           status of existing local landfill resources (see SEIS Sections 4.14.1.1.4 and  
10          4.14.1.2.4).

- 11  
12       •       Regarding groundwater, the portion of the aquifer(s) designated for uranium recovery  
13       must be exempted as underground sources of drinking water before ISR operations  
14       begin. Additionally, the applicant will be required to monitor for excursions of lixiviant  
15       from the production zones and to take corrective actions in the event of an excursion.  
16       Prior to operations, the applicant will be required to provide detailed hydrologic pumping  
17       test data packages and operational plans for each wellfield at the proposed project. The  
18       applicant will also be required to restore groundwater parameters affected by ISR  
19       operations to levels that are protective of human health and safety.  
20  
21       •       The costs associated with the proposed project are, for the most part, limited to the area  
22       surrounding the site.  
23  
24       •       The regional benefits of building the proposed project will be increased employment,  
25       economic activity, and tax revenues in the region around the proposed site.  
26

## 27       **2.5           References**

28  
29       10 CFR Part 20. *Code of Federal Regulations*, Title 10, *Energy*, Part 20. “Standards for  
30       Protection Against Radiation.” Washington, DC: U.S. Government Printing Office.

31  
32       10 CFR Part 40. *Code of Federal Regulations*, Title 10, *Energy*, Part 40. “Domestic Licensing  
33       of Source Material.” Washington, DC: U.S. Government Printing Office.

34  
35       10 CFR Part 40 Appendix A. *Code of Federal Regulations*, Title 10, *Energy*, Part 40  
36       Appendix A. “Criteria Relating to the Operation of Uranium Mills and to the Disposition of  
37       Tailings or Wastes Produced by the Extraction or Concentration of Source Material from Ores  
38       Processed Primarily from their Source Material Content.” Washington, DC: U.S. Government  
39       Printing Office.

40  
41       10 CFR Part 51. *Code of Federal Regulations*, Title 10, *Energy*, Part 51. “Environmental  
42       Protection Regulations for Domestic Licensing and Related Regulatory Functions.”  
43       Washington, DC: U.S. Government Printing Office.

44  
45       40 CFR Part 61. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 61.  
46       “National Emission Standards for Hazardous Air Pollutants (NESHAPS).” Washington, DC:  
47       U.S. Government Printing Office.  
48

- 1 40 CFR Part 144. *Code of Federal Regulations*, Title 40, *Protection of the Environment*,  
2 Part 144. "Underground Injection Control Program." Washington, DC: U.S. Government  
3 Printing Office.  
4
- 5 40 CFR Part 145. *Code of Federal Regulations*, Title 40, *Protection of the Environment*,  
6 Part 145. "State UIC Program Requirements." Washington, DC: U.S. Government Printing  
7 Office.  
8
- 9 40 CFR Part 146. *Code of Federal Regulations*, Title 40, *Protection of the Environment*,  
10 Part 146. "Underground Injection Control Program: Criteria and Standards." Washington, DC:  
11 U.S. Government Printing Office.  
12
- 13 40 CFR Part 192. *Code of Federal Regulations*, Title 40, *Protection of the Environment*,  
14 Part 192. "Health and Environmental Protection Standards for Uranium and Thorium Mill  
15 Tailings." Washington, DC: U.S. Government Printing Office.  
16
- 17 40 CFR Part 261. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 261.  
18 "Identification and Listing of Hazardous Waste." Washington, DC: U.S. Government Printing  
19 Office.  
20
- 21 40 CFR Part 264. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 264.  
22 "Standards for Owners and Operators of Hazardous Waste Treatment, Storage and Disposal  
23 Facilities." Washington, DC: U.S. Government Printing Office.  
24
- 25 40 CFR Part 440. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 440.  
26 "Ore Mining and Dressing Point Source Category." Washington, DC: U.S. Government  
27 Printing Office.  
28
- 29 43 CFR Part 3800. *Code of Federal Regulations*, Title 43, *Public Lands: Interior*, Part 3800.  
30 "Mining Claims Under the General Mining Laws." Washington, DC: U.S. Government  
31 Printing Office.  
32
- 33 ARSD (Administrative Rules of South Dakota) Section 74:29:07:07. Topsoil Management.  
34 South Dakota Legislature Administrative Rules.  
35
- 36 ARSD Chapter 74:11:08. Capping, Sealing, and Plugging Exploration Test Holes.  
37 South Dakota Legislature Administrative Rules.  
38
- 39 EFRC (Energy Fuels Resources Corporation). "Reply to Responses to Comments Received at  
40 Two Public Meetings, Pinon Ridge Mill Facility, Montrose County, Colorado." Letter  
41 (September 16) to Montrose County Commissioners from F. Filas, Lakewood, Colorado:  
42 Energy Fuels Resources Corporation. 2009.  
43
- 44 EIA (Energy Information Administration). "Decommissioning of U.S. Uranium Production  
45 Facilities." DOE/EIA-0592. Washington, DC: EPA, Energy Information Administration, Office  
46 of Coal, Nuclear, Electric, and Alternate Fuels. 1995.  
47
- 48 EPA (U.S. Environmental Protection Agency). "Technical Report on Technologically Enhanced  
49 Naturally Occurring Radioactive Materials from Uranium Mining: Mining and Reclamation  
50 Background." Vol. 1. EPA-402-R-08-005. Washington, DC: Environmental Protection  
51 Agency, Office of Radiation and Indoor Air/Radiation Protection Division. 2008a.



- 1  
2 EPA. "Health and Environmental Impacts of Uranium Contamination in the Navajo Nation:  
3 Five-Year Plan." Requested by House Committee on Oversight and Government Reform.  
4 Washington, DC: EPA. 2008b.  
5
- 6 EPA. "Technical Resource Document: Extraction and Beneficiation of Ores and  
7 Minerals—Uranium." Vol. 5. EPA 530-R-94-032. Washington, DC: EPA, Office of Solid  
8 Waste/Special Waste Branch. 1995.  
9
- 10 Mackin, P.C., D. Daruwalla, J. Winterle, M. Smith, and D.A. Pickett. NUREG/CR-6733, "A  
11 Baseline Risk-Informed, Performance-Based Approach for *In-Situ* Leach Uranium Extraction  
12 Licensees." Washington, DC: NRC. September 2001.  
13
- 14 Mudd, G.M. "Critical Review of Acid *In-Situ* Leach Uranium Mining: 1-USA and Australia."  
15 *Environmental Geology*. Vol. 41. pp. 390–403. 2001.  
16
- 17 NRC (U.S. Nuclear Regulatory Commission). "Draft License SUA-1600 for Powertech (USA),  
18 Inc." ADAMS Accession No. ML12207A480. Washington, DC: NRC. 2012.  
19
- 20 NRC. NUREG-1910, "Generic Environmental Impact Statement for *In-Situ* Leach Uranium  
21 Milling Facilities." ML091480244, ML091480188. Washington, DC: NRC. May 2009a.  
22
- 23 NRC. "Site Visit to the Proposed Dewey-Burdock Uranium Project, Fall River and Custer  
24 Counties, South Dakota, and Meetings with Federal, State, and County Agencies, and Local  
25 Organizations, November 30–December 4, 2009." ML093631627. Washington, DC: NRC.  
26 2009b.  
27
- 28 NRC. Regulatory Guide 3.11, "Design, Construction, and Inspection of Embankment Retention  
29 Systems at Uranium Recovery Facilities." Rev. 3. Washington, DC: NRC. November 2008.  
30
- 31 NRC. "Environmental Assessment for the Addition of the Reynolds Ranch Mining Area to  
32 Power Resources, Inc.'s Smith Ranch/Highlands Uranium Project Converse County, Wyoming."  
33 Washington, DC: NRC. 2006.  
34
- 35 NRC. NUGEG-1569, "Standard Review Plan for *In-Situ* Leach Uranium Extraction License  
36 Applications—Final Report." Washington, DC: NRC. June 2003a.  
37
- 38 NRC. NUREG-1748, "Environmental Review Guidance for Licensing Actions Associated with  
39 NMSS Programs." Washington, DC: NRC. August 2003b.  
40
- 41 NRC. "Environmental Assessment for Renewal of Source Material License No. SUA-1341,  
42 Omega Mining, Inc. Irigaray and Christensen Ranch Projects, Campbell and Johnson  
43 Counties, Wyoming." Docket No. 40-8502. Washington, DC: NRC. June 1998a.  
44
- 45 NRC. "Environmental Assessment for Renewal of Source Material License No. SUA-1534:  
46 Crow Butte Resources Incorporated Crow Butte Uranium Project Dawes County, Nebraska."  
47 Docket No. 40-8943. Washington, DC: NRC. 1998b.  
48

- 1 NRC. NUREG–1508, “Final Environmental Impact Statement To Construct and Operate the  
2 Crownpoint Uranium Solution Mining Project, Crownpoint, New Mexico.” ML082170248.  
3 Washington, DC: NRC. February 1997.  
4
- 5 NRC. “Guidelines for Decontamination of Facilities and Equipment Prior to Release for  
6 Unrestricted Use or Termination of Licenses for Byproduct, Source, or Special Nuclear  
7 Material.” ML003745526. Washington DC: NRC. April 1993.  
8
- 9 NRC. NUREG–0706, “Final Generic Environmental Impact Statement on Uranium Milling  
10 Project M-25.” ML032751663, ML0732751667, ML032751669. Washington, DC: NRC.  
11 September 1980.  
12
- 13 Powertech [Powertech (USA) Inc.]. “Dewey-Burdock Project Groundwater Discharge Plan  
14 Custer and Fall River Counties, South Dakota.” ML12195A039, ML12195A040. Edgemont,  
15 South Dakota: Powertech. March 2012a.  
16
- 17 Powertech. “Dewey-Burdock Project Emissions Inventory Revisions.” Email (July 31) from  
18 R. Blubaugh to Bradley Werling, Southwest Research Institute®. ADAMS No. ML12216A220.  
19 South Dakota: Powertech. 2012b.  
20
- 21 Powertech. “Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
22 and Custer Counties, South Dakota, Technical Report RAI Responses, June, 2011.”  
23 ML112071064. Greenwood Village, Colorado: Powertech (USA) Inc. 2011.  
24
- 25 Powertech. “Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
26 and Custer Counties, South Dakota ER\_RAI Response August 11, 2010.” ML102380516.  
27 Greenwood Village, Colorado: Powertech. 2010a.  
28
- 29 Powertech. “Subject: Powertech (USA), Inc.’s Responses to the U.S. Nuclear Regulatory  
30 Commission (NRC) Staff’s Verbal and Email Requests for Clarification of Selected Issues  
31 Related to the Dewey-Burdock Uranium Project Environmental Review Docket No. 40-9075;  
32 TAC No. J 00533.” Letter (November 4) to R. Burrows, Project Manager, Office of Federal and  
33 State Materials and Environmental Management Programs from R. Blubaugh, Vice President-  
34 Environmental Health and Safety Resources, ML110820582. Greenwood Village, Colorado:  
35 Powertech. 2010b.  
36
- 37 Powertech. “Subject: Powertech (USA), Inc.’s Responses to the U.S. Nuclear Regulatory  
38 Commission (NRC) Staff’s Verbal Request for Clarification of Response Regarding Inclusion of  
39 Emissions from Drilling Disposal Wells; Dewey-Burdock Uranium Project Environmental Review  
40 Docket No. 40-9075; TAC No. J 00533.” Letter (November 17) to R. Burrows, Project Manager,  
41 Office of Federal and State Materials and Environmental Management Programs from  
42 R. Blubaugh, Vice President, Environmental Health and Safety Resources. ML103220208.  
43 Greenwood Village, Colorado: Powertech. 2010c.  
44
- 45 Powertech. “Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
46 and Custer Counties, South Dakota—Environmental Report.” Docket No. 040-09075.  
47 ML092870160. Greenwood Village, Colorado: Powertech. August 2009a.  
48
- 49 Powertech. “Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
50 and Custer Counties, South Dakota—Technical Report.” Docket No. 040-09075.  
51 ML092870160. Greenwood Village, Colorado: Powertech. August 2009b.

- 1  
2 Powertech. "Dewey-Burdock Project, Supplement to Application for NRC Uranium Recovery  
3 License Dated February 2009." Docket No. 040-09075. ML092870160. Greenwood Village,  
4 Colorado: Powertech. August 2009c.  
5
- 6 Powertech. "Dewey-Burdock Project Underground Injection Control Permit Application."  
7 Greenwood Village, Colorado: Powertech. December 2008.  
8
- 9 Sanford Cohen and Associates. "Final Report Review of Existing and Proposed Tailings  
10 Impoundment Technologies." ML12237A191. Vienna, Virginia: Sanford Cohen and  
11 Associates. September 2008. <[http://www.epa.gov/radiation/docs/neshaps/subpart-w/tailings-  
12 impoundment-tech.pdf](http://www.epa.gov/radiation/docs/neshaps/subpart-w/tailings-impoundment-tech.pdf)> (19 July 2010).  
13
- 14 SDCL 45-6B-40. "Removal and Handling of Topsoil." South Dakota Legislature. South Dakota  
15 Codified Laws.  
16
- 17 Uranium One (Uranium One Americas). "Response to Request for Additional Information for  
18 the Moore Ranch *In-Situ* Uranium Recovery Project License Application (TAC JU011)."  
19 ML092450317. Denver, Colorado: Uranium One. August 2009.



### 3 DESCRIPTION OF THE AFFECTED ENVIRONMENT

#### 3.1 Introduction

The proposed Dewey-Burdock *In-Situ* Recovery (ISR) Project is located in Custer and Fall River Counties, South Dakota, in the Nebraska-South Dakota-Wyoming Uranium Milling Region as defined in the generic environmental impact statement (GEIS) (NRC, 2009a). The proposed project area, which encompasses 4,282 ha [10,580 ac] of land, is in a relatively unpopulated rural area consisting of rangeland used primarily for cattle grazing. The nearest population center to the proposed Dewey-Burdock ISR Project is Edgemont, South Dakota, approximately 21 km [13 mi] to the south-southeast. The hamlet of Dewey, South Dakota, is located approximately 3.2 km [2 mi] northwest of the project. Other towns located within 80 km [50 mi] of the proposed project area include Hot Springs and Custer, South Dakota, and Newcastle, Wyoming (see Figure 1.1-1).

This chapter describes the existing site conditions of the proposed Dewey-Burdock ISR Project. The resource areas described in this chapter include land use; transportation; geology and soils; water resources; ecology; meteorology, climatology, and air quality; noise; historic and cultural resources; visual and scenic resources; socioeconomics; public and occupational health; and waste management practices. The descriptions of the affected environment are based on information provided in the Powertech (USA) Inc. (Powertech) (referred to herein as the applicant) license application documents (Powertech, 2009a–c) and responses to NRC requests for additional information (Powertech, 2010a–c, 2011) and supplemented by additional information the U.S. Nuclear Regulatory Commission (NRC) identified. The information in this chapter forms the basis for assessing the potential impacts (see Chapter 4) of the proposed action and each alternative (see Chapter 2).

#### 3.2 Land Use

The proposed Dewey-Burdock ISR Project is located within the Great Plains physiographic province on the edge of the Black Hills uplift. The proposed project area covers 4,282 ha [10,580 ac] and is composed of two contiguous areas: the Burdock area and the Dewey area (Figure 3.2-1). The Burdock area is located in the following townships and ranges: (i) Township 7 South, Range 1 East, Sections 1, 2, 3, 10, 11, 12, and portions of Sections 14 and 15 and (ii) Township 6 South, Range 1 East, Sections 34, 35, and portions of Section 27. The Dewey area is located in the following townships and ranges: (i) Township 7 South, Range 1 East, Section 5 and portions of Section 4 and (ii) Township 6 South, Range 1 East, Sections 29, 32, and portions of Sections 20, 21, 28, 31, and 33. Approximately 4,185 ha [10,340 ac] of the proposed project area are in the hands of private landowners, while approximately 97 ha [240 ac] are U.S. Government lands managed by U.S. Bureau of Land Management (BLM) (Powertech, 2009a,b).

GEIS Section 3.1.2.2 describes the concept of split estate where different entities own the surface rights and subsurface rights (such as the rights to develop minerals) for a piece of land (NRC, 2009a). This divided ownership pattern occurs at the proposed Dewey-Burdock ISR Project site, where BLM manages federally owned subsurface mineral rights to portions of land whose surface rights are owned by private landowners. In total, the U.S. Government reserved 1,708 ha [4,220 ac] of subsurface mineral estate under the Stock-Raising Homestead Act when the surface was patented. The applicant maintains the unpatented mining claims associated

1

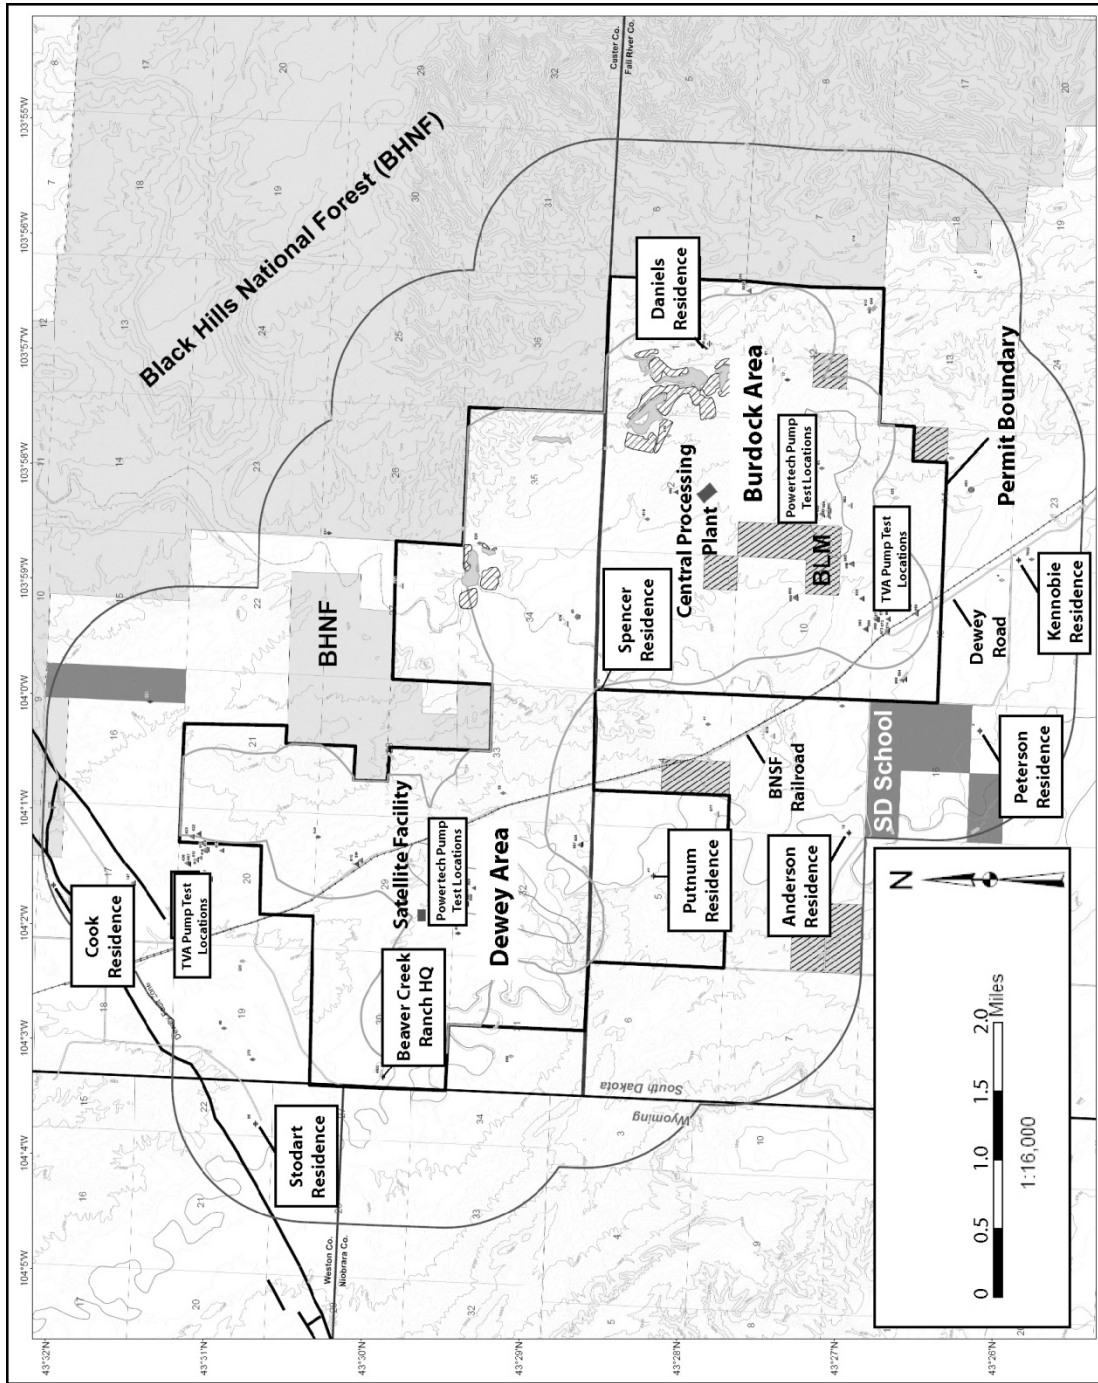


Figure 3.2-1. Map Showing Proposed Dewey-Burdock ISR Project Permit Boundary, Location of BLM-Managed Land, Position of Parcels of the Black Hills National Forest (BHNF) Bordering the Permit Area to the East and North, and Locations of Residences Within the Proposed Permit Area. Source: Modified From Powertech (2009c).

2

1 with the 1,780 ha [4,220 ac] of federal minerals. In addition, the applicant maintains unpatented  
2 mining claims on the 97 ha [240 ac] of BLM-managed surface lands.

3  
4 The land the applicant acquired for uranium resource development within the proposed project  
5 area consists of a mixture of leases from private landowners, both surface and subsurface, as  
6 well as the mining claims on the 1,780 ha [4,220 ac] of subsurface mineral estate and 97 ha  
7 [240 ac] of BLM-managed surface lands (Powertech, 2009a). This land consists of contiguous  
8 blocks of property known to contain the majority of discovered and delineated uranium  
9 resources that would be permitted for development.

10  
11 Dwellings located within a 1.6-km [1.0-mi] radius of the proposed project boundary are listed in  
12 Table 3.2-1 and mapped on Figure 3.2-1. Two permanently occupied dwellings (the Putnum  
13 residence and the Beaver Creek Ranch headquarters), the vacant Spencer residence, and the  
14 seasonally occupied Daniels dwelling are located within the proposed project area. The  
15 permanent onsite residences, the Putnum dwelling and Beaver Creek Ranch headquarters, are  
16 located approximately 1.3 km [0.8 mi] south and 0.8 km [0.5 mi] west, respectively, of proposed  
17 wellfields in the Dewey area. The closest offsite residences, the Peterson and Kennobie  
18 dwellings, are located approximately 1.3 km [0.8 mi] southwest and 1.3 km [0.8mi] south,  
19 respectively, of proposed wellfields in the Burdock area.

20  
21 The project area and surrounding region has been used as rangeland, as wildlife habitat, for  
22 recreation and hunting, in uranium exploration and mining, in oil and gas development, and for  
23 wind energy generation since historic times. SEIS Section 3.6.1 describes wildlife and  
24 vegetation in the project area. A small portion of the project area currently covered by stands of  
25 ponderosa pine has been logged selectively for pulpwood; however, timber is not currently and  
26 historically has not been a significant industry in the region surrounding the proposed project  
27 area (Powertech, 2010d).

### 28 29 **3.2.1 Rangeland**

30  
31 Land use within the proposed Dewey-Burdock ISR Project area and adjacent lands is primarily  
32 agricultural (Powertech, 2009a), mainly for grazing cattle and a small number of horses. The  
33 National Agriculture Statistics Service reports 75,250 head of cattle in Fall River and Custer  
34

**Table 3.2-1. Dwellings Within the Proposed Dewey-Burdock ISR Project Area  
and a 1.6-km [1.0-mi] Radius of the Proposed Permit Boundary**

Dwelling Name	Status	Number of Permanent Occupants	Location*
Peterson	Occupied	9	T7S, R1E, Section 16
Kennobie	Occupied	2	T7S, R1E, Section 23
Spencer	Vacant		T7S, R1E, Section 4
Daniels	Seasonal		T7S, R1E, Section 1
Anderson	Occupied	3	T7S, R1E, Section 9
Putnum	Occupied	2	T7S, R1E, Section 5
Stodart	Vacant		T41S, R60E, Section 22
Cook	Vacant		T6S, R1E, Section 17
Beaver Creek Ranch Headquarters	Occupied	1	T6S, R1E, Section 30

Source: Powertech (2010a).  
\*T = Township; R = Range; S = South; E = East

1 Counties in 2007 (USDA, 2009). No commercial crop production takes place within the permit  
2 area; however, approximately 157 ha [389 ac] of land along Beaver Creek in Section 32,  
3 Township 6 South, Range 1 East is irrigated for hay production for use by the grower  
4 (Powertech, 2009a).

5  
6 The approximately 97 ha [240 ac] of BLM-managed lands within the project area are located in  
7 Fall River County entirely within the Burdock area (Figure 3.2-1); these lands are surrounded by  
8 private land and have limited public access. Additional small parcels of BLM-managed land are  
9 located outside the proposed project area in Fall River County. The majority of land under BLM  
10 management in South Dakota is grassland (BLM, 1985). The forage produced on these lands is  
11 a public resource and historically has been used for livestock grazing. Area ranchers lease  
12 grazing privileges and derive economic benefits from the public lands proportional to the amount  
13 of grassland under lease. In its current resource management plan for South Dakota, BLM has  
14 categorized most grazing allotments of BLM lands in Fall River County, including those within  
15 the proposed project area, as “custodial” (BLM, 1985). The objective of this category is to  
16 manage and protect the existing resource value of the land (BLM, 1985).

### 17 18 **3.2.2 Hunting and Recreation**

19  
20 Within the proposed project area, recreational use is limited primarily to big game hunting.  
21 Pronghorn antelope, mule deer, white-tailed deer, and elk are the predominant big game  
22 species hunted (Powertech, 2009a). Hunting is currently open to the public within the project  
23 area on approximately 2,307 ha [5,700 ac] including the 97 ha [240 ac] of BLM-managed land  
24 (Powertech, 2011). In addition, South Dakota Game, Fish, and Parks (SDGFP) leases around  
25 1,214 ha [3,000 ac] of privately owned land within the project area and designates this acreage  
26 as walk-in hunting areas (WIA) (Powertech, 2011). The amount of land designated as WIAs  
27 changes from year to year because landowners lease their lands annually to SDGFP.


28  
29 Recreational lands are present in Custer, Fall River, and Pennington Counties within an  
30 80-km [50-mi] radius of the proposed project. Major attractions include Mount Rushmore  
31 National Memorial, Wind Cave National Park, and Jewel Cave National Monument, all managed  
32 by the U.S. Department of the Interior. These attractions are within the Black Hills National  
33 Forest (BHNF) and are located approximately 71 km [44 mi] northeast, 47 km [29 mi] east, and  
34 37 km [23 mi] north of the project area, respectively (Figure 3.2-2). BHNF borders the proposed  
35 project to the north, northeast, and east, and the Buffalo Gap National Grassland is located  
36 approximately 4.8 km [3 mi] south of the proposed project (Figure 3.2-2). The U.S. Forest  
37 Service (USFS) manages these lands, which provide a variety of recreational activities, such as  
38 sightseeing, hiking, camping, fishing, and hunting (USFS, 2009, 1997).

### 39 40 **3.2.3 Minerals and Energy**

41  
42 Historically, industrial activity within and in the region surrounding the proposed Dewey-Burdock  
43 ISR Project has consisted primarily of uranium exploration and mining and oil and gas  
44 development. There are no coal mines or coal bed methane operations in Fall River and Custer  
45 Counties (NRC, 2009a). However, information gathered during a site visit meeting with the  
46 U.S. Bureau of Land Management (BLM) staff indicated small bituminous coal deposits located  
47 east and south of the proposed project area were developed in the past (NRC, 2009b). This  
48 information is consistent with isolated coal fields located approximately 3 km [2 mi] southeast of  
49 the proposed project area and approximately 6 km [4 mi] southeast of the city of Edgemont  
50 (Figure 3.2-2).



1  
2  
3

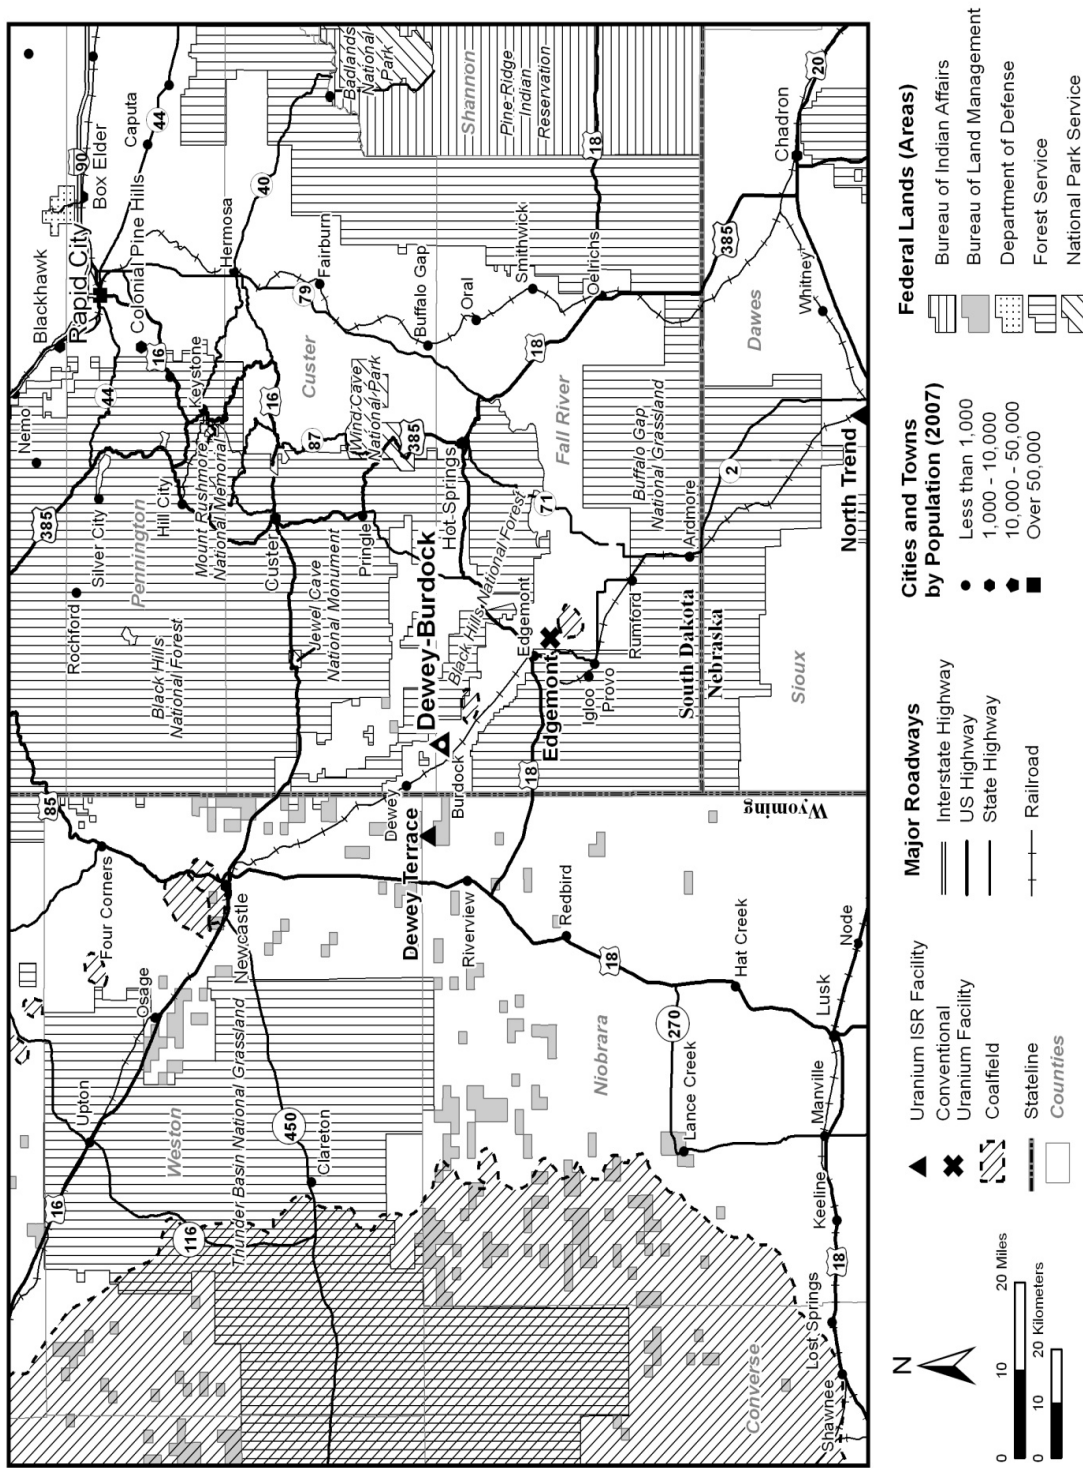

**Figure 3.2-2. Recreational Areas, Federal Lands, Coal Fields, and ISR Facilities Near the Proposed Dewey-Burdock ISR Project.**  
**Sources: ESRI (2008); National Atlas of the United States (2009).**


4

1 The proposed project site is located within the Edgemont Uranium District in Fall River and  
2 Custer Counties, South Dakota. Uranium was first discovered in the Edgemont District in 1951,  
3 and open pit mines produced uranium until 1972 (Powertech, 2009a). Surface and  
4 underground uranium mines were operated in the Burdock area along the eastern boundary of  
5 the proposed project area (Figure 3.2-3). Surface mines consist of seven open pits:  
6 Triangle Pit, Darrow Mine, Darrow Pit 1, Darrow Pit 2, Darrow Pit 3, Darrow Pit 4, and  
7 Darrow Pit 6 (Figure 3.2-3). The underground mine workings consist of four shallow mines  
8 (Triangle Underground, Darrow Underground, Freezeout 1, and Freezeout 2 mines) and two  
9 open pit adits (tunnels) driven into the highwalls of Darrow Pit 2 (Figure 3.2-3) (Powertech,  
10 2011). The underground mines were constructed as declines (downward sloping ramps)  
11 ranging in depth from 0 to 24.4 m [0 to 80 ft] below ground surface. Both the underground and  
12 open pit mines extracted uranium from shallow sandstone orebodies within the Fall River  
13 Formation (Powertech, 2011). Existing mine waste overburden from the underground and open  
14 pit mines remains in the eastern portions of the Burdock area (Figure 3.2-3). The Tennessee  
15 Valley Authority (TVA) acquired the land encompassing the proposed project area in 1978 and  
16 conducted uranium exploration activities until 1986. In total, TVA drilled more than  
17 4,000 exploration drill holes within and in the vicinity of the proposed project.

18  
19 Operating uranium recovery facilities are located within the broader regional area. The nearest  
20 operational ISR facility is the Crow Butte ISR facility, which is located approximately 105 km  
21 [65 mi] to the south-southeast in Dawes County, near Crawford, Nebraska (NRC, 2009a). The  
22 applicant identified uranium reserves at two potential ISR projects at Dewey Terrace and  
23 Aladdin in Wyoming (Powertech, 2009b). The potential Dewey Terrace project is located 13 km  
24 [8 mi] west of the proposed Dewey-Burdock ISR Project in Weston and Niobrara Counties,  
25 Wyoming (Figure 3.2-2). The mineralized trends in the Dewey Terrace project area are a  
26 continuation of the mapped trends from the Dewey-Burdock ISR Project. The potential Aladdin  
27 project is located approximately 129 km [80 mi] to the north in Crook County, Wyoming, near  
28 the Wyoming/South Dakota border. Development of these potential ISR facilities is  
29 dependent upon further site investigations, as well as the viability of the uranium market  
30 (Powertech, 2009b). To this date, the applicant has not submitted a letter of intent for either  
31 Aladdin or Dewey Terrace.

32  
33 There are no former or actively producing oil and gas wells within the proposed Dewey-Burdock  
34 ISR Project permit area or within 2 km [1.2 mi] of the proposed project boundary (Powertech,  
35 2011). However, three known plugged and abandoned oil and gas test wells are located in the  
36 proposed Burdock area and another nine plugged and abandoned tests wells are within 2 km  
37 [1.2 mi] of the proposed project boundary (Figure 3.2-4) (Powertech, 2010a, 2011). In Fall River  
38 County, the producing oil well nearest to the proposed project is approximately 11 km [7 mi] to  
39 the southeast in the Cheyenne Bend oilfield (SDDENR, 2012a). Other producing oil wells are  
40 located southwest of the city of Edgemont. In Custer County, producing oil wells are in the  
41 Barker Dome oilfield, approximately 6 km [4 mi] east of the project area (SDDENR, 2012b). The  
42 Powder River Basin in Wyoming, to the west of the proposed project, contains some of the  
43 largest coal bed methane and natural gas deposits in the United States. Weston and Niobrara  
44 Counties in Wyoming to the west and northwest of the proposed project contain significantly  
45 more active oil and gas production wells than Fall River and Custer Counties (Wyoming Oil and  
46 Gas Conservation Commission, 2012). The majority of oil and gas production and exploration  
47 are concentrated in the southwestern part of Weston County and the northwestern part of  
48 Niobrara County, closer to the Powder River Basin. The producing wells nearest to the  
49 proposed project are in the Plum Canyon oilfield in Wyoming, approximately 5 km [3 mi] to the  
50 northwest in Weston County (see Figure 5.1-3 in this SEIS).


1  
2  
3

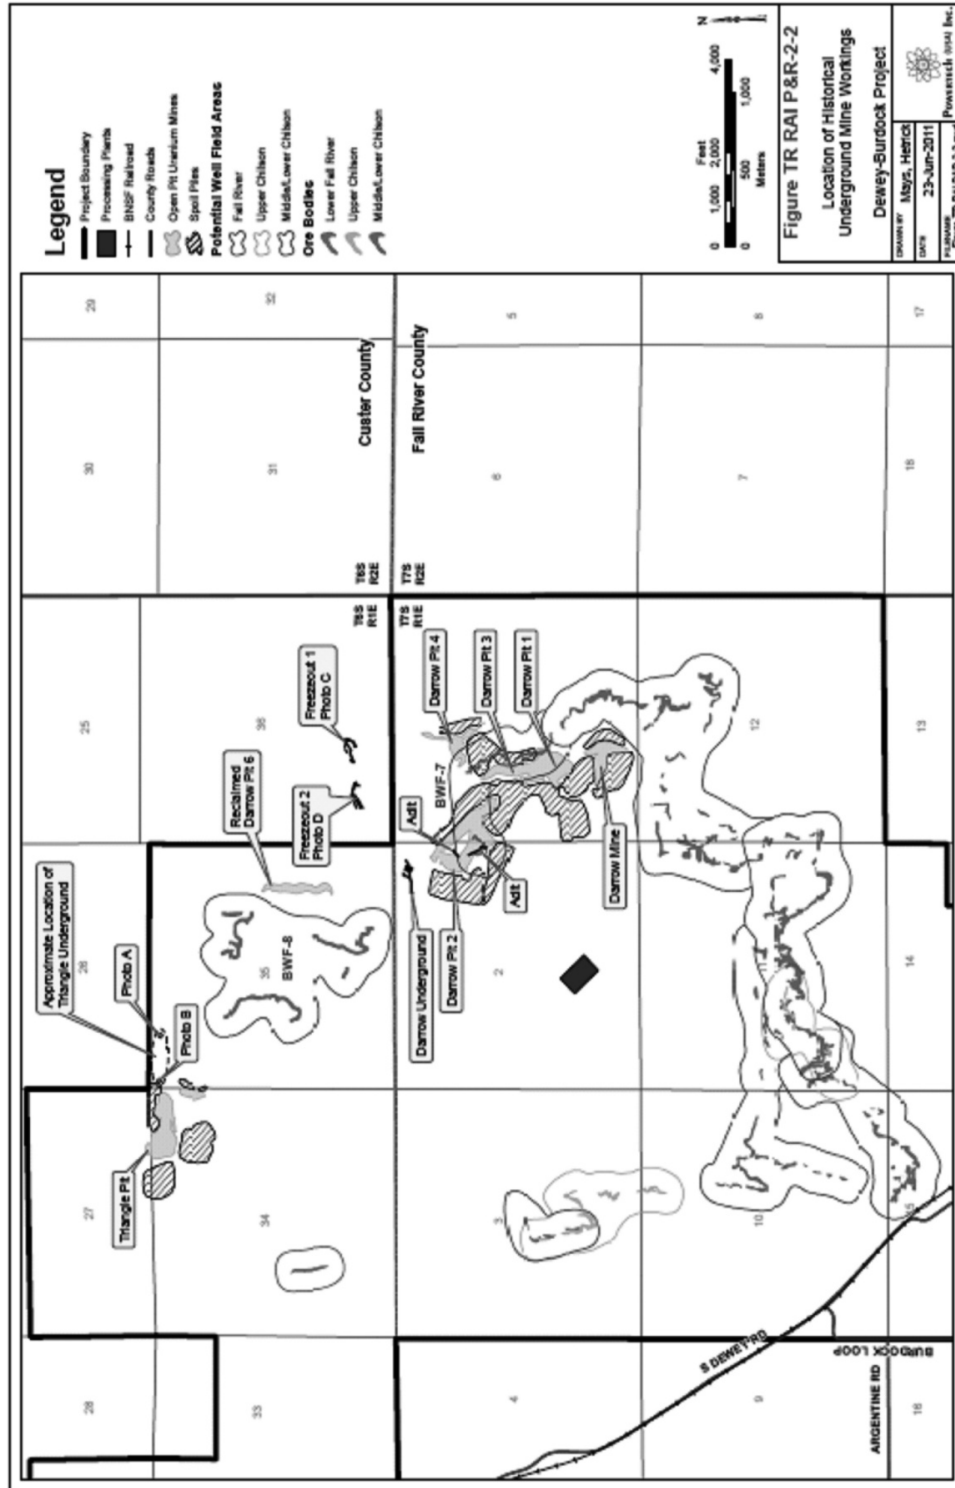

4

Figure 3.2-3. Map Showing Locations of Historical Underground and Open Pit Mine Workings in the Eastern Part of the Proposed Dewey-Burdock ISR Project Site. Source: Powertech (2011).

1  
2  
3

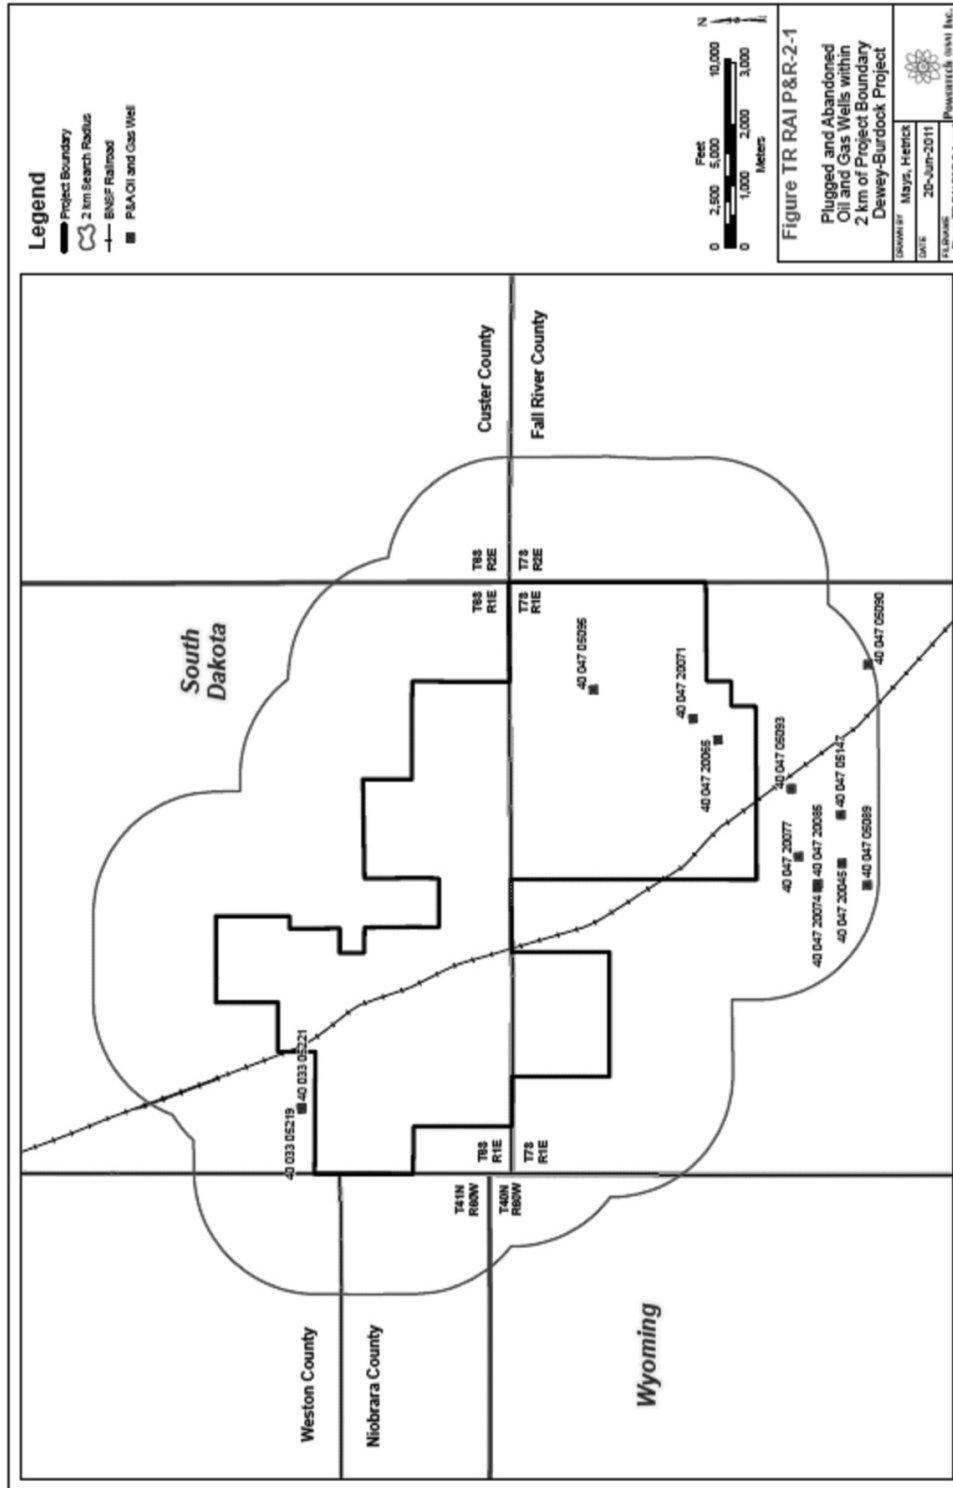

4

Figure 3.2-4. Map Showing Plugged and Abandoned Oil and Gas Test Wells Within 2 km [1.2 mi] of the Proposed Dewey-Burdock ISR Project Boundary. Source: Powertech (2011).

1 At this time no pending or potential oil and gas land leases are within the proposed project area.  
2 Furthermore, demand for oil and gas leasing on available land in the vicinity of the proposed  
3 project is low. Most active oil and gas development in the region is located on USFS-managed  
4 land, primarily in the Buffalo Gap National Grassland, located west and south of Edgemont.  
5 Sixteen oil and gas drilling permits were issued in Fall River County since 2005 (SDDENR,  
6 2012c). In Custer County, no oil and gas drilling permits have been issued since 2005  
7 (SDDENR, 2012c). Seven known oil and gas lease tracts are on USFS-managed land in the  
8 immediate vicinity of the proposed project area; however, these tracts are currently not  
9 available for bid (BLM, 2009a). These tracts are located in Custer County within Township 6  
10 South, Range 1 East; two of the tracts (SDM79010BO and SDM79010BN) border the permit  
11 boundary of the proposed project (Figure 3.2-5).


12  
13 At present, no wind farms are located in the vicinity of the proposed project; however, a  
14 landowner group, the Dewey-Burdock Wind Association, LLC is exploring the viability of wind  
15 power (Powertech, 2010a). The land designated as a potential wind farm includes privately  
16 owned land inside and surrounding the proposed project area. Most of the landowners involved  
17 in the potential wind farm are also involved in the proposed Dewey-Burdock ISR Project  
18 (Powertech, 2010a). The wind farm is currently in the conceptual phase.

### 20 **3.3 Transportation**

21  
22 This section describes the transportation infrastructure and conditions in the region  
23 surrounding the proposed Dewey-Burdock ISR Project. As described in Section 2.1.1.1.7 of this  
24 SEIS, the applicant has proposed to use trucks to ship equipment, supplies, and produced  
25 materials, including wastes, during the lifecycle of the proposed action. The applicant does not  
26 anticipate using the Burlington Northern Santa Fe (BNSF) railroad as a transportation option for  
27 any of the proposed project operations. There are no navigable waterways within close  
28 proximity that provide transportation access to the proposed project.


29  
30 The proposed Dewey-Burdock ISR Project site is located in Fall River and Custer Counties in a  
31 remote area of southwestern South Dakota near the eastern border of Wyoming, approximately  
32 21 km [13 mi] northwest of Edgemont, South Dakota. Figure 3.3-1 shows the transportation  
33 corridor of the region surrounding the proposed site, and Figure 3.2-1 provides a closer view  
34 of the immediate proposed site area and the existing transportation infrastructure. Access to the  
35 proposed site from Edgemont is from the southeast on Fall River County Road 6463 (locally  
36 known as Dewey Road). Within Custer County, Dewey road is also called Custer County  
37 Road 769. Figure 3.2-1 shows Dewey Road, an unpaved, gravel-covered road that is narrower  
38 than a standard two-lane road of 6 to 7 m [20 to 24 ft] and runs adjacent to the BNSF rail line  
39 (BLM, 2009a). County records indicate repairs to Dewey Road were needed due to flooding  
40 15 times since 1987 (BLM, 2009a). The main access road to the proposed central processing  
41 plant (CPP) facilities and well fields in the Burdock area of the proposed project would be  
42 constructed off Dewey Road in Township 7 South, Range 1 East, Section 10 (see  
43 Figure 2.1-10). The main access road to the proposed satellite facility (SF) in the Dewey area  
44 of the proposed project would be constructed off Dewey Road in Township 6 South, Range 1  
45 East, Section 20 (see Figure 2.1-10).

46  
47 U.S. Highway 18 travels northeast from Edgemont to Hot Springs, South Dakota, and to  
48 State Highway 79, which travels north to Rapid City and Interstate 90 (see Figure 3.3-1).  
49 U.S. Highway 18 also connects Edgemont to State Highway 89 that runs north to Custer,  
50 South Dakota. Table 3.3-1 presents traffic counts for regional roads based on available data.

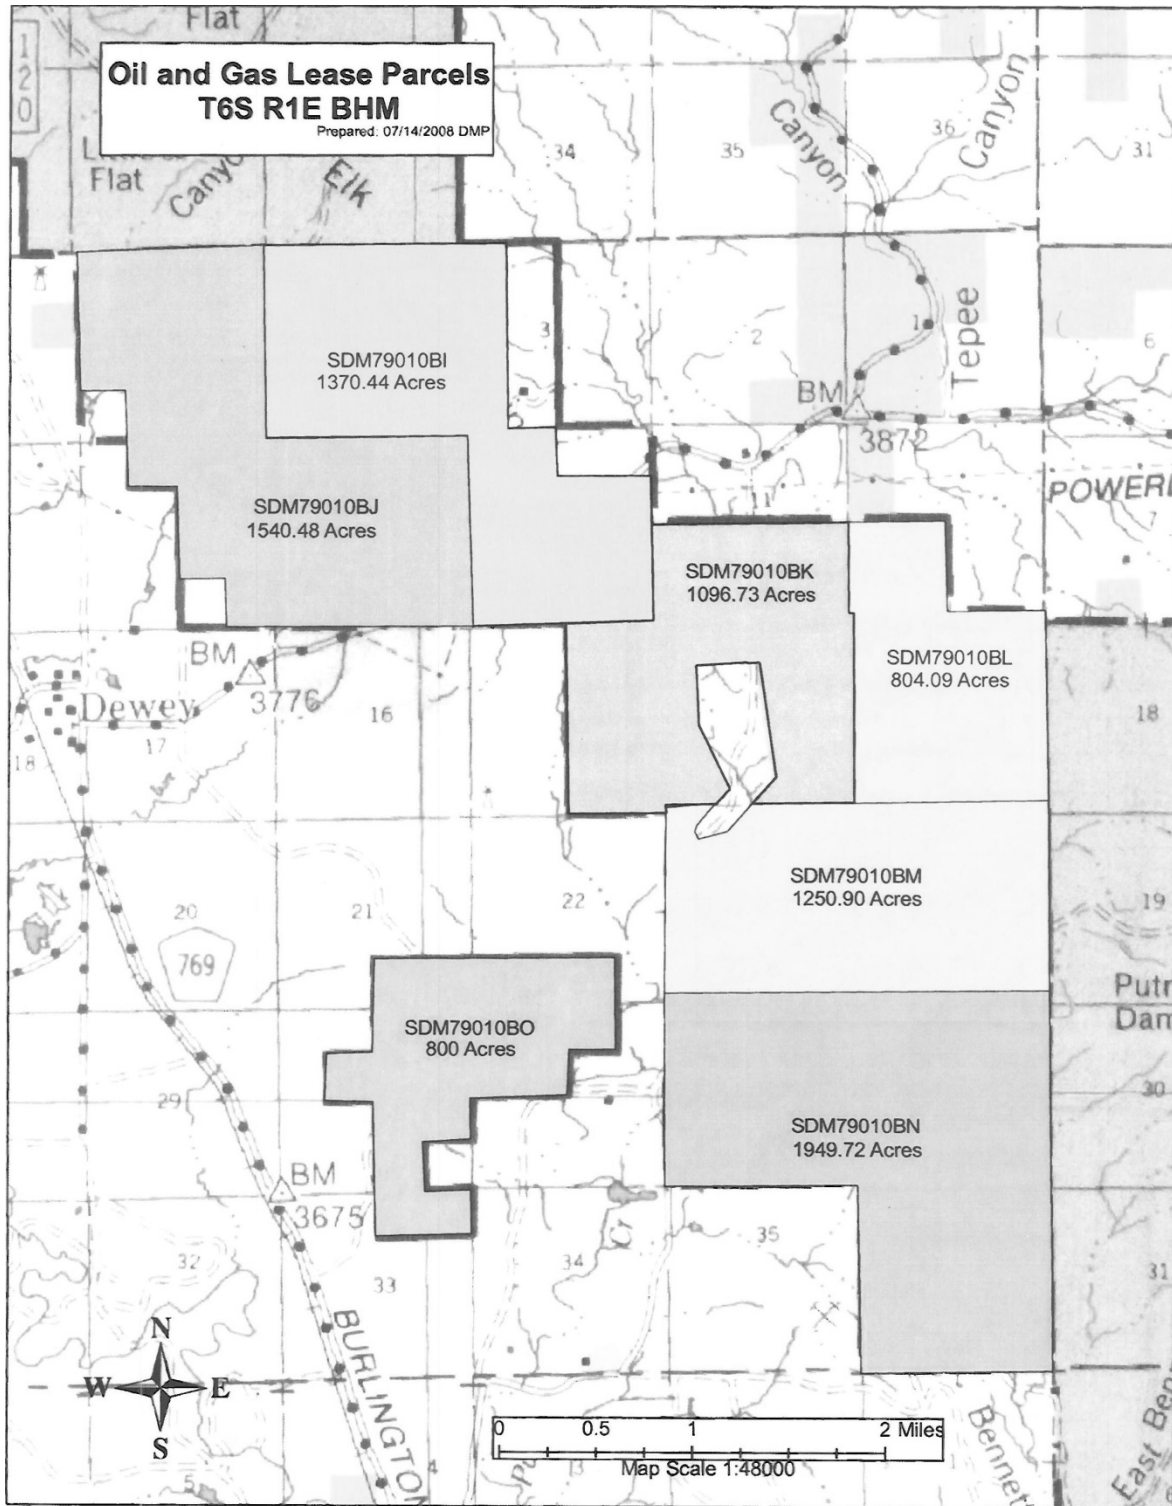


**Figure 3.2-5. Pending Oil and Gas Lease Tracts in Custer County, South Dakota.**  
Source: BLM (2009a).

1  
2

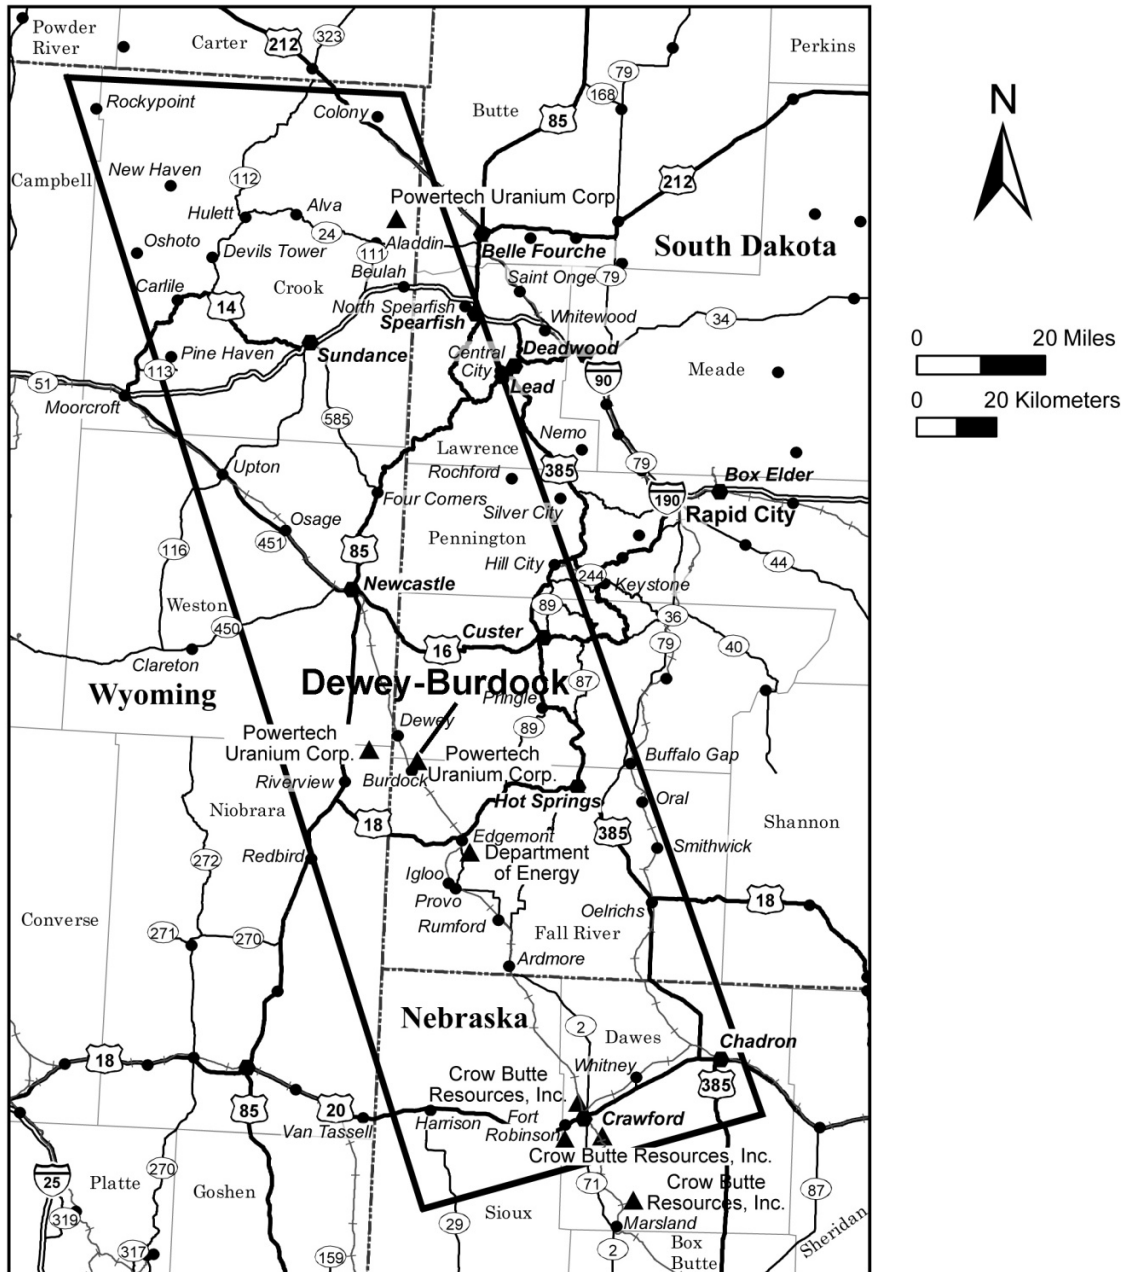

**SOUTH DAKOTA - NEBRASKA REGION**

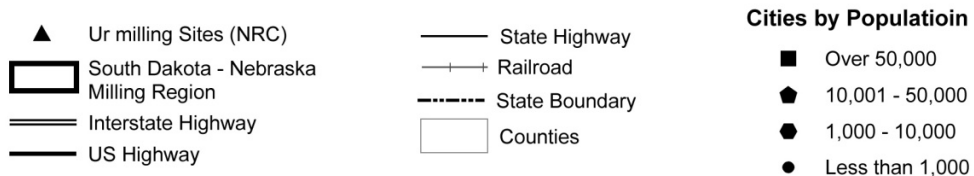

**Figure 3.3-1. Transportation Corridor of the South Dakota-Nebraska-Wyoming Uranium Milling Region Surrounding the Proposed Dewey-Burdock ISR Project. Source: NRC (2009a).**

**Table 3.3-1. Annual Average Daily Traffic in the Vicinity of the Proposed Dewey-Burdock ISR Project**

Road Segment	2011 Traffic Count*		
	All Vehicles	Auto	Truck
Dewey Road	25	25	—
US 18 (Edgemont to US 89)	1,782	1,361	421
US 18 (Hot Springs to SR 79)	5,075	4,725	350
SR 89 (US 385 to US 18)	659	604	55
SR 79 (at US 18)	3,172	2,569	603
Sources: BLM (2009a); SDDOT(2011) *Traffic counts are annual average daily traffic for both directions of travel. Data for all roads are for year 2011 and are from SDDOT (2011), except the Dewey count is from 2009 (BLM, 2009a). NRC staff calculated the auto counts as the difference between the reported all-vehicle and truck counts.			

1  
2 No road capacity studies of local transportation routes were identified. However, insights to  
3 rural road capacities were based on (i) published estimates for a single freeway lane capacity of  
4 13,900 vehicles per day derived by the South Dakota Department of Transportation (SDDOT,  
5 2000) and (ii) a rural 2-lane highway hourly capacity estimate (1,375 vehicles per hour) that  
6 accounts for nonideal travel conditions (Kadmas, et al., 2010) that the NRC staff converted to a  
7 daily value of 7,237 vehicles per day using the method and assumptions SDDOT (2000)  
8 reported and assuming equal traffic in each direction.  
9

### 10 **3.4 Geology and Soils**

11  
12 The proposed Dewey-Burdock Project is located in the Black Hills of southwestern South  
13 Dakota within the Nebraska-South Dakota-Wyoming Uranium Milling Region evaluated in GEIS  
14 Section 3.4.3.1 (NRC, 2009a). GEIS Section 3.4.3.1 provides a regional description of the  
15 geology and soils of the Black Hills. A summary of the geology of the Black Hills region and  
16 site-specific discussions of the geology and soils within and in the vicinity of the proposed  
17 Dewey-Burdock ISR Project are provided in the following sections.  
18

#### 19 **3.4.1 Geology**

##### 20 **3.4.1.1 The Black Hills (Western South Dakota–Northeastern Wyoming)**

21  
22  
23 The Black Hills are an asymmetrical domal uplift elongated in the northwest direction  
24 (Figure 3.4-1). Economically significant uranium discoveries in the Black Hills are  
25 contained within strata of the Inyan Kara Group (Chenoweth, 1988). Prior to 1968, three  
26 uranium districts (Hulett Creek, Carlile, and Edgemont) produced the bulk of the uranium  
27 production tonnage mined from the Black Hills area in Wyoming and South Dakota (Hart, 1968).  
28 The proposed Dewey-Burdock ISR Project is located within the Edgemont uranium district in  
29 Custer and Fall River Counties, South Dakota (Figure 3.4-1).  
30

31 Ore-bearing stratigraphic units present in the Black Hills represent the Cretaceous, Jurassic,  
32 and Triassic Periods [65–145 million years ago (mya), 149-199 mya, and 200-251 mya,  
33 respectively] (Figure 3.4-2). In the Dewey-Burdock ISR Project area, the Inyan Kara Group is  
34 Lower Cretaceous (99-145 mya) in age and consists of subequal amounts of complexly  
35 interbedded sandstone and claystone (Renfro, 1969). The Inyan Kara Group is bounded below



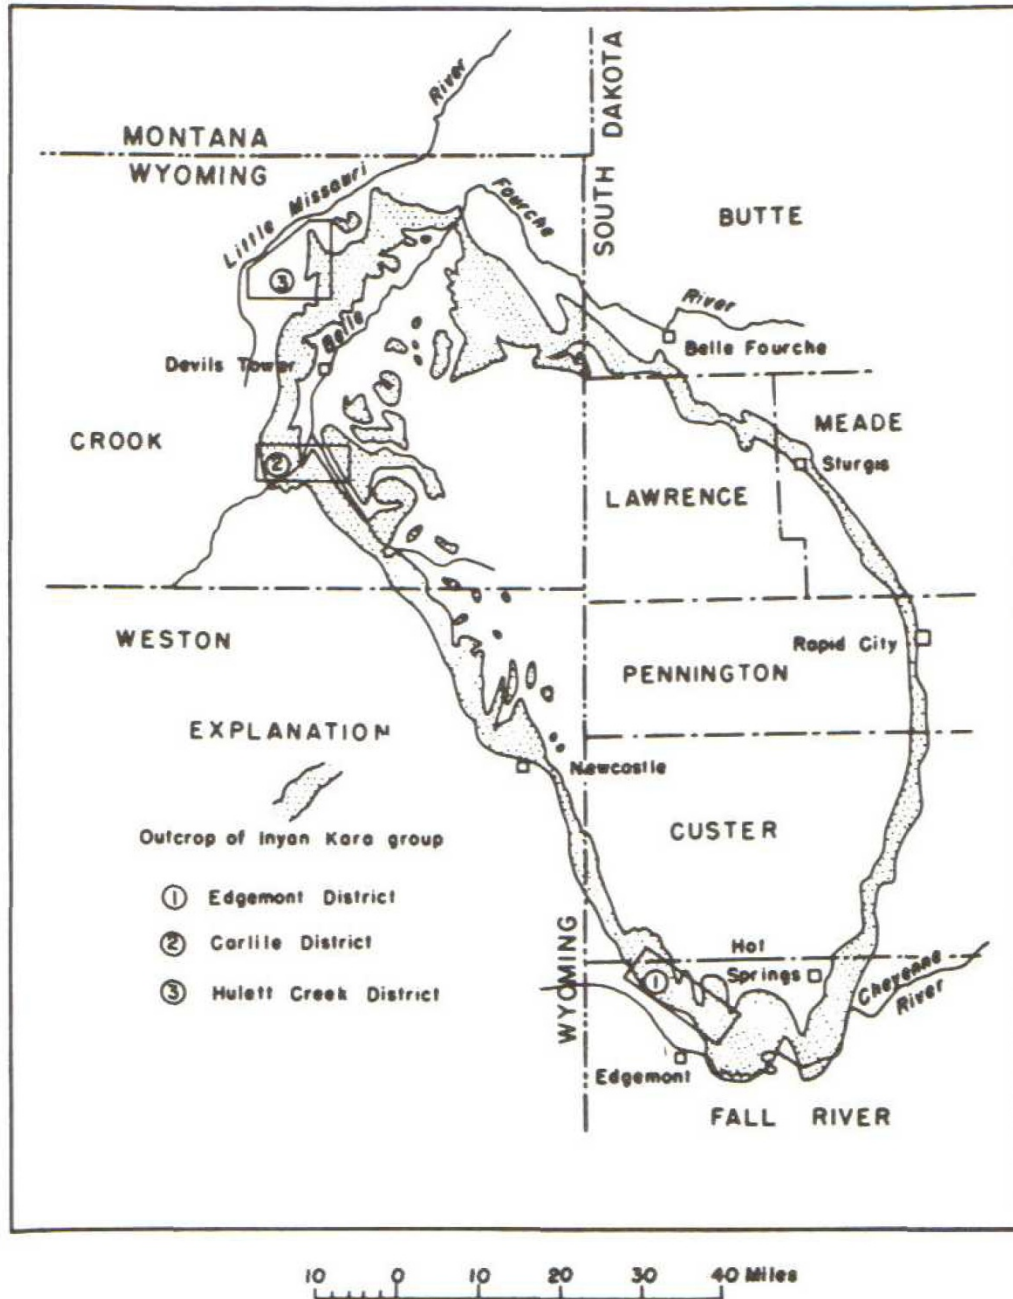


Figure 3.4-1. Outcrop Map of the Inyan Kara Group in the Black Hills of Western South Dakota and Northeastern Wyoming Showing the Locations of Principal Uranium Mining Districts. Source: Modified From NRC (2009a).

1  
2

Black Hills Area			
System	Series	Formation	
Tertiary	Pliocene	Ogallala Formation	
	Miocene	Arikaree Formation	
	Oligocene	White River Formation	
	Eocene	(Absent)	
	Paleocene	Fort Union Formation	
Cretaceous	Upper	Hell Creek Formation	
		Fox Hills Sandstone	
		Pierre Shale	
		Niobrara Formation	
		Carlile Shale	
		Greenhorn Formation	
	Lower	Graneros Group	Belle Fourche Shale
			Mowry Shale
			Newcastle Sandstone
			Skull Creek Shale
		Inyan Kara Group	Fall River Formation
			Lakota Formation
Jurassic		Morrison Formation	
		Unkpapa Sandstone	
		Sundance Formation	
		Gypsum Spring Formation	
Triassic		Spearfish Formation	
Permian		Minnekahta Limestone	
		Opeche Shale	
		Minnelusa Formation	
Pennsylvanian			
Mississippian		Madison Formation	
Devonian		Englewood Formation	
Ordovician		Whitewood Formation	
		Winnipeg Formation	
Cambrian		Deadwood Formation	

**Figure 3.4-2. Principal Stratigraphic Units in the Black Hills Area of Western South Dakota and Northeastern Wyoming.**  
**Sources: Modified From Driscoll, et al. (2002) and NRC (2009a).**

1 by continental Jurassic sediments of the Morrison Formation and is overlain by the marine  
2 sediments of the Graneros Group, which includes the Skull Creek Shale, the Newcastle  
3 Sandstone, the Mowry Shale, and the Belle Fourche Shale. Resistant sediments of the Inyan  
4 Kara Group form the outermost ring of hogback ridges that crop out in a roughly oval pattern  
5 around the flanks of the Black Hills (Figure 3.4-1). Major sandstone-hosted uranium deposits  
6 occur from 2 to 8 km [1 to 5 mi] downdip from the main Inyan Kara escarpment at depths  
7 ranging from 30 to 183 m [100 to 600 ft].

8  
9 The Inyan Kara Group is formally subdivided into the Lakota Formation and the Fall River  
10 Formation. Source sediment for both formations is considered to include all pre-Cretaceous  
11 sediments to the south and east of the Black Hills (Renfro, 1969).

12  
13 The Lakota Formation is generally accepted to be continental in origin. The Lakota Formation  
14 represents a sequence of coastal-plain deposits of fine-grained, poorly sorted sandstone and  
15 mudstone; channel-fill deposits of cross-bedded sandstone; natural levee and overbank  
16 deposits of lenticular fine-grained, carbonaceous sandstone and siltstone; and floodplain  
17 deposits of bedded siltstone, mudstone, and claystone (Maxwell, 1974). The Lakota Formation  
18 ranges in thickness from 15 to 91 m [50 to 300 ft] and thickens regionally from northwest to  
19 southeast (Chenoweth, 1988).

20  
21 The Fall River Formation overlies the Lakota Formation, ranges in thickness from 30 to 46 m  
22 [100 to 150 ft], and thickens regionally from southeast to northwest (Dondanville, 1963). The  
23 Fall River Formation is divided into deltaic and marine facies. The deltaic facies consist of  
24 channel sandstone, interchannel sandstone and mudstone, and blanket sandstone. The marine  
25 and marginal marine facies consist of offshore and lagoonal mudstone and shale, and bar and  
26 spit sandstone.

27  
28 Uranium deposits in the Inyan Kara Group are present as roll-front deposits. The formation  
29 and characteristics of roll-front uranium deposits in the western United States, which  
30 includes the Nebraska-South Dakota-Wyoming Uranium Milling Region, are described in  
31 GEIS Section 3.1.2.1 (NRC, 2009a). In the uranium deposits within the Inyan Kara Group,  
32 uranium minerals coat sand grains, fill interstices between grains, and are disseminated in  
33 organic matter (Renfro, 1969). The specific source of uranium is unknown. Two proposed  
34 uranium sources include uranium indigenous (i.e., native) to the Lakota and Fall River  
35 sediments (Renfro, 1969) and uranium leached by groundwater from tuffaceous beds of the  
36 Tertiary White River Group that were unconformably deposited across the eroded Black Hills  
37 uplift (Hart, 1968).

### 38 39 **3.4.1.2 Dewey-Burdock Geology**

40  
41 Surface geology across the proposed Dewey-Burdock ISR Project area is shown in  
42 Figure 3.4-3. The Fall River Formation outcrops across the eastern part of the proposed project  
43 area, the Skull Creek Shale and Mowry Shale outcrop across the central part of the proposed  
44 project area, and the Belle Fourche Shale outcrops across the western part of the proposed  
45 project area. At the site the shales present are all part of the Graneros Group. Formations  
46 within the project area dip gently 2 to 6 degrees to the southwest. The most recent sedimentary  
47 units deposited within the project area are Quaternary age alluvium deposits. Alluvium  
48 consisting of silt, clay, and gravel is present in the major stream drainages and their tributaries.  
49 There is faulting and folding in areas surrounding the proposed project. The Dewey Fault, a  
50 northeast-to-southwest-trending fault zone, is present approximately 1.6 km [1 mi] north and

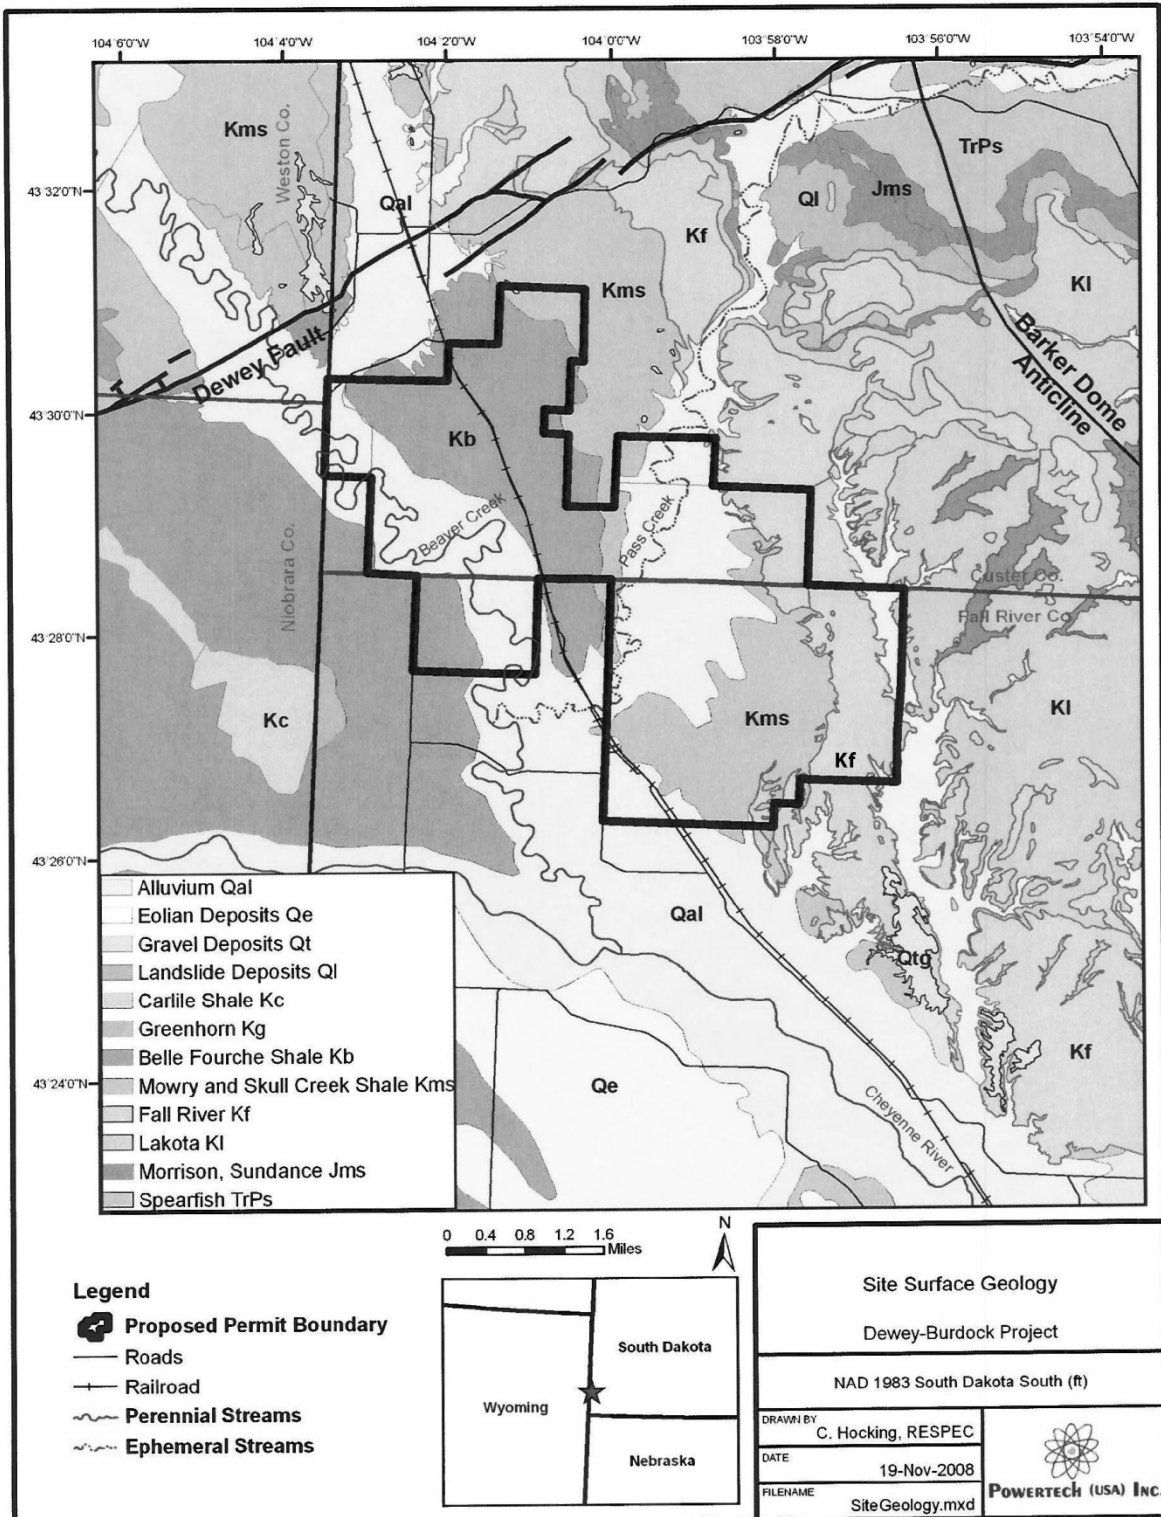


Figure 3.4-3. Map Showing Site Surface Geology Within and Surrounding the Proposed Dewey-Burdock ISR Project Area.  
 Source: Powertech (2009a).

1 northwest of the project area. The Barker Dome, a northwest-to-southeast-trending anticline, is  
 2 present east of the project area (Figure 3.4-3).  
 3

4 Stratigraphic units of interest for the proposed Dewey-Burdock ISR Project include the  
 5 Morrison Formation, the Inyan Kara Group (Lakota and Fall River Formations), the Skull Creek  
 6 Shale, and the Mowry Shale (Figure 3.4-4). The Inyan Kara Group is host to all the uranium  
 7 mineralization for the proposed project (Powertech, 2009a). The Morrison Formation and  
 8 the Skull Creek Shale coupled with the Mowry Shale form the lower and upper confining  
 9 units for uranium mineralization at the Dewey-Burdock site, respectively. The combined Skull  
 10 Creek–Mowry Shale is often referred to as the Graneros Group. Structure contour maps and  
 11 cross sections delineating the extent and character of the stratigraphic units at the proposed  
 12 Dewey Burdock site were compiled with data obtained from TVA downhole electric logs of  
 13 thousands of exploration drill holes and from drill cuttings data (Powertech, 2009a,c). As  
 14 described in SEIS Section 3.5.3.2, aquifer pumping tests have provided data indicating a  
 15 hydraulic connection between the Lakota and Fall River Formations through the intervening  
 16 Fuson Shale in the Burdock area resulting from unidentified structural features or old unplugged  
 17 exploration holes.  
 18

### 19 Morrison Formation

20  
 21 The Upper Jurassic Morrison Formation consists of floodplain deposits having an average  
 22 thickness of approximately 30 m [100 ft]. This lower confining unit is composed of calcareous,  
 23 noncarbonaceous massive shale with limestone lenses and a few thin fine-grained sandstones.  
 24 Analyses of core samples indicate that Morrison clays have very low vertical permeabilities {on  
 25 average  $2.0 \times 10^{-8}$  cm/s [ $6.0 \times 10^{-5}$  ft/day]} (Powertech, 2009a).  
 26

Dewey-Burdock Site Stratigraphy			
System	Series	Formation	
Cretaceous	Upper	Graneros Group	Belle Fourche Shale
	Lower		Mowry Shale
			Skull Creek Shale
		Fall River Formation	
	Inyan Kara Group	Lakota Formation	Fuson Member
			Chilson Member
Jurassic		Morrison Formation	
		Unkpapa Sandstone	
		Sundance Formation	

27  
 28 **Figure 3.4-4. Stratigraphic Units Present at the Proposed Dewey-Burdock ISR**  
 29 **Project Site.**

30 **Sources: Modified From Driscoll, et al. (2002) and NRC (2009a).**

### Inyan Kara Group: Lakota Formation and Fall River Formation

The Lakota Formation consists of three members (from lower to upper): the Chilson Member, also known as the Lakota Sandstone; the Minnewasta Limestone Member; and the Fuson Member. Only the Chilson and Fuson Members are present at the proposed project site (see Figure 3.4-4).

The Chilson Member consists of two units: a basal carbonaceous mudstone and an overlying unit of channel sandstones interbedded with shale. Core sample analyses indicate the sandstones have horizontal permeabilities ranging from  $2.6 \times 10^{-3}$  to  $4.1 \times 10^{-3}$  cm/sec [7.4 to 11.6 ft/day] (Powertech, 2009a). The thickness of the Chilson Member sandstone within the proposed Dewey-Burdock ISR Project area varies from 27.4 to 73.2 m [90 to 240 ft] (Powertech, 2009a).

The Fuson Member is the uppermost member of the Lakota Formation and is used to divide the Lakota Formation and the Fall River Formation. The Fuson Member is composed of shale-siltstone with discontinuous sandstone units at the base and top of the member. The shale-siltstone portion of the Fuson Member has low vertical permeability ranging from  $7.9 \times 10^{-14}$  to  $2.3 \times 10^{-12}$  cm<sup>2</sup> [0.008 to 0.228 millidarcies] (Powertech, 2009a). The Fuson Member ranges in thickness from 6 to 24 m [20 to 80 ft] within the proposed project area (Powertech, 2010a).

The Fall River Formation is composed of carbonaceous interbedded siltstone and sandstone, channel sandstones, and a sequence of interbedded sandstone and shale. The Fall River Formation ranges in thickness from 37 to 49 m [120 to 160 ft] within the proposed project area (Powertech, 2009a). The Fall River Formation is exposed at the surface in the eastern half of the Burdock area at the proposed Dewey-Burdock site (Figure 3.4-3).

The sandstones of the Fall River and Lakota Formations contain the uranium deposits at the proposed project site. Mineralized sands occur at depths of less than 30 m [100 ft] in the outcrop area of the Fall River Formation in the eastern part of the Burdock area and at depths of up to 244 m [800 ft] in the Lakota Formation in the Dewey area (Powertech, 2009a). The depths of ore zones in the initial wellfields at the proposed project range from approximately 122 to 244 m [400 to 800 ft] bgs in the Dewey area and approximately 61 to 122 m [200 to 400 ft] in the Burdock area (Powertech, 2009c). The calculated average thickness of individual ore zones is 1.86 m [6.1 ft] with an average ore grade of 0.21 percent U<sub>3</sub>O<sub>8</sub> (Powertech, 2009a). The primary uranium minerals in the deposits are very fine-grained pitchblende and coffinite, which coat sand grains and fill interstices between grains.

### Skull Creek Shale

The Skull Creek Shale directly overlies the Fall River Formation and consists predominantly of dark-gray to black shale and organic material. The Skull Creek Shale forms the upper confinement for the uranium mineralization and has a thickness of approximately 61 m [200 ft]. The Skull Creek Shale has a vertical permeability of approximately  $6.9 \times 10^{-14}$  cm<sup>2</sup> [0.007 millidarcies] (Powertech, 2009a). The Skull Creek Shale has been eroded and is absent in the eastern part of the Burdock area (Figure 3.4-3).

## Mowry Shale

The Mowry Shale, together with the Skull Creek Shale, is also considered to be part of the upper confining unit for the target mineralization zone at the proposed Dewey-Burdock ISR Project. The Newcastle Sandstone, usually present between the Skull Creek and the Mowry Shale, is absent within the proposed project area as shown in Figure 3.4-4. The combined thickness of the Skull Creek Shale–Mowry Shale is approximately 122 m [400 ft] in the western part of the proposed project site (i.e., the Dewey area) (Powertech, 2009a). In the eastern part of the Burdock area, these shale units have been eroded and are absent (Figure 3.4-3).

### **3.4.2 Soils**

GEIS Section 3.4.3.1 describes the soils of the Black Hills as a product of weathering of surficial sedimentary rocks of the Black Hills range (NRC, 2009a). To provide site-specific soil characteristics, the applicant had a soil survey conducted within the Dewey-Burdock permit area in accordance with procedures of the National Cooperative Soil Survey (Powertech, 2009a). The survey included a total of 3,222 ha [7,960 ac] with 1,240 ha [3,065 ac] of that total to be disturbed soil areas. The soils in the proposed site are typical for semiarid grasslands and shrublands of the Western United States and are classified as Aridic Argiustolls, Aridic Ustorthents, and Aridic Haplusterts.

The soil survey results indicated that soils within the proposed permit area generally have a clayey or very fine texture with patches of sandy loam on upland areas and fine, clay-textured soils in or near drainages. Deep soils were found on level upland areas, and shallow and very shallow soils were found on hills, ridges, and breaks. Salvage depths ranged from 0 to 1.5 m [0 to 5 ft] (Powertech, 2009a). The clayey texture of the surface horizon found throughout most of the proposed project area results in soils more susceptible to erosion from water than wind (Powertech, 2009a).

### **3.4.3 Seismology**

The Dewey Fault is located approximately 1.6 km [1 mi] north of the proposed Dewey-Burdock permit area (Figure 3.4-3). The Dewey Fault is a nearly vertical northeast-to-southwest-trending normal fault with a combined displacement and drag of approximately 152 m [500 ft] on the north side. Given the location and displacement characteristics of this fault, there will be no effect on proposed site activities. The Long Mountain Structural Zone located 11 km [7 mi] southeast of the proposed project area contains several small, shallow faults in the Inyan Kara Group. No faults have been identified within the proposed permit area (Powertech, 2009a). Additionally, according to the U.S. Geological Surveys (USGS) Quaternary Fault and Fold Database, no capable faults (active faults) with surface expression occur within a 100-km [62-mi] radius from the center of the proposed site, demonstrating a historically low seismic potential (USGS, 2006a). The most significant seismic hazard within and in the vicinity of the proposed project area is a “floating” earthquake. In accordance with 10 CFR Part 40, Appendix A, a floating earthquake is one that is considered to occur randomly within a tectonic province. According to the applicant, the maximum magnitude of such an earthquake is 6.1. Within the period from 1872 to 2010, fourteen earthquakes of Richter Scale magnitudes ranging from 2.3 to 4.1 were recorded in Custer and Fall River Counties (SDGS, 2010). The Modified Mercalli scale intensities for these magnitudes are II (e.g., felt by few at best) to IV (e.g., felt indoors and outdoors), respectively. Eight earthquakes had epicenters located north of Hot Springs near Wind Cave National Park in Custer County, and two earthquakes had epicenters

1 near Hot Springs in Fall River County. The closest earthquake to the proposed Dewey-Burdock  
2 site occurred January 5, 2004, with a recorded magnitude 2.8 with an epicenter located  
3 approximately 8 km [5 mi] north of the hamlet of Dewey in Custer County. The remaining  
4 3 of the 14 earthquakes had epicenters located in southwestern, central, and eastern  
5 Fall River County.

### 6 Artificial Penetrations

7  
8  
9 According to the environmental report, there are 4,000 exploration drill holes representing  
10 historic exploration activities (Powertech, 2009a). The applicant has drilled approximately  
11 115 exploration holes, including 20 monitoring wells in the project area. While the applicant  
12 cannot confirm that all historic borings were properly plugged and abandoned, the applicant has  
13 made commitments to ensure that unplugged drill holes will not impact human health or the  
14 environment during operations (Powertech, 2009b, 2011). In the technical report (Powertech,  
15 2009b), the applicant stated that little evidence of unplugged boreholes has been observed  
16 given infrared photography data. However, an infrared map of a portion of the Burdock area  
17 shows an alkali pond area (Powertech, 2011). The applicant states unplugged borings appear  
18 to explain the presence of this pond area. No other pond areas or springs appear in infrared  
19 photography data of the Dewey-Burdock site. There is no other evidence indicating that  
20 previously unplugged borings are current groundwater flow pathways (Powertech, 2011).


## 21 **3.5 Water Resources**

### 22 **3.5.1 Surface Waters**

23  
24  
25 As described in GEIS Section 3.4.4.1, uranium deposits in Fall River and Custer Counties in  
26 southwestern South Dakota are present within the Beaver Creek and Angostura Reservoir  
27 watersheds (Figure 3.5-1). The proposed Dewey-Burdock ISR Project area lies within the  
28 Beaver Creek watershed and is drained by Beaver Creek, Pass Creek, and their tributaries  
29 (Powertech, 2009a). The Beaver Creek watershed covers an area of 3,522 km<sup>2</sup> [1,360 mi<sup>2</sup>],  
30 excluding the Pass Creek subwatershed and lies within Weston, Niobrara, and Crook Counties  
31 in Wyoming and within Pennington, Custer, and Fall River Counties in South Dakota. The  
32 Pass Creek subwatershed comprises most of the east-southeast portion of the Beaver Creek  
33 watershed and covers an area of 596 km<sup>2</sup> [230 mi<sup>2</sup>] within Custer, Fall River, and Pennington  
34 Counties in South Dakota and a very small portion of Weston County in Wyoming.

35  
36  
37 Beaver Creek, a perennial and shallow stream with ephemeral tributaries, flows northwest to  
38 southeast through the northwestern and western portions of the Dewey area (Figure 3.5-2).  
39 The average discharge rate for Beaver Creek, measured at Newcastle, Wyoming, is 0.34 m<sup>3</sup>/s  
40 [12 ft<sup>3</sup>/s] (stream gage 06392950; USGS, 2010). Pass Creek is dry for most of the year, except  
41 for short periods of high runoff following major storms (Powertech, 2009a). Pass Creek flows  
42 southerly through the central portion of the proposed project area and joins Beaver Creek  
43 southwest of the proposed project area. No permanent stream flow gages are stationed along  
44 Pass Creek. Beaver Creek and Pass Creek were not classified as domestic water supplies in  
45 beneficial uses of surface waters categorized by the State of South Dakota near the proposed  
46 area (SDDENR, 2008), although water from Beaver Creek is used for hay irrigation.  
47 Approximately 4 km [2.5 mi] south of the confluence of Beaver and Pass Creeks, Beaver Creek  
48 flows into the Cheyenne River (Figure 3.5-2). The average flow of the Cheyenne River at  
49 Edgemont, South Dakota, is 1.1 m<sup>3</sup>/s [39 ft<sup>3</sup>/s] (stream gage 06395000; USGS, 2010).




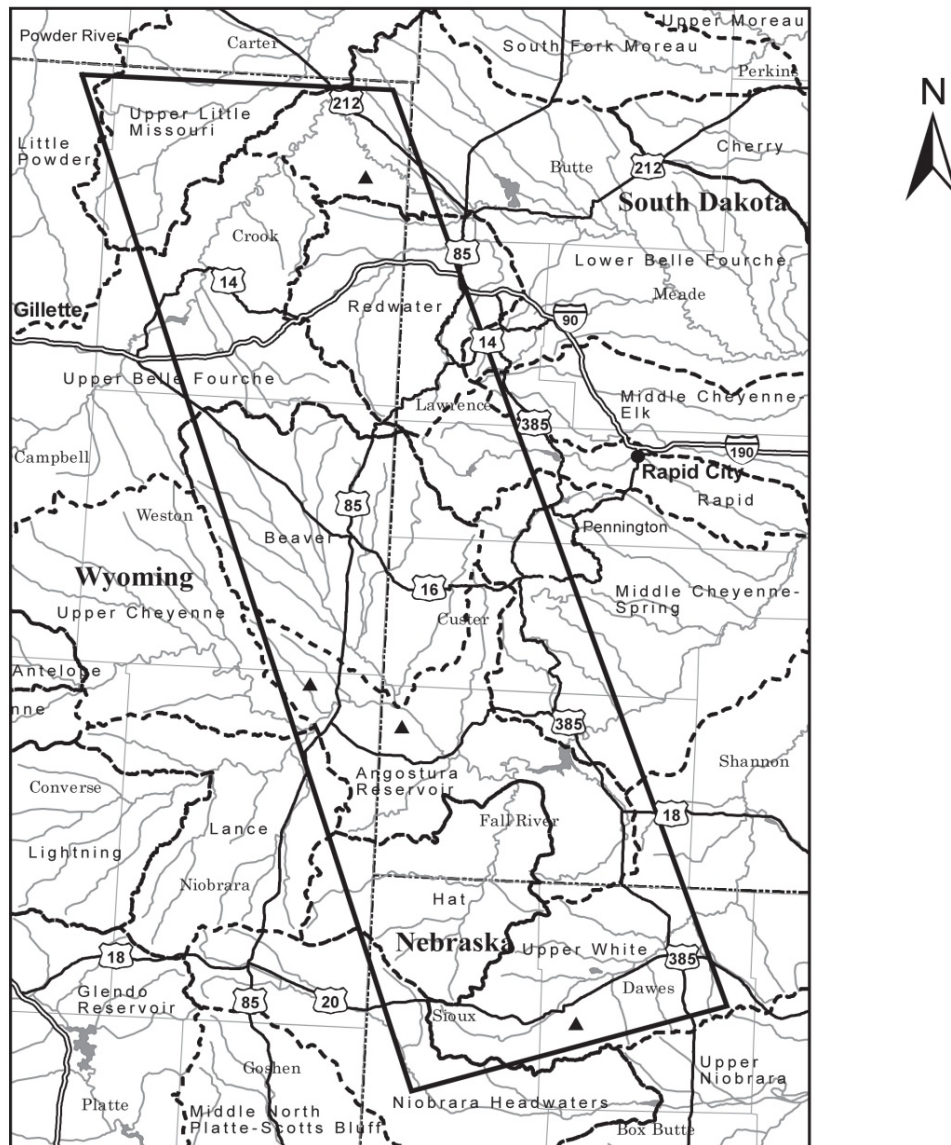

**SOUTH DAKOTA - NEBRASKA REGION**



**Figure 3.5-1. Watersheds Within the Nebraska-South Dakota-Wyoming Uranium Milling Region.**  
 Source: NRC (2009a).

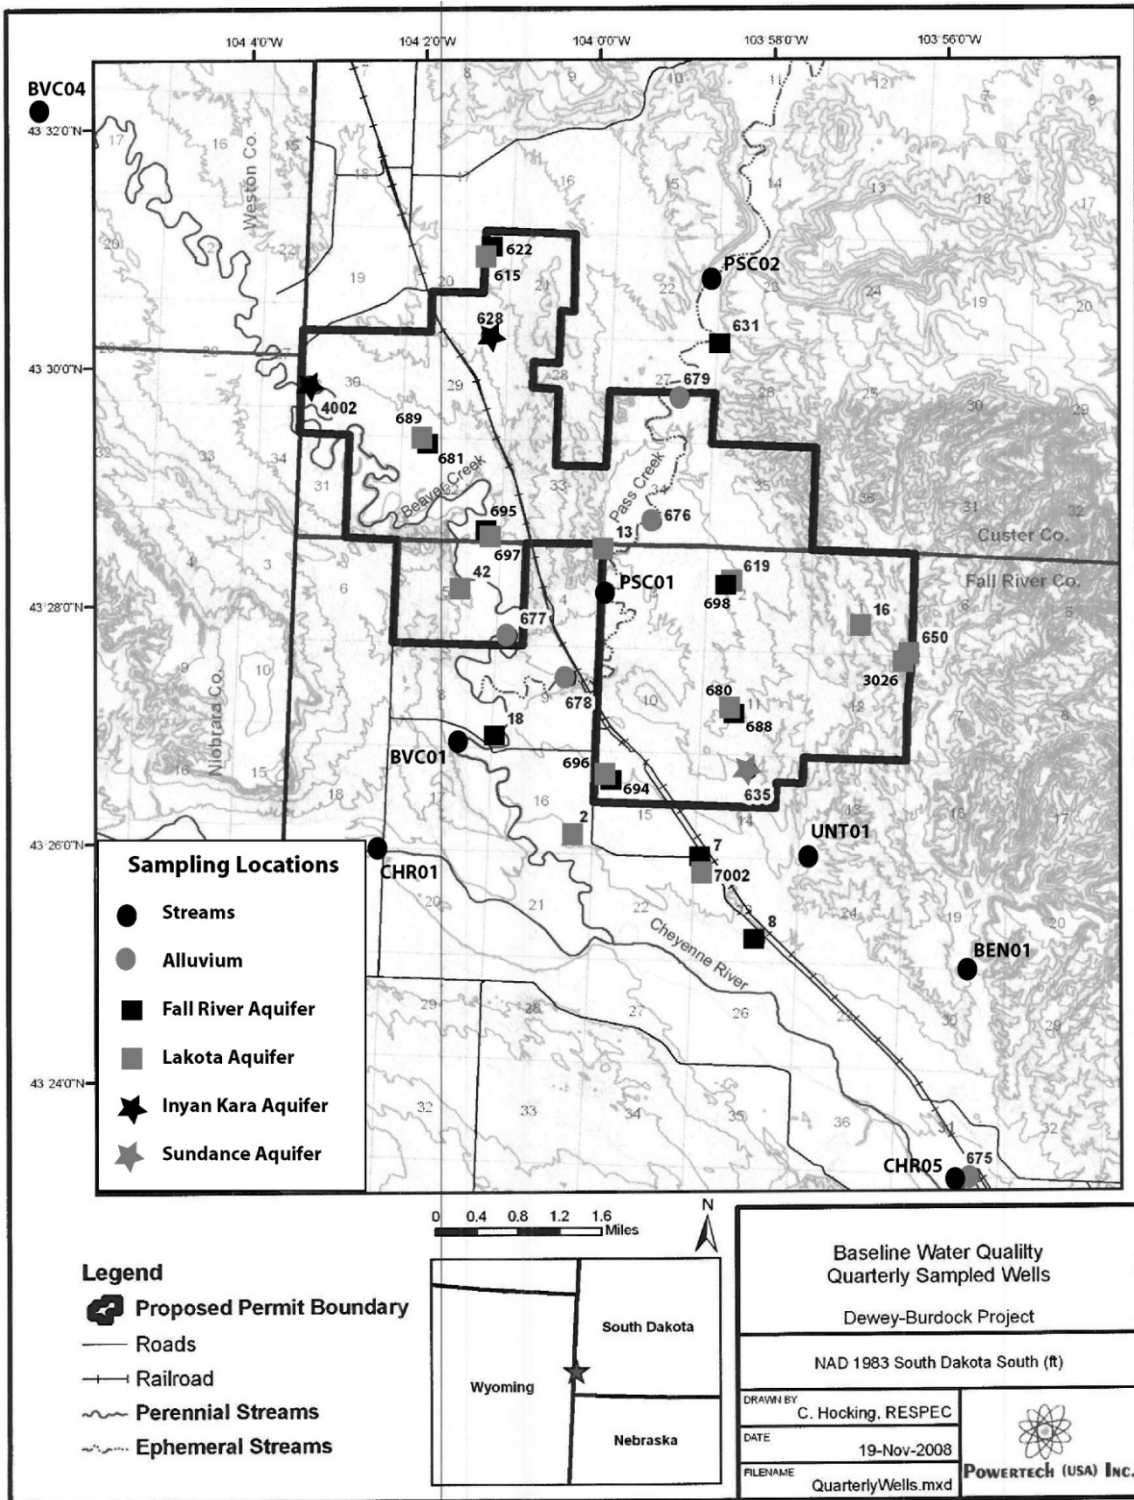

**Figure 3.5-2. Map Showing Locations of Beaver Creek, Pass Creek, and the Cheyenne River in Relation to the Proposed Dewey-Burdock ISR Project and Water Quality Sampling Locations for Surface Water and Groundwater. Source: Modified From Powertech (2009a).**

1 There are no known natural springs within the proposed Dewey-Burdock ISR Project area  
2 (Powertech, 2011). There is one area in the southwest corner of the Burdock area, known as  
3 the “alkali flats” or the “alkali area,” where groundwater is discharging to the ground surface  
4 from the Fall River aquifer and Chilson aquifer (Chilson Member of the Lakota Formation)  
5 through improperly plugged exploratory boreholes (Powertech, 2011). Two springs are present  
6 along the Dewey Fault near the town of Dewey approximately 2 km [1.2 mi] northwest of the  
7 proposed project boundary.  
8


9 The applicant performed floodplain modeling on the stream channels of Beaver Creek, Pass  
10 Creek, and smaller ephemeral drainages within the proposed project area to determine the  
11 extent of inundation from a simulated 100-year flood and evaluate potential adverse impacts to  
12 facilities from flooding (Powertech, 2009b, 2011). Results of the modeling showing the areal  
13 extent of a 100-year flood with respect to proposed facilities and wellfields are illustrated in  
14 Figure 3.5-3. The modeling indicates that, with the exception of the plant-to-plant pipeline and  
15 small parts of some proposed wellfields, most of the proposed facilities, infrastructure, potential  
16 land application areas, and wellfields would be located outside the 100-year flood inundation  
17 boundaries of Beaver Creek and Pass Creek. For example, the 100-year floodplain boundary of  
18 Beaver Creek would be 668 m [2,190 ft] from the proposed satellite facility in the Dewey area  
19 and 664 m [2,180 ft] from the proposed central processing plant in the Burdock area.  
20 Conversely, some wellfields and storage ponds in the Dewey area and some wellfields, the  
21 main access road, and the plant-to-plant pipeline in the Burdock area are located within the  
22 100-year floodplain boundary of ephemeral drainages (Figure 3.5-3).  
23

24 There are a number of abandoned open pit mines (depression zones) within the project  
25 area stretching from the eastern to the northern boundaries of the site in the Burdock area (see  
26 Figure 3.2-3). With the exception of Darrow Pit #2, the other Darrow pits are usually dry but  
27 occasionally contain water that collects from runoff events (Powertech, 2011). The usual  
28 presence of water in Darrow Pit #2 suggests that the base of the pit may be below the  
29 potentiometric surface of the Fall River Formation. The Triangle Pit, which lies up dip of the  
30 proposed Burdock area wellfields, has permanent water storage at a depth greater than 30 m  
31 [100 ft]. The bottom of the Triangle Pit is below the potentiometric surface of the Fall River and  
32 is, therefore, hydraulically connected to the Fall River Formation.  
33

#### 34 Surface Water Quality

35

36 Water quality in Beaver Creek, Pass Creek, and the Cheyenne River varies considerably and is  
37 dependent on flow regime. These streams often experience extended periods of low or no flow.  
38 During periods of high flow, relatively high amounts of sediment and low dissolved solids occur  
39 in the streams, while less turbid waters with higher dissolved solids occur during periods of low  
40 flow. Upstream and downstream of the proposed Dewey-Burdock ISR Project in South Dakota,  
41 the Cheyenne River is classified as having the following beneficial water uses: (i) warm water  
42 semipermanent fish life propagation; (ii) limited contact recreation; (iii) fish and wildlife  
43 propagation, recreation, and stock watering; and (iv) irrigation (SDDENR, 2008). According to  
44 the State of South Dakota 2006 303(d) list, from Beaver Creek to the Angostura Reservoir, the  
45 Cheyenne River is listed as supporting the beneficial use of limited contact recreation, but is  
46 listed as impaired for the other three beneficial water uses due to high total dissolved and  
47 suspended solids, high salinity, and high conductivity. Beaver Creek in South Dakota is  
48 classified as suitable for the same uses as the Cheyenne River, except it is classified as  
49

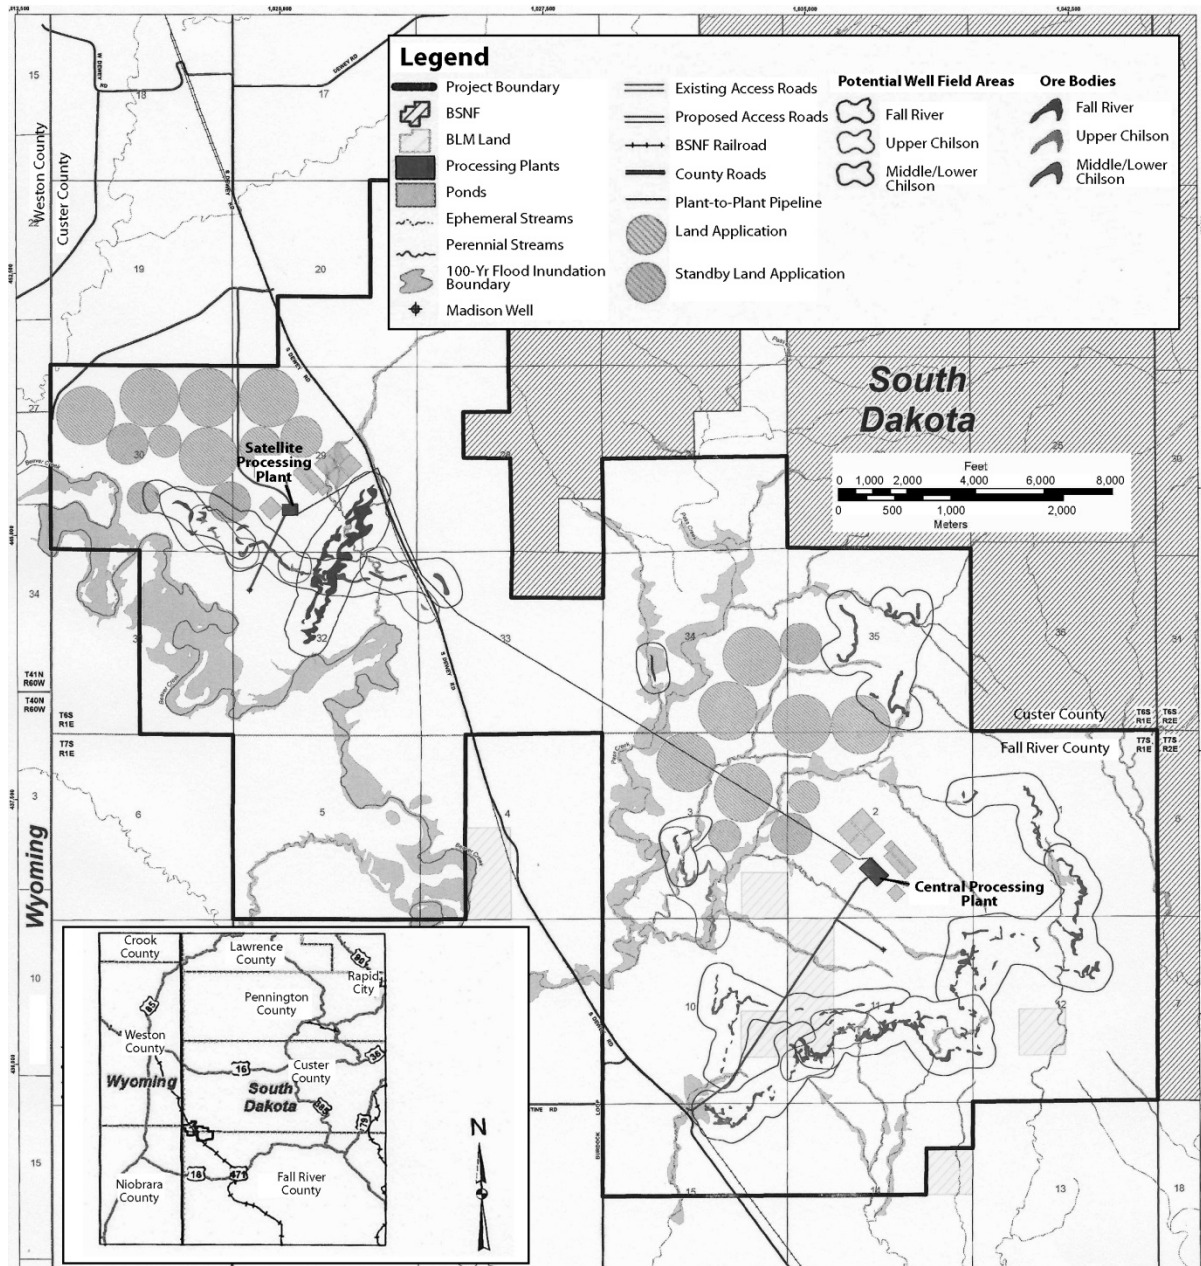

**Figure 3.5-3. Map Showing Modeled 100-Year Flood Inundation Boundary of Stream Channels Within the Proposed Dewey-Burdock ISR Project Area. Source: Modified From Powertech (2011).**

1  
 2 suitable for cold water marginal fish life propagation rather than warm water fish life propagation  
 3 (SDDENR, 2008). Both Beaver Creek and Pass Creek are classified as having the beneficial  
 4 uses of fish and wildlife propagation, recreation, stock watering, and irrigation near the project  
 5 site. Beaver Creek is also classified as having the beneficial uses of coldwater marginal fish life  
 6 propagation and limited contact recreation near the project site (SDDENR, 2008). These  
 7 creeks, however, are not classified as having the beneficial use of domestic waters.  
 8

1 The applicant collected surface water samples monthly between July 2007 and June 2008 from  
 2 perennial and ephemeral streams upstream and downstream of the proposed Dewey-Burdock  
 3 ISR Project (Powertech, 2009a). Figure 3.5-2 shows the locations of stream sampling locations.  
 4 Perennial stream sampling locations included two sites on Beaver Creek (BVC01 and BVC04)  
 5 and two sites on the Cheyenne River (CHR01 and CHR05). Ephemeral stream sampling  
 6 locations included two sites on Pass Creek (PSC01 and PSC02), a site in Bennett Canyon  
 7 (BEN01), and an unnamed downstream tributary (UNT01). Due to the sporadic nature of  
 8 rainfall at the proposed site, passive samplers were installed at the ephemeral stream sampling  
 9 sites to collect samples during flow events (Powertech, 2009a). Table 3.5-1 summarizes results  
 10 for key parameters and constituents of concern in surface water at the stream sampling sites,  
 11 and Table 3.5-2 summarizes results for radionuclides of concern.

12  
 13 Results of the stream sampling indicated exceedances of State of South Dakota surface water  
 14 standards {Administrative Rules of South Dakota (ARSD), Chapter 74:51:01} for field  
 15 parameters (pH, dissolved oxygen, and specific conductance) at Beaver Creek and the  
 16 Cheyenne River, while other field parameters

17

**Table 3.5-1. Summary of Key Parameters and Constituents of Concern in Surface Waters in Streams at the Proposed Dewey-Burdock ISR Project**

Stream ID	pH	Dissolved Oxygen mg/L	Specific conductance uS/cm	Total Dissolved Solids mg/L	Sulfate mg/L	Chloride mg/L	Arsenic mg/L	Selenium mg/L
BVC01								
N	9	10	10	11	11	11	11	11
Mean	8.33	10.79	3680	2875	1359	500	0.0058	0.0012
Min	7.94	6.86	860	609	317	38	<0.001	<0.001
Max	8.91	13.57	7678	5860	2540	1370	0.048	0.003
BVC04								
N	10	10	10	11	11	11	11	11
Mean	8.07	10.64	4066	3144	1384	721	0.0041	0.0016
Min	7.52	6.54	733	516	286	9	<0.001	<0.001
Max	8.82	13.74	7186	5700	2670	1730	0.023	0.004
CHR01								
N	8	8	8	9	9	9	9	9
Mean	8.10	8.63	4522	4157	2616	129	0.0044	0.0012
Min	7.47	3.74	350	219	86	2	<0.001	<0.001
Max	8.44	13.08	7847	7040	4520	249	0.024	0.003
CHR05								
N	11	9	11	12	12	12	12	12
Mean	8.03	10.20	3863	3425	1919	376	0.004	0.0015
Min	7.42	7.63	510	365	180	17	<0.001	<0.001
Max	8.24	12.92	6986	6450	4160	912	0.029	0.003
PSC01								
N	1	1	1	2	2	2	2	2
Mean	8.12	10.26	1844	1765	1188.5	2.4	0.017	0.0013
Min	8.12	10.26	1844	1510	977	2.0	0.003	<0.001
Max	8.12	10.26	1844	2020	1400	2.8	0.031	0.002
PSC02								
N	1	1	1	2	2	2	2	2
Mean	8.1	9.51	1696	1204	777	1.8	0.0105	0.0018
Min	8.1	9.51	1696	998	645	1.6	0.003	<0.001
Max	8.1	9.51	1696	1410	909	2.0	0.018	0.003
UNT01								
N	0	0	0	1	1	1	0	1
Mean				369	278	1.0		0.03
Min				369	278	1.0		0.03
Max				369	278	1.0		0.03

Source: Powertech (2011).

18

19

1

**Table 3.5-2. Summary of Key Radionuclides of Concern in Surface Waters in Streams at the Proposed Dewey-Burdock ISR Project**

Stream ID	Gross Alpha pCi/L	U (Diss)* mg/L	U (Total) mg/L	Ra-226 (Diss) pCi/L	Ra-226 (Susp)* pCi/L	Pb-210 (Diss) pCi/L	Pb-210 (Susp) pCi/L	Po-210 (Diss) pCi/L	Po-210 (Susp) pCi/L	Th-230 (Diss) pCi/L	Th-230 (Susp) pCi/L
BVC01 N	11	9	11	8	9	6	6	6	6	9	9
Mean	17.95	0.0124	0.0121	0.31	0.26	2.7	3.38	1.13	1.6	0.1	0.66
Min	5.9	0.002	0.004	< 0.2	< 0.2	< 1.0	< 1.0	< 1.0	< 1.0	< 0.2	< 0.2
Max	65.8	0.0269	0.0262	2.0	3.1	11.0	15.3	2.6	3.0	0.3	3.4
BVC04 N	11	9	11	8	9	6	6	6	6	9	9
Mean	14.5	0.0126	0.0121	0.12	0.66	5.1	3.15	1.2	1.72	0.27	0.47
Min	2.3	0.0017	0.003	< 0.2	< 0.2	< 1.0	< 1.0	< 1.0	< 1.0	< 0.2	< 0.2
Max	34.7	0.023	0.0239	0.5	2.5	26.0	8.6	3.0	3.7	1.7	2.1
CHR01 N	9	7	9	6	7	4	4	4	4	7	7
Mean	22.56	0.0189	0.021	0.29	0.71	1.18	1.48	1.08	1.85	0.11	1.1
Min	5.1	0.0024	0.0043	< 0.2	< 0.2	< 1.0	< 1.0	< 1.0	< 1.0	< 0.2	< 0.2
Max	35.3	0.0324	0.0365	0.6	4.0	3.2	4.4	1.7	4.1	0.3	3.8
CHR05 N	12	10	12	9	10	6	6	6	6	10	10
Mean	19.62	0.0162	0.017	0.24	0.6	2.45	6.3	0.85	1.18	0.09	0.49
Min	4.0	0.0028	0.0043	< 0.2	< 0.2	< 1.0	< 1.0	< 1.0	< 1.0	< 0.2	< 0.2
Max	29.9	0.0368	0.0378	1.4	3.8	6.6	22.0	2.4	3.8	< 0.2	2.2
PSC01 N	2	1	2	1	1	1	1	1	1	1	1
Mean	7.65	0.005	0.0176	0.1	0.1	2.2	0.9	0.7	0.3	0.0	0.5
Min	6.5	0.005	0.01	0.1	0.1	2.2	0.9	0.7	0.3	0.0	0.5
Max	8.8	0.005	0.0252	0.1	0.1	2.2	0.9	0.7	0.3	0.0	0.5
PSC02 N	2	1	2	1	1	1	1	1	1	1	1
Mean	3.05	0.0007	0.0035	0.0	0.0	1.7	0.0	0.2	0.3	0.0	0.2
Min	1.9	0.0007	0.0012	0.0	0.0	1.7	0.0	0.2	0.3	0.0	0.2
Max	4.2	0.0007	0.0057	0.0	0.0	1.7	0.0	0.2	0.3	0.0	0.2
UNT01 N	1	1	1	1	1	0	0	0	0	1	1
Mean	6.1	0.0002	0.0009	0.2	0.03					0.0	0.0
Min	6.1	0.0002	0.0009	0.2	0.03					0.0	0.0
Max	6.1	0.0002	0.0009	0.2	0.03					0.0	0.0

Source: Powertech (2011).

\*Diss = Dissolved; Susp = Suspended

2

3 were within State of South Dakota surface water quality limits. At Beaver Creek, pH levels were  
4 higher than the 8.8 standard in 16 percent (3 of 19) of the measurements, but were not below  
5 the 6.5 standard for coldwater marginal fish life. At the Cheyenne River, pH measurements  
6 complied with state standards. Dissolved oxygen measurements were in compliance at Beaver  
7 Creek, but fell below the state standard for warm water semipermanent fish life {5 mg/L [5 ppm]}  
8 in one sample from the Cheyenne River. Specific conductance values exceeded the fish,  
9 wildlife, and stock daily maximum standard of 7,000 uS/cm in 15 percent (3 of 20) of the  
10 measurements at Beaver Creek and 5 percent (1 of 19) of the measurements at the  
11 Cheyenne River. Specific conductance also exceeded the irrigation daily maximum standard of  
12 4,375 uS/cm in 50 percent (10 of 20) of the measurements at Beaver Creek and 42 percent  
13 (8 of 19) of the measurements at the Cheyenne River.

14

15 The U.S. Environmental Protection Agency (EPA) regulations in 40 CFR Part 141 (National  
16 Primary Drinking Water Regulations) establish the secondary maximum contaminant levels  
17 (SMCLs) for constituents that alter the color, taste, and odor of water (e.g., total dissolved  
18 solids, sulfate, and chloride) and the maximum contaminant levels (MCLs) for radionuclides and

1 hazardous constituents (e.g., gross alpha, uranium, Ra-226, Pb-210, arsenic, and selenium) in  
2 drinking water. The SMCLs and MCLs established in 40 CFR Part 141 are the same as State of  
3 South Dakota drinking water standards (ARSD, Chapter 74:04:12). Results of the stream  
4 sampling indicated that almost all the samples exceeded the SMCL for total dissolved solids  
5 (TDS) {500 mg/L [500 ppm]} with values ranging from 219 to 7,040 mg/L [219 to 7,040 ppm].  
6 Almost all samples (46 of 48) also exceeded the SMCL for sulfate {250 mg/L [250 ppm]} with  
7 values ranging from 86 to 4,520 mg/L [86 to 4,520 ppm]. About half of the samples (23 of 48)  
8 exceeded the SMCL for chloride {250 mg/L [250 ppm]} with values ranging from 1 to 1,730 mg/L  
9 [1 to 1,730 ppm]. About 15 percent of the samples (7 of 48) exceeded the MCL for arsenic  
10 {0.01 mg/L [0.01 ppm]} with values ranging from <0.001 to 0.048 mg/L [<0.001 to 0.048 ppm].  
11 None of the stream samples exceeded the MCL for selenium {0.05 mg/L [0.05 ppm]}. Selenium  
12 values ranged from <0.001 to 0.004 mg/L [<0.001 to 0.004 ppm].  
13

14 For radionuclides, the majority of samples (26 of 48) exceeded the MCL for gross alpha  
15 {555 Bq/m<sup>3</sup> [15 pCi/L]}, with exceedances occurring in both Beaver Creek and the Cheyenne  
16 River. Total uranium concentrations ranged from 0.0009 to 0.0378 mg/L [0.0009 to 0.0378  
17 ppm]; four samples from the Cheyenne River exceeded the MCL of 0.03 mg/L [0.03 ppm]. Total  
18 Ra-226 concentrations ranged from 0 to 192 Bq/m<sup>3</sup> [0 to 5.2 pCi/L]; one sample from Beaver  
19 Creek and one sample from the Cheyenne River exceeded the MCL of 185 Bq/m<sup>3</sup> [5.0 pCi/L].  
20 Pb-210 doesn't have an approved individual MCL based on radiation exposure and is not  
21 regulated under current drinking water standards. However, EPA has proposed an MCL of  
22 37 Bq/m<sup>3</sup> [1.0 pCi/L] for Pb-210 (EPA, 2000). The proposed MCL of 37 Bq/m<sup>3</sup> [1.0 pCi/L] for  
23 Pb-210 was exceeded in four samples from Beaver Creek, three samples from the  
24 Cheyenne River, and the two samples collected from Pass Creek.  
25

### 26 **3.5.2 Wetlands and Waters of the United States**

27  
28 The applicant conducted a wetland delineation survey of the proposed Dewey-Burdock ISR  
29 Project site in 2007 (Powertech, 2009a). The proposed project area is situated in the uplands  
30 areas of the two main drainages (Beaver Creek and Pass Creek) and includes several old mine  
31 pits and depressed areas. Wetlands were identified throughout the Beaver Creek drainage and  
32 near an old flowing well on Pass Creek at the southern boundary of the proposed project area.  
33 In addition, wetlands were identified in a majority of the old mine pits in the eastern portion of  
34 the Burdock area and in depressed areas throughout the project area. Table 3.5-3 summarizes  
35 the 2007 wetland delineation results. Based on the wetland delineation results, the total  
36 estimated wetland area in the proposed project area is 14.21 ha [35.11 ac] (Powertech, 2009a).  
37

38 The entire stretch of Beaver Creek, totaling 5.41 ha [13.38 ac] located in the northwest part of  
39 the proposed project area, was designated as a Riverine Lower Perennial Emergent (R2EM)  
40 wetland. Vegetation along the upper banks of Beaver Creek comprises mainly big sagebrush  
41 (*Artemisia tridentata*), greasewood (*Sarcobatus vermiculatus*), and western wheatgrass  
42 (*Elymus smithii*). The wetland indicator status of big sagebrush and greasewood is upland  
43 (UPL). The wetland indicator status of western wheatgrass is facultative upland (FACU).  
44

45 Common vegetation identified along the drainage of Beaver Creek included prairie cordgrass  
46 (*Spartina pectinata*), Baltic rush (*Juncus balticus*), and common threesquare (*Schoenoplectus*  
47 *pungens*). The wetland indicator status of prairie cordgrass and Baltic rush is facultative wet  
48 (FACW). The wetland indicator status of common threesquare is obligate (OBL).  
49  
50

**Table 3.5-3. Summary of 2007 Wetland Delineation Survey Results**

Number of Features	Classification*	Ha [Ac]
2	Wetland Channel (PEM)	0.306 [0.756]
2	Wetland Channel (R2EM)	5.420 [13.393]
1	Wetland Channel (R4SB7)	0.001 [0.002]
2	Wetland Channel (R4US)	0.019 [0.048]
4	PEM Isolated Pond	0.827 [2.043]
1	PEMC Isolated Pond	0.002 [0.005]
1	PABJh Isolated Pond	0.105 [0.260]
1	PUSA Isolated Pond	0.012 [0.030]
3	PUB Isolated Depression	2.124 [5.248]
3	PUS Isolated Depression	1.095 [2.706]
5	Mine Pits PUB, PEM, OW	4.300 [10.626]
	<b>Total</b>	<b>14.210 [35.114]</b>

Source: Powertech (2009)a.

\*Explanation of Classification: PEM (Palustrine Emergent); R2EM (Riverine Lower Perennial Emergent); R4SB7 (Riverine Intermittent Streambed Vegetated); R4US (Riverine Intermittent Unconsolidated Streambed); PEMC (Seasonally Flooded); PABJh (Palustrine Aquatic Bed Intermittently Flooded Diked); PUSA (Palustrine Unconsolidated Shore Temporarily Flooded); PUB (Palustrine Unconsolidated Bottom); PUS (Palustrine Unconsolidated Shore); and OW (Open Water).

1  
2 Pass Creek, which runs through the central part of the proposed project area, contains wetland  
3 areas near an old, open flowing well at the southern boundary of the project area. The wetland  
4 totals 0.20 ha [0.50 ac] and is classified as Palustrine Emergent (PEM). Common vegetation  
5 found within the wetland was prairie cordgrass and common threesquare, with a wetland  
6 indicator status of FACW and OBL, respectively.

7  
8 Approximately 0.47 ha [1.17 ac] of wetlands and 3.82 ha [9.45 ac] of open water (OW) are  
9 present in the old mine pits at the eastern and northeastern edges of the Burdock area  
10 (Figure 3.2-3). Two of the Darrow pits in Section 1, Township 7 South, Range 1 East are  
11 classified as Palustrine Unconsolidated Bottom (PUB) wetland. Darrow Pit #2 in Section 2,  
12 Township 7 South, Range 1 East is classified as both PEM and OW wetland. The PEM is  
13 located along the bank of the Darrow Pit #2 and OW in other parts of the pit. The Triangle Pit  
14 located in Section 34, Township 6 South, Range 1 East was classified as OW wetland and  
15 totaled 3.09 ha [7.63 ac]. Other old mine pits in the Burdock area were classified as non-  
16 wetland due to lack of hydrophytic vegetation and/or hydrology.

17  
18 The applicant has recommended all topographic depressed areas identified as wetlands in its  
19 2007 wetland delineation survey be classed as nonjurisdictional, based on their isolated nature  
20 (Powertech, 2009a). These wetlands were primarily classified as PEM, Seasonally Flooded  
21 (PEMC), Palustrine Aquatic Bed Intermittently Flooded Diked (PABJh), Palustrine  
22 Unconsolidated Shore (PUS), Palustrine Unconsolidated Shore Temporarily Flooded (PUSA),  
23 and PUB wetlands based on hydrology conditions. Approximately 4.16 ha [10.29 ac] of wetland  
24 depressions and ponds were identified within the proposed project area.

25  
26 The U.S. Army Corps of Engineers (USACE), Ohama District, completed a jurisdictional  
27 Waters of the United States determination of wetlands on the proposed Dewey-Burdock  
28 site in January 2009 (Powertech, 2009a, Appendix 3.5-H). USACE identified 20 wetland sites,  
29 and 4 of these were considered jurisdictional: Beaver Creek, Pass Creek, and an ephemeral  
30 tributary to each drainage. The jurisdictional ephemeral tributary to Beaver Creek has wetlands  
31 present near its confluence with Beaver Creek; it is located in Section 32, Township 6 South,



1 Range 1 East (see Figure 4.5-1). The jurisdictional ephemeral tributary to Pass Creek has  
2 wetlands present near its confluence with Pass Creek; it is located in Section 3, Township 7  
3 South, Range 1 East (see Figure 4.5-1).

### 4 5 **3.5.3 Groundwater**

#### 6 7 **3.5.3.1 Regional Aquifer Systems**

8  
9 The geological sequence of the regional aquifers presented in the applicant's license  
10 application (Powertech, 2009a–c) is consistent with the information on the hydrologic setting of  
11 the Black Hills area by Driscoll, et al. (2002) and Fahrenbach, et al. (2009). On the regional  
12 scale, the major aquifers in the Black Hills area include (from top to bottom) the Inyan  
13 Kara Group, Minnekahta, Minnelusa, Madison, and Deadwood aquifers (Figure 3.5-4).  
14 These aquifers are separated by confining layers with low permeability except at their  
15 outcrop areas. The hydrologic setting in the Black Hills area also involves minor aquifers,  
16 which include the Sundance/Unkpapa, Newcastle, and alluvial aquifers. These minor aquifers  
17 yield small volumes of water locally for domestic and livestock uses. A hydrostratigraphic  
18 section showing aquifers present at the Dewey-Burdock site is presented in Figure 3.5.5.

19  
20 Aquifer characteristics and hydraulic properties of the major aquifers, from shallow to deep, are  
21 discussed in this section. The Inyan Kara Group aquifer is the first major aquifer below the  
22 ground surface. It ranges from 76 to 152 m [250 to 500 ft] in thickness and contains 2  
23 subaquifers: the Fall River aquifer and Chilson aquifer, which are separated by the Fuson  
24 Shale confining unit (see Figure 3.5-5). The Inyan Kara Group aquifers are highly  
25 heterogeneous, display transmissivities in the range of 0.1 to 557 m<sup>2</sup>/day [1 to 6,000 ft<sup>2</sup>/day],  
26 and are capable of yielding high volumes of water (Driscoll, et al., 2002). The effective porosity  
27 of the Inyan Kara aquifer is 0.17 and is generally the highest of the major aquifers (Rahn, 1985).  
28 Effective porosity is the porosity of the rock consisting on interconnected pores. The Inyan Kara  
29 aquifer is recharged primarily by precipitation at the outcrop.

30  
31 The Inyan Kara Group aquifer is overlain by the Graneros Group (the combined Skull Creek–  
32 Mowry–Belle Fourche shales) except at outcrop areas. Within the Graneros Group, the  
33 Newcastle Sandstone contains an important minor aquifer known as the Newcastle aquifer. As  
34 noted in SEIS Section 3.4.1.2, the Newcastle Sandstone is absent within the proposed  
35 Dewey-Burdock project area. The Inyan Kara Group aquifer is separated from the underlying  
36 Minnekahta aquifer by a sequence of (from shallow to deep) Morrison Formation,  
37 Sundance/Unkpapa aquifer (minor aquifer), and the Gypsum Spring Formation.

38  
39 The Minnekahta aquifer is a major aquifer in the Black Hills area and ranges in thickness  
40 from 7.6 to 19.8 m [25 to 65 ft] (Strobel, et al., 1999). The Minnekahta aquifer is a thin to  
41 medium-bedded, fine-grained laminated limestone (Driscoll, et al., 2002). Information on the  
42 hydraulic properties of the Minnekahta aquifer is limited. The Minnekahta aquifer is typically  
43 very permeable; however, due to its limited thickness, wells yields can be small. In northeast  
44 Wyoming, the effective transmissivity and specific capacity of the Minnekahta aquifer were  
45 reported to be 4.2 m<sup>2</sup>/day and 0.5 m<sup>3</sup>/day [45 ft<sup>2</sup>/day and 19 ft<sup>3</sup>/day], respectively (Northeast  
46 Wyoming River Basins Water Plan, 2002).

47  
48 The Minnelusa aquifer ranges in thickness from 114 to 358 m [375 to 1,175 ft] in the Black Hills  
49 area (Driscoll, et al., 2002). The Minnelusa aquifer is composed of layers of sandstone,

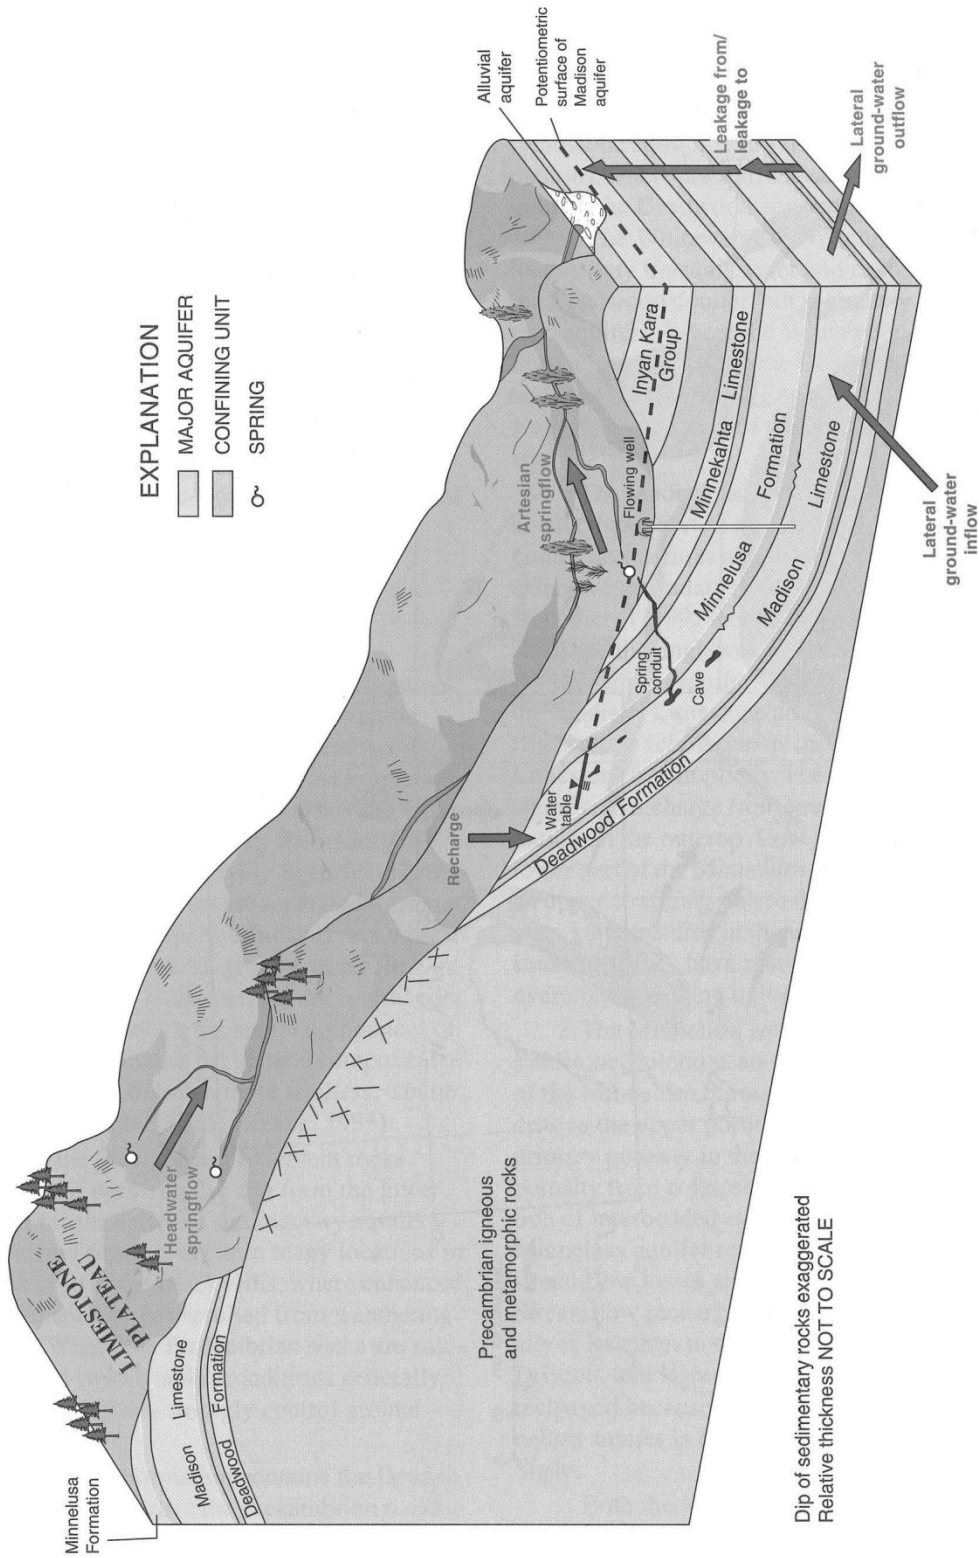


Figure 3.5-4. Schematic Diagram Showing Simplified Hydrogeologic Setting of the Black Hills Area.  
Source: Driscoll, et al. (2002).

1  
2

Dewey-Burdock Site Hydrostratigraphy			
System	Series	Formation	
Cretaceous	Upper	Graneros Group	Belle Fourche Shale
	Lower		Mowry Shale
			Skull Creek Shale
		Inyan Kara Aquifer	Fall River Aquifer
			Lakota Formation
	Chilson Aquifer		
	Jurassic		Morrison Formation
		Unkpapa Aquifer	
		Sundance Aquifer	
		Gypsum Spring Formation	
Triassic		Spearfish Formation	
Permian		Minnekahta Aquifer	
		Opeche Shale	
		Minnelusa Aquifer	
Pennsylvanian			
Mississippian		Madison Aquifer	
Devonian		Englewood Formation	
Ordovician		Whitewood Formation	
		Winnipeg Formation	
Cambrian		Deadwood Aquifer	

**Figure 3.5-5. Hydrostratigraphic Units Present at the Proposed Dewey-Burdock ISR Project Site.**

**Source: Modified from Driscoll, et al. (2002).**

1  
2

1 dolomite, and anhydrite in the Minnelusa Formation. Porosity within the Minnelusa is  
2 predominantly primary porosity associated with void space present during rock formation,  
3 although secondary porosity is present in association with fractures and dissolution  
4 features after rock formation. The effective porosity of the Minnelusa is 0.05 (Rahn, 1985).  
5 It is a heterogeneous aquifer with transmissivity in the range of 0.1 to 1,115 m<sup>2</sup>/day [1 to  
6 12,000 ft<sup>2</sup>/day]. The Minnelusa is separated from the Minnekahta aquifer by the Opeche Shale,  
7 which acts as the intervening confining layer. There are confining layers at the base of the  
8 Minnelusa Formation. Locally, these confining layers may be absent or provide ineffective  
9 confinement; this could enhance hydraulic connection between the Minnelusa aquifer and the  
10 underlying Madison aquifer (Naus, et al., 2001), which is the source of municipal water in some  
11 communities including Rapid City and Edgemont (Powertech, 2009a). On the regional scale,  
12 the Minnelusa Formation has been considered to be in hydraulic connection with the Inyan Kara  
13 aquifer through breccia pipes (Gott, et al., 1974). Breccia pipes are collapsed structures caused  
14 by dissolution of gypsum (calcium sulfate, CaSO<sub>4</sub> • H<sub>2</sub>O) and anhydrite (anhydrous calcium  
15 sulfate, CaSO<sub>4</sub>) within the Minnelusa Formation in the Black Hills area.

16  
17 The applicant conducted detailed geologic mapping throughout proposed operating areas at the  
18 proposed Dewey-Burdock site and found no indication for the presence of breccia pipes  
19 (Powertech, 2009c, 2011). This finding is in agreement with Gott, et al. (1974), who reported  
20 that breccia pipes do not occur at the Dewey-Burdock site.

21  
22 The Madison Formation, which ranges in thickness from 61 to 305 m [200 to 1,000 ft], is mainly  
23 a dolomite unit characterized by extensive secondary porosity resulting from fractures and karst  
24 (caves and sinkholes) features. The effective porosity of the Madison aquifer is 0.05 (Rahn,  
25 1985). It is the source of municipal water for numerous communities, including Rapid City  
26 and Edgemont. It is a highly heterogeneous aquifer with transmissivity in the range of 121 to  
27 5,203 m<sup>2</sup>/day [1,300 to 56,000 ft<sup>2</sup>/day]. The aquifer is separated from the underlying Deadwood  
28 aquifer by the low-permeability Whitewood and Winnipeg formations (see Figure 3.5-5). The  
29 Englewood Formation also underlies the Madison Formation. The Madison and Minnelusa  
30 aquifers are sources of large artesian springs in the Black Hills area, and groundwater flowpaths  
31 and velocities in both aquifers are influenced by hydraulic properties caused by secondary  
32 porosity (Driscoll, et al., 2002).

33  
34 The Deadwood aquifer is 0 to 152 m [0 to 500 ft] thick and consists of basal conglomerate,  
35 sandstone, limestone, and mudstone. It exhibits transmissivity in the range of 23 to 93 m<sup>2</sup>/day  
36 [250 to 1,000 ft<sup>2</sup>/day]. The Deadwood aquifer is used mainly by domestic and municipal users  
37 near its outcrop area. Regionally, Precambrian rocks underlying the Deadwood act as a lower  
38 confining unit. The Whitewood and Winnipeg Formations, where present, act as overlying  
39 semiconfining units to the Deadwood aquifer (Strobel, et al., 1999). Where the Whitewood and  
40 Winnipeg Formations are absent, the Deadwood aquifer is overlain by the Englewood  
41 Formation. Previous studies have included the Englewood Formation, which Strobel, et al.  
42 (1999) included as part of the Madison aquifer (Strobel, et al., 1999; Driscoll, et al., 2002).

43  
44 Regionally, groundwater flows radially outward from the Black Hills toward the surrounding  
45 plains. Groundwater recharge paths for aquifers in the Black Hills include precipitation,  
46 streamflow losses, and water flow across aquifers where confining layers are absent  
47 or ineffective. Rainfall ranges from 30 to 71 cm/yr [12 to 28 in/yr] in the Black Hills.  
48 Approximately 2 percent of precipitation recharges the aquifers of the southwestern Black Hills,  
49 and the rest is accounted for by evapotranspiration and surface runoff (Powertech, 2009a).  
50 In general, streamflow recharge to groundwater is limited to relatively shallow aquifers in close


1 proximity to streams. Regionally, water elevations increase with depth, which provides an  
2 upward hydraulic gradient for groundwater flow across the major aquifers and limits the potential  
3 for downward recharge.

### 4 5 **3.5.3.2 Aquifer Systems in the Vicinity of the Proposed Dewey-Burdock Project**

6  
7 Alluvial aquifers (formed by unconsolidated or loosely consolidated sediments) with thicknesses  
8 of 0 to 15 m [0 to 50 ft] are observed in the vicinity of the proposed project area along Beaver  
9 Creek, Pass Creek, and the Cheyenne River (Powertech, 2009a, 2011). They are typically  
10 unconfined, but may be confined locally. Based on an alluvial drilling program completed in  
11 May 2011, the alluvium in the Pass Creek drainage is up to 15 m [50 ft] thick and the alluvium in  
12 the Beaver Creek drainage is up to 9 m [30 ft] thick (Powertech, 2011). Many of the borings  
13 drilled into the alluvium along Beaver Creek and Pass Creek in May 2011 were dry; however,  
14 the thickness of saturated alluvium in three borings completed as alluvial monitoring wells  
15 ranged from 3 to 4 m [10 to 12 ft] (Powertech, 2011). Alluvial aquifers are separated from the  
16 underlying Fall River Formation by the low permeability Graneros Group confining unit (see  
17 Figure 3.5-5). Results of the alluvial drilling program did not indicate any areas of discharge to  
18 the alluvium along Beaver Creek and Pass Creek from the underlying Fall River aquifer  
19 (Powertech, 2011). Within the proposed project area, the Skull Creek shale of the Graneros  
20 Group has an average thickness of 61 m [200 ft], except in parts of the Burdock area where it  
21 has eroded leaving the Fall River aquifer exposed at the surface. The Skull Creek Shale has  
22 low vertical hydraulic conductivities of approximately  $10^{-9}$  cm/sec [ $10^{-11}$  ft/sec].

23  
24 The Skull Creek Shale is underlain by the Fall River aquifer, which has an average thickness of  
25 46 m [150 ft] within the project area. The Fall River Formation crops out in the eastern part of  
26 the project area (see Figure 3.4.3), where it is geologically unconfined and partially saturated  
27 (i.e., the water table is below the top of the formation). The transmissivity of the Fall River  
28 varies in the range of 5 to 24 m<sup>2</sup>/day [54 to 255 ft<sup>2</sup>/day] in the Dewey area, and its storativity is  
29 on the order of  $10^{-5}$  cm/sec [ $10^{-7}$  ft/sec] (Powertech, 2009a).

30  
31 The Fall River aquifer is separated from the underlying Chilson aquifer by the Fuson Shale,  
32 which varies from approximately 6 to 24 m [20 to 80 ft] in thickness across the project area  
33 (Powertech, 2010a, 2011). Based on pumping tests conducted in the Burdock area in 1979, the  
34 Fuson Shale has estimated vertical hydraulic conductivities of  $1 \times 10^{-7}$  to  $4.6 \times 10^{-8}$  cm/sec  
35 [ $3.3 \times 10^{-9}$  to  $1.5 \times 10^{-9}$  ft/sec] (Boggs and Jenkins, 1980). Based on the 1979 aquifer tests,  
36 Boggs and Jenkins (1980) suggested there may be a direct connection between the Fall River  
37 and Chilson aquifers through the Fuson resulting from unidentified structural features or old  
38 unplugged exploration holes. Additional aquifer pumping tests conducted in the Burdock area in  
39 2008 also demonstrated a hydraulic connection between the Fall River and Chilson aquifers  
40 through the intervening Fuson Shale (Powertech, 2010a). Interpretations of both the 1979 and  
41 2008 pumping test results were found to be consistent with a leaky-confined aquifer model  
42 (Powertech, 2010a). Exploratory drilling data and isopach contours of the Fuson Shale in the  
43 Burdock area identified an approximate 1.6 km [1.0 mi]-wide, northwest-trending channel within  
44 the basal Fall River aquifer that has scoured the underlying Fuson Shale (Figure 3.5-6)  
45 (Powertech, 2010a). The existing drilling data indicate the thinnest section of the Fuson Shale  
46 {i.e., less than 9 m [30 ft]} is approximately 305 m [1,000 ft] outside the northern boundary of the  
47 initial Burdock area wellfield (BWF-1) (Figure 3.5-6).

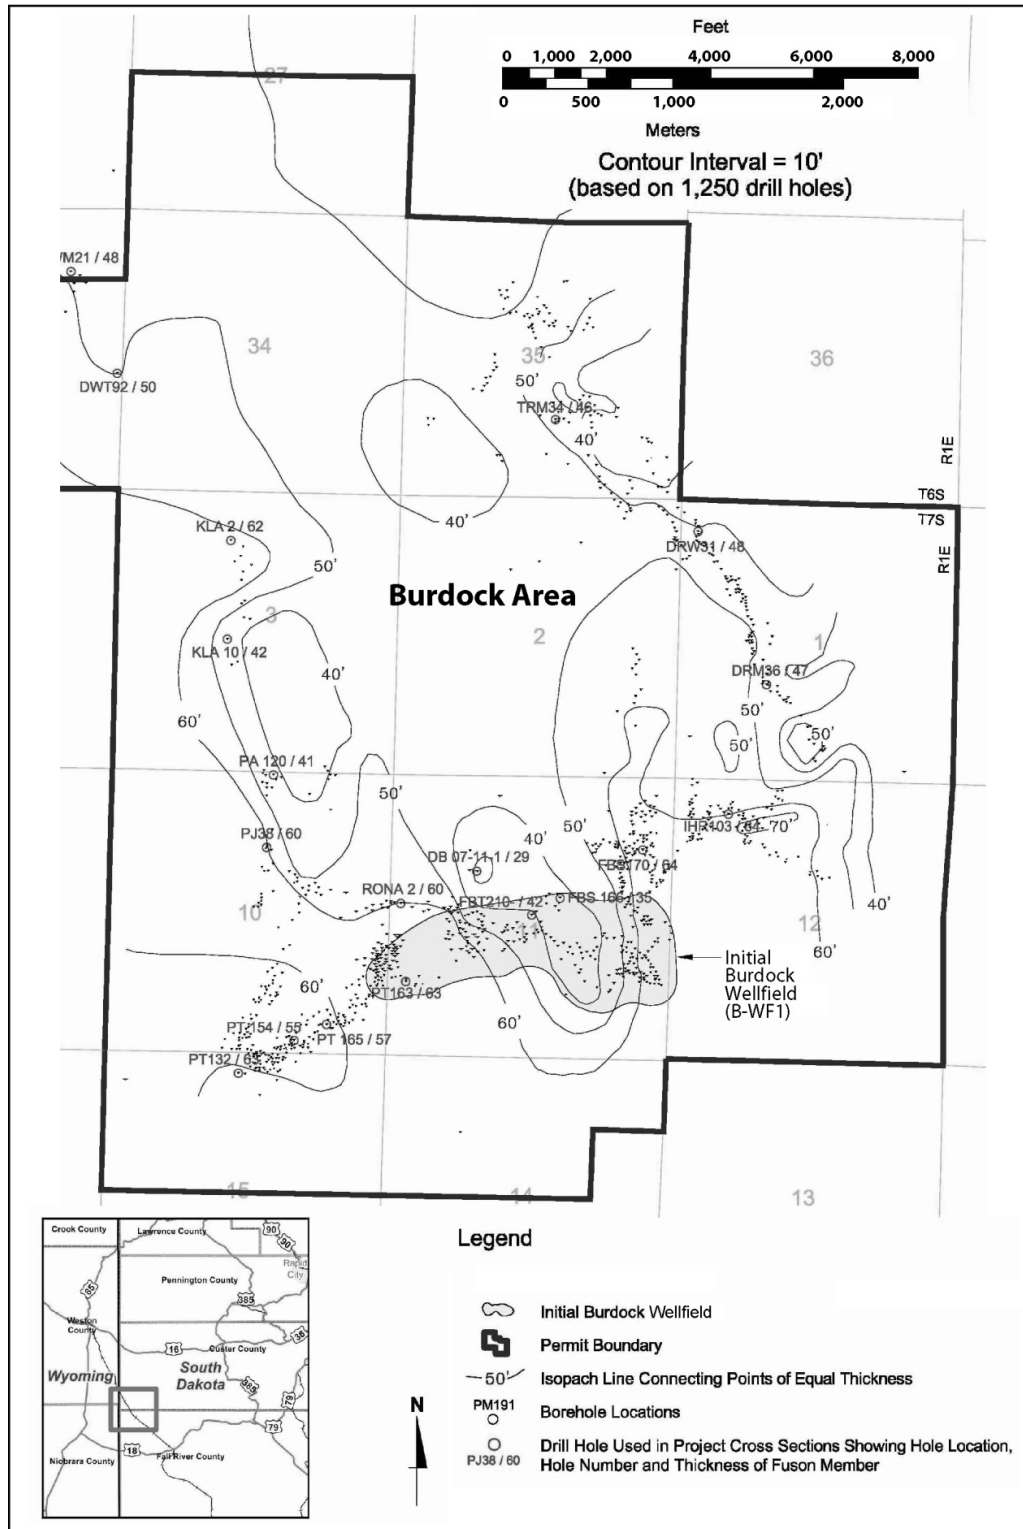

**Figure 3.5-6. Isopach Map of the Fuson Shale at the Proposed Dewey-Burdock ISR Project.**  
**Source: Modified From Powertech (2010a).**

1 The Fuson Shale is underlain by the Chilson aquifer, which varies in thickness from 37 to 61 m  
2 [120 to 200 ft]. Its transmissivity ranges from 18 to 55 m<sup>2</sup>/day [190 to 590 ft<sup>2</sup>/day] in the Burdock  
3 area, and its storativity is on the order of 10<sup>-4</sup> cm/sec [10<sup>-6</sup> ft/sec] (Powertech, 2009a).

4  
5 Underlying the Chilson aquifer is the Morrison Formation with an average thickness of 18.3 to  
6 42.7 m [60 to 140 ft] across the project area (Powertech, 2011). The Morrison Formation is the  
7 lower confining unit for the Inyan Kara Group aquifer system and has low vertical hydraulic  
8 conductivities of 10<sup>-9</sup> cm/sec [10<sup>-11</sup> ft/sec] (Powertech, 2009a).


9  
10 The Morrison Formation is underlain by the Unkpapa then the Sundance aquifers. There is no  
11 intervening confining unit between the Unkpapa and Sundance aquifers (see Figure 3.5-5).  
12 They are considered to be minor aquifers and are a source of water within the proposed project  
13 area (Powertech, 2009a). These aquifers are separated from the underlying Minnekahta aquifer  
14 by the low permeability Spearfish Formation, which consists of shale and siltstone. The  
15 Spearfish Formation has an average thickness of 98 m [320 ft]. The applicant reported that the  
16 Minnekahta aquifer does not supply water for domestic, livestock, or agricultural uses in the  
17 proposed Dewey-Burdock ISR Project area (Powertech, 2010a).

18  
19 Potentiometric surfaces for the Fall River and Chilson aquifers indicate groundwater flows from  
20 northeast to southwest (Powertech, 2009b). The directional groundwater flow at the proposed  
21 site is consistent with regional groundwater flow; regional flow moves outward radially from the  
22 Black Hills southwesterly toward the plains. Potentiometric surfaces also indicate that the  
23 hydraulic gradient is upward from the Chilson aquifer to the Fall River aquifer in the Dewey  
24 area. At the Dewey pumping test area, the potentiometric surface difference between the  
25 Chilson and Fall River aquifers in the Dewey area is approximately 12 m [40 ft] (Powertech,  
26 2010a). Potentiometric surfaces for the Fall River and Chilson aquifers, however, are nearly  
27 equal in the Burdock area, suggesting that these two aquifers could be hydraulically connected  
28 through the intervening Fuson shale (Powertech, 2009b). There is no evidence from  
29 exploratory drilling information (e.g., borehole and geophysical log) that supports the thickness  
30 of the Fuson shale as being less than 6 m [20 ft] in the Burdock area (Powertech, 2010a,b).

### 31 32 **3.5.3.3 Uranium-Bearing Aquifers**

33  
34 The Chilson and Fall River aquifers, as part of the Inyan Kara Group aquifer, contain the  
35 uranium mineralization that the proposed project would extract (Powertech, 2009a). The initial  
36 wellfield in the Dewey area would be located in the mineralization zone of the Fall River  
37 Formation, and the initial wellfield in the Burdock area would be located in the mineralization  
38 zone of the Chilson member of the Lakota Formation (Powertech, 2009c). The Fall River  
39 Formation crops out in the eastern part of the project area, where it is geologically unconfined  
40 and partially saturated (i.e., the water table is below the top of the formation). The approximate  
41 boundary between fully saturated and partially saturated conditions in the Fall River is shown in  
42 Figure 3.5-7. The applicant has indicated that there are no plans to conduct ISR operations in  
43 Fall River orebodies in the eastern portion of the project area where the Fall River is  
44 geologically unconfined and partially saturated (Powertech, 2011). This would restrict the  
45 proposed ISR operations in confined portions of the underlying hydrogeologic system.

46  
47 The applicant is planning to conduct ISR operations in partially saturated portions of the  
48 underlying Chilson aquifer in the eastern part of the project area (Powertech, 2010a, 2011).  
49 The approximate boundary between fully saturated and partially saturated conditions in the  
50 Chilson is shown in Figure 3.5-7. Partially saturated portions of the Chilson along the eastern

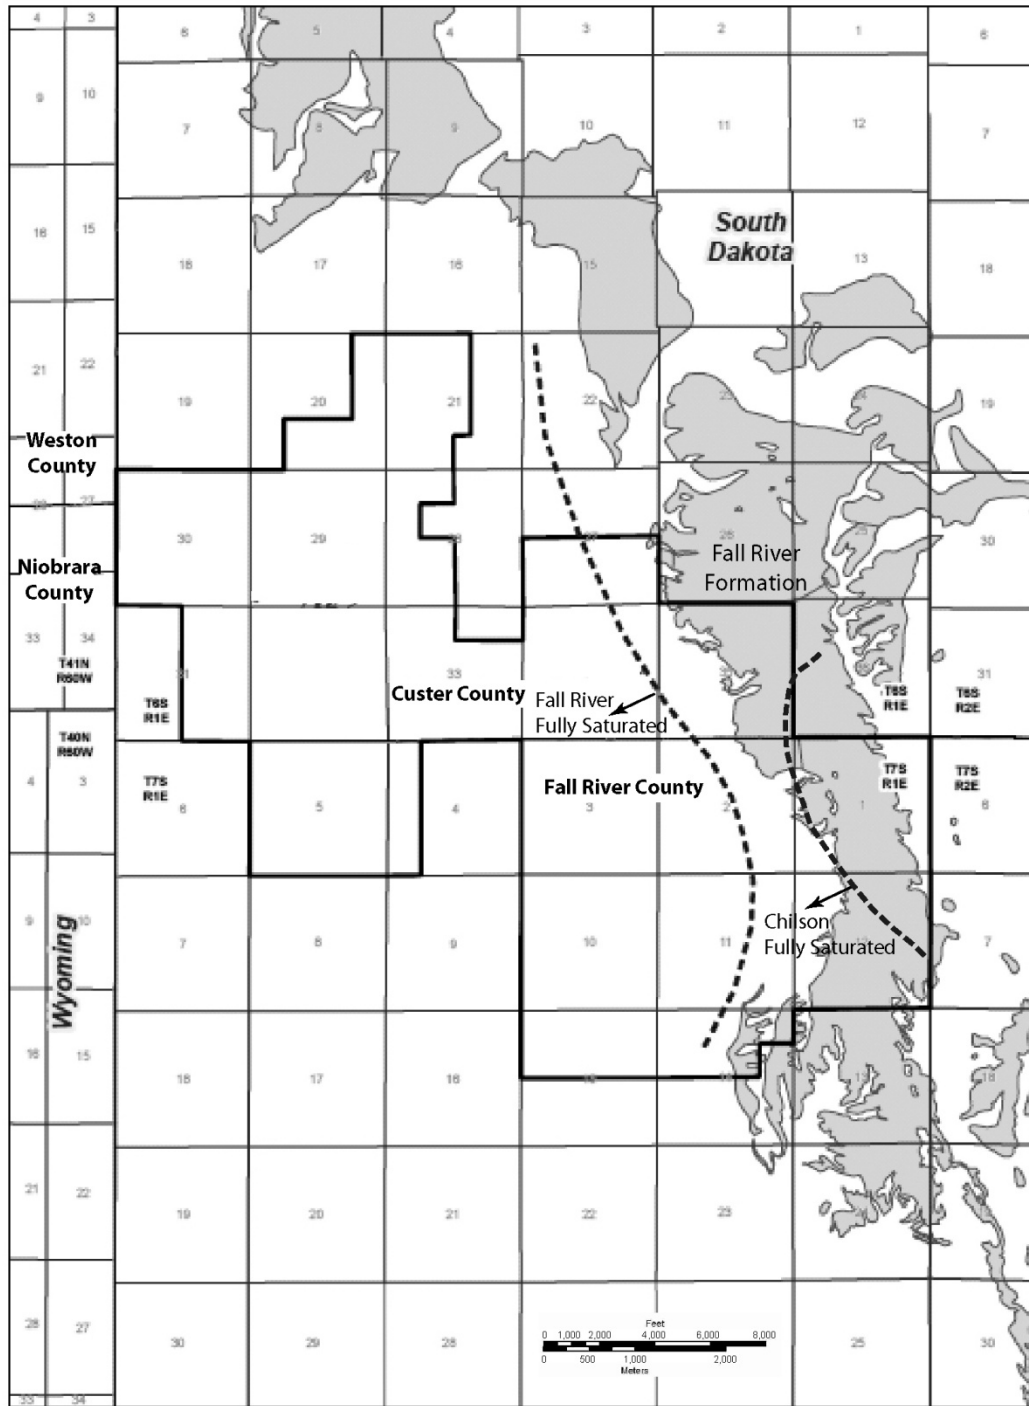

**Figure 3.5-7. Map of the Proposed Dewey-Burdock ISR Project Area Showing the Approximate Locations of Fully Saturated Portions of the Fall River Formation and Chilson Member of the Lakota Formation. Shaded Areas Are Where Fall River Formation Is Exposed at the Ground Surface. Source: Modified from Powertech (2011).**

1  
2



1 edge of the project area are not confined under pressure beneath the relatively impermeable  
2 Fuson Shale. Therefore, although the Chilson is geologically confined in this area, the  
3 partially saturated portions are considered hydrologically unconfined. The applicant has  
4 committed, as part of the license condition, to conduct additional hydrogeological investigations  
5 (e.g., delineation drilling and pump testing) prior to wellfield development to accurately measure  
6 and identify partially saturated portions of the Chilson aquifer to confirm sufficient potentiometric  
7 head {greater than 15.2 m [50 ft]} is available to perform normal ISR operations (Powertech,  
8 2010a, 2011).

#### 9 10 **3.5.3.4 Other Surrounding Aquifers for Water Supply**

11  
12 The Madison aquifer is the most important aquifer in the region supplying municipal water for  
13 numerous communities, including Rapid City and Edgemont, South Dakota. Powertech  
14 reported that the Sundance and Unkpapa aquifers are minor aquifers, supplying local domestic  
15 and livestock water within the proposed project area (Powertech, 2009a, 2011).

#### 16 17 **3.5.3.5 Groundwater Quality**

18  
19 The applicant conducted initial baseline groundwater sampling of wells at the proposed  
20 Dewey-Burdock ISR Project from July 2007 through June 2008 (Powertech, 2009a). The  
21 baseline study sampled 19 groundwater wells quarterly: 14 were existing wells and 5 wells  
22 were newly drilled. Eight domestic wells and six stock watering wells were sampled, and three  
23 of these existing wells are located upgradient of the proposed uranium recovery areas.  
24 Groundwater sampling was undertaken in a number of aquifers: four wells in the Fall River  
25 Formation, seven wells in the Lakota Formation (Chilson Member), two wells in the Inyan Kara  
26 Group made up of the Fall River or Chilson, one well in the Sundance formation, and five wells  
27 in the alluvium were tested. The applicant conducted monthly sampling of an additional  
28 12 wells from March 2008 to February 2009. Six of these wells were located in the Dewey area  
29 and six in the Burdock area. A set of Fall River and Chilson wells was sampled within an  
30 upgradient and downgradient of proposed uranium recovery areas in both the Dewey and  
31 Burdock areas. The locations of all groundwater sampling sites are shown in Figure 3.5-2.

32  
33 The initial baseline groundwater sampling results found that 28 out of 31 groundwater samples  
34 exceeded the MCLs for primary drinking water standards as provided by EPA regulations at  
35 40 CFR Part 141. Wells with groundwater samples exceeding primary drinking water standards  
36 for arsenic (40 CFR Part 141, Subpart B), lead (40 CFR Part 141.86), uranium, Ra-226, and  
37 gross alpha (40 CFR Part 141.66) are shown in Table 3.5-4. This table provides data on  
38 constituent concentrations of inorganic chemicals, uranium, Ra-226, and gross alpha particle  
39 radioactivity and identifies the well and aquifer sampled. Of 25 groundwater samples collected  
40 from the proposed ore-bearing aquifer, 23 exceeded the MCLs for primary drinking water  
41 standards as provided by EPA regulations at 40 CFR Part 141; hence, groundwater from the  
42 proposed ore-bearing aquifer within the permit boundaries would not be used as public  
43 water systems.

44  
45 Samples collected from wells 615 and 3026, which are within the Chilson aquifer, exceeded the  
46 MCL for arsenic {0.01 mg/L [0.01 ppm]}; wells 650 and 689, also within the Chilson aquifer,  
47 exceeded the MCL for lead {0.015 mg/L [0.015 ppm]}. Samples from well 622 in the Fall River  
48 aquifer and from wells 676 and 679 in alluvial aquifers along Pass Creek exceeded the MCL for  
49 both arsenic and lead. In addition, samples from wells 688 and 695 in the Fall River aquifer  
50 exceeded the MCL for arsenic. The MCL for uranium (0.03 mg/L) was exceeded in samples

**Table 3.5-4. Baseline Groundwater Samples With Values Exceeding the MCLs for Arsenic (0.01 mg/L), Lead (0.015 mg/L), Uranium (Total, 0.03 mg/L), Ra-226 (Dissolved, 5 pCi/L), and Gross Alpha (Total, 15 pCi/L)**

Well ID	Aquifer	Arsenic (mg/L)	Lead (mg/L)	Uranium (mg/L)	Ra-226 (Dissolved) (pCi/L)	Gross Alpha (pCi/L)
2	Chilson					
7	Fall River					15.5
8	Fall River					
13	Chilson					19.5
16	Chilson				6.4–26.2	28.3–85.7
18	Fall River					15.7–31.7
42	Chilson				96.5–102	371–558
615	Chilson	0.021–0.024			7.2	15.1–38.3
619	Chilson				99.7–120	341–438
622	Fall River	0.027	0.023–0.03		7.9	15–1470
628	Inyan Kara				6.1–20.7	29.9–83.9
631	Fall River				9.5–22.1	46.5–162
635	Sundance					
650	Chilson		0.05			
675	Alluvial			0.0387–0.0502		18.3–55.2
676	Alluvial	0.021	0.06	0.0591–0.0687		31.9–95.5
677	Alluvial			0.0414–0.0471		38.7–129
678	Alluvial			0.0379–0.0387		18.9–54.7
679	Alluvial	0.011	0.015–0.022			18.4–22.4
680	Chilson			0.0541	1,110–1,440	4,090–6,730
681	Fall River				357–434	656–2220
688	Fall River	0.015			6.7	17.3–29.8
689	Chilson		0.017		5.4–7.9	23.9–64.3
694	Fall River					15.1–25.9
695	Fall River	0.016			5.2–10.4	18.7–44.0
696	Chilson					20.2–23.9
697	Chilson				5.6	18.2–21.7
698	Fall River			0.101–0.132	347–429	36.3–2110
3026	Chilson	0.022–0.044		0.0322	5.9–10.1	36.0–116
4002	Inyan Kara				52.3–63.6	120–314
7002	Chilson				8–8.8	29.5–91.4

Source: Powertech (2011).

obtained from four of five wells in the alluvial aquifers. Samples from wells 680 and 3026 in the Chilson aquifer and well 698 in the Fall River aquifer also exceeded the MCL for uranium; these wells are within the Burdock area. The MCL for other metals, such as selenium {0.05 mg/L [0.03 ppm]}, was not exceeded in any of the groundwater samples.

More than 60 percent of the samples in the both Fall River and Chilson aquifers exceeded the MCL for dissolved Ra-226 [185 Bq/m<sup>3</sup> [5 pCi/L]]. Ra-226 levels exceeding the MCL ranged between 192 and 53,274 Bq/m<sup>3</sup> [5.2 and 1,440 pCi/L]. Approximately 75 percent of the wells sampled in the Fall River, Chilson, and alluvial aquifers produced samples that exceeded the MCL for gross alpha {555 Bq/m<sup>3</sup> [15 pCi/L]}. Gross alpha levels exceeding the MCLs in alluvial wells ranged between 677 and 4,772 Bq/m<sup>3</sup> [18.3 and 129 pCi/L]; however, gross alpha levels exceeding MCLs in the Fall River and Chilson aquifers were higher, ranging from 555 to

1 248,983 Bq/m<sup>3</sup> [15 to 6,730 pCi/L]. Wells 680 and 681 demonstrated Ra-226 levels exceeding  
2 11,099 Bq/m<sup>3</sup> [300 pCi/L] and gross alpha concentrations exceeding 36,996 Bq/m<sup>3</sup>  
3 [1,000 pCi/L]; these wells are directly within mapped orebodies in the Chilson and Fall River  
4 aquifers. Another well (698) downgradient of abandoned open pit mines within the Fall River  
5 aquifer demonstrated uranium, Ra-226, and gross alpha levels in the range of 0.113 to  
6 0.123 mg/L [0.113 to 0.123 ppm], 13,688 to 15,871 Bq/m<sup>3</sup> [370 to 429 pCi/L], and 44,765 to  
7 78,061 Bq/m<sup>3</sup> [1,210 to 2,110 pCi/L], respectively, exceeding the corresponding MCLs.  
8

9 Baseline groundwater samples also measured levels that exceeded the SMCLs for bulk water  
10 quality properties including pH, total dissolved solids (TDS), and other major constituents such  
11 as sodium and sulfate (Powertech, 2009a, 2011). Samples from six wells exceeded the SMCL  
12 for pH (6.5–8.5) with values ranging from 8.6 to 10.3. All the samples exceeded the SMCL for  
13 TDS {500 mg/L [500 ppm]} with values ranging from 670 to 9,700 mg/L [670 to 9,700 ppm]. The  
14 highest TDS values were obtained from alluvial aquifer samples. The SMCL for sodium  
15 {200 mg/L [200 ppm]} was exceeded in approximately half of the samples; measured values  
16 ranged from 201 to 2,140 mg/L [201 to 2,140 ppm]. Samples taken from alluvial aquifers  
17 produced the highest values for sodium. All samples taken from wells exceeded the SMCLs for  
18 sulfate {250 mg/L [250 ppm]}; wells in the alluvial aquifers measured the highest sulfate values  
19 {greater than 3,000 mg/L [3,000 ppm]}.  
20

21 At the present time, a primary drinking water standard for Rn-222 has not been established;  
22 however, EPA has proposed a limit of 11,099 Bq/m<sup>3</sup> [300 pCi/L] (EPA, 2000). Only well 650, of  
23 all the wells tested during baseline groundwater sampling, produced samples that did not  
24 exceed the proposed EPA limit; well 650 in the Chilson aquifer lies upgradient of historic  
25 uranium mining activities (Powertech, 2009a, 2011). Well samples exceeding the EPA's  
26 proposed limit for Rn-222 produced values ranging from 11,247 to 17,092,120 Bq/m<sup>3</sup> [304 to  
27 462,000 pCi/L]. Wells 680 and 42, located in the mapped orebodies in the Chilson aquifer, and  
28 well 681 in the Fall River aquifer have the highest concentrations of Rn-222. Well 42 provides  
29 water for domestic and stock water.  
30


31 Before ISR operations begin, the portion of the aquifer(s) designated for uranium recovery must  
32 be exempted from the underground source of drinking water (USDW) designation, in  
33 accordance with the Safe Drinking Water Act and pursuant to 40 CFR Part 146. A USDW is  
34 defined as an aquifer or its portion that supplies any public water system, or that contains a  
35 sufficient quantity of groundwater to supply a public water system and currently supplies  
36 drinking water for human consumption, or contains fewer than 10,000 mg/L [10,000 ppm] total  
37 dissolved solids, and which is not an exempted aquifer. An aquifer or aquifer portion that meets  
38 the criteria for a USDW may be determined to be an "exempted aquifer" if it does not currently  
39 serve as a source of drinking water and it cannot now and will not in the future serve as a  
40 source of drinking water because it is mineral, hydrocarbon, or geothermal energy producing, or  
41 can be demonstrated by a permit applicant as part of a permit application for a Class III  
42 operation to contain minerals that, considering their quantity and location, are expected to be  
43 commercially producible. The applicant, therefore, must obtain an aquifer exemption from EPA  
44 as a precondition to initiating ISR operations.  
45

### 46 **3.6 Ecology**

47  
48 The Nebraska-South Dakota-Wyoming Milling Region, as fully described in GEIS Section 3.4.5,  
49 encompasses the Middle Rockies, Northwestern Great Plains, Western High Plains, and the  
50 Nebraska Sand Hills ecoregions (NRC, 2009a). The proposed Dewey-Burdock ISR Project is

1 located within the Black Hills Foothills and Sagebrush Steppe ecoregions (Figure 3.6-1). GEIS  
 2 Section 3.4.5.1 provides the following description of these ecoregions:

- 3
- 4 • The Black Hills Foothills ecoregion is composed of the Hogback Ridge and the  
 5 Red Valley. The Hogback Ridge forms a ring of foothills surrounding the Black Hills.  
 6 The Red Valley encircles most of the Black Hills dome and acts as a buffer between the  
 7 Hogback Ridge and the Black Hills. Natural vegetation within this region includes  
 8 ponderosa pine (*Pinus ponderosa*), woodlands and open savannas with an understory of  
 9 western wheat grass (*Elymus smithii*), needle-and-thread grass (*Stipa comata*), little  
 10 bluestem (*Schizachyrium scoparium*), blue grama (*Bouteloua gracilis*), buffalo grass
- 11

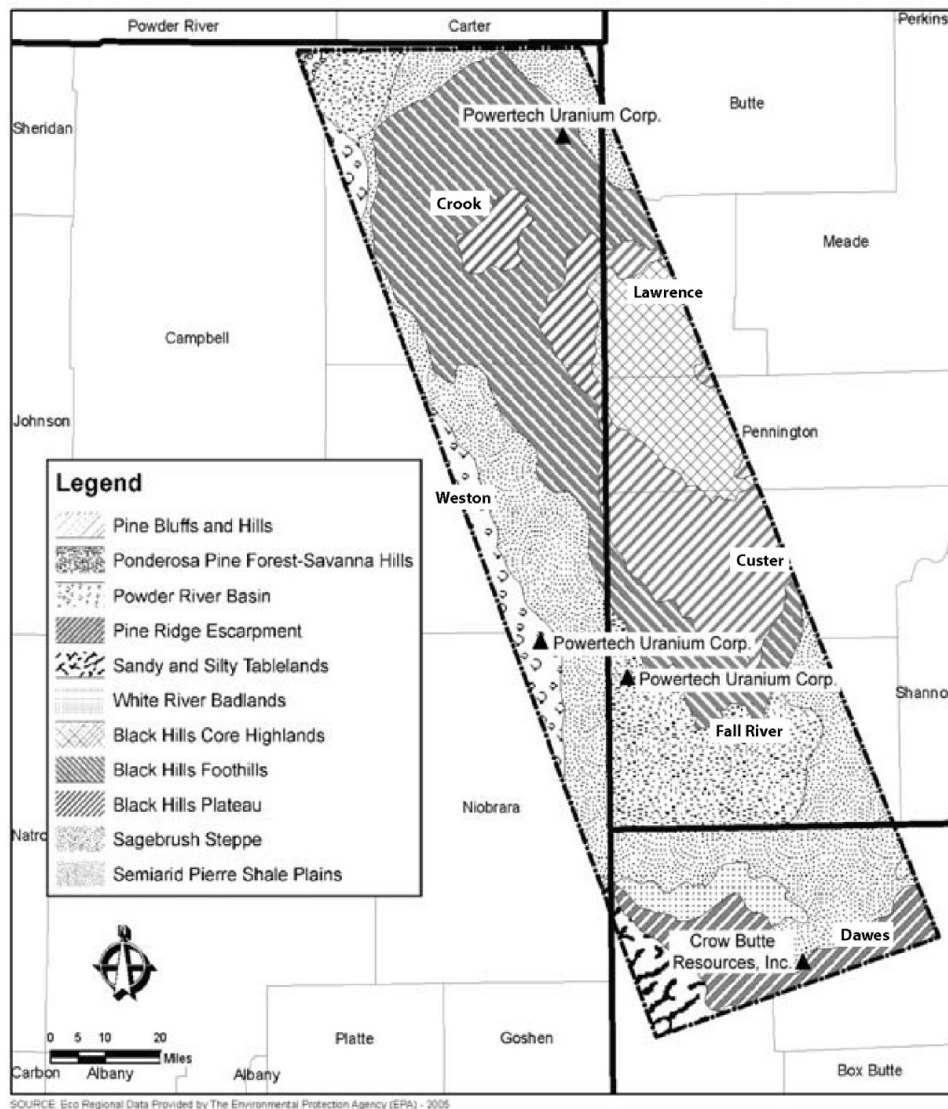

**Figure 3.6-1. Ecoregions for the Nebraska-South Dakota-Wyoming Uranium Milling Region.**  
 Source: NRC (2009a).

1 (*Hierochloe odorata*), and leadplant (*Amorpha canescens*). In addition, some burr oak  
2 (*Quercus macrocarpa*) is found in the north and Rocky Mountain juniper (*Juniperus*  
3 *scopulorum*) occurs in the south (Chapman, et al., 2004).  
4

- 5 • The Sagebrush Steppe ecoregion is found in Montana and in the Dakotas with only a  
6 small area extending into Wyoming. Vegetation types in this region consist of big  
7 sagebrush, Nuttall saltbush (*Atriplex nuttallii*), and short grass prairie. The sparse  
8 sagebrush communities consist of dusky gray sagebrush (*Artemisia arbuscula* ssp.  
9 *Arbuscula*), dwarf sage (*Artemisia columbiensis*), and big sagebrush (*Artemisia*  
10 *tridentata*). Prairie vegetation that can be found includes western wheatgrass, green  
11 needlegrass (*Nassella viridula*), blue grama, Sandberg bluegrass (*Poa secunda*),  
12 junegrass (*Koeleria macrantha*), rabbit brush (*Chrysothamnus*), fringed sage (*Artemisia*  
13 *frigid*), and buffalo grass. The shrub vegetation of this ecoregion is transitional between  
14 the grasslands of the Montana Central Grassland and the woodland of the Pine Scoria  
15 Hills (Bryce, et al., 1996).  
16

17 The applicant conducted ecological baseline studies from July 2007 through August 2008 at the  
18 proposed Dewey-Burdock site to fulfill the objectives specified in NUREG-1569 (NRC, 2003)  
19 and to meet applicable South Dakota Department of Environmental and Natural Resources  
20 (SDDENR), SDGFP, and U.S. Fish and Wildlife Service (FWS) guidelines (Powertech, 2009a).  
21 These studies include vegetation and wildlife surveys, which are detailed in the following  
22 sections. As stated in SEIS Section 3.1, the information in this section forms the basis for  
23 assessing the potential ecological impacts (see Chapter 4) of the proposed action and each  
24 alternative (Chapter 2).  
25

### 26 **3.6.1 Terrestrial Ecology**

27

28 The proposed project area is located within the geomorphologic Cheyenne River drainage basin  
29 and contains 4,282 ha [10,580 ac] of wildlife habitat, which supports medium- and small-sized  
30 mammals, as well as avian species within the Black Hills Foothills and Sagebrush Steppe  
31 ecoregions described previously. SEIS Figure 3.6-1 shows the ecoregions in the vicinity of the  
32 proposed project area. The area is characterized as semiarid continental to steppe  
33 environment, with a dry winter season with little precipitation (USGS, 1998). Two main  
34 drainages are within the proposed project area: Beaver Creek, a perennial stream, and  
35 Pass Creek, an intermittent stream, although dry stream channels and numerous ephemeral  
36 drainages are also present (see SEIS Section 3.5.1). Beaver Creek experiences low flow in  
37 most years resulting in a lack of deep-water habitat, which limits the number of water-dependent  
38 species found in the proposed project area. All natural drainages flow south and drain into the  
39 Cheyenne River, which is approximately 4 km [2.5 mi] south of the project area. The  
40 topography is primarily gently rolling in the western quadrant (more varied terrain with dry  
41 drainages and shrubland patches dissecting groups of pine tree in the central portion), and the  
42 highest elevation is in the eastern portion at the edge of the Black Hills (Powertech, 2009a).  
43

#### 44 **3.6.1.1 Vegetation**

45

46 Seven vegetation communities account for 96.7 percent of the 4,282-ha [10,580-ac] proposed  
47 project area (Powertech, 2009a). The remaining 3.3 percent of the project area is composed of  
48 disturbed areas, abandoned mine pits, shale outcrops, and open water. Table 3.6-1  
49 summarizes the total area of each vegetation community. The survey results identified five

**Table 3.6-1. Total Acreage of Vegetation Communities and Percentage of Permit Area**

Vegetation Community/ Land Use	Permit Area (Hectares)	Permit Area (Acres)	% of Permit Area
Big Sagebrush Shrubland	1,012.34	2,501.56	23.70
Greasewood Shrubland	886.44	2,190.45	20.75
Upland Grassland	885.27	2,187.56	20.72
Ponderosa Pine Woodland	883.74	2,183.76	20.69
Agricultural Land	315.97	780.79	7.40
Cottonwood Gallery	97.37	240.60	2.28
Silver Sagebrush Shrubland	48.35	119.49	1.13
Disturbed	5.95	14.70	0.14
Existing Mine Pits	132.33	326.99	3.10
Shale Outcrop	0.89	2.19	0.02
Water	3.62	8.94	0.08
<b>TOTAL</b>	<b>4,272.27</b>	<b>10,577.03</b>	<b>100.00</b>

Source: Powertech (2009a).

1  
2 native plant communities: big sagebrush shrubland, upland grassland, greasewood shrubland,  
3 ponderosa pine woodland, and cottonwood gallery (Powertech, 2009a). Agricultural land used  
4 for crop production is also present within the proposed project area.  
5

6 The plains cottonwood (*Populus deltoides* ssp. *monilifera*) grows naturally along the riverbanks  
7 of Beaver and Pass Creeks and on the higher elevation hilltops within the proposed project  
8 area. Although not identified within the study area, American elm (*Ulmus americana*), green  
9 ash (*Fraxinus pennsylvanica*), willows, and bur oak are common in riparian corridors in western  
10 South Dakota (BLM, 1985). The plains cottonwood was the only tree species the applicant's  
11 vegetation surveys identified along watered drainages; it is most prevalent in the Pass Creek  
12 drainage. Rocky Mountain juniper is present as individual trees or in small stands in some of  
13 the dry drainages (Powertech, 2009a). Ponderosa pines (*Pinus ponderosa*) are dominant at  
14 higher elevations, on hilltops, and within gaps in vegetation in the central and eastern portions  
15 of the project area.  
16

17 Threatened and endangered plant species were not encountered during the applicant's  
18 vegetation survey of the project area or within a 0.8-km [0.5-mi] perimeter around the area  
19 (Powertech, 2009a). The FWS South Dakota Field Office indicates threatened or endangered  
20 vegetative species have not been reported in Custer or Fall River Counties (FWS, 2010).  
21

22 A noxious weed is any plant a federal, state, or county government designates as injurious to  
23 public health, agriculture, recreation, wildlife, or property (BLM, 2009b). Nonnative plant or  
24 invasive plants include not only noxious weeds, but also other plants not native to the United  
25 States. As a result, these plants have no natural enemies to limit reproduction and spread.  
26 Some invasive plants can produce significant changes to vegetation, composition, structure, or  
27 ecosystem function.  
28

29 The South Dakota Department of Agriculture (SDDOA) (SDDOA, 2011) identifies six noxious  
30 weed state species that could be present in both Custer and Fall River Counties. The  
31 applicant's vegetation survey identified the presence of one of the six noxious weeds important  
32 on the state level, Canada thistle (*Cirsium arvense*), within the Cottonwood Gallery vegetation  
33 community (Powertech, 2009a). Canada thistle invades open habitats, including prairies,

1 savannas, fields, pastures, wet meadows, and open forests, forming dense stands, which shade  
2 out and displace native vegetation (Colorado State University, 2008). Once established it  
3 spreads rapidly and becomes difficult to eradicate.

4  
5 In addition to state noxious weeds, SDDOA identifies 15 noxious weeds locally important that  
6 could occur either in Custer or Fall River Counties. Two of the 15 local noxious weeds, field  
7 bindweed (*Convolvulus arvensis*) and houndstongue (*Cynoglossum officinale*),  
8 were documented during the vegetation surveys (Powertech, 2009a). Field bindweed was  
9 observed within the greasewood shrubland vegetative community, but its extent was not  
10 reported (Powertech, 2009a). Bindweed can quickly create a dense ground cover with  
11 intertwining stems and prevent other plants and crops from growing (Zollinger, 2000).  
12 Established bindweed is very persistent and difficult to control (Zollinger, 2000). Small or  
13 isolated bindweed plants can be controlled by tilling shortly after growth begins (Zollinger,  
14 2000). Houndstongue was documented in the big sagebrush shrubland vegetative community  
15 near Beaver Creek (Powertech, 2009a). Houndstongue has a deep taproot, making it drought  
16 tolerant, and it is able to quickly establish in areas that have been previously disturbed (Zouhar,  
17 2002). It is poisonous to horses and cattle (Zouhar, 2002). Preventing the dispersal of seeds is  
18 the best way to control the spread of houndstongue (Zouhar, 2002). The presence of other  
19 noxious weeds or invasive plants SDDOA (2011) listed was not reported during the vegetation  
20 surveys conducted for the proposed project.

### 21 22 **3.6.1.2 Wildlife**

23  
24 The applicant conducted wildlife surveys of terrestrial species for the proposed Dewey-Burdock  
25 ISR Project area (Powertech, 2009a). The applicant drew information from these surveys, as  
26 well as several additional reports and studies prepared by SDGFP, Wyoming Game and Fish  
27 Department (WGFD), BLM, FWS, and USFS and a draft environmental statement TVA  
28 prepared for the Edgemont uranium mine to prepare its application (Powertech, 2009a,  
29 Sections 3.5.5.3.1 and 9.3.5; TVA, 1979). Site-specific wildlife surveys targeted bald eagle  
30 winter roost sites, sage-grouse leks, nesting raptors (including eagles), big game, small  
31 mammal vertebrates (bats, mice, and rabbits), and other vertebrate species of concern.

#### 32 33 **3.6.1.2.1 Big Game**

34  
35 Pronghorn antelope (*Antilocapra americana*), mule deer (*Odocoileus hemionus*), white-tailed  
36 deer (*O. virginianus*), and elk (*Cervus elaphus*) are the four big game species present in the  
37 proposed project area; pronghorn antelope is the most common species (Powertech, 2009a).  
38 GEIS Section 3.4.5.1 references a comprehensive listing of species in South Dakota compiled  
39 as part of the South Dakota GAP Analysis Project (South Dakota State University, 2012). NRC  
40 staff reviewed distribution maps provided as part of the South Dakota GAP Analysis Project that  
41 identify the presence of bighorn sheep (*Ovis canadensis*) and mountain lions (*Felis concolor*)  
42 predicted in the vicinity of the proposed project area. SDGFP reports no crucial big game  
43 habitats or migration corridors have been identified within a 1.6-km [1-mi] radius of the study  
44 area (Powertech, 2010a). Crucial areas are those that need to be protected or managed to  
45 maintain viable healthy populations of wildlife. GEIS Section 3.4.5.1 provides maps of areas  
46 that are important for winter survival, called wintering areas, for pronghorn antelope, mule deer,  
47 white-tailed deer, elk, and bighorn sheep, as well as for moose (*Alces alces*); however, no  
48 wintering areas for big game are located in the vicinity of the proposed project area. NRC staff  
49 compiled the GEIS maps from information drawn from WGFD and SDGFP. In addition, BLM  
50 (BLM, 2011) reports there are no crucial birthing (parturition) or wintering habitats for pronghorn

1 antelope, mule deer, white-tailed deer, elk, bighorn sheep, or moose west of the  
2 Dewey-Burdock site in Wyoming.

### 3 4 3.6.1.2.2 Avian Species

5  
6 This section of the SEIS describes bird species identified at the proposed Dewey-Burdock ISR  
7 Project from surveys (Powertech, 2009a) and independent sources.

#### 8 9 **Upland Game Birds**

10  
11 The wild turkey (*Meleagris gallopavo*) and mourning dove (*Zenaida macroura*), both  
12 relatively common species, were the only upland game bird species regularly observed  
13 within the proposed project area during the applicant wildlife surveys. Three grouse species,  
14 including the Greater sage-grouse (*Centrocercus urophasianus*), could potentially occur in the  
15 proposed project area. The Greater sage-grouse is a species of great concern in the arid west  
16 where sagebrush habitat occurs. The sage-grouse is listed as a federal candidate species  
17 (75 FR 13909), or a species that is being considered for listing as endangered or threatened,  
18 and it is discussed in more detail in SEIS Section 3.6.3. Sage-grouse were not observed during  
19 the applicant surveys (Powertech, 2009a). One sage-grouse lek, or breeding area, is located  
20 within 8 km [5 mi] of the western site boundary in Wyoming (Hodorff, 2005; BLM, 2011; WGFD,  
21 2011). Figure 3.6-2 shows the sage-grouse nesting areas in the vicinity of the proposed project.  
22 Figure 3.6-3 more closely shows the occupied sage-grouse leks within and close to 8 km [5 mi]  
23 of the site (WGFD, 2011; Hodorff, 2005). Sharp-tailed grouse (*Tympanuchus phasianellus*) and  
24 ruffed grouse (*Bonasa umbellus*) are not known to breed in the project vicinity. Sharp-tailed  
25 grouse are more likely to potentially occur in the proposed project area than ruffed grouse  
26 because sharp-tailed grouse inhabit short grass prairies of western South Dakota, while ruffed  
27 grouse are found in limited numbers in the forests of the Black Hills (Peterson, 1995; SDGFP,  
28 2012b; South Dakota State University, 2012).


#### 29 30 **Raptors**

31  
32 Suitable habitat for several raptor species occurs in the proposed project area and within a  
33 1.6-km [1-mi] radius of the site. Raptor species observed during the applicant's wildlife surveys  
34 included the bald eagle (*Haliaeetus leucocephalus*), red-tailed hawk (*Buteo jamaicensis*),  
35 golden eagle (*Aquila chrysaetos*), ferruginous hawk (*Buteo regalis*), northern harrier (*Circus*  
36 *cyaneus*), American kestrel (*Falco sparverius*), turkey vulture (*Cathartes aura*), Cooper's hawk  
37 (*Accipiter cooperii*), rough-legged hawk (*Buteo lagopus*), merlin (*Falco columbarius*), great  
38 horned owl (*Bubo virginianus*), and long-eared owl (*Asio otus*) (Powertech, 2009a).

39  
40 The bald eagle, red-tailed hawk, American kestrel, and northern harrier were the most  
41 commonly seen raptor species in the proposed project area (Powertech, 2009a). The red-tailed  
42 hawk is one of the most common hawks in North America that nests in trees in a variety of open  
43 and wooded habitats near ravines or open water. The red-tailed hawk is an opportunistic feeder  
44 and finds its prey, consisting mostly of rodents, from an elevated perch or while soaring  
45 (NPWRC, 2006a). The American kestrel is the smallest and most common falcon and nests in  
46 either natural or manmade crevices. The kestrel requires perches and open space for hunting  
47 small animals and insects (NPWRC, 2006b). The northern harrier prefers prairies and wetlands  
48 with plenty of room to glide across open country in search of small mammals, reptiles, frogs,  
49 insects, and birds. Northern harriers nest on the ground in marshes or areas with low  
50 vegetation (NPWRC, 2006c).



1  
2  
3

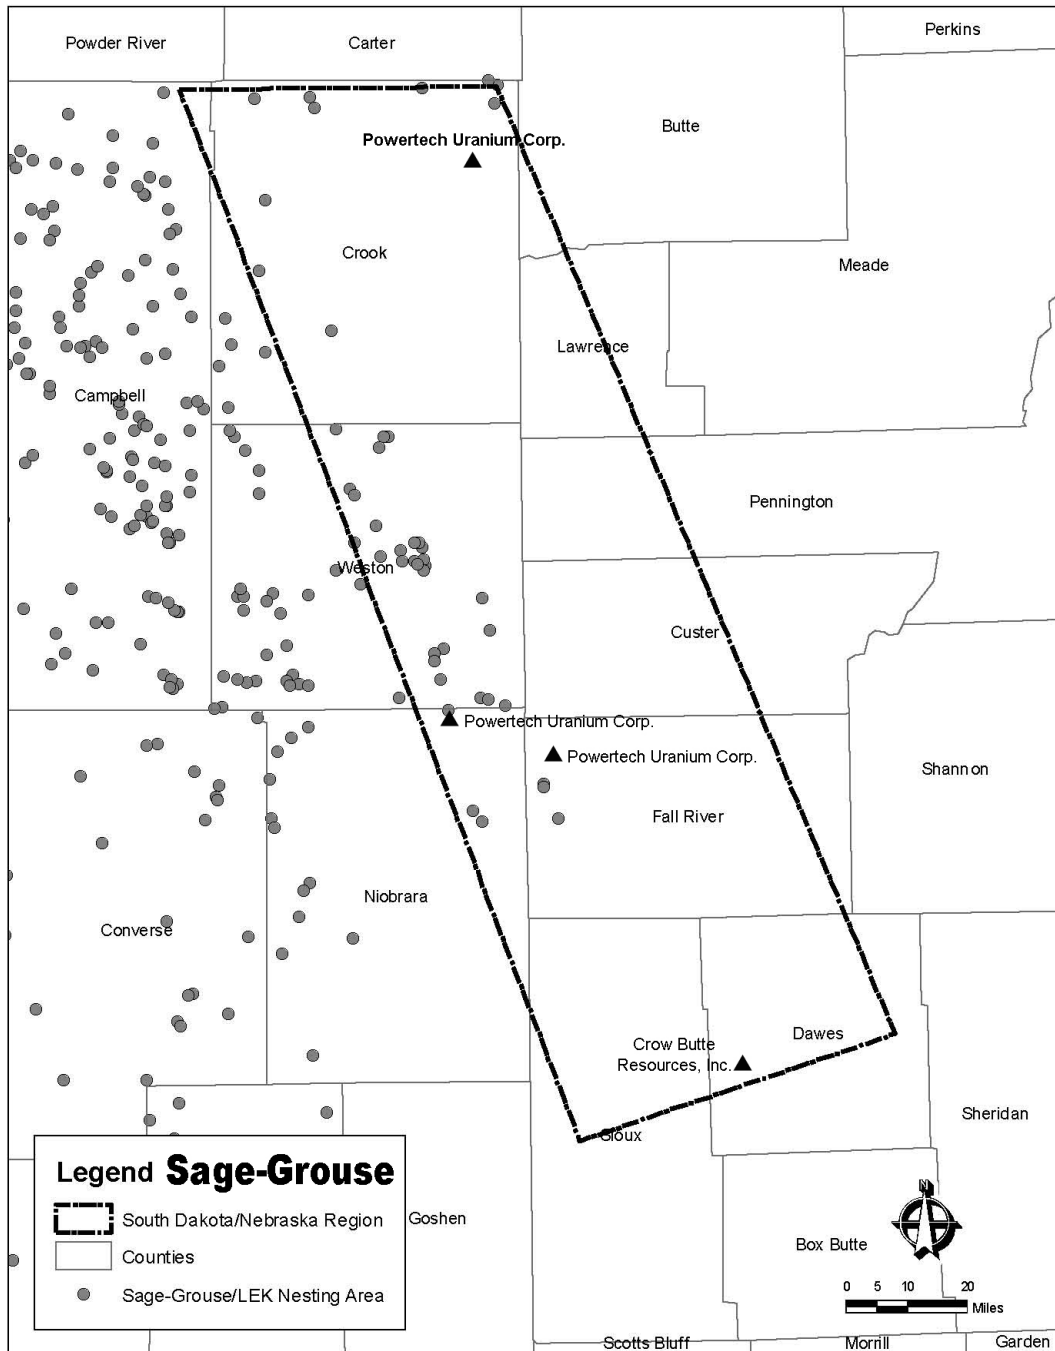

**Figure 3.6-2. Sage-Grouse Lek Areas for the Nebraska-South Dakota-Wyoming Uranium Milling Region.**  
Source: NRC (2009a).

4

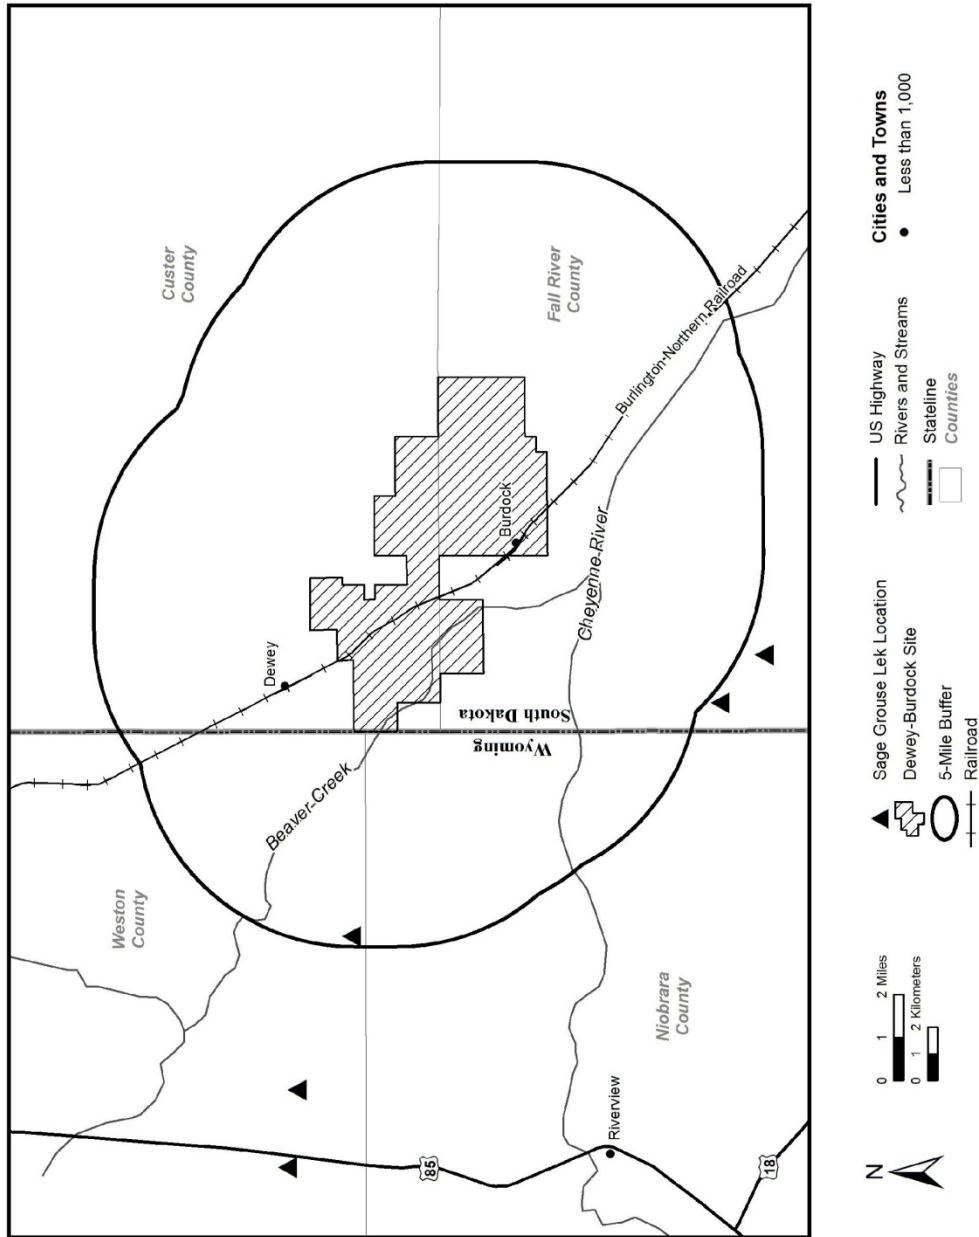


Figure 3.6-3. Occupied Sage-Grouse Leks Near the Proposed Dewey-Burdock Project.  
 Source: NRC (WGFD, 2011; Hodorff, 2005; BLM, 2011).

1 Although additional raptor species may be present in the survey area, particularly as seasonal  
 2 migrants, no additional species were identified. The South Dakota Breeding Bird Atlas reports  
 3 the burrowing owl (*Athene cunicularia*), northern saw-whet owl (*Aegolius acadicus*), and  
 4 Sharp-shinned Hawk (*Accipiter striatus*) have been recorded in the vicinity of the proposed  
 5 project area (Peterson, 1995). The South Dakota SDGFP Natural Heritage Program (SDNHP)  
 6 collects information about these raptors (SDGFP, 2010). SDNHP inventories, protects, and  
 7 manages state species that are rare, imperiled, candidate, threatened, or endangered. SDNHP  
 8 classifies the burrowing owl, northern saw-whet owl, and sharp-shinned hawk as rare.

9  
 10 Five confirmed, intact raptor nests and one potential nest site were observed within the  
 11 proposed project area, and the applicant identified two additional nests within a 1.6-km [1-mi]  
 12 radius of the study area (Powertech, 2009a). The bald eagle, a state-listed threatened species,  
 13 and the long-eared owl, a SDNHP rare species, successfully nested in the proposed project  
 14 area. A merlin, another SDNHP rare species, was recorded at one of the potential nest sites  
 15 within a 1.6-km [1-mi] radius of the proposed project area. SDNHP inventories, protects, and  
 16 manages native plant and animal species and habitats as part of efforts to sustain the biological  
 17 diversity of South Dakota. All eight nests are listed in Table 3.6-2; information on their locations,  
 18 their status, and productivity at the time of the nest surveys in 2007 and 2008 is included.  
 19 Occurrences of the bald eagle, golden eagle, ferruginous hawk, Cooper's hawk, long-eared owl,  
 20 merlin, and other sensitive or protected species observed at the project site are detailed in  
 21 Section 3.6.3.  
 22

**Table 3.6-2. Raptor Nest Locations and Activity Observed for the Proposed Dewey-Burdock Project (July 2007–August 2008)**

Species	16-ha [40-ac] Block, and Section, Township, Range	Habitat	Status	Location (Area)
Long-Eared Owl	SESW 35, 6 South, 1 East	Ponderosa Pine	1 Owl Fledged	Permit Area (Burdock)
Red-Tailed Hawk (2 Nests)	SENE 29, 6 South, 1 East	Ponderosa Pine	1 Hawk Fledged	Permit Area (Dewey)
Red-Tailed Hawk	SESW 34, 6 South, 1 East	Cottonwood-riparian	2 Hawks Fledged	Permit Area (Burdock)
Bald Eagle	Mid-SW 30, 6 South, 1 East	Cottonwood-riparian	1 Eagle Fledged	Permit Area (Dewey)
Bald Eagle*	NENE 31, 6 South, 1 East	Cottonwood-riparian	1 eagle fledged (2010); active but no fledglings (2011)	Permit Area (Dewey)
Merlin	NWSW 36 6 South/1 East	Ponderosa Pine	Nest Defense But No Confirmed Young	Within 1/2 mi of Perimeter (Burdock)
Great Horned Owl	SWNE 5 7 South/1 East	Lone, Live Cottonwood Tree	Status Unknown <sup>†</sup>	Permit Area (Dewey)
Unidentified Hawk	NESW 28 41 North/60 West (Wyoming)	Lone, Dead Cottonwood Tree	Inactive	Within 1 mi of Perimeter (Dewey)

Source: Powertech, 2009a; SDGFP, 2010; SDGFP, 2012c

\*Surveys conducted in 2010 and 2011 by SDGFP

†One adult great horned owl was observed in the nest tree, but no chicks, feathers, droppings, or prey items were observed in or on the nest, or on the ground under the nest.

1 SDGFP provided NRC with eagle surveys conducted on the proposed Dewey-Burdock project  
2 site from 2009 to 2011. SDGFP confirmed the bald eagle nest that Powertech reported as  
3 successful (produced fledgling) on the site during its 2009–2011 surveys was successful with  
4 one fledgling in 2009, but was not active (not occupied by a breeding pair) in 2010 and 2011.  
5 Approximately 1.2 km [0.75 mi] southeast of this nest along Beaver Creek, SDGFP observed an  
6 additional active nest with one successful fledgling in 2010. This nest remained active in 2011  
7 but did not produce a fledgling (SDGFP, 2012c).

### 9 **Waterfowl and Shorebirds**

10  
11 The proposed project area provides limited seasonal habitat for waterfowl and shorebirds,  
12 mainly along Beaver Creek and Pass Creek and the few scattered stocked reservoirs. Limited  
13 precipitation in the area results in little year-round reliable nesting and brood-rearing habitat for  
14 these species. Therefore year-round residence is rare for species present during the spring  
15 migration period. Eight avian species associated specifically with water and/or wetlands were  
16 observed during the applicant baseline surveys: the American white pelican (*Pelecanus*  
17 *erythrorhynchos*), great blue heron (*Ardea herodias*), Canada goose (*Branta canadensis*),  
18 mallard (*Anas platyrhynchos*), American wigeon (*Anas americana*), killdeer (*Charadrius*  
19 *vociferus*), long-billed curlew (*Numenius americanus*), and upland sandpiper (*Bartramia*  
20 *longicauda*) (Powertech, 2009a). Based on the wetland survey results presented in SEIS  
21 Section 3.5.2, the proposed project may affect a total of 14.2 ha [35.1 ac] of wetland channels,  
22 isolated ponds, isolated depressions, and open water. The pelican, heron, and curlew are listed  
23 in the table in Section 3.6.3 (Protected Species) as BLM-sensitive species and in a table in  
24 Section 3.6.3 as rare species in South Dakota.

### 26 **Nongame and Migratory Birds**

27  
28 Other avian species were observed flying over the proposed project area during wildlife surveys  
29 (Powertech, 2009a). The Clark's nutcracker (*Nucifraga columbiana*) was recorded flying over  
30 the proposed project area, but known nesting or other activities were not observed. A total of  
31 36 avian species were observed during targeted breeding bird surveys within the proposed  
32 project area. The long-billed curlew was the only rare SDNHP species of the 36 observed  
33 during the breeding bird surveys, and it was suspected, although not observed, to have nested  
34 in the project area. The western meadowlark (*Sturnella neglecta*) was the most common  
35 species observed, followed by the mourning dove. Nest activity and locations of breeding birds  
36 observed during the applicant's wildlife surveys are summarized in Table 3.6-3.

37  
38 The South Dakota Breeding Bird Atlas reports that the common poorwill (*Phalaenoptilus*  
39 *nuttallii*), Lewis' woodpecker (*Melanerpes lewis*), black-backed woodpecker (*Picoides arcticus*),  
40 pygmy nuthatch (*Sitta pygmaea*), sage thrasher (*Oreoscoptes montanus*), brewer's sparrow  
41 (*Spizella breweri*), and Cassin's finch (*Carpodacus cassinii*) have been recorded in the vicinity  
42 of the proposed project area (Peterson, 1995). SDNHP also designates these birds as rare  
43 (SDGFP, 2010).

#### 45 3.6.1.2.3 Other Mammals, Reptiles, and Amphibians

46  
47 Small- and medium-sized mammalian species surveyed in southwest South Dakota and that  
48 could occur in the vicinity of the proposed project area include coyote (*Canis latrans*), red fox  
49 (*Vulpes vulpes*), raccoon (*Procyon lotor*), bobcat (*Lynx rufus*), badger (*Taxidea taxus*), beaver  
50 (*Castor canadensis*), muskrat (*Ondatra zibethicus*), skunk (*Mephitis mephitis*), porcupine

1

**Table 3.6-3. Breeding Bird Species Observed Within the Proposed Dewey-Burdock Project Area in June 2008**

Species*	Average Number of Birds Per Habitat Type						
	BB	COT GAL	G	GW	P-SB Edge	PP	AVG #/PLOT
Western Meadowlark ( <i>Sturnella Neglecta</i> )	3.0	1.7	2.9	7.0	2.0	—	2.8
Mourning Dove ( <i>Zenaida Macroura</i> )	5.0	1.7	1.9	0.7	0.3	2.0	1.9
<b>Long-Billed Curlew (<i>Numenius Americanus</i>)</b>	—	—	<b>1.9</b>	—	—	—	<b>0.9</b>
Chipping Sparrow ( <i>Spizella Passerina</i> )	—	—	—	0.3	4.0	1.6	0.6
Lark Sparrow ( <i>Chondestes Grammacus</i> )	3.7	—	—	—	1.7	—	0.6
Grasshopper Sparrow ( <i>Ammodramus Savannarum</i> )	—	—	0.1	4.3	—	—	0.5
Northern Flicker ( <i>Colaptes Auratus</i> )	—	4.3	—	0.3	—	—	0.5
Mountain Bluebird ( <i>Sialia Curruoides</i> )	—	—	—	—	2.3	2.0	0.5
Brewer's Blackbird ( <i>Euphagus Cyanocephalus</i> )	—	3.7	—	—	—	—	0.4
Spotted Towhee ( <i>Pipilo Maculatus</i> )	—	1.3	—	0.3	0.7	1.0	0.4
American Kestrel ( <i>Falco Sparverius</i> )	0.3	2.3	0.2	—	—	—	0.4
Brown-Headed Cowbird ( <i>Molothrus Ater</i> )	—	0.3	—	—	2.0	1.0	0.4
House Wren ( <i>Troglodytes Aedon</i> )	—	2.7	—	—	—	—	0.3
Yellow Warbler ( <i>Dendroica Petechia</i> )	—	2.0	—	—	—	—	0.2
Say's Phoebe ( <i>Sayornis Saya</i> )	—	0.3	—	—	1.3	—	0.2
Bullock's Oriole ( <i>Icterus Bullockii</i> )	—	1.7	—	—	—	—	0.2
Unknown Flycatcher	—	—	—	—	—	1.7	0.2
Eastern Kingbird ( <i>Tyrannus Tyrannus</i> )	—	1.3	—	—	—	—	0.1
Red-Tailed Hawk ( <i>Buteo Jamaicensis</i> )	—	0.3	0.1	0.3	—	—	0.1
Black-Capped Chickadee ( <i>Poecile Atricapillus</i> )	—	0.3	—	—	—	0.7	0.1

**Table 3.6-3. Breeding Bird Species Observed Within the Proposed Dewey-Burdock Project Area in June 2008 (continued)**

Species*	Average Number of Birds Per Habitat Type						AVG #/PLOT
	BB	COT GAL	G	GW	P-SB Edge	PP	
Yellow-Rumped Warbler ( <i>Dendroica Coronata</i> )	—	0.3	—	—	—	0.7	0.1
European Starling ( <i>Sturnus Vulgaris</i> )	—	1.0	—	—	—	—	0.1
Great Horned Owl ( <i>Bubo Virginianus</i> )	—	1.0	—	—	—	—	0.1
Vesper Sparrow ( <i>Pooecetes Gramineus</i> )	—	—	0.3	—	—	—	0.1
American Crow ( <i>Corvus Brachyrhynchos</i> )	—	—	0.1	—	—	0.3	0.1
Red-Headed Woodpecker ( <i>Melanerpes Erythrocephalus</i> )	—	0.7	—	—	—	—	0.1
Rock Wren ( <i>Salpinctes Obsoletus</i> )	0.7	—	—	—	—	—	0.1
Western Kingbird ( <i>Tyrannus Verticalis</i> )	1	0.7	—	—	—	—	0.1
American Robin ( <i>Turdus Migratorius</i> )	—	0.3	—	—	—	—	<0.1
Common Nighthawk ( <i>Chordeiles Minor</i> )	—	1	—	—	—	0.3	<0.1
Indigo Bunting ( <i>Passerina Cyanea</i> )	—	0.3	—	—	—	—	<0.1
Killdeer ( <i>Charadrius Vociferous</i> )	—	—	0.1	—	—	—	<0.1
Lazuli Bunting ( <i>Passerina Amoena</i> )	—	0.3	—	—	—	—	<0.1
Western Wood Pewee ( <i>Contopus Sordidulus</i> )	—	—	—	—	0.3	—	<0.1
Yellow-Breasted Chat ( <i>Icteria Virens</i> )	—	0.3	—	—	—	—	<0.1
Red-Winged Blackbird ( <i>Agelaius Phoeniceus</i> )	—	—	1	—	—	—	1
Turkey Vulture ( <i>Carthartes Aura</i> )	1	1	—	—	—	—	1
Average # Birds/Transect	12.3	29.0	7.7	13.3	15.3	10.7	12.4
<b>TOTAL SPECIES</b>	5	23	10	7	10	10	36

Source: Powertech (2009a)

AVG = average; BB = Bentonite Breaks; COT GAL = Cottonwood Gallery; G = Grassland; GW = Greasewood; P-SB = Pine-Sagebrush; PP = Ponderosa Pine; 1 = Incidental flyover during breeding bird survey (not counted in totals).

\***Bold** Long-billed curlew is tracked by the South Dakota Natural Heritage Program—South Dakota Department of Game, Fish, and Parks (SDGFP, 2010) and was suspected, although not observed, to nest within the proposed project area.

1 (*Erethizon dorsatum*), and weasel (*Mustela* spp.) (South Dakota State University, 2012).  
 2 Smaller mammal species, including rodents (mice, rats, moles, voles, shrews, minks, gophers,  
 3 squirrels, chipmunks, prairie dogs), jackrabbits (*Lepus* spp.), and cottontails (hares) (*Sylvilagus*  
 4 spp.), inhabit the area and are often prey for larger mammals (South Dakota State University,  
 5 2012). During the wildlife surveys, small mammals were most frequently observed near Beaver  
 6 Creek in the northwestern portion and Pass Creek in the central portion of the proposed project  
 7 area (Powertech, 2009a). Results of mammal surveys and trapping events are presented in  
 8 Table 3.6-4. Results of spotlight lagomorph (rabbits and hares) surveys are presented in  
 9 Table 3.6-5.

10  
 11 One black-tailed prairie dog (*Cynomys ludovicianus*) colony was observed during wildlife  
 12 surveys in the northwestern corner of the proposed project area (Section 31, T6S, R1E), and  
 13 two others were observed within 1.6 km [1 mi] southwest of the project area (Powertech,  
 14 2009a). SDGFP mapped the prairie dog town within the project boundaries in 2008 and  
 15 provided NRC with the results of its size and location. For landowner privacy purposes, a map  
 16 of the prairie dog town is not presented in this report. The prairie dog town covers  
 17

**Table 3.6-4. Small Mammal Abundance Based on Trappings During Baseline Studies Conducted for the Proposed Dewey-Burdock Project in September 2007**

Species	Captures Per 100 Trap-Nights*						Total
	UG	PP	GW	CG	CB	P/S	
Deer Mouse ( <i>Peromyscus Maniculatus</i> )	6.67	22.86	5.71	16.19	17.14	15.24	11.53
Olive-Backed Pocket Mouse ( <i>Perognathus Fasciatus</i> )	0.71	—	—	—	—	—	0.32
Northern Grasshopper Mouse ( <i>Onychomys Leucogaster</i> )	0.24	—	—	—	—	—	0.11
Western Harvest Mouse ( <i>Reithrodontomys Megalotis</i> )	0.24	—	0.95	—	—	—	0.21
<b>Total Abundance</b>	7.86	22.86	6.67	16.19	17.14	15.24	12.17
<b>Total No. of Species</b>	4	1	2	1	1	1	4

Source: Powertech (2009a)  
 \*Excludes recaptures.  
 CB = Clay Breaks; CG = Cottonwood Gallery; GW = Greasewood; PP = Ponderosa; P/S = Pine/Sage Edge; UG = Upland Grassland

**Table 3.6-5. Total Lagomorphs Observed During Spotlight Surveys and Abundance Indices Within the Proposed Dewey-Burdock Project in September 2007**

	Species		
	White-Tailed Jackrabbit	Cottontail	Totals
Total Count*	12	28	40
Lagomorphs/Survey Mile†	1.5	3.4	4.9

Source: Powertech (2009a)  
 \*Number given is highest count per species from two survey nights.  
 †Survey route totaled 13.1 km [8.2 mi].

1 approximately 321 ha [794 ac] of land in the northwest portion of the project area. The  
2 presence of large, closely spaced prairie dog colonies {on the order of hundred hectares  
3 [several thousand acres]} could support and sustain a breeding population of black-footed  
4 ferrets (*Mustela nigripes*) (BLM, 2009a). According to SDGFP, private landowners and the  
5 public are allowed to shoot prairie dogs on private lands to manage the population in the prairie  
6 dog town (SDGFP, 2005b). It is reasonable to expect that local ranchers may poison and/or  
7 trap prairie dogs for population control. Black-footed ferrets (*Mustela nigripes*) dwell in prairie  
8 dog towns and prey almost exclusively on prairie dogs (USGS, 2006b). The black-footed ferret  
9 is further discussed in Section 3.6.3.

10  
11 The boreal chorus frog (*Pseudacris triseriata*), Woodhouse's toad (*Bufo woodhousei*), great  
12 plains toad (*B. cognatus*), and western painted turtle (*Chrysemys picta*) were heard and/or seen  
13 in Beaver Creek near stock reservoirs in the western portion of the proposed project area during  
14 the applicant's biological surveys. The western spiny softshell (*Trionyx spiniferus*) was also  
15 recorded in Beaver Creek during fisheries surveys, but not within the proposed project area.  
16 The genus *Trionyx* was used prior to the accepted *Apalone* (Somma, 2011). Spiny softshell  
17 turtle (*Apalone spinifera*) is a BLM sensitive species listed in Table 3.6-7. It is likely that the  
18 observed softshell was a spiny softshell turtle subspecies, the western spiny softshell (*Apalone*  
19 *spinifera hartwegi*). Lizards were often observed sunning themselves on rocks and sandy soil  
20 during the summer months. One snake skin, reportedly that of a bullsnake (*Pituophis*  
21 *melanoleucas sayi*), was also observed in the north central portion of the buffer area surveyed  
22 outside of the proposed project area (Powertech, 2009a).

23  
24 The mountain goat (*Oreamnos americanus*) inhabits the Black Hills and prefers steep, rocky  
25 terrain (BLM, 2009a). The mountain goat was not observed on the proposed project site, but  
26 could inhabit the area east of the site according to South Dakota Gap Analysis Project  
27 information (South Dakota State University, 2012).

### 28 29 **3.6.2 Aquatic**

30  
31 As discussed earlier in this section, Beaver and Pass Creeks form the two main drainage basins  
32 located within the proposed project area. Smaller drainages and depressions holding water  
33 adjacent to main drainage corridors provide potential aquatic habitat. The majority of the  
34 surface water features within the project area accumulate only as a result of snowmelt or major  
35 storm events. Old mine pits throughout the proposed project area are also locations where  
36 water accumulates, creating habitat.

37  
38 The lack of permanent aquatic resources within the proposed project area is a factor limiting the  
39 presence of aquatic species. GEIS Section 3.4.5.2 describes the Cheyenne River as one of the  
40 major watersheds in South Dakota. The Cheyenne River originates in eastern Wyoming and  
41 flows along the southern edge of the Black Hills Uplift. The GEIS indicates approximately  
42 45 fish species are found in the Cheyenne River watershed, including species of bass, catfish,  
43 carp, chub, trout, shiner, sunfish, and minnow. GEIS Table 3.4-4 lists the state-designated uses  
44 of the Cheyenne River and Beaver Creek as fisheries, fish and wildlife propagation, recreation,  
45 agriculture, and aesthetics, indicating that the water is acceptable for fishing, boating,  
46 swimming, agricultural irrigation, and growth of aquatic life.

47  
48 The applicant conducted extensive fishery and habitat surveys that provide baseline information  
49 on stream flow and other habitat characteristics, including channel dimensions and features  
50 such as pool, riffle, glide, and run habitat types, sediment composition, water clarity, and



1 specific conductivity, as well as aquatic benthic macro-invertebrate community composition,  
2 and the variety, condition, and relative abundance of fish species (Powertech, 2009a,  
3 Section 3.5.5.5). Radiological monitoring of riverine species was also conducted to establish  
4 baseline concentrations of select radionuclides in fish populations. The sampling locations for  
5 these studies were primarily in Beaver Creek, although additional sampling was conducted in  
6 the Cheyenne River downstream of the proposed project. Pass Creek does not maintain  
7 sufficient water to support aquatic life.

8  
9 Waters classified as impaired are too polluted or otherwise too degraded to meet established  
10 water quality standards and fully support state-designated uses. Beaver Creek is identified  
11 as an impaired water under the criteria in Section 303(d) of the federal Clean Water Act  
12 (33 U.S.C. § 1251 et seq. 1972). The impairments indicate that Beaver Creek may not provide  
13 adequate habitat to provide growth of aquatic life (EPA, 2010b). For the 2008 reporting cycle,  
14 the four areas of impairment for Beaver Creek are specific conductivity, total dissolved solids,  
15 pH, and fecal coliform (EPA, 2010b). An SDDENR-prepared water quality data report points to  
16 livestock as the source of fecal coliform (SDDENR, 2008). Pass Creek is not listed on the  
17 303(d) list as an impaired water body (EPA, 2010b). Cattle grazing is the primary land use at  
18 and in the vicinity of the project area. Grazing activities contribute water pollutants, such as  
19 fecal coliform, and result in increased turbidity. Fecal coliform alters the pH levels and  
20 conductivity of water (EPA, 2006a).

21  
22 Aquatic benthic macroinvertebrate communities, primarily insects, crustaceans, and mollusks,  
23 were sampled as part of habitat surveys in Beaver Creek. The results of these surveys indicate  
24 degraded water habitat conditions, which supports the EPA impaired classification (Powertech,  
25 2009a). The small number and limited range of macroinvertebrate species collected also points  
26 to impaired water conditions. Aquatic insects are food sources for riparian predators, such as  
27 spiders, birds, bats, reptiles, and amphibians, and play an important role in the transfer of  
28 energy and materials from freshwater to terrestrial food webs. In addition, only a few sensitive  
29 species or species unable to tolerate degraded habitat were collected.

30  
31 Twelve fish species were collected from two collection points in Beaver Creek: BVC04, located  
32 upstream of the project area, and BVC01, located downstream of the project area (see  
33 Figure 3.5-2). One collection point, CHR05, is located in Cheyenne River downstream of the  
34 proposed project area past the confluence of Beaver Creek and Cheyenne River (see Figure  
35 3.5-2). Channel catfish (*Ictalurus punctatus*) is the most abundant fish species in Beaver Creek  
36 and the most likely to be caught and eaten by anglers. The 11 other species collected  
37 were the sand shiner (*Notropis stramineus*), creek chub (*Semotilus atromaculatus*), plains  
38 minnow (*Hybognathus placitusa*), common carp (*Cyprinus carpio*), longnosed dace  
39 (*Rhynchichthys cataractae*), fathead minnow (*Pimephales promelas*), river carpsucker  
40 (*Carpoides carpio*), shorthead redhorse sucker (*Moxostoma macrolepidotuma*), plains  
41 topminnow (*Fundulus sciadicus*), plains killfish (*Fundulus zebrinus*), and green sunfish  
42 (*Lepomis cyanellus*) (Powertech, 2009a). Fish were sampled and tested to identify baseline  
43 levels of select radionuclides in fish. The only South Dakota rare fish species collected was the  
44 plains topminnow (SDGFP, 2010), encountered in Beaver Creek downstream of the proposed  
45 project area. Although fish surveys were not conducted within the project area, NRC staff  
46 expect similar fish species encountered upstream and downstream of the site could occur within  
47 the project area.

48  
49 Survey results demonstrated the presence of total uranium in fish species in 2008. The channel  
50 catfish was the only fish species with detectable total uranium levels during the first sampling

1 event in April 2008; however, total uranium was detected in all fish samples from the second  
 2 sampling event conducted in July 2008. Note the laboratory detection limit was lowered for the  
 3 July 2008 sample. All total uranium concentrations were detected at or below 0.5 mg/kg  
 4 [0.5 ppm]. Radioactivity from Po-210, Th-230, and Ra-226 was detected in many fish, but at  
 5 low concentrations. Pb-210 was only detected in one specimen where matrix interference was  
 6 reported (Powertech, 2009a).

7  
 8 South Dakota issues fish consumption advisories for waterbodies with elevated contaminants  
 9 that may be harmful to humans. Sampling activities have occurred in Fall River County at  
 10 Angostura Reservoir and portions of the Cheyenne, and in Custer County at Stockdale Lake  
 11 from 1994 to 2009. No waterbodies in Custer and Fall River Counties were sampled in 2011.  
 12 No fish consumption advisories have been issued as a result of fish collection and sampling  
 13 activities in Custer and Fall River Counties (SDDENR, 2011b).

### 14 3.6.3 Protected Species

15  
 16 Table 3.6-6 identifies species present in Custer and Fall River Counties that are listed as  
 17 federally threatened or endangered (FWS, 2010; Powertech, 2009a). The results of wildlife  
 18 surveys (Powertech, 2009a) and FWS correspondence (FWS, 2010, 2012b) have not identified  
 19 federally listed threatened or endangered species on or within a 1.6-km [1-mi] radius of the  
 20 proposed Dewey-Burdock ISR Project site. NRC staff initially requested information for  
 21 federally listed species on March 15, 2010 (NRC, 2010c); a response was provided on  
 22 March 29, 2010 (FWS, 2010). NRC staff requested updated information from FWS via e-mail  
 23 on August 27, 2012; a response was provided the same day (FWS, 2012b). The bald eagle,  
 24 which is no longer listed federally as threatened or endangered although it is listed as  
 25 threatened by South Dakota, is known to be present at the site and was observed during the  
 26 wildlife surveys (Powertech, 2009a). Endangered and threatened species and designated  
 27 habitats that may be present in the project area are discussed more fully next.  
 28  
 29

**Table 3.6-6. Threatened or Endangered Animals That Occur in Custer and Fall River Counties or Were Observed in the Proposed Dewey-Burdock ISR Project Area\***

Scientific Name	Common Name	Federal Status	State Status	Observed Onsite
<b>Birds</b>				
<i>Centrocerus Urophasianus</i>	Greater Sage-Grouse	Candidate	Not Listed	No
<i>Anthus spragueii</i>	Sprague's Pipit	Candidate	Not Listed	No
<i>Grus Americana</i>	Whooping Crane	Endangered	Endangered	No
<i>Haliaeetus Leucocephalus</i>	Bald Eagle	Delisted	Threatened	Yes
<b>Mammals</b>				
<i>Mustela Nigripes</i>	Black-Footed Ferret	Endangered	Endangered	No
*Sources: FWS, 2010, 2012b; Powertech, 2009a; SDGFP, 2010				

30  
 31

1 The BLM Montana/Dakotas State Director designates sensitive species within the BLM Montana  
 2 State Office jurisdiction as those “requiring special management consideration to promote their  
 3 conservation and reduce the likelihood and need for future listing under the ESA [Endangered  
 4 Species Act]” (BLM, 2008). BLM special status species, collectively, are (i) BLM-designated  
 5 sensitive species and (ii) federally proposed, candidate, and delisted species within 5 years of  
 6 delisting (BLM, 2008). Because approximately 97.1 ha [240 ac] of the proposed project are  
 7 under the control of BLM, NRC considered the BLM special status species that may occur in the  
 8 project area in Table 3.6-7.  
 9

**Table 3.6-7. BLM Special Status Species That May Occur Within the Project Area**

Common Name	Scientific Name	Federal Status	State Status*	General Habitat
<b>Mammals</b>				
Black-Tailed Prairie Dog	<i>Cynomys ludovicianus</i>	BLM Sensitive	SE	Grassland
Swift Fox	<i>Vulpes velox</i>	BLM Sensitive	ST	Grassland
<b>Birds</b>				
Bald Eagle	<i>Haliaeetus leucocephalus</i>	BLM Sensitive	ST	Forest/prairie
Black-Backed Woodpecker	<i>Picoides arcticus</i>	BLM Sensitive		Forest
Blue-Gray Gnatcatcher	<i>Poliophtila caerulea</i>	BLM Sensitive		Shrubland
Burrowing Owl	<i>Athene cunicularia</i>	BLM Sensitive		Grassland
Chestnut-Collared Longspur	<i>Calcarius ornatus</i>	BLM Sensitive		Grassland
Dickcissel	<i>Spiza Americana</i>	BLM Sensitive		Grassland
Veery	<i>Catharus fuscescens</i>	BLM Sensitive		Forest
Ferruginous Hawk	<i>Buteo regalis</i>	BLM Sensitive		Grassland
Golden Eagle	<i>Aquila chrysaetos</i>	BLM Sensitive		Shrubland/grassland
Greater Sage-Grouse	<i>Centrocercus urophasianus</i>	BLM Sensitive and Candidate		Shrubland
Loggerhead Shrike	<i>Lanius ludovicianus</i>	BLM Sensitive		Shrubland
Long-Billed Curlew	<i>Numenius americanus</i>	BLM Sensitive		Grassland
Marbled Godwit	<i>Limosa fedoa</i>	BLM Sensitive		Grassland/wetland
Peregrine Falcon	<i>Falco peregrinus</i>	BLM Sensitive	SE	Forest
Red-Headed Woodpecker	<i>Melanerpes erythrocephalus</i>	BLM Sensitive		Forest
Swainson’s Hawk	<i>Buteo swainsoni</i>	BLM Sensitive		Grassland
Three-Toed Woodpecker	<i>Picoides tridactylus</i>	BLM Sensitive		Forest

1  
2**Table 3.6-7. BLM Special Status Species That May Occur Within the Project Area (continued)**

Common Name	Scientific Name	Federal Status	State Status*	General Habitat
<b>Birds (continued)</b>				
Trumpeter Swan	<i>Plegadis chihi</i>	BLM Sensitive		Wetland
Willet	<i>Cataptrophorus semipalmatus</i>	BLM Sensitive		Grassland/wetland
Wilson's Phalarope	<i>Phalaropus tricolor</i>	BLM Sensitive		Grassland/wetland
<b>Fish</b>				
Banded killifish	<i>Fundulus diaphanus</i>		SE	River/stream
Northern Redbelly Dace	<i>Phoxinus eos</i>	BLM Sensitive	ST	River/stream
<b>Amphibians</b>				
Plains Spadefoot	<i>Spea bombifrons</i>	BLM Sensitive		Grassland/wetland
Northern Leopard Frog	<i>Rana pipiens</i>	BLM Sensitive		Wetland
<b>Reptiles</b>				
Snapping Turtle	<i>Chelyd serpentine</i>	BLM Sensitive		Wetland
Spiny Softshell Turtle	<i>Apalone spinifera</i>	BLM Sensitive		River/stream
Greater Short-horned Lizard	<i>Phrynosoma hernandesi</i>	BLM Sensitive		Grassland
Prairie Hognose Snake	<i>Heterodon nasicus</i>	BLM Sensitive		Grassland
Sources: SDGFP, 2010; BLM, 2009c; BLM, 2012b				
*SE = state endangered species; ST = state threatened species				

3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18

The SDGFP list of rare animals includes those that could become candidates for listing, as well as, locally rare species (SDGFP, 2010). Table 3.6-8 lists nine species, all birds, observed at the proposed project area during the applicant-conducted baseline studies, along with their primary nesting habitats and historical occurrence in the general area. SDGFP takes conservation measures to sustain all native plants and animals and associated habitats. By taking a proactive approach to sustaining native species, listing of species as threatened or endangered can often be prevented.

### **Greater Sage-Grouse**

Greater sage-grouse (*Centrocercus Urophasianus*) is a federal candidate species for threatened or endangered status resident in sagebrush shrubland habitats; sagebrush is essential in every phase of the life cycle of this species. Breeding habitat, referred to as leks, and stands of sagebrush surrounding leks are

**Table 3.6-8. Species Tracked by the South Dakota National Heritage Program Observed in the Proposed Dewey-Burdock Project Area**

Species	Primary Habitat(s)	State Rank During Breeding Season	State Rank During Nonbreeding Season	Occurrence Within Proposed License Area (PLA) or 1.6-km [1-mile] Perimeter
Clark's Nutcracker ( <i>Nucifraga Columbiana</i> )	Pines, Cliffs, and Canyons	S2	S2	Observed Flying Over PLA
Merlin ( <i>Falco Columbarius</i> )	White Spruce, Pines, and Shrublands	S3	S3	Observed East of PLA Within 1 Mile, Presumed Breeder
Long-Eared Owl ( <i>Asio Otus</i> )	White Spruce, Pines, and Shrublands	S3	S3	Observed Within PLA, Breeder
Bald Eagle ( <i>Haliaeetus leucocephalus</i> )	Forests and Cliffs Near Open Water	S1	S2	Observed Within PLA, Breeder
Golden Eagle ( <i>Aquila Chrysaetos</i> )	Cliffs, Canyons, and Grassland	S3, S4	S3	Observed Flying Over PLA Once
American White Pelican ( <i>Pelecanus Erythrorhynchos</i> )	Islands or Sandbars of Large Wetlands	S3	SZ	Observed Flying Over PLA Once
Cooper's Hawk ( <i>Accipiter Cooperii</i> )	Conifer or Deciduous Woodland	S3	SZ	Observed Flying Over PLA Once
Long-Billed Curlew ( <i>Numenius Americanus</i> )	Prairie Grassland	S3	SZ	Observed Within PLA, Likely Breeder
Great Blue Heron ( <i>Ardea Herodias</i> )	Riparian and Wetland	S4	SZ	Observed Flying Over PLA Once
Ferruginous Hawk ( <i>Buteo Regalis</i> )	Prairie Grassland	S4	SZ	Observed

Sources: SDGFP (2010a); Powertech (2009a); SDGFP (2005a).  
S2 = Imperiled because of rarity (6 to 20 occurrences or few remaining individuals or acres) or because of some factor(s) making it very vulnerable to extinction throughout its range.  
S3 = Either very rare and local throughout its range, or found locally (even abundantly at some of its locations) in a restricted range or vulnerable to extinction throughout its range because of other factors; in the range of 21 of 100 occurrences.  
S4 = Apparently secure, though it may be quite rare in parts of its range, especially at the periphery. Cause for long-term concern.  
SZ = No definable occurrences for conservation purposes, usually assigned to migrants.

1 used in early spring; they are particularly important habitat because nesting birds often return to  
2 the same leks and nesting areas each year. Leks are common in more sparsely vegetated  
3 areas, such as ridgelines and disturbed areas adjacent to stands of sagebrush. Threats to the  
4 survival of this species include loss of habitat, agricultural practices, livestock grazing, hunting,  
5 and land disturbances related to energy/mineral development and the oil and gas industry  
6 (Sage-Grouse Working Group, 2006). This species was not identified during the applicant  
7 wildlife inventories, and few have ever been documented on or in the vicinity of the proposed  
8 site because of the limited habitat.

9  
10 On March 5, 2010, FWS published a finding in the *Federal Register* that listing of the greater  
11 sage-grouse as a threatened or endangered species was warranted but precluded by higher  
12 priority listing actions (75 FR 13909). In effect, the species has been put on the federal list of  
13 candidate species, which contains plants and animals that are proposed for listing under the  
14 Endangered Species Act (ESA) Section 4 (75 FR 13909). FWS generally reevaluates the  
15 potential listing of candidate species every 12 months to determine whether the species' status  
16 should change to threatened or endangered at that time. However, due to a litigation settlement,  
17 a final determination whether the species should be proposed for listing under the ESA in the  
18 region is expected by the end of September 2015 (FWS, 2012a).

19  
20 Although the total area of big sagebrush shrubland within the project area is about 1,012 ha  
21 [2,500 ac] (Table 3-6.1), large expanses of contiguous sagebrush that provide optimum  
22 coverage for breeding and wintering are not likely to occur within the project area based on  
23 USFS-conducted studies (Hodorff, 2005). The USFS studies were conducted for a section of  
24 the Buffalo Gap Nation Grassland that begins about 7.2 km [4.5 mi] south of the proposed  
25 project and extends south to the Black Hills Army Depot (Hodorff, 2005). FWS and SDGFP  
26 currently monitor only one lek in Fall River County that is located more than 13 km [8 mi] south  
27 of the site (SDGFP, 2009; Hodorff, 2005). This lek was last reported as active with five males  
28 observed in 2006 (SDGFP, 2012b).

### 29 30 **Sprague's Pipit**

31  
32 The Sprague's pipit (*Anthus spragueii*) is a small bird and a federal candidate species that  
33 nests, breeds, and spends the winter in open grasslands of the United States (FWS, 2011b).  
34 The birds breed in northern states and Canada, and spend the winter in the southern states  
35 and Mexico (FWS, 2011a). Sprague's pipit primarily eats insects, spiders, and some seeds  
36 (FWS, 2011b). Because of its preference to breed in continuous, open grassland about 29 ha  
37 [71.6 ac] or more in size that has not been disturbed, habitat loss, conversion, and  
38 fragmentation threaten the continued existence of this species (76 FR 66370; FWS, 2011b).

39  
40 Sprague's pipits were not observed during applicant-conducted surveys (Powertech, 2009a)  
41 and have not been reported to occur, but are believed to occur, in Custer and Fall River  
42 Counties (USGS, 2006c; FWS, 2012c). Based on results of breeding bird surveys conducted  
43 from 1994 to 2003, potential breeding distribution of the species extends north and northeast of  
44 the Black Hills (FWS, 2012b).

### 45 46 **Whooping Crane**

47  
48 The whooping crane (*Grus Americana*), listed as a state and federal endangered species,  
49 feeds and roosts in wetlands and riverine habitats and upland grain fields, and uses central  
50 South Dakota for migration and staging areas (FWS, 2009). The current nesting range of

1 the self-sustaining natural wild population is restricted to Wood Buffalo National Park in  
2 Saskatchewan, Canada, and the current wintering grounds of this population are restricted to  
3 the Texas Gulf Coast at Aransas National Wildlife Refuge and vicinity (NRC, 2009a). FWS  
4 correspondence indicates that the agency does not have information to confirm that whooping  
5 cranes are present within the proposed project boundaries, but the potential exists for whooping  
6 crane disturbances from proposed mining activities during spring and fall migrations (FWS,  
7 2010). Migration periods occur from late September through October, and between the end of  
8 March and mid-May. Whooping cranes were not observed during applicant-conducted surveys  
9 (Powertech, 2009a); however, FWS recommends vigilant monitoring during proposed mining  
10 activities conducted during spring and fall, and immediate FWS notification if a whooping crane  
11 is observed (FWS, 2010). FWS recommends ceasing mining activities temporarily if a crane is  
12 observed until the bird leaves the area (FWS, 2010).

13

#### 14 ***Bald Eagle***

15

16 The bald eagle was delisted from the Federal List of Endangered and Threatened Wildlife in  
17 July 2007 (72 FR 37346), but continues to be protected under the Bald and Golden Eagle  
18 Protection Act, under the Migratory Bird Treaty Act, and at the state level as a threatened  
19 species. FWS published its National Bald Eagle Management Guidelines in May 2007 (FWS,  
20 2007) to ensure the continued protection of the species. The bald eagle is a large raptor  
21 species with a white head and tail and brown body feathers and is generally associated with  
22 lakes and other large, open bodies of water. Bald eagles prey on fish, small mammals, birds,  
23 and occasionally carrion. Migrating and wintering eagles congregate near open water areas  
24 where concentrations of prey are available, such as carcasses of game animals, and spawning  
25 areas for fish (NRC, 2009a). Two bald eagle nests were observed within the proposed project  
26 area along Beaver Creek during winter roost surveys conducted from 2007 to 2011 (Powertech,  
27 2009a; SDGFP, 2012c) and produced one fledgling each year in 2008, 2009, and 2010. The  
28 first bald eagle nest was observed in 2008 and 2009 approximately 1.6 km [1 mi] west of the  
29 proposed Dewey satellite processing plant in a cottonwood tree along Beaver Creek. The  
30 second bald eagle nest was observed approximately 1.2 km [0.75 mi] southeast of the first nest  
31 along Beaver Creek. Bald eagles spend winter in the Black Hills (SDGFP, 2012a). Project  
32 construction would not directly impact any of these nests or roosts. Individual eagles nesting  
33 and foraging nearby may experience indirect disturbances from the proposed project, described  
34 further in SEIS Section 4.6.

35

#### 36 ***Black-Footed Ferret***

37

38 The black-footed ferret (*Mustela nigripes*) is federally listed as endangered. The species is  
39 native to North America and primarily inhabits the Great Plains region. The black-tailed prairie  
40 dog and the black-footed ferret can use the same habitat. The black-footed ferret is found  
41 almost exclusively in prairie dog colonies in basin-prairie shrublands, sagebrush-grasslands,  
42 and grasslands. The black-footed ferret is a small mammal in the weasel family with a natural  
43 buff-colored body and black face, feet, and tail. It is dependent on prairie dogs for food and all  
44 essential aspects of its habitat, especially prairie dog burrows where it spends most of its life  
45 underground (USGS, 2006b). Potential suitable habitat for the black-footed ferret is present  
46 within the proposed Dewey-Burdock Project area (BLM, 2009a). One black-tailed prairie dog  
47 (*Cynomys ludovicianus*) colony is located in the northwestern corner of the proposed site, and  
48 two additional colonies are present within 1.6 km [1 mi] southwest of the proposed site boundary  
49 (Powertech, 2009a). SDGFP provided NRC staff with a 2008 survey of the prairie dog colony at  
50 the site for review; however, the map is not provided in this report to protect landowner privacy.

1 The colony is approximately 322 ha [795 ac] and is within greasewood shrubland vegetation  
2 community where wellfields D-WF3 and D-WF4 and irrigation areas are planned in the  
3 Dewey area. The presence of large, closely spaced prairie dog colonies {on the order of  
4 several hundred hectares [several thousand acres]} could support and sustain a breeding  
5 population of black-footed ferrets (BLM, 2009a). Because the colony is approximately 322 ha  
6 [795 ac] in size, it is unlikely the colony is large enough to support a breeding population of  
7 black-footed ferrets. However, FWS has reintroduced black-footed ferrets in the Cheyenne  
8 River and Conata Basin, South Dakota, located east of the Black Hills (FWS, 2000). Wind Cave  
9 National Park, South Dakota, is the closest known population to the proposed Dewey-Burdock  
10 Project area (South Dakota State University, 2012). Potential future ferret management  
11 decisions in Wind Cave National Park, South Dakota, and the Thunder Basin National  
12 Grassland, Wyoming, could expand populations into the project area (BLM, 2009a).

13  
14 In 2003, FWS eliminated the requirement to conduct black-footed ferret surveys in the state of  
15 South Dakota in order to identify unknown ferret populations in black-tailed prairie dog habitat  
16 (FWS, 2003a,b). This requirement lift is referred to as an area being “block cleared.” FWS  
17 considers incidental takes of individual ferrets in black-tailed prairie dog habitat that is block  
18 cleared are not an issue and would not affect any wild population. However, permitted block  
19 clearance (no required survey) does not relieve federal agencies of the need to assess a  
20 proposed action’s effect on the species’ survival and recovery. In addition, FWS directs federal  
21 agencies to assess whether a proposed action could adversely affect the value of prairie dog  
22 habitat as a future reintroduction site for the black-footed ferret (FWS, 2003a,b). No  
23 black-footed ferrets have been identified on the proposed Dewey-Burdock ISR Project site, nor  
24 are they known to occur within the proposed Dewey-Burdock ISR Project area (Powertech,  
25 2009a; FWS, 2000; USGS, 2006b).

26

### 27 **3.7 Meteorology, Climatology, and Air Quality**

28

#### 29 **3.7.1 Meteorology and Climatology**

30

31 The proposed project area is located in southwestern South Dakota adjacent to the  
32 southwestern extension of the Black Hills; elevations in the area range between 1,097 and  
33 1,189 m [3,600 and 3,900 ft] (Powertech, 2009a). The area is considered semiarid and  
34 experiences abundant sunshine, low relative humidity, and sustained winds.

35

36 Diurnal and seasonal temperatures vary greatly, and precipitation is generally light. Storm  
37 systems originating in the Pacific lose much of their moisture over the Cascade and  
38 Rocky Mountains before reaching the area.

39

40 The applicant established a weather station near the center of the proposed project area in  
41 July 2007 (Powertech, 2009a). Information collected at this onsite station includes temperature,  
42 wind speed/direction, and precipitation. The onsite data were collected over a 1-year period.  
43 Onsite data were supplemented with data from a meteorological station in Newcastle, Wyoming,  
44 to provide a historical perspective. The Newcastle station, operated by IML Air Science and  
45 located approximately 48.3 km [30 mi] north-northwest of the proposed Dewey-Burdock site,  
46 has collected hourly meteorological data since 2002. Although not a National Weather Service  
47 meteorological station, Newcastle meets the EPA requirements for ambient monitoring  
48 guidelines for the Prevention of Significant Deterioration (Powertech, 2011).

49



1 Newcastle provides a better comparison to the proposed project area in terms of elevation,  
 2 surrounding topography, and proximity to the southwestern flank of the Black Hills than the  
 3 Chadron National Weather Service station located about 105 km [65 mi] south-southeast of the  
 4 proposed project area (Powertech, 2009a, 2011). Chadron is the closest National Weather  
 5 Service station to the proposed Dewey-Burdock site that collects hourly wind data.  
 6 Comparison of wind patterns supports the usage of the Newcastle information because the  
 7 Dewey-Burdock and Newcastle data are similar and quite different from the Chadron site data  
 8 (Powertech, 2011).

### 10 3.7.1.1 Temperature

11  
 12 As discussed in GEIS Section 3.4.6.1, temperatures fluctuate greatly throughout the year in the  
 13 southwestern corner of South Dakota (NRC, 2009a). Summers can be quite warm, while  
 14 winters are typically quite cold. The annual mean temperature from the data collected at the  
 15 onsite station is 7.50 °C [45.5 °F]. July recorded the highest average mean daily temperature at  
 16 24.9 °C [76.8 °F]. January recorded the lowest average mean daily temperature at -9.56 °C  
 17 [14.8 °F] (Powertech, 2011). The proposed Dewey-Burdock site experiences greater mean  
 18 temperature extremes during the hottest part of the summer and the coldest part of the winter  
 19 relative to the Newcastle site. Even so, the onsite data compare favorably and falls within the  
 20 range of the Newcastle historical data. Table 3.7-1 contains both the onsite data and the  
 21 Newcastle station data. The region's low relative humidity contributes to the large diurnal  
 22 temperature variations, which range between about -9.4 and -4.4 °C [15 and 24 °F]  
 23 (Powertech, 2009a). The largest diurnal variation typically occurs in the summer.

### 25 3.7.1.2 Wind

26  
 27 As discussed in GEIS Section 3.4.6.1, windy conditions are common within the proposed project  
 28 area in South Dakota. The average annual wind speed from the data collected from July 2007  
 29

**Table 3.7-1. Site and Regional Monthly Temperature Information in °C\***

Month	Mean Daily Temperature		Mean Daily Minimum Temperature	Mean Daily Maximum Temperature
	Site	Newcastle	Newcastle	Newcastle
January	-9.56	-5.11	-11.4	1.22
February	-4.71	-2.94	-9.44	3.55
March	1.42	1.67	-5.44	7.79
April	6.15	7.17	0.111	14.2
May	11.2	12.9	5.78	20.0
June	17.4	18.3	10.8	25.7
July	24.9	22.9	15.0	30.9
August	24.0	21.8	13.9	29.8
September	17.6	15.8	8.11	23.5
October	9.56	9.00	1.83	16.2
November	1.14	1.05	-5.11	7.22
December	-9.41	-3.67	-9.72	2.39
Annual	7.50	8.22	1.22	15.2

Source: Modified from Powertech (2009c).

\*To convert Celsius (°C) to Fahrenheit (°F), multiply by 1.8 and add 32.

1 to July 2008 at the onsite station was 3.89 m/s [8.7 mph]. The average annual wind speed at  
2 the Newcastle station over that same year was 3.13 m/s [7 mph] and over the 9-year period  
3 from 2002 to 2010 was 3.04 m/s [6.8 mph] (Powertech, 2011). Onsite wind speed averages  
4 were slightly higher than the values at Newcastle.

5  
6 Figure 3.7-1 displays the annual wind rose generated from onsite data. The wind preferentially  
7 comes from the southeast.

### 8 9 **3.7.1.3 Precipitation**

10  
11 As discussed in GEIS Section 3.4.6.1, the proposed project area is located within a semiarid  
12 region that can be quite dry at times (NRC, 2009a). The average annual precipitation from the  
13 data collected at the onsite station is 31.54 cm [12.42 in] (Powertech, 2009a). Monthly totals  
14 ranged from 0.25 to 9.6 cm [0.10 to 3.8 in]. Historical data from the Newcastle station  
15 demonstrated an average annual precipitation of 38.4 cm [15.1 in], which is higher than the  
16 onsite value. Onsite data indicated that the wettest month was May, while the driest month was  
17 November. About 60 percent of the precipitation accumulates over the 3-month period from  
18 May to July. Thunderstorms occur frequently during this period and are responsible for much  
19 of the annual rainfall. The greatest daily onsite precipitation total was 3.28 cm [1.29 in], which  
20 occurred on May 23, 2008. On this date, the proposed project area received 1.8 cm [0.71 in]  
21 of precipitation between the hours of 8 p.m. and 9 p.m., which was the most rainfall within a  
22 1-hour period over the sampled year. The area receives an annual average snowfall of 97 cm  
23 [38 in]. Snowfall can be expected from September through June. However, most snowfall  
24 occurs in March, with an average snowfall of 22 cm [8.5 in] (Powertech, 2009a).


### 25 26 **3.7.1.4 Evaporation**

27  
28 As discussed in GEIS Section 3.4.6.1, the semiarid nature of the proposed project area  
29 produces conditions where evaporation rates exceed precipitation (NRC, 2009a). Applicant-  
30 conducted literary research determined a mean annual lake evaporation rate of 112 cm  
31 [44 in] for the proposed project area (Powertech, 2009c). GEIS Section 3.4.6.1 states the  
32 Nebraska-South Dakota-Wyoming Uranium Milling Region annual pan evaporation rate ranges  
33 from about 102 to 127 cm [40 to 50 in] (NRC, 2009a). Pan evaporation is a technique used to  
34 estimate the evaporation rate of other bodies of water such as lakes or ponds and is applicable  
35 to the various settling, outlet, and surge ponds the applicant proposes.

### 36 37 **3.7.2 Air Quality**

38  
39 In 40 CFR Part 50, *National Primary and Secondary Ambient Air Quality Standards*, EPA  
40 established the National Ambient Air Quality Standards (NAAQS) to promote and sustain  
41 healthy living conditions (see GEIS Section 3.4.6.2). These standards define acceptable  
42 ambient air concentrations for six common air pollutants: nitrogen dioxide (NO<sub>2</sub>), ozone (O<sub>3</sub>),  
43 sulfur dioxide (SO<sub>2</sub>), carbon monoxide (CO), lead (Pb), and particulates (PM<sub>10</sub> and PM<sub>2.5</sub>). EPA  
44 requires states to monitor ambient air quality and evaluate compliance with the NAAQS.

45  
46 Based on the results of these evaluations, EPA designates areas into various NAAQS  
47 compliance classifications (e.g., attainment or nonattainment) for each of the six criteria air  
48 pollutants. These classifications provide a characterization of the air quality within a defined  
49 area. These defined areas range in size from portions of cities to large Air Quality Control  
50

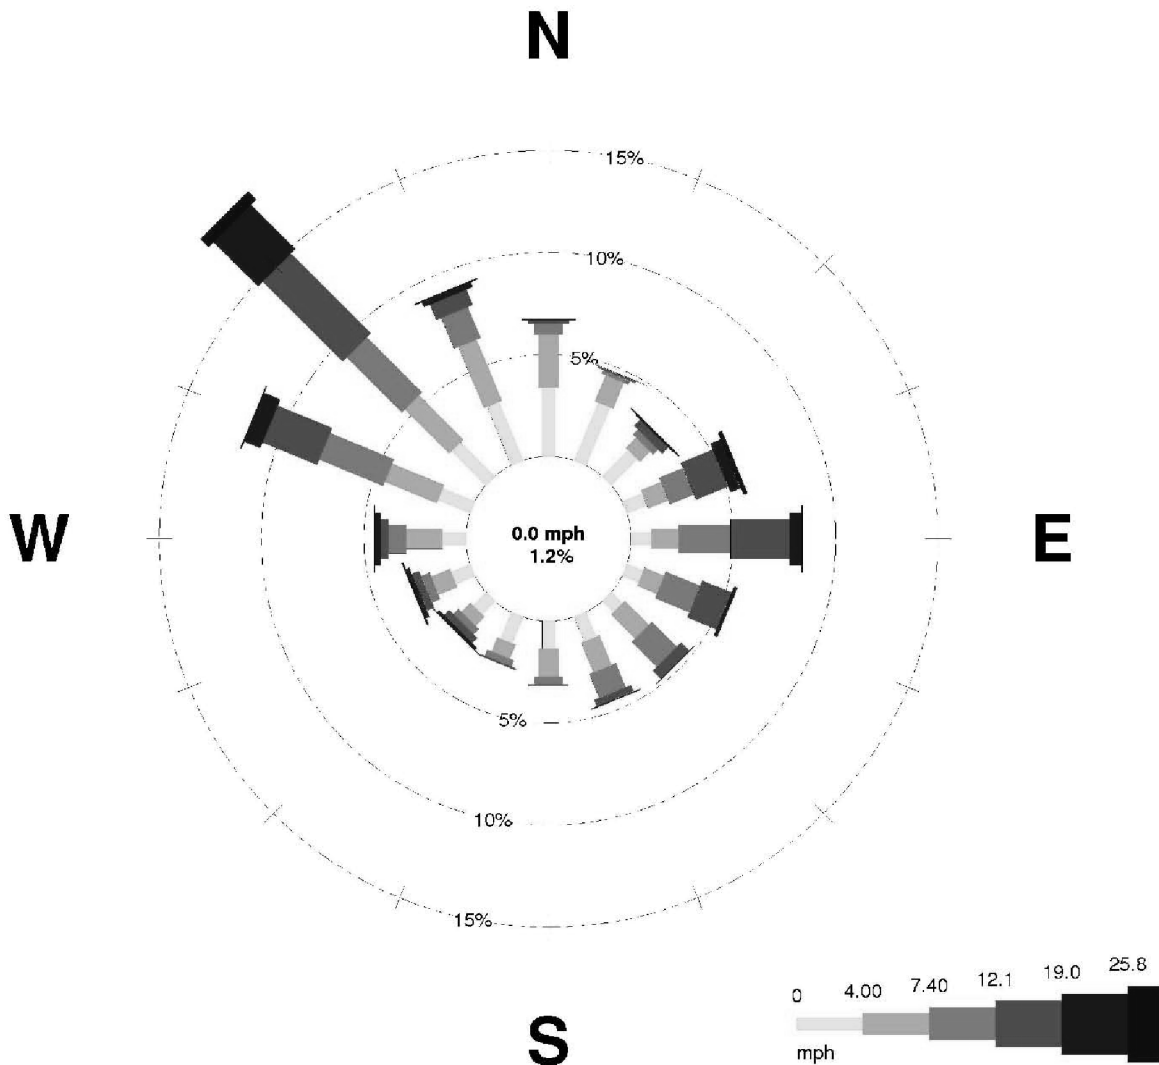

**Figure 3.7-1. Annual Wind Rose Generated From Onsite Data.**  
**Source: Modified From Powertech (2011).**

1  
 2 Regions composed of many counties. An Air Quality Control Region is a federally designated  
 3 area for air quality management purposes. The proposed project area is located in the Black  
 4 Hills-Rapid City Intrastate Air Quality Control Region, which is made up of Butte, Custer, Fall  
 5 River, Lawrence, Meade, and Pennington Counties, South Dakota. The Black Hills-Rapid City  
 6 Intrastate Air Quality Control Region meets all of the NAAQS regulations and, therefore, is  
 7 classified as an attainment area for each criteria pollutant. Based on this attainment  
 8 classification, the air quality in and around the proposed site can be considered good.  
 9 Table 3.7-2 contains air pollutant emissions from EPA's National Emission Inventory for the  
 10 counties within this Air Quality Control Region. The emissions in Table 3.7-2 include both  
 11 stationary and mobile sources. Table 3.7-3 contains pollutant concentrations that reflect the  
 12 existing ambient air conditions.  
 13

**Table 3.7-2. Annual Air Pollutant Emissions in Metric Tons\* From the EPA's National Emission Inventory for Counties in the Black Hills-Rapid City Intrastate Air Quality Control Region**

Area	CO	NO <sub>x</sub>	PM <sub>10</sub>	PM <sub>2.5</sub>	SO <sub>2</sub>	VOC
Butte County	2,426	395	1,745	304	61	379
Custer County	3,543	1,076	2,013	352	75	570
Fall River County	1,761	1,050	1,435	268	82	317
Lawrence County	8,750	1,088	3,338	582	163	1,241
Meade County	11,264	1,474	6,209	1,347	200	1,512
Pennington County	36,680	8,672	7,628	1,635	2,484	5,261
All Six Counties†	64,424	13,755	22,368	4,488	3,065	9,280
Custer and Fall River Counties‡	5,304	2,126	3,448	620	157	887

Source: Modified from EPA (2008) accessed on 28 Dec 2009.

\*To convert metric tons to short tons, multiply by 1.10231.

†The Black Hills-Rapid City Intrastate Air Quality Control Region consists of these six counties.

‡The proposed site located in these two counties.

1

**Table 3.7-3. Existing Conditions—Ambient Air Quality Monitoring Data**

Pollutant*	Averaging Period	Form	2010 Value†*	Percent NAAQS	Location
Carbon monoxide	1 hour	Not to be exceeded more than once per year	0.960 ppm	3	UC #1 site in Union County‡
	8 hour	Not to be exceeded more than once per year	0.276 ppm	3	UC #1 site in Union County
Nitrogen Dioxide	1 hour	98th percentile, averaged over 3 years	3 ppb	3	Wind Cave
	Annual	Annual mean	0.2 ppb	0.4	Wind Cave
Ozone	8 hour	Annual fourth highest daily maximum averaged over 3 years	0.060 ppm	80	Wind Cave
PM <sub>2.5</sub>	24 hour	98th percentile, averaged over 3 years	10.9 µg/m <sup>3</sup> §	31	Wind cave
	Annual	Annual mean, averaged over 3 years	4.8 µg/m <sup>3</sup>	32	Wind Cave
PM <sub>10</sub>	24 hour	Not to be exceeded more than once per year on average over 3 years	85 µg/m <sup>3</sup>	57	Wind Cave
Sulfur dioxide	3 hour	Not to be exceeded more than once per year	0.008 ppm	2	Wind Cave
	1 hour	99th percentile of 1 hour daily max averaged over 3 years	6 ppb	8	Wind Cave

Source: Modified from SDDENR (2011a).

\*Lead is currently not monitored for because of historically low levels in the state. The proposed Dewey-Burdock project is not considered to be a source for airborne lead.

†2010 values represent the appropriate value for NAAQS compliance as described in the "form" column, which in some cases is an average over a 3-year period of measured values. The 3 years of measurement data are not presented here, but are provided in the source document.

‡Wind Cave in Custer County, located 46.7 km [29 mi] from the proposed project area, does not collect carbon monoxide data. The UC#1 site, located in Union County in the southeastern portion of the state, is the only South Dakota station reporting carbon monoxide values in the South Dakota Ambient Air Monitoring Annual Network Plan 2011.

§To convert µg/m<sup>3</sup> to oz/yd<sup>3</sup>, multiply by  $2.7 \times 10^{-8}$ .

1 EPA has revised the NAAQS since the publication of the GEIS. The following information  
 2 updates the NAAQS as documented in GEIS Table 3.2.8. The ozone 1-hour and sulfur dioxide  
 3 annual standards are no longer applicable. Additionally, new standards, not identified in GEIS  
 4 Table 3.2.8, include a nitrogen dioxide 1-hour 100 ppb standard, an ozone 8-hour 0.075 ppm  
 5 standard, and a sulfur dioxide 1-hour 75 ppb standard. EPA has considered lowering the ozone  
 6 standard from 0.075 ppm to 0.070 ppm (EPA, 2011a). Table 3.7-4 contains the updated  
 7 NAAQS. States may develop standards that are stricter or supplement the NAAQS. As  
 8 described in ARSD 74:36:02:02, *Ambient Air Quality Standards*, South Dakota has not adopted  
 9 stricter or supplemental standards.

10  
 11 As discussed in GEIS Section 3.4.6.2, EPA also established Prevention of Significant  
 12 Deterioration (PSD) standards that set maximum allowable concentration increases for  
 13 particulate matter, sulfur dioxide, and nitrogen dioxide pollutants above baseline conditions in  
 14 attainment areas (NRC, 2009a). In part, the purpose of this requirement is to ensure that air  
 15 quality in attainment areas remains good. There are several different classes of PSD areas.  
 16 Different standards were developed for these different classifications, with Class I areas having  
 17 the most stringent requirements. The proposed site is located in a Class II area. The closest  
 18 Class I area near the proposed project is the Wind Cave National Park located in Custer County  
 19 about 46.7 km [29.0 mi] away. Figure 3.2-2 contains a map displaying the locations of the  
 20 proposed project, the Wind Cave National Park, and the other Class I area in South Dakota:  
 21 Badlands National Park.  
 22

**Table 3.7-4. National Ambient Air Quality Standards (NAAQS)**

Pollutant	Averaging Time	Level	Form
Carbon Monoxide	8 hours	9 ppm	Not to be exceeded more than once per year
	1 hour	35 ppm	Not to be exceeded more than once per year
Lead	Rolling 3 month average	0.15 $\mu\text{g}/\text{m}^3$ *	Not to be exceeded
Nitrogen Dioxide	1 hour	100 ppb	98th percentile, averaged over 3 years
	Annual	53 ppb	Annual mean
Ozone	8 hours	0.075 ppm	Annual fourth highest daily maximum 8-hour concentration, averaged over 3 years
Particulate Matter 2.5 $\mu\text{m}$	24 hours	35 $\mu\text{g}/\text{m}^3$	98th percentile, averaged over 3 years
	Annual	15 $\mu\text{g}/\text{m}^3$	Annual mean, averaged over 3 years
Particulate Matter 10 $\mu\text{m}$	24 hours	150 $\mu\text{g}/\text{m}^3$	Not to be exceeded more than once per year on average over 3 years
Sulfur Dioxide	1 hour	75 ppb	99th percentile of 1 - hour daily maximum concentrations, averaged over 3 years
	3 hours	0.5 ppm	Not to be exceeded more than once per year

Source: Modified from EPA (2011b).  
 \*To convert  $\mu\text{g}/\text{m}^3$  to  $\text{oz}/\text{yd}^3$ , multiply by  $2.7 \times 10^{-8}$ .

1 Protection of Class I air quality also includes consideration of visibility and atmospheric  
 2 deposition. Air pollutants can reduce visibility and therefore negatively impact air quality in  
 3 Class I areas. Visibility can be expressed by deciviews. A one deciview change is defined as a  
 4 change in visibility that is just perceptible to an average person. The average annual visibility at  
 5 Wind Cave National Park for the 20 percent haziest days over the 5-year period from 2000 to  
 6 2004 was 5.16 deciviews (SDDENR, 2011a). For the 20 percent clearest days over the same  
 7 time period, the average annual visibility was 15.84 deciviews (SDDENR, 2011a).

8  
 9 Atmospheric deposition refers to processes in which some air pollutants that contain nitrogen  
 10 (e.g., nitrate, ammonium, and nitric acid) or sulfur (e.g., sulfate or sulfur dioxide) are deposited  
 11 into terrestrial or aquatic ecosystems. Examples include (i) wet deposition, where precipitation  
 12 removes pollutants from the air, and (ii) dry deposition where gravity causes the particulates to  
 13 settle out of the air. Atmospheric deposition is expressed as the annual mass of material  
 14 deposited over an area. Total deposition accounts for all of the wet and dry processes. Total  
 15 deposition is often classified into two categories: total nitrogen deposition (i.e., the deposition  
 16 from the various nitrogen-containing pollutants) and total sulfur deposition (i.e., the deposition  
 17 from the various sulfur-containing pollutants). Wind Cave National Park serves as one of the  
 18 Clean Air Status and Trends Network monitoring stations, which in part collects data on air  
 19 deposition. The average annual total nitrogen deposition ranged from 3.19 to 4.80 kg/ha  
 20 [2.84 to 4.27 lb/ac] over the 5-year period from 2006 to 2010, and the total annual sulfur  
 21 deposition ranged from 0.96 to 1.77 kg/ha [0.85 to 1.58 lb/ac] over that same time period  
 22 (EPA, 2012).

23  
 24 EPA has revised the PSD standards since publication of the GEIS (documented in GEIS Table  
 25 3.2-9) as follows. New PM<sub>2.5</sub> standards have been added for two different time frames: annual  
 26 and 24 hours. Table 3.7-5 contains the updated PSD standards.

27  
 28 Temperature and precipitation are two parameters that can be used to characterize climate  
 29 change. Average U.S. temperatures have increased more than 1.1 °C [2 °F] over the past  
 30 50 years and are projected to rise more in the future (GCRP, 2009). From 1993 to 2008, the  
 31 average temperature in the Great Plains increased by approximately 0.83 °C [1.5 °F] when  
 32

**Table 3.7-5. Prevention of Significant Deterioration (PSD) Class I and Class II Standards**

Pollutant	Averaging Time	Class I Level (µg/m <sup>3</sup> )*	Class II Level (µg/m <sup>3</sup> )	Form
Particulate Matter 2.5 µm	Annual	1	4	Annual mean
	24 hours	2	9	Not to be exceeded more than once per year
Particulate Matter 10 µm	Annual	4	17	Annual mean
	24 hours	8	30	Not to be exceeded more than once per year
Sulfur Dioxide	Annual	2	20	Annual mean
	24 hours	5	91	Not to be exceeded more than once per year
	3 hours	25	512	Not to be exceeded more than once per year
Nitrogen Dioxide	Annual	2.5	25	Annual mean

Source: Modified from 40 CFR 52.21.

\* To convert µg/m<sup>3</sup> to oz/yr<sup>3</sup>, multiply by 2.7 × 10<sup>-8</sup>.

1 compared to the 1961 to 1979 baseline (GCRP, 2009). The projected temperature change from  
2 2000 to 2020 in the Great Plains ranges from a decrease of approximately 0.28 °C [0.5 °F] to an  
3 increase of approximately 1.1 °C [2 °F]. The proposed Dewey-Burdock site is considered part  
4 of the Great Plains in this study. Although GCRP did not incrementally forecast a change in  
5 precipitation by decade, it did project a change in spring precipitation from the baseline period  
6 (1961 to 1979) to the next century (2080 to 2099). For the region of South Dakota where the  
7 proposed Dewey-Burdock ISR Project is located, GCRP forecasts a 10 to 15 percent increase  
8 in spring precipitation (GCRP, 2009).

9  
10 The EPA administrator determined that greenhouse gas (GHG) in the atmosphere may  
11 reasonably be anticipated to endanger public health and welfare (74 FR 66496, 2009). As  
12 described in the *Federal Register* notice, the primary scientific basis supporting the  
13 administrator's endangerment finding were the major assessments by the U.S. Global Climate  
14 Research Program, the Intergovernmental Panel on Climate Change, and the National  
15 Research Council. The *Federal Register* notice also states that these assessments indicate  
16 that ambient concentrations of GHG emissions do not cause direct adverse health effects  
17 (e.g., respiratory or toxic effects), but rather cause indirect effects from the associated changes  
18 in climate. Based on EPA's determination, NRC recognizes that GHGs may contribute to  
19 climate change and that climate change may have an effect on health and the environment.

20  
21 GHGs, which can trap heat in the atmosphere, are produced by numerous activities, including  
22 the burning of fossil fuels and agricultural and industrial processes. GHGs include carbon  
23 dioxide, methane, nitrous oxide, and certain fluorinated gases. These gases vary in their ability  
24 to trap heat and in their atmospheric longevity. GHG emission levels are expressed as CO<sub>2</sub>  
25 equivalents (CO<sub>2</sub>e), which is an aggregate measure of total GHG global warming potential  
26 described in terms of CO<sub>2</sub> and accounts for the heat-trapping capacity of different gases. The  
27 Center for Climate Strategies estimated that GHG-producing activities in South Dakota  
28 accounted for approximately 36.5 million metric tons [40.2 short tons] of gross CO<sub>2</sub>e emissions  
29 in 2005; levels of 39.1 and 46.6 million metric tons [43.1 and 51.4 short tons] are forecasted for  
30 years 2010 and 2020, respectively (Center for Climate Strategies, 2007).

31  
32 EPA is promulgating new rules to address GHG emissions under the Clean Air Act permitting  
33 programs (EPA, 2010a). Current requirements are focused on the nation's largest stationary  
34 source GHG emitters. New sources as well as existing sources with the potential to emit  
35 90,718 metric tons [100,000 short tons] per year of CO<sub>2</sub>e, will become subject to EPA PSD  
36 and Title V requirements. Modifications at existing facilities that increase GHG emissions by  
37 at least 68,039 metric tons [75,000 short tons] per year of CO<sub>2</sub>e will also become subject to  
38 Title V requirements.

### 39 40 **3.8 Noise**

41  
42 The proposed Dewey-Burdock ISR Project is located in an undeveloped remote location in open  
43 rangeland and pastureland. Cattle grazing and wildlife habitat is the primary land use. GEIS  
44 Section 3.2.7 estimated that ambient noise levels in this undeveloped, arid, rural area, which is  
45 typical of the Nebraska-South Dakota-Wyoming Uranium Milling Region, would range from 22 to  
46 38 decibels (dBA) (NRC, 2009a). Traffic along Dewey Road leading to the site is expected to  
47 generate noise; however, almost all of the land adjacent to Dewey Road within and in the  
48 vicinity of the proposed project is privately held with limited access (see SEIS Section 3.2 and  
49 Figure 3.2-1).

1 Ambient noise measurements were not part of the applicant's preapplication studies. The  
2 applicant reports the majority of existing ambient noise (i.e., background noise) in the vicinity of  
3 the proposed Dewey-Burdock ISR Project is generated by light automobile and truck traffic  
4 traveling on U.S. Highway 18 and State Highway 89 and freight/coal train operations on the  
5 BNSF railroad, which runs northwest to southeast through the project area (see Figure 3.2-1)  
6 (Powertech, 2009a, 2010a). The BNSF railroad transports coal from mining operations in the  
7 Powder River Basin of Wyoming as well as agricultural, consumer, and industrial products. The  
8 Edgemont, South Dakota, train master reports 50 freight trains pass through the project area  
9 daily (Powertech, 2010a). Noise levels ranging from 75 to 85 dBA are typical for a train  
10 traveling at approximately 80 kph [50 mph] on grade at a distance of 30 m [100 ft] (FRA, 2010).  
11 SEIS Section 2.1.1.1.7 described the applicant's plan to transport equipment, materials,  
12 supplies, yellowcake product, and waste materials by trucks during the lifecycle of the proposed  
13 project. As noted in SEIS Section 3.3, the applicant does not anticipate using the BNSF railroad  
14 as a transportation option for proposed project activities. Therefore, train traffic and associated  
15 noise are not expected to increase due to construction or operational activities at the  
16 proposed site.

17  
18 Noise associated with the proposed project activities is considered because it may interfere with  
19 persons residing in and engaging in recreational activities in the surrounding area. Two  
20 permanent onsite residences, the Putnum dwelling and Beaver Creek Ranch headquarters, are  
21 located approximately 1.3 km [0.8 mi] south and 0.8 km [0.5 mi] west of proposed wellfields in  
22 the Dewey area, respectively (see Figure 3.2-1). The closest offsite residences, the Peterson  
23 and Kennobie dwellings, are located approximately 1.3 km [0.8 mi] southwest and 1.3 km  
24 [0.8mi] south, respectively, of proposed wellfields in the Burdock area (see Figure 3.2-1). Small  
25 communities within 48 km [30 mi] of the proposed Dewey-Burdock ISR Project site include  
26 Edgemont and Hot Springs in Fall River County, South Dakota; Custer in Custer County,  
27 South Dakota; and Newcastle in Weston County, Wyoming. These communities have  
28 populations ranging from 774 to 3,711 (see SEIS Section 3.11.1). Noise levels are expected to  
29 be slightly higher in these communities as a result of traffic and human activities. Rapid City in  
30 Pennington County, the nearest urban area, is approximately 161 km [100 mi] northeast of the  
31 project area. Urbanized communities, such as Rapid City, experience ambient noise levels from  
32 street noise, traffic, emergency vehicles, and construction. Noise levels in these types of urban  
33 areas range from 45 to about 78 dBA, with lower noise levels at night (WSDOT, 2012).

34  
35 A number of recreational areas are present in Custer, Fall River, and Pennington Counties  
36 that could be sensitive to noise impacts. Major attractions include Mount Rushmore National  
37 Memorial, Jewel Cave National Monument, and Wind Cave National Park (see Figure 3.2-2).  
38 These attractions are located more than 32 km [20 mi] north and east of the proposed  
39 Dewey-Burdock ISR Project. Several USFS and state parks may be sensitive to noise impacts.  
40 Parcels of the BHNH border the proposed project area to the east and northeast, and the  
41 Buffalo Gap National Grassland is about 4.8 km [3 mi] south of the project boundary (see  
42 Figure 3.2-2). These lands are protected from extensive development, and the ambient noise  
43 levels would be expected to be similar to undeveloped rural areas (up to 38 dBA) (NRC, 2009a).

44  
45 Noise associated with project activities can also displace wildlife and interfere with wildlife  
46 breeding habits. As described in SEIS Section 3.6.1, the proposed project area supports many  
47 medium to small mammals (e.g., coyote, red fox, raccoon, rodents, jackrabbits, and cottontails)  
48 and avian species (e.g., wild turkey and mourning dove). Big game species that occur in the  
49 proposed project area include pronghorn antelope, mule deer, white-tailed deer, and elk.  
50 However, there are no crucial big game habitats or migration corridors in the proposed project



1 area or within 1.6 km [1 mi] of the project boundary (Powertech, 2010a). Five confirmed, intact  
 2 raptor nests and one potential nest site were observed within the proposed project area, and the  
 3 applicant identified two additional nests within a 1.6-km [1-mi] radius of the study area  
 4 (Powertech, 2009a). One black-tailed prairie dog colony was observed during wildlife surveys  
 5 in the northwestern corner of the proposed project area, and two others were observed 1.6 km  
 6 [1 mi] southwest of the proposed project area (Powertech, 2009a).

7  
 8 There are no federally listed threatened or endangered species within 1.6 km [1 mi] of the  
 9 proposed Dewey-Burdock ISR Project site. The Greater sage-grouse and black-footed ferret  
 10 could potentially occur in the area; however, no sage-grouse or black-footed ferret were  
 11 observed during applicant wildlife surveys (Powertech, 2009a). Of state-listed species, the bald  
 12 eagle is known to occur on and in the vicinity of the site and two bald eagle nests were  
 13 observed during wildlife inventories conducted at the site (Powertech, 2009a; SDGFP, 2012c).  
 14 As described in SEIS Section 3.6.3, the first bald eagle nest was observed in 2008 and 2009  
 15 approximately 1.6 km [1 mi] west of the proposed Dewey satellite processing plant in a  
 16 cottonwood tree along Beaver Creek. A second bald eagle nest was observed approximately  
 17 1.2 km [0.75 mi] southeast of the first bald eagle nest along Beaver Creek.

18  
 19 The Federal Highway Administration (FHWA) has noise impact assessment procedures and  
 20 criteria to help protect the public health and welfare from excessive vehicular traffic noise  
 21 (FHWA, 2006). Recognizing that different areas are sensitive to noise in different ways, FHWA  
 22 established noise abatement criteria (23 CFR Part 772) according to land use. These criteria  
 23 are described in Table 3.8-1.

24  
 25 In situations where existing or expected future sound levels exceed FHWA-set noise  
 26 abatement criteria, an individual is considered to be impacted by noise. Dewey Road crosses  
 27 the southwestern portion of the Burdock area and the central portion of the Dewey area  
 28 (Figure 3.2-1) and is expected to be a source of noise. Vehicular traffic noise levels are  
 29 estimated to range from 54 to 62 dBA for passenger cars and 50 to 70 dBA for heavy trucks at a  
 30 distance of 15 m [50 ft] from a receptor (NRC, 2009a). Noise from line sources, such as roads,  
 31 is reduced by approximately 3 dBA per doubling of the distance from the source (NRC, 2009a).

32  
 33 The maximum sound level of heavy trucks is 70 dBA on roads within the proposed project area,  
 34 such as Dewey Road; this is expected to be diminished to the level of a Category A Activity  
 35

**Table 3.8-1. Noise Abatement Criteria: 1-Hour, A-Weighted Sound Levels in Decibels (dBA)**

Activity Category	Leq(h)*	Description of Activity Category
A	57 (Exterior)	Lands on which serenity and quiet are of extraordinary significance and serve an important public need and where the preservation of these qualities is essential if the area is to continue to serve its intended purposes.
B	67 (Exterior)	Picnic areas, recreation areas, playgrounds, active sports areas, parks, residences, motels, hotels, schools, churches, libraries, and hospitals.
C	72 (Exterior)	Developed lands, properties, or activities not included in Categories A or B above.
D	—	Undeveloped lands.
E	52 (Interior)	Residences, motels, hotels, public meeting rooms, schools, churches, libraries, hospitals, and auditoriums.

Source: 23 CFR Part 772

\*Leq(h) is an energy weighted, 1-hour, A-weighted sound level in decibels (dBA).

1 (57 dBA) at a distance of 480 m [1,575 ft] from the source. However, noise-dampening  
2 characteristics of topographic interference and vegetation are not part of these calculations  
3 (NRC, 2009a). At a distance greater than 480 m [1,575 ft] from Dewey Road, sound levels  
4 generated by heavy truck traffic are expected to be approximately 40 dBA. This calculation  
5 produces a conservative estimate of a baseline for ambient noise that is slightly higher than the  
6 GEIS statement that existing ambient noise levels in this region would be 22 to 38 dBA (NRC,  
7 2009a). GEIS Figure 3.2-17 provides examples of sound levels for common activities  
8 (NRC, 2009a).

### 9

## 10 **3.9 Historic and Cultural Resources**

11  
12 GEIS Section 3.4.8 provides a general overview of historic and cultural resources in  
13 southwestern South Dakota where the proposed Dewey-Burdock ISR Project is located (NRC,  
14 2009a). The proposed project area is located within the prehistoric cultural subarea known as  
15 the Northwestern Plains. This region includes western Minnesota, North and South Dakota,  
16 Wyoming, and portions of eastern Idaho and southern Montana. Prehistoric inhabitants of the  
17 Northwestern Plains existed for 12,000 years as semi-nomadic hunters and gatherers. During  
18 the last 4,000 years, the archaeological record indicates Native Americans living on the  
19 Northwestern Plains primarily used bison for food, clothing, and shelter (Frison, 1991). During  
20 historic times, missionaries and traders were the first non-Indian people to arrive in the Black  
21 Hills followed by settlers, miners, and merchants traveling west to the Oregon Territory or the  
22 goldfields in California, Colorado, and Montana. In the late 1880s, the Black Hills were opened  
23 to homesteaders and an economy based on mining, logging, and ranching developed  
24 (Buechler, 1999).

25  
26 The National Historic Preservation Act (NHPA) requires federal agencies to consider the  
27 effects of their undertakings on historic properties. Historic properties are defined as  
28 resources that are eligible for listing on the National Register of Historic Places (NRHP).  
29 The criteria for eligibility are listed in 36 CFR 60.4 and include (A) association with significant  
30 events in history; (B) association with the lives of persons significant in the past;  
31 (C) embodiment of distinctive characteristics of type, period, or construction; and (D) sites or  
32 places that have yielded or are likely to yield important information (ACHP, 2012). The historic  
33 preservation review process, NHPA Section 106, is outlined in regulations the Advisory Council  
34 on Historic Preservation (ACHP) issued in 36 CFR Part 800.

35  
36 The issuance of a source and byproduct materials license is a federal action that may affect  
37 either known or undiscovered historic properties located on or near the Dewey-Burdock ISR  
38 Project. In accordance with the provisions of the NHPA, NRC is required to make a reasonable  
39 effort to identify historic properties in the area of potential effect (APE). The APE for this review  
40 is the area that may be directly or indirectly impacted by the construction, operation, aquifer  
41 restoration, and decommissioning of the proposed action. If no historic properties are present  
42 or affected, NRC is required to notify the South Dakota State Historic Preservation Office  
43 (SD SHPO) before proceeding. If it is determined that historic properties are present, NRC is  
44 required to assess and resolve possible adverse effects of the undertaking.

45  
46 The Archaeological Resources Protection Act of 1979, as amended [Public Law 96-95;  
47 16 U.S.C. 470aa-mm], which regulates the permitting of archaeological investigations on public  
48 land, including those managed by BLM and South Dakota laws and regulations for the  
49 protection of archaeological resources were followed. Applicable laws and regulations are  
50 discussed more fully in GEIS Appendix B.

1  
2 South Dakota Codified Law (SDCL) 34-27-6, Cemeteries and Burials, specifies the procedures  
3 for the treatment and handling of human remains if human remains are found during proposed  
4 project activities. The Native American Graves Protection and Repatriation Act of 1990  
5 (NAGPRA), as amended [Public Law 101-601; 25 U.S.C. § 3001 et. Seq.] is applicable to  
6 burials found on BLM-managed lands. NAGPRA provides for the protection of Native American  
7 remains, funerary objects, sacred objects, or objects of cultural patrimony and their repatriation  
8 to affiliated tribes following a consultation process between tribes, museums, and/or land  
9 managing federal agencies.

10  
11 The cultural resources investigations for the proposed Dewey-Burdock ISR Project included (i) a  
12 review of available archaeological, ethnographic and ethnological literature, (ii) a search and  
13 evaluation of archaeological records and collections maintained by the South Dakota  
14 Archaeological Research Center (ARC), (iii) archaeological field investigations including  
15 evaluative testing, (iv) preparation of an ethnohistoric background study, and (v) and tribal  
16 consultation for assistance in the identification of places of religious or cultural importance to  
17 Native American tribes. Historic and cultural resources are sites documenting past human  
18 activity containing artifacts, features, or architectural structures, and include sacred places  
19 important to Native American tribes. Eighteen historic properties listed on or recommended  
20 eligible for listing have been located within the proposed Dewey-Burdock ISR Project area  
21 (Kruse et al., 2008; Palmer and Kruse, 2008, 2012; Palmer, 2008, 2009; Palmer and Kruse,  
22 2012). An overview of regional cultural history and archaeology and description and evaluation  
23 of identified historic and cultural resources within the APE are presented in SEIS Sections 3.9.1  
24 and 3.9.2. In SEIS Sections 3.9.3 an overview of places of religious or cultural significance to  
25 Native American tribes is presented. SEIS Section 3.9.4 summarizes NRC consultation efforts  
26 with Native American tribes.

### 27 28 **3.9.1 Cultural History**

29  
30 The archaeological cultural sequence for the proposed project area is divided between the  
31 prehistoric periods (Paleoindian, Plains Archaic, Plains Woodland, and Late Prehistoric/Plains  
32 Village) and the more recent Protohistoric and Historic/Euroamerican cultural periods.  
33 The prehistoric periods encompass about 11,000 years between 12,000 B.P. (before present;  
34 A.D. 950) and 300 B.P. (about A.D. 1700). The Protohistoric and Historic/Euroamerican periods  
35 extend from about A.D. 1700 to A.D. 1959.

36  
37 The proposed Dewey-Burdock ISR Project area is located on the southwestern edge of the  
38 Black Hills Uplift within the geographical area known as the Great Plains. The vegetation within  
39 and surrounding the project area is a mix of short grasses and shrubs typical of semiarid steppe  
40 land along with ponderosa pine forest toward the Black Hills (Powertech, 2009a). The elevation  
41 within the project area ranges from approximately 1,097 to 1,189 m [3,600 to 3,900 ft] above  
42 mean sea level, with the highest elevations along the pine breaks that overlap its eastern  
43 boundary. Topography in the western quarter of the project area consists of gently rolling  
44 terrain, while more varied terrain in the pine breaks and dissected hills comprise the rest of the  
45 project area. Two main streams pass through the project area: Beaver Creek (perennial) and  
46 Pass Creek (intermittent) (see Figure 3.5-2). The primary land use within and in the vicinity of  
47 the project area is cattle grazing (Powertech, 2009a).

### 3.9.1.1 Prehistoric Periods

As mentioned previously, the prehistoric periods are divided into Paleoindian, Plains Archaic, Plains Woodland, and Late Prehistoric/Plains Village. Paleoindian (11,000 to 8,000 B.P.) sites in the region are typically identified by the presence of lanceolate points and date from the Late Glacial, Pre-Boreal, and Boreal climatic episodes. During these episodes, the climate underwent a warming trend and the grasslands and sagebrush steppe expanded at the expense of boreal forests and tundra (Noisat, 1996). Paleoindian groups were nomadic bands of hunters subsisting on big game animals such as mammoth, bison, and muskox. Paleoindian sites are found in diverse settings including protected mountains, foothill areas, and river valleys and in the interior of the Black Hills (BLM, 2009a; Tratebas, 1986). Sites are rarely found on upland prairie and grasslands typical of the Great Plains and Central Plains regions of South Dakota (Frison, 1991). By the end of the Paleoindian period larger game animals were replaced by modern antelope, bison, deer, and elk. These smaller grazers were better adapted to the changing environment that resulted from the onset of warmer and drier conditions in the Holocene era (Hester, 1960).

The Plains Archaic period (8,500 to 1,500 B.P.) in South Dakota is broken into three subperiods: Early, Middle, and Late. The Early Plains Archaic subperiod (8,500 to 5,000 B.P.) is marked by a shift to a warmer and dryer climate (BLM, 2009a). Sites from this period are characterized by semi-subterranean houses that are usually marked by the presence of one or more hearths, firepits, storage pits, and milling basins. These sites suggest that groups in the Early Plains Archaic subperiod participated in seasonal occupation and movement. The presence of various side- and corner-notched projectile points and side-notched knives also suggests a subsistence strategy that included hunting small- and medium-sized game, as well as, exploitation of floral species. Only a few Early Plains Archaic sites have been found in plains, foothill, and mountainous areas of the Black Hills (BLM, 2009a).

During the Middle Plains Archaic subperiod (5,000 to 3,000 B.P.) there was a return to moister, cooler conditions (BLM, 2009a). Middle Plains Archaic groups greatly utilized the Black Hills. Site assemblages reflect a relatively broad spectrum of hunting and gathering strategies, with an emphasis on bison hunting (BLM, 2009a). Site features include prepared pit houses, stone rings, and rock shelters.

The climate during the Late Plains Archaic subperiod (3,000 to 1,500 B.P.) gradually became wetter; grasslands expanded, increasing bison herds (BLM, 2009a). As a result, subsistence strategies shifted toward a more nomadic hunting economy. Recorded communal bison kill sites contain diagnostic Yonkee points (large corner-notched projectile points), which were the preferred method of felling the bison (Winham and Hannus, 1991).

The Woodland Period (2,500 to 1,000 B.P.) throughout the Great Plains is characterized by introduction of new technologies and social practices. In the Black Hills, the Late Archaic and Woodland periods overlapped and Woodland subsistence strategies are similar to those of the Late Plains Archaic period. Gradual changes from the Archaic to Woodland period include a greater reliance on horticulture, the introduction of ceramics, semipermanent dwellings, bow and arrow utilization, and burial mound construction (Grange, 1980; Hill and Kivett, 1940; Hoffman, 1968; Lueck and Winham, 2005). In the Black Hills region, Woodland cultural groups continued a hunting and gathering lifestyle of following bison herds. This nomadic subsistence strategy is evidenced by numerous sites with stone circles (teepee rings), as well as a lack of cultigens or

1 semipermanent dwelling features identified in the archaeological record (Molyneaux,  
2 et al., 2000).

3  
4 The Late Prehistoric/Plains Village period (1,500 to 300 B.P.) heralds the acceptance of new  
5 technologies, such as smaller projectile points adapted for use with arrows (Frison, 1991). Prior  
6 to the Late Prehistoric period, the points were hafted on spears. Also introduced at this time is  
7 earthenware technology, which improves food preparation techniques. Stewing, braising, and  
8 boiling were now possible, which significantly broadened the number of floral and faunal species  
9 that could be utilized. Peoples of the Late Prehistoric/Plains Village period in South Dakota are  
10 similar in many ways to earlier Plains Woodland cultural groups. Very few sites of the Late  
11 Prehistoric/Plains Village period have been documented within Custer and Fall River Counties  
12 (Buechler, 1999).

### 13 14 **3.9.1.2 Protohistoric/Historic Era**

15  
16 The Protohistoric period (A.D. 1700–1840) is characterized by the beginnings of European  
17 interaction with the Plains tribal groups. European metal and decorative goods, firearms, and  
18 the domesticated horse were introduced into the region (Buechler, 1999; Frison, 1991;  
19 Molyneaux, et al., 2000). At the onset of the 18<sup>th</sup> century, tribes historically associated with the  
20 project area include the Crow, Plains Apache, Ponca, Comanche, Kiowa, and Kiowa-Apache  
21 (Buechler, 1999). By 230 B.P., groups of the Lakota Sioux, and to a lesser extent, Arapaho and  
22 Cheyenne, had forced these previous inhabitants out of the region to the south and west  
23 (Buechler, 1999). According to ethnographic accounts written by French Jesuits and fur  
24 trappers, from A.D. 1700 to 1800, the Lakota migrated westward from Minnesota, crossed the  
25 Missouri River, and transitioned from being hunter-gatherers and part-time farmers to nomadic  
26 hunters who primarily relied on bison for food, clothing, and shelter. With the acquisition of the  
27 horse, the Lakota became the dominant culture on the Northern Plains between the Missouri  
28 River and the Rocky Mountains (Robinson, 1904).

29  
30 The Historic/Euroamerican period is subdivided into seven periods: Early Historic  
31 (A.D. 1801 to 1842), Preterritorial (A.D. 1843 to 1867), Territorial (A.D. 1868 to 1889),  
32 Expansion (A.D. 1890 to 1919), Depression (A.D. 1920 to 1939), World War II (A.D. 1940 to  
33 1946), and Post-World War II (A.D. 1947 to 1959). The proposed Dewey-Burdock Project area  
34 has been historically used for cattle ranching, farming, and gold prospecting. The establishment  
35 of Custer County in 1877 was a direct result of Lieutenant George A. Custer's Black Hills  
36 Expedition of 1874, which confirmed the presence of gold within the area (Molyneaux, et al.,  
37 2000). The founding of Rapid City in 1876 created an eastern "gateway" into the heart of the  
38 Black Hills mining region as well as an important transportation hub. By the early 20<sup>th</sup> century,  
39 smaller communities had sprung up along the various railroad lines that facilitated the import  
40 and export of goods and services (Nielsen, 1996).

### 41 42 **3.9.2 Historic and Cultural Resources Identified**

43  
44 NRC staff reviewed the Level III cultural resource investigations and evaluative testing reports  
45 prepared by the Archaeology Laboratory, Augustana College (ALAC) on behalf of the applicant  
46 for the proposed Dewey-Burdock ISR Project (Kruse, et al., 2008; Palmer and Kruse, 2008;  
47 Palmer 2008, 2009). The investigations included an archival and historic review of available  
48 sources, a search of ARC-maintained records and collections, and review of published field  
49 reports. A review of available data shows that six surveys have been conducted within the  
50 proposed APE of the proposed Dewey-Burdock site (Kruse, et al., 2008). A total of 57

1 archaeological sites were previously recorded within the proposed project area  
2 (Kruse, et al., 2008).

3  
4 Recent field investigations were conducted by pedestrian surveys of 4,173 ha [10,311 ac]  
5 between April and August 2007 and of an additional 526 ha [1,300 ac] between July and  
6 September 2008 of the proposed project area. A pedestrian survey was conducted over the  
7 entire APE. The 2007 and 2008 field investigations included evaluative testing at 43 sites. In  
8 2011, evaluative testing was conducted at 20 unevaluated sites located within the APE to  
9 provide data for recommendation on NRHP eligibility (Palmer and Kruse, 2012). The results of  
10 the evaluative testing determined that one site, 39FA1941, is recommended eligible for listing in  
11 the NRHP and 19 sites were recommended ineligible for listing in the NRHP (Palmer and  
12 Kruse, 2012).

### 14 3.9.2.1 Archaeological Sites

15  
16 NRC reviewed site data on over 300 archaeological sites recorded within the APE. During the  
17 field investigation, a number of small, individual sites were combined into larger, single sites.  
18 Two-hundred and twenty sites were determined ineligible for listing in the NRHP when  
19 measured against the evaluative criteria found in 36 CFR 60.4. Eighty of these sites are of  
20 isolated finds (single tool or few (n<10) items with no possibility of buried or other remains; can  
21 be aboriginal or historic; is not eligible by definition [SD ARC, 2006]); these sites lack physical  
22 integrity and context. Approximately 140 of these mostly prehistoric sites were located on highly  
23 disturbed and eroded landforms and have little potential to possess intact, significant buried  
24 cultural deposits.

25  
26 Seventy-four unevaluated sites are documented within the APE. Unevaluated sites are sites  
27 that have not been evaluated for NRHP eligibility. These sites would be subjected to  
28 archaeological testing and mitigation, if appropriate, prior to ground-disturbing activities.

29  
30 Fifteen archaeological sites, including two containing cairns and burials, have been  
31 recommended as eligible for listing in the NRHP (Tables 3.9-1 and 3.9-2). As of this date, SD  
32 SHPO has not concurred with sites recommended eligible to the NRHP. NRHP-eligible sites, as  
33 well as unevaluated archaeological sites with cairn features and burials (Table 3.9-2), are  
34 discussed below.

35  
**Table 3.9-1. List of Historic Properties Within or Adjacent to the APE That Are Currently Listed in the NRHP or Sites Recommended Eligible for Listing in the NRHP\***

Historic Property (Site Number, Structure Identification, or Historic District)	Description	Currently Listed on the NRHP or Recommended Eligible for Listing on NRHP**	Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D
39CU577	Native American/Euroamerican Occupation site; artifact scatter	Eligible	D
39CU2735	Archaic- Prehistoric occupation site	Eligible	D
39CU578	Native American/Euroamerican Dump and occupation site on a ridge slope	Eligible	D

**Table 3.9-1. List of Historic Properties Within or Adjacent to the APE That Are Currently Listed in the NRHP or Sites Recommended Eligible for Listing in the NRHP\* (continued)**

<b>Historic Property (Site Number, Structure Identification, or Historic District)</b>	<b>Description</b>	<b>Currently Listed on the NRHP or Recommended Eligible for Listing on NRHP**</b>	<b>Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D</b>
39CU586	Native American and Late Archaic occupation site on a ridge crest	Eligible	D
39CU588	Native American occupation site on a ridge crest	Eligible	D
39CU2733	Native American hearth and artifact scatter on a ridge slope	Eligible	D
39CU2738	Native American occupation site on a ridge crest	Eligible	D
39CU590	Native American artifact scatter on a ridge saddle	Eligible	D
39CU593	Native American and Euroamerican occupation and artifact scatter on a hill slope	Eligible	D
39CU3592	Native American artifact scatter and hearth site	Eligible	D
39FA1941	Native American artifact scatter and hearth site	Eligible	D
39CU2000	Historic Railroad	Eligible	A and C
39FA2000	Historic Railroad	Eligible	A and C
Sources: Kruse, et al. (2008); Palmer and Kruse (2008, 2012); Palmer (2009)			
*Recommended eligible by ALAC and NRC. SD SHPO has not concurred with these recommendations.			
**The NRHP criteria for eligibility are listed in Section 3.9 of this SEIS.			

1  
2**Table 3.9-2. Dewey-Burdock Burial, Cairn, and Other Sites Within or Adjacent to the APE**

<b>Site Number</b>	<b>Description</b>	<b>Eligibility Designation</b>	<b>Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D*</b>
39CU271	Native American and Archaic artifact scatter and occupation site on a ridge slope with a cairn feature	Eligible	D
39CU584	Native American occupation site and burial on a ridge slope	Eligible	D
39FA1902	Historic site with historic burial and bridge structure	Unevaluated	

**Table 3.9-2. Dewey-Burdock Burial, Cairn, and Other Sites Within or Adjacent to the APE (continued)**

Site Number	Description	Eligibility Designation	Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D*
39FA778	Historic farmstead site	Unevaluated	
39CU3584	Cairn site	Not Eligible under Criterion D	
39CU3587	Two historic Euroamerican burials	Unevaluated	
39CU530	Cairn site	Unevaluated	
39CU3564	Cairn site	Unevaluated	
39CU3620	Cairn site	Unevaluated	
39FA1862	Cairn site with stone circles	Unevaluated	
39FA1863	Cairn site with stone circles	Unevaluated	
39FA1881	Cairn site	Unevaluated	
39FA1890	Cairn site	Unevaluated	
39FA1927	Cairn site	Unevaluated	

Sources: Kruse, et al. (2008); Palmer and Kruse (2008, 2012); Palmer (2009)  
 \*The NRHP criteria for eligibility are listed in Section 3.9 of this SEIS.  
 Note: Table may change pending information received through the tribal consultation. Eligibility recommendations other than 39CU271 are pending concurrence from the SD SHPO.

1  
 2 Site 39CU271 was originally recorded in 1981, and was described as an extensive occupation  
 3 site with at least 184 hearth features, ranging from severely eroded to completely intact  
 4 (Chevance, 1978; Reher, 1981; Buechler, 1999). In 2007, ALAC relocated this site and  
 5 expanded the boundaries to include additional 54 hearth features and a cairn feature. Artifacts  
 6 recovered from the site consist of scrapers, bifaces, points, and other lithic tools. Charcoal  
 7 samples were collected from seven hearths for radiocarbon dating. The radiocarbon test results  
 8 revealed the hearths date from the Late Plains Archaic period to the Plains Woodland period.  
 9 Following testing, Reher (1981) recommended avoidance of 38CU271 and determined that the  
 10 site is eligible for listing in the NRHP (Kruse et al., 2008). In 2007, ALAC revisited the site and  
 11 expanded the boundaries to include additional occupation areas, newly discovered hearths, and  
 12 a cairn feature (Kruse, et al., 2008). While portions of the site have been subjected to wind and  
 13 water erosion, other areas of the site retain intact soil deposits with the potential to contain intact  
 14 cultural deposits (Kruse, et al., 2008).

15  
 16 Previously recorded sites 39CU577, 39CU578, 39CU586, 39CU588, 39CU2733, 39CU2738,  
 17 and 39CU590 are Native American occupation sites, and 39CU2735 is an Archaic site; all were  
 18 determined eligible for listing in the NRHP under Criterion D (Kruse, et al., 2008). Site 39CU593  
 19 is a Native American and Euroamerican occupation and artifact scatter located on a hill slope,  
 20 determined eligible for listing in the NRHP under Criterion D (Kruse, et al., 2008). Site 39CU584  
 21 is a Native American occupation site and contains a burial (affiliation unknown) located on a  
 22 ridge slope, also recommended eligible for listing in the NRHP under Criterion D (Kruse,  
 23 et al., 2008).  
 24



1 Sites 39CU2000 and 39FA2000 are historic railroad sites; under South Dakota law all railroads  
2 are eligible for listing in the NRHP under Criteria A and C. Sites 39CU2000 and 39FA2000 are  
3 separate segments of the Burlington Northern Railroad and part of the original 1889 lines that  
4 linked the communities of Edgemont, South Dakota, and Newcastle, Wyoming, for the  
5 transportation of coal (Kruse, et al., 2008).

6  
7 Site 39CU3592 is a sparse Native American artifact scatter with three hearths and a flint  
8 knapping activity area dating to the Archaic period. This site was recommended eligible for  
9 listing in the NRHP under Criterion D based on evaluative testing performed in 2008 (Palmer  
10 and Kruse, 2008).

11  
12 Site 39FA1941 is a Native American artifact scatter and hearth site located on a ridge top  
13 toward the southeast quadrant of the APE. In 2007, ALAC originally recorded the site (Kruse,  
14 et al., 2008), which underwent evaluative testing in 2011 (Palmer and Kruse, 2012). Twenty-six,  
15 mostly deflated hearth sites were recorded in the testing phase, and radiocarbon dating from  
16 one of the hearths indicates the site dates to the Late Archaic period. While the northern half of  
17 the site lacks integrity and has been destroyed by erosion, the southern half of the site at  
18 Area D possesses intact buried cultural deposits with intact features and associated activity  
19 areas. Site 39CU1941 is recommended eligible for listing under Criterion D (Palmer and Kruse,  
20 2012). While numerous Archaic sites have been recorded in the region, very few possess an  
21 intact cultural zone with the potential to augment the archaeological record of the region (Palmer  
22 and Kruse 2012).

23  
24 Historic and ethnographic evidence indicates that sites with cairn features served as markers for  
25 trails, camps, burials, caches, and ceremonial centers (Kruse, et al., 2008). Sites with burials or  
26 cairn features are listed in Table 3.9-2. This information on cairn features and burials was  
27 confirmed by tribes during consultation. With the exception of site 39CU3584, none of these  
28 sites are located within areas of proposed development. Site 39CU3584 is discussed later in  
29 this section.

30  
31 Site 39FA96, located at the south-central portion of the APE, is a large occupation site with  
32 components that may date from the Paleolithic through the Historic period. Numerous hearths,  
33 artifact scatters, and historic ruins have been identified. Originally recorded as a homestead in  
34 1970s, ALAC revisited the site in 2007 and the boundaries were subsequently expanded to  
35 include 16 new cultural locales (Kruse, et al., 2008). In 2011, the site underwent evaluative  
36 testing (Palmer and Kruse, 2012). The site is large and extends approximately 1,040 m  
37 [3,412 ft] north-south by 1,165 m [3,822 ft] east-west. During the 2011 evaluative testing, the  
38 site was divided into eight concentration areas (Area 1 to Area 8) and a total of 68 hearth  
39 features and artifact scatters were recorded across the site (Palmer and Kruse, 2012).  
40 Samples of charcoal from hearth features in Areas 4 and 6 underwent radiocarbon dating, and  
41 both date to the Late Archaic time period (Palmer and Kruse, 2012). Evaluative testing  
42 demonstrated that the prehistoric component site is a deflated surface scatter of artifacts and  
43 hearths (Palmer and Kruse, 2012). Based on the lack of cultural deposits between the hearth  
44 features, the site may represent a series of short-term occupations. The site probably was  
45 occupied briefly by mobile social and/or family units foraging in the surrounding area and using  
46 the site as temporary residence.

47  
48 One previously documented possible historic burial was identified at Area 3, located at the  
49 center of site 39FA96. During evaluative testing, shovel tests revealed a thin layer of silt  
50 followed by charcoal and chicken bones overlaying bedrock. The tests revealed very shallow

1 soils which terminated when bedrock was hit at 15 cm [5.9 in] below surface. No evidence of  
2 human bones or remains was encountered. The feature was interpreted as the remains of a  
3 modern hunter's campfire with charcoal and chicken bones and is decidedly not a burial (Palmer  
4 and Kruse, 2012).

5  
6 Two log cabins, a cistern, a collapsed outbuilding, a remnant of a foundation, and piles of  
7 foundation rubble were also identified at the southeast corner of site 39FA96 at Area 8. Shovel  
8 tests excavated around the historic cabin structures produced historic artifacts, but no additional  
9 features were identified (Palmer and Kruse, 2012). Additional shovel testing within the historic  
10 cabin structures is planned (Powertech, 2012). A search on the General Land Office Records  
11 on the BLM web site uncovered a 1915 land patent on 64.7 ha [160 ac] for Emaline Richardson  
12 (BLM, 2012a). A copy of the land patent is included in Appendix D.

13  
14 A small portion of site 39FA96 extends onto BLM surface lands. BLM reviewed ALAC's 2012  
15 evaluative testing report (Palmer and Kruse, 2012) and concurred with findings that the site is  
16 heavily deflated and lacks integrity, having been destroyed by natural erosion. Moreover, the  
17 site does not display workmanship or feeling, and is not associated with an important event.  
18 BLM concurs that the portion of site 39FA96 on BLM-administered lands is not eligible for listing  
19 on the NRHP under criteria D (BLM, 2012c). A copy of the BLM letter dated July 20, 2012, is  
20 included in Appendix D.

21  
22 Preliminary information gathered through consultation with the tribes indicate site 39FA96 has  
23 the potential to be of religious and cultural importance to the tribes based on the number of  
24 hearth features and extensive size of the site. NRC staff is awaiting additional information from  
25 the Native American tribes before making a recommendation of eligibility.

26  
27 Site 39FA1902 is an unevaluated site that consists of Native American and Euroamerican  
28 artifact scatters, a well/cistern, a historic bridge, and a possible historic grave located on  
29 scrubland and on a short grass pasture. A linear pile of limestone rocks located on the  
30 northeast edge of site 39FA1902 is purported to be a historic grave by a local informant. The  
31 remnant of a collapsed wooden fence near the rock pile suggests the possible grave was  
32 enclosed by a fence at some time in the past (Kruse, et al., 2008). The historic bridge structure  
33 is discussed in more detail in SEIS Section 3.9.2.2.

34  
35 Site 39FA778 is a historic farmstead, originally recorded in 1983, and consists of corrals, root  
36 cellars, a well, and a house foundation. Historic artifacts consist of clear bottle glass and scatter  
37 of fired brick and milled lumber. The site is unevaluated (Kruse, et al., 2008).

38  
39 Site 39CU3584 consists of a Native American artifact scatter and two cairns located on a hill  
40 top. The artifact scatter dates to the Middle Archaic based on the discovery of one projectile  
41 point. This site lies within the proposed land application area at the Dewey site. The site  
42 underwent archaeological testing and was recommended ineligible for listing in the NRHP under  
43 criteria D, based on a lack of diagnostic artifacts and intact cultural deposits (Kruse, et al., 2008;  
44 Palmer and Kruse, 2012). NRC staff is awaiting additional information from the Native  
45 American tribes before making a recommendation of eligibility.

46  
47 Site 39CU3587 is a prehistoric artifact scatter and two Euroamerican burials enclosed by posts  
48 from a collapsed fence located on a ridge top south of Beaver Creek. The burials were  
49 presumably enclosed by a fence, and only the posts remain. The site is unevaluated (Kruse,  
50 et al., 2008).

1 Site 39CU271 is a Native American occupation site with a total of 238 associated hearth  
2 features and a cairn feature and is eligible for listing in the NRHP. The site was discussed  
3 previously in more detail.

4  
5 Site 39CU530 is a Native American artifact scatter with one cairn and 29 hearths located on a  
6 forested ridge top and slopes. Areas of the site retain intact soil deposits with the potential to  
7 contain intact cultural deposits. The site is unevaluated (Kruse, et al., 2008).

8  
9 Site 39CU3564 is a Native American lithic quarry site and one cairn located on an eroded hill  
10 top. The site is unevaluated (Kruse, et al., 2008).

11  
12 Site 39CU3620 is sparse Native American lithic scatter, a cairn, and eight hearths located on a  
13 ridge slope. The site is unevaluated (Kruse, et al., 2008).

14  
15 Site 39FA1862 is a prehistoric and Native American artifact scatter with three stone circles and  
16 four cairns on an eroded ridge top. The site is unevaluated (Kruse, et al., 2008).

17  
18 Site 39FA1863 is a prehistoric and Native American artifact scatter with a stone circle,  
19 cairn, and stone alignment located on an eroded ridgetop. The site is unevaluated (Kruse,  
20 et al., 2008).

21  
22 Site 39FA1881 is a sparse prehistoric, Native American artifact scatter with a cairn consisting of  
23 10 to 12 large rocks. The site is unevaluated (Kruse, et al., 2008).

24  
25 Site 39FA1890 is a prehistoric, Native American artifact scatter with a cairn consisting of five  
26 visible medium-sized cobbles. The site is unevaluated (Kruse, et al., 2008).

27  
28 Site 39FA1927 is a Native American site consisting of an alignment of six cairns extending  
29 along a grassy ridge top. Ground surface visibility averaged 50 percent, and no artifacts were  
30 identified on the ground surface. The site is unevaluated (Kruse, et al., 2008).

### 31 32 **3.9.2.2 Historic District, Historic Standing Structures, and Bridge Structure**

33  
34 Historic resources within the APE currently listed or recommended eligible for listing on the  
35 NRHP are listed in Table 3.9-3.

36  
37 The Edna and Ernest Young Ranch Historic District is located south of Beaver Creek in the  
38 northwest area of the APE. According to the South Dakota State Historic Preservation Office  
39 (SD SHPO) Historic Sites Survey Form, the Edna and Ernest Young Ranch is a designated  
40 historic National Register District (90000949), added to the NRHP in 1990, under Criterion A,  
41 Exploration and Settlement. This ranch represents the development of "legal homestead  
42 ranching" in southwest Custer County, and the period of historical significance is from 1912 to  
43 1940. The ranch is composed of 13 contributing buildings, 1 contributing structure, the  
44 Bakewell Ranch (CU00000050), and 1 non-contributing structure on a total of 52.6 ha [130 ac].  
45 The main house of the Bakewell Ranch was constructed from sandstone quarried locally. A  
46 copy of the SD SHPO Historic Sites Survey Form for the Edna and Ernest Young Ranch is  
47 included in Appendix D.

**Table 3.9-3. List of Historic Structures Within the APE That Are Currently Listed in the NRHP or Structures Eligible for Listing in the NRHP**

<b>Historic Property (Structure Identification, or Historic District)</b>	<b>Description</b>	<b>Currently Listed on the NRHP or Recommended Eligible for Listing on NRHP</b>	<b>Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D*</b>
Log Barn (Structure CU02500002)	Log barn located at site 39CU3619 was found eligible for listing on NRHP in April 2012 under Criterion A.	Eligible	A
Historic District 90000949- Edna and Ernest Young Ranch	This historic district covers 52.6 ha [130 ac] and is located approximately 4.8 km [3 mi] south of Dewey and south of Beaver Creek. The area of significance is exploration/settlement during the 1900–1924 and 1925–1949. There are 13 contributing buildings, 1 contributing structure and 1 non-contributing structure.	Listed in the NRHP in 1990	A
Bakewell Ranch (Structure CU00000050)	The Bakewell Ranch is located within the Edna and Ernest Young Ranch National Register Historic District	Listed in the NRHP in 1990	A
Sources: Kruse, et al. (2008); Palmer and Kruse (2008, 2012); Palmer (2009) *The NRHP criteria for eligibility are listed in Section 3.9 of this SEIS.			

1  
2 In 2011, an architectural historian evaluated a log barn structure (CU02500002) that is part  
3 of the Richardson Homestead (site 39CU3619) (Palmer and Kruse, 2012). The original  
4 Richardson Homestead is located south of Pass Creek and consists of nine buildings: a  
5 barn, chicken coop, granary, main house, root cellar, bunkhouse, pump house, and two  
6 garages/workshops. Other features that contributed to the setting and feel of the homestead  
7 were a cistern, rubble stone walkway, rock garden, garden plot, clothes line post, corral post  
8 and fence, and evidence of yard plantings (Palmer and Kruse, 2012). The main house was  
9 assessed, determined to lack structural integrity, and recommended as not eligible for listing in  
10 the NRHP. Without the inclusion of the main house, the Richardson Homestead did not qualify  
11 for listing as a historic district in the NRHP. The log barn structure possesses integrity given  
12 that log buildings in the Black Hills typically do not survive as they were not lived-in, permanent  
13 dwellings; they were typically abandoned, burned, or torn down. Thus, individually the log barn  
14 structure was determined eligible for listing on the NRHP under Criterion A (Palmer and  
15 Kruse, 2012).

16  
17 Historic bridge structure (FA00000151) is located within archaeological site 39FA1902  
18 discussed previously. Site 39FA1902 consists of prehistoric and historic artifact scatters, a  
19 well/cistern, a possible historic grave, and a historic wooden bridge that crosses an unnamed  
20 intermittent stream. The bridge is approximately 2.4 m [8.0 ft] long by 5.0 m [16.5 ft] wide, and  
21 the roadway associated with the bridge was not observed except for the approaches. The  
22 bridge appears to have been constructed from locally harvested pine timbers. The NRHP status  
23 of the historic bridge structure is currently unevaluated (Kruse, et al., 2008).

### 3.9.3 Places of Religious or Cultural Significance

Places of religious or cultural significance are resources associated with the cultural practices and beliefs of a living community that are rooted in history and remain important for a group to maintain its cultural heritage. These historic properties may not be represented in archaeological or historic contexts. They are often associated with Native American religious or cultural practices and include traditional gathering areas where particular plants or materials were harvested, a sacred mountain or landscape crucial to a tribe's identity, or burial locations that connect Native Americans with their ancestors. A place of religious or cultural significance to tribes demonstrates traditional cultural value if its significance to Native American beliefs, values, and customs "has been ethnohistorically documented and if the site can be clearly defined" (Parker and King, 1990).

Tribal groups and their descendants, including the historically documented Apache, Arapaho, Arikara, Assiniboine, Cheyenne, Crow, Hidatsa, Kiowa, Mandan, Pawnee, Ponca, Sioux, and Shoshone tribes, have made their homes in the Northern Plains for more than 12,000 years. The Black Hills is considered a place of paramount spiritual importance to tribal groups in the region (SRI, 2012).

A sense of connectedness and duality between the spiritual and earthly worlds in part illustrates the tribal worldview. What is important from a tribal perspective is the interconnectedness between the physical world and spiritual world. For example, in Lakota cosmology, there exists a spiritual realm and earthly realm and what happens in one realm is reflected in the other; the two worlds are interconnected and inform the other (SRI, 2012). Sundstrom (1996) writes that, "The activities and ceremonies conducted in the villages on earth were mirrored by the 'star villages'". Sometimes these realms converge, and the meeting point is reflected in the landscape. Some tribal members are able to interpret a "sacred" landscape or feature and recognize the same spiritual and physical features that made the place sacred to their ancestors. By extension, sacred places are considered sacred to tribal groups today visiting the sacred places and retelling of stories through oral tradition reinforces beliefs.

From the tribal perspective, it is not generally important whose ancestors created the sacred site; therefore, identifying the tribal affiliation of a sacred place is not essential. What is important is that "Indians made the sites, and that their actions are explicable and understandable by contemporary Indians who follow traditional ways. Historic period sites are identified by tribal affiliations when they are known through oral histories." (BLM, 2002)

Past work on the Northern Plains has demonstrated that tribal groups might consider certain types of natural landforms and features culturally and spiritually significant. These landforms and features include mountain tops, cliffs, distinct topographic features, caves, rock shelters, springs and rivers, and especially the intersection between two features. For example, mountain tops may reflect increasing spirituality while cliffs and badlands are considered "Deep Earth" (BLM, 2002)." Bear Butte and/or Bear Butte Lake, Devils Tower (Bear Lodge Peak), Inyan Kara and Harney Peak, and the Race Track are features of significance to one or more of the Northern Plains tribes (Sundstrom 1996). Liebmann (2002) explains that the Big Horn Medicine Wheel, "... is situated at a place in which ... two spiritual realms meet. ... the Big Horn Medicine Wheel lies at the juncture of two supernatural realms—the zenith and nadir; peak and underworld; the connection of spirit domains above and below." According to the BLM Casper Field Office (BLM, 2005), "The presence of flowing water or bodies of water and high isolated locations such as buttes in close proximity to one another were sometimes considered

1 especially powerful or close to the spirits. These kinds of locations were commonly used for  
2 fasting or vision quests.”  
3

4 There are several man-made features that are commonly associated with culturally significant  
5 places. While a hilltop may be the physical setting for fasting, prayer, or a vision quest, man-  
6 made features associated with the sacred place may include vision quest structures, cairns,  
7 rock clusters, and stone alignments (SRI, 2012). Hand-laid stone alignments typically function  
8 as “directional markers/prayer lines associated with major ceremonial sites ... or drive lines ... to  
9 channel ... deer, antelope and bison.” (BLM, 2002)

10  
11 Sundstrom (2006), following Abbott, Ranney, and Whitten (1982), defines a cairn as “a pile of  
12 stones on the surface; this may have collapsed into a mosaic [an arrangement of stones in the  
13 form of a solid figure or pavement].” Cairns have been found in a variety of contexts, including  
14 markers for ceremonial sites, trail markers, memorials to notable events or people, medicine  
15 wheels, and to demarcate burials (e.g., Hall, 1985; Liebman, 2002; Sundstrom, 2006; USFS,  
16 2004; BLM, 2002; Surface Transportation Board, 2010; SRI, 2012). Medicine wheels are rock  
17 alignments that have a cairn or stone circle at their centers from which stone alignments are laid  
18 out like spokes on a wheel (SRI, 2012).

19  
20 Graves, burials, and cemeteries should be treated with respect and should not be disturbed.  
21 Tribal peoples continue to visit graves to pray and make offerings. There are several forms of  
22 burials including graves, cairns, and burial mounds. Burial mounds are found in eastern  
23 South Dakota and are not present within the APE (Winham and Hannus, 1990).

24  
25 Physical landforms and landscape features within the APE that might possess cultural  
26 significance include (SRI, 2012):  
27

- 28 • Bone beds
- 29 • Depressions
- 30 • Hills (conical shaped, “humped back,” or odd shaped)
- 31 • Hilltops (ridge and flat top)
- 32 • Natural rock formations
- 33 • Quarries (fossil, mineral, and rock)
- 34 • Prominent knolls
- 35 • Promontories
- 36 • Rimrock
- 37 • Rockshelters
- 38 • Rugged, high altitude, isolated topographic features

39  
40 Examples of man-made features and site types located within the APE that might be considered  
41 places of religious and cultural importance to the Northern Plains tribes (SRI, 2012):  
42

- 43 • Archaeological sites
- 44 • Battle sites
- 45 • Burial mounds (not included in regions for Cameco/Powertech project areas)
- 46 • Burials
- 47 • Eagle catching sites/eagle trapping pits and lodges
- 48 • Fasting sites/structures
- 49 • Dance locations (e.g., Ghost Dance, Sun Dance)

- 1 • Medicine wheels
- 2 • Memorials
- 3 • Monuments
- 4 • Paint sources
- 5 • Pilgrimage/trail marker cairns
- 6 • Offerings and prayer sites (may include trees, springs, rock art, rivers)
- 7 • Rock art/petroglyphs
- 8 • Sacred sites (personal religious observations along the lines of the vision quest)
- 9 • Stone alignments
- 10 • Stone cairns
- 11 • Stone circles/rings (very large and very small)
- 12 • Sweat lodges
- 13 • Vision quest sites/structures

14  
15 Through continued consultation with the tribes and an onsite field assessment, places  
16 that possess cultural and religious significance to the tribes may be identified. Any  
17 identification of sacred or traditional places must be verified in consultation with authorized  
18 tribal representatives.

#### 19 20 **3.9.4 Tribal Consultation**

21  
22 The federal government and the State of South Dakota recognize the sovereignty of federally  
23 recognized Native American tribes. Pursuant to NHPA Section 106, federal agencies are  
24 required to undertake consultation and coordination with each tribal government that may have  
25 an interest in a proposed federal action. Consultation with the tribes that have heritage interest  
26 in the proposed Dewey-Burdock ISR Project is ongoing. Executive Order 13175 (November  
27 2000), *“Consultation and Coordination with Indian Tribal Governments,”* excludes from the  
28 requirements of the order, “independent regulatory agencies, as defined in 44 U.S.C. §3502(5).”  
29 However, according to Section 8, “Independent regulatory agencies are encouraged to comply  
30 with the provisions of this order.” Although the NRC is explicitly exempt from the Order, the  
31 Commission remains committed to its spirit. The agency has demonstrated a commitment to  
32 achieving the Order’s objectives by implementing a case-by-case approach to interactions with  
33 Native American tribes. NRC’s case-by-case approach allows both NRC and the tribes to  
34 initiate outreach and communication with one another.

35  
36 As part of its obligations under Section 106 of the NHPA and the regulations at 36 CFR  
37 800.2(c)(2)(B)(ii)(A), NRC must provide Indian tribes “a reasonable opportunity to identify its  
38 concerns about historic properties, advise on the identification and evaluation of historic  
39 properties and evaluation of historic properties, including those of religious and cultural  
40 importance, articulate its views on the undertaking’s effects on such properties, and participate  
41 in the resolution of adverse effects.” The NRC identified 20 Native American tribes that attach  
42 historical, cultural, and religious significance to sites within the Dewey-Burdock ISR Project  
43 area. The NRC continues consultation on historic properties with the following tribes:

- 44
- 45 • Cheyenne River Sioux Tribe
- 46 • Crow Creek Sioux Tribe
- 47 • Flandreau Santee Sioux Tribe
- 48 • Lower Brule Sioux Tribe
- 49 • Oglala Sioux Tribe

- 1 • Rosebud Sioux Tribe
- 2 • Sisseton-Wahpeton Sioux Tribe
- 3 • Standing Rock Sioux Tribe
- 4 • Yankton Sioux Tribe
- 5 • Three Affiliated Tribes (Mandan, Hidasta, and Arikara Nation)—North Dakota
- 6 • Turtle Mountain Band of Chippewa—North Dakota
- 7 • Spirit Lake Tribe—North Dakota
- 8 • Lower Sioux Indian Community—Minnesota
- 9 • Fort Peck Assiniboine and Sioux—Montana
- 10 • Northern Cheyenne Tribe—Montana
- 11 • Northern Arapaho Tribe—Wyoming
- 12 • Eastern Shoshone Tribe—Wyoming
- 13 • Ponca tribe—Nebraska
- 14 • Crow Tribe—Montana
- 15 • Santee Sioux Tribe—Nebraska

16  
17 NRC staff formally initiated the Section 106 consultation process for the proposed  
18 Dewey-Burdock ISR Project by contacting 20 tribal governments by letters dated March 19,  
19 2010 (SEIS Section 1.7.3.5, NRC 2010a). Additional invitations to consult with the NRC  
20 concerning the proposed project were sent to tribes on September 10, 2010 and March 4, 2011  
21 (NRC 2010b, NRC 2011). NRC staff invited the tribes to participate as consulting parties in the  
22 NHPA Section 106 process and sought their assistance in identifying tribal historic sites and  
23 cultural resources that may be affected by the proposed action. SEIS Section 1.7.3.5 describes  
24 consultation activities undertaken by NRC with tribal governments. Consultation  
25 correspondence associated with the Section 106 process is presented in Appendix A. At this  
26 time, consultation concerning the identification of and evaluation for listing in NRHP of  
27 properties of religious and cultural significance to the tribes is ongoing.

28

### 29 **3.10 Visual and Scenic Resources**

30

31 As noted in GEIS Section 3.4.9, the Nebraska-South Dakota-Wyoming Uranium Milling Region  
32 is located within the Great Plains physiographic province adjacent to the southern end of the  
33 Black Hills. Vegetation within and in the vicinity of the proposed Dewey-Burdock ISR Project  
34 area is a mix of short grasses and shrubs typical of semiarid steppe land along with Ponderosa  
35 Pine forest toward the Black Hills (Powertech, 2009a). Springtime landscape color varies from  
36 light brown and green to dark green with wildflowers; dry winter season colors range from light  
37 brown to golden. The proposed project area is located in an undeveloped remote location with  
38 most of the land currently being used for grazing activities and associated facilities (e.g., fences,  
39 stock wells, and a few stock reservoirs). Infrastructure within the project area includes the  
40 BNSF Railroad (see Figure 3.2-1) that runs north through Edgemont toward Newcastle,  
41 Dewey Road that parallels the BNSF Railroad to the town of Dewey, overhead electricity lines,  
42 and several gravel and dirt access roads.

43

44 Elevation within the project area ranges from 1,097 to 1,189 m [3,600 to 3,900 ft] above mean  
45 sea level, with the highest elevations along pine breaks that overlap the eastern boundary of the  
46 project area (Powertech, 2009a). Topography within the project area and surrounding lands is  
47 gently rolling in the western quadrant, with more varied terrain in the pine breaks and dissected  
48 hills covering the rest of the project area. Two main streams pass through the proposed project  
49 area: Beaver Creek (a perennial stream) and Pass Creek (an intermittent stream). Pass Creek



1 joins Beaver Creek southwest of the proposed project area. Approximately 4 km [2.5 mi]  
2 south of the confluence of Beaver and Pass Creeks, Beaver Creek converges with the  
3 Cheyenne River.

4  
5 Parcels of BHNF are located east and northeast of the proposed project boundary. The BHNF  
6 management plan and subsequent amendments have the objective of maintaining 85 percent of  
7 the region for low to moderate scenic integrity (USFS, 1997, 2001, 2005). USFS classifies  
8 areas that have not been subject to human-caused disturbances that detract from the character  
9 of the dominant landscape (e.g., the forested hillsides, towering rock formations, meadows, and  
10 tranquil streams that typify the Black Hills landscape) as having a high level of scenic integrity  
11 (USFS, 2005). Wind Cave National Park in South Dakota, which is approximately 47 km [29 mi]  
12 east of the proposed Dewey-Burdock ISR Project site, is designated a Prevention of Significant  
13 Deterioration Class I area. SEIS Section 3.7.2 states that Prevention of Significant Deterioration  
14 Class I areas must meet more stringent air quality standards because air quality may impact  
15 visual resources.

#### 16 Visual Resource Management Classes

17  
18  
19 BLM evaluates the scenic or visual quality of the land it manages using the Visual Resource  
20 Inventory to assess the scenic value of a property and ensure that its value is preserved (BLM,  
21 1986). In compiling the inventory, BLM completed a scenic quality evaluation, a sensitivity-level  
22 analysis, and a delineation of distance zones for properties; each property or area is assigned to  
23 one of four visual resource management (VRM) classes (BLM, 1984). Class I is most protective  
24 of visual and scenic resources, and Class IV is least restrictive.

25  
26 As described in GEIS Section 3.4.9, BLM has assigned most areas in the Nebraska-South  
27 Dakota-Wyoming Uranium Milling Region as VRM Classes II through IV. Currently, BLM  
28 has not assigned a VRM classification to the region encompassing the proposed  
29 Dewey-Burdock ISR Project area. The South Dakota BLM field office resource management  
30 plan identifies the natural vegetation of the region as wheatgrass, grama grass, sagebrush, and  
31 pine savanna (BLM, 1985). Areas in Wyoming adjacent to the proposed site are identified as  
32 VRM Classes III and IV (BLM, 2000).

33  
34 The applicant conducted a visual resource inventory to determine the scenic quality rating  
35 (SQR) of the proposed project area and surrounding 3.2-km [2-mi] area (Powertech, 2009a).  
36 The SQR is determined by rating key visual factors (e.g., landform, vegetation, water, color,  
37 adjacent scenery, scarcity, and cultural modifications) according to form, line, color, texture,  
38 scale, and space on a comparative scale from zero to five (BLM, 1986). The visual resource  
39 inventory was conducted for two SQR units within the proposed project area that demonstrated  
40 similar physiographic characteristics. The total scores of the two SQR units were 11 and 13  
41 (Powertech, 2009a). According to NUREG-1569, if the visual resource evaluation rating is  
42 19 or less, no further evaluation or special management of scenic resources is required (NRC,  
43 2003). Based on the scenic quality inventory and evaluation, the applicant classified the project  
44 area and the 3.2-km [2-mi] area surrounding the project area as VRM Class IV (Powertech,  
45 2009a). The objective of this class is to manage activities that might require major modifications  
46 of the existing character of the landscape (BLM, 1986). The level of change permitted for this  
47 class is the least restrictive and can be high.

48  
49 USFS has performed visual resource classification in the vicinity of the project area as part of its  
50 regional forest and grasslands management plans. USFS (2009) classified almost 95 percent

1 of grasslands in Fall River County as having a low to moderate scenic integrity objective. A  
2 region with a low scenic integrity objective has a natural landscape that has been moderately  
3 altered (USFS, 1974, 1995). While visual changes that dominate the characteristic landscape  
4 are permitted, visual changes must be compatible with the forms, lines, colors, and textures of  
5 the existing natural surroundings. Landscapes classified as having a moderate scenic integrity  
6 objective have undergone only slight alterations; however, new forms, lines, colors, or textures  
7 may be introduced to the landscape only as long as changes are visually subordinate to the  
8 natural setting (USFS, 1995, 1974).

### 9 10 **3.11 Socioeconomics**

11  
12 The proposed Dewey-Burdock ISR Project is located in the Nebraska-South Dakota-Wyoming  
13 Uranium Milling Region. General socioeconomic factors associated with this region are  
14 described in GEIS Section 3.4.10 (NRC, 2009a). Socioeconomic region of influence (ROI) is  
15 defined as the area where employees and their families would reside, spend their income, and  
16 use their benefits, thereby affecting the economic conditions in the region. This section  
17 describes current socioeconomic conditions and local community services within the ROI  
18 surrounding the proposed site that may be directly or indirectly affected by the proposed project.  
19 The proposed ISR facility and the local people and communities that would support it are  
20 expected to function (or form) as a dynamic socioeconomic system. Existing communities will  
21 provide the people, goods, and services required to construct and operate the facility. The  
22 construction and operation of the proposed facility is expected to create demand for employees,  
23 goods, and services. Personal income from wages and benefits will be spent on goods and  
24 services within other sectors of the communities and create additional opportunities for  
25 employment and income.

26  
27 The proposed project is located in a rural portion of Fall River and Custer Counties,  
28 South Dakota. The existing communities that are expected to be part of an expanded  
29 socioeconomic system include (i) Edgemont (population 774) in Fall River County, located  
30 21 km [13 mi] southeast of the site; (ii) the city of Hot Springs (population 3,711), located 64 km  
31 [40 mi] east in Fall River County; (iii) the city of Custer (population 2,067) in Custer County,  
32 located 80 km [50 mi] northwest of site; and (iv) Newcastle (population 3,532) in Weston,  
33 Wyoming, located 64 km [40 mi] north-northwest of the site (see Figure 1.1-1). Rapid City in  
34 Pennington County, South Dakota, located 100 km [62 mi] northeast of the site, is the closest  
35 urban area with a population of 67,956 (USCB, 2012).

36  
37 Most construction and operations workers for the proposed Dewey-Burdock ISR Project will  
38 come from the surrounding communities of Edgemont, Hot Springs, and Custer in South  
39 Dakota. Additional workers are expected to come from Newcastle in Wyoming and other  
40 smaller communities within an 80-km [50-mi] radius of the proposed project site. An 80-km  
41 [50-mi] radius is likely the maximum commuting distance for employees (Powertech, 2009a). It  
42 is anticipated the majority of workers will reside near the proposed facility; therefore, Custer and  
43 Fall River Counties in South Dakota and Weston County in Wyoming are expected to  
44 experience the most significant socioeconomic changes. Rapid City in Pennington County, the  
45 largest city in the region, is expected to be an important source of equipment, supplies,  
46 services, and workers (Powertech, 2009a). Because Rapid City is 100 km [62 mi] from the  
47 project site, it is not expected to be directly within the Dewey-Burdock ROI.

48  
49 The demographics of income, housing, employment structure, local finance, and education and  
50 public services in the ROI surrounding the proposed site are discussed next.

The demographic, income, housing, and other socioeconomic data reported in the GEIS were based on 2000 USCB data. The socioeconomic information in this SEIS incorporates 2000 and 2010 USCB (2012) data, as well as more recent reports; the USCB 2006–2010 American Survey 5-Year Estimates (USCB, 2012); and the USCB State and County QuickFacts (USCB, 2012).

### 3.11.1 Demographics

Population changes and projections for Custer and Fall River Counties in South Dakota and Weston County in Wyoming are shown in Table 3.11-1.

The population in Fall River County fell approximately 5 percent between 2000 and 2010, in comparison to approximately 9 and 13 percent gains in Weston and Custer Counties, respectively, over the same period. The Weston County population is expected to grow at a similar rate over the next decade (WDAI, 2011). Fall River and Custer Counties are expected to remain relatively stagnant through 2020 (Brooks, 2008). County population densities in 2010 ranged from 1.2 people per km<sup>2</sup> [3.0 people per mi<sup>2</sup>] in Weston County to 2.0 people per km<sup>2</sup> [5.3 people per mi<sup>2</sup>] in Custer County (Table 3.11-2).

The demographic profile for Custer and Fall River Counties in South Dakota and Weston County in Wyoming is presented in Table 3.11-2. All three counties have predominately white populations. American Indian/Alaskan Native and Hispanic/Latino (of any race) make up the main minority groups, although in small numbers. In 2010, minorities (race and ethnicity combined) comprised between 7 and 14 percent of the 3 counties that lie within the ROI.

### 3.11.2 Income

Income information for the ROI is presented in Table 3.11-3. According to USCB data, 2010 median household and per capita incomes were higher in Custer County, South Dakota, and Weston County, Wyoming, than in Fall River County, South Dakota (USCB, 2012). The average income levels in all three counties were lower than the statewide averages. Seventeen percent of the Fall River County population and 11 percent of Fall River County families, live at or below the official poverty level (USCB, 2012). Approximately 8 percent of the population of Weston County and 10 percent of the population of Custer County live below the poverty level (USCB, 2012).

**Table 3.11-1. Total Population and Percent Growth in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming, 2000 to 2020**

County/Town	Population			
	2000 Census	2010 Census	Percent change	2020 Population Projections
<b>Custer</b>	7,275	8,216	+12.9	8,186
Custer City	1,860	2,067	+11.1	Not available
<b>Fall River</b>	7,453	7,094	-4.8	7,423
Edgemont	867	774	-10.7	Not available
Hot Springs	4,129	3,711	-10.1	Not available
<b>Weston</b>	6,644	7,208	+8.5	7,900
Newcastle	3,065	3,532	+15.2	3,871

Source: USCB, 2012; Brooks, 2008; WDAI, 2011

1

**Table 3.11-2. Demographic Profile of the 2010 Population in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming**

Population Category	Custer County	Fall River County	South Dakota	Weston County	Wyoming
Race (percent of total population, not Hispanic or Latino)					
White	92.8	87.4	84.7	93.8	85.9
Black/African American	0.2	0.6	1.2	0.2	0.8
American Indian, Alaskan Native	2.8	6.7	8.5	1.2	2.1
Asian	0.3	0.4	0.9	0.3	0.8
Native Hawaiian, Pacific Islander	0.0	0.0	0.0	0.0	0.1
Some other race	0.0	0.0	0.1	0.0	0.1
Two or More Races	1.7	2.6	1.8	1.4	1.5
Ethnicity					
Hispanic or Latino (number of people)	182	159	22,119	216	50,231
Percent of total population	2.2	2.2	2.7	3.0	8.9
Minority Population (including Hispanic or Latino ethnicity)					
Total minority population	592	895	124,678	446	79,752
Percent minority	7.2	12.6	15.3	6.2	14.1
2010 Population Density (per Km <sup>2</sup> /Mi <sup>2</sup> )					
	2.0/5.3	1.6/4.1	4.1/10.7	1.2/3.0	2.2/5.8
Source: USCB, 2012					

2

3

**Table 3.11-3. 2010 Income Information for Counties Within the Region of Influence**

	Custer County	Fall County	South Dakota	Western County	Wyoming
Median Household Income (Annual Dollars)	46,743	35,833	46,369	53,853	53,802
Per Capita Income (Annual Dollars)	24,353	21,574	24,110	28,463	27,860
Families living below the poverty level (Percent)	4.3	11.4	8.7	5.8	6.2
Persons Below the Poverty Level (Percent)	9.7	17.4	13.7	7.9	9.8
Source: USCB, 2012.					

4

**3.11.3 Housing**

5

6

7

8

9

10

11

12

13

14

15

16

Housing data for the proposed Dewey-Burdock ISR Project ROI, including occupied and vacant units, vacancy rates, and median house values, are provided in Table 3.11-4. Of the more than 12,300 housing units in the ROI, which include single family homes, multifamily housing, mobile homes, and rental units, approximately 10,000 are occupied (USCB, 2012). Average annual vacancy rates in 2010 were approximately 21 percent in Custer and Fall River Counties, up from 18 percent in 2000. Vacancy rates decreased 23 percent in Weston County between 2000 and 2010. The median value of owner-occupied housing units is \$160,700 in Custer County, \$86,800 in Fall River County, and \$115,200 in Weston County (USCB, 2012).

**Table 3.11-4. Housing in Custer and Fall Counties County, South Dakota, and Weston County, Wyoming**

<b>Custer County</b>			
	<b>2000</b>	<b>2010</b>	<b>Percent Change</b>
<b>Total</b>	3,624	4,628	+27.7
Occupied Housing Units	2,970	3,636	+22.4
Vacant Units	654	992	+51.7
Vacancy Rate (Percent)	18	21.4	+18.9
Median Value (Dollars)	89,100	160,700	+80.4
<b>Fall River County</b>			
<b>Total</b>	3,812	4,191	+9.9
Occupied Housing Units	3,127	3,272	+4.6
Vacant Units	685	919	+34.2
Vacancy Rate (Percent)	18	21.9	+21.7
Median Value (Dollars)	54,300	86,800	+59.9
<b>Weston County</b>			
<b>Total</b>	3,231	3,533	+9.3
Occupied Housing Units	2,624	3,021	+15.1
Vacant Units	607	512	-15.7
Vacancy Rate (Percent)	18.8	14.5	-22.9
Median Value (Dollars)	66,700	115,200	72.7
Source: USCB, 2012			

1  
2 Based on the 2010 USCB housing information, Fall River County had an estimated 4,191  
3 housing units, an increase of 10 percent over the 2000 data (USCB, 2012). In comparison,  
4 Custer County had an approximate 30 percent increase in total housing units since 2000, with  
5 a total of 4,628 units in 2010. The 2010 estimated data for Weston County indicated a  
6 slight increase in housing units since the 2000 census, with an increase of 9 percent  
7 (302 additional units).

#### 8 9 **3.11.4 Employment Structure**

10  
11 Based on information from the South Dakota Department of Labor (SDDOL), the total county  
12 labor force in April 2012 was estimated to be 4,390 for Custer County and 3,660 for Fall River  
13 County (SDDOL, 2012). Weston County had a smaller estimated labor force of 3,308  
14 (Wyoming Department of Workforce Services, 2012). Unemployment rates for Custer and Fall  
15 River Counties were 5.0 and 4.7 percent, respectively, which slightly exceeded the statewide  
16 rate of 4.3 percent (SDDOL, 2012). The unemployment rate in Weston County was 5.1 percent,  
17 which matched the 5.3 statewide rate in Wyoming (Wyoming Department of Workforce  
18 Services, 2012).

19  
20 The largest employment sector for both Custer and Fall River Counties in 2010 was government  
21 (local, state, or federal), which accounted for about 32 percent of the covered work force in  
22 South Dakota (SDDOL, 2012). Private sector employment involving 10 percent or more of the  
23 work force, falls into three major categories: (i) leisure/hospitality, which includes the arts,

1 entertainment, recreation, food service, and accommodations; (ii) trade/transportation/utilities,  
2 which includes retail, wholesale, transportation, warehousing, and utilities; and (iii) education  
3 and health services (SDDOL, 2012). The largest source of employment in Weston County in  
4 2010 was agriculture, forestry, fishing and hunting, and mining, accounting for 24 percent of all  
5 employment. Government-related jobs supported approximately 20 percent of the work force.  
6 Private sector retail trade accounted for 11 percent of the work force (USCB, 2012).

### 7 8 **3.11.5 Local Finance**

9  
10 South Dakota does not impose a state income tax on its citizens or businesses. The majority of  
11 state revenue is generated from the 4 percent statewide sales and use taxes, and county and  
12 municipal sales and use taxes. The South Dakota Department of Revenue and Regulation  
13 (SDDRR) collects taxes at the state level, including (i) sales, use, and contractor's excise taxes;  
14 (ii) special taxes; (iii) motor vehicle fuel taxes; and (iv) motor vehicle fees and taxes (SDDRR,  
15 2011). Towns with a municipal sales and use tax may also impose up to 1 percent gross  
16 receipts tax on various sales, including lodging, restaurant meals, alcoholic beverages, and  
17 admissions to places of amusement and cultural and sports events, and sales and use tax up to  
18 2 percent which applies to all products and services that are subject to the state sales or use tax  
19 (SDDRR, 2011). Local governments are solely responsible for collection of property taxes,  
20 which are the primary source of funding for school systems and county, municipal, and other  
21 local government units. The 2011 taxable valuation of all property in Custer and Fall River  
22 Counties was \$763 million and \$416 million, respectively (SDDRR, 2012a). Sales and use tax  
23 revenues totaled \$165 million for Custer County and \$134 million for Fall River County  
24 (SDDRR, 2012b).

25  
26 Wyoming does not impose a corporate income or personal income tax. Wyoming has a  
27 4 percent sales tax, and counties may tax lodging services up to 4 percent. Counties have the  
28 option of collecting an additional 1 percent sales tax for general purposes. Weston County has  
29 a 5 percent sales and use tax (4 percent state base tax and a 1 percent optional county tax) and  
30 a 4 percent lodging tax (Wyoming Department of Revenue, 2012). The approximate 2011  
31 taxable valuation for all property in Weston County was \$117 million (Weston County Assessor,  
32 2012), and all sales and use tax revenues totaled \$11.2 million (Wyoming Department of  
33 Revenue, 2012).

34  
35 In addition to property taxes local governments collect, the states of Wyoming and South  
36 Dakota levy taxes on the value of the mineral production (a severance tax). Wyoming levies a  
37 uranium mining severance tax of 4 percent (Wyoming Statute, 2011). South Dakota levies an  
38 energy minerals severance tax on uranium of 4.5 percent (South Dakota Statute, 2012), as well  
39 as an additional conservation tax of 0.24 percent on the taxable value of any mineral produced  
40 from mineral extraction operations (South Dakota Statute, 2012).

### 41 42 **3.11.6 Education**

43  
44 Five public school districts (kindergarten through 12<sup>th</sup> grade) are located in Custer and Fall River  
45 Counties: Custer School District, Elk Mountain School District, Hot Springs School District,  
46 Oelrichs School District, and Edgemont School District (SDDOE, 2010). There are  
47 approximately 2,024 students enrolled in Custer and Fall River County schools (kindergarten  
48 through 12<sup>th</sup> grade) (Table 3.11-5).

**Table 3.11-5. School Districts in Counties Located Within 80 km [50 mi] of the Proposed Dewey-Burdock ISR Project**

<b>School Districts in Custer and Fall River Counties, South Dakota</b>	
<b>Custer</b>	
Number of students enrolled (K-12)	882
Number of schools	6
Student-teacher ratio	12
<b>Elk Mountain</b>	
Number of students enrolled (K-12)	26
Number of schools	1
Student-teacher ratio	10
<b>Hot Springs</b>	
Number of students enrolled (K-12)	840
Number of schools	3
Student-teacher ratio	14
<b>Oelrichs</b>	
Number of students enrolled (K-12)	126
Number of schools	3
<b>School Districts in Custer and Fall River Counties, South Dakota (continued)</b>	
Student-teacher ratio	7
<b>Edgemont</b>	
Number of Students enrolled (K-12)	150
Number of schools	2
Student-teacher ratio	10
<b>School Districts in Weston County, Wyoming</b>	
<b>Weston County #1</b>	
Number of students enrolled (K-12)	778
Number of schools	4
Student-teacher ratio	11
<b>Weston County #7</b>	
Number of students enrolled (K-12)	265
Number of schools	3
Student-teacher ratio	10
Sources: SDDOE, 2010; Wyoming Department of Education, 2010	

1  
2 Public schools in Wyoming are generally organized at the county or subcounty level by  
3 school district. The school districts closest to the proposed project area are Weston County  
4 School District #1, with four kindergarten through 12<sup>th</sup> grade schools located in Newcastle, and  
5 Weston County School District #7, with three kindergarten through 12<sup>th</sup> grade schools located  
6 in Upton. There are approximately 1,043 students in county school districts in Weston County  
7 (Wyoming Department of Education, 2010).  
8

1 The nearest postsecondary schools to the proposed project are located in Rapid City, 161 km  
 2 [100 mi] to the northeast. Western Dakota Technical Institute (WDTI), South Dakota School of  
 3 Mines and Technology (SDSMT), and the Rapid City Campus of the National American  
 4 University (NAU) are located in Rapid City.

### 6 3.11.7 Health and Social Services

8 Medical facilities and health services in the ROI are listed in Table 3.11-6. Hospitals are located  
 9 in Hot Springs, Custer City, and Newcastle. Fall River Hospital in Hot Springs is a 25-bed acute  
 10 care facility providing emergency, laboratory, and surgical services. Custer Regional Hospital in  
 11 Custer City is an 11-bed acute care facility that provides 24-hour emergency service, inpatient,  
 12 and outpatient care. Weston County Health Services in Newcastle has a 21-bed hospital  
 13 offering inpatient hospital service and acute care services including 24-hour emergency care  
 14 and complete laboratory services.

16 Primary and family medical care in the ROI is provided by the Fall River Health Clinic in Hot  
 17 Springs, the Custer Regional Clinic in Custer City, the Edgemont Regional Clinic in Edgemont,  
 18 and Weston County Health Services in Newcastle. The South Dakota Department of Health  
 19 has Offices of Family and Community Health Services in Hot Springs and Custer City. These  
 20 offices provide primary and preventative programs and services including immunizations, well  
 21 child checkups and screenings, WIC (Supplemental Nutrition Program for Women, Infants, and  
 22 Children), family planning and reproductive health, prenatal health, and health screenings for  
 23 adults. The Wyoming Department of Health has a Public Health Nursing Office in Newcastle.  
 24 This office provides primary and preventative health services including family planning,  
 25 immunizations, WIC, and maternal and family health. Behavioral Management Systems in  
 26 Hot Springs provides a range of behavioral and mental health services and programs for  
 27 area residents.

28  
 29 **Table 3.11-6. Hospitals, Clinics, and Health Services in Hot Springs, Custer City, and Edgemont, South Dakota, and Newcastle, Wyoming**

<b>Hospitals</b>	<b>Location</b>
Fall River Hospital	Hot Springs, SD
Custer Regional Hospital	Custer City, SD
Weston County Health Services	Newcastle, WY
<b>Clinics</b>	<b>Location</b>
Fall River Health Clinic	Hot Springs, SD
Custer Regional Clinic	Custer City, SD
Edgemont Regional Clinic	Edgemont, SD
Weston County Health Services	Newcastle
<b>Health Services</b>	<b>Location</b>
Office of Family and Community Health Services	Hot Springs, SD; Custer City, SD
Public Health Nursing	Newcastle, WY
Behavioral Management Systems	Hot Springs, SD

30

31



1

**Table 3.11-7. Police, Fire Department, and Ambulance Services in Hot Springs, Custer City, and Edgemont, South Dakota, and Newcastle, Wyoming**

<b>Police</b>	<b>Location</b>
Fall River County Sheriff	Hot Springs, SD
Hot Springs Police Department	Hot Springs, SD
Custer County Sheriff	Custer City, SD
Weston County Sheriff	Newcastle, WY
Newcastle Police Department	Newcastle, WY
<b>Fire Departments</b>	
Cascade Volunteer Fire Department	Hot Springs, SD
Minnekahta Volunteer Fire Department	Hot Springs, SD
Custer Volunteer Fire Department	Custer City, SD
Edgemont Volunteer Fire Department	Edgemont, SD
Newcastle Volunteer Fire Department	Newcastle, WY
<b>EMS/Ambulance</b>	
Hot Springs Volunteer Ambulance Service	Hot Springs, SD
Custer Ambulance Service	Custer City, SD
Edgemont Ambulance Service	Edgemont, SD
Newcastle Ambulance Service	Newcastle, WY
Weston County Health Services	Newcastle, WY

2

3 Police, fire department, and ambulance services in the ROI are listed in Table 3.11-7. Fall  
4 River, Custer, and Weston Counties have county sheriff's offices in Hot Springs, Custer City,  
5 and Newcastle, respectively. Hot Springs and Newcastle also have police departments.  
6 Volunteer fire departments and emergency medical services are located in Hot Springs,  
7 Custer City, Edgemont, and Newcastle.

8

9 The South Dakota Department of Social Services has local offices in Hot Springs and Custer  
10 City. These offices provide assistance with applying for programs including Supplemental  
11 Nutrition Assistance Program (SNAP) and Temporary Assistance for Needy Families (TANF).  
12 These offices also provide assistance with medical eligibility resources for children and families,  
13 long-term care, and medical saving programs. The Wyoming Department of Family Services  
14 has a local office in Newcastle, which provides assistance for connecting with community  
15 resources, reporting child and adult abuse and neglect, and applying for programs including  
16 SNAP, TANF, and Medicaid.

17

### 18 **3.12 Public and Occupational Health**

19

20 Baseline radiation levels in and around the proposed Dewey-Burdock ISR Project area are  
21 summarized in this section. Descriptions of these levels are known as "preoperational" or  
22 "baseline" radiological conditions, and they would be used to evaluate potential radiological  
23 impacts associated with ISR operations. This section also describes applicable safety criteria  
24 and radiation dose limits established for public protection and occupational health and safety.

25

26 Radiation dose is a measure of the amount of ionizing energy that is deposited in the body.  
27 Ionizing radiation is a natural component of the environment and ecosystem, and members of

1 the public are exposed continuously to natural radiation. Radiation doses to the general public  
2 result from radioactive materials in the Earth's soils, rocks, and minerals. Rn-222 is a  
3 radioactive gas found in most soils and rocks that escapes into ambient air as part of the natural  
4 decay of uranium and its progeny, Ra-226. Low levels of naturally occurring uranium and  
5 radium are present in drinking water and food products. Cosmic radiation from outer space is  
6 another natural source of radiation. In addition to natural sources of radiation, there are also  
7 artificial or human-made sources that contribute to the dose the general public receives.  
8 Medical diagnostic procedures using radioisotopes and x-rays are a primary human-made  
9 radiation source. The National Council for Radiation Protection (NCRP) estimates the average  
10 annual total effective dose equivalent from natural background radiation sources, including  
11 terrestrial and cosmic, is approximately 3.1 millisieverts (mSv) [310 millirem (mrem)] for  
12 U.S. residents, although the dose varies by location and elevation (NCRP, 2009). The average  
13 dose to the general public from background radiation sources in South Dakota is 6 mSv/yr  
14 [600 mrem/yr], due to higher elevation and higher than average concentrations of naturally  
15 occurring uranium in the soil in South Dakota (EPA, 2006b). The GEIS, however, reported that  
16 although background radiation levels in South Dakota are significantly higher than the national  
17 average, background radiation levels in western South Dakota are close to the national average  
18 because of lower-than-state-average radon gas levels (NRC, 2009a). The annual average dose  
19 to the public from all sources (natural and manmade) is 6.2 mSv [620 mrem] (NCRP, 2009).

20

### 21 **3.12.1 Baseline Radiological Conditions**

22

23 In accordance with NRC regulations at 10 CFR Part 40, Appendix A, Criteria 7 and 7A,  
24 the applicant developed and implemented a preoperational monitoring program to establish  
25 baseline radiological conditions at the proposed Dewey-Burdock ISR Project site (Powertech,  
26 2009a). Results of the baseline radiological monitoring provide data on radiological conditions  
27 that will be used to evaluate future impacts of routine facility operations or accidental or  
28 unplanned releases, if a license is issued. The applicant followed guidance in NUREG-1569  
29 (NRC, 2003) and NRC Regulatory Guide 4.14 (NRC, 1980) to establish preoperational  
30 radiological baseline conditions at the proposed site (Powertech, 2009a, 2011).

31

32 The applicant performed baseline radiological surveys and sampling at the site between  
33 August 2007 and July 2008 (Powertech, 2009a). The baseline radiological field investigations  
34 consisted of the following activities:

35

- 36 • Global positioning system (GPS)-based unshielded gamma-ray surveys at 100-m  
37 [328-ft] transect intervals in historical surface mine areas in the eastern portion of the  
38 proposed project area, 100-m [328-ft] transect intervals in proposed land application  
39 areas, and 500-m [1,640-ft] intervals in the remainder of the proposed project area  
40 (Figure 3.12-1). The purpose of the gamma-ray survey was to map ambient gamma  
41 radiation levels across the proposed site and identify areas for biased soil sampling.
- 42 • Surface soil 0–15 cm [0–6 in] sampling at 75 random and 5 biased locations spanning  
43 the proposed project area, and subsurface soil {15–30 cm [6–12 in] and 30–100 cm  
44 [12–39 in]} sampling at 9 random locations.
- 45 • Surface soil 0–15 cm [0–6 in] and subsurface soil {15–30 cm [6–12 in] and 30–100 cm  
46 [12–39 in]} sampling at 17 random locations in proposed land application areas.
- 47

- 1 • Sediment and surface water sampling from primary stream drainage areas and surface  
2 water impoundments.
- 3 • Shallow surface soil {0–5 cm [0–2 in]}, vegetation, and air particulate sampling at eight  
4 air monitoring stations {seven onsite stations and one located approximately 3 km  
5 [1.9 mi] west of the southwest corner of the proposed project area}.
- 6 • Radon monitoring in air at the eight air monitoring stations and eight additional locations  
7 within the proposed project area.
- 8 • Radon flux measurements at the nine random subsurface soils sampling locations (see  
9 second bullet).
- 10 • Ambient gamma and radon monitoring using thermoluminescent dosimeters (TLDs) for  
11 total ambient gamma and alpha track etch detectors for radon.
- 12 • Livestock sampling, consisting of samples from a locally grazing cow.
- 13 • Fish sampling at two locations on Beaver Creek (one upstream and one downstream of  
14 the proposed project area) and one location on the Cheyenne River downstream of its  
15 confluence with Beaver Creek.
- 16 • Groundwater sampling at 31 wells within the proposed project area.

### 17 3.12.1.1 Soils

18 The objective of the gamma-ray surveys is to characterize and quantify baseline or  
19 preoperational radiation levels and radionuclide concentrations in soils throughout the proposed  
20 project area. Results of the gamma-ray surveys are shown in Figure 3.12-1, and summary  
21 statistics for surface mine areas, proposed land application areas, and the remainder of the  
22 permit area are presented in Table 3.12-1. In the surface mine areas, gamma-ray count rates  
23 range from 5,550 to 460,485 counts per minute (cpm) [5.9 to 324  $\mu\text{rem/hr}$ ]. The mean count  
24 rate is 16,823 cpm [13.8  $\mu\text{rem/hr}$ ], and the median count rate is 12,717 cpm [10.9  $\mu\text{rem/hr}$ ].  
25 Clusters of higher readings are associated with abandoned open pit uranium mines, waste rock,  
26 and drainages in the surface mine area (Powertech, 2009a). In areas where land application is  
27 proposed, gamma-ray readings range from 6,798 to 20,422 cpm [6.8 to 16.3  $\mu\text{rem/hr}$ ] with a  
28 median of 12,523 cpm [10.8  $\mu\text{rem/hr}$ ] in the Dewey area and from 8,498 to 24,248 cpm [8.0 to  
29 19.0  $\mu\text{rem/hr}$ ] with a median of 12,232 cpm [10.6  $\mu\text{rem/hr}$ ] in the Burdock area. In the  
30 remainder of the proposed permit area, gamma-ray readings range from 5,883 to 171,243 cpm  
31 [6.1 to 121.9  $\mu\text{rem/hr}$ ] with a median similar to the proposed land application areas {12,664 cpm  
32 [10.9  $\mu\text{rem/hr}$ ]}. High count rates {i.e., count rates exceeding 17,000 cpm [13.9  $\mu\text{rem/hr}$ ]} are  
33 present in an 243-ha [600-ac] area located in the northern portion of the Dewey area and in the  
34 area of an artesian well and associated drainage in the southern part of the Dewey area (see  
35 Figure 3.12-1). The gamma-ray survey results presented in Figure 3.12-1 and Table 3.12-1  
36 indicate the surface mine areas in the eastern and northeastern portions of the Burdock area  
37 have higher radiological measurements due to historic mining activities. Anomalous (i.e., high)  
38 gamma-ray readings identified in the southern part of the Dewey area in the area of an artesian  
39 well are likely due to discharging groundwater from the Inyan Kara aquifer. Because the  
40 prevailing wind direction is from the southeast (see SEIS Section 3.7.2.1), anomalous gamma

41

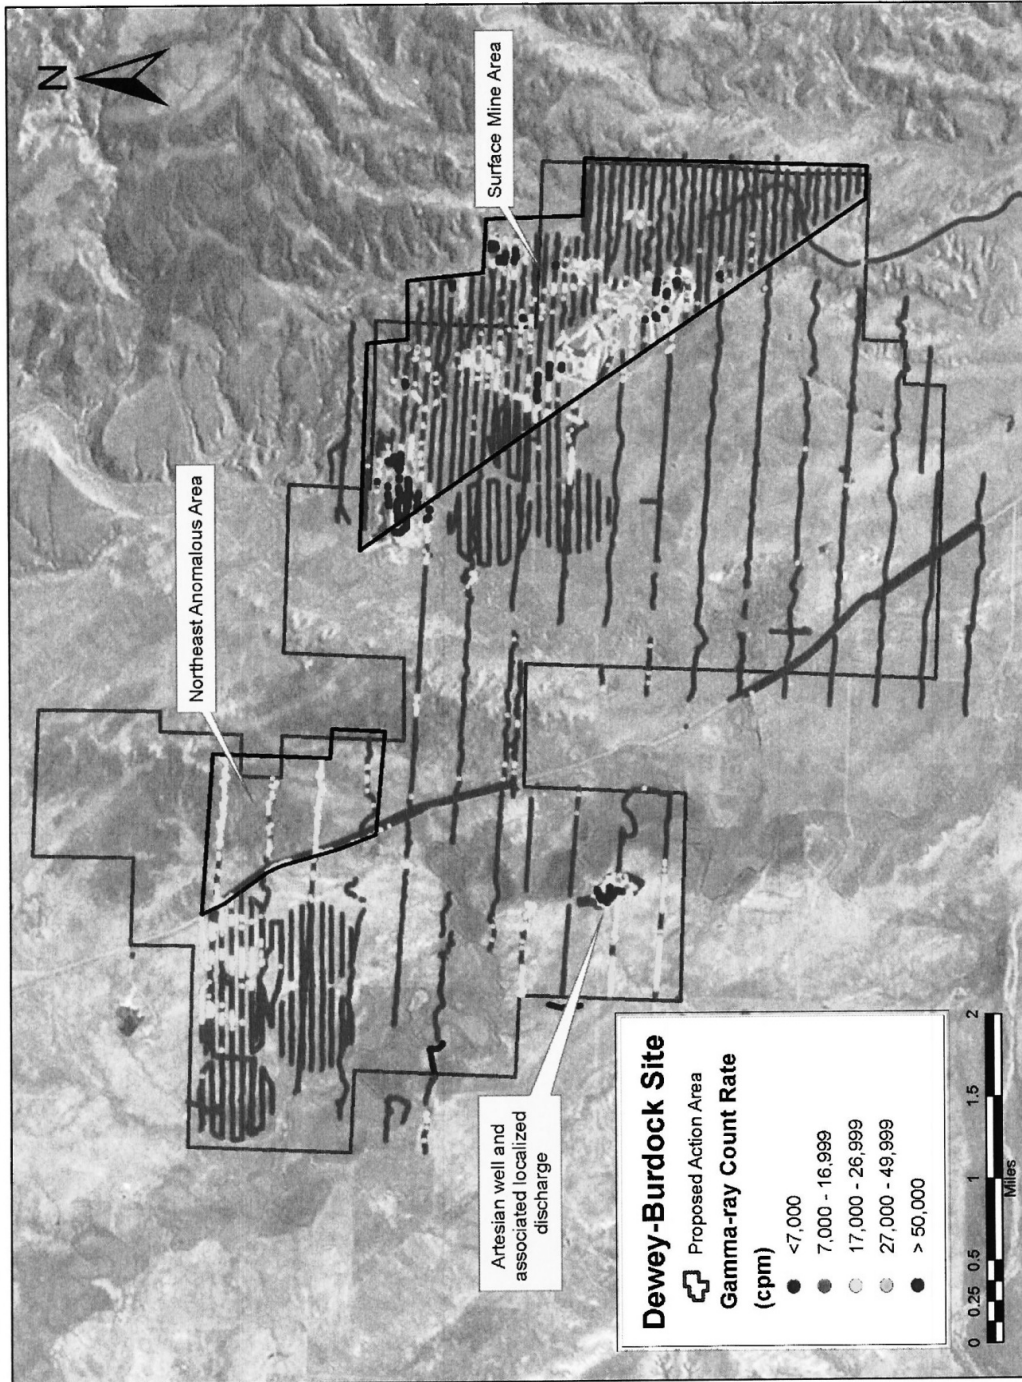


Figure 3.12-1. Map Showing Gamma-Ray Count Rates Obtained From GPS-Based Gamma Survey at the Proposed Dewey-Burdock Project Site. Source: Powertech (2009a).

**Table 3.12-1. Summary Statistics of Gamma-Ray Count Rates in Proposed Land Application Areas, Surface Mine Areas, and the Remainder of the Permit Area at the Proposed Dewey-Burdock Project**

Parameter	Land Application Area		Surface Mine Area	Remainder of Permit Area
	Dewey	Burdock		
Mean	12,815	12,308	16,823	13,073
Standard Deviation	1,940	1,318	23,377	2,995
Median	12,523	12,232	12,717	12,664
Mode	11,778 (n=15)	12,266 (n=16)	12,138 (n=31)	12,585 (n=35)
Minimum	6,798	8,498	5,550	5,883
Maximum	20,422	24,248	460,485	171,243
No. of Counts	23,480	13,647	81,757	75,345

Source: Powertech (2009a)

1  
2 readings in the northern part of the Dewey area are likely caused by the deposition of  
3 windblown dust from surface mine areas to the southeast in the Burdock area (Figure 3.12-1).

4 All surface soil samples were analyzed for Ra-226, and selected samples focusing on roll-front  
5 areas and land application areas were analyzed for uranium, Th-230, and Pb-210 (Powertech,  
6 2009a, Table 6.1-5). Over the entire permit area, the mean and median Ra-226 concentrations  
7 for surface soils samples are 0.107 and 0.048 Bq/g [2.9 and 1.3 pCi/g], respectively. The  
8 median Ra-226 concentration of 25 surface soil samples in surface mine areas was 0.052 Bq/g  
9 [1.4 pCi/g]. Five of the surface mine soil samples were outliers exceeding a concentration of  
10 0.22 Bq/g [5.9 pCi/g]. The median Ra-226 concentration of 55 surface soils samples in the  
11 remainder of the permitted area was 0.048 Bq/g [1.3 pCi/g]. Based on statistical analysis using  
12 the interquartile range (IQR), three of these samples were identified as outliers exceeding a  
13 concentration of 0.096 Bq/g [2.6 pCi/g] (Powertech, 2011). The IQR is a measure of statistical  
14 dispersion and is equal to the difference between the third quartile (75<sup>th</sup> percentile) and the first  
15 quartile (25<sup>th</sup> percentile). With outliers removed, both the surface mine data and the wider  
16 permit area data sets fit a lognormal distribution. The geometric mean of both data sets is  
17 0.048 Bq/g [1.3 pCi/g], and the data lie within a population range of 0.028 to 0.081 Bq/g [0.76 to  
18 2.2 pCi/g]. For comparison, background Ra-226 levels in soil in the United States typically  
19 average 0.037 Bq/g [1.0 pCi/g] (NCRP, 2009). In areas where land application is proposed,  
20 Ra-226 concentrations range from 0.015 to 0.163 Bq/g [0.4 to 4.4 pCi/g] and average 0.048 and  
21 0.030 Bq/g [1.3 and 0.8 pCi/g] in the Dewey and Burdock areas, respectively. Results for the  
22 other radionuclides indicate a positive relationship between the concentrations of Ra-226 and  
23 uranium, Th-230, and Pb-210. Uranium concentrations range from 0.014 to 2.48 Bq/g [0.37 to  
24 67 pCi/g]. Th-230 concentrations range from 0.004 to 1.11 Bq/g [0.1 to 30 pCi/g]. Pb-210  
25 concentrations range from 0.018 to 1.11 Bq/g [0.5 to 30 pCi/g] (Powertech, 2009a). Prior to  
26 operations, the applicant has committed to collect 15 additional surface soil samples {0–15 cm  
27 [0–6 in]} in the Dewey area to address differences in sample density between the Dewey and  
28 Burdock area (Powertech, 2011).

29  
30 All subsurface soil samples were analyzed for Ra-226, uranium, Th-230, and Pb-210  
31 (Powertech, 2009a, Table 6.1-5). In surface mine areas and within the broader permit area,  
32 subsurface Ra-226 concentrations range from 0.026 to 0.207 Bq/g [0.7 to 5.6 pCi/g] and are  
33 comparable to those observed in surface samples. In land application areas, Ra-226  
34 concentrations in subsurface soils range from 0.015 to 0.152 Bq/g [0.4 to 4.1 pCi/g] and have a  
35 median of 0.037 Bq/g [1.0 pCi/g] in the Dewey area and a median of 0.030 Bq/g [0.8 pCi/g] in

1 the Burdock area. Ra-226 concentrations in subsurface soils in the land application areas are  
2 comparable to surface soil samples, with no observed trends with depth (Powertech, 2009a).

### 3 4 **3.12.1.2 Sediment and Surface Water**

5  
6 Sediment and surface water samples were collected from upstream and downstream sites on  
7 three primary streams (Beaver Creek, Pass Creek, and the Cheyenne River), sites on two  
8 ephemeral drainages, and impoundments (including stock ponds and open pit mines) within the  
9 proposed project area (Powertech, 2009a, Figure 6.1-12). Sediment samples were analyzed for  
10 Ra-226, uranium, Th-230, and Pb-210 (Powertech, 2009a, Table 6.1-8). Uranium  
11 concentrations in sediments range from 1.0 to 37 mg/kg [1.0 to 37 ppm] and average 5.5 mg/kg  
12 [5.5 ppm]. Ra-226 concentrations range from 0.015 to 0.32 Bq/g [0.4 to 8.6 pCi/g] and average  
13 0.06 Bq/g [1.6 pCi/g]. Th-230 concentrations range from 0.015 to 0.29 Bq/g [0.4 to 7.8 pCi/g]  
14 and average 0.06 Bq/g [1.6 pCi/g]. Pb-210 concentrations range from 0.007 to 0.35 Bq/g [0.2 to  
15 9.6 pCi/g] and average 0.08 Bq/g [2.2 pCi/g]. Sediment samples from the Darrow Mine Pit and  
16 Triangle Mine Pit (see SEIS Section 3.2.3 and Figure 3.2-3), which are historical open pit  
17 uranium mines, exhibit the highest radionuclide concentrations. Sediment samples from the  
18 Darrow Mine Pit and Triangle Mine Pit have average uranium concentrations of 34.5 and  
19 18.5 mg/kg [34.5 and 18.5 ppm]; average Ra-226 concentrations of 0.25 and 0.10 Bq/g [6.9 and  
20 2.6 pCi/g]; average Th-230 concentrations of 0.25 and 0.18 Bq/g [6.85 and 4.85 pCi/g]; and  
21 average Pb-210 concentrations of 0.25 and 0.11 Bq/g [6.8 and 2.95 pCi/g], respectively  
22 (Powertech, 2009a).

23  
24 Radionuclides measured in surface water samples included gross alpha, Ra-226, uranium, and  
25 Pb-210. Summary statistics for these radionuclides at stream sampling locations are listed in  
26 Table 3.5-1. More than half of the stream samples from Beaver Creek and the Cheyenne River  
27 exceed the EPA-regulated MCL for gross alpha {555 Bq/m<sup>3</sup> [15 pCi/L]} in drinking water, as  
28 established in 40 CFR Part 141. Gross alpha concentrations range from 85 to 2,435 Bq/m<sup>3</sup>  
29 [2.3 to 65.8 pCi/L]. Total uranium concentrations range from 0.003 to 0.0378 mg/L [0.003 to  
30 0.0378 ppm] with four of the samples from the Cheyenne River exceeding the EPA-regulated  
31 MCL for total uranium of 0.03 mg/L [0.03 ppm]. Total Ra-226 concentrations range from  
32 0 to 189 Bq/m<sup>3</sup> [0 to 5.1 pCi/L] with one sample from Beaver Creek and one sample from the  
33 Cheyenne River exceeding the EPA-regulated MCL for total Ra-226 of 185 Bq/m<sup>3</sup> [5.0 pCi/L].  
34 EPA's proposed MCL for Pb-210 of 37 Bq/m<sup>3</sup> [1.0 pCi/L] (EPA, 2000) was exceeded in  
35 2 samples from Beaver Creek and 3 samples from the Cheyenne River. With the exception  
36 of gross alpha and uranium concentrations in the Darrow Mine Pit and the Triangle Mine Pit,  
37 water samples from impoundments at the proposed project demonstrate concentrations at or  
38 below EPA's proposed MCLs (Powertech, 2009a, Appendix 6.1–D). Uranium concentrations  
39 averaged 5.89 and 0.18 mg/L [5.89 and 0.18 ppm] at the Darrow Mine Pit and Triangle Mine Pit,  
40 respectively. Gross alpha concentrations averaged 205,091 and 5,513 Bq/m<sup>3</sup> [5,543 and  
41 149 pCi/L] at the Darrow Pit Mine and the Triangle Mine Pit, respectively (Powertech, 2009a).

42  
43 The applicant has committed to relocating upstream and downstream sediment and surface  
44 water sampling locations on Beaver Creek and Pass Creek closer to the proposed project  
45 boundary to better meet guidance in Regulatory Guide 4.14 (Powertech, 2011). Stream  
46 sampling sites BVC01, BVC04, PSC01, and PSC02 used for baseline monitoring (see  
47 Figure 3.5-2) will be replaced with sampling sites BVC11, BVC14, PSC11, and PSC12, which  
48 are located closer to the proposed project boundary (see Figure 7.2-2). Samples for each of  
49 these stream sampling sites will be collected monthly for 12 consecutive months prior to ISR

1 operations (Powertech, 2011). The applicant's preoperational and operational surface water  
2 monitoring programs are discussed in SEIS Sections 7.2.4 and 7.3.3.

### 3 4 **3.12.1.3 Air (Ambient Gamma, Radon, and Particulates)**

5  
6 TLDs were placed at each of the eight air monitoring stations established for the  
7 Dewey-Burdock ISR Project to measure ambient gamma dose rates. Based on the gamma  
8 dose rate monitoring results, projected exposure rates at the sample locations range from  
9 0.91 to 1.23 mSv/yr [91 to 123 mrem/yr] with an average of 1.09 mSv/yr [109 mrem/yr]  
10 (Powertech, 2011, Table TR RAI 2.9-10). These values are within the range of reported  
11 background levels from natural radiation sources in the region and the United States, including  
12 cosmic radiation, external terrestrial radiation, and naturally occurring radon (NCRP, 2009).

13  
14 Radtrack passive track etch detectors were placed at each of the eight air monitoring station  
15 locations and at eight additional locations to measure ambient Rn-222 concentrations in air.  
16 Rn-222 concentrations were measured quarterly over a 1-year period (Powertech, 2009a,  
17 Table 6.1-11). Period 1 (August 14 to September 27, 2007) ambient radon concentrations  
18 ranged from 37 to 363 Bq/m<sup>3</sup> [1.0 to 9.8 pCi/L] and averaged 89 Bq/m<sup>3</sup> [2.4 pCi/L]. Period 2  
19 (September 27, 2007, to February 1–12, 2008) concentrations ranged from 15 to 67 Bq/m<sup>3</sup>  
20 [0.4 to 1.8 pCi/L] and averaged 44 Bq/m<sup>3</sup> [1.2 pCi/L]. Period 3 (February 1 through 12 to  
21 May 17, 2008) concentrations ranged from 15 to 122 Bq/m<sup>3</sup> [0.4 to 3.3 pCi/L] and averaged  
22 67 Bq/m<sup>3</sup> [1.8 pCi/L]. Period 4 (May 17 to July 17, 2008) concentrations ranged from 18 to  
23 38 Bq/m<sup>3</sup> [0.5 to 0.8 pCi/L] and averaged 18 Bq/m<sup>3</sup> [0.5 pCi/L]. The reported average ambient  
24 Rn-222 concentrations are within the range of background levels reported for the region (NCRP,  
25 2009). Based on the gamma-ray survey results described in SEIS Section 3.12.1.1, radon  
26 concentrations adjacent to abandoned mine areas are expected to be higher than in other areas  
27 of the site. However, there was only one measurement {363 Bq/m<sup>3</sup> [9.8 pCi/L]} where this was  
28 the case, which resulted in the higher average radon concentration of 89 Bq/m<sup>3</sup> [2.4 pCi/L]  
29 during Period 1 (August 14 to September 27, 2007).

30  
31 Radon flux rates were measured at nine locations on three occasions in mapped roll-front areas  
32 within the proposed project area. In fall (September) 2007, flux rates ranged from 0.025 to  
33 0.065 Bq/m<sup>2</sup>-s [0.68 to 1.77 pCi/m<sup>2</sup>-s] and averaged 0.045 Bq/m<sup>2</sup>-s [1.22 pCi/m<sup>2</sup>-s] (Powertech,  
34 2009a, Table 6.1-14). In spring (April) 2008, flux rates ranged from 0.010 to 0.049 Bq/m<sup>2</sup>-s  
35 [0.28 to 1.33 pCi/m<sup>2</sup>-s] and averaged 0.027 Bq/m<sup>2</sup>-s [0.74 pCi/m<sup>2</sup>-s]. In summer (July) 2008,  
36 flux rates ranged from 0.018 to 0.088 Bq/m<sup>2</sup>-s [0.48 to 2.38 pCi/m<sup>2</sup>-s] and averaged  
37 0.055 Bq/m<sup>2</sup>-s [1.5 pCi/m<sup>2</sup>-s]. The flux rates measured at the proposed project site are well  
38 below the National Emissions Standards for Hazardous Air Pollutants (NESHAPS) requirements  
39 of 0.740 Bq/m<sup>2</sup>-s [20 pCi/m<sup>2</sup>-s] specified in 10 CFR Part 40, Appendix A, Criterion 6, which  
40 applies to uranium mill tailings. Although not applicable to the proposed action, the NESHAPS  
41 requirements are useful in demonstrating the relatively low magnitude of radon flux rates  
42 measured at the site.

43  
44 Air particulate samples were collected bi-weekly over a 1-year period (August 2007 to August  
45 2008) at each of the air monitoring station locations. Particulates were collected using high  
46 volume air samplers and analyzed for Ra-226, uranium, Th-230, and Pb-210 (Powertech,  
47 2009a, Table 6.1-12). Results of the air particulate sampling are summarized as follows:

- 48  
49 • Ra-226 concentrations ranged from below detection limits to a maximum of  $1.7 \times 10^{-12}$   
50 Bq/cm<sup>3</sup> [ $4.7 \times 10^{-17}$  uCi/mL]. The maximum concentration is less than 0.1 percent of the

1 effluent release limit of  $3.3 \times 10^{-8}$  Bq/cm<sup>3</sup> [ $9.0 \times 10^{-13}$  uCi/mL] specified in  
2 10 CFR Part 20, Appendix B.

- 3
- 4 • Uranium concentrations ranged from below detection limits to a maximum of  $3.4 \times 10^{-10}$   
5 Bq/cm<sup>3</sup> [ $9.1 \times 10^{-15}$  uCi/mL]. The maximum concentration is less than 1 percent of the  
6 effluent release limit of  $3.3 \times 10^{-7}$  Bq/cm<sup>3</sup> [ $9.0 \times 10^{-12}$  uCi/mL] specified in  
7 10 CFR Part 20, Appendix B.  
8
  - 9 • Th-230 concentrations ranged from below detection limits to a maximum of  $2.1 \times 10^{-12}$   
10 Bq/cm<sup>3</sup> [ $5.6 \times 10^{-17}$  uCi/mL]. The maximum concentration is less than 0.01 percent  
11 of the effluent release limit of  $1.1 \times 10^{-7}$  Bq/cm<sup>3</sup> [ $3.0 \times 10^{-12}$  uCi/mL] specified in  
12 10 CFR Part 20, Appendix B.  
13
  - 14 • Pb-210 concentrations ranged from below detection limits to a maximum of  
15  $1.5 \times 10^{-9}$  Bq/cm<sup>3</sup> [ $4.1 \times 10^{-14}$  uCi/mL]. The maximum concentration was 6.78 percent  
16 of the effluent release limit of  $2.2 \times 10^{-8}$  Bq/cm<sup>3</sup> [ $6.0 \times 10^{-13}$  uCi/mL] specified in  
17 10 CFR Part 20, Appendix B.  
18

#### 19 **3.12.1.4 Groundwater**

20  
21 As described in SEIS Section 3.5.3.5, the applicant conducted initial preoperational groundwater  
22 sampling of wells at the proposed Dewey-Burdock ISR Project from July 2007 through June  
23 2008 (Powertech, 2009a). This baseline study consisted of 19 groundwater wells (14 existing  
24 and 5 newly drilled) sampled on a quarterly basis. An additional 12 wells were sampled on a  
25 monthly basis from March 2008 to February 2009. The wells were selected based on type of  
26 use, aquifer, and location in relation to orebodies (Powertech, 2009a). The locations of all  
27 groundwater sampling wells are shown in Figure 3.5-2, and the formation sampled in each well  
28 is listed in Table 3.5-3. Radiological constituents sampled in each well included gross alpha,  
29 Ra-226, uranium, and Rn-222 (Powertech, 2009a, Tables 6.1-18 and 6.1-19). Results of  
30 preoperational groundwater sampling are discussed in SEIS Section 3.5.3.5 and summarized  
31 as follows:  
32

- 33 • The MCL for uranium {0.03 mg/L [0.03 ppm]} was exceeded in samples from all but one  
34 of the wells (679) in the alluvial aquifers. Within the Burdock area, samples from wells  
35 680 and 3026 in the Chilson aquifer and well 698 in the Fall River aquifer also exceeded  
36 the MCL for uranium. The range of uranium exceeding the MCL was 0.0322 to  
37 0.132 mg/L [0.0322 to 0.132 ppm].  
38
- 39 • The MCL for dissolved Ra-226 {185 Bq/m<sup>3</sup> [5 pCi/L]} was exceeded in about 50 percent  
40 of the wells in the Fall River and Chilson aquifers. The range of Ra-226 exceeding the  
41 MCL was 185 to 52,910 Bq/m<sup>3</sup> [5 to 1,430 pCi/L].  
42
- 43 • The MCL for gross alpha {555 Bq/m<sup>3</sup> [15 pCi/L]} was exceeded in about 75 percent of  
44 the wells. The range of gross alpha exceeding the MCLs in alluvial wells was 677 to  
45 4,773 Bq/m<sup>3</sup> [18.3 to 129 pCi/L], while the range of gross alpha exceeding MCLs in the  
46 Fall River and Chilson aquifers was 555 to 240,500 Bq/m<sup>3</sup> [15 to 6,500 pCi/L].  
47
- 48 • Two wells (680 and 681) with Ra-226 exceeding 11,100 Bq/m<sup>3</sup> [300 pCi/L] and gross  
49 alpha concentrations exceeding 37,000 Bq/m<sup>3</sup> [1,000 pCi/L] are directly within mapped



1 orebodies in the Chilson and Fall River aquifers, whereas another (698) is downgradient  
2 of open pit mines within the Fall River aquifer.

- 3
- 4 • The only well not exceeding the proposed EPA limit for Rn-222 of 11,100 Bq/m<sup>3</sup>  
5 [300 pCi/L] (EPA, 2000) was well 650, a Chilson well upgradient of historic uranium  
6 mining activities. The Rn-222 values of samples exceeding the proposed limit ranged  
7 from 11,248 to 17.1 × 10<sup>6</sup> Bq/m<sup>3</sup> [304 to 462,000 pCi/L]. The wells with the highest  
8 concentration included wells 680 and 681, which are directly in mapped orebodies in the  
9 Chilson and Fall River aquifers, respectively, and well 42 in the Chilson aquifer used for  
10 domestic and stock water.

### 11

#### 12 **3.12.1.5 Vegetation, Livestock, and Fish**

13  
14 Vegetation samples (typically short grasses and clover plants) were collected in August 2007,  
15 April 2008, and July 2008 from representative grazing areas near each air monitoring station  
16 location. Composite samples of the vegetation were analyzed for Ra-226, uranium, Th-230,  
17 Pb-210, and Po-210 (Powertech, 2009a, Table 6.1-30). Results of the vegetation sampling are  
18 summarized as follows:

- 19
- 20 • Ra-226 concentrations ranged from 0.00074 to 0.00333 Bq/g [0.02 to 0.09 pCi/g] and  
21 averaged 0.00185 Bq/g [0.05 pCi/g].
  - 22
  - 23 • Uranium concentrations ranged from 0.00037 to .00148 Bq/g [0.01 to 0.04 pCi/g] and  
24 averaged 0.00074 Bq/g [0.02 pCi/g].
  - 25
  - 26 • Th-230 concentrations ranged from 0.00037 to 0.00111 Bq/g [0.01 to 0.03 pCi/g] and  
27 averaged 0.00074 Bq/g [0.02 pCi/g].
  - 28
  - 29 • Pb-210 concentrations ranged from 0.00222 to 0.0629 Bq/g [0.6 to 1.7 pCi/g] and  
30 averaged 0.0444 Bq/g [1.2 pCi/g].
  - 31
  - 32 • Po-210 concentrations ranged from 0.00296 to 0.00851 Bq/g [0.08 to 0.23 pCi/g] and  
33 averaged 0.00555 Bq/g [0.15 pCi/g].
  - 34

35 In comparison to corresponding shallow {0–5 cm [0–2 in]} soil samples collected from air  
36 monitoring stations, radionuclide concentrations in the vegetation samples are one to two orders  
37 of magnitude lower (Powertech, 2009a). Pb-210 concentrations in the vegetation samples were  
38 significantly higher than the other radionuclides and are likely due to the higher relative  
39 abundance of Pb-210 in air particulates from radon decay products (Powertech, 2009a).

40  
41 Three tissue samples, one liver and two meat samples, were collected from a locally grazing  
42 cow on June 25, 2008. These samples were analyzed for Ra-226, uranium, Th-230, Pb-210,  
43 and Po-210 (Powertech, 2009a, Table 6.1-31). Except for concentration of Po-210 in the liver  
44 tissue sample {0.74 Bq/kg [2.0 × 10<sup>-5</sup> μCi/kg]}, radionuclide concentrations were at or below the  
45 lower limits of detection (see Powertech, 2009a, Table 6.1-31). To satisfy the food sampling  
46 requirements of Regulatory Guide 4.14 (NRC, 1980), the applicant collected tissue samples  
47 from another locally grazing cow and one free ranging, locally grazing pig in April 2011  
48 (Powertech, 2011). These samples were analyzed for Ra-226, uranium, Th-230, and Pb-210  
49 (Powertech, 2011, Table 2.9-19). The tissue sample from the locally grazing cow had  
50 measureable concentrations of uranium {0.085 Bq/kg [2.3 × 10<sup>-6</sup> μCi/kg]}, Ra-226 {0.022 Bq/kg

1 [6.0 × 10<sup>-7</sup> μCi/kg}], and Pb-210 {0.043 Bq/kg [1.16 × 10<sup>-6</sup> μCi/kg]}, while the concentration of  
2 Th-230 was below the lower limit of detection. The tissue sample from the locally grazing pig  
3 had measureable concentrations of uranium {0.30 Bq/kg [8.1 × 10<sup>-6</sup> μCi/kg]} and Ra-226  
4 {0.029 Bq/kg [7.9 × 10<sup>-7</sup> μCi/kg]}, while the concentrations of Th-230 and Pb-210 were below  
5 the lower limit of detection. In accordance with food sampling requirements in Regulatory  
6 Guide 1.14 (NRC, 1980), the applicant has committed to sampling one additional cow, bringing  
7 the total to three, and two additional pigs, bringing the total to three, prior to ISR operations at  
8 the Dewey-Burdock Project site (Powertech, 2011).

9  
10 Twelve fish species (Powertech, 2009a, Table 3.5-27) were collected for radiological analyses  
11 in April 2008 and July 2008 from three sampling locations: (i) BVC04—Beaver Creek upstream  
12 of the proposed project area; (ii) BVC01—Beaver Creek downstream of the proposed project  
13 area; and (iii) CHR05—Cheyenne River downstream of its confluence with Beaver Creek (see  
14 Figure 3.5-2). Whole fish samples were analyzed for uranium, Po-210, Pb-210, Th-230, and  
15 Ra-226 (Powertech, 2009a, Table 3.5-30). In April 2008, the channel catfish (*Ictalurus*  
16 *punctatus*) was the only species collected that contained detectable uranium {0.05 mg/kg  
17 [0.05 ppm] and 3.0 × 10<sup>-5</sup> μCi/kg [1.11 Bq/kg]}. The channel catfish is the only species collected  
18 in the proposed project area that is typically caught for human consumption. In July 2008,  
19 uranium was detected in all the fish species collected due to increased sample sizes (see  
20 Powertech, 2009a, Table 3.5-30). Uranium concentrations ranged from 0.0066 to 0.04 mg/kg  
21 [0.0066 to 0.04 ppm], which is similar to the uranium concentration range of 0.003 to  
22 0.0378 mg/L [0.003 to 0.0378 ppm] in stream samples (see SEIS Sections 3.12.1.2). Uranium  
23 radioactivity ranged from 2.7 × 10<sup>-5</sup> to 4.4 × 10<sup>-6</sup> μCi/kg [1.0 to 0.16 Bq/kg]. Radioactivity from  
24 Po-210, Th-230, and Ra-226 was undetectable or low in most of the fish samples collected in  
25 April and July 2008. Pb-210 was detected in only one fish specimen, the plains killifish  
26 (*Fundulus zebrinus*) collected in April 2008 at the downstream Beaver Creek location (BVC01).  
27 However, due to matrix interference, the precision of this measurement was equal to the  
28 detected concentration {0.02 μCi ± 0.02 μCi [740 Bq ± 740 Bq]}.

### 30 3.12.2 Public Health and Safety

31  
32 NRC has the statutory responsibility, pursuant to the Atomic Energy Act of 1954, as amended  
33 by the Uranium Mill Tailings Radiation Control Act, to protect the public health and safety and  
34 the environment. NRC's regulations at 10 CFR Part 20 specify annual dose limits to members  
35 of the public of 1 mSv [100 mrem] total effective dose equivalent (TEDE) with no more than  
36 0.02 mSv [2 mrem] in any 1-hour period from any external sources. This public dose limit  
37 from NRC-licensed activities is a fraction of the background radiation dose as discussed in  
38 Section 3.12.1.

39  
40 Crow Butte is an operational ISR facility located approximately 105 km [65 mi] south-southeast  
41 of the Dewey-Burdock ISR Project in Dawes County, Nebraska. Because of its distance from  
42 the Dewey-Burdock site, the Crow Butte ISR facility is not considered to represent a source of  
43 radiation exposure in and around the proposed project area. Therefore, baseline radiological  
44 conditions represent the only radiation exposure to individuals in the area surrounding the  
45 proposed Dewey-Burdock ISR Project area.

46  
47 As discussed in SEIS Section 3.12.1, elevated gamma-ray survey readings are associated with  
48 abandoned open pit uranium mines in the eastern and northeastern portion of the Burdock area  
49 (see Figure 3.12-1). Elevated gamma readings are also present in the northern part of the  
50 Dewey area and are likely due to the deposition of windblown dust from the abandoned surface

1 mine areas to the southeast in the Burdock area (see Figure 3.12-1). A final area of elevated  
2 gamma readings is present in the southern part of the Dewey area near an artesian well and is  
3 likely due to discharging groundwater from the Inyan Kara aquifer. Other than these areas of  
4 elevated radiological readings, the information provided for the proposed Dewey-Burdock ISR  
5 Project area does not contain any new or significant findings that are contrary or vary from the  
6 information and conclusion presented in the GEIS. The baseline radiological surveys presented  
7 in Powertech (2009a and 2011) provide adequate documentation of preoperational conditions  
8 for the proposed Dewey-Burdock ISR Project area and would be used as part of the overall  
9 baseline data package during operational and decommissioning activities.

10  
11 The public health in a region is assessed by reviewing health studies conducted in the region  
12 over a period of time. In a review of the public health literature, specifically looking at  
13 radiological and chemical exposures, the applicant identified a South Dakota study with  
14 information specific to the proposed project area (Powertech, 2010a). The South Dakota  
15 Department of Health (SDDOH) conducted a study of cancer rates in nine South Dakota  
16 counties and reported that the presence of existing uranium mines was not associated with  
17 increased cancer death rates (SDDOH, 2006).

### 18 19 **3.12.3 Occupational Health and Safety**

20  
21 Radiation Protection Standards at 10 CFR Part 20 are concerned with occupational health and  
22 safety risks to workers and provide limits on worker exposure to radiation. The regulations  
23 provide annual radiation dose limits for workers and incorporate the principal of maintaining  
24 doses “as low as is reasonably achievable” (ALARA) taking into consideration the purpose of  
25 the licensed activity and its benefits, technology for reducing doses, and the associated health  
26 and safety benefits. A maximum annual occupational dose is determined by the more limiting of  
27 two calculated dose equivalents: (i) 0.05 Sv [5 rem] total effective dose equivalent and (ii) the  
28 sum of the deep-dose equivalent and the committed dose equivalent to any individual organ or  
29 tissue other than the lens of the eye being equal to 0.5 Sv [50 rem]. The lower dose equivalent  
30 calculated is the maximum annual occupational dose. The lens of the eye is limited to a dose  
31 equivalent of 0.15 Sv [15 rem], and the skin (of the whole body or any extremity) is limited to a  
32 shallow dose equivalent of 0.5 Sv [50 rem]. Radiation safety measures that comply with these  
33 10 CFR Part 20 standards must be implemented at ISR facilities to protect workers and to  
34 ensure radiation exposures and doses are below occupational limits as well as ALARA.

35  
36 Also of concern, with respect to occupational health and safety, are industrial hazards and  
37 exposure to nonradioactive pollutants, which for an ISR operation can include normal industrial  
38 airborne pollutants associated with service equipment (e.g., vehicles), fugitive dust emissions  
39 from access roads and well field activities, and various chemicals used in the ISR process.  
40 Industrial safety aspects associated with the use of hazardous chemicals at the proposed  
41 Dewey-Burdock ISR Project would be regulated under the State of South Dakota regulations  
42 and the South Dakota Occupational Safety and Health Administration. The types of chemicals  
43 and impacts are discussed in SEIS Section 4.13.

44  
45 The Occupational Safety and Health Administration (OSHA) does not compile data on  
46 workplace total recordable incident rates and lost-time incident rates specific to the ISR  
47 industry (Powertech, 2010a). Statistics for injuries and illnesses for the ISR industry are  
48 included in the category “Other Metal Ore Mining,” which includes both underground and  
49 surface (open pit) uranium mines (OSHA, 2010). Total recordable incidence rates and total  
50 lost-time incidents for the “Other Metal Ore Mining” category for years 2003 to 2008 are listed in

1 Table 3.12-2. Total recordable incidents are work-related deaths, illnesses, or injuries resulting  
 2 in loss of consciousness, restriction of work or motion, transfer to another job, or required  
 3 medical treatment beyond first aid. A lost-time incident is a recordable incident that results in  
 4 one or more days away from work, days of restricted work activity, or both, for affected  
 5 employees. The incident rate is used for measuring and comparing work injuries, illnesses, and  
 6 accidents within and between industries and can be an indicator of the impacts of operations on  
 7 occupational health.

8  
 9 OSHA data for specific injury/illness and lost time in the ISR industry is not available, although  
 10 the applicant provided operation-specific information from one licensed ISR facility in Texas  
 11 (Powertech, 2010a). Over a 4-year period from 2006 through 2009, the Uranium Resources  
 12 Inc. ISR facility in Lewisville, Texas, which employs about 100 people, reported 36 injuries or  
 13 illnesses requiring medical attention, an average of 9 per year. Over the same period, the ISR  
 14 facility reported four lost-time cases, an average of one per year, and one contractor fatality.

### 15 3.13 Waste Management

16  
 17 SEIS Section 2.1.1.1.6 describes the types and volumes of liquid and solid waste that could be  
 18 generated by operation of the proposed Dewey-Burdock ISR Project. The applicant proposes  
 19 the following disposal practices: (i) nonhazardous solid waste will be disposed in a sanitary  
 20 landfill; (ii) solid byproduct material will be disposed at a licensed waste disposal site or a mill  
 21 tailings facility licensed to receive byproduct material from outside sources; (iii) liquid byproduct  
 22 material will be disposed using either (a) deep Class V disposal wells, (b) land application, or  
 23 (c) a combination of deep Class V disposal wells and land application; and (iv) sanitary waste  
 24 will be disposed in an onsite septic system. The applicant will not generate mixed waste from  
 25 any of the proposed waste management options. Mixed waste consists of a mixture of  
 26 hazardous waste (as defined by the Resource Conservation and Recovery Act) and  
 27 radioactive waste (as defined by the Atomic Energy Act). The applicant expects the  
 28 proposed Dewey-Burdock ISR Project to be classified as a Conditionally Exempt Small  
 29 Quantity Generator of hazardous waste under the Resource Conservation and Recovery Act.  
 30 SDDENR will determine whether that classification applies to the proposed facility (see  
 31 Section 2.1.1.1.6.3). SEIS Section 2.1.1.1.6 describes the annual waste volumes that the  
 32 proposed project is expected to generate. The present section describes the disposition of  
 33 waste streams generated by the proposed project.  
 34  
 35

**Table 3.12-2. Total Recordable Incidence Rates and Total Lost-Time Incidents for the Category "Other Metal Ore Mining"\***

Year	Recordable Incidence Rate (Per 100 Employees)	Total Lost-Time Incidents (Per 100 Employees)
2008	3.6	2.2
2007	3.5	2.0
2006	3.8	2.6
2005	6.0	4.4
2004	<15 total cases	—
2003	<15 total cases	—
Source: OSHA (2010)		
*Includes underground and surface uranium mining.		

36  
 37

### 3.13.1 Liquid Waste Disposal

Liquid wastes generated from operation of the proposed Dewey-Burdock ISR Project will include well development and well test waters; storm water; waste petroleum products and chemicals; sanitary wastewater; and liquid byproduct material including production bleed, process solutions, laboratory chemicals, plant washdown water, and restoration water. Process solutions include process bleed, elution and precipitation brines, and resin transfer wash. The applicant will collect storm water and discharge to surface water in accordance with an SDDENR NPDES permit. Waste petroleum products and chemicals meeting the definition of hazardous waste will be stored in small quantities until disposal in accordance with all applicable local, state, and federal regulatory requirements as described in SEIS Section 2.1.1.1.6.3. The applicant will dispose of sanitary wastewater from restrooms and lunchrooms in an SDDENR-permitted septic system. The applicant will dispose of liquid byproduct material, well development and well test waters via either (i) deep Class V well injection; (ii) land application; or (iii) a combination of deep Class V well injection and land application, as described under the proposed action in SEIS Section 2.1.1.1.6.2. Liquid byproduct material must be treated onsite using a combination of ion exchange, reverse osmosis, and radium settling depending on the disposal option selected as described in Section 2.1.1.1.6.2 (Powertech, 2009a–c). If the applicant uses the deep well disposal option, four to eight Class V wells will be installed, as described in SEIS Section 2.1.1.1.6.2. Figure 2.1-12 shows the proposed land application areas.

### 3.13.2 Solid Waste Disposal

Solid byproduct material (including radioactively contaminated soils or other media) that does not meet NRC unrestricted release criteria must be disposed of at a licensed facility, as required by 10 CFR Part 40, Appendix A, Criterion 2. As described in SEIS Section 2.1.1.1.6.3, the proposed action will generate solid byproduct material that does not meet NRC criteria for unrestricted release. In addition to the regulatory requirements, if an NRC license is granted, NRC staff will require, by license condition, an agreement to be in place before operations begin to ensure the availability of sufficient disposal capacity. The applicant has identified the White Mesa site as the disposal location for solid byproduct material, but a disposal agreement is not yet in place (Powertech, 2011). The White Mesa site, an operating conventional uranium mill in Blanding, Utah, is permitted to construct an additional 1,452,654 m<sup>3</sup> [1,900,000 yd<sup>3</sup>] of tailings impoundment capacity (UDEQ, 2010a); however, in accordance with its license, it must obtain approval from Utah Department of Environmental Quality (UDEQ) to bury ISR waste. Furthermore, it may not receive more than 3,823 m<sup>3</sup> [5,000 yd<sup>3</sup>] of ISR wastes from any single source (UDEQ, 2010b).

As discussed in SEIS Section 2.1.1.1.6.3, nonhazardous solid wastes are materials that are not hazardous waste and comply with NRC unrestricted release limits. All proposed phases of the Dewey-Burdock ISR Project will generate nonhazardous solid waste (Powertech, 2009a). The proposed project is expected to generate solid wastes that could include general facility trash, septic system solids, construction/demolition debris, and any solid byproduct material (such as piping, valves, instrumentation, or equipment) that has been decontaminated to meet NRC criteria for unrestricted release.

The applicant has proposed to dispose of nonhazardous solid waste at the Custer-Fall River Waste Management District landfill at Edgemont, South Dakota, approximately 24 km [15 mi] southeast of the proposed Dewey-Burdock site. The Custer-Fall River landfill received

1 9,964 short tons {approximately 19,060 m<sup>3</sup> [24,910 yd<sup>3</sup>]} of solid waste in 2011 and has a  
2 remaining permitted solid waste capacity of 154,000 tons {approximately 294,567 m<sup>3</sup>  
3 [385,000 yd<sup>3</sup>]} (Barker Concrete & Construction, Inc., 2012). The projected average annual rate  
4 of waste received at the landfill is 8,160 t/yr [9,000 T/yr] (SDDENR, 2010). The remaining  
5 capacity would allow operations of the landfill for an additional 17 years beyond mid-year 2012  
6 (the time of the capacity estimate) if the annual receipt of waste continued at the projected  
7 annual average rate.

8  
9 If additional disposal capacity was needed, the applicant has also proposed to dispose of  
10 nonhazardous solid waste at a landfill in Newcastle, Wyoming (Powertech, 2010a),  
11 approximately 64 km [40 miles] north of the proposed Dewey-Burdock ISR Project site. The  
12 most recent published documentation of landfill characteristics NRC staff identified is from  
13 American Engineering Testing, Inc. (AET, Inc.) (2011). The estimated volume of waste the  
14 Newcastle landfill receives annually is 12,118 m<sup>3</sup> [15,850 yd<sup>3</sup>] (AET, Inc., 2011). The remaining  
15 permitted capacity of the Newcastle landfill was reported as 187,452 m<sup>3</sup> [245,000 yd<sup>3</sup>] and  
16 estimated in 2011 to allow 12 additional years of operation (AET, Inc., 2011). These annual  
17 inputs to waste facilities are provided to show how the proposed action's generation rate  
18 compares with the regional generation from other sources.

19  
20 Another more distant and higher capacity landfill serving Rapid City, South Dakota, is projected  
21 to be operational until 2050 (HDR Engineering Inc., 2010).

### 22 23 **3.14 References**

24  
25 10 CFR Part 20. *Code of Federal Regulations*, Title 10, *Energy*, Part 20. "Standards for  
26 Protection Against Radiation." Washington, DC: U.S. Government Printing Office.

27  
28 10 CFR Part 40. *Code of Federal Regulations*, Title 10, *Energy*, Part 40, Appendix A. "Criteria  
29 Relating to the Operation of Uranium Mills and to the Disposition of Tailings or Wastes  
30 Produced by the Extraction or Concentration of Source Material from Ores Processed Primarily  
31 from their Source Material Content." Washington, DC: U.S. Government Printing Office.

32  
33 23 CFR Part 772. *Code of Federal Regulations*, Title 23, *Highways*, Part 772. "Procedures for  
34 Abatement of Highway Traffic Noise and Construction Noise." Washington, DC:  
35 U.S. Government Printing Office.

36  
37 36 CFR Part 60. *Code of Federal Regulations*, Title 36, *Parks, Forests, and Public*  
38 *Property*, Part 60, Section 4. "Criteria for Evaluation." Washington, DC: U.S. Government  
39 Printing Office.

40  
41 36 CFR Part 800. *Code of Federal Regulations*, Title 36, *Parks, Forests, and Public*  
42 *Property*, Part 800. "Protection of Historic Properties." Washington, DC: U.S. Government  
43 Printing Office.

44  
45 40 CFR Part 50. *Code of Federal Regulations*, Title 40, *Protection of the Environment*, Part 50.  
46 "National Primary and Secondary Ambient Air Quality Standards." Washington DC: U.S.  
47 Government Printing Office.

- 1 40 CFR Part 52. *Code of Federal Regulations*, Title 40, *Protection of the Environment*, Part 52.  
2 Section 21 “Prevention of Significant Deterioration of Air Quality.” Washington DC: U.S.  
3 Government Printing Office.  
4
- 5 40 CFR Part 141. *Code of Federal Regulations*, Title 40, *Protection of the Environment*,  
6 Part 141. “National Primary Drinking Water Regulations.” Washington, DC: U.S. Government  
7 Printing Office.  
8
- 9 40 CFR Part 146. *Code of Federal Regulations*, Title 40, *Protection of the Environment*,  
10 Part 146. “Underground Injection Control Program: Criteria and Standards.” Washington, DC:  
11 U.S. Government Printing Office.  
12
- 13 72 FR 37346. FWS. “Endangered and Threatened Wildlife and Plants; Removing the  
14 Bald Eagle in the Lower 48 States From the List of Endangered and Threatened Wildlife.”  
15 *Federal Register*. Vol. 72, No. 130. pp. 37,345–37,347. July 9, 2007.  
16
- 17 74 FR 66496. “Endangerment and Cause or Contribute Findings for Greenhouse Gases.”  
18 *Federal Register*. Vol. 74, No. 239. pp. 66496–66546. December 15, 2009.  
19
- 20 75 FR 13909. “Endangered and Threatened Wildlife and Plants; 12-Month Findings for  
21 Petitions to List the Greater Sage-Grouse (*Centrocercus urophasianus*) as Threatened or  
22 Endangered.” FWS (U.S. Fish and Wildlife Service). *Federal Register*. Vol. 75, No. 55.  
23 pp. 13909–13959. March 23, 2010.  
24
- 25 76 FR 66370. “Endangered and Threatened Wildlife and Plants; Review of Native Species That  
26 Are Candidates for Listing as Endangered or Threatened; Annual Notice of Findings on  
27 Resubmitted Petitions; Annual Description of Progress on Listing Actions.” FWS (U.S. Fish and  
28 Wildlife Service). *Federal Register*. Vol. 76, No. 207, pp. 66370-66439. October 26, 2011.  
29
- 30 Abbott, J., W, Ranney, and R. Whitten. *Report of the 1982 East River Petroform Survey*.  
31 Vermillion: University of South Dakota Archaeology Laboratory. 1982.  
32
- 33 ACHP (Advisory Council on Historic Preservation). “National Register Evaluation Criteria.”  
34 ML12262A055. 2012. <<http://www.achp.gov/nrcriteria.html>> (05 September 2012).  
35
- 36 AET, Inc.( American Engineering Testing, Inc.). “Solid Waste Management Permit Renewal  
37 Application, Newcastle Landfill #2, Newcastle, Wyoming.” AET #18-03607. Rapid City,  
38 South Dakota: American Engineering Testing, Inc. October 10, 2011.  
39
- 40 ARSD (Administrative Rules of South Dakota). Chapter 74:51:01, Surface Water Quality  
41 Standards. South Dakota Legislature Administrative Rules.  
42
- 43 ARSD. Chapter 74:04:12, Drinking Water Standards. South Dakota Legislature  
44 Administrative Rules.  
45
- 46 ARSD. Chapter 74:36:02:02, Ambient Air Quality Standards. South Dakota Legislature  
47 Administrative Rules.  
48

- 1 Barker Concrete & Construction, Inc. "Custer Fall River Landfill." E-mail from A. Giese, Barker  
2 Concrete & Construction, Inc., to H. Yilma, Project Manager, Office of Federal and State  
3 Materials and Environmental Management Programs, Nuclear Regulatory Commission.  
4 ML12249A250. Edgemont, South Dakota: Barker Concrete & Construction, Inc.  
5 June 28, 2012.  
6
- 7 BLM (U.S. Bureau of Land Management). General Land Office, 1915 Land Patent for Emaline  
8 Richardson. ML12237A219. 2012a. <[http://www.gloreords.blm.gov/details/patent/  
9 default.aspx?accession=455381&docClass=SER&sid=wuksc3su.eus#  
10 patentDetailsTabIndex=1](http://www.gloreords.blm.gov/details/patent/default.aspx?accession=455381&docClass=SER&sid=wuksc3su.eus#patentDetailsTabIndex=1)> (30 July 2012).  
11
- 12 BLM, 2012b. Email Subject "RE: Meeting at 11:30 EST" and attachment "Wildlife and Special  
13 Status Species Stipulations in the current 1986 SD RMP as amended". From S. Michals,  
14 SDGFP Energy and Minerals Coordinator. To H. Yilma, NRC. ML12249A033. June 25, 2012b.  
15
- 16 BLM. "Re: Cultural Resource Review Dewey Burdock." Letter (July 20) R. Blubaugh.  
17 ML12213A694. Belle Fourche, South Dakota: U.S. Department of the Interior, Bureau of Land  
18 Management, South Dakota Field Office. 2012c.  
19
- 20 BLM. "Wyoming Sage-Grouse RPM Amendments." Released August 2011.  
21 <[https://www.blm.gov/epl-front-office/eplanning/planAndProjectSite.do?  
22 methodName=dispatchToPatternPage&currentPageId=18704](https://www.blm.gov/epl-front-office/eplanning/planAndProjectSite.do?methodName=dispatchToPatternPage&currentPageId=18704)> (23 January 2012).  
23
- 24 BLM. "Draft Environmental Impact Statement, Dewey Conveyor Project." DOI-BLM-MT-040-  
25 2009-002-EIS. ML12209A089. Belle Fourche, South Dakota: BLM Field Office,  
26 U.S. Department of Interior. January 2009a. <[http://www.blm.gov/pgdata/etc/medialib/blm/  
27 mt/field\\_offices/south\\_dakota/dakotah.Par.28318.File.dat/DeweyDEIS.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/mt/field_offices/south_dakota/dakotah.Par.28318.File.dat/DeweyDEIS.pdf)> (25 July 2012).  
28
- 29 BLM. "Invasive and Noxious Weeds." 2009b. <[http://www.blm.gov/wo/  
30 st/en/prog/more/weeds.html](http://www.blm.gov/wo/st/en/prog/more/weeds.html)> (20 November 2009).  
31
- 32 BLM. "2009 Montana/Dakotas Special Status Species List." 2009c. Instruction Memorandum  
33 No. MT\_2009-039. ML12276A155. Billings, Montana: BLM Montana State Office. April 23,  
34 2009c. (31 January 2012).  
35
- 36 BLM. "Special Status Species Management." Manual 6840. ML12237A217. December 2008.  
37 <[http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information\\_Resources\\_Management/policy/bl  
38 m\\_manual.Par.43545.File.dat/6840.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information_Resources_Management/policy/blm_manual.Par.43545.File.dat/6840.pdf)> (27 January 2012).  
39
- 40 BLM. "Task 1D: Report for the Powder River Basin Coal Review Current Environmental  
41 Conditions." Prepared for the Bureau of Land Management, Casper Field Office and Wyoming  
42 State Office. Submitted by ENSR Corporation, Fort Collins. ML12237A214. 2005.  
43 <[http://www.blm.gov/pgdata/etc/medialib/blm/wy/programs/energy/coal/prb/coalreview/task1d.P  
44 ar.1940.File.dat/complete.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wy/programs/energy/coal/prb/coalreview/task1d.Par.1940.File.dat/complete.pdf)> (21 May 2012).  
45
- 46 BLM. "The Northern Cheyenne Tribes and Its Reservation", Chapter 7, Northern Cheyenne  
47 Cultural Resources. Prepared for the U.S. Bureau of Land Management and the State of  
48 Montana Department of Natural Resources and Conservation. Prepared by the Northern  
49 Cheyenne Tribe. ML12237A212. 2002. <[http://www.blm.gov/pgdata/etc/medialib/blm/mt/  
50 field\\_offices/miles\\_city/og\\_eis/cheyenne.Par.26503.File.dat/Chap7.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/mt/field_offices/miles_city/og_eis/cheyenne.Par.26503.File.dat/Chap7.pdf)> (21 May 2012).



- 1 BLM. "Newcastle Resource Management Plan." ML12209A101. Newcastle, Wyoming: BLM,  
2 Newcastle Field Office. 2000. <<http://www.blm.gov/rmpweb/Newcastle/rmp.pdf>>  
3 (16 October 2009).  
4
- 5 BLM. "Visual Resource Inventory." Manual H-8410-1. ML12237A196. Washington, DC:  
6 BLM. 1986. <[http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information  
7 Resources\\_Management/policy/blm\\_handbook.Par.31679.File.dat/H-8410.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information_Resources_Management/policy/blm_handbook.Par.31679.File.dat/H-8410.pdf)>  
8 (16 October 2009).  
9
- 10 BLM. "South Dakota Resource Management Plan, Final Environmental Impact Statement."  
11 ML12209A099. Miles City District, Montana: BLM, South Dakota Resource Area. 1985.  
12 <[http://www.blm.gov/pgdata/etc/medialib/blm/mt/blm\\_programs/planning/sd\\_rmp.Par.92799.File  
13 \\_dat/finalchapter3.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/mt/blm_programs/planning/sd_rmp.Par.92799.File_dat/finalchapter3.pdf)> (03 November 2009).  
14
- 15 BLM. "Visual Resource Management." Manual 8400. ML12237A194. Washington, DC: BLM.  
16 1984. <[http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information\\_Resources\\_Management/  
17 policy/blm\\_manual.Par.34032.File.dat/8400.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information_Resources_Management/policy/blm_manual.Par.34032.File.dat/8400.pdf)> (16 October 2009).  
18
- 19 Boggs, J. M. and A. M. Jenkins, Analysis of Aquifer Tests Conducted at the  
20 Proposed Burdock Uranium Mine Site, Burdock, South Dakota, Report No. WR28-1-520-109.  
21 Tennessee Valley Authority 1980.  
22
- 23 Brooks, T., M. McCurry, and D. Hess. "South Dakota State and County Demographic Profiles."  
24 ML12237A222. Brookings, South Dakota: South Dakota Rural Life and Census Data Center.  
25 May 2008. <[http://www.sdstate.edu/soc/rlcdc/i-o/reports/upload/South-Dakota-State-and-  
26 County-Demographic-Profiles-B755.pdf](http://www.sdstate.edu/soc/rlcdc/i-o/reports/upload/South-Dakota-State-and-County-Demographic-Profiles-B755.pdf)> (23 August 2012).  
27
- 28 Bryce, S.A., J.M. Omernik, D.A. Pater, M. Ulmer, J. Schaar, J. Freeouf, R. Johnson, P. Kuck,  
29 and S.H. Azevedo. "Ecoregions of North Dakota and South Dakota." U.S. Geological Survey  
30 Map. Scale 1:1,500,000. 1996.  
31
- 32 Buechler, J.V. "An Intensive (Class III) Cultural Resources Inventory Survey of the  
33 Dacotah Cement Land Exchange Proposal in Southwestern Custer County, South Dakota."  
34 Project No. 99-9. Rapid City, South Dakota: Dakota Research Services. (Submitted to  
35 Dacotah Cement, Rapid City, South Dakota). 1999.  
36
- 37 Center for Climate Strategies. "South Dakota Greenhouse Gas Inventory and Reference Case  
38 Projections 1990-2020." 2007. <[http://www.climatestrategies.us/ewebeditpro/  
39 items/O25F18227.pdf](http://www.climatestrategies.us/ewebeditpro/items/O25F18227.pdf)> (21 December 2009).  
40
- 41 Chapman, S.S., S.A. Bryce, J.M. Omernik, D.G. Despain, J. ZumBerge, and M. Conrad.  
42 "Ecoregions of Wyoming." U.S. Geological Survey Map. Scale 1:1,400,000. 2004.  
43
- 44 Chenoweth, W.L. "Geology and Production History of the Uranium Deposits in the Northern  
45 Black Hills, Wyoming—South Dakota." *Eastern Powder River Basin, Wyoming Geological  
46 Association, 39<sup>th</sup> Annual Field Conference Guidebook*. Casper, Wyoming: Wyoming Geological  
47 Association. pp. 263-270. 1988.  
48

- 1 Chevance, N. Archaeological Survey in the Southern Black Hills, Part 2, for Wyoming Mineral  
2 Corporation. Project No. C-14-79. Archaeological Research Center, Rapid City, South Dakota.  
3 1978.  
4
- 5 Colorado State University. "Canada Thistle." Fact Sheet No. 3.108. ML12276A157. November  
6 2008. <<http://www.ext.colostate.edu/pubs/natres/03108.pdf>>. (31 August 2012).  
7
- 8 Dondanville, R.F. "The Fall River Formation, Northwestern Black Hills; Lithology and Geology  
9 History." *Northern Powder River Basin, Wyoming Geological Association Joint Field*  
10 *Conference Guidebook*. Casper, Wyoming: Wyoming Geological Association, Billings  
11 Geological Society. pp. 87–99. 1963.  
12
- 13 Driscoll, D.G., J.M. Carter, J.E. Williamson, and L.D. Putnam. "Hydrology of the Black Hills  
14 Area, South Dakota." U.S. Geological Survey Water Resources Investigation Report 02-4094.  
15 ML12240A218. 2002. <<http://pubs.usgs.gov/wri/wri024094/pdf/mainbodyofreport-1.pdf>>  
16 (22 December 2009).  
17
- 18 EPA (U.S. Environmental Protection Agency). "Wind Cave NP (WNC429)". 2012.  
19 <[http://www.epa.gov/castnet/javaweb/site\\_pages/WNC429.html](http://www.epa.gov/castnet/javaweb/site_pages/WNC429.html)> (09 Sept 2012).  
20
- 21 EPA. "Regulatory Impact Analysis - Final National Ambient Air Quality Standard for Ozone."  
22 ML12240A237. 2011a. <[http://www.epa.gov/glo/pdfs/201107\\_OMBdraft-OzoneRIA.pdf](http://www.epa.gov/glo/pdfs/201107_OMBdraft-OzoneRIA.pdf)>  
23 (05 June 2012).  
24
- 25 EPA. "National Ambient Air Quality Standards (NAAQS)." ML12240A240. 2011b.  
26 <<http://epa.gov/air/criteria.html>> (23 July 2012).  
27
- 28 EPA. "Final Rule: Prevention of Significant Deterioration and Title V Greenhouse Gas Tailoring  
29 Rule—Fact Sheet." ML12240A235. 2010a. <[http://www.epa.gov/nsr/](http://www.epa.gov/nsr/documents/20100413fs.pdf)  
30 [documents/20100413fs.pdf](http://www.epa.gov/nsr/documents/20100413fs.pdf)> (13 September 2010).  
31
- 32 EPA. "South Dakota, Beaver Watershed." 2010b. <[http://ofmpub.epa.gov/tmdl\\_waters10/](http://ofmpub.epa.gov/tmdl_waters10/attains_watershed_control?p_huc=10120107&p_state=SD&p_cycle=2010&p_report_type=>)  
33 [attains\\_watershed\\_control?p\\_huc=10120107&p\\_state=SD&p\\_cycle=2010&p\\_report\\_type=>](http://ofmpub.epa.gov/tmdl_waters10/attains_watershed_control?p_huc=10120107&p_state=SD&p_cycle=2010&p_report_type=>)  
34 (02 February 2012).  
35
- 36 EPA. "Emission by Category Report—Criteria Air Pollutants for 2002." 2008.  
37 <[http://www.epa.gov/air/data/emcatrep.html?co~46019%2046033%2046047%2046081%  
38 2046093%2046103~Butte%20Co%2C%20Custer%20Co%2C%20Fall%20River%20Co%2C%20  
39 0Lawrence%20Co%2C%20Meade%20Co%2C%20Pennington%20Co%2C%20South%  
40 20Dakota](http://www.epa.gov/air/data/emcatrep.html?co~46019%2046033%2046047%2046081%2046093%2046103~Butte%20Co%2C%20Custer%20Co%2C%20Fall%20River%20Co%2C%20Lawrence%20Co%2C%20Meade%20Co%2C%20Pennington%20Co%2C%20South%20Dakota)> (28 December 2009).  
41
- 42 EPA. "Monitoring and Assessing Water Quality, Chapter 5 Water Quality Conditions." 2006a.  
43 <<http://www.epa.gov/owow/monitoring/volunteer/stream/vms50.html>> (18 March 2010).  
44
- 45 EPA. "Assessment of Variations in Radiation Exposure in the United States (Revision 1)." Contract Number EP–D–05–02. ML12240A227. Washington, DC: EPA. 2006b.  
46 <[http://www.orau.org/ptp/PTP%20Library/library/Subject/Environmental/  
47 radiationbackground.pdf](http://www.orau.org/ptp/PTP%20Library/library/Subject/Environmental/radiationbackground.pdf)> (15 January 2011).  
48  
49

- 1 EPA. "National Primary Drinking Water Regulations; Radionuclides: Final Rule." *Federal*  
2 *Register*: Vol. 65, No. 236. December 7, 2000.  
3
- 4 ESRI (Environmental Systems Research Institute). "ArcGIS 9 Media Kit, ESRI Data and  
5 Maps 9.3." Redlands, California: ESRI. 2008.  
6
- 7 Fahrenbach, M.D., F.V. Steece, J.F. Sawyer, K.A. McCormick, and G.L. McGillivray.  
8 "South Dakota Stratigraphic Correlation Chart." ML12240A243. 2009.  
9 <<http://www.sdgs.usd.edu/pubs/pdf/OGI-01.pdf>> (07 December 2009).  
10
- 11 FHWA (Federal Highway Administration). "Highway Traffic and Construction Noise—Problem  
12 and Response." FHWA–HEP–06–020. Washington, DC: Federal Highway Administration,  
13 Department of Transportation. 2006. <[http://www.fhwa.dot.gov/environment/  
14 noise/regulations\\_and\\_guidance/probresp.cfm](http://www.fhwa.dot.gov/environment/noise/regulations_and_guidance/probresp.cfm)> (14 August 2012).  
15
- 16 FRA (Federal Railroad Administration). "Horn Noise Questions and Answers." 2010.  
17 <<http://www.fra.dot.gov/Pages/1173.shtml>> (25 August 2010).  
18
- 19 Frison, G.C. *Prehistoric Hunters of the High Plains*. 2<sup>nd</sup> Edition. New York City, New York:  
20 Academic Press. 1991.  
21
- 22 FWS (U.S. Fish and Wildlife Service). "Primer 4, An Overview of Current Endangered Species  
23 Act Activities for Greater Sage-Grouse." ML12276A171. 2012a.  
24 <[http://www.fws.gov/mountain-  
25 prairie/species/birds/sagegrouse/Primer4SGOverviewESAActivities.pdf](http://www.fws.gov/mountain-prairie/species/birds/sagegrouse/Primer4SGOverviewESAActivities.pdf)> (20 August 2012).  
26
- 27 FWS. "Re: Follow Up for the Proposed Dewey-Burdock *In-Situ* Recovery Project, Fall River and  
28 Custer Counties, South Dakota." E-mail (August 27) Terry Quesinberry, Fish and Wildlife  
29 Biologist. ML 12240A317. Pierre, South Dakota: FWS. 2012b.  
30
- 31 FWS. "Species Profile, Sprague's Pipit (*Anthus spragueii*)." ML12276A178.  
32 <<http://ecos.fws.gov/speciesProfile/profile/speciesProfile.action?sPCODE=B0GD>> last updated  
33 August 30, 2012c. (30 August 2012).  
34
- 35 FWS. "Sprague's Pipit." ML12276A165. <[http://www.fws.gov/mountain-prairie/species/birds/  
36 spraguespipit/index.html](http://www.fws.gov/mountain-prairie/species/birds/spraguespipit/index.html)> last updated May 20, 2011a. (30 August 2012).  
37
- 38 FWS. "U.S. Fish and Wildlife Service Species Assessment Listing Priority and Assignment  
39 Form, Sprague's Pipit." ML12276A159. May 31, 2011b.  
40 <[http://ecos.fws.gov/docs/candidate/assessments/  
41 2012/r6/B0GD\\_V01.pdf](http://ecos.fws.gov/docs/candidate/assessments/2012/r6/B0GD_V01.pdf)> (30 August 2012).  
42
- 42 FWS. "Environmental Comments on Powertech Dewey-Burdock Project, Custer and Fall River  
43 County, South Dakota." ML100970556. Pierre, South Dakota: FWS. March 29, 2010.  
44
- 45 FWS. "Whooping Cranes and Wind Development – An Issue Paper." April 2009.  
46 <[ftp://wiley.kars.ku.edu/windresource/Whooping Crane and Wind Development FWS %20A  
47 pril%202009.pdf](ftp://wiley.kars.ku.edu/windresource/Whooping_Crane_and_Wind_Development_FWS_April%202009.pdf)> (20 November 2009).  
48  
49  
50

- 1 FWS. "National Bald Eagle Management Guidelines." ML12240A245. 2007.  
2 <<http://www.fws.gov/midwest/Eagle/guidelines/NationalBaldEagleManagementGuidelines.pdf>>  
3 (28 April 2010).  
4
- 5 FWS. "Regarding the Block Clearance Process in South Dakota" Letter (May 13) to Secretary  
6 J. Cooper (South Dakota Game Fish and Parks). Pierre, South Dakota: FWS, Mountain Prairie  
7 Region. 2003a.  
8
- 9 FWS. "An Evaluation of the Block Clearance Process in South Dakota." Letter (May 22) to  
10 Secretary J. Cooper, South Dakota Game Fish and Parks. Pierre, South Dakota: FWS,  
11 Mountain Prairie Region. 2003b.  
12
- 13 FWS. Candidate and Listing Priority Assignment Form, Swift Fox. September 22, 2000.  
14 ML12241A398. Pierre, South Dakota: U.S. Fish and Wildlife. 2000.  
15 <[http://www.fws.gov/mountain-](http://www.fws.gov/mountain-prairie/species/mammals/swiftfox/candidate_assignment_form.pdf)  
16 [prairie/species/mammals/swiftfox/candidate\\_assignment\\_form.pdf](http://www.fws.gov/mountain-prairie/species/mammals/swiftfox/candidate_assignment_form.pdf)> (22 August 2012).  
17
- 18 GCRP (U.S. Global Change Research Program). *Global Climate Change Impacts in the United*  
19 *States*. Washington, DC: Cambridge University Press. 2009.  
20
- 21 Gott, G.B., D.E. Wolcott, and C.G. Bowles. "Stratigraphy of the Inyan Kara Group and  
22 Localization of Uranium Deposits, Southern Black Hills, South Dakota and Wyoming."  
23 ML120310042. U.S. Geological Survey Water Resources Investigation Report 93-4008. 1974.  
24
- 25 Grange, R.T. "Archaeological Investigations in the Red Willow Reservoir." *Anthropology*.  
26 No. 9. Lincoln, Nebraska: Nebraska State Historical Society. 1980.  
27
- 28 Hall, R.L. "Medicine Wheels, Sun Circles, and the Magic of World Center Shrines." *The Plains*  
29 *Anthropologist*. Vol. 30, No. 109. pp. 181–193. August 1985.  
30
- 31 Hart, O.M. "Uranium in the Black Hills." *Ore Deposits of the United States: 1933–1967*.  
32 J.D. Ridge, ed. New York City, New York: American Institute of Mining, Metallurgical, and  
33 Petroleum Engineers. pp. 832–837. 1968.  
34
- 35 HDR Engineering Inc. "Solid Waste Management Plan Rapid City Planning Area Rapid City,  
36 South Dakota." HDR Project No. 00000000111705. Omaha, Nebraska: HDR Engineering, Inc.  
37 January 2010.  
38
- 39 Hester, J.J. "Late Pleistocene Extinction and Radiocarbon Dating." *American Antiquity*.  
40 Vol. 26. pp. 58–77. 1960.  
41
- 42 Hill, A.T. and M.F. Kivett. "Woodland-Like Manifestations in Nebraska." *Nebraska History*.  
43 Vol. 21, No. 3. pp. 146–243. 1940.  
44
- 45 Hodorff. "Habitat Assessment and Conservation Strategy for Sage Grouse and Other Selected  
46 Species on Buffalo Gap National Grassland." ML120240626. Hot Springs, South Dakota: .  
47 U.S. Department of Agriculture, Forest Service. September 2005.  
48
- 49 Hoffman, J.J. "La Roche Site." Smithsonian Institution River Basin Surveys. *Salvage*  
50 *Archeology*. No. 11. Washington, DC: Smithsonian Institution. 1968.

- 1 Kadrmas, Lee, and Jackson, Inc. "Campbell County Coal Belt Transportation Study."  
2 ML12240A251. Gillette, Wyoming: Kadrmas, Lee, and Jackson, Inc. August 2010.  
3 <<http://campbellcountycoalbelt.com/PDF/report.pdf>> (16 August 2012).  
4
- 5 Kruse, J.M., T.V. Gillen, J.R. Bozell, L. Palmer, and A.A. Buhta. "A Level III Cultural Resources  
6 Evaluation of Powertech (USA) Incorporated's Proposed Dewey-Burdock Uranium Project  
7 Locality Within the Southern Black Hills, Custer and Fall River Counties, South Dakota."  
8 Archeological Contract Series No. 216. ML100670302, ML100670309, ML100670314,  
9 ML100670318, ML100670240, ML100670250, ML100670255, ML100670257, ML100670258,  
10 ML100670259, ML100670261, ML100670267, ML100670277, ML100670280, ML100670286,  
11 ML100670289, ML100670363, ML100670365, ML100670366, ML100670482, ML100670232.  
12 Sioux Falls, South Dakota: Augustana College, Archeology Laboratory. 2008.  
13
- 14 Liebmann, M. "Demystifying the Big Horn Medicine Wheel: A Contextual Analysis of Meaning,  
15 Symbolism, and Function." *The Plains Anthropologist*. Vol. 47, No. 180. pp. 61–71.  
16 February 2002.  
17
- 18 Lueck, E.J. and R.P. Winham. "Archeological Investigations of the Ponca Agency Area in  
19 Boyd and Knox Counties, and the Wild Horse Draw/Leeman's Springs Archeological District  
20 in Cheyenne County, Nebraska: 2004–2005." Archeological Contract Series No. 193.  
21 Sioux Falls, South Dakota: Augustana College, Archeology Laboratory. Submitted to  
22 State Historic Preservation Office, Nebraska State Historical Society, Lincoln, Nebraska,  
23 Contract No. NE–04–022. 2005.  
24
- 25 Maxwell, C.H. "Map and Stratigraphic Sections Showing Distribution of Some Channel  
26 Sandstones in the Lakota Formation, Northwestern Black Hills, Wyoming." U.S. Geological  
27 Survey Miscellaneous Field Studies Map MF-632. 1974.  
28
- 29 Molyneaux, B.L., R.A. Fox, L. Sundstrom, E. Hajic, E.A. Bettis III, N.J. Hodgson, W.H. Ranney,  
30 R.M. Hinton, D. Hiemstra, and W. Haakenson. "A 1999 Phase I and II Cultural Resources  
31 Evaluation of a Proposed Railway Corridor from Wall, South Dakota to the Wyoming Border for  
32 the Dakota, Minnesota & Eastern Railroad Corporation's Powder River Basin Expansion  
33 Project." (Draft Report.) Project No. DMERR 97–304–4. Vermillion, South Dakota: University  
34 of South Dakota, Archaeology Laboratory. Submitted to Burns and McDonnell, Kansas City,  
35 Missouri. 2000.  
36
- 37 National Atlas of the United States. 2009. <<http://nationalatlas.gov>> (29 October 2010).  
38
- 39 Naus, C.A., D.G. Driscoll, and J.M. Carter. "Geochemistry of the Madison and Minnelusa  
40 Aquifers in the Black Hills Area, South Dakota." U.S. Geological Survey Water Resources  
41 Investigation Report 01-4129. ML12240A265. 2001.  
42 <<http://pubs.usgs.gov/wri/wri014129/pdf/wri014129.pdf>> (17 August 2012).  
43
- 44 NCRP (National Council on Radiation Protection and Measurements). "Ionizing Radiation  
45 Exposure of the Population of the United States." Report No. 160. Bethesda, Maryland:  
46 NCRP. 2009.  
47  
48

- 1 Nielsen, R.D. "Soil Survey of Custer and Pennington Counties, Prairie Parts, South Dakota."  
2 U.S. Department of Agriculture, Natural Resources Conservation Service and Forest Service, in  
3 cooperation with the South Dakota Agricultural Experiment Station. ML12240A272.  
4 Washington, DC: U.S. Government Printing Office. 1996. <[http://soildatamart.nrcs.usda.gov/  
5 manuscripts/SD605/0/Custer\\_Penn.pdf](http://soildatamart.nrcs.usda.gov/manuscripts/SD605/0/Custer_Penn.pdf)> (17 August 2012).  
6
- 7 Noisat, B. "The PaleoIndians in Black Hills National Forest, Cultural Resources Overview,  
8 Volume 1—Synthetic Summary." T. Church and M. Church, eds. Custer, South Dakota:  
9 U.S. Forest Service, Black Hills National Forest. 1996.  
10
- 11 Northeast Wyoming River Basins Water Plan. 2002. <[http://waterplan.state.wy.us/plan/newy/  
12 techmemos/gwdeterm/gwdeterm\\_summ.html](http://waterplan.state.wy.us/plan/newy/techmemos/gwdeterm/gwdeterm_summ.html)> (10 September 2010).  
13
- 14 NPWRC (Northern Prairie Wildlife Research Center). "Hawks, Eagles, and Falcons of North  
15 Dakota, Red-Tailed Hawk, *Buteo jamaicensis*." ML12276A181. Bismark, North Dakota:  
16 U.S. Department of the Interior, U.S. Geological Survey, Northern Prairie Wildlife Research  
17 Center. <<http://www.npwrc.usgs.gov/resource/birds/hawks/butejama.htm>> last modified  
18 August 3, 2006a. (31 August 2012).  
19
- 20 NPWRC. "Hawks, Eagles, and Falcons of North Dakota, American Kestrel, *Falco sparverius*."  
21 ML12276A232. Bismark, North Dakota: U.S. Department of the Interior, U.S. Geological  
22 Survey, Northern Prairie Wildlife Research Center.  
23 <<http://www.npwrc.usgs.gov/resource/birds/hawks/falcspar.htm>> last modified August 3, 2006b.  
24 (31 August 2012).  
25
- 26 NPWRC. "Hawks, Eagles, and Falcons of North Dakota, Northern Harrier *Circus cyaneus*."  
27 ML12276A242. Bismark, North Dakota: U.S. Department of the Interior, U.S. Geological  
28 Survey, Northern Prairie Wildlife Research Center. <[http://www.npwrc.usgs.gov/resource/birds/  
29 hawks/circcyan.htm](http://www.npwrc.usgs.gov/resource/birds/hawks/circcyan.htm)> last modified August 3, 2006c. (31 August 2012).  
30
- 31 NRC (U.S. Nuclear Regulatory Commission). "Letter (March 4) Invitations for Formal  
32 Consultation Under the Section 106 of the National Historic Preservation Act to Crow Tribe  
33 (ML110550535), Ponca Tribe (ML110550372), and Santee Sioux Tribe (ML110550172)."  
34 Washington, DC: NRC. 2011.  
35
- 36 NRC. "Request for Additional Information Regarding Tribal Historic and Cultural Resources  
37 Potentially Affected by the Powertech (USA) Inc. Proposed Dewey-Burdock *In-Situ* Recovery  
38 Facility." ML100331999. Washington, DC: NRC. March 19, 2010a.  
39
- 40 NRC. Letter (September 10) Invitations for Formal Consultation Under the Section 106 of the  
41 National Historic Preservation Act to Cheyenne River Sioux Tribe (ML102520239), Crow Creek  
42 Sioux Tribe (ML102520156), Eastern Shoshone Tribe (ML102520553), Flandreau-Santee Sioux  
43 Tribe (ML102520194), Lower Brule Sioux Tribe (ML102520220), Lower Sioux Indian  
44 Community (ML102520486), Mandan, Hidatsa, and Arikara Nation (ML102520368), Northern  
45 Arapaho Tribe (ML102520520), Northern Cheyenne Tribe (ML102520504), Rosebud Sioux  
46 Tribe (ML102520282), Sisseton-Wahpeton Oyate (ML102520298), Spirit Lake Tribe  
47 (ML102520393), Standing Rock Sioux Tribe (ML102520308), Yankton Sioux Tribe  
48 (ML102520319), and Oglala Sioux Tribe (ML102520395). Washington, DC: NRC. 2010b.  
49

- 1 NRC. Letter (March 15) from K. Hsueh, Chief-Environmental Review Branch, NRC, to  
2 P. Gober, Fish and Wildlife Conservation Office. "Request for information Regarding  
3 Endangered or Threatened Speices and Critial Habitat for the Powertech, Inc. Proposed  
4 Dewey-Burdock In-Situ Recovery Facility Near Edgemont, South Dakota." ML100331503.  
5 Greenwood Washington, DC: NRC. 2010c.  
6
- 7 NRC. NUREG–1910, "Generic Environmental Impact Statement for *In-Situ* Leach Uranium  
8 Milling Facilities." ML091480244, ML091480188. Washington, DC: NRC. May 2009a.  
9
- 10 NRC. "Site Visit to the Proposed Dewey-Burdock Uranium Project, Fall River and Custer  
11 Counties, South Dakota, and Meetings with Federal, State, and County Agencies, and Local  
12 Organizations, November 30–December 4, 2009." ML093631627. Washington, DC: NRC.  
13 2009b.  
14
- 15 NRC. NUREG–1569, "Standard Review Plan for *In-Situ* Leach Uranium Extraction License  
16 Applications." Washington, DC: NRC. June 2003.  
17
- 18 NRC. Regulatory Guide 4.14, "Radiological Effluent and Environmental Monitoring at Uranium  
19 Mills." Rev. 1. Washington, DC: NRC. April 1980.  
20
- 21 OSHA (Occupational Safety and Health Administration). "Industry Injury and Illness Data,  
22 Summary Tables, Table 1—Incidence Rates of Nonfatal Occupational Injuries and Illnesses by  
23 Industry and Case Types." ML12240A297. Washington, DC: Bureau of Labor Statistics. 2010.  
24 <<http://www.bls.gov/iif/oshwc/osh/os/ostb2813.pdf>> (28 September 2010).  
25
- 26 Palmer, L. "Evaluative Testing of Four Sites within Powertech (USA) Incorporated's Proposed  
27 Dewey-Burdock Uranium Project Locality, Southern Black Hills, Custer and Fall River Counties,  
28 South Dakota." Archeological Contract Series No. 231. Sioux Falls, South Dakota: Augustana  
29 College, Archeology Laboratory. 2009.  
30
- 31 Palmer, L. "A Level III Cultural Resources Evaluation of Powertech (USA) Incorporated's  
32 Proposed Dewey-Burdock Uranium Project Locality within the Southern Black Hills, Custer and  
33 Fall River Counties, South Dakota." Addendum 1: Additional Survey Report. Archeological  
34 Contract Series No.227. ML100670483, ML100670485, ML100670487, ML100670490.  
35 Sioux Falls, South Dakota: Augustana College, Archeology Laboratory. 2008.  
36
- 37 Palmer, L. and J.M. Kruse. "Evaluative Testing of 20 Sites in the Powertech (USA) Inc.  
38 Dewey-Burdock Uranium Project Impact Areas." Black Hills Archaeological Region. Volumes I  
39 and II. Archeological Contract Series No. 251. ML12144A270, ML12144A279,  
40 ML12144A263. Archeology Laboratory, Augustana College, Sioux Falls, South Dakota. 2012.  
41
- 42 Palmer, L. and J.M. Kruse. "A Level III Cultural Resources Evaluation of Powertech (USA)  
43 Incorporated's Proposed Dewey-Burdock Uranium Project Locality within the Southern Black  
44 Hills, Custer and Fall River Counties, South Dakota." Addendum 2: Additional Survey Report.  
45 Archeological Contract Series No.229. ML100670466, ML100670472, ML100670474,  
46 ML100670478, ML100670492. Sioux Falls, South Dakota: Augustana College, Archeology  
47 Laboratory. 2008.  
48  
49

- 1 Parker, P. and T. King. "Guidelines for Evaluating and Documenting Traditional Cultural  
2 Properties." National Register of Historic Places Bulletin 38. ML12240A371. 1990.  
3 <<http://www.nps.gov/nr/publications/bulletins/pdfs/nrb38.pdf>> (17 August 2012).  
4
- 5 Peterson, R.A. "The South Dakota Breeding Bird Atlas." Jamestown, North Dakota: Northern  
6 Prairie Wildlife Research Center. 1995. <[http://www.npwrc.usgs.gov/  
7 resource/birds/sdatlas/index.htm](http://www.npwrc.usgs.gov/resource/birds/sdatlas/index.htm)> (16 March 2010).  
8
- 9 Powertech [Powertech (USA) Inc.]. E-mail (August 3) to H. Yilma, Project Manager, Office of  
10 Federal and State Materials and Environmental Management Programs, U.S. Nuclear  
11 Regulatory Commission, from R. Blubaugh. "SHPO Comments and Related Commitments."  
12 ML12262A491. Greenwood Village, Colorado: Powertech. 2012.  
13
- 14 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
15 and Custer Counties, South Dakota." Technical Report RAI Responses. ML112071064.  
16 Greenwood Village, Colorado: Powertech. June 2011.  
17
- 18 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
19 and Custer Counties, South Dakota ER\_RAI Response August 11, 2010." ML102380516.  
20 Greenwood Village, Colorado: Powertech. 2010a.  
21
- 22 Powertech. "Responses to NRC Verbal and Email Requests for Clarification of Selected Issues  
23 Related to the Dewey-Burdock Uranium Project Environmental Review." Letter ( November 4)  
24 to R. Burrows, U.S. Nuclear Regulatory Commission from R. Blubaugh. Docket No. 040-09075;  
25 TAC NO. J 00533. ML110820582. Greenwood Village, Colorado: Powertech. 2010b.  
26
- 27 Powertech. "Responses to NRC Verbal Request for Clarification of Response Regarding  
28 Inclusion of Emissions from Drilling Disposal Wells; Dewey-Burdock Uranium Project  
29 Environmental Review." Letter (November 17) to R. Burrows, U.S. Nuclear Regulatory  
30 Commission, from R. Blubaugh. Docket No. 040-09075; TAC NO. J 00533. ML103220208.  
31 Greenwood Village, Colorado: Powertech. 2010c.  
32
- 33 Powertech. "Updated Technical Report on the Dewey-Burdock Uranium Project, Custer and  
34 Fall River Counties South Dakota." Greenwood Village, Colorado: Powertech. 2010d.  
35 <[http://www.powertechuranium.com/i/pdf/Dewey\\_Burdock\\_NI\\_43\\_101\\_Technical\\_Report.pdf](http://www.powertechuranium.com/i/pdf/Dewey_Burdock_NI_43_101_Technical_Report.pdf)>  
36 (20 August 2012).  
37
- 38 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
39 and Custer Counties, South Dakota—Environmental Report." Docket No. 040-09075.  
40 ML092870160. Greenwood Village, Colorado: Powertech. August 2009a.  
41
- 42 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
43 and Custer Counties, South Dakota—Technical Report." Docket No. 040-09075.  
44 ML092870160. Greenwood Village, Colorado: Powertech. August 2009b.  
45
- 46 Powertech. "Dewey-Burdock Project, Supplement to Application for NRC Uranium Recovery  
47 License Dated February 2009" Docket No. 040-09075. ML092870160. Greenwood Village,  
48 Colorado: Powertech. August 2009c.  
49



- 1 Rahn, P.H. "Groundwater stored in the rocks of western South Dakota." *Geology of the Black*  
2 *Hills, South Dakota and Wyoming. 2<sup>nd</sup> Edition. Geological Society of America, Field Trip*  
3 *Guidebook.* F.J. Rich, ed. Alexandria, Virginia: American Geological Institute. pp. 154–174  
4
- 5 Reher, C.A. "Archaeological Survey and Testing Project for the Silver King Mine, Tennessee  
6 Valley Authority, A Summary Report." Casper, Wyoming: Tennessee Valley Authority. 1981.  
7
- 8 Renfro, A.R. "Uranium Deposits in the Lower Cretaceous of the Black Hills." *Contributions to*  
9 *Geology.* Laramie, Wyoming: University of Wyoming. Vol. 8, No. 2-1. pp. 87–92. 1969.  
10
- 11 Robinson, D. "A History of the Dakota or Sioux Indians. Minneapolis, Minnesota: Ross and  
12 Haines, Inc. 1904.  
13
- 14 Sage-Grouse Working Group (Northeast Wyoming Sage-Grouse Working Group). "Northeast  
15 Wyoming Sage-Grouse Conservation Plan." ML12240A374. 2006.  
16 <[http://wgfd.wyo.gov/web2011/](http://wgfd.wyo.gov/web2011/Departments/Wildlife/pdfs/SG_NECONSERVATIONPLAN0000678.pdf)  
17 [Departments/Wildlife/pdfs/SG\\_NECONSERVATIONPLAN0000678.pdf](http://wgfd.wyo.gov/web2011/Departments/Wildlife/pdfs/SG_NECONSERVATIONPLAN0000678.pdf)> (29 September 2009).  
18
- 19 SD ARC (South Dakota Archaeological Research Center). South Dakota Archaeological  
20 Research Center Field Site Form Manual. ML12241A387. Rapid City, SD. June 5, 2006.  
21 <<http://history.sd.gov/archaeology/downloads/site-manual.pdf>> (12 October 2012).  
22
- 23 SDCL (South Dakota Codified Law) 34-27. Cemeteries and Burial Records. Chapter 34-27.  
24 South Dakota Legislature.  
25
- 26 SDDENR (South Dakota Department of Environmental and Natural Resources). "Oil and Gas  
27 Well, Test Hole, and Permit Locations With Field and Enhanced Recovery Unit Boundaries, Fall  
28 River County, SD." ML12250A652. Pierre, South Dakota: South Dakota Department of  
29 Environmental and Natural Resources Geological Survey. May 2012a.  
30 <[http://denr.sd.gov/des/og/documents/](http://denr.sd.gov/des/og/documents/Fall_River_oil_gas_fields_units.pdf) Fall\_River\_oil\_gas\_fields\_units.pdf> (21 August 2012).  
31
- 32 SDDENR. Oil and Gas Well, Test Hole, and Permit Locations with Barker Dome Field  
33 Boundary, Custer County, SD. ML12250A706. Pierre, South Dakota: South Dakota  
34 Department of Environmental and Natural Resources Geological Survey. May 2012b.  
35 <[http://denr.sd.gov/des/og/documents/](http://denr.sd.gov/des/og/documents/Custer_oil_gas_fields_001.pdf) Custer\_oil\_gas\_fields\_001.pdf> (21 August 2012).  
36
- 37 SDDENR. "Oil and Gas Drilling Permits Issued From 2005–2011." Pierre, South Dakota:  
38 South Dakota Department of Environmental and Natural Resources. 2012c.  
39 <<http://denr.sd.gov/des/og/newpermit.aspx>> (21 August 2012).  
40
- 41 SDDENR. "South Dakota Ambient Air Monitoring Annual Network Plan 2011." ML12240A382.  
42 2011a. <<http://denr.sd.gov/des/aa/aqnews/Ann%20plan%202011%20Finalc.pdf>>  
43 (06 June 2012).  
44
- 45 SDDENR. "South Dakota Fish Consumption Advisories." ML12276A255. 2011b.  
46 <<http://denr.sd.gov/des/sw/fish.aspx>> (31 August 2012).  
47
- 48 SDDENR. "RE: Attn: Steve Kropp – Limited Request for Information (Stats for Local Landfill)  
49 for USNRC Review." E-mail (December 20) to P. LaPlante, Southwest Research Institute®,  
50 from S. Kropp, SDDENR. ML111300205. Pierre, South Dakota: SDDENR. 2010.

- 1 SDDENR. "The 2008 South Dakota Integrated Report for Surface Water Quality Assessment."  
2 ML12240A378. Pierre, South Dakota: 2008. <<http://denr.sd.gov/documents/08IRFinal.pdf>>  
3 (05 November 2009).  
4
- 5 SDDOA (South Dakota Department of Agriculture). "State Noxious Weeds." ML12276A259.  
6 Pierre, South Dakota: South Dakota Department of Agriculture. 2011.  
7 <[http://sdda.sd.gov/ag\\_services/Plant-Protection/Weed%20and%20Pest/Local-Noxious-](http://sdda.sd.gov/ag_services/Plant-Protection/Weed%20and%20Pest/Local-Noxious-Weeds.aspx)  
8 [Weeds.aspx](http://sdda.sd.gov/ag_services/Plant-Protection/Weed%20and%20Pest/Local-Noxious-Weeds.aspx)> (31 August 2012).  
9
- 10 SDDOE (South Dakota Department of Education). "Statistical Digest." 2010.  
11 <<http://doe.sd.gov/ofm/applications/StatDigest/default.asp>> (30 April 2012).  
12
- 13 SDDOH (South Dakota Department of Health). "Uranium Mining: Concerns on Cancer  
14 Mortality and Incidence." Letter (May 4) to Steve Pimer, Department of Environment and  
15 Natural Resources. Pierre, South Dakota: SDDOH. 2006.  
16
- 17 SDDOL (South Dakota Department of Labor). "Labor Force." Pierre, South Dakota: South  
18 Dakota Department of Labor, Labor Market Information Center. 2012.  
19 <[http://dol.sd.gov/lmic/menu\\_labor\\_force.aspx](http://dol.sd.gov/lmic/menu_labor_force.aspx)> (07 June 2012).  
20
- 21 SDDOT (South Dakota Department of Transportation). "Statewide Traffic Flow Map."  
22 ML12240A386. 2011.  
23 <[http://www.sddot.com/transportation/highways/traffic/docs/Traffic\\_2011.pdf](http://www.sddot.com/transportation/highways/traffic/docs/Traffic_2011.pdf)> (14 June 2012).  
24
- 25 SDDOT. "South Dakota Interstate Corridor Study Phase I Summary Report." Pierre,  
26 South Dakota: SDDOT. December, 2000.  
27
- 28 SDDRR (South Dakota Department of Revenue and Regulation). "Property Tax Publications."  
29 Pierre, South Dakota: SDDRR. 2012a <[http://www.state.sd.us/drr2/prospectax/](http://www.state.sd.us/drr2/prospectax/propertypublications.htm)  
30 [propertypublications.htm](http://www.state.sd.us/drr2/prospectax/propertypublications.htm)> (08 June 2012).  
31
- 32 SDDRR. "South Dakota Sales and Use Tax Report." ML12241A182. Pierre, South Dakota:  
33 South Dakota Department of Revenue and Regulation. January 5, 2012b.  
34 <[http://www.state.sd.us/drr2/](http://www.state.sd.us/drr2/businesstax/businessstax/statistics/2011/CY%202011/CY11CountybyCitybyMG.pdf)  
35 [businesstax/statistics/2011/CY%202011/CY11CountybyCitybyMG.pdf](http://www.state.sd.us/drr2/businesstax/businessstax/statistics/2011/CY%202011/CY11CountybyCitybyMG.pdf)>. (08 June 2012).  
36
- 37 SDDRR. "Sales and Use Tax Guide." ML12240A388. Pierre, South Dakota: South Dakota  
38 Department of Revenue. July 2011. <[http://www.state.sd.us/drr2/businesstax/](http://www.state.sd.us/drr2/businesstax/publications/st/salestaxguide.pdf)  
39 [publications/st/salestaxguide.pdf](http://www.state.sd.us/drr2/businesstax/publications/st/salestaxguide.pdf)> (11 June 2012).  
40
- 41 SDGFP (South Dakota Game Fish and Parks). "Bald Eagle Awareness Days." 2012a.  
42 <<http://gfp.sd.gov/outdoor-learning/bald-eagle-awareness-days/default.aspx>>  
43 (17 January 2012).  
44
- 45 SDGFP. "Prairie Chicken and Grouse (Sharp-tailed and Ruffed)." 2012b.  
46 <<http://gfp.sd.gov/hunting/small-game/prairie-chicken-ruffed-grouse.aspx>> (13 April 2012).  
47
- 48 SDGFP. Email Subject "SD GFP wildlife data" and attachments. From S. Michals, SDGFP  
49 Energy and Minerals Coordinator. To A. Hester, CNWRA. ML12249A230. January 31, 2012c.  
50

- 1 SDGFP . “Threatened & Endangered or Rare Species .” March 16, 2010.  
2 <<http://gfp.sd.gov/wildlife/threatened-endangered/default.aspx>> (17 January 2012).  
3
- 4 SDGFP. “Sage Grouse Population Dynamics.” 2009.  
5 <<http://gfp.sd.gov/hunting/small-game/sage-grouse-population-dynamics.aspx>>  
6 (20 November 2009).  
7
- 8 SDGFP. “Greater Sage Grouse Management Plan South Dakota.” ML12241A215. 2008.  
9 <<http://gfp.sd.gov/wildlife/docs/sage-grouse-management-plan.pdf>> (2 April 2012).  
10
- 11 SDGFP. “A Birder’s Guide to the George S. Mickelson Trail.” ML12241A204. Rapid City,  
12 South Dakota: SDGFP. 2005a. <<http://gfp.sd.gov/to-do/docs/mickelson-trail-birding.pdf>>  
13 (19 March 2010).  
14
- 15 SDGFP. “South Dakota All Bird Conservation Plan.” 2005b. ML12241A195. Pierre,  
16 South Dakota: South Dakota Game Fish and Parks. 2005b. <[http://gfp.sd.gov/wildlife/docs/  
17 bird-plan.pdf](http://gfp.sd.gov/wildlife/docs/bird-plan.pdf)> (23 April 2012).  
18
- 19 SDGS (South Dakota Geological Survey). “Earthquakes in South Dakota (1872–2010).” 2010.  
20 <<http://www.sdgs.usd.edu/publications/maps/earthquakes/earthquakes.htm>>  
21 (30 November 2010).  
22
- 23 Somma, L. A. “Nonindigenous Aquatic Species, *Apalone spinifera*.” 2011.  
24 Gainesville, Florida: U.S. Geological Survey. <[http://nas.er.usgs.gov/queries/FactSheet.aspx?  
25 SpeciesID=1274](http://nas.er.usgs.gov/queries/FactSheet.aspx?SpeciesID=1274)> November 2011. (8 May 2012).  
26
- 27 South Dakota State University. “South Dakota GAP Analysis Project.” Brookings,  
28 South Dakota: South Dakota State University, Department of Wildlife and Fisheries Sciences.  
29 <<http://www.sdstate.edu/nrm/gap/index.cfm>> (13 January 2012).  
30
- 31 South Dakota Statue, Title 10, Taxation. April 1, 2012. Pierre, South Dakota: South Dakota  
32 Legislature. <<http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=10&Type=Statute>>  
33 (11 June 2012).  
34
- 35 SRI (SRI Foundation). “Overview of Places of Traditional and Cultural Significance,  
36 Cameco/Powertech Project Areas.” SRI Foundation. ML12262A113. June 8, 2012.  
37
- 38 Strobel, M.L., J.M. Galloway, G.R. Hamade, and G.J. Jarrell. “Potentiometric Surface of the  
39 Minnekahta Aquifer in the Black Hills Area, South Dakota.” U.S. Geological Survey Hydrologic  
40 Investigations Atlas HA–745–B. Scale 1:100,000. 1999.  
41
- 42 Sundstrom, L. *Boulder Effigy Sites in South Dakota: History, Description, and Evaluation*.  
43 Submitted to South Dakota State Historical Society, Cultural Heritage Center. Day Star  
44 Research. Ms on file with the South Dakota State Historical Society. 2006.  
45
- 46 Sundstrom, L. “Mirror of Heaven: Cross-Cultural Transference of the Sacred Geography of the  
47 Black Hills.” *World Archaeology*. Vol. 28, No. 2. pp. 177–189. October 1996.  
48  
49

- 1 Surface Transportation Board. Letter (January 6) from to Mr. Richard Currit, Department of  
2 State Parks & Cultural Resources, Wyoming State Historic Preservation Office. ML12241A225.  
3 2010. <[http://www.stb.dot.gov/ect1/ecorrespondence.nsf/  
4 PublicOutgoingByLetterDate/0728DFCAFDB15761852576A500537DD6/\\$File/EO-  
5 1388.pdf?OpenElement](http://www.stb.dot.gov/ect1/ecorrespondence.nsf/PublicOutgoingByLetterDate/0728DFCAFDB15761852576A500537DD6/$File/EO-1388.pdf?OpenElement)> (21 May 2012).  
6
- 7 Tratebas, A.M. “Black Hills Settlement Patterns: Based on a Functional Approach.” Ph.D.  
8 dissertation, Indiana University, Department of Anthropology. Taken from Noisat, 1996.  
9
- 10 TVA (Tennessee Valley Authority). “Draft Environmental Statement for the Edgemont Uranium  
11 Mine.” Knoxville, Tennessee: TVA. 1979.  
12
- 13 UDEQ (Utah Department of Environmental Quality). “Division of Radiation Control; Denison  
14 Mines (USA) Corp.; Review of License Amendment Request and Environmental Report for Cell  
15 4B; Safety Evaluation Report; Under UAC R313-24 and UAC R317-6. ML12241A232. Salt  
16 Lake City, Utah: State of Utah Department of Environmental Quality, Division of Radiation  
17 Control. 2010a. <[http://www.radiationcontrol.utah.gov/Uranium\\_Mills/  
18 IUC/cell4b/docs/2010/permitMod\\_LAmend/SER\\_UT1900479.pdf](http://www.radiationcontrol.utah.gov/Uranium_Mills/IUC/cell4b/docs/2010/permitMod_LAmend/SER_UT1900479.pdf)> (20 December 2010).  
19
- 20 UDEQ. “Radioactive Materials License No. UT1900479.” ML12241A243. Salt Lake City, Utah:  
21 State of Utah Department of Environmental Quality, Division of Radiation Control. 2010b.  
22 <[http://www.radiationcontrol.utah.gov/Uranium\\_Mills/IUC/cell4b/docs/2010/permitMod\\_LAmend/  
23 4BER%20UT1900479%20061410.pdf](http://www.radiationcontrol.utah.gov/Uranium_Mills/IUC/cell4b/docs/2010/permitMod_LAmend/4BER%20UT1900479%20061410.pdf)> (20 December 2010).  
24
- 25 USCB (U.S. Census Bureau). “American FactFinder, Census 2000 and 2010, 2006–2010  
26 American Community Survey 5-Year Estimate, State and County QuickFacts.” ML12248A240.  
27 2012. <<http://factfinder.census.gov>, <http://quickfacts.census.gov>> (17 April 2012).  
28
- 29 USDA. “2007 Census of Agriculture—County Data, South Dakota.” National Agricultural  
30 Statistics Service. ML12241A366. 2009. <[http://www.agcensus.usda.gov/Publications/  
31 2007/Full\\_Report/Volume\\_1,\\_Chapter\\_2\\_County\\_Level/South\\_Dakota/st46\\_2\\_011\\_011.pdf](http://www.agcensus.usda.gov/Publications/2007/Full_Report/Volume_1,_Chapter_2_County_Level/South_Dakota/st46_2_011_011.pdf)>  
32 (03 November 2009).  
33
- 34 USFS (U.S. Forest Service). “Updated Land and Resource Management Plan for the Nebraska  
35 National Forests and Grasslands, Rocky Mountain Region.” ML12209A127. 2009.  
36 <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/fsm9\\_027969.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fsm9_027969.pdf)> (09 December 2009).  
37
- 38 USFS. “Black Hills National Forest, Phase II Amendment: 1997 Land and Resource  
39 Management Plan Final Environmental Impact Statement.” ML12209A121. 2005.  
40 <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/stelprdb5176525.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/stelprdb5176525.pdf)> (16 October 2009).  
41
- 42 USFS. Sioux Ranger District FEIS: Chapter 3 – Affected Environment/Environmental  
43 Consequences. U.S. Department of Agriculture, Forest Service, Custer National Forest, Custer  
44 National Forest. 2004.  
45
- 46 USFS. “Black Hills National Forest, Phase I Amendment: 1997 Land and Resource  
47 Management Plan Environmental Assessment.” ML12209A113. 2001.  
48 <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/fsm9\\_011960.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fsm9_011960.pdf)> (16 October 2009).  
49  
50

- 1 USFS. "Black Hills National Forest Land and Resource Management Plan." ML12209A110.  
2 1997. <[http://www.fs.usda.gov/Internet/FSE\\_DOCUMENTS/fsm9\\_011921.pdf](http://www.fs.usda.gov/Internet/FSE_DOCUMENTS/fsm9_011921.pdf)>  
3 (03 November 2009).  
4
- 5 USFS. "Landscape Aesthetics: A Handbook for Scenery Management." Agricultural Handbook  
6 No. 701. ML12241A377. Washington, DC: USFS. 1995.  
7 <[http://www.fs.fed.us/cdt/carrying\\_capacity/landscape\\_aesthetics\\_handbook\\_701\\_no\\_append.p](http://www.fs.fed.us/cdt/carrying_capacity/landscape_aesthetics_handbook_701_no_append.pdf)  
8 [df](http://www.fs.fed.us/cdt/carrying_capacity/landscape_aesthetics_handbook_701_no_append.pdf)> (17 August 2012).  
9
- 10 USFS. "National Forest Landscape Management: Vol. 2, Chapter 1—The Visual Management  
11 System." Agricultural Handbook No. 462. ML12241A372. Washington, DC: USFS. 1974.  
12 <<http://naldc.nal.usda.gov/download/CAT87208522/PDF>> (17 August 2012).  
13
- 14 USGS (U.S. Geological Survey). "National Water Information System." USGS Real-Time  
15 Water Data. 2010. <<http://waterdata.usgs.gov/nwis/rt>> (08 September 2010).  
16
- 17 USGS. "Quaternary Fault and Fold Database for the United States." 2006a.  
18 <<http://earthquakes.usgs.gov/regional/qfaults/>> (22 December 2010).  
19
- 20 USGS. "Fragile Legacy, Endangered, Threatened, and Rare Animals of South Dakota,  
21 Black-footed Ferret (*Mustela nigripes*)." 2006b. <[http://www.npwrc.usgs.gov/resource/wildlife/](http://www.npwrc.usgs.gov/resource/wildlife/sdrare/species/mustnigr.htm)  
22 [sdrare/species/mustnigr.htm](http://www.npwrc.usgs.gov/resource/wildlife/sdrare/species/mustnigr.htm)> (20 November 2009).  
23
- 24 USGS. "Breeding Birds of South Dakota, Sprague's Pipit (*Anthus spragueii*)." ML12276A266.  
25 2006c. <<http://www.npwrc.usgs.gov/resource/birds/sdatlas/species/70000.htm>> last updated  
26 August 3, 2006. (30 August 2012).  
27
- 28 USGS. "Ecoregions of North Dakota and South Dakota." Wildlife Research Center Online.  
29 1998. <<http://www.npwrc.usgs.gov/resource/habitat/ndsdeco/sodak.htm>> (15 March 2010).  
30
- 31 WDAI (Wyoming Department of Administration and Information). "Population of Wyoming,  
32 Counties, Cities, and Towns : 2010 to 2030 ." ML12250A716. Cheyenne, Wyoming, Wyoming  
33 Department of Administration and Information, Economic Analysis Division. 2011.  
34 <<http://eadiv.state.wy.us/pop/wyc&sc30.htm>> (25 June 2012)  
35
- 36 Weston County Assessor. "Total Assessed Valuations for Weston County for 1998–2010."  
37 <[http://www.westongov.com/departments/county\\_assessor/total\\_assessed\\_valuations.asp](http://www.westongov.com/departments/county_assessor/total_assessed_valuations.asp)>.  
38 (8 June 2012).  
39
- 40 WGFD (Wyoming Game and Fish Department). "Occupied Sage Grouse Lek Data." 2011.  
41 <[ftp://gf.state.wy.us/Sage\\_Grouse\\_Lek\\_Data](ftp://gf.state.wy.us/Sage_Grouse_Lek_Data)> Password protected (31 January 2012).  
42
- 43 Winham, R.P. and L.A. Hannus. "South Dakota State Plan for Archeological Resources:  
44 Introduction and Overview of Study Units and Archeological Management Regions."  
45 ML12241A387. Sioux Falls, South Dakota: State Archaeological Research Center, Rapid City  
46 and Archeology Laboratory, Augustana College. 1990. <[http://history.sd.gov/preservation/](http://history.sd.gov/preservation/NatReg/ArcheologyStatePlan.pdf)  
47 [NatReg/ArcheologyStatePlan.pdf](http://history.sd.gov/preservation/NatReg/ArcheologyStatePlan.pdf)> (17 August 2012).  
48  
49

- 1 WSDOT (Washington State Department of Transportation). Biological Assessment Preparation  
2 for Transportation Projects—Advanced Training Manual Version 02-2012, 7.0 Construction  
3 Noise Impact Assessment. ML12250A723. Olympia, Washington: Washington State  
4 Department of Transportation. 2012. <[http://www.wsdot.wa.gov/NR/rdonlyres/448B609A-  
5 A84E-4670-811B-9BC68AAD3000/0/BA\\_ManualChapter7.pdf](http://www.wsdot.wa.gov/NR/rdonlyres/448B609A-A84E-4670-811B-9BC68AAD3000/0/BA_ManualChapter7.pdf)> (23 August 2012).  
6
- 7 Wyoming Department of Education. “Wyoming School District Statistical Report Series #2.”  
8 2010. <<http://edu.wyoming.gov/DataInformationAndReporting/StatisticalReportSeries2.aspx>>  
9 (01 May 2012).  
10
- 11 Wyoming Department of Revenue. “Sales and Use Tax Distribution Reports.” ML12240A261.  
12 2012. <<http://revenue.state.wy.us/PortalVBVS/DesktopDefault.aspx?tabindex=3&tabid=10>>  
13 (11 September 2012).  
14
- 15 Wyoming Department of Workforce Services. “Local Area Unemployment Statistics.” Casper,  
16 Wyoming: Wyoming Department of Workforce Services, Research and Planning. 2012.  
17 <<http://doe.state.wy.us/LMI/laus.htm>> (07 June 2012).  
18
- 19 Wyoming Statute, Title 39, Taxation and Revenue. July 1, 2011. Cheyenne, Wyoming:  
20 Wyoming Legislature. <<http://legisweb.state.wy.us/LSOWeb/StatutesDownload.aspx>>  
21 (11 June 2012).  
22
- 23 Wyoming Oil and Gas Conservation Commission. Map Server. Casper, Wyoming, WYOGCC.  
24 2012. <<http://wogccms.state.wy.us/>> (21 August 2012).  
25
- 26 Zouhar, K. “Cynoglossum Officinale.” *Fire Effects Information System*. ML12276A293.  
27 Missoula, Montana: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research  
28 Station, Fire Sciences Laboratory. 2002. <<http://www.fs.fed.us/database/feis/>>  
29 (31 August 2012).  
30
- 31 Zollinger, R. and R. Lym. “Identification and Control of Field Bindweed.” W-802.  
32 ML12276A280. Fargo, North Dakota: North Dakota State University. 2000.  
33 <<http://www.ag.ndsu.edu/pubs/plantsci/weeds/w802w.htm>> (31 August 2012).

1           **4 ENVIRONMENTAL IMPACTS OF CONSTRUCTION, OPERATIONS,**  
2           **AQUIFER RESTORATION, AND DECOMMISSIONING ACTIVITIES**  
3           **AND MITIGATIVE ACTIONS**

4  
5           **4.1           Introduction**  
6

7           The Generic Environmental Impact Statement (GEIS) for *In-Situ* Leach Uranium Milling  
8           Facilities (NRC, 2009a) evaluated the potential environmental impacts of implementing *in-situ*  
9           recovery (ISR) operations in four distinct geographic regions, including the Nebraska-South  
10          Dakota-Wyoming Uranium Milling Region where the proposed Dewey-Burdock ISR Project is  
11          located. This chapter evaluates the potential environmental impacts from Alternative 1  
12          (implementing the proposed action, which includes options for liquid waste disposal) and  
13          Alternative 2 (the No-Action alternative). In addition, the U.S. Nuclear Regulatory Commission  
14          (NRC) staff considered other reasonable alternative actions at the proposed Dewey-Burdock  
15          ISR Project. These included alternative sites, alternative lixivants, alternative well completion  
16          methods, conventional mining and milling, and conventional mining and heap leach processing.  
17          These alternatives were eliminated from detailed analysis for reasons described in Section 2.2  
18          of the supplemental environmental impact statement (SEIS).  
19

20          This chapter analyzes the four lifecycle phases of ISR uranium extraction (construction,  
21          operations, aquifer restoration, and decommissioning/reclamation) at the proposed site using  
22          the analytical approach described in the GEIS (NRC, 2009a). The results of the GEIS impact  
23          analyses for the Nebraska-South Dakota-Wyoming Uranium Milling Region, as summarized in  
24          Table 1.4-1, were used to focus the site-specific environmental review at the proposed Dewey-  
25          Burdock ISR Project. In situations where the GEIS concluded a wide range of impacts on a  
26          particular resource area could range from SMALL to LARGE, the NRC staff evaluated the  
27          resource area in greater detail for this site-specific SEIS. The site-specific analyses describe  
28          new information the NRC staff obtained during its independent site-specific review. The  
29          potential impacts of the new information were evaluated to determine whether they changed the  
30          expected impacts presented in the GEIS.  
31

32          This chapter also analyzes the environmental impacts of liquid waste disposal options that the  
33          applicant may use at the proposed project site (see SEIS Section 2.1.1.1.2.4). These options  
34          include deep well disposal via Class V injection wells, disposal via land application, and disposal  
35          via a combination of Class V injection wells and land application. The applicant's use of  
36          deep well disposal is contingent on obtaining a permit for Class V injection wells from the  
37          U.S. Environmental Protection Agency (EPA). EPA is currently reviewing an application for a  
38          Class V injection well permit (see Table 1.6-1). The applicant's use of land application is  
39          contingent on obtaining a groundwater discharge permit (GDP) from the South Dakota  
40          Department of Environmental and Natural Resources (SDDENR). SDDENR is currently  
41          reviewing a GDP application for land application (see Table 1.6-1).  
42

43          SEIS Sections 4.2 through 4.14 evaluate potential impacts from both the proposed action (which  
44          includes construction, operations, aquifer restoration, and decommissioning/reclamation using  
45          Class V deep injection wells, land application, or a combination of both for management of  
46          process-related liquid waste streams) and the No-Action alternative (which means no ISR  
47          facility would be built and operated at the proposed Dewey-Burdock ISR Project). The No-  
48          Action alternative provides a baseline against which to compare the potential impacts from the  
49          proposed action.

1 NRC established a standard of significance for assessing environmental impacts in the conduct  
2 of environmental reviews based on the Council of Environmental Quality (CEQ) regulations, as  
3 described in the NRC guidance in NUREG-1748 (NRC, 2003a) and summarized as follows:

4  
5 SMALL: The environmental effects are not detectable or are so minor that they  
6 would neither destabilize nor noticeably alter any important attribute of the  
7 resource considered.

8  
9 MODERATE: The environmental effects are sufficient to alter noticeably, but not  
10 destabilize, important attributes of the resource considered.

11  
12 LARGE: The environmental effects are clearly noticeable and are sufficient to  
13 destabilize important attributes of the resource considered.

## 14 15 **4.2 Land Use Impacts**

16  
17 As described in GEIS Section 4.4.1, potential environmental impacts to land use will occur  
18 during all phases of an ISR facility's lifecycle (NRC, 2009a). Impacts to land use will result from  
19 (i) land disturbances in conjunction with construction, operations, and decommissioning  
20 activities; (ii) access restrictions that will limit grazing and recreational activities; and  
21 (iii) competing access for mineral rights (e.g., leasing of land for both uranium and oil and gas  
22 exploration and development).

### 23 24 GEIS Construction Phase Summary

25  
26 NRC staff concluded in the GEIS that land disturbances during the construction phase will be  
27 temporary and limited to small areas within permitted boundaries. After construction, disturbed  
28 areas around well sites, staging areas, and trenches will be immediately reseeded and restored.  
29 In GEIS Section 4.4.1.1, NRC staff also concluded that changes to land use due to grazing  
30 restrictions and limits on recreational activities are expected to be limited because restricted  
31 areas will be small, the restrictions will be temporary, and other land is available for these  
32 activities. Recognizing that the magnitude of land disturbances and access restrictions will vary  
33 significantly during construction, the NRC staff assessed the potential impacts on land use  
34 during construction in the Nebraska-South Dakota-Wyoming Milling Region as ranging from  
35 SMALL to LARGE. (NRC, 2009a)

### 36 37 GEIS Operations Phase Summary

38  
39 Land use impacts from operational activities will be similar to impacts anticipated during the  
40 construction phase, because additional land disturbances and access restrictions are not  
41 expected while operational activities are ongoing. Because impacts from access restrictions  
42 and land disturbances will be similar to or less than construction impacts, NRC staff concluded  
43 in the GEIS that the overall potential impacts on land use from operational activities at an ISR  
44 facility will be SMALL. (NRC, 2009a)

### 45 46 GEIS Aquifer Restoration Phase Summary

47  
48 Because aquifer restoration will use the same infrastructure that is present during operation  
49 phases, land use impacts from aquifer restoration are expected to be similar to or less than  
50 operation impacts. As aquifer restoration proceeds and wellfields are closed, operational



1 activities will diminish. Therefore, NRC staff concluded in the GEIS that aquifer restoration  
2 impacts to land use will be SMALL. (NRC, 2009a)

### 3 4 GEIS Decommissioning Phase Summary

5  
6 NRC staff concluded in the GEIS that decommissioning an ISR facility will temporarily increase  
7 land-disturbing activities, such as, dismantling, removing, and disposing of materials equipment,  
8 and excavated contaminated soils. Access restrictions would remain in place until  
9 decommissioning and reclamation are complete, although a licensee may decommission and  
10 reclaim the site in stages. Reclamation of land to preexisting conditions and uses will help to  
11 mitigate potential long-term impacts. NRC staff concluded in the GEIS that impacts to land use  
12 during decommissioning may range from SMALL to MODERATE and will be SMALL after  
13 decommissioning and reclamation activities are complete. (NRC, 2009a)

14  
15 The potential environmental impacts on land use from construction, operations, aquifer  
16 restoration, and decommissioning for the proposed Dewey-Burdock ISR Project are detailed in  
17 the following sections.

#### 18 19 **4.2.1 Proposed Action (Alternative 1)**

20  
21 As described in SEIS Section 3.2, the proposed Dewey-Burdock ISR Project site encompasses  
22 4,282 ha [10,580 ac] (Powertech, 2009a). Approximately 97.5 percent of surface rights in the  
23 proposed project are held privately, and the U.S. Bureau of Land Management (BLM) holds the  
24 remaining 2.5 percent. Land will be converted temporarily from its primary use as rangeland to  
25 use as an ISR facility, with facilities constructed and wellfields brought into production over time.  
26 Subsurface mineral rights are divided among several private entities and BLM (Powertech,  
27 2009b). The applicant leases both surface and subsurface mineral rights in portions of the  
28 proposed project area where it plans to extract uranium. The applicant controls the unpatented  
29 mineral claims associated with 1,708 ha [4,220 ac] of federal minerals the U.S. government  
30 reserved under the Stock-Raising Homestead Act. The applicant also maintains unpatented  
31 mining claims on the 97 ha [240 ac] of BLM-administered surface lands within the project area  
32 (see SEIS Section 3.2).

33  
34 In the GEIS, NRC staff identified potential land use alterations to ecological, historical, and  
35 cultural resources that range from SMALL to LARGE. In this SEIS, NRC staff present potential  
36 ecological impacts from land use in SEIS Section 4.6 and potential historical and cultural  
37 impacts from land use in SEIS Section 4.9. Impacts to soils from surface disturbances are  
38 discussed in SEIS Section 4.4. NRC staff assessed potential impacts on mineral extraction,  
39 grazing, or recreational activities that may result from the land disturbances and associated  
40 access restrictions during the construction, operation, aquifer restoration, and decommissioning  
41 phases at the proposed facility.

42  
43 The applicant described environmental impacts on land use for each of the liquid waste disposal  
44 options (which are discussed in following sections) include (i) disposal via Class V injection  
45 wells, (ii) disposal via land application, or (iii) combined disposal via Class V injection wells and  
46 land application.

**4.2.1.1 Disposal Via Class V Injection Wells**

As described in SEIS Section 2.1.1.1.2.4, the applicant’s preferred option for disposal of liquid waste is deep well disposal via Class V injection wells. The section discusses potential environmental impacts on land use from construction, operations, aquifer restoration, and decommissioning associated with the Class V injection well disposal option at the proposed Dewey-Burdock ISR Project.

**4.2.1.1.1 Construction Impacts**

Construction phase activities, including drilling, trenching, excavating, grading, and surface facility construction, will have the largest direct land use impact at the proposed Dewey-Burdock site. As described in SEIS Section 2.1.1.1.2, initial construction of processing facilities, infrastructure (e.g., pipelines, access roads, power lines, and storage ponds), and wellfields is expected to be completed within 2 years (see Figure 2.1-1), followed by phased construction of additional wellfields during the operational phase.

A breakdown of estimated land disturbance for the facilities and infrastructure associated with the Class V injection well disposal option is provided in Table 4.2-1. For this disposal option, a total of 98.3 ha [243 ac] of land or 2.3 percent of the proposed permit area will be potentially disturbed by activities associated with construction of site buildings, pipelines, wellfields, ponds, and access roads (Powertech, 2010a). The total amount of BLM-managed land expected to be disturbed during construction activities is 4.7 ha [11.63 ac]. Land disturbance on BLM-managed land includes an access road, overhead power lines, wellfields, and underground pipelines. The total land area projected to be disturbed by construction activities for the Class V injection well disposal option, 98.3 ha [243 ac], is relatively small compared to the 4,282-ha [10,580-ac] permitted area of the proposed project.

To mitigate impacts of surface disturbance during construction, the applicant proposes to reclaim the surface and reestablish vegetation in areas disturbed by drilling, pipeline installation,

**Table 4.2-1. Breakdown of Land Disturbance for the Class V Injection Well and Land Application Disposal Options at the Proposed Dewey-Burdock ISR Project**

<b>Facilities/Infrastructure</b>	<b>Surface Disturbance</b>
<b>Disposal Via Class V Injection Wells</b>	
Site Buildings	9.7 ha [24 ac]
Trunkline Installation	10.1 ha [25 ac]
Access Roads	8.5 ha [21 ac]
Wellfields	56.7 ha [140 ac]
Impoundments (ponds)	13.4 ha [33 ac]
<b>Total</b>	<b>98.3 ha [243 ac]</b>
<b>Disposal Via Land Application</b>	
Site Buildings	9.7 ha [24 ac]
Trunkline Installation	10.1 ha [25 ac]
Access Roads	8.5 ha [21 ac]
Wellfields	56.7 ha [140 ac]
Impoundments (ponds)	55.0 ha [136 ac]
Irrigation Areas	425.7 ha [1,052 ac]
<b>Total</b>	<b>565.7 ha [1,398 ac]</b>
Source: Powertech (2010a)	

1 and facility construction as soon as construction activities are completed (Powertech, 2009a).  
2 In addition, the applicant proposes to minimize construction of new access and secondary roads  
3 by building only roads essential to operations. Vehicular traffic in the wellfields during  
4 construction will also be restricted to designated roads and kept to a minimum to reduce the  
5 area of surface disturbance (Powertech, 2009a).  
6

7 The applicant will enclose the processing facilities, storage ponds, and wellfields to restrict and  
8 control access with fences (Powertech, 2009a). As discussed in SEIS Section 2.1.1.1.2.1, the  
9 Burdock central processing plant will be located on approximately 2.7 ha [6.7 ac] and  
10 surrounded by a controlled access area fence throughout the life of the project. The  
11 Dewey satellite facility will be located on 1.2 ha [2.9 ac] and will be surrounded by a controlled  
12 access area fence. Radium settling and storage ponds constructed for liquid waste  
13 management will be fenced throughout the life of the project to restrict access. As described  
14 in Section 2.1.1.1.2.4.1 of this SEIS, 2.7 ha [6.8 ac] of radium-settling and storage ponds in the  
15 Dewey area and 3.4 ha [8.3 ac] of radium-settling and storage ponds in the Burdock area will be  
16 fenced, if the Class V injection well disposal option is implemented. Fences surrounding the  
17 processing facilities and ponds will be inspected daily (Powertech, 2010a).  
18

19 Fences restricting access to wellfields in the Dewey and Burdock areas will be temporary and  
20 will be removed after operations and reclamation of each wellfield are completed (Powertech,  
21 2010a). To minimize the acreage fenced around the wellfields, fencing will enclose only the  
22 injection and production wells. Fencing will not surround the perimeter monitor wells  
23 (Powertech, 2010a). The applicant will cover each perimeter monitor well with a locking device  
24 to limit access. Header houses are to be secured within wellfield fencing (Powertech, 2010a).  
25 The applicant will use fencing techniques that preserve habitat and allow the movement of large  
26 game (Powertech, 2010a).  
27

28 Fencing will not be built around the Class V injection wells to be used for deep well liquid waste  
29 disposal (Powertech, 2010a). Class V injection well heads and pumping equipment will be  
30 located inside locked buildings to restrict access (Powertech, 2010a).  
31

32 Recreational activities, including hunting and off-road vehicle access, will be limited by fences  
33 and restrictions on access to roads and wellfields. As described in SEIS Section 3.2.2, hunting  
34 is currently open to the public on 3,521 ha [8,700 ac] within the project area. Hunting within the  
35 project area will remain open to the public during the construction phase (Powertech, 2011).  
36 Only a small part of the 4,282-ha [10,580-ac] of project area will be enclosed by fencing;  
37 3.9 total ha [9.6 total ac] of processing facilities and 6.6 total ha [15.1 total ac] of radium-settling  
38 and storage ponds will be enclosed throughout the life of the project. Fencing around wellfields  
39 will be temporary. The public will have access to open, unfenced lands for recreational activities  
40 within and surrounding the proposed project area.  
41

42 The exploration of mineral resources other than uranium (e.g., oil and natural gas) will be  
43 intermixed within the permit area or delayed until operations, decommissioning, and restoration  
44 activities end. Pending or potential oil and gas mineral leases are not present in the project  
45 area. Demand is low for oil and gas leases on available land near the Dewey-Burdock site (see  
46 SEIS Section 3.2.3). In addition, no coal mines or coal bed methane production is located near  
47 the site.  
48

49 Estimates of the amount of land disturbed by ISR facilities, presented in the GEIS, ranged from  
50 49–753 ha [120–1,860 ac] (NRC, 2009a). The NRC staff concluded in the GEIS that the impact

1 of disturbing this area will be SMALL. The land area projected to be disturbed by  
2 construction activities for the Class V injection well disposal option is 98.3 ha [243 ac] and is  
3 relatively small compared to the 4,282 ha [10,580 ac] of the proposed project area; this falls at  
4 the low end of land disturbance estimates in the GEIS. The applicant proposes to use the  
5 following concurrent mitigation measures to minimize the impacts of surface disturbance:  
6 reclaiming and re-vegetating disturbed areas, limiting construction of new access roads, and  
7 restricting vehicular traffic in wellfields.

8  
9 Fenced areas around processing facilities and storage pond areas will be relatively small in  
10 comparison to the permitted area of the proposed project. Furthermore, fences around  
11 wellfields are temporary and will be removed after operational and reclamation phases are  
12 completed in the wellfields. Prohibiting grazing within fenced areas during construction will have  
13 only a SMALL impact on local livestock production. Because there will be abundant open land  
14 available around the proposed facilities and surrounding the proposed project area, impacts to  
15 recreational activities (primarily big game hunting) will be SMALL. Due to the low demand for oil  
16 and gas leasing and absence of coal bed methane production on land within and in the vicinity  
17 of the project area, the impact of competing access for mineral rights is expected to be SMALL.  
18 Therefore, the NRC staff conclude that overall land use impacts during the construction phase  
19 for the Class V injection well disposal option will be SMALL.

#### 20 21 4.2.1.1.2 Operations Impacts

22  
23 The primary changes to land use during the operations phase of the proposed Dewey-Burdock  
24 ISR Project will be land disturbance and access restrictions from the expansion of active  
25 wellfields and development of new wellfields. Land disturbance and access restrictions will  
26 result from drilling new wells and constructing additional header houses and pipelines.

27  
28 Livestock grazing and recreational activities will be restricted from ISR surface facilities, surface  
29 impoundments, and wellfields during the operations phase. During the operational life of the  
30 project, fencing around wellfields will remove 56.7 ha [140 ac] of land from grazing and  
31 recreational uses (see Table 4.2-1). On BLM-managed land, fencing around wellfields B-WF1  
32 through B-WF4 (see Figure 2.1.6) would remove 3.8 ha [9.4 ac] of land from grazing and  
33 recreational uses in the Burdock area over the operational life of the project. The applicant will  
34 restore and reclaim wellfields concurrently, as operations are completed and moved to the next  
35 wellfield (Powertech, 2009a). As uranium recovery activities cease at a wellfield, the area will  
36 be restored and reopened to grazing and recreational uses while a new wellfield is developed.  
37 The sequential movement of active operations from one wellfield to the next will minimize  
38 potential impacts on grazing and recreational uses throughout the operational life of the project.

39  
40 If operations are licensed, the applicant has committed to working with BLM, South Dakota  
41 Games Fish and Parks (SDGFP) and private landowners to limit public access, primarily for  
42 hunting (Powertech, 2011). To limit hunting activities in areas of active ISR operations,  
43 temporary fencing, advisory signs, and gates will be installed near processing plants and  
44 wellfields. Hunting in areas of active ISR operations will also be limited by rules related to the  
45 SDGFP walk-in hunting program on private lands, which prohibit the discharge of a firearm  
46 within 98.4 m [300 ft] of a person or a structure (Powertech, 2011). Limits on hunting will  
47 continue over the operational life of the project.

48  
49 In summary, impacts due to land disturbance during the operations phase of the proposed  
50 project will be limited to the wellfields and will be similar to impacts expected during the  
51 construction phase. Access restrictions during the operations phase will be similar to

1 construction impacts. Processing facilities and storage ponds will remain fenced. The  
2 construction of temporary fencing around operational wellfields will restrict livestock grazing and  
3 hunting. Once operations are completed in a wellfield, the wellfield will be restored and  
4 reopened to grazing and recreational use. Substantial acreage within and surrounding the  
5 4,282-ha [10,580-ac] project site will remain open to grazing and hunting. Therefore, NRC staff  
6 conclude that the overall impacts to land use from operations for the Class V injection well  
7 disposal option will be SMALL.

#### 8 9 4.2.1.1.3 Aquifer Restoration Impacts

10  
11 The aquifer restoration phase will use the same operational infrastructure and require the same  
12 level of infrastructure maintenance as the operations phase. Land use impacts from  
13 aquifer restoration will decrease as fewer wells and pump houses are used. Additionally,  
14 equipment traffic and related impacts will diminish. NRC staff conclude that the potential  
15 impacts to land use during the aquifer restoration phase for the Class V injection well disposal  
16 option will be comparable to those of the operations phase and will be SMALL.

#### 17 18 4.2.1.1.4 Decommissioning Impacts

19  
20 As described in SEIS Section 2.1.1.1.5, decommissioning of the proposed Dewey-Burdock ISR  
21 Project will be based on an NRC-approved decommissioning plan, and all decommissioning  
22 activities will be carried out in accordance with 10 CFR Part 40 and other applicable federal and  
23 state regulatory requirements. The applicant will submit the NRC-approved decommissioning  
24 plan for review and approval at least 12 months before the planned commencement of final  
25 decommissioning (Powertech, 2009b). At the proposed Dewey-Burdock site, the impact from  
26 dismantling and decontaminating the central plant, satellite facility, roads, and support facilities  
27 will be consistent with NRC staff conclusions reached in the GEIS. The land potentially  
28 disturbed as part of the proposed action will be returned to its preextraction condition and  
29 available for its preextraction use of livestock grazing and wildlife habitat (Powertech, 2009a).

30  
31 After surface operations are complete and wellfields are restored, the applicant will proceed with  
32 the final steps of decommissioning and surface reclamation, and it will return the land to its  
33 preoperational conditions (Powertech, 2009b). The areas directly impacted by  
34 decommissioning include the central processing plant, satellite facility, wellfields and their  
35 infrastructure (i.e., pipelines and header houses), Class V injection wells, ponds, and access  
36 roads. SEIS Section 2.1.1.1.5 describes the decommissioning activities that are necessary to  
37 return the site to its previous land use. These activities include conducting radiological surveys,  
38 removing contaminated equipment and materials, cleaning up areas, plugging and abandoning  
39 wells, decontaminating and removing buildings and other onsite structures, and restoring  
40 disturbed areas (Powertech, 2009b). As disturbed areas are restored, they will be backfilled,  
41 contoured, and smoothed to blend with the natural terrain in accordance with the NRC-approved  
42 decommissioning plan. All wells are to be sealed and capped, and wellfield pipelines removed  
43 or decontaminated in place. After well plugging and abandonment and wellfield  
44 decommissioning are complete, seeded soil will be returned to the areas from which it was  
45 removed and contoured to blend with the natural terrain. As decommissioning and reclamation  
46 proceed, the amount of disturbed and fenced land will decrease and the structures that could  
47 alter the setting of the project area will be removed. The dismantling of the proposed project  
48 facilities, infrastructure, and roads, together with the reseeding and placement of soil will have  
49 impacts similar in scale to the construction phase.

50

1 At the end of decommissioning, all lands will be returned to their preextraction land use of  
2 livestock grazing and wildlife habitat, unless the state and the landowner justify or approve an  
3 alternative use (e.g., landowners would be given the option to retain roads or buildings  
4 constructed for the ISR project for private use) (Powertech, 2009a). Reclaimed lands will be  
5 released for other uses. Livestock grazing and recreational activities will no longer be restricted.  
6 The land use impacts for disturbed areas will be MODERATE until vegetation is reestablished in  
7 seeded areas. Once vegetation is reestablished in reclaimed areas, the NRC staff conclude the  
8 land use impacts for the Class V injection well disposal option will be SMALL.  
9

#### 10 **4.2.1.2 Disposal Via Land Application**

11  
12 If a permit for Class V injection wells cannot be obtained from EPA, the applicant will dispose of  
13 liquid waste generated by land application (see SEIS Section 2.1.1.1.2.4.2). The locations of  
14 land application areas for this disposal option are shown in Figure 2.1-12. The potential  
15 environmental impacts on land use from construction, operations, aquifer restoration, and  
16 decommissioning associated with the land application disposal option are discussed in the  
17 following sections.  
18

##### 19 **4.2.1.2.1 Construction Impacts**

20  
21 A breakdown of estimated land disturbance for the facilities and infrastructure associated with  
22 the land application option is provided in Table 4.2-1. A total of 565.7 ha [1,398 ac] of land, or  
23 13.2 percent of the proposed permit area, will be disturbed by activities associated with  
24 construction of facilities, pipelines, wellfields, storage ponds, irrigation areas, and access roads  
25 (Powertech, 2010a). This area of land disturbance is larger than anticipated for the Class V  
26 injection well disposal option {approximately 98 ha [243 ac]} due to the addition of land irrigation  
27 areas {426 ha [1,052 ac]} and the need for increased pond capacity for storage during  
28 nonirrigation periods {35 ha [136 ac]} (see Table 4.2-1). The land application option will  
29 not impact the total amount of BLM-managed land expected to be disturbed during  
30 construction activities at the proposed project site {4.7 ha [11.63 ac]}. As described in SEIS  
31 Section 4.2.1.1.1, land disturbance on BLM-managed land includes an access road, overhead  
32 power lines, wellfields, and underground pipelines (see SEIS Section 4.2.1.1.1). The total  
33 land area projected to be disturbed by construction activities for the land application option  
34 {i.e., 565.7 ha [1,398 ac]} is relatively small in comparison to the 4,282-ha [10,580-ac] permitted  
35 area of the proposed project.  
36

37 Mitigation measures, such as performing concurrent reclamation and revegetation of disturbed  
38 surface areas, limiting construction of new access and secondary roads, and restricting  
39 vehicular traffic in wellfields and land application areas, will reduce the impacts of surface  
40 disturbance associated with construction activities for the land application disposal option  
41 (Powertech, 2009a).  
42

43 With the exception of radium settling and storage pond areas, fencing restrictions and their  
44 impacts on land use during the construction phase for the land application option will be similar  
45 to those of the Class V injection well disposal option. Fenced areas around radium settling and  
46 storage ponds to restrict access will increase to approximately 12.5 ha [30.8 ac] in the Dewey  
47 area and approximately 13.6 ha [33.5 ac] in the Burdock area (see SEIS Section 2.1.1.1.2.4.2).  
48 The increase in fenced areas around ponds for the land application disposal option will remain  
49 small in comparison to the 4,282-ha [10,580-ac] permitted area for the proposed project. The  
50 applicant does not plan to construct fencing around potential land irrigation areas during the

1 construction phase of the project, and these areas will remain open to hunting  
2 (Powertech, 2010a).

3  
4 As noted in SEIS Section 4.2.1.1.1, the degree of land disturbance at ISR facilities analyzed in  
5 the GEIS ranged from 49–753 ha [120–1,860 ac], and NRC staff concluded in the GEIS that  
6 impacts from this range of disturbed land area will be SMALL (NRC, 2009a). The land area to  
7 be disturbed by construction activities for the land application option {i.e., 565.7 ha [1,398 ac]} is  
8 relatively small when compared to the 4,282-ha [10,580-ac] permitted area of the proposed  
9 project. The amount of disturbance falls within the estimates evaluated in the GEIS. Impacts  
10 of surface land disturbance will be minimized by mitigation measures, including concurrently  
11 reclaiming and revegetating surface disturbed areas, limiting construction of new access roads,  
12 and restricting vehicular traffic in wellfields and land application areas. Processing facilities,  
13 pond areas, and wellfields will be fenced; however, only relatively small areas will be restricted,  
14 and fencing around wellfields would be temporary. Therefore, the restriction of livestock grazing  
15 within areas fenced off during construction will have a SMALL impact on local livestock  
16 production. Land irrigation areas will not be fenced during the construction phase of the project.  
17 In addition, open land will be available around the proposed facilities and within the proposed  
18 project area. Because of these factors, impacts to recreational activities (primarily big game  
19 hunting) will be SMALL. Therefore, the NRC staff conclude that overall land use impacts during  
20 the construction phase for the land application disposal option will be SMALL.

#### 21 22 4.2.1.2.2 Operations Impacts

23  
24 The primary change expected to affect land use during the operations phase of the proposed  
25 facility is the expansion of active wellfields and development of new wellfields, and the impact  
26 will be similar to that of the construction phase. Grazing and recreational activities will be  
27 restricted from processing facilities, storage ponds, and wellfields during the operations phase.  
28 The need for fencing around wellfields will remove approximately 56.7 ha [140 ac] of land from  
29 grazing and recreation activities over the operational life of the project; this is the same acreage  
30 as the Class V injection well disposal option requires (see Table 4.2-1). On BLM-managed  
31 land, fencing around wellfields B-WF1 through B-WF4 will remove 3.8 ha [9.4 ac] of land from  
32 grazing and recreational activities in the Burdock area over the operational life of the project.  
33 The applicant will restore and reclaim wellfields concurrently, as operations are completed and  
34 moved to the next wellfield (Powertech, 2009a). Therefore, a wellfield where uranium recovery  
35 activities have ceased will be restored and reopened for grazing at the same time a new  
36 wellfield is being developed. The sequential movement of active operations from one wellfield  
37 to the next shifts and minimizes potential impacts to livestock grazing and recreational land over  
38 the operational life of the project.

39  
40 In addition to fencing processing facilities, ponds, and wellfields, the applicant may fence land  
41 application areas to control livestock access to these areas (Powertech, 2010a). As described  
42 in SEIS Section 2.1.1.1.2.4.2, the maximum estimated area for land application is 426 ha  
43 [1,052 ac], and this acreage includes operating irrigation pivots, standby irrigation pivots, and  
44 surface runoff catchment areas. The land application area is relatively small when compared to  
45 the 4,282-ha [10,580-ac] permitted area. Moreover, substantial open land within and  
46 surrounding the project site will be available for livestock grazing.

47  
48 The applicant has committed to work with BLM, SDGFP, and private landowners to limit  
49 recreational activities (primarily hunting) within the project area to the extent practicable before  
50 operations begin (Powertech, 2011). Temporary fencing, signage, gates, and other means of

1 restricting public access will be used in active ISR areas, such as wellfields and processing  
2 plants, and may be used in land application areas. The SDGFP walk-in hunting program on  
3 private lands, which prohibits the discharge of a firearm within 98.4 m [300 ft] of a person or a  
4 structure, will limit hunting where active ISR operations are ongoing (Powertech, 2011). Limits  
5 on hunting will be in effect over the operational life of the project.  
6

7 Impacts due to land disturbance during the operations phase will be restricted to the wellfields  
8 and are expected to be similar to impacts from construction. Access restrictions during the  
9 operations phase will be similar to those of the construction phase, except for land irrigation  
10 areas. Processing facilities and storage ponds will remain fenced to restrict and control human  
11 and wildlife access. Temporary fencing will be constructed around operational wellfields to  
12 restrict grazing and hunting. A maximum of 426 ha [1,052 ac] of land irrigation area may be  
13 fenced to control livestock grazing and limit access by hunters. The acreage of land application  
14 area is relatively small in comparison to the permitted area. In addition, substantial open area  
15 within and surrounding the 4,282-ha [10,580-ac] project site will remain open to grazing and  
16 hunting. Therefore, NRC staff conclude that the overall impacts to land use from operations for  
17 the land application disposal option will be SMALL.  
18

#### 19 4.2.1.2.3 Aquifer Restoration Impacts 20

21 The surface disturbance and access restrictions anticipated in the construction and operational  
22 phases will continue during aquifer restoration if the land application disposal option is  
23 implemented. Land use impacts from aquifer restoration will decrease over time, as fewer  
24 wells and pump houses are used and overall equipment traffic diminishes. Thus, NRC staff  
25 conclude that the overall potential impacts to land use during the aquifer restoration phase for  
26 the land application disposal option will be comparable to those of the operations phase and will  
27 be SMALL.  
28

#### 29 4.2.1.2.4 Decommissioning Impacts 30

31 Decommissioning areas after the land application disposal option will bring about environmental  
32 impacts similar to those described in SEIS Section 4.2.1.1.4 for the Class V injection well  
33 disposal option. Decommissioning the proposed facility will require an NRC-approved  
34 decommissioning plan. All decommissioning activities will be carried out in accordance with  
35 10 CFR Part 40 and other applicable federal and state regulatory requirements.  
36

37 After surface operations are complete and wellfields are restored at the proposed facility, the  
38 applicant will proceed with the final steps of decommissioning and surface reclamation to return  
39 the land to its preoperational conditions (Powertech, 2009b). The areas directly affected by  
40 decommissioning will include the central processing plant, satellite facility, wellfields and related  
41 pipelines and header houses, irrigation areas, ponds, and access roads. SEIS Section 2.1.1.1.5  
42 describes the decommissioning activities required to return the site to its previous land use.  
43 These activities are summarized in SEIS Section 4.2.1.1.4 and include conducting radiological  
44 surveys, removing contaminated equipment and materials, cleaning up areas, plugging and  
45 abandoning wells, decontaminating and removing buildings and other onsite structures, and  
46 restoring disturbed areas (Powertech, 2009b). Land application areas will be included in  
47 decommissioning surveys to ensure soil concentration limits are not exceeded. As  
48 decommissioning and reclamation proceed, the amount of disturbed and fenced land will  
49 decrease and structures that affect the setting of the project area will be removed. The  
50 dismantling of the proposed project facilities, infrastructure, and roads and reseeding and  
51 placement of soil will have impacts similar in scale to the construction phase.



At the end of decommissioning, all lands will be returned to their preextraction uses of livestock grazing and wildlife habitat, unless the state and the landowner justify or approve an alternative use. For example, landowners will be given the option to retain roads or buildings constructed for the ISR project for private use (Powertech, 2009a). The reclaimed land will be released for other uses. Restrictions on livestock grazing and recreational activities will be terminated. The land use impacts for disturbed areas will be MODERATE until vegetation is reestablished in seeded areas. Once vegetation is reestablished in reclaimed areas, the NRC staff conclude the land use impacts for the land application disposal option will be SMALL.

**4.2.1.3 Disposal Via Combination of Class V Injection and Land Application**

If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is insufficient to dispose of all liquid wastes generated at the facility, the applicant will dispose of liquid waste by a combination of Class V injection wells and land application (see SEIS Section 2.1.1.1.2.4.3). For the combined option, land application facilities and infrastructure will be constructed, operated, restored, and decommissioned on an as-needed basis, depending on Class V injection well disposal capacity (Powertech, 2011). The land application option requires the construction and operation of irrigation areas and increased pond capacity for storage of liquid wastes during nonirrigation periods (see SEIS Section 2.1.1.1.2.4.2), whereas the Class V injection well disposal option requires the construction and operation of four to eight Class V injection wells (see SEIS Section 2.1.1.1.2.4.1). Therefore, the environmental impacts of land disturbance and access restrictions associated with the land application option are greater for the Class V injection waste disposal option than for all phases of the ISR process. Furthermore, only a portion of land application facilities and infrastructure (e.g., irrigation areas and storage ponds) will be constructed, operated, and decommissioned for the combination disposal option. Thus, the environmental impacts on land uses for the combined disposal option will be less than for the land application option alone and greater than for the Class V injection well disposal option alone. Therefore, NRC staff conclude that the environmental land use impacts of the combined Class V injection well and land application option for each phase of the proposed project will be bounded by the significance of environmental land use impacts of the Class V injection well disposal option and the land application disposal option as summarized in Table 4.2-2.

**Table 4.2-2. Significance of Environmental Land Use Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	MODERATE before vegetation reestablished and then SMALL after vegetation is established	MODERATE before vegetation reestablished and then SMALL after vegetation is established	MODERATE before vegetation reestablished and then SMALL after vegetation is established
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.			

34  
35

1 **4.2.2 No-Action (Alternative 2)**  
2

3 Under the No-Action alternative, NRC will not license the proposed Dewey-Burdock ISR Project  
4 and BLM will not approve the applicant's modified Plan of Operations. Therefore, impacts, such  
5 as soil disturbances and access restrictions to current land uses from the proposed action, will  
6 not occur. Construction impacts will be avoided because wells will not be drilled and pipelines  
7 will not be laid. Operational impacts will also be avoided because no subsurface injection of  
8 lixiviant will occur. Without well drilling or the development of wellfields taking place, there will  
9 be no impacts from aquifer restoration activities. Impacts to land use from decommissioning  
10 activities will not occur, because unbuilt buildings require no decontamination, topsoil will not  
11 need reclaiming, and unstripped land surfaces need no revegetation. The current land uses on  
12 and near the project area, including grazing lands, natural resource extraction, and recreational  
13 activities, remain essentially unchanged under the No-Action alternative.  
14

15 **4.3 Transportation Impacts**  
16

17 As described in GEIS Section 4.4.3, potential environmental impacts from transportation to and  
18 from an ISR facility may occur during all phases of the facility lifecycle. Impacts will result from  
19 workers commuting to and from the site and from the shipment of construction equipment and  
20 materials, operational processing supplies, ion-exchange resins, yellowcake product, and waste  
21 materials. Impacts may also occur from fugitive dust emissions, noise, incidental wildlife or  
22 livestock kills, increased traffic on local roads, and from accidents. (NRC, 2009a)  
23

24 GEIS Construction Phase Summary  
25

26 NRC staff concluded in GEIS Section 4.4.2.1 that ISR construction activities will generate low  
27 levels of additional traffic (relative to local traffic counts) and will not significantly increase traffic  
28 or accidents on many of the roads in the region. Roads that have low traffic counts could be  
29 moderately impacted by the additional workers commuting during periods of peak employment.  
30 Additionally, NRC staff in the GEIS concluded that, depending on site-specific conditions, there  
31 could be a moderate impact from fugitive dust, noise, and incidental wildlife or livestock kills on,  
32 or near, site access roads. For these reasons, NRC staff concluded in the GEIS that the  
33 construction phase of ISR projects may result in transportation impacts that ranged from SMALL  
34 to MODERATE. (NRC, 2009a)  
35

36 GEIS Operations Phase Summary  
37

38 As described in GEIS Section 4.4.2.2, the low level of facility-related traffic during operations  
39 activities will not noticeably increase traffic or the occurrence of accidents on most roads,  
40 although local, less traveled roads could be moderately impacted during periods of peak  
41 employment. During the construction phase of ISR facilities there could be impacts from fugitive  
42 dust emissions, noise, and possible incidental wildlife or livestock kills either on or near site  
43 access roads as described in GEIS Section 4.4.1.1. (NRC, 2009a)  
44

45 GEIS Section 4.4.2.2 also assessed the potential for and consequence from accidents involving  
46 the transportation of hazardous chemicals and radioactive materials. NRC staff in the GEIS  
47 recognized the potential for high consequences from a severe accident involving transportation  
48 of hazardous chemicals in a populated area. The probability of such accidents occurring was  
49 determined to be low because of the small number of shipments, comprehensive regulatory  
50 controls, and the applicant's use of best management practices (BMP). For radioactive material

1 shipments [yellowcake product, ion-exchange resins, byproduct material], compliance with  
2 transportation regulations was expected to limit radiological risk for normal operations. The  
3 NRC staff concluded in GEIS Section 4.4.2.2 there will be a low radiological risk from  
4 transportation accidents. The use of emergency response protocols will help to mitigate the  
5 consequences of severe accidents that involved the release of uranium. NRC staff concluded in  
6 the GEIS that the potential environmental impact from transportation during operations may  
7 range from SMALL to MODERATE. (NRC, 2009a)

#### 8 9 GEIS Aquifer Restoration Phase Summary

10  
11 NRC staff concluded in GEIS Section 4.4.2.3 that the magnitude of transportation activities  
12 during aquifer restoration will be lower than for the construction and operations phases.  
13 Aquifer-restoration-related transportation activities will be primarily limited to supply shipments,  
14 waste shipments, onsite transportation, and employee commuting. NRC staff concluded in the  
15 GEIS that transportation impacts from aquifer restoration will range from SMALL to MODERATE  
16 for the same reasons discussed previously for the operations phase. (NRC, 2009a)

#### 17 18 GEIS Decommissioning Phase Summary

19  
20 NRC staff concluded in GEIS Section 4.4.2.4 that transportation activities during  
21 decommissioning at ISR facilities and the potential impacts will be similar to the construction  
22 and operation phases, except the magnitude of transportation activities (e.g., number and types  
23 of waste and supply shipments, no yellowcake shipments) from decommissioning will be lower  
24 than for the operations phase. NRC staff concluded in the GEIS that the potential accident  
25 radiological risks from transportation during decommissioning will be bounded by the estimates  
26 of yellowcake transportation risk during operations based on the concentrated nature of the  
27 shipped yellowcake, the farther distance yellowcake is shipped compared to the byproduct  
28 material destined for a licensed disposal facility, and the number of shipments of yellowcake  
29 relative to byproduct material. NRC staff concluded in the GEIS the potential transportation  
30 impacts during decommissioning will be SMALL because of the reduced transportation  
31 activities. (NRC, 2009a)

32  
33 Estimated transportation environmental impacts during the construction, operations, aquifer  
34 restoration, and decommissioning phases of the proposed ISR project are discussed next.  
35 Fugitive dust impacts are evaluated as air quality impacts in SEIS Section 4.7, noise impacts  
36 are described in SEIS Section 4.8, visual impacts are provided in SEIS Section 4.10, and  
37 livestock kills are discussed as potential ecological impacts in SEIS Section 4.6.1.1.2.

#### 38 39 **4.3.1 Proposed Action (Alternative 1)**

40  
41 The transportation activities for the proposed Dewey-Burdock ISR facility are described in SEIS  
42 Section 2.1.1.1.7. Under the proposed action, these activities include workers commuting to  
43 and from the site, and road transportation of construction equipment and materials, operational  
44 processing supplies, ion-exchange resins, yellowcake product, and waste materials. The  
45 applicant's preferred method for disposal of liquid byproduct material is by Class V injection  
46 well. If a permit cannot be obtained for Class V injection, the applicant will pursue land  
47 application of treated liquid effluent. If the capacity of either method is limited, the applicant will  
48 pursue a combination of both Class V injection and land application. The transportation impacts  
49 from the Class V injection well option are described in Section 4.3.1.1. The transportation

1 impacts from the land application option and combined Class V injection and land application  
2 are described in Sections 4.3.1.2 and 4.3.1.3.

#### 4 **4.3.1.1 Disposal Via Class V Injection Wells**

5  
6 As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid  
7 byproduct material is deep well disposal via Class V injection wells. The potential transportation  
8 environmental impacts from construction, operations, aquifer restoration, and decommissioning  
9 associated with the Class V injection well disposal option at the proposed Dewey-Burdock ISR  
10 Project are discussed in the following sections.

##### 11 12 4.3.1.1.1 Construction Impacts

13  
14 As described in SEIS Section 3.3, the site is accessed by Dewey Road (also known as  
15 Fall River County Road 6463 and Custer County Road 769) and State Highways 18, 79, and 89.  
16 The applicant estimated traffic generated by proposed construction activities, including  
17 transportation of equipment, supplies, and workers (Powertech, 2009a, 2010a), and its analysis  
18 is described in SEIS Section 2.1.1.1.7. The NRC staff's impact analysis first compared the  
19 proposed traffic estimates and data with the information evaluated in GEIS Section 2.8 and then  
20 evaluated the estimated percentage increase in existing traffic that could result from the  
21 proposed Dewey-Burdock ISR Project.

22  
23 The NRC impact analysis found the overall magnitude of the proposed daily construction traffic  
24 exceeds the construction traffic evaluated in GEIS Section 2.8; however, the difference is small,  
25 an increase of approximately 7 percent. Commuting workers constitute the majority of road  
26 traffic the applicant proposed for the construction phase. The applicant estimated a number of  
27 commuting workers that was similar to the upper value considered in the GEIS (205 workers for  
28 the proposed project compared to 200 workers considered in the GEIS). The applicant has  
29 estimated the initial facility construction requiring these workers will take approximately 1 year  
30 (Powertech, 2010a). The applicant's proposed equipment and supply shipments, however,  
31 were higher than those assumed in GEIS Section 2.8 (9 one-way trips per day for the proposed  
32 project compared to 0.24 one-way trips per day considered in GEIS Section 2.8).

33  
34 Table 4.3-1 compares the magnitude of the NRC staff's estimated local traffic counts from  
35 proposed construction activities with existing traffic counts on regional/local roads. Considering  
36 Table 4.3-1, the proposed traffic, if allocated completely to the individual road segments, will  
37 notably increase the existing traffic on low-traffic roads, such as unpaved Dewey Road  
38 (Fall River County Road 6463 and Custer County Road 769), State Highway 89, and  
39 U.S. Highway 18 traveling from Edgemont, but will not substantially increase traffic on more  
40 heavily traveled road segments, such as U.S. Highway 18 near Hot Springs or State Highway  
41 79 at the junction with State Highway 18. The projected daily traffic on Dewey Road, the road  
42 nearest the proposed site, represents an increase of about 16 times the existing low level of  
43 traffic. State Highway 89 traffic was projected to increase by 68 percent if all workers  
44 commuted on that route; however, because the road is more distant from the site, the NRC staff  
45 conclude it will be less likely to be used by all workforce commuters, and therefore actual traffic  
46 impacts will be lower than projected. Similarly, based on the traffic count information in  
47 Table 4.3-1, State Highway 89 is not a commonly used route for trucks; therefore, the projected  
48 increase in truck traffic from the proposed action is considered less likely to be concentrated  
49 here relative to other routes. While the projected increase in traffic on some road segments is a

**Table 4.3-1. Estimated Daily Traffic on Regional Roads for the Construction Phase of the Proposed Dewey-Burdock ISR Project**

Road Segment	Traffic Count*			Projected Traffic†		Percent Increase‡	
	All Vehicles	Auto	Truck	Auto	Truck	Auto	Truck
Dewey Road	25	25	—	435	18	1640	—
US 18 (Edgemont to US 89)	1,782	1,361	421	1,771	439	30	4
US 18 (Hot Springs to SR 79)	5,075	4,725	350	5,135	368	9	5
SR 89 (US 385 to US 18)	659	604	55	1,014	73	68	33
SR 79 (at US18)	3,172	2,569	603	2,979	621	16	3

Sources: BLM (2009); SDDOT(2011)  
 \*Traffic counts are annual average daily traffic for both directions of travel (SEIS Section 3.3). NRC calculated the auto traffic count as the difference between the all vehicle count and reported truck count. Data for all roads are for year 2011 and are from SDDOT (2011), except the Dewey count is from 2009 (BLM, 2009).  
 †Projected traffic is the sum of the proposed action daily two-way traffic and the applicable traffic count. Proposed construction phase two-way traffic is double the one-way values reported in Table 2.1-7.  
 ‡This analysis assumes all projected traffic would travel on each road. If proposed action traffic used multiple routes then this analysis overestimates impacts to each road segment.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29

notable change in conditions, the NRC staff further evaluated the projected increases in traffic by considering the ability of the roads to accommodate the increased traffic. When the projected traffic for all the roads in the analysis is evaluated (ranging from 453 to 5,503 vehicles per day based on the sum of projected auto and truck traffic for each road), the magnitude of traffic is not expected to exceed the existing road capacity, and therefore the staff conclude the regional highways could accommodate the additional traffic from the proposed project.

The conclusion that existing road capacity will not be exceeded is based on the staff’s consideration of other road capacity estimates in SEIS Section 3.3. Because the traffic projections in Table 4.3-1 are daily values for both directions of travel, the comparable one-way projected traffic is assumed to be half the tabulated values [e.g., 2,752 vehicles per day for the U.S. Highway 18 total of 5,503 (2,752 vehicles per day is well below the aforementioned range of capacities staff evaluated of 7,237 to 13,900 vehicles per day)]; therefore, the NRC staff conclude the highest projected traffic is below the estimated capacity.

Considering the magnitude of projected traffic from the proposed Dewey-Burdock ISR Project, the NRC staff conclude the significant increase in traffic volumes to the local and unpaved Dewey Road will result in MODERATE impacts under the Class V injection well disposal option. The staff concludes there will be a significant increase in existing traffic on Dewey Road. This increase in traffic would accelerate degradation of the road surface, increase the generation of dust, and increase the potential for traffic accidents and wildlife or livestock kills. Based on the available capacity on the more distant regional roads, the staff conclude the potential traffic impacts to the remainder of regional roads under the Class V injection well disposal option will be SMALL.

The applicant intends to use existing roads on the site area to the degree possible; however, some new roads will be constructed to facilitate onsite transportation (SEIS Section 2.1.1.2.2). Impacts to land use related to the development of new access roads are addressed in SEIS

1 Section 4.2.1.1. All roads constructed for the proposed action will be reclaimed except those  
2 landowners specify to remain for future use (Powertech, 2009a).

3  
4 4.3.1.1.2 Operations Impacts

5  
6 The proposed operational transportation activities for the Dewey-Burdock ISR Project are  
7 similar to those evaluated in GEIS Section 4.4.2.2 including employee commuting and truck  
8 shipments of yellowcake, ion-exchange resins, hazardous chemical supplies, and byproduct  
9 material. The types of impacts evaluated are also similar to those evaluated in the GEIS  
10 including impacts to traffic and potential hazards associated with shipment of yellowcake,  
11 ion-exchange resins, byproduct material, and hazardous materials.

12  
13 Traffic generated by these proposed operations is described in SEIS Section 2.1.1.1.7. The  
14 overall magnitude of proposed operational transportation is less than the operational  
15 transportation evaluated in GEIS Section 4.4.2.2. Commuting workers constitute the majority of  
16 road traffic the applicant proposed for the operations phase. The applicant estimated a number  
17 of commuting workers that was within the range considered in the GEIS (60 employees for the  
18 proposed project compared to 20 to 200 workers considered in the GEIS). For trucking  
19 activities, remote ion-exchange shipments were comparable to the GEIS Section 2.8 values and  
20 processing chemical shipments were less than GEIS values. The proposed operational  
21 byproduct shipments are less than the GEIS values, and proposed yellowcake shipments are at  
22 the low end of the range considered in the GEIS. (NRC, 2009a)

23  
24 Table 4.3-2 compares the magnitude of the NRC staff's estimated increase in local traffic counts  
25 from proposed operations activities. The projected traffic for the operations phase for all road  
26 segments evaluated is lower than the projected traffic from the construction phase. Considering  
27

**Table 4.3-2. Estimated Daily Traffic on Regional Roads for the Operations Phase of the Proposed Dewey-Burdock ISR Project**

Road Segment	Traffic Count*			Projected Traffic†		Percent Increase‡	
	All Vehicles	Auto	Truck	Auto	Truck	Auto	Truck
Dewey Road	25	25	—	145	4	480	—
US 18 (Edgemont to US 89)	1,782	1,361	421	1,481	423	9	<1
US 18 (Hot Springs to SR 79)	5,075	4,725	350	4,845	352	2	1
SR 89 (US 385 to US 18)	659	604	55	724	57	20	4
SR 79 (at US18)	3,172	2,569	603	2,689	605	5	<1

Sources: BLM (2009); SDDOT(2011)

\*Traffic counts are annual average daily traffic for both directions of travel (SEIS Section 3.3). NRC calculated the auto traffic count as the difference between the all vehicle count and reported truck count. Data for all roads are for year 2011 and are from SDDOT (2011) except the Dewey count is from 2009 (BLM, 2009).

†Projected traffic is the sum of the proposed action daily two-way traffic and the applicable traffic count. Proposed operations phase two-way traffic is double the one-way values reported in Table 2.1-7.

‡This analysis assumes all projected traffic would travel on each road. If proposed action traffic used multiple routes, then this analysis overestimates impacts to each road segment.

1 Table 4.3-2, the proposed traffic, if allocated completely to the individual road segments, will  
2 notably increase the existing traffic on unpaved Dewey Road (Fall River County Road 6463 and  
3 Custer County Road 769) but will not substantially increase traffic on more heavily traveled road  
4 segments, such as State Highway 89, U.S. Highway 18 (from Edgemont and near Hot Springs),  
5 or State Highway 79 at the junction with State Highway 18. The projected daily traffic on Dewey  
6 Road, the road nearest the proposed site, represents an increase of about five times the  
7 existing low level of traffic. State Highway 89 traffic was projected to increase by 20 percent if  
8 all workers commuted on that route; however, because the road is more distant from the site,  
9 the NRC staff conclude it will be less likely to be used by all workforce commuters and therefore  
10 actual traffic impacts will be lower than projected. Based on the information in Table 4.3-2, the  
11 projected increases in truck traffic are low for all routes evaluated. While the projected increase  
12 in auto traffic on some road segments is a notable change in conditions, the magnitude of the  
13 projected operational traffic for all the roads evaluated (ranging from approximately 150 to  
14 5,200 vehicles per day considering the sum of projected auto and truck traffic) will not exceed  
15 the existing road capacity (see additional discussion of capacity in SEIS Section 4.3.1.1), and  
16 the staff conclude the regional highways could accommodate the additional traffic from the  
17 proposed project.

18  
19 Considering the magnitude of projected traffic from the proposed Dewey-Burdock ISR Project,  
20 the NRC staff conclude the significant increase in traffic volumes to the local and unpaved  
21 Dewey Road will result in MODERATE impacts under the Class V injection well disposal option.  
22 The staff conclude there will be a significant increase in existing traffic on Dewey Road. This  
23 increase in traffic would accelerate degradation of the road surface, increase the generation of  
24 dust, and increase the potential for traffic accidents and wildlife or livestock kills. Based on the  
25 available capacity on the more distant regional roads, the staff conclude the potential traffic  
26 impacts to the remainder of regional roads will be SMALL under the Class V injection well  
27 disposal option.

28  
29 The potential radiological accident risk associated with yellowcake product shipments was  
30 evaluated in GEIS Section 4.4.2.2. The yellowcake transportation analysis assumed shipment  
31 volumes that ranged from 34 to 145 yellowcake shipments per year, which could result in a risk  
32 of 0.01 and 0.04 latent cancer fatalities, respectively, considering accident probabilities and  
33 consequences (NRC, 2009a). The proposed yellowcake transportation activities for the  
34 proposed Dewey-Burdock ISR Project are described in SEIS Section 2.1.1.1.7. These activities  
35 are similar in approach to the activities evaluated in the GEIS Section 4.2.2.2, and the quantities  
36 of material shipped, the number of shipments, and the shipment distances are within the  
37 magnitude of the yellowcake transportation activities evaluated in the GEIS. The applicant has  
38 estimated approximately 25 yellowcake shipments per year will be needed for the proposed  
39 action or an average of one shipment every 2 weeks. This estimate is based on the proposed  
40 45,250 kg [1 million lb] annual yellowcake production rate and an assumed 18,100 kg  
41 [40,000 lb] capacity per yellowcake shipment (Powertech, 2009b). By comparison the GEIS  
42 does not differ significantly; it considers yellowcake shipped in drums that hold approximately  
43 430 kg [950 lb] and shipments carrying 40 drums per load for a total shipment capacity of  
44 17,200 kg [38,000 lb]. Therefore, the radiological accident risk associated with yellowcake  
45 shipment at the proposed Dewey-Burdock ISR Project will be bounded by the GEIS risk  
46 analysis. The shipment volume will not significantly affect the project-related traffic relative to  
47 the expected commuting workforce.

48  
49 The GEIS Section 4.4.2.2 reported that previous accidents involving yellowcake releases result  
50 in up to 30 percent of shipment contents being released (NRC, 2009a). To limit the risk of an

1 accident involving resin or yellowcake transport, the applicant has proposed that all such  
2 materials will be transported in accordance with U.S. Department of Transportation  
3 (USDOT) and NRC regulations, handled as low specific-activity materials, and shipped using  
4 exclusive-use-only vehicles (Powertech, 2009a). The NRC staff conclude the consequences of  
5 such accidents will also be limited because the applicant has proposed to develop emergency  
6 response procedures (Powertech, 2009a) for yellowcake and other transportation accidents that  
7 could occur during shipment to or from the proposed Dewey-Burdock ISR Project. The  
8 applicant also proposes to ensure its personnel and the carrier receive training on these  
9 emergency response procedures and that information about the procedures is provided to state  
10 and local agencies (Powertech, 2009a). Therefore, the NRC staff conclude the impact from a  
11 potential accident involving yellowcake transportation during the operations phase of the  
12 proposed project will be SMALL under the Class V injection well disposal option.  
13

14 The potential impacts from ion-exchange shipments were evaluated in GEIS Section 4.2.2.2 as  
15 cited by GEIS Section 4.4.2.2. NRC staff concluded in the GEIS that the potential radiological  
16 impacts of these shipments would be bound by the risks from yellowcake shipments based on  
17 the less concentrated nature of the resins; the uranium being chemically bound to the resins,  
18 which would limit dispersion in the event of a spill; and the small shipment distance relative to  
19 yellowcake shipments (i.e., the likelihood of an accident increases with the distance traveled).  
20 The proposed ion-exchange transportation activities for the Dewey-Burdock ISR Project  
21 described in SEIS Section 2.1.1.1.7 are similar to the activities evaluated in the GEIS. The  
22 applicant plans to transport one loaded resin truck per day (Powertech, 2009a), which is  
23 consistent with the GEIS Section 2.8 assumption of one truck per day. Ion-exchange resin  
24 transported onsite between the Dewey site and the Burdock site central processing plant will  
25 traverse approximately 8 km [5.0 mi] of road (primarily on Dewey Road). Compliance with the  
26 applicable NRC and USDOT regulations for shipping ion-exchange resins, which are enforced  
27 by NRC onsite inspections, provides additional confidence that these materials can be safely  
28 shipped across the site area. Therefore, applying the GEIS impact analysis to the proposed  
29 activities, the NRC staff conclude the aforementioned SMALL potential radiological accident  
30 impacts from the proposed Dewey-Burdock facility yellowcake shipments bound the potential  
31 radiological accident impacts of the proposed ion-exchange resin shipments. The NRC staff  
32 conclude the resulting environmental impact from ion-exchange resin shipments will be SMALL;  
33 this is based on the fact that the risk of ion-exchange resin accidents is low, a resulting spill will  
34 be properly removed and disposed of, and the affected area will be reclaimed in accordance  
35 with applicable NRC and state regulations.  
36

37 The potential impacts from operational byproduct material shipments were evaluated in GEIS  
38 Section 4.2.2.2 as cited by GEIS Section 4.4.2.2. NRC staff concluded in the GEIS the SMALL  
39 risks from transporting yellowcake during operations will bound the risks expected from  
40 byproduct material shipments, owing to the concentrated nature of shipped yellowcake, the  
41 longer distance yellowcake is shipped relative to byproduct material, and the relative number of  
42 shipments of each material. The proposed operational byproduct material transportation  
43 activities for the Dewey-Burdock ISR Project are described in SEIS Section 2.1.1.1.7. The  
44 applicant proposed to temporarily store operational byproduct material and then ship the  
45 material to an offsite disposal facility that is licensed to accept byproduct material. Byproduct  
46 material disposal facility options are described in SEIS Section 3.13.2. The applicant's  
47 estimated annual generation of 22 m<sup>3</sup> [29 yd<sup>3</sup>] of byproduct material (including reverse osmosis  
48 reject solids, spent ion-exchange resins, and tank and pond sediments) would comprise  
49 approximately one shipment per year (SEIS Section 2.1.1.1.7). This magnitude of  
50 operational byproduct material shipping is lower than the range documented in the GEIS of  
51 2.5 to 15 shipments per year (NRC, 2009a, Table 2.8-1). Transportation safety will be



1 maintained by the applicant's proposed adherence to applicable NRC and USDOT  
2 transportation requirements, the applicant's proposed use of licensed third-party carriers, and  
3 the applicant's proposed emergency response measures (Powertech, 2009b). Based on the  
4 preceding analysis, the NRC staff conclude the applicant's proposed operational byproduct  
5 material shipment activities are consistent with the impact analysis in GEIS Section 4.4.2.2, and  
6 therefore environmental impacts of the proposed shipments under the Class V injection well  
7 disposal option will be bounded by impacts from the proposed yellowcake shipments (SMALL).  
8

9 The potential impacts from transportation of process chemical supplies were also evaluated in  
10 GEIS Section 4.2.2.2 as cited by GEIS Section 4.4.2.2. The potential safety hazards associated  
11 with process chemicals the applicant intends to use for the proposed action (see SEIS  
12 Section 4.13.1.2.3) were also described and evaluated in GEIS Sections 2.11.2 and 4.2.11.2.4  
13 (NRC, 2009a). The proposed operational hazardous chemical shipments for the Dewey-  
14 Burdock ISR Project are described in SEIS Section 2.1.1.1.7. The applicant proposes to store,  
15 use, and receive shipments of the following chemicals: sodium chloride (NaCl), sodium  
16 carbonate (NaHCO<sub>3</sub>), sodium hydroxide (NaOH), hydrochloric acid (HCl), hydrogen peroxide  
17 (H<sub>2</sub>O<sub>2</sub>), carbon dioxide (CO<sub>2</sub>), oxygen (O<sub>2</sub>), anhydrous ammonia (NH<sub>3</sub>), diesel fuel, gasoline, and  
18 bottled gases (Powertech, 2009b). The magnitude of operational chemical supply shipments is  
19 less than the value documented in the GEIS (NRC, 2009a, Table 2.8-1), and the types of  
20 chemicals shipped align with the materials evaluated in the GEIS (NRC, 2009a).  
21

22 Transportation risks associated with incoming, onsite, and outgoing shipments involve potential  
23 in-transit accidents. The process chemicals described in the applicant's proposal are commonly  
24 used in industrial applications, and they will be transported following applicable USDOT  
25 hazardous materials shipping provisions. If an accident occurred, spill response will be handled  
26 via emergency response procedures, although a spill of nonradiological materials would be  
27 reportable to the appropriate state agency, EPA, and USDOT (NRC, 2009a). Spill material will  
28 be recovered or removed and the affected areas reclaimed. The release of anhydrous  
29 ammonia, a compound that the applicant may use in the precipitation circuit (Powertech,  
30 2009b), could be hazardous to the public if released near a populated area. However, the  
31 proposed project is not situated in a populated area and the likelihood of such an accident  
32 occurring is small, calculated as  $3.0 \times 10^{-7}$  accidents per km [ $4.8 \times 10^{-7}$  accidents per mi] based  
33 on NUREG-0706 accident data (NRC, 1980). The applicant proposes to maintain transportation  
34 safety by following applicable USDOT hazardous materials transportation requirements and the  
35 proposed use of licensed third-party carriers (Powertech, 2009a). Based on these  
36 considerations, the staff conclude the environmental impacts from operational hazardous  
37 chemical shipments under the Class V injection well disposal option will be SMALL.  
38

39 NRC staff conclude the significant increase in traffic volumes to the local and unpaved Dewey  
40 Road will result in MODERATE impacts from travel on that road and SMALL impacts to the  
41 remaining regional roads under the Class V injection well disposal option. Based on the low  
42 radiological risks from transportation accidents and the implementation of the applicant's  
43 additional safety practices as previously discussed, the overall impacts from the proposed  
44 transportation activities during the operations phase will be SMALL under the Class V injection  
45 well disposal option.  
46

#### 47 4.3.1.1.3 Aquifer Restoration Impacts 48

49 At the proposed Dewey-Burdock ISR Project, commuting workers constitute the majority of road  
50 traffic the applicant proposes for the aquifer restoration phase. The applicant estimated the

1 number of workers will be 15 (compared to 20 to 200 workers considered in GEIS Section 2.8).  
2 To evaluate the potential traffic impacts, the NRC staff assumed remote ion-exchange and  
3 processing chemical shipments will be similar to the operations phase and bounded by  
4 the GEIS values (NRC, 2009a).  
5

6 Table 4.3-3 compares the magnitude of the NRC staff's estimated increase in local traffic counts  
7 from proposed aquifer restoration activities. The projected auto traffic for the aquifer restoration  
8 phase for all road segments evaluated is lower than the projected traffic from the construction  
9 and operation phases, and the projected truck traffic is similar to the operation phase.  
10 Considering Table 4.3-3, the proposed traffic, if allocated completely to the individual road  
11 segments, will increase the existing traffic on low-traffic roads, such as the unpaved Dewey  
12 Road (Fall River County Road 6463 and Custer County Road 769), but will not substantially  
13 increase traffic on the remaining road segments in the table. The projected daily traffic on  
14 Dewey Road, the road nearest the proposed site, is approximately double the existing low level  
15 of traffic. Based on the low levels of projected traffic for all vehicle types and road segments,  
16 the NRC staff conclude the transportation impacts from the proposed aquifer restoration  
17 transportation activities will be SMALL under the Class V injection well disposal option.  
18

19 4.3.1.1.4 Decommissioning Impacts  
20

21 The proposed decommissioning traffic estimates for the Dewey-Burdock ISR Project are  
22 described in SEIS Section 2.1.1.1.7. NRC staff derived these estimates from applicant-provided  
23 information. The magnitude of estimated truck transportation for the proposed  
24 decommissioning phase is about two times greater than what is reported in the GEIS (NRC,  
25 2009a, Table 2.8-1), due to the larger amount of estimated nonhazardous solid waste (e.g.,  
26 facility demolition and equipment removal) from the proposed action that will need to be shipped

**Table 4.3-3. Estimated Daily Traffic on Regional Roads for the Aquifer Restoration Phase of the Proposed Dewey-Burdock ISR Project**

Road Segment	Traffic Count*			Projected Traffic†		Percent Increase‡	
	All Vehicles	Auto	Truck	Auto	Truck	Auto	Truck
Dewey Road	25	25	—	55	4	120	—
US 18 (Edgemont to US 89)	1,782	1,361	421	1,391	423	2	<1
US 18 (Hot Springs to SR 79)	5,075	4,725	350	4,755	352	1	1
SR 89 (US 385 to US 18)	659	604	55	634	57	5	4
SR 79 (at US18)	3,172	2,569	603	2,599	605	1	<1

Sources: BLM (2009); SDDOT(2011)

\*Traffic counts are annual average daily traffic for both directions of travel (SEIS Section 3.3). NRC calculated the auto traffic count as the difference between the all vehicle count and reported truck count. Data for all roads are for year 2011 and are from SDDOT (2011), except the Dewey count is from 2009 (BLM, 2009).

†Projected traffic is the sum of the proposed action daily two-way traffic and the applicable traffic count. Proposed aquifer restoration phase two-way traffic is double the one-way values reported in Table 2.1-7.

‡This analysis assumes all projected traffic would travel on each road. If proposed action traffic used multiple routes, then this analysis overestimates impacts to each road segment.

1 offsite for disposal. Despite this increase, the overall level of transportation is still low at about  
 2 one truck per day (two trips when both directions are included) based on the information in SEIS  
 3 Section 2.1.1.1.7.

4  
 5 Table 4.3-4 compares the magnitude of the NRC staff's estimated increase in local traffic counts  
 6 from proposed decommissioning activities. The projected traffic in Table 4.3-4 is based on the  
 7 applicant's proposed Class V injection well disposal option, which the applicant estimated will  
 8 generate less decommissioning waste than the land application disposal option (and therefore  
 9 will generate less truck traffic). The projected auto and truck traffic for the decommissioning  
 10 phase for all road segments evaluated is lower than the projected traffic from the construction,  
 11 operation, and aquifer restoration phases. Considering Table 4.3-4, the proposed traffic, if  
 12 allocated completely to the individual road segments, will increase the existing traffic on  
 13 low-traffic roads, such as the unpaved Dewey Road (Fall River County Road 6463 and Custer  
 14 County Road 769), but will not substantially increase traffic on the remaining road segments in  
 15 the table. The projected daily traffic on Dewey Road, the road nearest the proposed site, is  
 16 approximately double the existing low level of traffic. Based on the low levels of projected traffic  
 17 for all vehicle types and road segments, the NRC staff conclude the potential traffic-related  
 18 impacts from the proposed decommissioning transportation activities will be SMALL under the  
 19 Class V injection well disposal option.

20  
 21 Another potential transportation impact from proposed decommissioning activities is the  
 22 radiological risk from the transportation of byproduct material for offsite disposal. The NRC staff  
 23 consider the potential radiological accident risk associated with byproduct material shipments  
 24 will be low based on the calculated risks from concentrated yellowcake product shipments  
 25 discussed previously in SEIS Section 4.3.1.1.2 and in GEIS Section 4.2.2.2. The number of  
 26 byproduct material shipments NRC staff estimated based on the applicant's proposal is low  
 27

**Table 4.3-4. Estimated Daily Traffic on Regional Roads for the Decommissioning Phase of the Proposed Dewey-Burdock ISR Project**

Road Segment	2011 Traffic Count*			Projected Traffic†		Percent Increase‡	
	All Vehicles	Auto	Truck	Auto	Truck	Auto	Truck
Dewey Road	25	25	—	55	2	120	—
US 18 (Edgemont to US 89)	1,782	1,361	421	1,391	423	2	<1
US 18 (Hot Springs to SR 79)	5,075	4,725	350	4,755	352	1	1
SR 89 (US 385 to US 18)	659	604	55	634	57	5	4
SR 79 (at US18)	3,172	2,569	603	2,599	605	1	<1

Sources: BLM (2009); SDDOT(2011)

\*Traffic counts are annual average daily traffic for both directions of travel (SEIS Section 3.3). NRC calculated the auto traffic count as the difference between the all vehicle count and reported truck count. Data for all roads are for year 2011 and are from SDDOT (2011), except the Dewey count is from 2009 (BLM, 2009).

†Projected traffic is the sum of the proposed action daily two-way traffic and the applicable traffic count. Proposed decommissioning phase two-way traffic is double the one-way values reported in Table 2.1-7.

‡This analysis assumes all projected traffic would travel on each road. If proposed action traffic used multiple routes, then this analysis overestimates impacts to each road segment.

1 (Table 2.1-7) (approximately 31 annually for the Class V injection well option compared to  
2 145 yellowcake shipments evaluated in the GEIS; annual values for the proposed action are the  
3 product of the reported daily values in Table 2.1-7 and 260 days/year shipping frequency). The  
4 applicant's annual byproduct material volume estimate in its surety (Powertech, 2009b) (see  
5 SEIS Section 2.1.1.6.3) indicates the material will consist primarily of pond leak detection  
6 equipment and liners. Relative to powdered yellowcake, this material is in a form that would be  
7 less dispersible (i.e., less likely to cause public exposure if released) and easier to clean up if an  
8 accident involving release occurred. The byproduct material will be transported and disposed of  
9 at a licensed facility. The applicant has proposed to pursue an agreement with the White Mesa  
10 site in Blanding, Utah, for disposal of solid byproduct material (SEIS Section 3.13.2). The trip  
11 distance to this facility from the proposed site of 1,210 km [752 mi] is less than the distance  
12 used in the risk analysis described in GEIS Section 4.2.2.2 for transporting yellowcake to the  
13 conversion facility in Metropolis, Illinois {approximately 2,414 km [1,500 mi]}. The applicant  
14 proposes to implement additional BMPs to reduce the risk of accidents including (i) enforcing  
15 safe driving and emergency response procedures and training for personnel and truck drivers,  
16 (ii) installing communication systems to connect trucks to shipper/receiver/emergency  
17 responders, (iii) and enforcing speed limits on the proposed project site to increase driver safety  
18 and to reduce conflicts with big game, livestock, and other vehicles (Powertech, 2009a).  
19 All shipments will be required to comply with applicable USDOT regulations governing the  
20 transportation of radioactive material (including quantity limits, packaging requirements, and  
21 conveyance dose rate limits). Based on the preceding analysis, the NRC staff conclude the  
22 potential radiological risks from the proposed transportation of decommissioning byproduct  
23 material will be low and therefore the potential environmental impacts from the proposed  
24 radioactive material transportation will be SMALL under the Class V injection well  
25 disposal option.

26  
27 In conclusion, because of the low estimated traffic for the proposed Dewey-Burdock ISR Project  
28 relative to existing road traffic in the region surrounding the site, the NRC staff conclude the  
29 potential traffic-related transportation impacts during decommissioning will be SMALL under the  
30 Class V injection well disposal option. The low radiological risk from potential transportation  
31 accidents in comparison to the accident risks evaluated for the operation phase (i.e., no  
32 interstate transport of yellowcake product) supports the staff's conclusion that the radiological  
33 risks from transportation of decommissioning byproduct material for offsite disposal will also be  
34 SMALL. Therefore, the NRC staff conclude the overall transportation impacts related to the  
35 decommissioning phase will be SMALL under the Class V injection well disposal option.

#### 36 37 **4.3.1.2 Disposal Via Land Application**

38  
39 If a permit for Class V injection wells cannot be obtained from EPA, the applicant proposes to  
40 dispose of liquid byproduct material generated at the proposed Dewey-Burdock ISR Project by  
41 land application (see SEIS Section 2.1.1.1.2.4.2). The potential transportation environmental  
42 impacts from construction, operations, aquifer restoration, and decommissioning associated  
43 with the land application liquid disposal option are discussed in the following sections.

##### 44 45 **4.3.1.2.1 Construction Impacts**

46  
47 The estimated daily traffic volume on regional roads for the construction phase for the land  
48 application option will be the same as that described in SEIS Section 4.3.1.1.1 and summarized  
49 in Table 4.3-1 for the Class V injection well disposal option. Commuting workers will constitute  
50 the majority of road traffic the applicant proposed for the construction phase. Considering  
51 Table 4.3-1, the proposed traffic will notably increase the existing traffic on low-traffic roads,

1 such as Dewey Road, State Highway 89, and U.S. Highway 18 traveling through Edgemont,  
2 but will not substantially increase traffic on more heavily traveled road segments, such as  
3 U.S. Highway 18 near Hot Springs or State Highway 79 at the junction with State Highway 18.  
4 As described in SEIS Section 4.3.1.1.1, when the projected traffic for all the roads in the  
5 analysis is evaluated (ranging from 453 to 5,503 vehicles per day based on the sum of projected  
6 auto and truck traffic for each road), the magnitude of traffic is not expected to exceed the  
7 existing road capacity. Therefore, NRC staff conclude the regional highways could  
8 accommodate the additional traffic from the proposed project.

9  
10 Considering the magnitude of projected traffic from the proposed project, the NRC staff  
11 conclude the significant increase in traffic volumes to the local and unpaved Dewey Road will  
12 result in MODERATE impacts under the land application disposal option. The projected daily  
13 traffic on Dewey Road represents an increase of about 16 times the existing low level of traffic  
14 (see Table 4.3-1). This increase in traffic would accelerate degradation of the road surface,  
15 increase the generation of dust, and increase the potential for traffic accidents and wildlife or  
16 livestock kills. Based on the available capacity on the more distant regional roads, the NRC  
17 staff conclude the potential traffic impacts to the remainder of regional roads under the land  
18 application disposal option will be SMALL.

19  
20 The applicant intends to use existing roads on the site area to the degree possible; however,  
21 some new roads will be constructed to facilitate onsite transportation (SEIS Section 2.1.1.2.2).  
22 Impacts to land use related to the development of new access roads are addressed in SEIS  
23 Section 4.2.1.1. All roads constructed for the proposed action will be reclaimed except those  
24 landowners specify to remain for future use (Powertech, 2009a).

#### 25 26 4.3.1.2.2 Operations Impacts

27  
28 The proposed operational transportation activities for the Dewey-Burdock ISR Project include  
29 employee commuting and truck shipments of yellowcake, ion-exchange resins, hazardous  
30 chemical supplies, and byproduct material. Traffic generated by these proposed activities for  
31 the land application option will be the same as that described in SEIS Section 4.3.1.1.2 and  
32 summarized in Table 4.3-2 for the Class V injection well disposal option.

33  
34 Commuting workers will constitute the majority of road traffic the applicant proposed for the  
35 construction phase. Considering Table 4.3-2, the proposed traffic will notably increase the  
36 existing traffic on low-traffic roads, such as Dewey Road, State Highway 89, and U.S. Highway  
37 18 traveling through Edgemont, but will not substantially increase traffic on more heavily  
38 traveled road segments, such as U.S. Highway 18 near Hot Springs or State Highway 79 at the  
39 junction with State Highway 18. As described in SEIS Section 4.3.1.1.2, when the projected  
40 traffic for all the roads in the analysis is evaluated (ranging from approximately 150 to  
41 5,200 vehicles per day based on the sum of projected auto and truck traffic for each road), the  
42 magnitude of traffic is not expected to exceed the existing road capacity. Therefore, NRC  
43 staff conclude the regional highways could accommodate the additional traffic from the  
44 proposed project.

45  
46 Considering the magnitude of projected traffic from the proposed project, the NRC staff  
47 conclude the significant increase in traffic volumes to the local and unpaved Dewey Road will  
48 result in MODERATE impacts under the land application disposal option. The projected daily  
49 traffic on Dewey Road represents an increase of about five times the existing low level of traffic  
50 (see Table 4.3-2). This increase in traffic would accelerate degradation of the road surface,

1 increase the generation of dust, and increase the potential for traffic accidents and wildlife or  
2 livestock kills. Based on the available capacity on the more distant regional roads, the staff  
3 conclude the potential traffic impacts to the remainder of regional roads will be SMALL under  
4 the land application disposal option.

5  
6 Proposed yellowcake transportation activities for the land application option will be same as  
7 those described in SEIS Section 4.3.1.1.2 for the Class V injection well disposal option. The  
8 applicant has estimated approximately 25 yellowcake shipments per year will be needed for the  
9 proposed action or an average of one shipment every 2 weeks. This estimate is based on the  
10 proposed 45,250 kg [1 million lb] annual yellowcake production rate and an assumed 18,100 kg  
11 [40,000 lb] capacity per yellowcake shipment (Powertech, 2009b). This shipment volume will  
12 not significantly affect the project-related traffic relative to the expected commuting workforce.

13  
14 To limit the risk of an accident involving resin or yellowcake transport, the applicant has  
15 proposed that all such materials will be transported in accordance with USDOT and NRC  
16 regulations, handled as low specific-activity materials, and shipped using exclusive-use-only  
17 vehicles (Powertech, 2009a). The NRC staff conclude the consequences of such accidents will  
18 also be limited because the applicant has proposed to develop emergency response procedures  
19 (Powertech, 2009a) for yellowcake and other transportation accidents that could occur during  
20 shipment to or from the proposed Dewey-Burdock ISR Project. The applicant also proposes to  
21 ensure its personnel and the carrier receive training on these emergency response procedures  
22 and that information about the procedures is provided to state and local agencies (Powertech,  
23 2009a). Therefore, the NRC staff concluded the impact from a potential accident involving  
24 yellowcake transportation during the operations phase of the proposed project will be SMALL  
25 under the land application disposal option.

26  
27 Proposed ion-exchange transportation activities for the land application option will be the same  
28 as those described in SEIS Section 4.3.1.1.2 for the Class V injection well option. The applicant  
29 plans to transport one loaded resin truck per day (Powertech, 2009a). Ion-exchange resin  
30 transported onsite between the Dewey satellite facility and the Burdock central processing plant  
31 will traverse approximately 8 km [5.0 mi] of road (primarily Dewey Road). Compliance with the  
32 applicable NRC and USDOT regulations for shipping ion-exchange resins, which are enforced  
33 by NRC onsite inspections, provides confidence that these materials can be safely shipped  
34 across the site area. The NRC staff conclude the aforementioned SMALL potential radiological  
35 accident impacts from the proposed Dewey-Burdock facility yellowcake shipments bound the  
36 potential radiological accident impacts of the proposed ion-exchange resin shipments. The  
37 NRC staff conclude that the resulting environmental impact from ion-exchange resin shipments  
38 will be SMALL; this is based on the fact that the risk of ion-exchange resin accidents is low, a  
39 resulting spill will be properly removed and disposed of, and the affected area will be reclaimed  
40 in accordance with applicable NRC and state regulations.

41  
42 Proposed operational byproduct material transportation activities for the land application option  
43 will be the same as those described in SEIS Section 4.3.1.1.2 for the Class V injection well  
44 disposal option. NRC staff concluded in the GEIS the small risks from transporting yellowcake  
45 during operations will bound the risks expected from byproduct material shipments, owing to the  
46 concentrated nature of shipped yellowcake, the longer distance yellowcake is shipped relative to  
47 byproduct material, and the relative number of shipments of each material. The applicant's  
48 estimated annual generation of 22 m<sup>3</sup> [29 yd<sup>3</sup>] of byproduct material (including reverse osmosis  
49 reject solids, spent ion-exchange resins, and tank and pond sediments) will comprise  
50 approximately one shipment per year (SEIS Section 2.1.1.1.7). Transportation safety will be  
51 maintained by the applicant's proposed adherence to applicable NRC and USDOT

1 transportation requirements, the applicant's proposed use of licensed third-party carriers, and  
2 the applicant's proposed emergency response measures (Powertech, 2009b). NRC staff  
3 conclude that the environmental impacts of the proposed byproduct material shipments under  
4 the land application disposal option will be bounded by impacts from the proposed yellowcake  
5 shipments (SMALL).  
6

7 Proposed operational hazardous chemical shipments for the land application option will be the  
8 same as those described in SEIS Section 4.3.1.1.2 for the Class V injection well disposal option.  
9 Transportation risks associated with incoming, onsite, and outgoing hazardous chemical  
10 shipments involve potential in-transit accidents. The process chemicals described in the  
11 applicant's proposal are commonly used in industrial applications, and they will be transported  
12 following the applicable USDOT hazardous materials shipping provisions. If an accident  
13 occurred, spill response will be handled via emergency response procedures, although a spill of  
14 nonradiological materials will be reportable to the appropriate state agency, EPA, and USDOT  
15 (NRC, 2009a). Spill material will be recovered or removed and the affected areas reclaimed.  
16 The release of anhydrous ammonia, a compound that the applicant may use in the precipitation  
17 circuit (Powertech, 2009b), could be hazardous to the public if released near a populated area.  
18 However, the proposed Dewey-Burdock ISR Project is not situated in a populated area and the  
19 likelihood of such an accident occurring is SMALL, calculated as  $3.0 \times 10^{-7}$  accidents per km  
20 [ $4.8 \times 10^{-7}$  accidents per mi] based on NUREG-0706 accident data (NRC, 1980). The applicant  
21 proposes to maintain transportation safety by adherence to applicable USDOT hazardous  
22 materials transportation requirements and the proposed use of licensed third-party carriers  
23 (Powertech, 2009a). Based on these considerations, the staff conclude the environmental  
24 impacts from operational hazardous chemical shipments under the land application disposal  
25 option will be SMALL.  
26

27 NRC staff conclude the significant increase in traffic volumes to the local and unpaved Dewey  
28 Road will result in MODERATE impacts from travel on that road and SMALL impacts to the  
29 remaining regional roads under the land application disposal option. Based on the low  
30 radiological risks from transportation accidents and the implementation of the applicant's  
31 additional safety practices as previously discussed, the overall impacts from the proposed  
32 transportation activities during the operations phase will be SMALL under the land application  
33 disposal option.  
34

#### 35 4.3.1.2.3 Aquifer Restoration Impacts 36

37 The estimated daily traffic volume on regional roads during the aquifer restoration phase for the  
38 land application disposal option will be the same as that described in SEIS Section 4.3.1.1.3  
39 and summarized in Table 4.3-3 for the Class V injection well disposal option. Commuting  
40 workers will constitute the majority of road traffic the applicant proposed for the aquifer  
41 restoration phase. The projected auto traffic for the aquifer restoration phase for all road  
42 segments evaluated is lower than the projected traffic from the construction and operation  
43 phases, and the projected truck traffic is similar to the operation phase. Considering  
44 Table 4.3-3, the proposed traffic, if allocated completely to the individual road segments, will  
45 increase the existing traffic on low-traffic roads, such as the unpaved Dewey Road (Fall River  
46 County Road 6463 and Custer County Road 769), but will not substantially increase traffic on  
47 the remaining road segments in the table. The projected daily traffic on Dewey Road, the road  
48 nearest the proposed site, is approximately double the existing low level of traffic. Based on the  
49 low levels of projected traffic for all vehicle types and road segments, the NRC staff conclude

1 the transportation impacts from the proposed aquifer restoration transportation activities will be  
2 SMALL under the land application disposal option.

#### 3 4 4.3.1.2.4 Decommissioning Impacts

5  
6 The proposed decommissioning transportation activities for the Dewey-Burdock ISR Project  
7 include employee commuting and truck shipments of nonhazardous solid waste (e.g., facility  
8 demolition and equipment removal) and byproduct material. Traffic generated by these  
9 proposed activities for the land application option will be the same as that described in SEIS  
10 Section 4.3.1.1.4 and summarized in Table 4.3-4 for the Class V injection well disposal option.

11  
12 The applicant estimated that the proposed land application disposal option will generate more  
13 decommissioning waste than the Class V injection well disposal option (and therefore will  
14 generate more truck traffic). The projected auto and truck traffic for the decommissioning phase  
15 for all road segments evaluated is lower than the projected traffic from the construction,  
16 operation, and aquifer restoration phases. Considering Table 4.3-4, the proposed traffic, if  
17 allocated completely to the individual road segments, will increase the existing traffic on  
18 low-traffic roads, such as the unpaved Dewey Road (Fall River County Road 6463 and  
19 Custer County Road 769), but will not substantially increase traffic on the remaining road  
20 segments in the table. The projected daily traffic on Dewey Road, the road nearest the  
21 proposed site, is approximately double the existing low level of traffic. Based on the low levels  
22 of projected traffic for all vehicle types and road segments, the NRC staff conclude the potential  
23 traffic-related impacts from the proposed decommissioning transportation activities will be  
24 SMALL under the land application disposal option.

25  
26 Another potential transportation impact from proposed decommissioning activities is the  
27 radiological risk from the transportation of byproduct material for offsite disposal. The NRC staff  
28 consider the potential radiological accident risk associated with byproduct material shipments  
29 will be low based on the calculated risks from concentrated yellowcake product shipments  
30 discussed previously in SEIS Section 4.3.1.2.2. The number of byproduct material shipments  
31 NRC staff estimated based on the applicant's proposal is low (Table 2.1-7; approximately  
32 34 annually for the land application option). The applicant's annual byproduct material volume  
33 estimate in its surety (Powertech, 2009b) (see SEIS Section 2.1.1.6.3) indicates the material will  
34 consist primarily of pond leak detection equipment and liners. Relative to powdered yellowcake,  
35 this material is in a form that will be less dispersible (i.e., less likely to cause public exposure if  
36 released) and easier to clean up if an accident involving release occurred. The byproduct  
37 material will be transported and disposed of at a licensed facility. The applicant has proposed to  
38 pursue an agreement with the White Mesa site in Blanding, Utah, for disposal of solid byproduct  
39 material (SEIS Section 3.13.2). The trip distance to this facility from the proposed site of  
40 1,210 km [752 mi] is less than the distance used in the risk analysis described in GEIS  
41 Section 4.2.2.2 for transporting yellowcake to the conversion facility in Metropolis, Illinois  
42 {approximately 2,414 km [1,500 mi]}. The applicant proposes to implement additional BMPs to  
43 reduce the risk of accidents, including (i) enforcing safe driving and emergency response  
44 procedures and training for personnel and truck drivers; (ii) installing communication systems to  
45 connect trucks to shipper/receiver/emergency responders; and (iii) and enforcing speed limits  
46 on the proposed project site to increase driver safety and to reduce conflicts with big game,  
47 livestock, and other vehicles (Powertech, 2009a). All shipments will be required to comply with  
48 applicable USDOT regulations governing the transportation of radioactive material (including  
49 quantity limits, packaging requirements, and conveyance dose rate limits). Based on the  
50 preceding analysis, the NRC staff conclude the potential radiological risks from the proposed  
51 transportation of decommissioning byproduct material will be low, and therefore the potential



1 environmental impacts from the proposed radioactive material transportation will be SMALL  
2 under the land application disposal option.

3  
4 In conclusion, because of the low estimated traffic for the proposed project relative to existing  
5 road traffic in the region surrounding the site, the NRC staff conclude the potential traffic-related  
6 transportation impacts during decommissioning will be SMALL under the land application  
7 disposal option. The low radiological risk from potential transportation accidents in comparison  
8 to the accident risks evaluated for the operation phase (i.e., no interstate transport of yellowcake  
9 product) supports the staff's conclusion that the radiological risks from transportation of  
10 decommissioning byproduct material for offsite disposal will also be SMALL. Therefore, the  
11 NRC staff conclude the overall transportation impacts related to the decommissioning phase will  
12 be SMALL under the land application disposal option.

#### 13 14 **4.3.1.3 Disposal Via Combination of Class V Injection and Land Application**

15  
16 If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is  
17 insufficient to dispose of all liquid byproduct material generated at the proposed Dewey-Burdock  
18 ISR Project, the applicant has proposed to dispose of liquid byproduct material by a combination  
19 of Class V injection wells and land application (see SEIS Section 2.1.1.1.2.4.3). For the  
20 combined option, land application facilities and infrastructure will be constructed, operated,  
21 restored, and decommissioned on an as-needed basis depending on the deep well disposal  
22 capacity (Powertech, 2011). The land application option will require the construction and  
23 operation of irrigation areas and increased pond capacity for storage of liquid byproduct material  
24 during nonirrigation periods (see SEIS Section 2.1.1.1.2.4.2), whereas the Class V injection well  
25 disposal option will require the construction and operation of four to eight deep disposal wells  
26 (see SEIS Section 2.1.1.1.2.4.1).

27  
28 The relative volumes of byproduct material generated by the two disposal options differ during  
29 operations, aquifer restoration, and decommissioning phases with the land application option  
30 generating the larger amount of material for offsite disposal in each phase. The relative  
31 volumes of nonhazardous solid waste generated by the two disposal options differ during the  
32 decommissioning phase. The significance of these differences with regard to environmental  
33 impacts is low and does not change the impact conclusions for each disposal option. Therefore,  
34 the transportation environmental impacts associated with the land application option will be the  
35 same for the Class V injection well disposal option for all phases of the ISR process.  
36 Furthermore, only a portion of land application facilities and infrastructure (e.g., irrigation areas  
37 and storage ponds) will be constructed, operated, and decommissioned for the combined  
38 Class V injection well disposal and land application option. Therefore, the significance of  
39 environmental impacts on waste management resources for the combined disposal option will  
40 be less than for the land application option alone. Based on this reasoning, NRC staff conclude  
41 that the transportation environmental impacts of the combined Class V injection well disposal  
42 and land application option for each phase of the proposed Dewey-Burdock ISR Project will lie  
43 between or be bounded by the significance of environmental land use impacts of the Class V  
44 deep well injection option and the land application option as summarized in Table 4.3-5.

#### 45 46 **4.3.2 No Action (Alternative 2)**

47  
48 Under the No-Action alternative, traffic volumes and patterns will remain the same as described  
49 in SEIS Section 3.3. There will be no transportation of materials to and from the site to support  
50 licensed activities. There will be no transportation of either radionuclide or solid waste

1

**Table 4.3-5. Significance of Transportation Environmental Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	MODERATE	MODERATE	MODERATE
Operations	MODERATE	MODERATE	MODERATE
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL	SMALL	SMALL
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.			

2

3 attributable to the proposed action because the facility will neither be licensed nor constructed  
4 and operated. Existing land use activities, predominantly livestock grazing, will persist.

5

#### 6 **4.4 Geology and Soils Impacts**

7

8 Environmental impacts on geology and soils occur during all phases of an ISR facility lifecycle;  
9 however, the direct impacts on geology and soils will be concentrated during construction  
10 (NRC, 2009a).

11

##### 12 GEIS Construction Phase Summary

13

14 As described in GEIS Section 4.4.3.1, the principal impacts on geology and soils are caused by  
15 earthmoving activities during construction of ISR surface facilities, access roads, wellfields, and  
16 pipelines. Earthmoving activities affecting soils include ground clearing, topsoil removal, and  
17 preparation of land surfaces before construction of facility structures. Such structures include  
18 the processing plant, satellite facilities, header houses, access roads, drilling sites, land  
19 application areas, and associated structures. Excavating and backfilling trenches for pipelines  
20 and cables will also impact soils. (NRC, 2009a)

21

22 NRC staff concluded in the GEIS that the impact on geology and soils from construction  
23 activities is dependent on local topography, surface and bedrock geology, and soil  
24 characteristics. Earthmoving activities are normally limited to a small portion of the project.  
25 Consequently, earthmoving activities will result in SMALL and temporary (months) disturbance  
26 of soils, impacts that are commonly mitigated using accepted BMPs. Construction activities will  
27 increase the potential for wind and water erosion due to the removal of vegetation and the  
28 physical disturbance that will result from vehicle and heavy equipment traffic. These activities,  
29 however, will result in SMALL impacts if equipment operators adopt construction BMPs to either  
30 prevent or substantially reduce erosion. (NRC, 2009a)

31

##### 32 GEIS Operations Phase Summary

33

34 As discussed in GEIS Section 4.4.3.2, during ISR operations, a non-uranium-bearing (barren)  
35 solution or lixiviant is injected through wells into the mineralized zone. The lixiviant moves  
36 through the pores in the host rock, dissolving uranium and other metals. Production wells  
37 withdraw the resulting “pregnant” lixiviant, which now contains uranium and other dissolved  
38 metals, and pump it to a processing facility for further uranium recovery and purification. During

1 ISR operations the removal of uranium and other metals will permanently change the  
2 composition of uranium-bearing rock formations. However, the uranium mobilization and  
3 recovery process in the target sandstones does not result in the removal of rock matrix or  
4 structure, and therefore no significant matrix compression or ground subsidence is expected.  
5 Consequently, impacts on geology from ground subsidence at ISR projects will be SMALL.  
6 (NRC, 2009a)

7  
8 In GEIS Section 4.4.3.2, NRC staff discussed the potential soil impacts from ISR operations  
9 resulting from the need to transfer barren and pregnant uranium-bearing lixiviant to and from the  
10 processing facility in aboveground and underground pipelines. If a pipe ruptures or fails,  
11 lixiviant could be released and (i) pond on the surface, (ii) runoff into surface water bodies,  
12 (iii) infiltrate and adsorb in overlying soil and rock, or (iv) infiltrate and percolate to groundwater.  
13 In the case of spills from pipeline leaks and ruptures, licensees are expected to establish  
14 immediate spill responses through onsite standard operation procedures (e.g., NRC, 2003b,  
15 Section 5.7). As part of the monitoring requirements at ISR facilities, licensees must report  
16 certain spills to NRC within 24 hours. Regular inspection and monitoring also occurs to  
17 minimize the potential for spills and leaks through early detection. (NRC, 2009a)

18  
19 Additionally, failure of settling and holding pond liners or embankment systems and buildup of  
20 certain constituents in land-applied water may negatively impact soils (NRC, 2009a). Licensees  
21 will be expected to construct and monitor settling and holding pond liners and embankments in  
22 accordance with NRC-approved plans, and licensees will be expected to obtain the appropriate  
23 permits from state regulatory agencies for land application and to conduct regular soil  
24 monitoring. Such actions will tend to mitigate impacts to soils from these waste  
25 disposal methods. Based on these considerations, NRC staff concluded in GEIS  
26 Section 4.4.3.2 that impacts to soils from spills during operations could range from SMALL to  
27 LARGE, depending on the volume of soil affected by the spill, but that the immediate response  
28 requirement to report spills at ISR facilities, the mandated spill recovery actions, and the  
29 required routine monitoring programs will reduce the potential impact from spills to SMALL.  
30 (NRC, 2009a)

### 31 32 GEIS Aquifer Restoration Phase Summary

33  
34 As described in GEIS Section 4.4.3.3, aquifer restoration programs typically use a combination  
35 of (i) groundwater transfer; (ii) groundwater sweep; (iii) reverse osmosis, permeate injection and  
36 recirculation; (iv) stabilization; and (v) water treatment and surface conveyance (NRC, 2009a).  
37 The groundwater sweep and recirculation process does not remove rock matrix or structure, nor  
38 will dewatering occur within the aquifer; therefore, no significant matrix compression or ground  
39 subsidence is expected. The water pressure in the aquifer decreases during restoration  
40 because a negative water balance must be maintained in the wellfield being restored to ensure  
41 water flows from the edges of the wellfield inward; this reduces the spread of contaminants  
42 outside of the wellfield. The influx of fluid will change the reservoir pressure but will not  
43 reactivate any local faults, because the change in reservoir pressure is limited by recirculation of  
44 treated groundwater. NRC staff concluded in the GEIS that ISR operations are unlikely to  
45 reactivate any local faults and extremely unlikely to cause earthquakes. After analyzing these  
46 conditions the NRC staff concluded in the GEIS the environmental impact of aquifer restoration  
47 to the geology of the Nebraska-South Dakota-Wyoming Uranium Milling Region will be SMALL.  
48 (NRC, 2009a)

49

1 In GEIS Section 4.4.3.3, NRC staff also concluded impacts on soils from spills during aquifer  
2 restoration will range from SMALL to LARGE, depending on the volume of soil affected by  
3 the spill. Because of the requirements for immediate spill response at ISR facilities, for  
4 spill-recovery actions, and for routine monitoring programs, NRC staff concluded in the GEIS  
5 that impacts from spills will be temporary and the long-term impact on soils will be SMALL.  
6 (NRC, 2009a)

#### 7 8 GEIS Decommissioning Phase Summary 9

10 As indicated in GEIS Section 4.4.3.4, the decommissioning of ISR facilities includes the  
11 following activities: (i) dismantling process facilities and associated structures, (ii) removing  
12 buried piping, and (iii) plugging and abandoning wells using accepted practices. The main  
13 impacts to the geology and soils at the project site during decommissioning will result from land  
14 reclamation activities and cleaning up contaminated soils. (NRC, 2009a)

15  
16 The GEIS also states a licensee is required to submit a decommissioning plan to NRC for  
17 review and approval before decommissioning and reclamation activities may begin. NRC  
18 regulations require an applicant submit a final decommissioning plan to NRC for review and  
19 approval at least 12 months prior to the planned decommissioning of a wellfield or any portion of  
20 an ISR facility (NRC, 2003a). Any soils that have the potential to be contaminated will be  
21 surveyed to identify and clean up areas with elevated radionuclide concentrations, in  
22 accordance with NRC regulations at 10 CFR Part 40, Appendix A, Criterion 6 (6) (NRC, 2009a).  
23 The goal of reclamation is to return the site to preproduction conditions by replacing topsoil and  
24 reestablishing vegetation communities. (NRC, 2009a)

25  
26 NRC staff concluded in the GEIS that the impacts on geology and soils from decommissioning  
27 will be detectable but SMALL. Disruption and/or displacement of existing soils will be temporary  
28 and relatively small in scale. Changes in the size and location of impervious surfaces will be  
29 measureable, but will involve only a few hectares [acres] of compacted soil beneath buildings  
30 and parking lots. These changes will not be on a large enough scale to alter existing natural  
31 conditions. (NRC, 2009a)

#### 32 33 **4.4.1 Proposed Action (Alternative 1)** 34

35 As described in SEIS Section 3.2, the proposed Dewey-Burdock ISR Project site encompasses  
36 4,282 ha [10,580 ac] (Powertech, 2009a). The topsoil in the areas of the Burdock central  
37 processing plant and the Dewey satellite facility and wellfield header houses will be removed  
38 before construction begins. The applicant has committed to removing topsoil to construct  
39 access roads and will adhere to road construction practices stipulated by landowners  
40 (Powertech, 2009a). The applicant estimates that 5.3 ha [13 ac] of topsoil will be stripped and  
41 removed during the life of the project (Powertech, 2009b). The area of topsoil disturbance will  
42 be small (approximately 5 percent of the area) when compared to the applicant's estimated land  
43 disturbance of approximately 98 ha [243 ac] for the Class V deep well injection option and  
44 approximately 566 ha [1,398 ac] for the land application option to dispose of treated wastewater  
45 generated by the proposed project (see Table 2.4-1).

46  
47 The following sections discuss the environmental impacts on land use for each of the liquid  
48 waste disposal options proposed by the applicant: (i) disposal via Class V injection wells,  
49 (ii) disposal via land application, or (iii) combined disposal via Class V injection wells and  
50 land application.  
51

#### 4.4.1.1 Disposal Via Class V Injection Wells

As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid waste is deep well disposal via Class V injection wells. The potential environmental impacts on geology and soils from construction, operations, aquifer restoration, and decommissioning associated with the Class V injection well disposal option at the proposed project are discussed next.

##### 4.4.1.1.1 Construction Impacts

As described in SEIS Section 2.1.1.1.2, topsoil will be removed from building sites, storage areas, and access roads and stored in designated topsoil stockpiles, in accordance with SDDENR requirements (Powertech, 2009b). The applicant will mitigate soil losses due to runoff and wind erosion. Mitigation measures will include (i) locating topsoil stockpiles away from drainage channels or other locations that will lead to loss of material, (ii) constructing berms around the base of the stockpiles, and (iii) seeding the stockpiles with an approved seed mix to minimize sediment runoff and wind erosion (Powertech, 2009a).

The applicant will implement additional mitigation measures to limit potential soil erosion impacts during construction at the proposed Dewey-Burdock site (Powertech, 2009a). These measures include (i) reestablishing temporary and permanent native vegetation as soon as possible after disturbance; (ii) decreasing runoff from disturbed areas by using structures to temporarily divert and/or dissipate surface runoff; (iii) retaining sediment within disturbed areas by using silt fencing, retention ponds, and hay bales; (iv) implementing drainage designs to minimize potential erosion and/or provide riprap or other soil stabilization controls; and (v) constructing stream crossings at right angles with adequate embankment and culvert installations to minimize erosion. Construction activities at the proposed Dewey-Burdock site have the potential to compact soils. Compaction of soils could lead to decreased infiltration and increased runoff. To mitigate the effects of compaction at the proposed site, the applicant proposes to disc and reseed any compacted soils as soon as possible after construction activities are completed (Powertech, 2009a).

During wellfield construction at the proposed Dewey-Burdock site, well construction, exploration drilling, and delineation drilling will also impact soils. The applicant estimated that approximately 646 wells (including delineation, monitor, production, injection, and deep disposal wells) will be drilled in the development of the initial wellfields in the Burdock and Dewey areas (Powertech, 2010b). As discussed in SEIS Section 2.1.1.1.2.3.5, drilling activities include the construction of unlined mud pits. During excavation of mud pits, topsoil will be separated from the subsoil and placed at a separate location (Powertech, 2009a). The subsoil will then be removed and placed next to the mud pit. Once use of the mud pit is complete (usually within 30 days of initial excavation), the applicant will redeposit the subsoil in the mud pit followed by topsoil replacement (Powertech, 2009a). The applicant will follow a similar approach for pipeline ditch construction.

The NRC staff conclude the environmental impacts to geology and soils from construction activities for the Class V injection well option at the Dewey-Burdock site will be SMALL. This finding is based on NRC staff evaluation of the limited area to be disturbed by construction, the applicant commitment to proposed BMPs to limit soil erosion and compaction, the commitment to mitigative methods, the short duration of construction, and the procedures used to construct mud pits and pipeline ditches.

1 While the NRC staff concludes impacts to soils from construction would be SMALL, the staff  
2 recognizes that alternative methods to manage drilling fluids are available that the applicant  
3 could choose to implement to further limit the potential impacts from the use of mud pits during  
4 well drilling activities. Alternatives or mitigating measures to the use of mud pits during well  
5 drilling operations include, for example, lining the mud pits with an impermeable membrane,  
6 offsite disposal of potentially contaminated drilling mud and other fluids, and the use of portable  
7 tanks or tubs to contain drilling mud and other fluids.

#### 8 9 4.4.1.1.2 Operations Impacts

10  
11 As described in SEIS Section 2.1.1.1.3, the applicant's operational activities at the facility are  
12 consistent with the operations analyzed in the GEIS. Soil disturbance during the estimated  
13 8-year operations phase of the proposed Dewey-Burdock ISR Project will be limited primarily to  
14 earthmoving activities associated with wellfield development (e.g., preparing and constructing  
15 drill sites and mud pits, expanding pipelines, and constructing wellfield access roads).  
16 Therefore, the amount of soil disturbance resulting from earthmoving activities during the  
17 operations phase of the proposed project will be less than that for the construction phase.

18  
19 As described in SEIS Section 2.1.1.1.3, the applicant's operational activities at the facility are  
20 consistent with the operations analyzed in the GEIS. The removal of uranium from the target  
21 sandstones in the initial wellfields at the proposed project will occur at depths ranging from  
22 approximately 122 to 244 m [400 to 800 ft] below ground surface (bgs) in the Dewey area and  
23 approximately 61 to 122 m [200 to 400 ft] bgs in the Burdock area (Powertech, 2009c). The ISR  
24 process and lixiviant chemistry will not remove rock matrix material or structure in the ore-  
25 bearing sandstones. Therefore, no significant matrix compression will result from the proposed  
26 uranium recovery operations. Dewatering of the source uranium formations (i.e., the Fall River  
27 Formation and Chilson member of the Lakota Formation) during ISR operations is not expected.  
28 Hydrogeologic characteristics of the uranium source formations (i.e., formation thicknesses and  
29 potentiometric surfaces, as described in SEIS Section 3.5.3.2) and results of aquifer pumping  
30 tests at estimated production flow rates (see SEIS Section 4.5.2.1.1.2.2) indicate that drawdown  
31 in nearby wells will be SMALL. Because rock matrix is not removed during the uranium  
32 mobilization and recovery process and dewatering of uranium source formations is not  
33 expected, no subsidence is expected from the collapse of overlying rock strata into the  
34 ore zone.

35  
36 The applicant will implement an NRC-required wellfield and pipeline flow and pressure  
37 monitoring program to detect unexpected losses of pressure due to equipment failure, a leak,  
38 or a problem with well integrity (Powertech, 2009a). This program, described in SEIS  
39 Section 7.3.2, ensures timely detection of any releases from leaks due to pipeline breaks or  
40 ruptures and minimizes the volume of such releases. The design of all radium settling and  
41 holding ponds at the Dewey-Burdock ISR Project includes a leak detection system (Powertech,  
42 2009b). Detection of a pond leak will initiate measures to take the pond out of use, transfer its  
43 contents to another pond, investigate the cause, and repair the condition causing the leak. The  
44 applicant will also collect and monitor soils for yellowcake and ion-exchange resin contamination  
45 along transportation routes and in wellfield areas where spills and leaks are possible  
46 (Powertech, 2009a). If soil is contaminated by a pipeline spill, pond leak, or vehicle accident,  
47 the applicant will remove the contaminated soil and dispose of it at a licensed disposal facility to  
48 ensure all impacts are temporary (Powertech, 2009a). After decontamination is complete, the  
49 applicant is required by regulation to conduct radiation surveys to confirm that soils have been  
50 cleaned to the NRC standards for unrestricted use in 10 CFR Part 20 (Powertech, 2009a).

1 As described in SEIS Section 2.1.1.1.2.4, for the applicant to use deep well disposal, an EPA  
2 Class V underground injection control (UIC) permit is required. EPA evaluates the suitability of  
3 formations proposed for deep well injection and only allows Class V injection where an applicant  
4 demonstrates liquid waste can be safely isolated in a deep aquifer. EPA reviews the application  
5 to confirm the well is properly sited, such that confining zones and proper well construction  
6 minimize the potential for migration of fluids outside the injection zone.

7  
8 The NRC will require liquid wastes injected into potential Class V injection wells at the proposed  
9 project to be treated to concentrations below hazardous levels and radioactive waste thresholds  
10 at 10 CFR Part 20, Subparts D and K, as well as Appendix B, Table 2, Column 2. Before  
11 injection of fluids into the Class V deep injection wells, the permittee must demonstrate (i) the  
12 injection zones are not underground sources of drinking water by providing analytical results for  
13 total dissolved solids above 10,000 mg/L [10,000 ppm] and (ii) there are adequate confining  
14 zones above and below the proposed injection zones. If the proposed injection zones are  
15 underground sources of drinking water (have total dissolved solids concentrations below  
16 10,000 mg/L [10,000 ppm], the EPA UIC permit will require liquid wastes to be treated to meet  
17 drinking water standards. The permit will also place an injection pressure limit prohibiting  
18 injection pressures at or above the injection zone formation fracture pressure. The applicant  
19 estimates that the average injection pressure during active operations will range from  
20 approximately 21.1 to 56.3 kg/cm<sup>2</sup> [300 to 800 psi] (Powertech, 2011; Appendix 2.7–L).

21  
22 In summary, based on analysis of the depth of the ore production zones and because the  
23 operations phase does not involve the removal of rock matrix or structure, the staff find that the  
24 impacts to geology from subsidence at the proposed project will be SMALL. Systems and  
25 procedures will be in place to monitor and clean up soil contamination resulting from pipeline  
26 and wellfield spills, pond leaks, and vehicle accidents. NRC and the EPA Class V permit will  
27 require liquid wastes to be treated prior to deep well injection to meet NRC release limit criteria  
28 contained in 10 CFR Part 20, Subparts D and K, and Appendix B or drinking water standards if  
29 the injection zones are underground source of drinking water. Therefore, NRC staff conclude  
30 that site-specific impacts to geology and soils during the operational phase for the Class V  
31 injection well disposal option will be SMALL.

#### 32 33 4.4.1.1.3 Aquifer Restoration Impacts

34  
35 For the Class V injection well disposal option, the primary method of aquifer restoration will be  
36 reverse osmosis (RO) treatment with permeate injection (see SEIS Section 2.1.1.1.4.1.1).  
37 About 70 percent of the water withdrawn from the wellfields and passed through high pressure  
38 RO membranes will be recovered as permeates. Before reinjection into the wellfields, the  
39 permeate would be supplemented with makeup water from wells in the Madison Formation and  
40 injected into the wellfields at an amount slightly less than the amount withdrawn to maintain a  
41 slight restoration bleed. Although a 1 percent restoration bleed would typically be used to  
42 maintain hydraulic control of wellfields, higher bleed rates may be implemented to recover flare  
43 (i.e., outward spreading) of lixiviant from the wellfield pattern areas during aquifer restoration. If  
44 necessary, the applicant has proposed to increase the restoration bleed by withdrawing up to  
45 one pore volume of water through groundwater sweep over the course of aquifer restoration.

46  
47 During the aquifer restoration phase, liquid wastes injected into the Class V deep injection wells  
48 will consist of bleed fluids from operating wellfields and the brine for the RO treatment system.  
49 The applicant estimates the maximum volume of liquid wastes injected into the Class V injection  
50 wells during aquifer restoration will be 567.75 Lpm [150 gpm] (see SEIS Section 2.1.1.1.4.1.1).

1 The EPA UIC Class V permit will not place an upper limit on the injection rate; only the injection  
2 pressure will have an upper limit in the permit.

3  
4 ISR activities during aquifer restoration at the proposed Dewey-Burdock facility will not remove  
5 rock matrix or structure (NRC, 2009a). The source uranium formations lie 122 to 244 m [400 to  
6 800 ft] bgs in the Dewey area and 61 to 122 m [200 to 400 ft] bgs in the Burdock area  
7 (Powertech, 2009a). Rock matrix is not removed by groundwater transfer and groundwater  
8 sweep during aquifer restoration. In addition, no significant matrix compression or ground  
9 subsidence is expected during aquifer restoration activities. For these reasons, the subsidence  
10 and collapse of overlying rock strata into the ore zone during the restoration phase is not  
11 expected. Therefore, the NRC staff conclude the environmental impact on geology during  
12 aquifer restoration will be SMALL.

13  
14 The spill and leak detection program described for the operations phase in SEIS  
15 Section 4.4.1.1.2 will also be maintained during aquifer restoration because the plant and  
16 wellfield infrastructure will be used and monitored during aquifer restoration. The potential for  
17 spills and pipeline leaks to impact soils are SMALL and similar to impacts described for the  
18 operations phase. The NRC staff conclude that the potential of spills to impact the geology and  
19 soils is SMALL because of the regulatory requirements for immediate spill response, for  
20 implementing spill recovery actions, and for ongoing monitoring programs.

#### 21 22 4.4.1.1.4 Decommissioning Impacts

23  
24 The applicant will restore disturbed lands to their prior uses as livestock grassland and wildlife  
25 habitat (see SEIS Section 2.1.1.1.5). The Burdock central processing plant and Dewey satellite  
26 facilities will be decontaminated according to regulatory standards and the applicant's  
27 NRC-approved decommissioning plan (see SEIS Section 3.13.2). These structures will be  
28 demolished and trucked to a licensed disposal facility (see SEIS Section 2.1.1.1.5) or will be  
29 turned over to the landowner. Baseline readings of soils, vegetation, and radiological data will  
30 guide and provide a basis to evaluate final reclamation efforts. Any soils that have the potential  
31 to be contaminated will be surveyed to identify and clean up areas with elevated radionuclide  
32 concentrations, in accordance with NRC regulations at 10 CFR Part 40, Appendix A,  
33 Criterion 6 (6). Any contaminated soils will be disposed of in licensed disposal facilities. As  
34 discussed in SEIS Section 2.1.1.1.5.3, stockpiled topsoil will be redistributed over disturbed  
35 surfaces, which will be recontoured to match existing topography. Final revegetation will consist  
36 of seeding the area with a seed mixture approved by SDDENR, the local conservation district,  
37 BLM, and landowners (Powertech, 2009b).

38  
39 Short-term impacts to geology and soils are expected as reclamation progresses; however, the  
40 result will be to return the land to uses that existed before proposed ISR activities began. The  
41 NRC staff conclude the environmental impacts of the decommissioning phase on geology and  
42 soils at the facility will be SMALL for several reasons. The temporary nature of the impacts on  
43 the land, the applicant's goal of decommissioning and reclaiming the site to preproduction  
44 conditions, and the fact that the magnitude of expected soil disturbance is within the range  
45 evaluated in the GEIS all support a finding of SMALL impacts.

#### 46 47 4.4.1.2 Disposal Via Land Application

48  
49 If a permit for Class V injection wells cannot be obtained from EPA, the applicant will dispose of  
50 liquid waste generated at the proposed Dewey-Burdock ISR Project by land application (see  
51 SEIS Section 2.1.1.1.2.4.2). Environmental impacts on geology and soils from construction,



1 operations, aquifer restoration, and decommissioning associated with the land application liquid  
2 waste disposal option are discussed in the following sections.

#### 3 4 4.4.1.2.1 Construction Impacts

5  
6 As described under SEIS Section 4.4.1.1.1, the applicant will implement mitigation measures to  
7 minimize soil losses from runoff and wind erosion of soil stockpiles. These measures include  
8 (i) locating topsoil stockpiles away from drainage channels or other locations that will lead to  
9 loss of material, (ii) constructing berms around the base of the stockpiles, and (iii) seeding the  
10 stockpiles with an approved seed mix to minimize sediment runoff and wind erosion.  
11 (Powertech, 2009a)

12  
13 The mitigation measures to limit soil erosion impacts during construction of the land  
14 application disposal system will be the same as the Class V deep injection well disposal  
15 method described in SEIS Section 4.4.1.1.1 (Powertech, 2009a). These measures include  
16 (i) reestablishing temporary and permanent native vegetation as soon as possible after  
17 disturbance; (ii) decreasing runoff from disturbed areas by using structures to temporarily divert  
18 and/or dissipate surface runoff; (iii) retaining sediment within disturbed areas by using silt  
19 fencing, retention ponds, and hay bales; (iv) implementing drainage designs to minimize erosion  
20 and/or provide riprap or other soil stabilization controls; and (v) constructing stream crossings at  
21 right angles with adequate embankment and culvert installations to minimize erosion.  
22 Compaction of soils at the site could lead to decreased infiltration and increased runoff. The  
23 applicant plans to disc and reseed any compacted soils as soon as possible after construction  
24 activities are completed to mitigate compaction at the site (Powertech, 2009a).

25  
26 Well construction, exploration drilling, and delineation drilling in the wellfield areas will also  
27 impact soils. The applicant estimates 642 delineation, monitor, production, injection, and deep  
28 disposal wells will be drilled as the initial wellfields in the Burdock and Dewey areas are  
29 developed (Powertech, 2010b). To prevent adverse impacts to groundwater quality, all  
30 production, injection, and monitoring wells, as well as all delineation drill holes, would be  
31 abandoned in place according to SDDENR regulations established in Administrative Rules of  
32 South Dakota (ARSD) 74:11:08 (Powertech, 2009a). As discussed in SEIS Section  
33 2.1.1.1.2.3.3, drilling activities will include the construction of unlined mud pits. Excavation of  
34 mud pits requires separating the topsoil from the subsoil and storing the topsoil at a separate  
35 location (Powertech, 2009a). The subsoil will be removed and placed next to the mud pit. Once  
36 use of the mud pit is complete (usually within 30 days of initial excavation), the applicant will  
37 redeposit the subsoil in the mud pit, followed by topsoil replacement (Powertech, 2009a). The  
38 applicant will follow a similar approach for pipeline ditch construction.

39  
40 The NRC staff evaluated the small area to be disturbed by construction, the applicant's plan to  
41 use BMPs to limit soil erosion and compaction, the short duration for construction, and use of  
42 mud pits and pipeline ditches and other construction methods that will limit environmental  
43 impacts. The NRC staff conclude that the environmental impacts to the geology and soils for  
44 the land application disposal option at the proposed project will be SMALL.

#### 45 46 4.4.1.2.2 Operations Impacts

47  
48 If land application is used to dispose of process-related liquid wastes, soils may be adversely  
49 impacted. The salinity of the treated wastewater could increase the salinity of soils (soil  
50 salinization) (NRC, 2009a), which would disperse soil particles, making the soil less permeable.

1 In addition, land application of liquid wastes could cause radiological and/or other constituents  
2 (e.g., selenium and other metals) to accumulate in the soils and vegetation. Licensees of  
3 NRC-regulated ISR facilities are required to monitor and control irrigation areas (NRC, 2009a).  
4 The applicant proposes to collect and monitor soils and sediments for potential contamination in  
5 areas used for land irrigation (Powertech, 2009a). The applicant's land application monitoring  
6 program is described in SEIS Section 7.5. In addition, licensees must ensure that radioactive  
7 constituents in liquid effluents applied to land application areas are within allowable release  
8 limits (NRC, 2009a). NRC will require the applicant to treat liquid wastes applied to land  
9 application areas so they meet NRC release limit criteria for radionuclides, as referenced in  
10 10 CFR Part 20, Appendix B. As stated in SEIS Section 2.1.1.1.6.2, land application will be  
11 carried out under a GDP through SDDENR (Powertech, 2012c). In accordance with permit  
12 program objectives, the applicant's proposed land application operations will have to meet  
13 applicable state groundwater quality standards. Therefore, the NRC staff conclude that the  
14 environmental impacts to geology and soils while operating the land application disposal system  
15 for liquid wastes will be SMALL.

16

#### 17 4.4.1.2.3 Aquifer Restoration Impacts

18

19 As described in SEIS Section 2.1.1.1.4.1.2, the primary method of aquifer restoration for the  
20 land application disposal option will be groundwater sweep with Madison Formation water  
21 injection (Powertech, 2011). The applicant estimates that typical liquid waste flow rates for the  
22 land application option during aquifer restoration will be approximately 1,892 Lpm [500 gpm].  
23 None of the water recovered from the wellfields will be reinjected back into the wellfields.  
24 Makeup water for the Madison Formation will be injected into the wellfields at a flow rate  
25 sufficient to maintain the restoration bleed, which is typically 1 percent of the restoration flow  
26 rate (Powertech, 2011).

27

28 If land application is used to dispose of liquid wastes, soils at the proposed Dewey-Burdock  
29 Project will be impacted during aquifer restoration activities as the liquid evaporates. During  
30 aquifer restoration, the applicant continues routine soil monitoring for contamination of land  
31 application areas and must ensure that radionuclide contaminant levels do not exceed the  
32 release standards in 10 CFR Part 20, Appendix B and applicable state discharge requirements  
33 for land application of treated wastes. Routine monitoring and the inclusion of land application  
34 areas in decommissioning surveys provide environmental protections. Therefore, NRC staff  
35 conclude that impacts to soils from land application during aquifer restoration will be SMALL.

36

#### 37 4.4.1.2.4 Decommissioning Impacts

38

39 If the land application disposal option is used, the environmental impacts of decommissioning  
40 the site will be similar to impacts described in SEIS Section 4.2.1.1.4 for the Class V injection  
41 well disposal option. Decommissioning of the site will follow an NRC-approved  
42 decommissioning plan, and all decommissioning activities must be carried out in accordance  
43 with 10 CFR Part 40 and other applicable federal regulatory requirements.

44

45 If the land application liquid waste disposal option is implemented at the Dewey-Burdock facility,  
46 the areas directly impacted by decommissioning will include the central processing plant,  
47 satellite facility, wellfields and their infrastructure (i.e., pipelines and header houses), irrigation  
48 areas, ponds, and access roads. SEIS Section 2.1.1.1.5 describes the decommissioning  
49 activities that will be undertaken to return the site to its previous land use. These  
50 include conducting radiological surveys; removing contaminated equipment and materials;

51

1  
2 cleaning up disturbed areas; plugging and abandoning wells; decontaminating, dismantling, and  
3 removing buildings and other onsite structures; and restoring disturbed areas (Powertech,  
4 2009b). Land application areas will also be included in decommissioning surveys to ensure that  
5 soil concentration limits are not exceeded.

6  
7 When decommissioning is complete, the land surfaces will be returned to their preextraction  
8 geologic condition. The NRC staff conclude the environmental impacts of the land application  
9 disposal option on the geology and soils for the land application option will be SMALL.

#### 10 11 **4.4.1.3 Disposal via Combination of Class V Injection and Land Application**

12  
13 If a permit for Class V injection wells is obtained from EPA, but the capacity of the wells is  
14 insufficient to dispose of all liquid wastes generated at the ISR facility, the applicant will dispose  
15 of liquid waste by a combination of disposal using Class V injection wells and land application  
16 (see SEIS Section 2.1.1.1.2.4.3). Under the combined disposal option land application, facilities  
17 and infrastructure will be constructed, operated, restored, and decommissioned, as needed,  
18 depending on the Class V injection well disposal capacity (Powertech, 2011).

19  
20 The potential environmental impacts of liquid waste disposal by land application for all phases of  
21 the ISR process will be greater than for liquid waste disposal by Class V well injection because  
22 of the increased land disturbance, thereby increasing potential for soil disturbance and soil  
23 erosion. However, implementing the combined disposal option will result in only a portion of  
24 land application facilities and infrastructure being constructed, operated, and decommissioned.  
25 Therefore, the environmental impacts of the combined disposal option will be less than for the  
26 land application option alone, but greater than the Class V injection well disposal option alone.  
27 NRC staff conclude that the environmental impacts of the combined Class V injection well and  
28 land application disposal option for each phase of the project will be bounded by the effects of  
29 the individual disposal methods and therefore will be SMALL as summarized in Table 4.4-1.

#### 30 31 **4.4.2 No-Action (Alternative 2)**

32  
33 Under the No-Action alternative, a license authorizing operation of an ISR facility will not be  
34 issued; therefore, construction and operation of the facility will not occur and aquifer restoration  
35 and decommissioning will not be needed. Buildings will not be constructed, wells will not be  
36 drilled, wellfields will not be developed, and pipelines connecting the wellfields to the central and  
37 satellite plants will not be constructed. The soils will not be disturbed, because earthmoving  
38 activities will not disturb or compact soils; therefore, existing topography will be unchanged.  
39 The geology of the area will be unaffected by the proposed action because no fluids would be  
40 injected into the subsurface through Class V injection well disposal or by the uranium  
41 extraction process.

42  
43 The current land uses on and near the project area, which include grazing land for livestock,  
44 natural resource extraction, and recreational activities will continue, but there will be no impacts  
45 from the proposed action.

46

1

**Table 4.4-1. Significance of Geology and Soils Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL	SMALL	SMALL

\*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.

2

3 **4.5 Water Resources Impacts**

4

5 **4.5.1 Surface Water and Wetlands Impacts**

6

7 As discussed in GEIS Section 4.4.4.1, potential environmental impacts to surface waters may  
8 occur during all phases of the ISR facility lifecycle (NRC, 2009a). Impacts to surface waters  
9 may result from (i) road construction and crossings; (ii) erosion runoff; (iii) spills or leaks of fuels,  
10 lubricants, and process-related fluids; (iv) storm water discharges; and (v) discharge of wellfield  
11 fluids as a result of pipeline or well head leaks. Potential impacts to surface waters may be  
12 greater in areas containing jurisdictional waters.

13

14 GEIS Construction Phase Summary

15

16 NRC staff noted in the GEIS that impacts to surface waters and wetlands during the  
17 construction phase of ISR facilities may result from construction of road crossings, filling  
18 channels, surface erosion, and surface water runoff. Temporary changes to spring and stream  
19 flows due to grading and changes in topography and natural drainage patterns are other  
20 potential impacts. U.S. Army Corps of Engineers (USACE) permits under Section 404 of the  
21 Clean Water Act are required for placing fill, excavating, or using earthmoving equipment to  
22 clear land in jurisdictional wetlands or waters of the United States (WUS). As a result of the  
23 USACE permitting process, impacts are expected to be mitigated through various mitigation  
24 options, such as banking and riparian/wetland enhancement. Potential impacts to surface  
25 waters also include accidental spills or leaks of fuels and lubricants from construction equipment  
26 and runoff from limited impervious areas including buildings, roads, and parking areas that  
27 infiltrates and recharges shallow aquifers. NRC staff determined in the GEIS that these  
28 potential impacts will be temporary and mitigated through proper planning and design, the use  
29 of proper construction methods, and the implementation of BMPs, or restoration after the  
30 construction phase. Thus, NRC staff concluded in the GEIS that compliance with applicable  
31 federal and state regulations and permit conditions and the implementation of BMPs and other  
32 mitigation measures will result in potential impacts to surface water and wetlands during  
33 construction that will be SMALL. (NRC, 2009a)

34

35 GEIS Operations Phase Summary

36

37 The expansion of facilities or pipelines during the operations phase may result in impacts  
38 comparable to those described for the construction phase. The impacts to surface water during  
39 operation activities may also involve accidental spills or leaks of process-related water and the

1 discharge of storm water runoff and process-related water. The impact from spills on surface  
2 waters will be comparable to those described for the construction phase and will be dependent  
3 on the size of the spill, the success of remediation, the use of the surface water, proximity of the  
4 spill to surface water, and the volume of surficial aquifer discharge to the surface waters. NRC  
5 staff noted in the GEIS that during operational activities, federal and state agencies regulate the  
6 discharge of storm water runoff and process-related water through the permitting process, and  
7 hence, the impacts from permitted discharges will be mitigated through permit conditions. For  
8 these reasons, NRC staff concluded in the GEIS that impacts to surface waters during  
9 operations will be SMALL to MODERATE. (NRC, 2009a)

#### 10 GEIS Aquifer Restoration Phase Summary

11  
12  
13 NRC staff noted in the GEIS impacts to surface waters during the aquifer restoration phase may  
14 result from (i) produced water, (ii) storm water runoff and accidental spills, and (iii) brine reject  
15 from the reverse osmosis system. NRC staff concluded in the GEIS the impacts from these  
16 activities will be similar to the impacts from operations, because the infrastructure will be in  
17 place and similar activities will be conducted (e.g., wellfield operation, transfer of fluids, water  
18 treatment, storm water runoff). For these reasons, NRC staff concluded in the GEIS that aquifer  
19 restoration impacts on surface waters and wetlands will be SMALL. (NRC, 2009a)

#### 20 GEIS Decommissioning Phase Summary

21  
22  
23 NRC staff concluded in the GEIS that surface water impacts from decommissioning will be  
24 similar to the impacts from construction. The activities to clean up, recontour, and reclaim  
25 disturbed lands during decommissioning will mitigate long-term impacts to surface waters. NRC  
26 staff concluded in the GEIS that the potential impacts to surface waters and wetlands from  
27 decommissioning will be SMALL (NRC, 2009a).

28  
29 Potential environmental impacts to surface water from construction, operations, aquifer  
30 restoration, and decommissioning for the proposed Dewey-Burdock ISR project are discussed  
31 in the following sections.

#### 32 33 **4.5.1.1 Proposed Action (Alternative 1)**

34  
35 As described in SEIS Section 3.5.1, the proposed Dewey-Burdock ISR Project lies within the  
36 Beaver Creek watershed, which includes Beaver Creek, Pass Creek, and their tributaries.  
37 Beaver Creek is a perennial stream, and its tributaries have intermittent flow depending on the  
38 amount of precipitation. Pass Creek and its tributaries are dry for most of the year, except for  
39 short periods of high runoff following major storms (Powertech, 2009a). Beaver and Pass  
40 Creeks are not used for domestic water supply within the proposed project area, but water from  
41 Beaver Creek is used for local irrigation.

42  
43 There are a number of abandoned open pit mines stretching from the eastern to the northern  
44 boundaries of the site in the Burdock area (see Figure 3.2-3). With the exception of Darrow Pit  
45 #2 and the Triangle Pit, the abandoned pits are usually dry. The Triangle Pit has permanent  
46 water storage at a depth greater than 30 m [100 ft]. The Triangle Pit is below the potentiometric  
47 surface of the Fall River Formation and is, therefore, hydraulically connected to the Fall River  
48 Formation. Water in the Triangle Pit has elevated dissolved uranium and gross alpha  
49 concentrations exceeding EPA-regulated MCLs and is not used as a livestock or domestic water  
50 supply (see SEIS Section 3.12.1).

1 USACE identified 20 wetlands within the proposed project area (see SEIS Section 3.5.2), of  
2 which only 4 were considered jurisdictional: Beaver Creek, Pass Creek, and an ephemeral  
3 tributary to each. The jurisdictional ephemeral tributary to Beaver Creek has wetlands present  
4 near its confluence with Beaver Creek located in Section 32, Township 6 South, Range 1 East  
5 (Figure 4.5-1). The drainage area for this tributary includes surface facilities, infrastructure, and  
6 wellfields constructed in the Dewey area. The jurisdictional ephemeral tributary to Pass Creek  
7 has wetlands present near its confluence with Pass Creek located in Section 3, Township 7  
8 South, Range 1 East (Figure 4.5-1). The drainage area for this tributary includes surface  
9 facilities, infrastructure, and proposed wellfields in the Burdock area.

10  
11 The environmental impacts on surface waters for each of the applicant-proposed liquid waste  
12 disposal options (i.e., disposal via Class V injection wells, disposal via land application, or  
13 disposal via combination of Class V injection wells and land application) are discussed in the  
14 following sections.


#### 15 16 4.5.1.1.1 Disposal Via Class V Injection Wells

17  
18 As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid  
19 wastes is deep well disposal via Class V injection wells. The Class V injection wells, if permitted  
20 by EPA, will be near the satellite plant in the Dewey area and near the central processing plant  
21 in the Burdock area (see Figure 2.1-10). Potential environmental impacts to surface waters  
22 from construction, operation, aquifer restoration, and decommissioning associated with the  
23 Class V injection well disposal option at the proposed project are discussed in the  
24 following sections.

#### 25 26 4.5.1.1.1.1 Construction Impacts

27  
28 The NRC staff evaluated the occurrence of surface water and found it to be limited in area and  
29 quantity; Pass Creek and the tributaries to both Pass Creek and Beaver Creek are intermittent  
30 and often dry. As described in SEIS Section 4.2.1.1, the deep well liquid waste disposal option  
31 is estimated to disturb 98.3 ha [243 ac] of land or 2.3 percent of the permit area (Powertech,  
32 2010a). Land disturbance will result from construction of facilities, pipelines, initial wellfields,  
33 radium settling and holding ponds, Class V injection wells, and access roads (see Figure 4.2-1).  
34 The applicant is required to obtain construction and industrial storm water National Pollutant  
35 Discharge Elimination System (NPDES) permits in accordance with SDDENR regulations in  
36 ARSD Chapter 74:52. The NPDES permit requirements for discharges to surface water, as  
37 established in ARSD 74:52, will control the amount of pollutants that can enter surface water  
38 bodies, such as streams and lakes. The applicant has not yet submitted an NPDES permit  
39 application (see Table 1.6-1).

40  
41 The Burdock central plant and Dewey satellite facility and supporting buildings will be  
42 constructed outside the 100-year floodplain of Pass and Beaver Creeks and away from other  
43 small ephemeral drainages (see SEIS Section 3.5.1). These buildings will be located on  
44 relatively flat terrain, which will require minimum soil movement to create level pads for  
45 facilities construction. Surface water runoff from precipitation (rain and snowmelt) will flow from  
46 the Burdock central plant area and the Dewey satellite facility area to natural drainages  
47 (Figure 4.5-1). Facility buildings are located away from these intermittent drainage channels  
48 and outside of floodplains so facilities will not flood. If an accidental spill occurs during the  
49 construction phase, the applicant will promptly mitigate it by following surface water monitoring

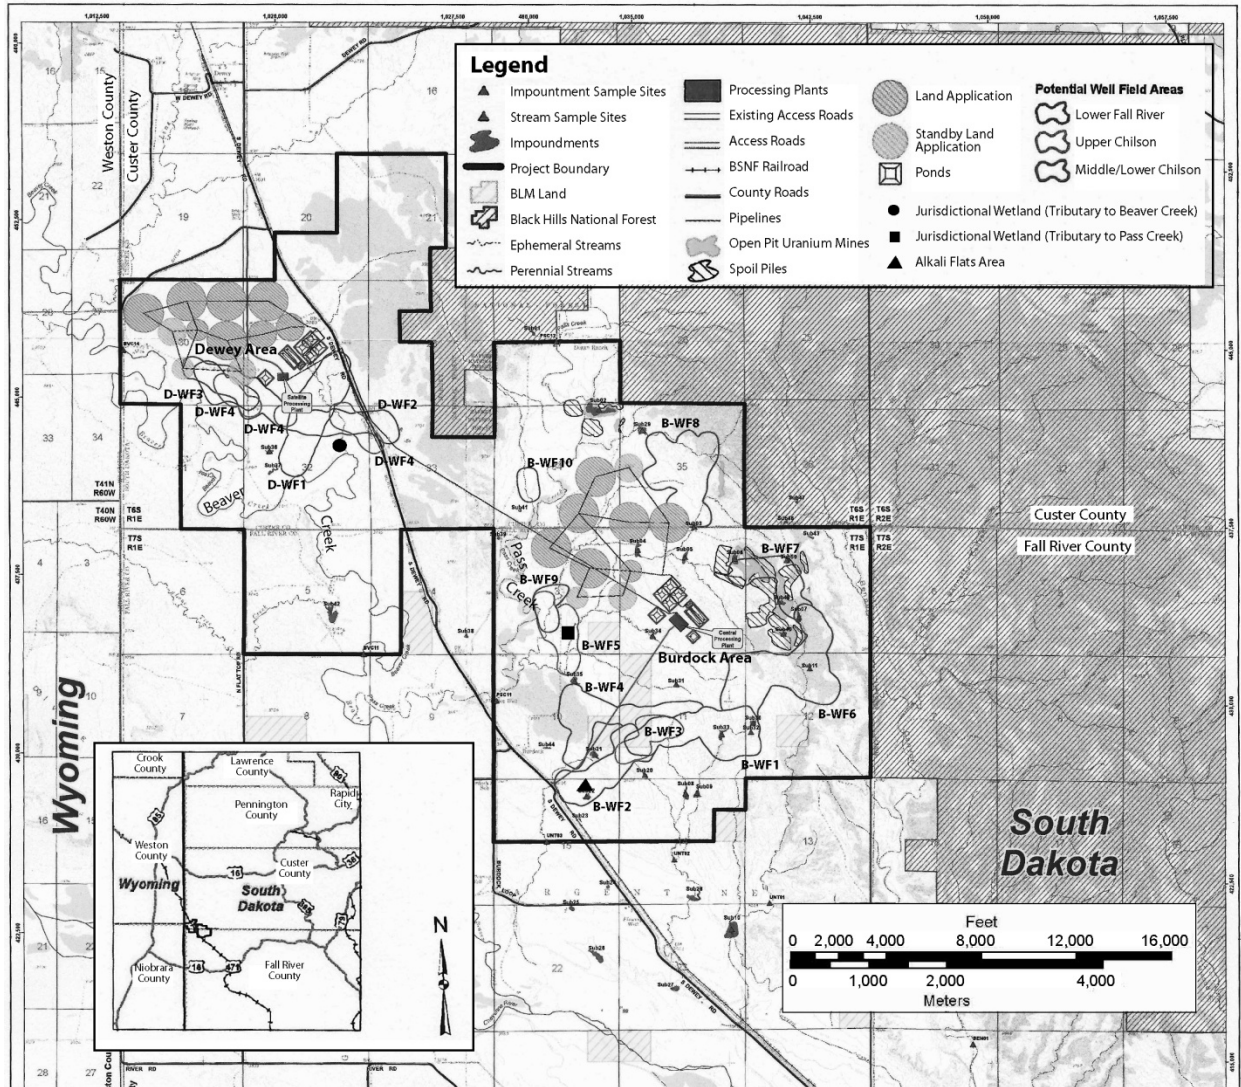

**Figure 4.5-1. Map Showing Locations Identified as Jurisdictional Wetlands on Ephemeral Tributaries to Beaver Creek (Black Circle) and Pass Creek (Black Square) and Their Relation to Proposed Site Facilities in the Proposed Dewey-Burdock ISR Project Area.**

**Source: Modified From Powertech (2011).**

- 1
- 2 and spill response procedures, which will be established as part of the NPDES permit
- 3 (Powertech, 2009a).
- 4
- 5 Although facility buildings at the proposed project site will be outside the 100-year floodplain of
- 6 Pass and Beaver Creeks and small ephemeral drainages, other facilities (e.g., storage ponds),
- 7 infrastructure (e.g., access roads and the plant-to-plant pipeline), and wellfields will be within the
- 8 100-year floodplain of Pass and Beaver Creeks and small ephemeral drainages (see SEIS
- 9 Section 3.5.1). To protect facilities and infrastructure that are located within the 100-year
- 10 inundation boundary from flood damage, the applicant proposes a system of structures, such as
- 11 straw bales, collector ditches, and engineered diversion structures or berms (Powertech, 2011).
- 12

1 Other applicant-proposed measures to protect against flooding include (i) locating above-grade  
2 wellfield infrastructure outside the 100-year flood inundation boundary, (ii) constructing diversion  
3 or erosion control structures to divert flow and protect any well heads placed within the 100-year  
4 inundation boundary, and (iii) sealing all well heads to withstand brief periods of submergence.  
5 All pipelines, including the proposed plant-to-plant pipeline, will be buried below the frost line  
6 and, therefore, will not be impacted by flooding (Powertech, 2011).  
7

8 The applicant will use a phased approach to wellfield development. The Burdock B-WF1  
9 wellfield and Dewey D-WF1 wellfield will be constructed during the initial construction phase of  
10 the project (Figure 4.5-1). Wellfield B-WF1 will be situated at least 1,006 m [3,300 ft] from  
11 Pass Creek and the ephemeral tributary to Pass Creek identified as a jurisdictional wetland.  
12 Wellfield D-WF1 is located at least 101 m [330 ft] north of Beaver Creek and 305 m [1,000 ft]  
13 northwest of the ephemeral tributary to Beaver Creek, which is a jurisdictional wetland (see  
14 Figure 4.5-1). However, wellfield D-WF1 crosses over ephemeral tributaries upstream of the  
15 tributary to Beaver Creek identified as a jurisdictional wetland.  
16

17 Additional wellfields will be built and developed in phases as operations in preceding wellfields  
18 become uneconomical. Figure 4.5-1 shows that Dewey wellfield D-WF2 and a portion of Dewey  
19 wellfield D-WF4 are located 101 m [330 ft] north of the ephemeral tributary to Beaver Creek  
20 identified as a jurisdictional wetland. However, like wellfield D-WF1, wellfields D-WF2 and  
21 D-WF4 cross over ephemeral tributaries upstream of the tributary to Beaver Creek identified as  
22 a jurisdictional wetland. Figure 4.5-1 also shows that Burdock wellfields B-WF9 and B-WF10  
23 cross nearby ephemeral tributaries upstream of Pass Creek. In addition, Figure 4.5-1 shows  
24 that the ephemeral tributary to Pass Creek identified as a jurisdictional wetland bisects  
25 wellfield B-WF5.  
26

27 USACE permits under Section 404 of the Clean Water Act are required for placing fill material,  
28 excavating, or using earthmoving equipment to clear land in wetlands or waters of the  
29 United States (WUS). The presence of wellfields within jurisdictional wetlands and crossing  
30 tributaries upstream of jurisdictional wetlands may require the applicant to obtain USACE  
31 permits before construction activities (e.g., drilling wells, laying pipeline, and constructing  
32 access roads). In addition, the applicant's plant-to-plant pipeline crosses Pass Creek between  
33 wellfields B-WF9 and B-WF10 in the Burdock area (see Figure 4.5-1) and may also require the  
34 applicant to obtain a USACE permit prior to construction. The USACE permitting process  
35 ensures that proper filling and dredging techniques are used and proper mitigation measures  
36 are defined and implemented to ensure protection of wetland habitat and water quality in  
37 affected jurisdictional wetlands. The applicant has committed to seek authorization from  
38 USACE and comply with Section 404 permitting requirements before conducting work in  
39 jurisdictional wetlands identified in the project area (Powertech, 2009a).  
40

41 Construction activities may generate a limited amount of surface water runoff. The applicant  
42 indicates surface waters will not be consumed and long-term discharge to surface waters will  
43 not occur during construction (Powertech, 2009a). The applicant will implement a storm water  
44 pollution management plan (SWMP) to control storm water runoff during construction and to  
45 ensure that surface water runoff from disturbed areas will not contaminate surface waters  
46 (Powertech, 2009a). SWMP control measures will (i) minimize disturbance of surface areas,  
47 drainage channels, and vegetation; (ii) employ grading to direct runoff away from water bodies;  
48 (iii) use riprap at intersections to make bridges and culverts more effective; (iv) stabilize slopes;  
49 (v) avoid unnecessary off-road travel; (vi) provide rapid response cleanup procedures and  
50 training for potential spills; (vii) require storage of hazardous materials and chemicals in bermed



1 or curbed areas; (viii) place surface piping outside identified 100-year floodplain levels; and  
2 (ix) build curbs around facilities and structures to control process fluid spills.

3  
4 Proposed sites for radium settling and holding ponds for the deep well liquid waste disposal  
5 option are shown in Figure 2.1-10. As described in SEIS Section 2.1.1.1.2.4, radium settling  
6 and holding ponds will be constructed with linings that meet the requirements of NRC  
7 regulations in 10 CFR Part 40, Appendix A, Criterion 5 (NRC, 2003b, 2008). Approved  
8 construction uses liners, underdrains, and a leak detection system to identify and reduce the  
9 impact on the environment from any leaks.

10  
11 Because the applicant has committed to (i) implementing mitigation measures to control  
12 erosion, runoff, and sedimentation; (ii) complying with USACE Section 404 permitting  
13 requirements for wetlands; (iii) complying with NPDES permit requirements for discharge to  
14 surface waters; and (iv) following NRC regulations concerning the construction of settling and  
15 holding ponds (e.g., use of liners, underdrains, and leak detection systems), NRC finds impacts  
16 to surface waters and wetlands during the construction phase to be SMALL.

#### 17 18 4.5.1.1.1.2 Operations Impacts

19  
20 The NRC staff has considered site-specific hydrological factors in assessing environmental  
21 impacts to surface water during ISR operations in conjunction with the deep well disposal of  
22 liquid wastes option. The staff evaluated the occurrence of surface water and found it to be  
23 limited in area and quantity. Beaver Creek is a perennial stream and does not bisect any  
24 wellfields in the Dewey area. Pass Creek and tributaries of Pass and Beaver Creeks have  
25 intermittent surface water flows.

26  
27 As described in SEIS Section 3.5.3.3, the Fall River and Chilson aquifers make up the  
28 Inyan Kara Group aquifer and contain the uranium mineralization that will be extracted at the  
29 proposed project (Powertech, 2009a). Beaver and Pass Creeks do not have a natural hydraulic  
30 connection with the underlying Fall River and Chilson aquifers across the Dewey-Burdock site.  
31 However, standing water in the Triangle Pit in the Burdock area is hydraulically connected to the  
32 Fall River Formation. In addition, pumping tests in the Burdock area indicated a certain degree  
33 of hydraulic communication between the Fall River aquifer and Chilson aquifer through the  
34 intervening Fuson Shale (see SEIS Section 3.5.3.2). Because the Triangle Pit is not a source of  
35 water for domestic use or livestock watering due to its poor water quality [specifically, elevated  
36 uranium and gross alpha concentrations exceeding EPA-regulated MCLs for drinking water (see  
37 SEIS Section 3.12.1)], the potential environmental impacts to the standing water at the  
38 abandoned Triangle Pit mine during ISR operations in conjunction with the Class V injection well  
39 disposal option will be SMALL.

40  
41 As described in SEIS Section 3.5.1, groundwater from the Fall River and Chilson aquifers is  
42 discharging to the ground surface through improperly plugged exploratory boreholes at an area  
43 in the southwest corner of the Burdock area known as the "alkali flats" (Powertech, 2011). This  
44 area is within the proposed B-WF2 wellfield (see Figure 4.5-1). Although the alkali flats area is  
45 located outside the drainage areas of Beaver and Pass Creeks, it is near surface impoundments  
46 used for stock watering that could be impacted by the discharging groundwater. As described in  
47 SEIS Sections 2.1.1.1.2.3.3 and 2.1.1.1.2.3.4, prior to wellfield development, the applicant  
48 proposes to identify and evaluate unplugged and improperly sealed boreholes using delineation  
49 drilling and wellfield pump testing. Based on the results of the delineation drilling and pump

1 testing, the applicant will plug any boreholes that will potentially affect surface waters during ISR  
2 operations (Powertech, 2011).

3  
4 The Class V injection well injection option involves injecting process-related effluents into the  
5 Deadwood and Minnelusa Formations, which lie below the Morrison Formation (Powertech,  
6 2011, Appendix 2.7L). The depth from the ground surface to the disposal horizon for the first  
7 4 Class V injection wells ranges from 492 to 1,076 m [1,615 to 3,530 ft] (Powertech, 2011;  
8 Appendix 2.7L). As described in SEIS Section 2.1.1.1.2.4, an EPA Class V UIC permit is  
9 required for the applicant to use deep well disposal. EPA will evaluate the suitability of the  
10 formations proposed for Class V well injection. Class V injection disposal will be allowed only  
11 when the applicant demonstrates liquid waste can be isolated safely in a deep aquifer. In the  
12 Dewey-Burdock area, there is no evidence of any hydraulic connection between surface waters  
13 and proposed aquifers for the Class V injection well disposal option. Therefore, the potential  
14 environmental impacts to surface waters from the Class V injection well disposal option during  
15 ISR operations will be SMALL.

16  
17 In addition to site-specific hydrological information and a Class V deep well injection permit, the  
18 NRC staff have considered other permit requirements and mitigation measures to which the  
19 applicant has committed in assessing environmental impacts to surface water during ISR  
20 operations in conjunction with the Class V injection well disposal option. The applicant will  
21 construct the central plant and satellite facility on concrete slabs surrounded by protective  
22 berms or curbs to contain and control accidental spills. Permitted discharge of processing  
23 effluents to surface waters will not be undertaken. Earthmoving activities sufficient to generate  
24 surface water runoff will not take place. The applicant will use its delineation drilling and pump  
25 testing program to identify and plug improperly sealed boreholes that may impact surface  
26 waters. The applicant will implement SWMP as part of the NPDES permit in accordance with  
27 SDDENR requirements to detain and treat runoff for these facilities and to ensure that runoff  
28 does not contaminate surface waters (Powertech, 2009a). The SWMP will identify and evaluate  
29 routes by which spills could leave the facility and lay out BMPs as preventative measures to  
30 minimize storm water contamination. Runoff will be diverted away from the facility and  
31 absorbed into soils. The applicant has committed to implement mitigation measures to control  
32 erosion and sedimentation, as part of the SWMP. The applicant will implement an emergency  
33 response plan to identify and clean up accidental spills and leaks (Powertech, 2009a).  
34 Pipelines will be buried to avoid freezing, and pipeline pressure will be monitored to  
35 detect leaks.

36  
37 In conclusion, based on the aforementioned hydrological factors and the applicant's  
38 commitment to comply with permit requirements, the NRC staff conclude that environmental  
39 impacts to surface waters and wetlands from ISR operations in conjunction with the Class V  
40 injection well disposal option will be SMALL.

#### 41 42 4.5.1.1.1.3 Aquifer Restoration Impacts

43  
44 As described in SEIS Section 2.1.1.1.4.1.1, the primary method of aquifer restoration for the  
45 Class V deep injection well option is reverse osmosis (RO) treatment with permeate injection.  
46 The RO reject, or brine, will undergo radium removal in the radium settling ponds and then will  
47 be disposed of in deep Class V injection wells. Under the EPA Class V UIC permit, deep well  
48 disposal of treated liquid wastes must not lead to concentration levels of hazardous constituents  
49 that cause adverse environmental impacts on surface waters and wetlands. For the Class V  
50 injection well disposal option, automated sensors will monitor the injection process to detect  
51 potential pipeline leaks or well ruptures that could result in a surface discharge. When

1 monitoring detects potential problems, the applicant will take corrective actions, which include  
2 inspections for leaks and spills and rapid response cleanup and remediation to minimize  
3 impacts to soils and surface water (Powertech, 2009a). Liquid effluents will not be discharged  
4 to running or standing surface waters (Powertech, 2009a). The applicant's NPDES permit  
5 requirements for discharges to surface water and SWMP will be in place to ensure that runoff  
6 will not degrade surface water quality. The applicant's emergency response plan will be in  
7 place to address and clean up accidental spills and leaks (Powertech, 2009a). The applicant  
8 will follow NRC and state regulations concerning the construction of settling and holding ponds  
9 (e.g., use of liners, underdrains, and leak detection systems) used to treat and store restoration  
10 fluid prior to injection in the Class V well. The applicant is required to follow groundwater  
11 restoration activities in compliance with NRC's regulatory requirements (see SEIS  
12 Section 2.1.1.1.4). The goal of aquifer restoration is to return groundwater quality in the  
13 wellfields to preoperational water quality conditions or to standards consistent with NRC  
14 requirements at 10 CFR Part 40, Appendix A, Criterion 5B(5). Because the applicant commits  
15 to complying with permitting and regulatory requirements, NRC finds impacts to surface waters  
16 and wetlands during the aquifer restoration phase in conjunction with the Class V injection well  
17 disposal option at the proposed project site will be SMALL.

18

#### 19 4.5.1.1.1.4 Decommissioning Impacts

20

21 The central plant, satellite facility, storage facilities, and pipelines of the facility will be removed  
22 during the decommissioning phase, in accordance with an NRC-approved decommissioning  
23 plan. The wells, including Class V injection wells, will need to be plugged and abandoned. The  
24 removal of buildings and infrastructure will have impacts similar to those for the construction  
25 phase as described in SEIS Section 4.5.1.1.1.1. The applicant will implement the mitigation  
26 measures described in SEIS Section 4.5.1.1.1.1 to control erosion, runoff, and sedimentation  
27 during decommissioning activities. The applicant's NPDES permit requirements will ensure that  
28 runoff will not contaminate surface water. The applicant is committed to implement an  
29 emergency response plan to address cleanup of accidental spills and leaks. After removal of  
30 surface structures, the applicant will replace topsoil in previously disturbed areas. The applicant  
31 will recontour the land surface to restore it to a surface configuration to blend with the natural  
32 terrain and will seed disturbed areas in wellfields in accordance with the NRC and  
33 SDDENR regulations (Powertech, 2009b). Access roads will be reclaimed and restored in  
34 a similar manner.

35

36 Well plugging and abandonment and pipeline removal requires temporary soil disturbance that  
37 may affect water quality of identified jurisdictional wetlands in the proposed project area. The  
38 applicant has committed to seek authorization from USACE and comply with Section 404  
39 permitting requirements before conducting work in jurisdictional wetlands to ensure that wetland  
40 habitat and water quality is not impacted (Powertech, 2009a). Because the applicant commits  
41 to complying with permitting and regulatory requirements, NRC concludes that impacts to  
42 surface waters and wetlands during the decommissioning phase for the Class V injection well  
43 disposal option will be SMALL.

44

#### 45 4.5.1.1.2 Disposal Via Land Application

46

47 If a permit for Class V injection wells cannot be obtained from EPA, the applicant will dispose of  
48 liquid waste by land application (see SEIS Section 2.1.1.2.4.2). The environmental impacts to  
49 surface waters and wetlands from the construction, operation, aquifer restoration, and

1 decommissioning associated with the land application liquid waste disposal are discussed in the  
2 following sections.

#### 3 4 4.5.1.1.2.1 Construction Impacts

5  
6 For the land application option, a total of 565.7 ha [1,398 ac] of land or 13.2 percent of the  
7 proposed permit area will be disturbed by activities associated with construction of facilities,  
8 pipelines, wellfields, storage ponds, irrigation areas, and access roads (Powertech, 2010a).  
9 This area of land disturbance is larger than for the Class V injection well disposal option  
10 {approximately 98 ha [243 ac]} due to the addition of land irrigation areas {426 ha [1,052 ac]}  
11 and the need for increased pond capacity for storage during nonirrigation periods {35 ha  
12 [136 ac]} (see Table 4.2-1).

13  
14 All the surface disturbance and associated impacts to surface waters and wetlands discussed in  
15 SEIS Section 4.5.1.1.1.1, except for the ground surface disturbance and the impacts to surface  
16 waters from construction of Class V deep injection wells, would be applicable during the  
17 construction phase for the land application disposal option.

18  
19 Irrigation areas are situated on flat topography along Pass Creek and its tributaries in the  
20 Burdock area and along Beaver Creek and its tributaries in the northwest part of the Dewey  
21 area (see Figure 4.5-1). The applicant will apply treated liquid effluents to existing soil after it  
22 has been prepared to grow crops, such as alfalfa and corns, to reduce the possibility of  
23 undesirable plant species. Significant earthmoving activities will not be conducted to prepare  
24 irrigation areas. Runoff from precipitation events or snowmelt on land application areas will be  
25 conveyed to catchment areas downgradient of land application areas and allowed to evaporate  
26 or infiltrate (Powertech, 2012c). The soil horizon found throughout most of the project area is  
27 clayey (see SEIS Section 3.4.2), which will minimize infiltration and enhance evaporation.

28  
29 Implementation of mitigation measures associated with the applicant's SWMP will control  
30 erosion, runoff, and sedimentation from disturbed areas, as part of the NPDES permit. The  
31 applicant's NPDES permit requirements for discharges to surface water will ensure that surface  
32 runoff, if any, will not contaminate surface water and wetlands. Additionally, the applicant will  
33 implement an emergency spill response plan to address cleanup of accidental spills and leaks.  
34 The applicant has committed to seek authorization from USACE and comply with Section 404  
35 permitting requirements before conducting work in jurisdictional wetlands identified in the project  
36 area (Powertech, 2009a). The USACE permit ensures that proper filling and dredging  
37 techniques are used and proper mitigation measures are defined and implemented and to  
38 protect wetland habitat and water quality in affected jurisdictional wetlands.

39  
40 Because minimal land disturbance will occur during preparation of irrigation fields, and the  
41 applicant has committed to implement mitigation measures discussed previously and to  
42 comply with permitting and regulatory requirements, the NRC staff conclude that impacts to  
43 surface waters and wetlands during the construction phase for the land application option will  
44 be SMALL.

#### 45 46 4.5.1.1.2.2 Operational Impacts

47  
48 Runoff from land irrigation areas and their potential discharge into surface waters would be the  
49 primary differences in surface water impacts between the land application and Class V injection  
50 well disposal options. All hydrological factors (hydrological interactions between ore-bearing  
51 aquifers, creeks, and abandoned open pit mines) and the resultant assessment of SMALL

1 impacts to surface waters due to ISR operations in conjunction with the Class V injection well  
2 disposal option (see SEIS Section 4.5.1.1.2) also apply to ISR operations in conjunction with  
3 the land application option.

4  
5 Because irrigation fields are located on flat topography (Figure 2.1-11), runoff of treated liquid  
6 wastes applied to land irrigation areas is not expected. As described in SEIS Section 3.5.1,  
7 proposed land application areas are located outside the applicant-modeled 100-year flood  
8 inundation boundaries of Beaver Creek and Pass Creek. Potential runoff produced by  
9 snowmelt or precipitation in land application areas will be diverted to adjacent catchment areas  
10 and allowed to evaporate or infiltrate (Powertech, 2012c). The applicant will grow crops on  
11 irrigation fields, which may require adjustments in water application rates to optimize both  
12 evaporation and crop production during the irrigation season (Powertech, 2009a, Section 4.5.2).  
13 However, the applicant's NPDES permit requirements will ensure that surface runoff at the ISR  
14 facilities and irrigation fields will not contaminate surface water bodies. Implementation of  
15 mitigation measures will control erosion, runoff, and sedimentation over the land application  
16 areas. In addition, the applicant will implement an emergency spill response plan to address  
17 cleanup of accidental spills and leaks.

18  
19 As described in SEIS Section 4.4.1.2.2, licensees must ensure that radioactive constituents in  
20 liquid effluents applied to land application areas are within allowable release limits (NRC,  
21 2009a). The applicant proposes to treat liquid wastes applied to land application areas so they  
22 meet NRC release limit criteria for radiological contaminants, as referenced in 10 CFR Part 20,  
23 Appendix B, Table 2, Column 2 (see Table 7.5-3) (Powertech, 2011). SDDENR also regulates  
24 land application of treated wastewater, which requires the applicant to obtain a GDP and to  
25 comply with applicable state discharge requirements for land application of treated wastewater.  
26 The GDP includes regulations requiring no surface runoff from permitted land application areas  
27 to ensure that any pollutants originating from the land application areas are contained.  
28 Therefore, the NRC staff conclude that treated liquid wastes applied to land application areas  
29 will contain contaminate levels below NRC and SDDENR requirements.

30  
31 Based on the aforementioned hydrological factors and permit requirements, the NRC staff  
32 conclude that environmental impacts to surface waters and wetlands from ISR operations in  
33 conjunction with the land application option will be SMALL.

#### 34 35 4.5.1.1.2.3 Aquifer Restoration Impacts

36  
37 The aquifer restoration phase of the Dewey-Burdock ISR Project will generate liquid wastes that  
38 will be disposed of via land application. As described in the previous section, the applicant  
39 proposes to treat liquid wastes applied to land application areas so they meet NRC release limit  
40 criteria for radiological contaminants, as referenced in 10 CFR Part 20, Appendix B (Powertech,  
41 2011). SDDENR also regulates land application of treated wastewater, which requires the  
42 applicant to obtain a GDP and to comply with applicable state discharge requirements for land  
43 application of treated wastewater. Liquid effluents will not be discharged into running or  
44 standing surface waters (Powertech, 2009a). The applicant's NPDES permit and SWMP will be  
45 in place to ensure that runoff will not contaminate surface waters and wetlands. The applicant's  
46 emergency response plan will be in place to address and clean up accidental spills and leaks  
47 (Powertech, 2009a). The applicant will follow NRC and state regulations concerning the  
48 construction of settling and holding ponds (e.g., use of liners, underdrains, and leak  
49 detection systems).

1 Because treated water applied onto irrigation fields will comply with NRC and state release  
2 limits for radioactive and hazardous constituents and because the applicant commits to  
3 complying with NPDES permitting and regulatory requirements, the NRC staff find impacts to  
4 surface waters and wetlands during the aquifer restoration phase in conjunction with the land  
5 application option to be SMALL.  
6

#### 7 4.5.1.1.2.4 Decommissioning Impacts 8

9 All the ground surface disturbance and the resultant impacts to surface waters discussed in  
10 SEIS Section 4.5.1.1.1.4 for the Class V injection well disposal option will be applicable for the  
11 land application option, except that the latter will not involve plugging and abandonment of  
12 Class V injection wells in the decommissioning phase. Under the land application option,  
13 production, injection, and monitoring wells will be plugged and abandoned, and the central  
14 plant, satellite facility, storage facilities, and associated pipelines will be removed in accordance  
15 with an NRC-approved decommissioning plan. The applicant has committed to seek  
16 authorization from USACE and comply with Section 404 permitting requirements before  
17 conducting work in jurisdictional wetlands to ensure that wetland habitat and water quality are  
18 not impacted (Powertech, 2009a). As part of the NPDES permit, the applicant will implement  
19 mitigation measures to control erosion, runoff, and sedimentation to ensure that surface water  
20 and wetlands are not contaminated. Additionally, the applicant is committed to implementing an  
21 emergency response plan to address cleanup of accidental spills and leaks.  
22

23 After removal of surface structures, the applicant will replace topsoil in previously disturbed  
24 areas. Disturbed land surfaces, including irrigation fields used for land application of treated  
25 process fluid, will be recontoured to restore the surface configuration to blend with the natural  
26 terrain and seed disturbed areas in wellfields in accordance with the NRC and SDDENR  
27 regulations (Powertech, 2009b). Access roads will be reclaimed and restored in a similar  
28 manner. Because the applicant commits to complying with permitting and regulatory  
29 requirements, NRC concludes that impacts to surface waters and wetlands during the  
30 decommissioning phase for the land application disposal option will be SMALL.  
31

#### 32 4.5.1.1.3 Disposal Via Combination of Class V Injection and Land Application 33

34 If the applicant obtains the permit for Class V injection from EPA, but the capacity of the deep  
35 disposal wells is insufficient to dispose of all liquid effluents generated at the Dewey-Burdock  
36 ISR project, the applicant will dispose of liquid waste by a combination of Class V injection wells  
37 and land application (SEIS Section 2.1.1.1.2.4.3). In this case, land application facilities and  
38 infrastructures will be constructed, operated, and restored, and decommissioned as needed,  
39 based on the required capacity of Class V injection wells and produced volume of liquid  
40 effluents (Powertech, 2011).  
41

42 If the capacity of Class V injection wells is sufficient to dispose of all liquid effluents, land  
43 application sites, facilities, and infrastructures for irrigation will be avoided. In this case,  
44 potential environmental impacts to surface waters due to erosion and surface runoff over land  
45 application sites will be eliminated. Therefore, the resultant environmental impacts to surface  
46 water for the Class V injection well disposal option will be smaller than for the land application  
47 disposal option. Furthermore, only a portion of land application facilities and infrastructure  
48 (e.g., irrigation areas and storage ponds) would be constructed, operated, and decommissioned  
49 for the combined Class V injection well and land application option. Therefore, potential  
50 environmental impacts to surface waters for the combined disposal option would be less than  
51 for the land application option alone.

1 Thus, NRC staff conclude that the environmental impacts of the combined Class V injection well  
2 and land application option for each phase of the proposed project will be bounded by the  
3 significance of environmental impacts of the Class V injection well option and the land  
4 application option as summarized in Table 4.5-1.  
5

#### 6 **4.5.1.2 No-Action (Alternative 2)**

7  
8 Under the No-Action alternative, NRC will not license the Dewey-Burdock ISR Project and BLM  
9 will not approve the applicant's modified Plan of Operation. The central processing plant in the  
10 Burdock area and the satellite facility in the Dewey area with their associated infrastructure  
11 (i.e., access roads and piping) will not be constructed. Furthermore, wellfields, surface  
12 impoundments, Class V injection wells, and land application sites will not be developed. The  
13 current land uses on and near the project area, including grazing lands and recreational  
14 activities, will continue. Therefore, there will not be any environmental impact to surface waters  
15 and wetlands from construction, operations, aquifer restoration, and decommissioning activities.  
16

#### 17 **4.5.2 Groundwater Impacts**

18  
19 As discussed in GEIS Section 4.4.4.1, potential environmental impacts to groundwater could  
20 occur during all phases of an ISR facility's lifecycle, although impacts are more likely to occur  
21 during operations and aquifer restoration (NRC, 2009a). At ISR sites, ore-bearing aquifers are  
22 typically separated from adjacent aquifers at varying depths by confining layers, also known as  
23 aquitards. If the confining layers cannot effectively isolate the ore-bearing aquifer from the  
24 hydrogeological system, the aquifers above and below the uranium-bearing aquifer can be  
25 adversely affected during ISR operations.  
26

27 NRC staff reported in the GEIS that ISR facility impacts on groundwater resources can result  
28 from surface spills, leaks from buried piping, consumptive water use, horizontal and vertical  
29 excursions of lixiviant from production aquifers, degradation of water quality from changes in  
30 production zone aquifer chemistry, and waste management practices involving land application  
31 and/or deep well injection. (NRC, 2009a)  
32

**Table 4.5-1. Significance of Environmental Surface Water and Wetland Impacts for the  
Proposed Liquid Waste Disposal Options for Each Phase of the Proposed  
Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL	SMALL	SMALL
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.			

33

34

GEIS Construction Phase Summary

NRC staff reported in the GEIS that potential impacts to groundwater during construction of an ISR facility are from the consumptive use of groundwater, injection of drilling fluids and mud during well drilling, and spills of fuels and lubricants from construction equipment. Surface activities that can introduce contaminants into soils are more likely to affect near-surface and shallow aquifers during construction. NRC staff concluded in the GEIS that during construction, groundwater use is limited and groundwater quality is protected by implementing BMPs, which include spill prevention and cleanup programs. In addition, the volume of drilling fluids and mud to be introduced into the environment during well installation is limited compared to the existing aquifer volume. Therefore, NRC staff concluded in the GEIS that construction impacts to groundwater resources are SMALL. (NRC, 2009a)

GEIS Operations Phase Summary

GEIS Section 4.4.4.2.2 discussed potential environmental impacts to shallow (near-surface) aquifers during ISR operations. During this phase, shallow aquifers could potentially be affected by lixiviant leaks from pipelines, wells, or header houses and from waste management practices such as the use of settling and holding ponds and disposal of treated wastewater by land application. Potential environmental impacts to groundwater resources in the production and surrounding aquifers also include consumptive water use and changes to water quality that could result from normal operations in the production aquifer and from possible horizontal and vertical lixiviant excursions beyond the production zone. Disposal of processing wastes by deep well injection during ISR operations could also impact groundwater in deep aquifers. (NRC, 2009a)

*Shallow (Near-Surface) Aquifers*

In the GEIS, NRC staff discussed the potential environmental impacts to shallow, near-surface aquifers during ISR operations. A network of buried pipelines transports lixiviant between the header house and the satellite or main processing facility. Piping connects injection and extraction wells to manifolds inside the pumping header houses. Failure of pipeline fittings or valves, or failure of well mechanical integrity in shallow aquifers, could result in leaks and spills of pregnant and barren lixiviant, with adverse impacts on water quality in shallow aquifers. The potential environmental impacts of pipeline, valve, or well integrity failure depend on the depth to shallow groundwater; the current and anticipated future uses of shallow groundwater for domestic, agricultural, and livestock water demands; and the degree of hydraulic connection between shallow aquifers, production aquifers, and regionally important aquifers. Shallow aquifers may also be affected by disposal of treated process effluents by land application and hazardous wastewater leaks and spills from settling and holding ponds. NRC staff concluded in the GEIS that environmental impacts will range from MODERATE to LARGE if (i) groundwater in shallow aquifers is close to the ground surface, (ii) shallow aquifers are important sources for local domestic or agricultural water supplies, and (iii) shallow aquifers are hydraulically connected to other locally or regionally important aquifers. NRC staff concluded that environmental impacts will be SMALL if (i) shallow aquifers have poor water quality or noneconomic production yields and (ii) shallow aquifers are hydraulically separated from other locally and regionally important aquifers. Land application of treated process effluents during ISR operations is an accepted waste management practice at ISR facilities. Process-related effluents applied to land application areas undergo treatment to reduce radiological and hazardous constituents to levels that are protective of human health and the environment. BMPs will also be in place to prevent surface runoff and erosion. Therefore, NRC staff



1 concluded in the GEIS that the impacts of land disposal application of effluents on groundwater  
2 in shallow aquifers during ISR operations will be SMALL. (NRC, 2009a)

### 3 4 *Production and Surrounding Aquifers*

5  
6 During ISR operations, potential environmental impacts to groundwater resources in the  
7 production and surrounding aquifers include consumptive water use. NRC staff reported in the  
8 GEIS that short term impacts of consumptive water use will be localized in the South Dakota  
9 region and will be SMALL to MODERATE, depending on aquifer characteristics. The localized  
10 effects are expected to be temporary because drawdown near wellfields will dissipate after  
11 pumping stops. After consideration of these factors, the NRC staff concluded long term impacts  
12 of consumptive water use will be SMALL in most cases. (NRC, 2009a)

13  
14 NRC staff reported in the GEIS that degradation of groundwater quality in the production aquifer  
15 will occur during ISR operations. Groundwater quality in the overlying and underlying aquifers  
16 and adjacent aquifers could be degraded if horizontal and vertical leachate excursions occur  
17 beyond the production zone. The production portion of an ore-bearing aquifer would be  
18 exempted from being an underground source of drinking water (USDW) according to the criteria  
19 in 40 CFR 146.4 as long as (i) the production portion of the aquifer does not currently serve as a  
20 source of drinking water and, (ii) the permit applicant can demonstrate as part of a UIC permit  
21 application that the production portion contains minerals that, considering their quantity and  
22 location, are expected to be commercially producible. After uranium recovery is complete, the  
23 licensee must initiate aquifer restoration activities to restore the production zone to Commission-  
24 approved background water quality, if possible. If the water quality in the production aquifer  
25 cannot be restored to background conditions, NRC requires the production aquifer be restored  
26 to the MCLs provided in 10 CFR Part 40, Appendix A, Table 5C or to NRC-approved alternate  
27 concentrations limits (ACLs). Only after demonstrating that it cannot restore a particular  
28 hazardous constituent to the background concentration or MCL could a licensee request a  
29 license amendment from NRC for an ACL. To be approved, ACLs must demonstrate that the  
30 level will not pose a substantial present or potential hazard to human health or the environment  
31 as long as the ACLs are not exceeded (NRC, 2003b). After consideration of these factors, NRC  
32 staff concluded in the GEIS that potential impacts of ISR operations on water quality of a  
33 uranium-bearing production zone aquifer will be SMALL. (NRC, 2009a)

### 34 35 *Deep Aquifers Below the Production Aquifers*

36  
37 In the GEIS, NRC staff found that disposal of processing effluents by deep well injection during  
38 ISR operations and restorations could impact groundwater quality in deep aquifers (NRC,  
39 2009a). However, NRC staff concluded that impacts from deep disposal of process effluents in  
40 the Nebraska-South Dakota-Wyoming Uranium Milling Region are expected to be SMALL if  
41 (i) water production from deep aquifers is not economically feasible (e.g., low water yield); (ii)  
42 the groundwater quality in the deep aquifers is not suitable for domestic or agricultural uses; and  
43 (iii) the aquifers are confined above by sufficiently thick and continuous low permeability layers  
44 (NRC, 2009a).

### 45 46 GEIS Aquifer Restoration Phase Summary

47  
48 NRC staff reported in the GEIS that the potential environmental impacts on groundwater  
49 resources during aquifer restoration are related to groundwater consumptive use and waste  
50 management practices, including discharge to waste storage ponds and potential deep disposal

1 of brine resulting from reverse osmosis. In addition, aquifer restoration directly affects  
2 groundwater quality in the vicinity of the wellfield being restored. (NRC, 2009a)

3  
4 The purpose of aquifer restoration is to return the groundwater quality in the production zone to  
5 groundwater protection standards in 10 CFR Part 40, Appendix A, Criterion 5B(5). These  
6 standards state that the concentration of a hazardous constituent must not exceed (i) the  
7 Commission-approved background concentration of that constituent in groundwater, (ii) the  
8 respective value in the table in paragraph 5C if the constituent is listed in the table and if the  
9 background level of the constituent is below the value listed, or (iii) an alternate concentration  
10 limit the Commission establishes. Potential environmental impacts are affected by the  
11 restoration techniques chosen, the severity and extent of the contamination, and the current and  
12 future use of the production and surrounding aquifers in the vicinity of an ISR facility.  
13 Consequently, NRC staff concluded in the GEIS that the potential environmental impacts of  
14 groundwater consumption during restoration could range from SMALL to MODERATE  
15 depending on site conditions. (NRC, 2009a)

#### 16 17 GEIS Decommissioning Phase Summary

18  
19 In the GEIS, NRC staff noted that environmental impacts to groundwater during dismantling and  
20 decommissioning of ISR facilities will result primarily from consumptive use of groundwater,  
21 potential spills of fuels and lubricants, and well abandonment. Consumptive groundwater use  
22 includes using water for dust suppression, revegetation of landscapes, and reclamation of  
23 disturbed areas. The environmental impacts expected during the decommissioning phase are  
24 the same impacts identified in the staff's analysis of the construction phase. In the GEIS, NRC  
25 staff concluded that consumptive use of groundwater during decommissioning will be less than  
26 during operations or aquifer restoration phases. Following BMPs as part of state-enforced  
27 NPDES permits and NRC-approved decommissioning plans will reduce the occurrence and  
28 effects of spills and facilitate cleanup (NRC, 2003a). Therefore, NRC staff concluded in the  
29 GEIS that the impact to groundwater resources in shallow aquifers from decommissioning will  
30 be SMALL (NRC, 2009a).

31  
32 Discussion of the potential environmental impacts to groundwater from the construction,  
33 operations, aquifer restoration, and decommissioning of the proposed Dewey-Burdock ISR  
34 Project follows.

#### 35 36 **4.5.2.1 Proposed Action (Alternative 1)**

37  
38 As described in SEIS Section 3.5.3.3, ISR methods will be used to recover uranium from  
39 sandstone-hosted uranium orebodies in the Fall River and Chilson aquifers that make up the  
40 Inyan Kara Group aquifer. Orebodies in unconfined portions of the Fall River Formation in the  
41 Burdock area are not part of the recovery plan (Powertech, 2010a). However, the recovery plan  
42 does include partially saturated portions of the Chilson aquifer in the eastern portion of the  
43 Burdock area (see Figure 3.5-7). NRC staff determined that a license condition will be  
44 necessary for ISR operations in partially saturated portions of the Chilson aquifer, which will  
45 require the applicant to demonstrate the ability to detect and remediate excursions in partially  
46 saturated zones (NRC, 2012).

47  
48 In the construction phase of the proposed Dewey-Burdock ISR project, groundwater in surficial  
49 (alluvium) and shallow aquifers could be impacted. In the operations and restoration phases of  
50 the proposed project, groundwater in the Fall River and Chilson aquifers could be impacted. If  
51 Class V injection well disposal of liquid wastes into the Deadwood and Minnelusa Formations

1 that lie below the Morrison Formation is approved, groundwater in these aquifers could be  
2 impacted during the operations and restoration phases. If the land application liquid waste  
3 disposal option is used in the operations and restoration phases, the groundwater impacts  
4 would likely be localized and limited to near-surface aquifers. Near-surface aquifers include  
5 unconfined portions of the Fall River aquifer in the northeastern part of the Burdock area where  
6 land application of treated wastewater may take place.

7  
8 Environmental impacts to groundwater for each of the applicant-proposed liquid waste  
9 disposal options (i.e., disposal via Class V injection wells, disposal via land application, or  
10 disposal via combination of Class V injection wells and land application) are discussed in the  
11 following sections.

#### 12 13 4.5.2.1.1 Disposal Via Class V Injection Wells

14  
15 The applicant's preferred option for disposal of liquid wastes is deep well disposal via Class V  
16 injection wells (see SEIS Section 2.1.1.1.2.4). The applicant plans to inject process-related  
17 effluents into the Deadwood and Minnelusa Formations that lie below the Morrison Formation  
18 (Powertech, 2011, Appendix 2.7-L). Powertech estimates the injection zone depths for the  
19 Minnelusa Formation to be approximately 492 to 672 m [1,615 to 2,205 ft] below ground surface  
20 and for the Deadwood Formation to be approximately 943 to 974 m [3,095 to 3,195 ft] below  
21 ground surface in the Burdock area. In the Dewey area, the estimated Minnelusa Formation  
22 injection zone depth is approximately 594 to 774 m [1,950 to 2,540 ft] below ground surface and  
23 the estimated Deadwood Formation depth is approximately 1,045 to 1,076 m [3,430 to 3,530 ft]  
24 below ground surface. The use of deep well disposal requires an EPA Class V underground  
25 injection control (UIC) permit (SEIS Section 2.1.1.1.6.2). EPA evaluates the suitability of  
26 formations for deep well injection and allows Class V injection only after an applicant  
27 demonstrates liquid waste can be isolated safely in a deep aquifer. NRC staff review of local  
28 and regional stratigraphies and local geologic cross sections shows no evidence of hydraulic  
29 connection between surface waters and aquifers targeted for deep well injection. In addition,  
30 NRC staff review of applicant calculations of the radius of fluid displacement resulting from  
31 Class V injection into the Minnelusa and Deadwood Formations indicates that the Dewey Fault  
32 will not act as a conduit for fluid to rise to a USDW via the faulted interface. Applicant  
33 calculations based on formation parameters derived from correlation of type logs and proposed  
34 injection rates show that the radius of fluid displacement around the deep injection wells will end  
35 more than 2,500 m [1.5 mi] from the Dewey Fault (Powertech, 2011, Appendix 2.7-L). The UIC  
36 permit will not allow injection into the Class V deep disposal wells unless the permittee  
37 demonstrates the wells are properly sited, such that confinement zones and proper well  
38 construction minimize the potential for migration of fluids outside of the approved injection zone.

39  
40 Potential environmental impacts to groundwater from construction, operation, aquifer  
41 restoration, and decommissioning associated with the Class V injection well disposal option are  
42 discussed next.

#### 43 44 4.5.2.1.1.1 Construction Impacts

45  
46 The construction of facilities, pipelines, wellfields, deep disposal injection wells, holding ponds,  
47 and access roads in the construction phase for the onsite, deep well, liquid waste disposal  
48 option will disturb 98 ha [243 ac] of land (Powertech 2010a). The total land disturbance will be  
49 2.3 percent of the permit area. The deep well disposal facilities, if approved, will be located

1 near the satellite plant in the Dewey area and near the central processing plant in the Burdock  
2 area (see Figure 2.1-10).

3  
4 Consumptive water use during construction will be limited to dust control, cement mixing,  
5 pump tests, delineation drilling, and well drilling and completion. The applicant estimates  
6 that groundwater consumption during construction at the Dewey and Burdock areas will be  
7  $0.8 \times 10^5 \text{ m}^3$  and  $1.2 \times 10^5 \text{ m}^3$  [ $21.8 \times 10^6 \text{ gal}$  and  $30.6 \times 10^6 \text{ gal}$ ], respectively (Powertech,  
8 2010a). Initially, water for construction activities will be withdrawn from existing wells in the  
9 Inyan Kara Group aquifers. The applicant estimates consumptive groundwater use during  
10 construction to be the same as currently being withdrawn for domestic use and livestock  
11 watering from the Inyan Kara Group aquifers within a 2-km [1.2-mi] radius of the site (see SEIS  
12 Section 4.5.2.1.1.2.2). The applicant plans to install wells in the deeper Madison aquifer early in  
13 the construction phase (Powertech, 2010a). In June 2012, the applicant submitted a water  
14 appropriation permit application to use Madison aquifer water (see Table 1.6-1). If permitted,  
15 the Madison aquifer will become the primary source of water for the project (Powertech, 2010a).

16  
17 As described in SEIS Section 2.1.1.1.2.3.5, the applicant plans to use standard mud rotary  
18 drilling techniques to construct production, injection, and monitoring wells. Wells will be  
19 constructed using a small rotary drilling unit that uses bentonite or polymer drilling mud  
20 containing water that is pH-adjusted and mixed to control viscosity (Powertech, 2008). The  
21 volume of drilling fluids and mud used during well installation will be limited. The introduction of  
22 drilling fluids to surficial (alluvial) aquifers at the proposed project might occur during well  
23 drilling, but the amount will be minor because drilling mud is designed to seal boreholes to set  
24 the casing. As part of the applicant's Class III UIC permit, all production, injection, and  
25 monitoring wells will be cased and cemented to prevent the migration of fluids into and between  
26 USDWs in accordance with EPA regulations in 40 CFR 146.32. In addition, the design and  
27 construction of Class V deep injection wells must meet EPA requirements. Prior to entering  
28 service, all wells will undergo mechanical integrity tests of the casing to ensure against  
29 well leakage.

30  
31 During well installation, drilling fluids and mud will be stored in temporary mud pits to control the  
32 spread of fluids, protect the soil from contamination, and enhance evaporation. The applicant  
33 could choose alternative methods to manage drilling fluids to further limit the potential impacts  
34 from the use of mud pits during well drilling activities. These could include lining the mud pits  
35 with an impermeable membrane, offsite disposal of potentially contaminated drilling mud and  
36 other fluids, and the use of portable tanks or tubs to contain drilling mud and other fluids. The  
37 soil horizon found throughout most of the project area is clayey (see SEIS Section 3.4.2), which  
38 will minimize leakage from the mud pits and degradation of water quality of surficial and  
39 shallow aquifers.

40  
41 The groundwater quality of near-surface aquifers can potentially be affected by stormwater  
42 runoff during construction, which in turn will be controlled by the applicant's SWMP that is part  
43 of the SDDENR-issued NPDES permit (see SEIS Section 4.5.1.1.1.1). The NPDES permit sets  
44 limits on the amount of pollutants entering ephemeral drainages that may be in hydraulic  
45 communication with alluvial aquifers at the site. The NPDES permit will also specify mitigation  
46 measures and BMPs to prevent and clean up spills. The applicant has not yet submitted an  
47 application for an NPDES permit to SDDENR.

48  
49 Fuels and lubricants may enter surficial and shallow aquifers as spills during facility construction  
50 and drilling activities and during the installation of injection, production, and monitoring  
51 wells. Impacts to groundwater quality of near-surface aquifers will be minimized by UIC and

1 NPDES permit requirements and implementation of BMPs during construction. The applicant  
2 commits to implement spill prevention and cleanup plans to minimize impacts to soils and  
3 groundwater, including rapid response cleanup and remediation (Powertech, 2009a).  
4 Additionally, only small volumes of fuel and lubricants will be stored at the site. Leaks or spills  
5 will be cleaned immediately to avert soil contamination and infiltration to surficial aquifers.  
6 Under the terms of the NPDES permit (or regulations), spills of petroleum product or hazardous  
7 chemicals that threaten groundwater and related habitats must be reported to SDDENR.  
8

9 In summary, groundwater use during construction will be limited to routine activities, such as  
10 dust suppression, mixing cements, and drilling support. As noted previously, the applicant  
11 estimates that groundwater consumption during construction at the Dewey and Burdock areas  
12 will be  $0.8 \times 10^5 \text{ m}^3$  and  $1.2 \times 10^5 \text{ m}^3$  [ $21.8 \times 10^6 \text{ gal}$  and  $30.6 \times 10^6 \text{ gal}$ ], respectively  
13 (Powertech, 2010a). If the applicant is granted a water appropriation permit to use Madison  
14 aquifer water, NRC staff determine that the applicant will rely less on local water supplies in the  
15 permit area, and hence, environmental impacts on local aquifers (e.g., the Inyan Kara aquifer)  
16 and domestic and livestock wells from consumptive water use during construction will be  
17 SMALL. However, impacts will be MODERATE if the water appropriation permit is denied,  
18 because water use from local shallow aquifers during construction could significantly impact  
19 domestic and livestock wells. For example, the applicant estimates consumptive groundwater  
20 use during construction to be the same as that currently being withdrawn for domestic and  
21 livestock use from the Inyan Kara aquifer within 2 km [1.2 mi] of the Dewey-Burdock site. In this  
22 case, it will be necessary to identify an alternative source of water, or reduce pumping rates  
23 during construction, to reduce the impacts to shallow local aquifers and domestic and livestock  
24 wells from consumptive water uses to SMALL.  
25

26 In addition to potential stress on local aquifers due to consumptive water use demands,  
27 groundwater quality in shallow aquifers (mostly alluvium and also the Inyan Kara aquifer at its  
28 outcrop areas in the eastern part of the Burdock area) could be threatened by stormwater runoff  
29 and spills of fuels and lubricants during construction activities. However, required NPDES  
30 permit compliance activities, such as monitoring and BMPs, will protect groundwater quality of  
31 shallow aquifers. Specifically, the NPDES permit requirements provide controls on the amount  
32 of pollutants entering ephemeral drainages during construction. The permit will also specify  
33 mitigation measures and BMPs to prevent and cleanup spills. The applicant has committed to  
34 implementation of BMPs, such as a spill prevention and cleanup plan to minimize soil  
35 contamination and infiltration (Powertech, 2009a). Therefore, the NRC staff conclude that the  
36 impacts to groundwater during the construction phase for the Class V injection well disposal  
37 option at the proposed project will be SMALL.  
38

#### 39 4.5.2.1.1.2 Operations Impacts

40  
41 Groundwater in near-surface (alluvial) and shallow aquifers, production aquifers, aquifers  
42 overlying and underlying the production aquifers, and deep aquifers could be impacted during  
43 ISR operations if the deep disposal well option is used at the proposed Dewey-Burdock site.  
44 Potential impacts to these aquifers could result from pumping water to meet the required  
45 consumptive water demands and from potential water quality degradation during ISR  
46 operations. Such potential impacts are discussed in the following sections.  
47  
48

#### 4.5.2.1.1.2.1 Shallow (Near-Surface) Aquifers

Alluvial aquifers with thicknesses up to 12 m [40 ft] are present along Beaver Creek, Pass Creek, and the Cheyenne River (see SEIS Section 3.5.3.2). The alluvial aquifers may be locally confined, and they are separated from the underlying Fall River aquifer by the low permeability Graneros Group, which consists of the combined Skull Creek Shale and Mowry Shale. Within the project area, the Graneros Group ranges in thickness from 61 to 122 m [200 to 400 ft], except in the eastern part of the Burdock area, where it has eroded, leaving the Fall River Formation exposed at the surface (see SEIS Section 3.4.1.2 and Figure 3.4-3). An inventory of private wells within a 2-km [1.2-mi] radius of the site indicates that seven wells are completed in alluvial aquifers (Powertech, 2011). The alluvial wells are used solely for monitoring purposes and do not serve as water supply for domestic purposes or livestock watering (Powertech, 2011).

The Inyan Kara Group aquifer is the first near-surface aquifer encountered within the project area, and it is made up of two subaquifers: the Fall River and Chilson aquifers (see SEIS Section 3.5.3.1). The Fall River aquifer has an average thickness of 46 m [150 ft] within the project area and is exposed at the surface in the eastern part of the Burdock area, where the Graneros Group has been eroded (see Figure 3.4-3). The underlying Chilson aquifer varies in thickness from 37 to 61 m [120 to 200 ft] across the project area and is separated from the Fall River aquifer by the Fuson Shale, which has an average thickness of 15 m [50 ft] across the project area. The Chilson aquifer is underlain by a 30-m [100-ft]-thick section of the impermeable Morrison Formation, which hydrologically isolates the Chilson aquifer from deeper aquifers. Based on an inventory of private wells within a 2-km [1.2-mi] radius of the proposed project site, 33 wells obtain water from the Fall River aquifer, 41 wells obtain water from the Chilson aquifer, and 17 wells obtain water from an unknown component of the Inyan Kara aquifer (Powertech, 2011). These wells serve as water supplies for livestock, domestic purposes (e.g., drinking water), and monitoring.

Over the western and central parts of the proposed project area (i.e., the Dewey area and the western part of the Burdock area), the Fall River Formation is overlain by a 61- to 122-m [200- to 400-ft]-thick confining layer composed of the combined Skull Creek Shale and Mowry Shale (Graneros Group). Where the Fall River aquifer is overlain by a thick confining layer, impacts to groundwater in this aquifer due to spills and leaks of pregnant or barren lixiviant on the ground surface resulting from pipeline, valve, and well integrity failure will be SMALL.

As described in SEIS Section 3.5.3.3, the Fall River Formation forms a shallow (near-surface) unconfined aquifer where it is exposed at the surface in the eastern part of the Burdock area. As a result, spills and leaks of pregnant or barren lixiviant on the ground surface resulting from pipeline, valve, and well integrity failure could impact water quality. Uranium orebodies are present in unconfined portions of the Fall River Formation in the eastern part of the Burdock area. However, the applicant stated that ISR operations will not be conducted in unconfined portions of the Fall River aquifer (Powertech, 2010a). The applicant stated that ISR operations in the Fall River Formation will be limited to uranium orebodies in confined aquifers in the Dewey portion of the project area (Powertech, 2010a).

The GEIS reported that NRC-required leak detection and cleanup programs greatly reduce the impact of radiological releases at or near the ground surface in shallow groundwater. The applicant is required to have leak detection, spill response, and cleanup programs as part of the NPDES permit (see SEIS Section 7.3.2). The applicant commits to implementing a spill prevention and cleanup plan that includes rapid response cleanup and remediation programs to

1 minimize impacts on soils and groundwater (Powertech, 2009a). In addition, preventive  
2 measures, such as NRC-required mechanical integrity testing (see SEIS Section 2.1.1.1.2.3.5)  
3 and UIC permits obtained from EPA, will limit the likelihood of well integrity failure  
4 during operations, and hence, will minimize the risk of process fluid leaks from operational wells  
5 entering (or contaminating) shallow aquifers.  
6

7 NRC staff determine that near-surface (alluvium) aquifers in the project area have limited  
8 occurrences near creeks and are not being used for domestic, agricultural, or livestock watering.  
9 Shallow aquifers occur in the eastern part of the Burdock area, where the Fall River aquifer  
10 crops out and/or is present in an unconfined condition. The applicant commits to refrain  
11 from extracting uranium in the shallow, unconfined Fall River aquifer in the Burdock area.  
12 Near-surface and shallow aquifers are hydrologically isolated from deep aquifers below the  
13 Chilson aquifer by the impermeable Morrison Formation. In addition, the NRC staff  
14 recognize that during ISR operations groundwater impacts will be mitigated and reduced by  
15 (i) implementation of leak detection and cleanup programs, (ii) mechanical integrity testing of  
16 wells, and (iii) adherence to UIC permit requirements. Therefore, NRC staff conclude that  
17 impacts to shallow (near-surface) groundwater during operations for the Class V injection well  
18 disposal option at the proposed project will be SMALL.  
19

#### 20 4.5.2.1.1.2.2 Operations Impacts to Production and Surrounding Aquifers 21

22 The potential environmental impact to groundwater in the production and other surrounding  
23 aquifers is related to consumptive water use and groundwater quality.  
24

#### 25 Water Consumptive Use 26

27 GEIS Section 4.4.4.2.2.2 included a discussion of the potential impacts of groundwater  
28 withdrawal and reinjection into the production zone during ISR operations (NRC, 2009a).  
29 Most of the water withdrawn from the aquifer is returned to the aquifer. The portion not  
30 returned to the aquifer is referred to as “consumptive use.” Consumptive use for ISR  
31 operations is primarily due to production bleed and other small losses. Production bleed is  
32 the net withdrawal maintained to ensure groundwater hydraulic gradients draw water in  
33 toward the production wells to minimize the potential movement of lixiviant and its associated  
34 contaminants out of the wellfield.  
35

36 Consumptive water use during ISR operations could impact those who use local water from the  
37 production aquifer outside the exempted zone. This potential impact will lower water levels in  
38 nearby wells and reduce the yield of these wells. In addition, if the production zone is  
39 hydraulically connected to other aquifers above and/or below the production zone, consumptive  
40 use may impact the water levels in these overlying and underlying aquifers and reduce the yield  
41 in any nearby wells withdrawing water from these aquifers. (NRC, 2009a)  
42

43 Based on historical records and field investigations of the proposed project area, a total of  
44 107 producing wells were identified within 2 km [1.2 mi] of the proposed project site (Powertech,  
45 2011). In addition, field investigations of 36 wells documented in historical records was  
46 conducted. Of the 36 wells, 8 were visually confirmed to be plugged and abandoned, while  
47 28 wells were not identified at the surface during the field investigation (Powertech, 2011). The  
48 107 identified producing wells are screened in the following aquifers: Fall River (33 wells),  
49 Chilson (41 wells), unknown aquifer (17 wells), Inyan Kara (either the Fall River or Chilson or  
50 both; 3 wells), Unkpapa (5 wells), Sundance (1 well), and alluvial aquifers (7 wells). The total

1 estimated groundwater use from wells placed in the Fall River aquifer is 0.057 m<sup>3</sup>/min [15 gpm].  
2 From wells placed in the Chilson aquifer, the total estimated groundwater use is 0.174 m<sup>3</sup>/min  
3 [46 gpm] (Powertech, 2009a). The total estimated flow from wells placed in the Inyan Kara  
4 Group aquifers (Fall River, Chilson, or both) is 0.265 m<sup>3</sup>/min [70 gpm].  
5

6 Ore production zone pumping rates are estimated to be 9,084 Lpm [2,400 gpm] in the Burdock  
7 area and 6,056 Lpm [1,600 gpm] in the Dewey area during ISR operations (Powertech, 2011).  
8 These pump rates will draw down water levels in nearby wells in the production zones,  
9 potentially reducing the yield of these wells for livestock watering and domestic use. The  
10 applicant estimates that drawdown in the Fall River aquifer at the nearest domestic well, located  
11 4,595 m [15,075 ft] from the production well, will range from 3 to 13 m [9.9 to 42.8 ft]; these  
12 estimates assume a 1 percent bleed rate over 9 years of ISR production and restoration  
13 (Powertech, 2009a, 2011). The estimates are based on aquifer parameters (transmissivity and  
14 storativity) obtained from pumping-test analyses conducted by the Tennessee Valley Authority  
15 in 1979 and the applicant in 2008 (Powertech, 2009a). Similarly, the applicant estimates that  
16 drawdown in the Chilson aquifer at the nearest domestic well, located 3,107 m [10,195 ft] from  
17 the production aquifer, will range from 1.5 to 3.8 m [4.9 to 12.6 ft]; these estimates assume a  
18 1 percent bleed rate over 9 years of ISR production and restoration (Powertech, 2009a, 2011).  
19 The staff analyzed the hydrogeologic characteristics of the Fall River and Chilson aquifers  
20 (i.e., formation thicknesses and potentiometric surfaces) and conclude that these estimated  
21 drawdowns will have a SMALL impact on nearby wells located in the Fall River and  
22 Chilson aquifers.  
23

24 The NRC staff recognize that the Chilson aquifer is separated from the Sundance/Unkpapa  
25 Formation by a 30-m [100-ft]-thick section of the impermeable Morrison Formation, which  
26 hydrologically isolates the Chilson aquifer from underlying aquifers (i.e., Sundance/Unkpapa).  
27 Therefore, the staff find that, for the Class V injection well disposal option, the impacts on water  
28 levels and water yields in wells located in the Sundance/Unkpapa Formation (Powertech  
29 identified six wells) due to pumping and drawdown in the Chilson aquifer during ISR production  
30 will be SMALL.  
31

32 During ISR operations, the applicant plans to maintain a typical bleed rate of 0.875 percent of  
33 the production flow rate over the life of the proposed project (Powertech, 2011). However,  
34 instantaneous bleed rates may vary from 0.5 to 3 percent for short durations, ranging from days  
35 to months, to ensure a cone of depression is maintained and that no production fluids are  
36 released from the production zone (Powertech, 2009a). Because there is no evidence for fast  
37 flow paths, such as fractures, in the ore-bearing aquifers, NRC staff conclude that the cone of  
38 depression will be maintained during ISR operations. If the applicant uses a bleed rate of  
39 3 percent during the operations phase, drawdowns in the nearest domestic wells in the Fall  
40 River and Chilson aquifers will be greater than those estimated in the previous paragraph for a  
41 1 percent bleed rate. Drawdowns resulting from higher bleed rates (i.e., bleed rates greater  
42 than 1 percent) could result in impacts to water yields and pumping costs in nearby wells used  
43 for agricultural, livestock, and domestic use. However, these impacts will be temporary (days to  
44 months). After production and restoration are complete and groundwater withdrawals are  
45 terminated at the proposed project, groundwater levels will tend to recover with time.  
46 Furthermore, the applicant will monitor private domestic, livestock, and agricultural wells as  
47 appropriate during operations and provide alternative sources of water to landowners in the  
48 event of significant drawdown to domestic and livestock wells within and adjacent to the  
49 proposed project area (Powertech, 2009a). Therefore, potential impacts to water yields and  
50 pumping costs in nearby wells due to drawdowns associated with higher bleed rates for the  
51 Class V injection well option will be short-term and SMALL.



1 The applicant has committed to removing all existing domestic wells within the project area from  
2 private use prior to ISR operations (Powertech, 2011). The applicant will work with well owners  
3 to provide an alternative water source, such as a replacement well or alternative water supply  
4 for domestic use. Replacement wells will be located an appropriate distance from wellfields and  
5 target an aquifer outside the production zone that provides water in a quantity equal to that of  
6 the original well and of a quality suitable for the same uses as the original well (Powertech,  
7 2011). In addition, the applicant will remove all stock wells within 0.4 km [0.25 mi] of any  
8 wellfield from private use prior to operation of the wellfield. Furthermore, the applicant will  
9 remove stock wells from private use that could be adversely impacted by or could adversely  
10 impact ISR operations. The applicant will also assume control of all wells used for monitoring  
11 within the project area boundary and secure the well heads to prevent unauthorized use.  
12 During operations, the applicant will monitor all domestic wells within 2 km [1.2 mi] of the project  
13 boundary and all stock wells within the project area (Powertech, 2011). In the event of  
14 significant drawdown or degradation of water quality in these wells, the applicant will provide  
15 alternative sources of water (e.g., a replacement well) to the well owner as described previously  
16 (Powertech, 2009a, 2011).

17  
18 In June 2012, the applicant submitted a water appropriation permit to SDDENR for groundwater  
19 use from the Madison aquifer during the operational phase of the proposed project. If this  
20 permit is granted, the applicant will rely largely on Madison aquifer water during ISR operations.  
21 The Madison aquifer is approximately 844 m [2,765 ft] below ground surface in the Burdock  
22 area and approximately 945 m [3,100 ft] below ground surface in the Dewey area (Powertech,  
23 2011, Appendix 2.7–L). Otherwise, the applicant will pump water from the Inyan Kara Group  
24 aquifers at an estimated sustainable rate of 0.15 m<sup>3</sup>/min [40 gpm] for the life of the project  
25 (Powertech, 2010a). However, the applicant noted that water requirements for the Burdock  
26 central processing plant will be as high as 0.25 m<sup>3</sup>/min [65 gpm] (Powertech, 2009a), which will  
27 exceed the estimated sustainable pumping rate of 0.15 m<sup>3</sup>/min [40 gpm] (Powertech, 2010a).  
28 Therefore, if the applicant cannot secure a water appropriation to use Madison aquifer water  
29 during ISR operations, the applicant will have to either identify an alternative source of water to  
30 meet the operational water requirements or reduce pumping rates to meet the estimated  
31 sustainable pumping rate of 0.15 m<sup>3</sup>/min [40 gpm] from the Inyan Kara Group aquifers.  
32 Reducing the pumping rate to 0.15 m<sup>3</sup>/min [40 gpm] would extend the aquifer restoration  
33 process (Powertech, 2010a).

34  
35 If SDDENR approves the water appropriation permit application, NRC staff conclude that the  
36 environmental impacts on local aquifers and domestic and livestock wells from consumptive  
37 water use during ISR operations will be SMALL. However, if the water appropriation permit is  
38 denied, the impacts will be MODERATE. In this case, identification of an alternative source of  
39 groundwater or a reduction in pumping rates to meet operational water requirements will be  
40 necessary to reduce the impacts to SMALL. To mitigate impacts on the use of shallow  
41 groundwater, the applicant commits to (i) removing all existing domestic wells within the project  
42 area from private use prior to ISR operations, (ii) removing all stock wells within 0.4 km [0.25 mi]  
43 of any wellfield from private use prior to operation of the wellfield, (iii) removing stock wells that  
44 could be adversely impacted by or could adversely impact ISR operations from private use,  
45 (iv) controlling all monitor wells within the proposed project boundary, and (v) providing  
46 alternative sources of water to landowners in the event of significant drawdown or degradation  
47 of water quality to domestic wells within 2 km [1.2 mi] of the project boundary and stock wells  
48 within the proposed project area (Powertech, 2009a, 2011). After production and restoration  
49 are complete and groundwater withdrawals are terminated at the Dewey-Burdock Project,  
50 groundwater levels would tend to recover with time. Therefore, NRC staff conclude that the

1 overall environmental impacts on local aquifers, production aquifers, and domestic and livestock  
2 wells from consumptive use during operations for the Class V injection well disposal option at  
3 the proposed project will be SMALL.

#### 4 Excursions and Groundwater Quality

5  
6  
7 As described in the GEIS, groundwater quality in the production zone will be degraded during  
8 ISR operations (NRC, 2009a). The production portion of the aquifer will need to be exempted  
9 from being a USDW through an EPA-issued aquifer exemption in accordance with the criteria  
10 under 40 CFR 146.4. After production is completed, the licensee must initiate aquifer  
11 restoration activities to restore the production zone to Commission-approved background water  
12 quality, if possible. If the aquifer cannot be returned to background conditions, NRC requires  
13 that the production aquifer be returned to the MCLs provided in 10 CFR Part 40, Appendix A,  
14 Table 5C or to NRC-approved alternate concentrations limits (ACLs). Appendix B explains the  
15 process for granting an ACL. For proposed ACLs to be approved, they must be shown to  
16 protect human health at the site. For these reasons, NRC staff concluded in the GEIS that the  
17 potential impacts to the water quality of the uranium-bearing production zone aquifer as a result  
18 of ISR operations will be SMALL (NRC, 2009a).

19  
20 To prevent horizontal excursions, inward hydraulic gradients need to be maintained in the  
21 production aquifer during ISR operations (NRC, 2009a). These inward hydraulic gradients are  
22 created by the net groundwater withdrawals (production bleeds) maintained through continued  
23 pumping during ISR operations. For the Dewey-Burdock ISR Project, the applicant plans to  
24 maintain a 0.5 to 3 percent production bleed rate (see SEIS Section 2.1.1.1.3.1.2). The inward  
25 hydraulic gradients will ensure that groundwater flow is toward the production zone and that  
26 horizontal excursions will not occur.

27  
28 As required by NRC license condition, a licensee must take preventive measures to reduce the  
29 likelihood and consequences of potential excursions. An applicant must design and install a  
30 monitoring network capable of detecting both horizontal and vertical excursions from the  
31 production zone to demonstrate that restoration is feasible. A ring of monitoring wells within and  
32 encircling the production zone is required for early detection of horizontal excursions. The  
33 applicant's groundwater monitoring program is detailed in SEIS Sections 2.1.1.1.3.1.3 and  
34 7.3.1.2. If excursions are detected in the monitoring well ring, corrective actions to either stop or  
35 reverse the fluid movement (i.e., excursions) are required. The applicant will need to modify  
36 wellfield operations, as necessary, to correct the excursion. As described in SEIS  
37 Section 2.1.1.1.3.1.3, corrective actions to stop or reverse an excursion may include  
38 increasing sampling frequency to weekly, increasing the pumping rates (and thus the net bleed)  
39 of production wells in the area of the excursion, and pumping individual wells to enhance  
40 recovery of extraction solutions. If these actions do not effectively retrieve the excursion within  
41 60 days, the applicant is required by license condition to suspend injecting lixiviant into the  
42 production zone adjacent to the excursion until the excursion is retrieved and the upper control  
43 limit parameters are not exceeded.

44  
45 Vertical excursions may also occur in aquifers overlying or underlying the production zone  
46 aquifer. An analysis presented in the GEIS indicated the potential for migration of production  
47 solutions into an overlying or underlying aquifer is minor if the aquitard (confining layer)  
48 separating the production zone from the overlying and underlying aquifer is sufficiently thick and  
49 the aquitard has low permeability (NRC, 2009a). The hydraulic gradient between the production  
50 zone and overlying or underlying aquifers is also used to determine the potential for vertical  
51 excursions. The upper confining layer (Skull Creek Shale) at the Dewey-Burdock site has a

1 thickness of approximately 61 m [200 ft] (see Figure 3.5-5). The applicant stated that it will not  
2 likely place any monitoring wells below the Lakota Formation due to the presence of a 30-m  
3 [100-ft]-thick underlying confining layer (Morrison Formation) and the upward vertical hydraulic  
4 gradient at the proposed Dewey-Burdock site (Powertech, 2009a). The thicknesses of the  
5 upper confining layer {approximately 61 m [200 ft]} and the lower confining layer {approximately  
6 30 m [100 ft]} will minimize the potential impacts of vertical excursions. To ensure the detection  
7 of vertical excursions, NRC requires monitoring in the overlying and underlying aquifers. The  
8 applicant's groundwater monitoring program is detailed in SEIS Sections 2.1.1.1.3.1.3  
9 and 7.3.1.2.

10  
11 Vertical excursions can also occur due to improperly sealed boreholes, poorly completed  
12 wells, or loss of mechanical integrity of ISR injection and production wells. The applicant will  
13 use its mechanical integrity testing program to mitigate the impacts of potential vertical  
14 excursions resulting from borehole failure of injection, production, and monitoring wells  
15 (see SEIS Section 2.1.1.1.2.3.5). The applicant must also conduct periodic mechanical integrity  
16 testing of each well to check for leaks or cracks in the casing, as required by 40 CFR 146.8.  
17 Because mechanical integrity testing reduces the likelihood of poor well integrity, the impacts  
18 from excursions involving failure or damage to a well casing will be SMALL.

19  
20 In GEIS Section 2.11.4, NRC staff discussed excursions that occurred at operating ISR facilities  
21 (NRC, 2009a). Separately, NRC staff analyzed the environmental impacts from both horizontal  
22 and vertical excursions that occurred at three NRC-licensed ISR facilities (NRC, 2009b). In that  
23 analysis, which considered 60 events at 3 facilities, NRC staff found that, for most of the events,  
24 the licensees were able to control and reverse the excursions through pumping and extraction  
25 at nearby wells. Most excursions were short-lived, although a few continued for several years.  
26 In all cases, however, no impacts occurred to nonexempted portions of the aquifer  
27 (NRC, 2009b).

28  
29 Many of the hydrogeologic conditions at the proposed Dewey-Burdock ISR Project are similar  
30 to those at other ISR facilities. Groundwater in the production zone aquifers displays  
31 sufficient hydraulic conductivity to minimize excursions during ISR activities. However, the  
32 Dewey-Burdock site has several distinctive man-made and hydrogeological features that could  
33 contribute to potential vertical or horizontal excursions.

34  
35 First, TVA drilled several hundred exploratory boreholes within the proposed Dewey-Burdock  
36 ISR Project area, which penetrate the Inyan Kara Group aquifers to the Morrison Formation  
37 (Powertech, 2010a). These boreholes may provide a pathway to aquifers above and below  
38 production zone confining units, such as alluvial aquifers above the Graneros Group and deep  
39 aquifers below the Morrison Formation. Before developing wellfields, the applicant commits to  
40 properly plugging and abandoning or mitigating any historical wells and exploration holes that  
41 may potentially impact the control and containment of wellfield solutions within the proposed  
42 wellfield (Powertech, 2011). The applicant will use available information and best professional  
43 practices—including historical records, color infrared imagery, field investigations, and  
44 potentiometric surface evaluation—to locate or detect improperly plugged boreholes or wells in  
45 the vicinity of potential wellfield areas. In addition, the applicant will use pumping test results  
46 conducted as part of routine wellfield hydrogeologic package development to identify improperly  
47 plugged wells and exploration boreholes (Powertech, 2011).

48  
49 Second, hydraulic communication (i.e., leakage) between the Fall River and Chilson aquifers  
50 through the intervening Fuson Shale (see Figure 3.5-5) in the Burdock area has been identified

1 based on aquifer pumping tests (see SER Section 2.4.3.4) and potentiometric surface  
2 differences (see SEIS Section 3.5.3.2). Leakage through the Fuson Shale has implications  
3 when evaluating the capability of reversing potential vertical excursions by drawing water back  
4 into producing wells. Using exploratory drilling data the applicant provided (Powertech, 2010b),  
5 NRC staff independently constructed isopach maps (i.e., maps showing the thickness of a bed  
6 or formation throughout a geographic area) for the Fuson Shale underlying the Burdock area  
7 using different statistical methods (e.g., kriging, inverse distance). The resultant isopach maps  
8 for the Fuson Shale were in good agreement with the isopach map for the Fuson Shale the  
9 applicant presented (see Figure 3.5-6). However, the thickness of the Fuson Shale at the  
10 proposed Dewey-Burdock site may be subject to change, and the applicant has committed to  
11 collecting more detailed lithologic data in each wellfield prior to ISR operations to ensure  
12 hydraulic control of the production zone (Powertech, 2010a). The applicant also developed a  
13 numerical groundwater model using site-specific geologic and hydrologic information. Based on  
14 results of the numerical model, the applicant concluded that vertical leakage through the  
15 Fuson Shale is caused by improperly installed wells or improperly abandoned boreholes. NRC  
16 staff reviewed the applicant's numerical groundwater model and calibration, and it determined  
17 that the model was appropriately developed and sufficiently calibrated. As noted previously, the  
18 applicant has committed to locating unknown boreholes and wells, and committed to plugging  
19 and abandoning historical wells and exploration holes, holes drilled by the applicant, and any  
20 wells that fail mechanical integrity tests (Powertech, 2011).

21  
22 Finally, the applicant plans to conduct ISR operations in partially saturated portions of the  
23 Chilson aquifer in the Burdock area (Powertech, 2011). ISR operations in partially saturated  
24 aquifers present special challenges with regard to controlling production fluids and detecting  
25 and remediating excursions. As described in SEIS Section 2.1.1.1.2.3, the applicant has  
26 committed to collect more detailed lithologic data through delineation drilling and conduct  
27 additional hydrogeologic investigations (including pump tests) in each proposed wellfield to  
28 ensure that hydraulic control of the production zone can be maintained (Powertech, 2010a,  
29 2011). The applicant will be required to submit detailed operational plans, including monitoring  
30 well layouts, for NRC and EPA approval before conducting ISR operations in partially saturated  
31 aquifers at the proposed Dewey-Burdock site (Powertech, 2010a, 2011). NRC staff have also  
32 included a license condition for ISR operations in partially saturated portions of the Chilson  
33 aquifer. This license condition will require the applicant to demonstrate the ability to detect and  
34 remediate excursions in partially saturated zones (NRC, 2012).

35  
36 In summary, NRC staff conclude that the impact from excursions at the proposed  
37 Dewey-Burdock ISR Project will be SMALL because (i) EPA will exempt uranium-bearing  
38 production aquifers from USDW classification according to the criteria under  
39 40 CFR 146.4,(ii) the applicant will be required to submit wellfield operational plans for  
40 NRC and EPA approval, (iii) inward hydraulic gradients will be maintained to ensure  
41 groundwater flow is toward the production zone, and (iv) the applicant's NRC-mandated  
42 groundwater monitoring plan will ensure that excursions are detected and corrected. Impacts  
43 from vertical excursions will be SMALL because (i) uranium-bearing production zones in the  
44 Fall River and Chilson aquifers are hydrologically isolated from adjacent aquifers by thick, low  
45 permeability shale layers (i.e., the overlying Skull Creek Shale and underlying Morrison  
46 Formation); (ii) a prevailing upward hydraulic gradient occurs across the major aquifers; (iii) the  
47 applicant's required mechanical integrity testing program will mitigate the impacts of potential  
48 vertical excursions resulting from borehole failure; and (iv) the applicant commits to properly  
49 plugging and abandoning or mitigating any previously drilled wells and exploration holes that  
50 may potentially impact the control and containment of wellfield solutions within the proposed  
51 project area. Moreover, because the applicant must initiate aquifer restoration in the production

1 aquifers (i.e., Fall River and Chilson aquifers) to return groundwater to Commission-approved  
2 background levels or to NRC-approved alternative water quality levels at the end of ISR  
3 operations, NRC staff conclude that groundwater quality impacts to the production and  
4 surrounding aquifers as a result of ISR operations for the Class V injection well disposal option  
5 will be SMALL.  
6

#### 7 4.5.2.1.1.2.3 Operations Impacts to Deep Aquifers Below the Production Aquifers 8

9 Potential environmental impacts to confined, deep aquifers below the production aquifers could  
10 occur from deep well injection of process-related liquid effluents. Under the Safe Drinking  
11 Water Act (SDWA), EPA has statutory authority to permit and regulate injection well activities  
12 that may affect the environment. EPA Region 8 administers the deep well disposal UIC  
13 program in South Dakota and is responsible for issuing any permits for deep well disposal at the  
14 proposed Dewey-Burdock Project site.  
15

16 At the proposed Dewey-Burdock ISR Project, the applicant plans to dispose of liquid waste  
17 using Class V (nonhazardous) deep injection wells, land application, or a combination of both  
18 deep well injection and land application (see SEIS Section 2.1.1.1.2.4). For the Class V  
19 injection well disposal option at the proposed project, the applicant will inject process-related  
20 liquid waste into the Deadwood and Minnelusa Formations, which both lie below the Morrison  
21 Formation (Powertech, 2011, Appendix 2.7-L). However, deep well injection into these  
22 formations depends on securing a Class V (nonhazardous) UIC permit through an  
23 EPA-permitting process. For disposal through a UIC Class V well, an EPA permit, if granted,  
24 will require that the waste stream to be injected will not be classified as hazardous under the  
25 Resource Conservation and Recovery Act. EPA will also evaluate the suitability of the  
26 proposed deep injection wells. EPA will only allow deep well injection if the liquid wastes  
27 can be safely isolated in the deep aquifers. If a license is granted, NRC will also require the  
28 liquid wastes to be treated and monitored to verify they meet NRC release standards in  
29 10 CFR Part 20, Subparts D and K and Appendix B. If the proposed injection zones are  
30 underground sources of drinking water {have a total dissolved solids concentration below  
31 10,000 mg/l [10,000 ppm]}, the EPA UIC permit will require that the injectate meets drinking  
32 water standards. The applicant's Class V injection well monitoring program is detailed in SEIS  
33 Section 7.6.  
34

35 At the Dewey-Burdock site, the Madison aquifer is an important aquifer in the region supplying  
36 municipal water for numerous communities, including Rapid City and Edgemont, South Dakota.  
37 As noted previously, the proposed injection zones for the deep disposal wells are the Minnelusa  
38 Formation and the Deadwood Formation, which respectively lie above and below the Madison  
39 Formation (Figure 3.5-5). There are confining layers at the base of the Minnelusa Formation,  
40 which separate the Madison Formation from the overlying Minnelusa Formation. Locally, these  
41 confining layers may be absent or provide ineffective confinement, which could enhance  
42 hydraulic connection between the Minnelusa aquifer and the underlying Madison aquifer (Naus,  
43 et al., 2001). The Englewood Formation underlies the Madison Formation and should provide a  
44 confining layer between the Madison Formation and the underlying Deadwood Formation. The  
45 Whitewood and Winnipeg Formations (see Figure 3.5-5) are not expected to be present in the  
46 southern Black Hills (Naus, et al., 2001). As stated previously, the UIC permit will not allow  
47 injection into the Class V deep disposal wells unless the permittee demonstrates the wells are  
48 properly sited, such that confinement zones and proper well construction minimize the potential  
49 for migration of fluids outside of the approved injection zone. Based on the protective

1 requirements of the EPA UIC Class V permit, NRC staff conclude that the impact of the deep  
2 Class V disposal wells on the deep aquifers will be SMALL.

#### 3 4 4.5.2.1.1.3 Aquifer Restoration Impacts

5  
6 Consistent with the GEIS, the primary goal of aquifer restoration at the proposed  
7 Dewey-Burdock ISR Project is to return groundwater quality within the production zone of a  
8 wellfield to Commission-approved background water quality conditions or to standards  
9 consistent with NRC requirements at 10 CFR Part 40, Appendix A, Criterion 5B(5) (Powertech,  
10 2009b). These standards state the concentration of a hazardous constituent must not exceed  
11 (i) the Commission-approved background concentration of that constituent in groundwater;  
12 (ii) the respective value in the table in paragraph 5C (in 10 CFR Part 40, Appendix A) if the  
13 constituent is listed in the table and if the background level of the constituent is below the  
14 value listed; or (iii) an ACL the Commission establishes. Appendix B explains the process for  
15 granting an ACL. For proposed ACLs to be approved, they must be shown to protect human  
16 health at the site.

17  
18 Hydraulic control of the ore zone must be maintained during aquifer restoration. This  
19 is accomplished by maintaining an inward hydraulic gradient through a restoration bleed.  
20 During aquifer restoration at the proposed Dewey-Burdock site, the restoration bleed will  
21 typically be 1 percent of the restoration flow (Powertech, 2011). The applicant plans to begin  
22 restoration of the first wellfield in both the Burdock and Dewey areas immediately after  
23 production activities end in that wellfield (Powertech, 2009a). Subsequently, as additional  
24 wellfields are completed, the applicant plans to simultaneously operate one wellfield in  
25 restoration for each wellfield in production in each area for the duration of the project.

26  
27 As described in SEIS Section 2.1.1.1.4.1, the applicant's primary method of aquifer restoration  
28 for the Class V injection well disposal option consists of groundwater treatment with reverse  
29 osmosis and permeate injection (Powertech, 2009b, 2011). This method uses a reverse  
30 osmosis system consisting of pressurized, semipermeable membranes that will treat  
31 groundwater removed from the wellfields in the Dewey and Burdock areas. The reverse  
32 osmosis system removes more than 90 percent of the total dissolved solids in groundwater  
33 being restored. The reverse osmosis reject, or brine, undergoes radium removal in the radium  
34 settling ponds and then disposal in one or more Class V injection wells. The total liquid waste  
35 flow rate will be approximately 746 Lpm [197 gpm] during concurrent uranium production and  
36 aquifer restoration and approximately 568 Lpm [150 gpm] during aquifer restoration alone  
37 (Powertech, 2011). These liquid waste flow rates are lower than the proposed disposal  
38 capacity of up to 1,135 Lpm [300 gpm] for the Class V injection well disposal option (see SEIS  
39 Section 2.1.1.1.2.4.1).

40  
41 About 70 percent of the water withdrawn from the wellfields and passed through the reverse  
42 osmosis membranes will be recovered as permeate. Before reinjection into the wellfields, the  
43 permeate would be supplemented with makeup water from wells in the Madison Formation and  
44 injected into the wellfields at an amount slightly less than the amount withdrawn to maintain a  
45 slight restoration bleed. As noted previously, the restoration bleed will maintain hydraulic  
46 control of the wellfields during aquifer restoration and will typically be 1 percent of the  
47 restoration flow.

48  
49 Based on the total liquid waste flow rates discussed in the previous paragraph, the flow rates of  
50 makeup water needed during concurrent uranium production and aquifer restoration will be  
51 approximately 224 Lpm [59 gpm] and approximately 170 Lpm [45 gpm] for aquifer restoration

1 alone. As described in SEIS Section 4.5.2.1.1.2.2, the applicant submitted a water  
2 appropriation permit to SDDENR in June 2012 for groundwater use from the Madison aquifer.  
3 However, if the applicant cannot secure a water appropriation for use of Madison aquifer water,  
4 the applicant will have to either identify an alternative source of water to meet aquifer restoration  
5 water requirements or reduce pumping rates to meet the estimated sustainable pumping rate of  
6  $0.15 \text{ m}^3/\text{min}$  [40 gpm] from the Inyan Kara Group aquifers (see SEIS Section 4.5.2.1.1.2.2.).  
7 Reducing the pumping rate to  $0.15 \text{ m}^3/\text{min}$  [40 gpm] will extend the aquifer restoration phase  
8 (Powertech, 2010a). After production and restoration are complete and groundwater  
9 withdrawals are terminated, groundwater levels will tend to recover with time (NRC, 2009a).  
10 Thus, the potential long-term environmental impact from consumptive use during the restoration  
11 phase at the proposed project for the Class V injection well disposal option will be SMALL.  
12

13 Aquifer restoration will directly impact groundwater quality in the production zone. At the end of  
14 operations in wellfields, the applicant must initiate aquifer restoration to return groundwater to  
15 Commission-approved background conditions. If these aquifers cannot be returned to  
16 Commission-approved background conditions, NRC will require that the production aquifer be  
17 returned to the MCLs provided in 10 CFR 40, Appendix A, Table 5C, or to NRC-approved  
18 alternate concentration limits. Restoration to these standards will ensure that groundwater  
19 within the exemption boundary will not pose a threat to surrounding groundwater. For these  
20 reasons, potential impacts to the water quality of the Fall River and Chilson aquifers and  
21 surrounding aquifers as a result of aquifer restoration for the Class V injection well disposal  
22 option will be SMALL.  
23

24 Based on aquifer pumping tests and potentiometric surface differences, it is possible that  
25 hydraulic connection (leakage) exists between the Fall River and Chilson aquifers through the  
26 intervening Fuson Shale in the Burdock area. This has important implications for aquifer  
27 restoration at the proposed project. Because leakage may occur through the Fuson Shale, a  
28 potential exists for drawdown-induced migration of radiological contaminants from abandoned  
29 open pit mines in the northern and eastern portions of the Burdock area (e.g., Triangle Pit mine)  
30 through the Fall River aquifer into the hydraulically connected Chilson aquifer. Although  
31 drawdown-induced migration of contaminants may not be a critical issue during ISR operations,  
32 it could affect groundwater restoration goals at the proposed wellfields in the Burdock area and  
33 threaten groundwater quality outside the exemption boundary. Therefore, if contaminants are  
34 drawn into production zones within the Chilson aquifer from abandoned open pit mines  
35 through the hydraulically connected Fall River aquifer during aquifer restoration, the impacts will  
36 be MODERATE.  
37

38 NRC requires the applicant to conduct hydrogeological characterization and aquifer pumping  
39 tests in each wellfield to examine the hydraulic integrity of the Fuson Shale and ensure  
40 drawdown-induced migration of potential contaminants will not impact aquifer restoration goals  
41 (Powertech, 2010a). NRC requires by license condition that the applicant provide the results of  
42 the hydrogeological characterization and aquifer pumping tests for review and written  
43 verification before any proposed wellfields are developed (NRC, 2012). As described in SEIS  
44 Section 4.5.2.1.1.2.2, NRC staff have reviewed the applicant's numerical model constructed to  
45 investigate groundwater leakage through the Fuson Shale in the Burdock area as part of the  
46 safety review of the Dewey-Burdock ISR Project. As discussed previously, the applicant has  
47 committed to locating unknown boreholes or wells, and committed to plugging and abandoning  
48 historical wells and exploration holes, holes drilled by the applicant, and any wells that fail  
49 mechanical integrity tests (Powertech, 2011). These commitments will ensure that

1 contaminants are hydrologically isolated in the exempted portion of the ore-bearing aquifers  
2 during restoration.

3  
4 As with the operations phase, a network of buried pipelines is used during the restoration phase  
5 for transporting fluids between the pump house and the satellite facility, or central processing  
6 plant. These pipelines are also used to connect injection and extraction wells to manifolds  
7 inside the header houses. However, the fluids transported in these pipes during restoration are  
8 generally less concentrated than during production. The failure of pipeline fittings or valves, or  
9 failures of well mechanical integrity in shallow aquifers, could result in leaks and spills of  
10 these fluids that could impact water quality in shallow aquifers. As discussed in SEIS  
11 Section 4.5.2.1.1.2.1, the applicant committed to implementing a leak-detection and  
12 spill-cleanup program (Powertech, 2009a). The EPA-mandated UIC program will also  
13 require preventive measures, such as well mechanical integrity testing. Consequently,  
14 implementing these measures will result in potential SMALL impacts to alluvial or shallow  
15 (near-surface) aquifers during the aquifer restoration phase at the proposed project.

16  
17 As previously discussed in SEIS Section 4.5.2.1.1.2.3, it is assumed that the potential  
18 environmental impact to deep aquifers below the production aquifers from deep well injection of  
19 treated liquid wastes will be SMALL. The applicant will need an EPA UIC Class V permit for  
20 deep disposal wells at the proposed project (Powertech, 2009c). EPA will evaluate the  
21 suitability of the proposed deep injection wells and will only allow deep well injection if the waste  
22 fluids can be suitably isolated in a deep aquifer. Consequently, NRC staff determine that the  
23 potential environmental impact from the Class V injection well disposal option on targeted deep  
24 aquifers located below the production zone aquifers will be SMALL.

25  
26 As described in SEIS Section 2.1.1.1.4.2, the applicant will implement a restoration monitoring  
27 plan to detect and correct horizontal and vertical excursions during aquifer restoration. After  
28 aquifer restoration is complete, groundwater levels will tend to recover with time (NRC, 2009a),  
29 and therefore long-term impacts to consumptive water use will be SMALL. Continued  
30 implementation of a leak-detection and spill-cleanup program and preventative measures, such  
31 as well mechanical integrity testing, will result in SMALL impacts to alluvial or shallow  
32 (near-surface) aquifers. The applicant's UIC Class V permits from EPA for deep well disposal  
33 will ensure that the impact to deep aquifers during aquifer restoration will be SMALL. Moreover,  
34 restoration to Commission-approved background conditions (or NRC-approved water quality  
35 standards) in accordance with NRC license conditions will ensure that groundwater within the  
36 exemption boundary will not threaten surrounding groundwater.

37  
38 Before NRC terminates an ISR source material license, a licensee is required to demonstrate  
39 that there will be no long-term impacts to USDWs. NRC review and approval of the wellfield  
40 restoration will ensure that the restoration standards are met and that these standards are  
41 protective of public health and the environment. Although plans exist to ensure restoration  
42 standards are met, drawdown-induced potential migration of radiological and nonradiological  
43 contaminants from abandoned open pit mines (e.g., Triangle Pit mine) in the Burdock area into  
44 the hydraulically connected Chilson aquifer during aquifer restoration may adversely impact  
45 aquifer restoration goals. Therefore, NRC staff conclude that the impacts from aquifer  
46 restoration in the Burdock and Dewey areas for the Class V injection well disposal option will be  
47 SMALL to MODERATE.

48  
49



#### 4.5.2.1.1.4 Decommissioning Impacts

After completion of ISR operations at the Dewey-Burdock ISR Project site, improperly plugged and abandoned wells could potentially impact aquifers above the production zone by providing hydrologic connections between aquifers. As part of the restoration and reclamation activities, all monitor, injection, and recovery wells at the proposed Dewey-Burdock site will be plugged and abandoned in accordance with SDDENR and EPA UIC regulations (see SEIS Section 2.1.1.1.5.2). In addition, the applicant will submit decommissioning plans, including detailed plans for plugging and abandoning wells, to NRC for review and approval.

The applicant has committed to implementing an emergency response plan to address cleanup of accidental spills and leaks that may occur during decommissioning. The applicant will implement the mitigation measures to control erosion and runoff. The applicant's NPDES permit will ensure that storm water runoff will not contaminate surface water or shallow groundwater. After removal of surface structures, the applicant will replace topsoil in previously disturbed areas, recontour the land surface to restore it to a surface configuration to blend with the natural terrain, and seed disturbed areas in wellfields in accordance with the NRC and SDDENR regulations (Powertech, 2009b). Access roads will be reclaimed and restored in a similar manner.

If this process is properly implemented following the NRC-approved decommissioning plan and the abandoned wells are properly isolated from the flow domain, the potential environmental impacts to groundwater from decommissioning for the Class V injection well disposal option will be SMALL.

#### 4.5.2.1.2 Disposal Via Land Application

If the permit for Class V injection wells cannot be obtained from EPA, the applicant proposes to dispose of liquid waste generated at the proposed Dewey-Burdock ISR Project by land application (see SEIS Section 2.1.1.2.4.2). Potential environmental impacts to groundwater from construction, operation, aquifer restoration, and decommissioning for the land application disposal option are discussed in the following sections.

##### 4.5.2.1.2.1 Construction Impacts

The construction of facilities, pipelines, wellfields, holding ponds, irrigation areas, and access roads in the construction phase of the land application disposal option will disturb 566 ha [1,398 ac] of land (Powertech 2010a). The total land disturbance will be 13.2 percent of the permit area. The locations of land application areas are shown in Figure 2.1-12. As described in SEIS Section 4.5.1.1.2.1, significant earthmoving activities will not be conducted to prepare land irrigation areas. All the ground surface disturbances and the resultant impacts to groundwater discussed in SEIS Section 4.5.2.1.1.1, except for those from construction of deep well disposal facilities, will be applicable during the construction phase of the proposed ISR project for the land application disposal option.

The applicant must obtain a Class III UIC permit, an NPDES permit, and a water appropriation permit before construction activities begin. Consumptive water use during construction will be limited to dust control, cement mixing, pump tests, delineation drilling, and well drilling and completion. The volume of drilling fluids and mud used during well installation will be limited. The introduction of drilling fluids to surficial (alluvial) aquifers at the proposed project might

1 occur during well drilling, but the amount will be minor because drilling mud is designed to seal  
2 boreholes to set the casing. As part of the applicant's Class III UIC permit, all production,  
3 injection, and monitoring wells will be cased and cemented to prevent the migration of fluids into  
4 and between USDWs in accordance with EPA regulations in 40 CFR 146.32. All wells will  
5 undergo mechanical integrity tests of the casing to ensure against well leakage prior to  
6 entering service.

7  
8 During well installation, drilling fluids and mud will be stored in temporary mud pits to control the  
9 spread of fluids, prevent soil contamination, and enhance evaporation. The applicant could  
10 choose alternative methods to manage drilling fluids that would further limit the potential impacts  
11 from the use of mud pits during well drilling activities (e.g., lining the mud pits with an  
12 impermeable membrane, offsite disposal of potentially contaminated drilling mud and other  
13 fluids, and the use of portable tanks or tubs to contain drilling mud and other fluids). The soil  
14 horizon found throughout most of the project area is clayey (see SEIS Section 3.4.2), which  
15 will minimize leakage from the mud pits and degradation of water quality of surficial and  
16 shallow aquifers.

17  
18 Stormwater runoff during construction will be controlled by the applicant's SWMP, which is part  
19 of the SDDENR-issued NPDES permit (see SEIS Section 4.5.1.1.1.1). Runoff from precipitation  
20 events or snowmelt on land application areas will be conveyed to catchment areas  
21 downgradient of land application areas and allowed to evaporate or infiltrate (Powertech,  
22 2012c). The NPDES permit sets limits on the amount of pollutants entering ephemeral  
23 drainages that may be in hydraulic communication with alluvial aquifers at the site. The NPDES  
24 permit will also specify mitigation measures and BMPs to prevent and clean up spills. The  
25 applicant has not yet submitted an application for an NPDES permit to SDDENR.

26  
27 Potential environmental impacts to groundwater during construction will be localized and limited  
28 to groundwater in near-surface (alluvial) aquifers. As described in SEIS Section 4.5.1.1.2.1 for  
29 the Class V injection well disposal option, impacts on local aquifers and domestic and livestock  
30 wells could be MODERATE if SDDENR denies the applicant's water appropriation permit to use  
31 groundwater from the Madison aquifer. In this case, identifying an alternative source of water or  
32 reducing pumping rates during construction will be necessary to reduce the impacts to shallow  
33 local aquifers and domestic and livestock wells from consumptive water uses to SMALL.  
34 However, near-surface aquifers do not serve as a water supply for domestic use or livestock  
35 watering within the project area (Powertech, 2009a). Therefore, NRC staff conclude that the  
36 impacts to groundwater during construction for the land application option at the proposed  
37 project will be SMALL.

#### 38 39 4.5.2.1.2.2 Operations Impacts

40  
41 Groundwater in near-surface (alluvial) and shallow aquifers, production aquifers, aquifers  
42 overlying and underlying the production aquifers, and deep aquifers could be impacted during  
43 ISR operations for the land application disposal option at the proposed Dewey-Burdock  
44 project. Potential environmental impacts on groundwater could result from consumptive water  
45 uses from these aquifers and potential water quality degradations in these aquifers during ISR  
46 operations. Such potential impacts are discussed in the following sections.

## 4.5.2.1.2.2.1 Shallow (Near-Surface) Aquifers

All the ground surface disturbances and the potential resultant impacts to groundwater in shallow (near-surface) aquifers discussed in SEIS Section 4.5.2.1.1.2.1, except for those from construction of Class V injection well disposal facilities, will be applicable during the operations phase of the proposed ISR project for the land application disposal option. Briefly, NRC staff find that near-surface (alluvium) aquifers in the project area occur only near creeks and are not being used for domestic, agricultural, or livestock watering. Near-surface and shallow aquifers are not hydraulically connected to the deep aquifers the applicant proposed for the Class V injection well disposal option. Shallow aquifers occur in the eastern portion of the Burdock area, where the Fall River aquifer crops out and/or is present in an unconfined condition. The applicant commits to refrain from extracting uranium in the shallow unconfined Fall River aquifer in the Burdock area; however, there will be wellfields in this area for extracting uranium from the partially saturated Chilson sandstone. Moreover, the applicant is required to have leak detection, spill response, and cleanup programs as part of the NPDES permit. The applicant commits to implementing a spill prevention and cleanup plan that includes rapid response cleanup and remediation programs to minimize impacts on soils and groundwater. In addition, preventive measures, such as NRC-required mechanical integrity testing and UIC permits obtained from EPA, will limit the likelihood of well integrity failure during operations, and hence, will minimize the risk of process fluid leaks from operational wells into aquifers.

The applicant's proposed land irrigation areas in the Dewey area and in the Burdock area (see Figure 2.1-12) cover approximately 509 ha [1,258 ac] of the permitted land. In the Dewey area, the proposed land application sites are over confined portions of the Fall River and Chilson aquifers and away from their outcrop areas. However, in the Burdock area, the easternmost irrigation fields are situated over or close to unsaturated portions and outcrops of the Fall River aquifer (Figures 2.1-12 and 3.5-7). Therefore, treated liquid waste applied to the easternmost irrigation fields may locally recharge the Fall River aquifer at and near its outcrop areas. For the rest of the proposed land application sites, the impacts to groundwater would be localized and limited to near-surface (alluvial) aquifers, if they exist underneath the proposed irrigation fields, because alluvial aquifers are separated from the underlying Fall River aquifer by the low permeability, 61-m [200-ft]-thick Skull Creek shale. As discussed in SEIS Section 4.5.2.1.1.2.1, the applicant has proposed to remove all existing domestic wells within the project area from private use prior to ISR operations (Powertech, 2011).

As described in SEIS Section 4.4.1.2.2, licensees must ensure that radioactive constituents in liquid effluents applied to land application areas are within allowable release limits (NRC, 2009a). The applicant proposes to treat liquid wastes applied to land application areas so they meet NRC release limit criteria for radiological contaminants, as referenced in 10 CFR Part 20, Appendix B (Standards for Protection Against Radiation) (Powertech, 2011). SDDENR also regulates land application of treated wastewater, requiring the applicant to obtain a GDP and comply with applicable state discharge requirements for land application of treated wastewater. State regulations also prohibit surface runoff from permitted land application areas. Therefore, the NRC staff conclude that applied treated effluents on land application sites will not introduce any additional contamination to the soil or surface runoff.

Due to existing hydrological conditions at the site, and the permitting and regulatory requirements the applicant must meet, NRC staff conclude that potential environmental impacts to groundwater in shallow aquifers from operations for the land application disposal option will be SMALL.

**4.5.2.1.2.2 Operations Impacts to Production and Surrounding Aquifers**

The potential environmental impact to groundwater in the production and other surrounding aquifers is related to consumptive water use and groundwater quality.

Water Consumptive Use

The potential impacts to groundwater in the production and surrounding aquifers due to consumptive water uses—impacts the staff discusses in SEIS Section 4.5.2.1.1.2.2—will also apply during ISR operations for the land application liquid waste disposal option. To summarize, in June 2012 the applicant submitted a water appropriation permit for use of Madison aquifer. If SDDENR approves the permit application, NRC staff conclude that the impacts on local aquifers and domestic and livestock wells from consumptive water use during ISR operations will be SMALL. However, if the water appropriation permit is denied, the impacts will be MODERATE. In this case, identification of an alternative source of groundwater or a reduction in pumping rates to meet operational water requirements will be necessary to reduce the impacts to SMALL. In addition, the applicant will monitor and provide alternative sources of water to landowners in the event of significant drawdown to domestic wells within and adjacent to the proposed project area. After production and restoration are complete and groundwater withdrawals are terminated at the Dewey-Burdock ISR Project, groundwater levels will tend to recover with time. Land application of treated liquid wastes will not require additional consumptive water demands. Therefore, NRC staff conclude that the overall environmental impacts on local aquifers, production aquifers, and domestic and livestock wells from consumptive use during operations for the land application option will be SMALL.

Excursions and Groundwater Quality

Potential impacts to groundwater quality from excursions in the production and surrounding aquifers during ISR operations (discussed in SEIS Section 4.5.2.1.1.2.2) will also be applicable during ISR operations for the land application liquid waste disposal option. Impacts from horizontal excursions will be SMALL because (i) uranium-bearing production aquifers will be exempted as USDWs through the EPA-issued aquifer exemption in accordance with the criteria under 40 CFR 146.4, (ii) the applicant will be required to submit wellfield operational plans for NRC and EPA approval, (iii) inward hydraulic gradients will be maintained to ensure groundwater flow is toward the production zone, and (iv) the applicant's NRC-mandated groundwater monitoring plan will ensure that excursions are detected and corrected. Impacts from vertical excursions will be SMALL because (i) uranium-bearing production zones in the Fall River and Chilson aquifers are hydrologically isolated from adjacent aquifers by thick, low permeability shale layers (i.e., the overlying Skull Creek Shale and underlying Morrison Formation); (ii) a prevailing upward hydraulic gradient occurs across the major aquifers; (iii) the applicant's required mechanical integrity testing program will mitigate the impacts of potential vertical excursions resulting from borehole failure; and (iv) the applicant commits to properly plugging and abandoning or mitigating any previously drilled wells and exploration holes that may potentially impact the control and containment of wellfield solutions within the proposed project area. Moreover, at the end of ISR operations, the applicant must to initiate aquifer restoration in the production aquifers (i.e., Fall River and Chilson aquifers) to return groundwater to Commission-approved background levels or to NRC-approved alternative water quality levels. Therefore, NRC staff conclude the impact to groundwater quality from potential horizontal and vertical excursions will be SMALL.

1 The applicant proposes land irrigation areas in both the Dewey and Burdock areas of the project  
2 (Figure 2.1-12). NRC staff find that no additional contamination will be introduced into the  
3 production and surrounding aquifers due to land application of effluents, because (i) the  
4 applicant will treat process effluents to meet NRC release limit criteria for radiological  
5 contaminants as referenced in 10 CFR Part 20, Appendix B, Table 2, Column 2 and applicable  
6 SDDENR release limit requirements before applying them onto irrigation fields and (ii) except for  
7 the easternmost portion of the irrigation fields in the Burdock area, the irrigation fields are  
8 underlain by low permeability shale layers (Skull Creek). Any recharge to the Fall River aquifer  
9 from land application of liquid wastes during proposed ISR operations would be remediated as  
10 part of restoration activities. As discussed in SEIS Section 4.5.2.1.1.2.1, the applicant has  
11 proposed to remove all existing domestic wells within the project area from private use prior to  
12 ISR operations (Powertech, 2011). Therefore, NRC staff conclude that the overall  
13 environmental impacts to production and surrounding aquifers from potential horizontal and  
14 vertical excursions during ISR operations for the land application option will be SMALL.

#### 15 16 4.5.2.1.2.2.3 Operations Impacts to Deep Aquifers Below the Production Aquifers

17  
18 Production zone aquifers at the Dewey-Burdock site are separated from deeper aquifers by a  
19 continuous and hydrologically impermeable 30-m [100-ft]-thick section of the Morrison  
20 Formation. In addition, there are no known unplugged or improperly abandoned wells or  
21 exploratory drills extending from ground surface to aquifers below the Morrison Formation within  
22 the project area. Therefore, the NRC staff conclude that, for the land application disposal  
23 option, environmental impacts to groundwater in the deep aquifers below the production  
24 aquifers from ISR operations will be SMALL.

#### 25 26 4.5.2.1.2.3 Aquifer Restoration Impacts

27  
28 As discussed in the GEIS, the impacts of consumptive groundwater use during aquifer  
29 restoration are generally greater than during ISR operations (NRC, 2009a). This is particularly  
30 true during the sweep phase, when a larger volume of groundwater is generally withdrawn from  
31 the production aquifer. During the sweep phase, groundwater is not reinjected into the  
32 production aquifer and all withdrawals should be considered consumptive. Larger withdrawals  
33 will produce larger drawdowns in the production aquifer, resulting in a greater impact on the  
34 yields of nearby wells.

35  
36 As described in SEIS Section 2.1.1.1.4.1.2, the primary method of aquifer restoration for the  
37 land application disposal option will be groundwater sweep with Madison Formation water  
38 injection (Powertech, 2011). In this method, water from production zones will be pumped to the  
39 Burdock central processing plant or Dewey satellite facility for removal of uranium and other  
40 dissolved species in ion exchange columns. The partially treated water undergoes radium  
41 removal in the radium settling ponds and then disposal in land application areas. The typical  
42 liquid waste flow rates for the land application option will be approximately 2,070 Lpm [547 gpm]  
43 during concurrent uranium production and aquifer restoration and approximately 1,892 Lpm  
44 [500 gpm] during aquifer restoration alone. None of the water recovered from the wellfields will  
45 be reinjected back into the wellfields. Instead, makeup water from the Madison Formation will  
46 be injected into the wellfields at a flow rate sufficient to maintain the restoration bleed, which will  
47 typically be 1 percent of the restoration flow rate (Powertech, 2011).

48  
49 As described in SEIS Section 4.5.2.1.1.2.2, the applicant submitted a water appropriation permit  
50 to SDDENR in June 2012 for groundwater use from the Madison aquifer. However, if the

1 applicant cannot secure a water appropriation for use of Madison aquifer water, the applicant  
2 will have to either identify an alternative source of water to meet aquifer restoration water  
3 requirements or reduce pumping rates to meet the estimated sustainable pumping rate of  
4  $0.15 \text{ m}^3/\text{min}$  [40 gpm] from the Inyan Kara Group aquifers (see SEIS Section 4.5.2.1.1.2.2.).  
5 Based on the typical liquid waste flow rates stated in the previous paragraph, reducing the  
6 pumping rate to  $0.15 \text{ m}^3/\text{min}$  [40 gpm] will significantly extend the aquifer restoration phase.  
7 After production and restoration are complete and groundwater withdrawals are terminated,  
8 groundwater levels will tend to recover with time. Thus, the potential long-term environmental  
9 impact from consumptive use during the restoration phase for the land application disposal  
10 option will be SMALL.

11  
12 The applicant will implement a restoration monitoring plan to detect and correct horizontal and  
13 vertical excursions during aquifer restoration (see SEIS Section 2.1.1.1.4.2). Continued  
14 implementation of a leak-detection and spill-cleanup program and preventive measures, such  
15 as well mechanical integrity testing, will result in SMALL impacts to alluvial or shallow  
16 (near-surface) aquifers. Moreover, restoration to Commission-approved background  
17 conditions (or NRC-approved water quality standards) in accordance with NRC license  
18 conditions will ensure that groundwater within the exemption boundary will not threaten  
19 surrounding groundwater.

20  
21 Before NRC terminates an ISR source material license, the licensee must demonstrate that  
22 there will be no long-term impacts to USDWs. NRC review and approval of the wellfield  
23 restoration will ensure that the restoration standards are met and that they are protective of  
24 public health and the environment. Although consumptive water use will increase during aquifer  
25 restoration, groundwater levels will tend to recover with time after-aquifer restoration activities  
26 are complete. As described in SEIS Section 4.5.2.1.1.3, drawdown-induced potential migration  
27 of radiological and hazardous contaminants from abandoned open pit mines (e.g., Triangle pit  
28 mine) in the northeastern part of the Burdock area into the hydraulically connected Chilson  
29 aquifer during aquifer restoration may adversely impact aquifer restoration goals. Therefore,  
30 NRC staff conclude that the impacts from aquifer restoration in the Burdock and Dewey areas  
31 for the land application disposal option will be SMALL to MODERATE.

#### 32 33 4.5.2.1.2.4 Decommissioning Impacts

34  
35 All impacts to groundwater discussed in SEIS Section 4.5.2.1.1.4 for the Class V injection well  
36 disposal option are applicable during the decommissioning phase for the land application liquid  
37 waste disposal option. The applicant is committed to implement an emergency response plan  
38 to address cleanup of accidental spills and leaks that may occur during decommissioning. The  
39 applicant will implement mitigation measures to control erosion and runoff. The NPDES permit  
40 will ensure that stormwater runoff will not contaminate groundwater. After removal of surface  
41 structures, the applicant will replace topsoil in previously disturbed areas, recontour the land  
42 surface to restore it to a surface configuration to blend with the natural terrain, and seed  
43 disturbed areas in wellfields in accordance with the NRC and SDDENR regulations (Powertech,  
44 2009b). Access roads will be reclaimed and restored in a similar manner.

45  
46 As part of the restoration and reclamation activities, all monitor, injection, and recovery wells  
47 at the proposed Dewey-Burdock site will be plugged and abandoned in accordance with  
48 SDDENR and EPA UIC regulations (see SEIS Section 2.1.1.1.5.2). The applicant will submit  
49 decommissioning plans, including detailed plans for plugging and abandoning wells, to NRC for  
50 review and approval. If this process is properly implemented and the abandoned wells are

1 properly isolated from the flow domain, the potential environmental impacts to groundwater from  
2 decommissioning for the land application disposal option will be SMALL

#### 3 4 4.5.2.1.3 Disposal Via Combination of Class V Injection and Land Application

5  
6 If the applicant obtains the permit for Class V injection from EPA, but the capacity of the Class V  
7 injection wells is insufficient to dispose of all liquid effluents generated at the Dewey-Burdock  
8 ISR project, the applicant will dispose of liquid waste by a combination of Class V injection wells  
9 and land application (SEIS Section 2.1.1.1.2.4.3). In this case, land application facilities and  
10 infrastructures will be constructed, operated, restored, and decommissioned as needed, based  
11 on the produced volume of liquid effluents exceeding the disposal capacity of the Class V  
12 injection wells (Powertech, 2011).

13  
14 If the capacity of Class V injection wells is sufficient to dispose of all liquid wastes, there will be  
15 no need for land application sites, facilities, and infrastructures for irrigation. In this case,  
16 environmental impacts will be avoided to shallow aquifers underneath the irrigation fields, if they  
17 exist, in the Burdock and Dewey areas and to the Fall River aquifer at its outcrops at and near  
18 the easternmost irrigation fields in the Burdock area. Therefore, the resultant environmental  
19 impacts to near-surface aquifers will be smaller than when partially or fully developed land  
20 application sites are needed for disposal of liquid wastes. Similarly, environmental impacts to  
21 shallow aquifers during ISR operations and aquifer restoration will be larger for fully developed  
22 irrigation sites than partially developed irrigation sites. However, because shallow aquifers are  
23 of limited extent and will be removed from domestic use prior to ISR operations, NRC staff  
24 determine that impacts to shallow aquifers as a result of ISR operations with the combined  
25 Class V injection well and land application option will be SMALL.

26  
27 Impacts to the production aquifers and groundwater wells within the project area from ISR  
28 operations and aquifer restoration with the combined disposal option will be similar to those for  
29 the Class V injection well disposal option alone or for the land application option alone, because  
30 (i) the production aquifers are overlain and underlain by a thick, hydrologically impermeable  
31 shale layer over most of the project site, except for the eastern part of the Burdock area; (ii) the  
32 applicant is committed to restricting ISR operations to confined aquifers; and (iii) process  
33 effluents will be treated before they are applied on irrigation fields, and hence, will not introduce  
34 additional contamination to the Fall River aquifer at or near its outcrop areas.

35  
36 Impacts to the deep aquifers from ISR operations and aquifer restoration with the combined  
37 Class V injection well and land application option will be similar to those for the Class V injection  
38 well disposal option alone, because aquifers proposed for deep well injection do not have  
39 hydrogeologic interaction with near-surface or production aquifers.

40  
41 Therefore, NRC staff conclude that the environmental impacts of the combined Class V injection  
42 well and land application option for each phase of the proposed Dewey-Burdock ISR Project will  
43 be bounded by the significance of environmental impacts of the Class V injection well option  
44 and the land application option, as summarized in Table 4.5-2.

#### 45 46 **4.5.2.2 No-Action (Alternative 2)**

47  
48 Under the No-Action alternative, NRC will not license the Dewey-Burdock ISR Project and BLM  
49 will not approve the applicant's modified plans and operations. The Burdock central processing  
50

1

**Table 4.5-2. Significance of Environmental Groundwater Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL to MODERATE If groundwater pumping causes mobilization and migration of radiological and hazardous contaminants from abandoned open pit mines into Fall River aquifer, impacts will be MODERATE	SMALL to MODERATE If groundwater pumping causes mobilization and migration of radiological and hazardous contaminants from abandoned open pit mines into Fall River aquifer, impacts will be MODERATE	SMALL to MODERATE If groundwater pumping causes mobilization and migration of radiological and hazardous contaminants from abandoned open pit mines into Fall River aquifer, impacts will be MODERATE
Decommissioning	SMALL	SMALL	SMALL
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.			

2  
3  
4  
5  
6  
7  
8  
9  
10  
11

plant and the Dewey satellite facility with their associated infrastructure (i.e., access roads and piping) will not be constructed. Furthermore, wellfields, surface impoundments, Class V injection wells, and land application sites will not be developed or operated. Lixiviant will not be injected into the production aquifer. Consumptive use of groundwater will not occur. Liquid effluent waste will not be generated; therefore, there would be no threat to groundwater quality. Wells that have already been constructed will be plugged and abandoned to prevent potential degradation and contamination. The current land uses on and near the project area, including grazing lands and recreational activities, will continue. Consequently, the No-Action alternative will result in no impacts to groundwater.

12

**4.6 Ecological Resources Impacts**

13

As discussed in GEIS Section 4.4.5, potential environmental impacts to ecological resources, including both flora and fauna, could occur during all phases of the ISR facility lifecycle (NRC, 2009a). Impacts could include removal of vegetation from the site (with the associated reduction in wildlife habitat and forage productivity and an increased risk of soil erosion and weed invasion); modification of existing vegetative communities as a result of site activities; loss of sensitive plants and habitats; and the potential spread of invasive species and noxious weed populations. Impacts to wildlife could include loss, alteration, and/or incremental fragmentation of habitat; displacement of and stresses on wildlife; and direct and/or indirect mortalities. Aquatic species could be affected by disturbance of stream channels, increases in suspended sediments, fuel spills, and habitat reduction.

14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26



### GEIS Construction Phase Summary

As discussed in GEIS Section 4.4.5.1, during construction, terrestrial vegetation may be affected through (i) the removal of vegetation from the milling site (and associated reduction in wildlife habitat and forage productivity and an increased risk of soil erosion and weed invasion); (ii) the modification of existing vegetative communities; (iii) the loss of sensitive plants and habitats as a result of clearing and grading; and (iv) the potential spread of invasive species and noxious weed populations. (NRC, 2009a)

The percentage of vegetation removed and land disturbed by construction activities evaluated in the GEIS (from less than 1 percent up to 20 percent) would cause a SMALL impact compared to the total permit area and surrounding plant communities. The GEIS evaluated ISR facilities that ranged in facility size from 1,000 to 7,000 ha [2,471 to 17,297 ac] with disturbed area estimates of 49 to 753 ha [120 to 1,860 ac]. Additionally, NRC staff concluded in the GEIS that clearing of herbaceous vegetation in an open grassland or shrub steppe community was expected to have a short-term SMALL impact, given the rapid colonization of annual and perennial species in the disturbed areas. The clearing of wooded areas could have a long-term impact given the pace of natural succession, and such impacts could range from SMALL to MODERATE, depending on the amount of surrounding woody areas. Noxious weeds would be expected to be controlled with appropriate spraying techniques, and therefore impacts will be SMALL. (NRC, 2009a)

GEIS evaluation of impacts during construction included terrestrial wildlife that may be affected through (i) habitat loss or alteration and incremental habitat fragmentation, (ii) displacement of wildlife from project construction, and (iii) direct and/or indirect mortalities from project construction. NRC staff noted in the GEIS that construction impacts to wildlife habitat will be minimized with the timely reseeded of disturbed areas following construction. In general, wildlife species will be expected to disperse from the proposed license area as construction activities approached, although smaller, less mobile species could perish during clearing and grading. Habitat fragmentation, temporary displacement, and direct or indirect mortalities would be possible; thus, the potential impact on terrestrial wildlife from construction could range from SMALL to MODERATE. (NRC, 2009a)

### GEIS Operations Phase Summary

As discussed in GEIS Section 4.4.5.2, wildlife habitats could be altered by operations (fencing, traffic, and noise), and limited wildlife mortalities could occur due to conflicts between species habitat and operations. Fencing could limit access to crucial wintering habitat and water. South Dakota does not specify fencing construction. However, SDGFP field and regional personnel evaluate fencing construction design on a case-by-case basis, which may minimize impediments to big game movement (SDGFP, 2008). NRC staff noted in the GEIS that potential impacts to vegetation may occur as a result of land application of wastewater, increasing vegetation growth and/or negatively affecting vegetation from the build-up of salts in the soils. Licensee requirements to monitor and control irrigated areas would limit impacts to ensure release limits are met. (NRC, 2009a)

As further indicated in GEIS Section 4.4.5.2, temporary contamination or alteration of soils could occur from operational leaks and spills and possibly from transportation or land application of treated wastewater. However, detection and response to leaks and spills (e.g., soil cleanup) and eventual survey and decommissioning of all potentially impacted soil would limit the magnitude of impacts to terrestrial ecology. The implementation of spill detection and response

1 plans would mitigate impacts to aquatic species from spills around well heads and from pipeline  
2 leaks. Mitigation measures, such as perimeter fencing, netting, leak detection and spill  
3 response plans, and periodic wildlife surveys, would also limit the potential impact, and the  
4 NRC staff concluded in the GEIS that the impact to wildlife and vegetation would be SMALL.  
5 (NRC, 2009a)  
6

#### 7 GEIS Aquifer Restoration Phase Summary

8

9 GEIS Section 4.4.5.3 describes potential impacts to ecological resources during the  
10 aquifer restoration phase that are similar to operations. These impacts could include habitat  
11 disruption, spills and leaks, and animal mortalities. Because existing (in-place) infrastructure  
12 would be used during aquifer restoration, little additional ground disturbance would occur, and  
13 therefore potential impacts will be SMALL. (NRC, 2009a)  
14

#### 15 GEIS Decommissioning Phase Summary

16

17 NRC staff concluded in the GEIS that land use impacts from decommissioning an ISR facility  
18 would be comparable to, but overall less than, those described for construction and would  
19 further decrease as decommissioning and reclamation proceed. As described in GEIS  
20 Section 4.4.5.4, during decommissioning and reclamation, there would be temporary land  
21 disturbance from soil excavation, recovery and removal of buried piping, and demolition and  
22 removal of structures. Wildlife would be temporarily displaced, but would be expected to return  
23 after decommissioning and reclamation are complete and vegetation and habitat are  
24 reestablished. Wildlife could come in conflict with heavy equipment or vehicles.  
25 Decommissioning and reclamation activities could also result in temporary increases in  
26 sediment load in local streams, but aquatic species would recover quickly as sediment load  
27 decreases. However, revegetation and recontouring would restore habitat previously altered  
28 during construction and operations. Land that is used for irrigation would be included in  
29 decommissioning surveys to ensure potentially impacted (contaminated) areas would be  
30 appropriately characterized and remediated, as necessary, in accordance with NRC regulations.  
31 As a result, the potential impacts to ecological resources during decommissioning are expected  
32 to be SMALL. (NRC, 2009a)  
33

34 Potential environmental impacts to ecological resources from construction, operations, aquifer  
35 restoration, and decommissioning for the proposed Dewey-Burdock ISR Project are provided in  
36 the following sections.  
37

#### 38 **4.6.1 Proposed Action (Alternative 1)**

39

40 The staff's ecological impact analysis for the proposed Dewey-Burdock ISR Project site involves  
41 evaluating interactions between the proposed project activities and the local animals and habitat  
42 that could be affected by the project. If an applicant or licensee adhered to recommended  
43 standard management practices from appropriate agencies, the potential ecological impacts  
44 could be mitigated as discussed in the following sections. NRC staff correspondence is ongoing  
45 throughout the SEIS process for the proposed project. BLM's 1986 Regional Management Plan  
46 (RMP) for South Dakota is currently being revised. The most recent, working BLM mitigation  
47 and reclamation guidelines (BLM, 2012a) were made available to NRC staff and are  
48 incorporated into this SEIS.  
49

1 ISR facility lifecycle phases can have direct and indirect impacts on local habitat and wildlife  
2 populations. These impacts are both short term (lasting until successful reclamation is  
3 achieved) and long term (persisting beyond successful completion of reclamation). However,  
4 long-term impacts are not expected to be substantial due to the relatively limited habitat  
5 disturbance associated with the ISR extraction method. Because of increased traffic levels and  
6 physical disturbance during the construction phase, injury or mortality to wildlife will be more  
7 likely than during any of the other waste disposal options. Plant and animal community  
8 alteration will be greatest under the land application option because of the large amount of  
9 land {about 426 ha [1,052 ac]} that would receive treated liquid waste annually from April  
10 through October.

#### 11 12 **4.6.1.1 Disposal Via Class V Injection Wells**

13  
14 As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid  
15 wastes is deep well disposal via Class V injection wells. Potential environmental impacts on  
16 ecology from construction, operations, aquifer restoration, and decommissioning associated  
17 with the deep Class V injection well disposal option at the proposed Dewey-Burdock ISR Project  
18 are discussed in the following sections.

##### 19 20 4.6.1.1.1 Construction Impacts

21  
22 The construction phase of the proposed Dewey-Burdock ISR Project could potentially impact  
23 ecological resources from clearing vegetation; constructing the central processing plant and the  
24 satellite facility; developing the holding ponds and wellfields, including drilling wells and laying  
25 pipeline; building header houses; and constructing access roads. Construction activities will  
26 also result in an increase in vehicular traffic and the potential for animal collisions with vehicles.  
27 There will also be a temporary increase in dust from construction, some of which would deposit  
28 on vegetation, both on- and offsite, affecting the forageability for obligate species. However,  
29 vegetation in this naturally dusty, arid region will likely have adapted to moderate, temporary  
30 increases of dust coverage. Potential impacts on wildlife from dust adjacent to access roads  
31 and disturbed land near the plant site will be limited by applicant dust control measures, such as  
32 water application (Powertech, 2009a). However, fugitive dust will still be generated from travel  
33 on unpaved roads and disturbed land (see fugitive dust analysis in SEIS Sections 4.7.1.1.1 and  
34 4.7.1.2.1), and therefore localized areas will likely experience short-term and intermittent dust  
35 accumulation potentially affecting wildlife.

36  
37 The applicant's implementation of the road and right-of-way, fencing and netting, post-  
38 construction restoration/reclamation measures, as well as those measures intended to reduce  
39 human disturbance and incidental wildlife mortalities, will minimize impacts on wildlife. The  
40 standard construction mitigation measures including perimeter fencing, netting, leak detection  
41 and spill response plans, erosion controls, and other BMPs described elsewhere in the SEIS will  
42 also minimize overall ecological impacts. BLM (2012b,c,d) has determined wildlife timing  
43 stipulations for certain species to protect their populations and habitats (in the table in the  
44 Raptors section). The applicant plans to initiate construction activities outside the  
45 recommended time restriction periods (Powertech, 2009a); however, activities will continue year  
46 round within the area of approved disturbance (e.g., wellfield patterns, roads, plant areas). BLM  
47 South Dakota wildlife timing restrictions are included in the table in the Raptors section.

48  
49

4.6.1.1.1.1 Construction Impacts on Terrestrial Ecology

The terrestrial ecology of the proposed Dewey-Burdock ISR Project is discussed in the following sections. Potential impacts to vegetation and wildlife from construction for the deep Class V injection well disposal option are described in Sections 4.6.1.1.1.1 and 4.6.1.1.1.1.2, respectively.

4.6.1.1.1.1.1 Construction Impacts on Vegetation

For the deep Class V injection well disposal option, the applicant estimates that the land disturbed will be approximately 42 ha [103 ac] excluding wellfields (Powertech, 2010a). Potential wellfields would disturb an additional 57 ha [140 ac]. The wellfields, Burdock central plant, Dewey satellite plant, and deep Class V injection wells at the proposed project will be located primarily within the upland grassland and greasewood shrubland vegetation communities, and smaller disturbed areas within the big sagebrush shrubland, silver sagebrush shrubland, and ponderosa pine woodland communities. Table 4.6-1 provides the land disturbance by vegetation type for the Class V injection well disposal option. Figure 4.6-1 depicts the planned activities in relation to the vegetation communities.

Direct impacts from construction activities at the proposed project for the deep Class V injection well disposal option will include vegetation disturbance (modification of structure, species composition, and areal extent of cover types) of about 98 ha [243 ac]. Indirect impacts will include the short-term and long-term increased potential for noxious species [e.g., Canada thistle (*Cirsium arvense*), houndstongue (*Cynoglossum officinale*), and field bindweed (*Convolvulus arvensis*)] invasion, establishment, and expansion; potential soil erosion; shifts in species composition or changes in vegetative density; reduction of wildlife habitat; reduction in livestock forage; and changes in visual aesthetics.

**Table 4.6-1. Disturbed Land by Vegetation Type for Dewey-Burdock Deep Class V Injection Well Disposal Option**

Activity	Vegetation Community (Hectares [acres])							Total Disturbed Area Hectares [acres]
	Big Sage-Brush Shrub-Land	Cotton-wood Gallery	Grease-wood Shrub-land	Mine Pit	Ponderosa Pine Wood-land	Silver Sage-Brush Shrub-land	Upland Grass-land	
Site Facilities	0.8 [2]	0	3.2 [8]	0	0.4 [1]	0	5.7 [14]	9.7 [24]
Trunklines	2.4 [6]	0	2.4 [6]	0	1.2 [3]	0.8 [2]	3.2 [8]	10.1 [25]
Access Roads	2.0 [5]	0	2.0 [5]	0.4 [1]	0.8 [2]	0.4 [1]	2.4 [6]	8.5 [21]
Well Fields	8.5 [21]	0	18.2 [45]	2.0 [5]	8.5 [21]	4.4 [11]	15.0 [37]	56.6 [140]
Impound-ments	0	0	4.1 [10]	0	0	0	9.3 [23]	13.3 [33]
Totals	13.8 [34]	0	29.9 [74]	2.0 [5]	10.9 [27]	5.7 [14]	36.0 [89]	98.3 [243]

Source: Powertech 2012a

30  
31

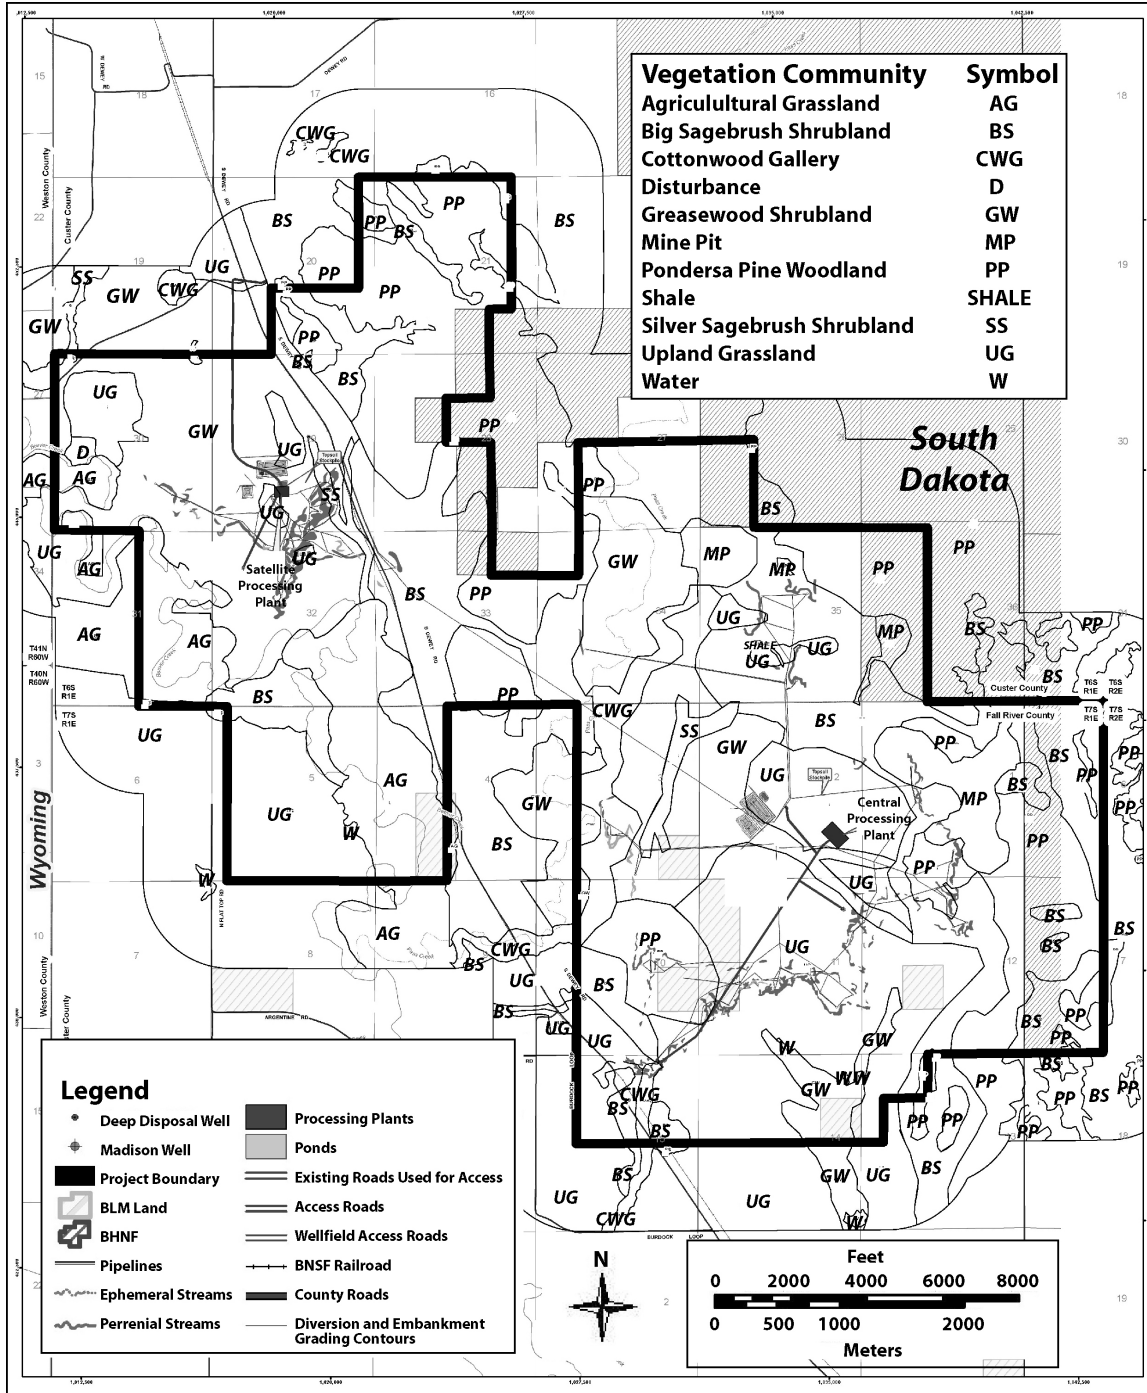


Figure 4.6-1. Map of Dewey-Burdock Planned Facilities and Vegetation Communities for the Deep Class V Injection Well Disposal Option (Source: Powertech, 2012a)

1  
2  
3

1 As previously stated, the construction activities, increased soil disturbance, and increased traffic  
2 during construction for the Class V injection well disposal option could stimulate the introduction  
3 and spread of undesirable, invasive, nonnative species within the proposed license area. One  
4 state- and two county-listed noxious weeds, Canada thistle and field bindweed, respectively,  
5 were observed in the proposed project area during the applicant-conducted baseline surveys.  
6 These species are perennial and may quickly invade large areas depending on the season of  
7 the year. The applicant has proposed mitigation measures, which include conducting weed  
8 control as needed to limit the spread of noxious, invasive, and nonnative species on disturbed  
9 areas (Powertech, 2009a). If the applicant uses herbicides as a weed control method, the  
10 applicant should take precautions to minimize potential impact to the environment. Herbicides  
11 can drift to unintended areas due to wind and soil erosion, eliminate desired species from an  
12 area, and leave soil susceptible to erosion if not used and managed properly. For example,  
13 herbicides formulated with surfactant are toxic to fish and aquatic life and should not be used in  
14 or near water (Zollinger, 2012). Plant and wildlife species could be unintentionally impacted  
15 during normal application from indirect contact of herbicide residue and consumption of prey  
16 affected during application. North Dakota State University published a 2012 weed control guide  
17 (Zollinger, 2012) and associated circulars with recommended techniques, herbicides, and  
18 precautions to control regional noxious, invasive, and nonnative vegetative species that the  
19 applicant could employ. The U.S. Geological Survey (USGS) recommends weed control  
20 techniques in sagebrush habitats that are optimal for Greater sage-grouse (*Centrocercus*  
21 *urophasianus*) populations (USGS, 2009). Applicant use of weed control techniques that  
22 incorporate BLM mitigation and reclamation guidelines (BLM, 2012a) would reduce potential  
23 impacts to wildlife and desirable vegetation from use of herbicides.

24  
25 In areas where vegetation was removed, the applicant has committed to reestablish vegetation  
26 concurrently with construction activities according to NRC licensee requirements to conduct  
27 reclamation under an approved site reclamation plan (Powertech, 2009a). For the proposed  
28 Dewey Conveyor project, BLM concluded that reestablished vegetation in this region often  
29 consists of annual forbs and native cool grasses with few shrubs for the first couple of years  
30 (BLM, 2009). Reestablishment of herbaceous plant cover can usually be completed within a few  
31 years, but reestablishment of shrubland communities may take much longer.

32  
33 If active revegetation measures are used with Natural Resource Conservation Service (NRCS)-,  
34 SDDENR-, and BLM-approved seed mixtures, rapid colonization by annual and perennial  
35 herbaceous species in the disturbed staging areas and rights-of-way would restore most  
36 vegetative cover within the first growing season (NRC, 2009a). On BLM land, BLM reclamation  
37 guidelines will be required to provide for stable soils and achieve vegetation cover; however, the  
38 exact species is not necessarily required, similar to the predisturbance cover (BLM, 2012a).  
39 BLM could require the applicant to reseed areas where initial seeding was not successful.  
40 Reclamation and reseeding, as soon as practicable following project completion, in  
41 accordance with a reclamation plan will ensure that vegetative communities are restored as  
42 quickly as possible. To stabilize soils and support the ecosystem, the applicant commits to  
43 reestablishing, as soon as conditions allow, vegetation in disturbed areas with the BLM-,  
44 NRCS-, and SDDNER-approved native seed mixture and rate provided in Table 4.6-2  
45 (Powertech, 2009a, 2012b).

46  
47 Construction of wellfields will be phased and some vegetation would be affected, but impacts  
48 will not generally affect a sizeable segment of any species' population. In general, vegetation  
49 development in the region is expected to be sparse due to the limited amount of annual  
50 precipitation. To mitigate the potential impact to vegetation, disturbed areas will be both

51

**Table 4.6-2. Reclamation Seed Mixture**

Reclamation Seed Mixture Species*	Drill Seeding Rate {kg/ha [lb/ac]}	Broadcast Seeding Rate {kg/ha [lb/ac]}
Western Wheatgrass ( <i>Elymus smithii</i> )	2.17 [1.94]	5.43 [4.85]
Sideoats Grama ( <i>Bouteloua curtipendula</i> )	1.62 [1.45]	4.06 [3.62]
Green Needlegrass ( <i>Nassella viridula</i> )	1.62 [1.45]	4.06 [3.62]
Slender Wheatgrass ( <i>Elymus trachycaulus</i> )	1.58 [1.41]	3.94 [3.52]
Little Bluestem ( <i>Schizachyrium scoparium</i> )	1.02 [0.91]	2.54 [2.27]
Totals	8.02 [7.16]	20.06 [17.90]
*Pure live seed Source: Powertech, 2012b		

1 temporarily and permanently revegetated and tilled where soil has been compacted to promote  
 2 vegetation growth in accordance with SDDENR regulations and the mine permit (Powertech,  
 3 2009a). Some encroachment from native populations and/or establishment of early  
 4 successional species bordering disturbed areas will also be expected, which would facilitate the  
 5 revegetation process. Additionally, the applicant will take mitigative measures to minimize the  
 6 spread of noxious weeds (Powertech, 2009a).  
 7  
 8

9 No federally listed threatened or endangered plant species are known to occur within the  
 10 proposed project area (FWS, 2010). Therefore, the NRC staff conclude the impact on federally  
 11 listed plant species during the construction phase will be SMALL, based on the foregoing  
 12 analysis that about 98 ha [243 ac] of vegetation will be disturbed primarily in the upland  
 13 grassland and greasewood shrubland vegetation communities. The applicant commits to  
 14 mitigation measures that will reduce the overall impacts, but vegetation could still experience  
 15 long-term impacts especially within the sagebrush shrubland communities. The NRC staff  
 16 conclude construction impacts on vegetation for the deep Class V injection well disposal option  
 17 will be SMALL.  
 18

19 4.6.1.1.1.2 Construction Impacts on Wildlife

20  
 21 As described in SEIS Section 1.2, the total amount of BLM-managed land expected to be  
 22 disturbed by the applicant over the life of the proposed project is 4.7 ha [11.63 ac]. The majority  
 23 of the disturbed BLM land consists of the upland grassland vegetation community southwest of  
 24 the central processing plant in the Burdock area. A proposed access road will border BLM land in  
 25 the greasewood shrubland vegetation community. A proposed “restoration line” would traverse a  
 26 corner of BLM land in the big sagebrush shrubland vegetation community outside of the ISR  
 27 project boundary.  
 28

29 Planned land disturbance of about 98 ha [243 ac] during construction will be noncontiguous  
 30 acres composed of the Burdock central plant, the Dewey satellite plant, and associated  
 31 storage facilities; deep Class V disposal wells; wellfields and the associated infrastructure  
 32 (e.g., pipelines and header houses); and new access roads. Most of the habitat disturbance will  
 33 consist of scattered, confined drill sites for wells in the wellfields, which will not result in large

1 expanses of habitat being dramatically transformed from their original character as in other  
2 surface mining operations.

3  
4 Indirect impacts could occur from displacement of wildlife from increased noise, traffic, or other  
5 disturbances associated with the development of the proposed project and from small  
6 reductions in existing or potential cover and forage due to habitat alteration, fragmentation, or  
7 loss. Indirect impacts typically persist longer than direct impacts. However, ISR uranium  
8 extraction does not generally involve large-scale habitat alteration.

9  
10 Certain vegetative communities that exist in the proposed license area could be difficult to  
11 reestablish through artificial planting and natural seeding, and recruitment could take many  
12 years. Consequently, wildlife species associated with specific habitats, such as blue grama  
13 (*Bouteloua gracilis*) grasslands and big sagebrush, could be reduced in number or replaced by  
14 generalist species with broader habitat requirements until natural reseeding of certain  
15 vegetation occurs or reclamation matures to its target mix. The proposed project area is  
16 dominated by big sagebrush shrubland followed by greasewood shrubland, ponderosa pine  
17 woodland, and upland grassland. The latter three vegetative communities are almost equal in  
18 area. The wildlife species using these habitat types are limited in their occurrence in the  
19 proposed license area (see SEIS Section 3.6.1.2), and because the actual surface disturbance  
20 will be small and noncontiguous, negative impacts to these wildlife species will be SMALL. In  
21 addition, the NRC staff conclude that construction impacts resulting from habitat loss or  
22 alteration, displacement of wildlife, and mortality due to encounters with vehicles or heavy  
23 equipment at the proposed project will be SMALL. The applicant commits to impose and  
24 enforce speed limits during all ISR phases to reduce impacts to wildlife throughout the year and  
25 particularly during the breeding season (Powertech, 2009a, Section 5.5). To mitigate habitat  
26 disturbance, the applicant will use existing roads when possible and limit construction of new  
27 primary and secondary roads to provide access to more than one drill site (Powertech, 2009a).  
28 In addition, the applicant will restore areas where topsoil has been replaced and construct brush  
29 piles and rock piles to enhance wildlife habitat (Powertech, 2009a).

### 30 31 Big Game

32  
33 Pronghorn antelope (*Antilocapra americana*), mule deer (*Odocoileus hemionus*), white-tailed  
34 deer (*O. virginianus*), and elk (*Cervus elaphus*) are the four most common big game species  
35 that occur within the proposed project area, and bighorn sheep (*Ovis canadensis*) and mountain  
36 lions (*Felis concolor*) are predicted to be in the vicinity of the site. As described in Section  
37 3.6.1.2.1, no crucial big game habitat or migration corridors occur on or within at least 1.6 km  
38 [1 mi] of the proposed Dewey-Burdock ISR Project (SDGFP, 2010a; BLM, 2011).

39  
40 Pronghorn antelope, mule deer, white-tailed deer, and elk in the project area could be directly  
41 affected by the disturbance of a portion of yearlong range, loss of forage, and vehicular collision  
42 accidents. For the deep Class V injection well disposal option, an estimated maximum of  
43 98 missing unit [243 missing unit] will be incrementally disturbed during the life of the proposed  
44 project. Pronghorn antelope will be the most impacted big game species because they are the  
45 most common within the project area. Pronghorn antelope are sagebrush obligates occupying  
46 shrubland habitat year round and eating shrubs. Shrubland vegetation communities cover about  
47 45 percent of the proposed project areas. Mule deer are also found in the project area all year  
48 and eat shrubs, but mule deer also enjoy grassland and riparian vegetation habitats and eating  
49 grasses and forbs. Elk compete seasonally with wild horses and domestic cattle in the  
50 grassland vegetation community for their preferred food in spring and summer, and are found  
51 mostly in the ponderosa pine woodland habitat on the proposed site in fall and winter.



1 Grassland and pine woodland habitats together comprise about 22 percent of the proposed  
2 project area. White-tailed deer, the least common big game species in the proposed project  
3 area, prefer the treed cottonwood gallery vegetation habitat, which comprises about 2 percent of  
4 the proposed project area. (Powertech, 2009a)

5  
6 Because of these habitat disturbances, the yearlong range-carrying capacity for big game will  
7 be reduced over the life of the ISR facility and for several years thereafter until growth on the  
8 revegetated areas becomes productive enough to support big game. During the construction  
9 phase of the proposed project, the projected daily traffic on Dewey Road, the road nearest the  
10 proposed site, is estimated to increase sixteenfold (see SEIS Sections 4.3.1.1). This increase in  
11 traffic will increase the potential for traffic collisions and wildlife or livestock kills. However,  
12 direct impacts to pronghorn antelope, mule deer, white-tailed deer, and elk will be SMALL  
13 because the continued existence of the species would not be threatened as a result of  
14 vehicle collisions.

15  
16 Indirect impacts to pronghorn antelope, mule deer, white-tailed deer, and elk could include  
17 displacement into surrounding areas from increased human activity, noise, lighting, and the  
18 increased potential for poaching and/or harvest from improved access via new roads. Migration  
19 of these species toward the Black Hills may also increase predation from other animals.  
20 Mountain lions present in the Black Hills prey on white-tailed deer, mule deer, elk, bighorn  
21 sheep, and mountain goats (SDGFP, 2010b). The human presence during construction could  
22 affect big game use of adjacent areas. Some short-term disturbance (during the lifecycle of the  
23 ISR facility) of big game habitat could occur because of the proposed project construction.  
24 Adequate big game habitat exists in the surrounding area; these species could return to the  
25 areas affected by construction once these activities were completed. The proposed staged  
26 reclamation of disturbed areas will provide grass and forage within a few years of habitat  
27 disturbance. To the extent practicable, the applicant has proposed implementing speed limits  
28 within the proposed permit area and fencing to permit big game passage as mitigative actions,  
29 and vegetative forage losses from construction will be mitigated by the applicant's plan for  
30 staged reclamation of disturbed areas to further reduce big game conflicts associated with the  
31 proposed construction activities (Powertech, 2009a). NRC staff conclude that because big  
32 game animals are highly mobile species and staff does not expect long-term effects on big  
33 game populations from the deep Class V injection well disposal option, the potential impacts to  
34 these species during the construction phase will be SMALL.

#### 35 36 Upland Game Birds

37  
38 The only upland game birds observed within the proposed Dewey-Burdock ISR Project area are  
39 the wild turkey (*Meleagris gallopavo*) and mourning dove (*Zenaida macroura*), which are  
40 common in the region. Mourning doves are the most abundant game bird in South Dakota and  
41 can be found across fields to woodlands and residential areas. Doves are opportunists and eat  
42 the seeds of grasses, forbs, and crops as they ripen, changing their feeding habits as different  
43 foods become available (SDGFP, 2009a). Essentially all of South Dakota and Wyoming  
44 provides habitat that support mourning doves, including the area that surrounds the proposed  
45 license area; therefore, the proposed project would not threaten the continued existence of  
46 mourning doves.

47  
48 Within the proposed project area, wild turkeys would most likely use the cottonwood gallery and  
49 ponderosa pine vegetative communities, woody draws, and riparian areas along Beaver Creek  
50 for roosting, feeding, nesting, and brood rearing (SDGFP, 2009b). Hens would also select the

1 upland grassland community for nesting if tall grasses were present (SDGFP, 2009b). While  
2 woody corridors are not abundant in the proposed project area, they also are not unique in the  
3 surrounding area. BHNF borders the proposed project area to the east and provides ample  
4 habitat that could support displaced turkeys during construction activities. Because turkeys  
5 wander great distances and require large areas of suitable habitat, NRC staff do not expect the  
6 proposed project construction will impact the general population of wild turkeys.

7  
8 SEIS Section 3.6.1.2.2 explains that sharp-tailed grouse (*Tympanuchus phasianellus*), ruffed  
9 grouse (*Bonasa umbellus*), and Greater sage-grouse (*Centrocercus urophasianus*) could  
10 potentially occur in the proposed project area. Greater sage-grouse is the most likely grouse  
11 species to potentially be impacted by construction of the proposed Dewey Burdock ISR project  
12 because of the regional decline and segmentation of sagebrush habitat. As discussed in SEIS  
13 Section 3.6.3, Greater sage-grouse are not reported to occur within 6.4 km [4 mi] of the  
14 proposed project boundary. Because NRC staff expect that similar habitat is present in the  
15 proposed project area that FWS evaluated for the nearby Buffalo Gap Nation Grassland  
16 (described in SEIS Section 3.6.3; Hodorff, 2005), it is unlikely that optimum canopy coverage of  
17 sagebrush habitat is present to support breeding and wintering populations within the proposed  
18 project area.

19  
20 In recent years, BLM and state agencies in the region have developed strategies and  
21 management measures to preserve, conserve, and restore the sagebrush habitat to prevent  
22 further population decline and listed the sage-grouse as threatened or endangered. BLM is in  
23 the process of revising regional management plans (RPMs) and has initiated scoping to prepare  
24 an EIS; this will require detailed studies on proposed and alternative policies, and analyze how  
25 implementation of the policies may affect the environment (BLM, 2012d). The BLM Rocky  
26 Mountain Region expects several final EISs to be published in 2014, which may identify new  
27 issues and best management strategies for sage-grouse that may also benefit other upland  
28 game birds. FWS is required to make a decision in 2015 on whether to propose protecting the  
29 species under the Endangered Species Act (FWS, 2012). In August 2012, FWS issued a draft  
30 report to help achieve sage-grouse conservation objectives before the 2015 decision.  
31 Recommendations from these studies could be implemented at the proposed Dewey-Burdock  
32 ISR Project when they are finalized and become available.

33  
34 Portions of the proposed Dewey-Burdock ISR Project site will be disturbed during construction  
35 activities; therefore, some birds will be displaced and some temporary habitat loss will occur.  
36 The applicant commits to (i) minimize disturbance of surface areas and vegetation, where  
37 possible; (ii) minimize construction of new access and secondary roads so more than one drill  
38 site can be accessed; and (iii) construct new roads, power lines, and pipelines in the same  
39 corridors to the extent possible to reduce overall disturbance and minimize new surface  
40 disturbance (Powertech, 2009a). All lands disturbed by project activities will be concurrently  
41 revegetated following approved reclamation practices (Powertech, 2009a), which will restore the  
42 habitat loss experienced from proposed construction activities. In addition, the applicant has  
43 committed in its application to adhere to regulatory timing and spatial restrictions (noise,  
44 vehicular traffic, and human proximity) as a mitigative measure that would decrease impacts  
45 during breeding season (Powertech, 2009a). Because the site does not support populations of  
46 upland game birds that depend on the site for continued existence and because mitigation  
47 measures are expected to limit potential impacts to upland game birds, NRC staff conclude  
48 potential impacts to upland game birds during the construction phase for the deep Class V  
49 injection well disposal option will be SMALL.

50  
51

## 1 Raptors

2  
3 Twelve species of raptors were recorded within the proposed license area during Powertech's  
4 wildlife survey: bald eagle (*Haliaeetus leucocephalus*) (nested), red-tailed hawk (*Buteo*  
5 *jamaicensis*) (nested), golden eagle (*Aquila chrysaetos*), ferruginous hawk (*Buteo regalis*),  
6 northern harrier (*Circus cyaneus*), American kestrel (*Falco sparverius*), turkey vulture (*Cathartes*  
7 *aura*), Cooper's hawk (*Accipiter cooperii*), rough-legged hawk (*Buteo lagopus*), merlin (*Falco*  
8 *columbarius*) (nested), great horned owl (*Bubo virginianus*) (nested), and long-eared owl (*Asio*  
9 *otus*) (nested) (Powertech, 2009a). As explained in SEIS Section 3.6.1.2.3, the burrowing owl  
10 (*Athene cunicularia*), northern saw-whet owl (*Aegolius acadicus*), and sharp-shinned hawk  
11 (*Accipiter striatus*) could be present in the vicinity of the proposed project area (Peterson, 1995).  
12 Although some of these raptors (bald eagle, burrowing owl, ferruginous hawk, and golden  
13 eagle) are considered BLM sensitive species, the populations of these species are not imperiled  
14 with the exception of the bald eagle, which is a state-threatened species (SDGFP, 2012a). The  
15 bald eagle, red-tailed hawk, American kestrel, and northern harrier were the most commonly  
16 seen raptor species in the proposed project area and will be the primary raptor species  
17 impacted by project activities. Raptors are particularly sensitive to noise and the presence of  
18 human activity, which would be heightened during the ISR construction phase. Five raptor  
19 nests (four active and one unknown) were recorded within the proposed project area during  
20 surveys conducted in 2007 and 2008, as summarized by species in SEIS Table 3.6-2  
21 (Powertech, 2009a). Two other nest sites, one inactive and one defended but not confirmed  
22 active, occurred within 1.6 km [1 mi] of the proposed license area. As described in SEIS  
23 Section 3.6.1.2.2, one active bald eagle nest was reported in 2011 within the proposed  
24 project area along Beaver Creek, about 1.6 km [1 mi] west of the proposed Dewey satellite  
25 processing plant.

26  
27 Direct impacts to raptor species for the deep Class V injection well disposal option include  
28 displacement, loss of forage habitat, increased potential for collisions with structures and  
29 vehicles, increased potential for nest abandonment and reproductive failure due to increased  
30 human disturbances, and potential reduction in prey populations within the project site. Avian  
31 collision and electrocution with overhead power lines could occur year round. The potential for  
32 eagle collisions with electric transmission lines is considered to be low because their foraging  
33 behavior is relatively slow compared to falcons and other raptors. Indirect impacts to raptors  
34 could include nesting disruption and displacement of prey species, which may reduce food  
35 availability within the area. Nesting success by resident raptors could be reduced from  
36 disturbances caused by the proposed ISR construction and associated traffic. Birds may  
37 continue to use nest sites as they acclimate to the proposed ISR construction activities and  
38 could return to inactive nests in the area. The applicant has committed to adhering to timing  
39 and distance restrictions determined by appropriate regulatory agencies to protect raptor nests  
40 during breeding season (Powertech, 2009a). In addition, the applicant has committed to  
41 mitigation measures to limit noise and vehicular traffic (Powertech, 2009a) during the  
42 construction phase of the proposed project, which will reduce overall impacts to raptors. If a  
43 disturbance occurs (called a "take") where birds protected under the conventions are pursued,  
44 hunt, shot, wounded, killed, trapped, captured or collected in violation of the Bald and Golden  
45 Eagle Protection Act (BGEPA) and/or Migratory Bird Treaty Act (MBTA), the applicant will be  
46 required to perform a consultation and mitigation of the take with FWS. The applicant has  
47 committed to follow an FWS-approved raptor monitoring and mitigation plan to minimize  
48 conflicts between active nest sites and project-related activities if direct impacts to raptors occur  
49 (Powertech, 2009a). However, NRC staff anticipate there will be fewer direct impacts to raptors  
50 compared to a higher potential for indirect impacts. Mitigation measures provided in SEIS

1 Chapter 6 would support the continued nesting success of area raptors and minimize potential  
 2 direct and indirect impacts.  
 3  
 4 The applicant could mitigate potential impacts to raptor species from power distribution lines by  
 5 following the Avian Power Line Interaction Committee guidance to avoid activities near active  
 6 nests, especially prior to the fledging of young (Avian Power Line Interaction Committee, 2006).  
 7 In addition, the applicant could site all planned facilities outside of the BLM-recommended  
 8 buffer zone for all raptor nests identified within the proposed project area and adhere to  
 9 BLM-recommended timing restrictions presented in table located in Table 4.6-3. Figure 4.6-2  
 10 shows the 16-ha [40-ac] areas where raptor nests are located near the proposed project area.  
 11 The potential wellfield areas in Figure 2.1-6 identify where potential drilling/disruptive activity  
 12 could occur around each orebody, if a particular orebody were mined. Based on the applicant's  
 13 intent to follow a raptor mitigation plan and implementation of the mitigative measures  
 14 previously described, the potential impact to raptor species during the construction phase of  
 15 the proposed Dewey-Burdock ISR Project for the deep Class V injection well disposal option will  
 16 be SMALL.  
 17

**Table 4.6-3. BLM Seasonal Wildlife Stipulations**

<b>Affected Areas/Species</b>	<b>Activities and/or Timing Restriction</b>	<b>Restricted Area</b>
Sharp-tailed grouse/greater prairie chicken	Surface use prohibited March 1–June 15 except for operations and maintenance	Within a 3.2-km [2-mi] radius of a lek in nesting/brood-rearing habitat*
	Prohibit surface disturbance/occupancy or human activity year round	Within a 0.4-km [0.25-mi] radius of an occupied lek*
	Siting structures that are more than 3 m [10 ft] tall or power lines	Within a 3.2-km [2-mi] radius of nesting areas
Peregrine falcon	Prohibit surface disturbance/occupancy or human activity year round	Within 1.6-km [1-mi] radius of a nest including nests recorded during the preceding 7 breeding seasons*
Bald eagle	Prohibit surface disturbance/occupancy or human activity year round	Within a 0.8-km [0.5-mi] radius of a nest including nests recorded during the preceding 5 breeding seasons*
Golden eagle, osprey, burrowing owl, ferruginous hawk, Swainson's hawk, prairie falcon, other raptors	Prohibit surface disturbance/occupancy or human activity year round	Within a 0.4-km [0.25-mi] radius of occupied nest*

18

1

**Table 4.6-3. BLM Seasonal Wildlife Stipulations (continued)**

<b>Affected Areas/Species</b>	<b>Activities and/or Timing Restriction</b>	<b>Restricted Area</b>
Greater sage-grouse	December 1–March 31  March 1–July 1  Prohibit surface disturbance/occupancy or human activity year round	Within crucial winter range for greater sage-grouse. Routine maintenance, production, and emergency response activities are allowed.*  Within a 3.2-km [2-mi] radius of a lek in general habitat areas. Routine maintenance, production, and emergency response activities are allowed.*  Within a 0.4-km [0.25-mi] radius of an occupied lek*
Piping plover	Prohibit surface disturbance/occupancy or human activity year round	Within a 0.4-km [0.25-mi] radius of piping plover habitat*
Interior least tern	Prohibit surface disturbance/occupancy or human activity year round	Within a 0.4-km [0.25-mi] radius of wetlands identified as least tern habitat*
Big game winter ranges	December 1–March 31	Surface-disturbing and disruptive activities in winter ranges*
*The authorized officer may grant an exception, modification, or waiver to a stipulation based on certain criteria Source: BLM, 2012b,c,d		

2

Waterfowl and Shorebirds


3

4

5 Eight avian species associated specifically with water and/or wetlands were observed during  
6 baseline surveys conducted at the proposed project site: the American white pelican  
7 (*Pelecanus erythrorhynchos*), great blue heron (*Ardea herodias*), Canada goose (*Branta*  
8 *canadensis*), mallard (*Anas platyrhynchos*), American wigeon (*Anas americana*), killdeer  
9 (*Charadrius vociferus*), long-billed curlew (*Numenius americanus*), and upland sandpiper  
10 (*Bartramia longicauda*) (Powertech, 2009a). In western South Dakota, long-billed curlew and  
11 upland sandpiper are often found in grasslands, but habitat requirements in this environment  
12 are not well known (SDGFP, 2005a). As described in SEIS Section 3.6.1.2.2, the long-billed  
13 curlew is a rare species in South Dakota. A large portion of the curlew breeding range occurs in  
14 South Dakota, but does not include winter habitat (Fellows, 2009). The continued existence of  
15 the species is most threatened by fragmentation, vegetation conversion, and loss of breeding  
16 habitat consisting of open, mixed-grass prairie and grazed cattle pastures across its current  
17 breeding range (Fellows, 2009). Areas about 0.8 km<sup>2</sup> [0.5 mi<sup>2</sup>] or larger of the upland grassland  
18 vegetative community {total 885.27 ha [2,187.56 ac]} are found in the Burdock area east of Pass  
19 Creek, which is more than in the Dewey area. Construction impacts would affect nesting and  
20 breeding curlew the most from early March to mid-July.

21

1

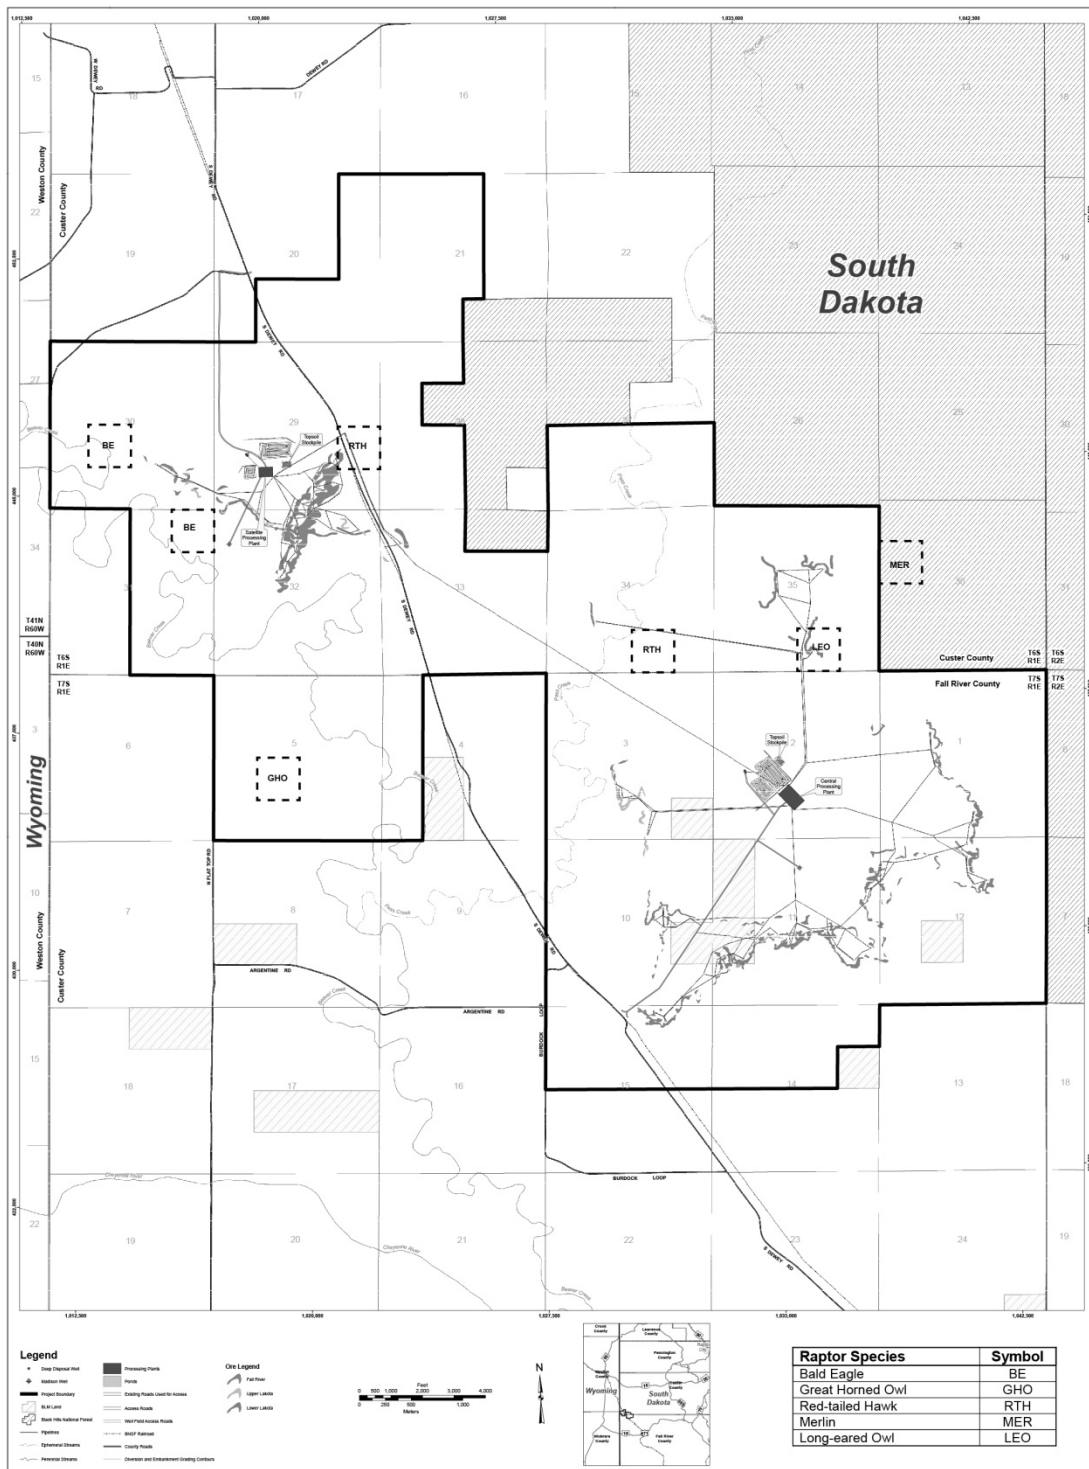

**Figure 4.6-2. Map of Raptor Nest Locations in the Dewey-Burdock Project Area and Planned Facilities for the Deep Class V Injection Well Disposal Option. Sources: BLM, 2012c; SDGFP, 2012c; Powertech, 2012a.**

2

1 At the proposed Dewey-Burdock site, relatively little habitat exists to support large groups  
2 or populations of either waterfowl or shorebirds and no breeding waterfowl or shorebirds  
3 were observed during wildlife surveys; therefore, NRC does not expect that proposed  
4 construction activities for the deep Class V injection well disposal option will destabilize  
5 waterfowl or shorebird populations. The applicant has committed to use existing roads  
6 when possible and obtain USACE permits when appropriate before construction activities  
7 (SEIS Section 4.5.1.1.1.1.). These actions, in addition to reseeding and other mitigation  
8 measures explained in SEIS Section 4.6.1.1.1.1, will limit potential long-term impacts to  
9 waterfowl and shorebird habitat. Therefore, the potential impact to waterfowl and shorebirds  
10 during the construction phase for the deep Class V injection well disposal option will be SMALL.

### 11 Nongame and Migratory Birds

12  
13  
14 Construction impacts to nongame and migratory birds for the Class V injection well disposal  
15 option are expected to be similar to those discussed for other birds previously described in this  
16 section associated with forested, grassland, and shrubland vegetative communities. Some  
17 long-term habitat loss {up to about 98 ha [243 ac]} and potential reduction in the carrying  
18 capacity for nongame/migratory birds within the proposed project area will occur; however, there  
19 is habitat available regionally for displaced animals. Direct impacts will include habitat loss and  
20 fragmentation, alteration of plant and animal communities, overhead electric line collisions and  
21 electrocution, and increased human activity or noise that could cause collision mortality or the  
22 birds to avoid a specific area or reduce breeding efficiency.

23  
24 Direct loss of ground nests, eggs, and birds from construction activities could occur; however,  
25 these impacts would affect only a few birds and are not expected to have any long-term impacts  
26 on the general population of the individual species. NRC expects the proposed project will not  
27 influence migratory movement patterns, because most bird species are able to fly over the area  
28 without restrictions. Nongame and migratory birds would benefit from mitigation measures  
29 described in Chapter 6 because these will limit noise, vehicular traffic, and other human  
30 disturbances near these areas. Therefore, the potential impact to nongame and migratory birds  
31 during the construction phase will be SMALL.

### 32 Other Mammals

33  
34  
35 A variety of small- and medium-sized mammal species occurs in all the vegetative communities  
36 present in the vicinity of the proposed license area, although not all have been observed on the  
37 proposed project area itself. These mammals include the coyote (*Canis latrans*), red fox  
38 (*Vulpes vulpes*), raccoon (*Procyon lotor*), bobcat (*Lynx rufus*), badger (*Taxidea taxus*), beaver  
39 (*Castor canadensis*), muskrat (*Ondatra zibethicus*), skunk (*Mephitis mephitis*), porcupine  
40 (*Erethizon dorsatum*), bats (*Myotis* spp.), and weasel (*Mustela* spp.) (Powertech, 2009a). Prey  
41 species including rodents (mice, rats, voles, shrews, gophers, squirrels, chipmunks, prairie  
42 dogs), jackrabbits (*Lepus* spp.), and cottontails (hares) (*Sylvilagus* spp.) could also inhabit the  
43 proposed project area.

44  
45 Medium-sized mammals, such as rabbits, coyotes, and foxes, could experience some mortality  
46 or be temporarily displaced to other habitats during construction activities. Direct mortality or  
47 injury of some ground-dwelling small mammal species (e.g., voles, ground squirrels, mice) could  
48 be higher than for other wildlife because of their limited mobility and the likelihood they would  
49 retreat into burrows if disturbed. They could potentially be impacted by topsoil scraping or  
50 staging activities. However, given the limited, noncontiguous areas that will be affected by

1 topsoil-disturbing construction activities (see Table 4.2-1), NRC expects no major changes or  
2 reductions in small- or medium-sized mammalian populations. Indirect impacts from accidental  
3 spills would be short term and localized to the impact area. The small- and medium-sized  
4 mammal species that occur in the proposed project area have a higher reproductive potential  
5 than do more vulnerable wildlife species that require large home ranges and occur in lower  
6 densities, such as large mammals (BLM, 2009). Construction disturbance associated with  
7 vehicles, equipment, noise, and dust will potentially cause wildlife species associated with all  
8 habitat types to avoid the area temporarily during construction activities; however, NRC staff  
9 expect that the area will not be uninhabitable after construction ends; therefore, the potential  
10 impact to other mammals from construction of the proposed Dewey-Burdock ISR Project will  
11 be SMALL. Potential construction impacts to black-tailed prairie dogs (*Cynomys ludovicianus*)  
12 and swift fox (*Vulpes velox*), state endangered and state threatened species, respectively, are  
13 detailed in SEIS Section 4.6.1.1.1.4.

14

#### 15 Reptiles and Amphibians

16

17 Three amphibian and one reptile species [boreal chorus frog (*Pseudacris triseriata*),  
18 Woodhouse's toad (*Bufo woodhousei*), great plains toad (*B. cognatus*), and western painted  
19 turtle (*Chrysemys picta*), respectively], which commonly occur in the region, were observed in  
20 the western portion of the project area along Beaver Creek where there are no currently  
21 planned activities associated with the proposed deep Class V injection well disposal option  
22 (Powertech, 2009a). Several other unidentified lizard species were observed during wildlife  
23 surveys conducted at the proposed site in 2007 and 2008 (Powertech, 2009a). The proposed  
24 project area provides limited habitat for amphibians and turtles due to the lack of aquatic habitat,  
25 which is concentrated along Beaver Creek and in old mine pits that make up about 10 ha [24 ac]  
26 of the total 14 ha [35 ac] of wetland habitat within the proposed project area. Streams that do  
27 occur within the proposed project area, including Beaver Creek, are intermittent. During  
28 construction activities, reptile and amphibian species will experience impacts similar to those  
29 discussed for small- and medium-sized mammal species, which include loss or fragmentation of  
30 habitat, displacement, disturbance from noise and human proximity, and increased risk of  
31 vehicular collision.

32

33 Because the applicant does not plan to disturb water bodies and perennial streams within the  
34 proposed project area (Powertech, 2009a), staff expect that aquatic habitat will not be directly  
35 affected by the proposed project activities and conclude potential impact to amphibian and  
36 regional turtle species and reptiles that require a water body for survival will be SMALL. Other  
37 reptiles, such as lizards and snakes in the state that prefer grassland habitat, may be more  
38 susceptible to the potential human disturbances previously described. However, due to the  
39 small amount of habitat {about 98 ha [243 ac]} that will be disturbed at any given time during the  
40 deep Class V injection well disposal option and low likelihood for direct mortalities, staff do not  
41 expect construction impacts to measurably affect any reptile species population. Therefore, the  
42 potential impact to reptile species during the construction phase will also be SMALL.

43

#### 44 4.6.1.1.1.3 Aquatic Ecology

45

46 GEIS Section 4.4.5.1 discussed impacts to aquatic species that could be temporarily disturbed  
47 by in-stream channel activities and concluded the potential impact will be SMALL. Sediment  
48 loads in streams are expected to taper off quickly both in time and distance, and long-term  
49 impacts will be SMALL. Additionally, SDDENR standard management practices would help to  
50 limit impacts to aquatic life. (NRC, 2009a)

51



1 Because of the limited and ephemeral nature of surface water at the proposed Dewey-Burdock  
2 ISR Project, the occurrence of aquatic species is also limited. Potential impacts to aquatic  
3 species at the proposed project site will occur primarily along Beaver Creek, Pass Creek,  
4 scattered stock ponds, and drainages. Beaver Creek is a perennial stream that experiences  
5 annual low flow conditions (see SEIS Section 3.6) and does not support sensitive species within  
6 the proposed project boundary. Further, EPA lists Beaver Creek as an impaired water body  
7 partially due to high dissolved and suspended solids (EPA, 2009). Pass Creek is an ephemeral  
8 stream that supports some intermittent habitat. However, Pass Creek does not provide a year-  
9 round source of surface water sufficient to maintain a population of aquatic species. The  
10 applicant's surface water management plan would limit the loss of aquatic habitat resulting from  
11 planned construction activities at the proposed project (Powertech, 2009a).

12  
13 A baseline level of total uranium was detected in channel catfish during wildlife surveys (SEIS  
14 Section 3.6.2). SEIS Section 3.5.1 describes MCL exceedances in surface water samples  
15 collected onsite and offsite downstream for gross alpha, uranium, and Ra-226. EPA's national  
16 recommended water quality criteria for aquatic life and for human health consumption do not  
17 include gross alpha, uranium, or radium (EPA, 2012). No surface water will be diverted, no  
18 process water will be discharged into aquatic habitat, and storm water runoff will be managed  
19 through the NPDES permit (as discussed in Section 4.5.1.1). SEIS Section 4.5.2 further  
20 describes that EPA requires a Class V underground injection control (UIC) permit for deep  
21 Class V well injection. EPA will only allow Class V injection if the applicant can demonstrate  
22 that liquid waste could be safely isolated in a deep aquifer. In the permitted area, there is no  
23 evidence for any hydraulic connection between surface waters and proposed aquifers for the  
24 deep Class V injection well disposal option. NRC staff expect planned ISR construction  
25 activities, as described in SEIS Section 4.5.1.1, are unlikely to significantly affect surface water  
26 quality. Therefore, NRC staff conclude potential impacts to aquatic species and habitats from  
27 the construction phase for the deep Class V injection well disposal option will be SMALL.

#### 28 29 4.6.1.1.1.4 Threatened and Endangered Species

30  
31 As discussed in GEIS Section 4.4.5.1, if threatened or endangered species are identified on the  
32 proposed project site, the potential impact could range from SMALL to LARGE, depending on  
33 site conditions. Mitigation plans to avoid and reduce impacts to potentially affected species  
34 would be developed. (NRC, 2009a)

35  
36 No federally listed species are known to occur on the proposed Dewey-Burdock ISR Project site  
37 (FWS, 2010). No federal- or state-listed sensitive plant species, endangered or threatened  
38 plant species, or designated critical habitats were observed within the proposed project site  
39 during baseline wildlife surveys (Powertech, 2009a); therefore, there will be no direct impact to  
40 these species.

41  
42 SEIS Section 3.6.3 explains that Sprague's pipit (*Anthus spragueii*) could potentially occur in the  
43 proposed project area in the upland grassland vegetative community. Based on the information  
44 provided in SEIS Section 3.6.3, NRC staff conclude that it is unlikely this species will breed  
45 within the proposed project area. In addition, the Sprague's pipit will likely avoid areas near  
46 roads, grasslands that have been cultivated, or near the edges of other vegetative community  
47 types (FWS, 2011). Because the primary breeding area for this species is north and northeast  
48 of the project area and the birds spend winters in the southern half of the United States, NRC  
49 staff believe it is reasonable to expect that individual birds may occur in the project vicinity  
50 during migration. NRC staff conclude that it is likely Sprague's pipit will choose to inhabit the

1 proposed project areas during the proposed ISR facility lifecycle; therefore, direct effects to the  
2 species are not expected. NRC staff further conclude that construction activities will not affect  
3 the existence of the species' population in the proposed project area.

4  
5 Whooping cranes (*Grus americana*) currently do not breed in South Dakota; however, the  
6 proposed project area is located west of the migration path between Texas and Canada (FWS,  
7 2009). Although construction activities may not directly impact whooping cranes, the potential  
8 exists for whooping crane disturbances from proposed mining activities during spring and fall  
9 migrations (FWS, 2010). Cranes roost, rest, and forage in relatively shallow wetlands that occur  
10 on the proposed project site along Beaver Creek, parts of Pass Creek, mine pits, and  
11 depressions, but prefer sites with minimal human disturbance (FWS, 2009). Construction  
12 activities at the proposed project may indirectly impact migrating whooping cranes by reducing  
13 optimal or preferred resting habitat. NRC staff conclude that migrating whooping cranes will not  
14 likely occur at the proposed site based on their traditional migratory pathway (FWS, 2009). If  
15 cranes navigate west of the traditional migratory pathway, NRC staff conclude that it is likely  
16 cranes will select other appropriate habitat for roosting, resting, and foraging during the  
17 proposed ISR facility lifecycle, and that construction activities will not affect the existence of the  
18 species' population in the proposed project area.

19  
20 Bald eagles were observed along Beaver Creek in the western portion of the proposed project  
21 area during winter roosting surveys within 1.6 km [1 mi] of the proposed Dewey satellite  
22 processing plant (Powertech, 2009a; SDGFP, 2012c). Most recently in 2011, SDGFP  
23 confirmed the presence of one active nest along Beaver Creek approximately 1.6 km [1 mi] west  
24 of the proposed Dewey satellite plant in a cottonwood tree along Beaver Creek. Active and  
25 inactive nests are located within 0.4 km [0.25 mi] of potential Dewey wellfield areas (Powertech,  
26 2009a; SDGFP, 2012a). Although the bald eagle is no longer federally listed as threatened,  
27 South Dakota still lists it as a threatened species. As discussed earlier in this chapter, the  
28 applicant has proposed to follow BLM-approved raptor monitoring and mitigation activities to  
29 minimize conflicts between active nest sites and project-related activities if direct impacts to  
30 raptors occur. In addition, the cottonwood gallery and ponderosa pine woodland vegetative  
31 communities where the bald eagles are found will not be physically impacted by the proposed  
32 project construction or operations (Powertech, 2009a). Therefore, construction will not directly  
33 impact bald eagles. However, eagles nesting nearby or migrating through the area may use the  
34 proposed Dewey-Burdock site and surrounding lands for foraging during winter months and may  
35 not be able to use these lands during construction until the disturbed areas were reclaimed and  
36 prey species returned. The bald eagle is protected under the Migratory Bird Treaty Act (MBTA)  
37 and the Bald and Golden Eagle Protection Act (BGEPA), by which the applicant will have to  
38 abide. Although these statutes do not provide for habitat protection, disturbance of eagle habitat  
39 that directly takes or kills a bald eagle (such as cutting down a nest tree with chicks present) will  
40 constitute a violation of the MBTA, as well as the BGEPA.

41  
42 Black-footed ferrets (*Mustela nigripes*) are not present in the site vicinity at this time (BLM,  
43 2009a; FWS, 2010; SEIS Section 3.6.3). However, the presence of the black-tailed prairie dog  
44 (*Cynomys ludovicianus*) in the northwestern corner of the proposed project area provides  
45 potentially suitable habitat for the black-footed ferret. Two other prairie dog towns were  
46 observed 1.6 km [1 mi] southwest of the proposed project area. The black-tailed prairie dog is a  
47 state endangered and BLM sensitive species (see Tables 3.6-7 and 3.6-8). As discussed in  
48 SEIS Section 3.6.3, FWS relieved the requirement for black-footed ferret surveys to be  
49 conducted in black-tailed prairie dog habitat within the State of South Dakota for the purpose of  
50 identifying previously unknown ferret populations; therefore, Powertech did not conduct ferret  
51 surveys on the proposed Dewey-Burdock ISR Project site. FWS continues to direct federal

1 agencies to assess whether a proposed action could have an adverse effect on the value of  
2 prairie dog habitat as a future reintroduction site for the black-footed ferret. Proposed  
3 construction activities may directly impact prairie dogs and habitat for the prairie dog and  
4 black-footed ferret within the proposed project boundary that could support populations of these  
5 species. Because there have been no occurrences of black-footed ferrets within the proposed  
6 project area and the prairie dog colony on the site is likely too small to support and sustain a  
7 breeding population of black-footed ferrets (as described in SEIS Section 3.6.3), NRC staff  
8 conclude that the proposed project construction would not result in a direct effect on current or  
9 future ferret populations.

10  
11 Potential impacts to sage-grouse, a federal candidate species and BLM sensitive species, were  
12 discussed in SEIS Section 4.6.1.1.1.2 under Upland Game Birds. Because only a few  
13 threatened, endangered, or candidate animals will be directly affected, most of them being  
14 birds, and because construction activities for the deep Class V injection well option will not  
15 noticeably alter protected species' patterns or behaviors, NRC staff conclude the potential  
16 impact on federally threatened endangered, candidate, or delisted species from construction  
17 activities at the proposed project will be SMALL.

#### 18 19 State and BLM Species of Concern

20  
21 In addition to the BLM sensitive species listed in Table 3.6-7 that could occur within the  
22 proposed project area, the following South Dakota-designated rare animals were observed  
23 within the proposed project area during wildlife surveys: long-billed curlew, great blue heron,  
24 golden eagle, Cooper's hawk, American white pelican, long-eared owl, merlin, Clark's  
25 nutcracker (*Nucifraga Columbiana*), ferruginous hawk, and plains topminnow (*Fundulus*  
26 *sciadicus*) (Powertech, 2009a). State rare and BLM sensitive species are discussed in the  
27 following paragraphs.

28  
29 BLM sensitive species that are found in wetland or grassland/wetland habitats that could occur,  
30 but were not observed, during surveys at the proposed site [marbled godwit (*Limosa fedoa*),  
31 trumpeter swan (*Plegadis chihi*), willet (*Cataprophorus semipalmatus*), and Wilson's phalarope  
32 (*Phalaropus tricolor*)] and South Dakota rare animals observed during Dewey-Burdock wildlife  
33 surveys (long-billed curlew, great blue heron, and American white pelican in Table 3.6-8) are  
34 unlikely to be affected by construction activities because fairly limited suitable habitat exists year  
35 round to support large groups or populations of either waterfowl or shorebirds. None of the  
36 waterfowl or shorebirds observed during wildlife surveys were breeding; therefore, NRC staff  
37 do not expect that proposed construction activities will destabilize sensitive waterfowl or  
38 shorebird populations.

39  
40 Raptors listed as BLM sensitive species that could occur at the proposed site are bald eagle,  
41 burrowing owl, ferruginous hawk, golden eagle, peregrine falcon (*Falco peregrines*), and  
42 Swainson's hawk (*Buteo swainsoni*). Each of these BLM sensitive species is protected under  
43 the MBTA, and the bald and golden eagles are also protected under the BGEPA. Similar to the  
44 bald eagle, the peregrine falcon is designated as threatened in South Dakota, but the peregrine  
45 falcon was not observed in the proposed project area. The peregrine falcon was once a  
46 federally listed species, but it was delisted in 1999. The falcon was presumed to be extirpated  
47 from the state by 1980 (USGS, 2006) and is not likely to occur within the proposed project area,  
48 although there are recent urban reintroduction efforts to restore the bird to the state (SDGFP,  
49 2012b). Burrowing owls are dependent on large prairie dog towns for food and nesting in  
50 western South Dakota (SDGFP, 2005a,b). Several predatory raptor species, such as the

1 ferruginous hawk, feed on prairie dogs and other small vertebrates or burrowing animals found  
2 in prairie dog towns. Some raptors, such as the Swainson's hawk, feed primarily on insects.  
3 During breeding season, the Swainson's hawk may consume small vertebrates.  
4 State rare raptor species observed in the project area were Cooper's hawk, long-eared owl, and  
5 merlin. Each species is also protected under the MBTA. All raptors that occur at the proposed  
6 project site will experience potential impacts similar to those described for raptors in SEIS  
7 Section 4.6.1.1.1.1.2. Raptors are particularly sensitive to noise and the presence of human  
8 activity, which would be heightened during the construction period. As described in SEIS  
9 Section 4.6.1.1.1.1.2, injury and mortality from encounters with power lines will be minimized by  
10 the applicant's proposed use of raptor deterrent products and following BLM established  
11 stipulations for certain raptor species with respect to restricting human proximity at a designated  
12 distance from a raptor nest. The applicant has also committed to follow an FWS-approved  
13 raptor monitoring and mitigation plan to minimize conflicts between active nest sites and  
14 project-related activities if direct impacts to raptors occur (Powertech, 2009a). Nest  
15 abandonment and loss of eggs or fledglings could occur in raptor nests proximate to  
16 construction activities, especially during the early nesting period. Because of the presence of  
17 raptors within the proposed project area, sensitive and rare raptor species could be disturbed.  
18 However, the NRC staff conclude direct impact to raptors is unlikely and the continued  
19 existence of the species in the proposed project area will not be threatened due to proposed  
20 mitigation measures; these are further detailed in Chapter 6 and include best management  
21 practices for monitoring species. The NRC staff conclude the estimated impact on sensitive  
22 raptor species during the construction phase for the deep Class V injection well disposal option  
23 will be SMALL.

24  
25 Nongame and migratory birds, such as the Chestnut-collared longspur (*Calcarius ornatus*),  
26 dickcissel (*Spiza americana*), and long-billed curlew, may occur within the proposed project  
27 area, most likely in the upland grassland vegetative community. The loggerhead shrike (*Lanius*  
28 *ludovicianus*) and blue-grey gnatcatcher (*Polioptila caerulea*) may also occur within the  
29 proposed project area, most likely in the shrubland communities. All of these birds are BLM  
30 sensitive species and protected by the MBTA. The gnatcatcher and curlew are also rare state  
31 species. Potential impacts from construction on the long-billed curlew and nongame and  
32 migratory birds are discussed in SEIS Section 4.6.1.1.1.1.2. NRC staff expect that similar  
33 potential impacts described in SEIS Section 4.6.1.1.1.1.2, including injury or mortality from  
34 vehicles and electrical lines, fragmentation, vegetation conversion, and loss of breeding habitat,  
35 for nongame and migratory birds will also potentially impact chestnut-collared longspur,  
36 dickcissel, loggerhead shrike, and blue-grey gnatcatcher. For the proposed Dewey Conveyor  
37 Project, which is less than 1.6 km [1 mi] from the proposed Dewey-Burdock ISR Project, BLM  
38 staff concluded that while some species reliant on grassland habitat could be displaced, the  
39 area contains high density, undisturbed grassland and disturbed grassland species would use  
40 similar adjacent habitat (BLM, 2009). The staff also conclude that the grassland habitat in the  
41 vicinity of the proposed Dewey Burdock project area will temporarily support grassland species  
42 of concern that may be disturbed during construction. Further, NRC staff expect applicant  
43 mitigation measures, like those described in Section 4.6.1.1.1.1.2 and Chapter 6, will prevent  
44 destabilization of habitat or populations for these species. Therefore, the NRC staff conclude  
45 that potential impacts from construction on chestnut-collared longspur, dickcissel, loggerhead  
46 shrike, and blue-grey gnatcatcher will be SMALL.

47  
48 Clark's nutcracker (*Nucifraga columbiana*), a BLM sensitive species and state rare species, is a  
49 nongame bird that was observed flying over the proposed project site during wildlife surveys.  
50 Nutcrackers prefer conifer forests (South Dakota Birds and Birding, 2012) and would most likely  
51 occur in the ponderosa pine woodland vegetative community in the proposed project site.

1 Black-backed woodpecker (*Picoides arcticus*), veery (*Catharus fuscescens*), and three-toed  
2 woodpecker (*Picoides tridactylus*) are all BLM sensitive species that inhabit forested areas such  
3 as the ponderosa pine woodland and cottonwood gallery vegetative communities. The red-  
4 headed woodpecker (*Melanerpes erythrocephalus*), a BLM sensitive species and state rare  
5 species, inhabits the edge of forested areas near open clearings. All of these birds are  
6 protected by the MBTA. NRC staff expect that potential impacts to these nongame and  
7 migratory birds associated with forest habitats will be less than those potential impacts  
8 described for nongame and migratory birds associated with grassland and shrubland habitats  
9 because (i) NRC expects that little to no treed areas will be directly disturbed during  
10 construction compared to other habitat types that will experience long-term or permanent  
11 impacts; (ii) the applicant has stated that no woody corridors will be disturbed by the proposed  
12 activities (Powertech, 2009a); and (iii) potential forest habitat is located in the adjacent Black  
13 Hills National Forest dominated by ponderosa pine and other deciduous trees (Chapman, 2004)  
14 that could support displaced birds that depend on forest habitats. Therefore, the staff conclude  
15 the potential impact on Clark's nutcracker, black-backed woodpecker, veery, three-toed  
16 woodpecker, and red-headed woodpecker during the construction phase will be SMALL.

17  
18 Two mammals, the black-tailed prairie dog (*Cynomys ludovicianus*), a state endangered species  
19 and BLM sensitive species, and the swift fox (*Vulpes velox*), a state threatened species and  
20 BLM sensitive species, could potentially occur within the project area. As described earlier in  
21 this section and in SEIS Section 3.6.3, a black-tailed prairie dog colony is located proximate to  
22 potential wellfields D-WF3 and D-WF4 in the Dewey area and proposed standby land  
23 application sites; therefore potential direct impacts could affect prairie dogs if the wellfields and  
24 land application sites are used. A 2008 survey reported that the prairie dog populations more  
25 than doubled in Custer and Fall River Counties between 2003 and 2008, and that state prairie  
26 dog 2008 conservation population goals were met (Kempema, et al., 2009). Because of  
27 management programs to protect the species, prairie dog populations in South Dakota are  
28 stable where the species occurs in most of the western two-thirds of the state (SDGFP, 2012d).  
29 According to SDGFP, private landowners and the public are allowed to shoot prairie dogs on  
30 private lands to manage the population in prairie dog towns (SDGFP, 2005b). Therefore, NRC  
31 expects that management of prairie dogs will be conducted in accordance with applicant and  
32 land owner agreements.

33  
34 The swift fox is typically found in short mixed grass prairies and preys on prairie dogs in addition  
35 to other small mammals and their carcasses, birds, insects, reptiles, fruits, and berries (FWS,  
36 2000). Swift fox are burrowing animals known to dig their own dens or use the burrows of other  
37 animals, including those made by prairie dogs. Because of their association with prairie dogs,  
38 swift fox that may occur in the proposed project area could be affected by prairie dog control  
39 efforts, thereby limiting available food, shelter, and escape cover for swift fox (FWS, 2000).  
40 Other threats include the fact that swift fox are easily trapped or shot and can experience  
41 mortality from vehicle collisions (FWS, 2000). Swift fox have demonstrated the ability to adapt  
42 to prairie-agricultural, sagebrush-grassland, and sagebrush-greasewood habitat types and to  
43 not be dependent on prairie dog colonies for their food (FWS, 2000). For the proposed Dewey  
44 Conveyor Project, BLM concluded activities may impact individual prairie dogs and swift foxes  
45 or their habitat, but would not cause instability in their populations (BLM, 2009). NRC staff also  
46 conclude that, based on the reasons previously described in this section, the potential impacts  
47 to these species from the proposed Dewey-Burdock ISR Project construction activities will  
48 be SMALL.

49  
50 The banded killifish (*Fundulus diaphanous*), a BLM sensitive species and state endangered  
51 species found in the western part of the state, and the northern redbelly dace (*Phoxinus eos*), a

1 BLM sensitive species and state threatened species, were not observed or expected to occur in  
2 western South Dakota or Custer or Fall River Counties (SDGFP, 2012c; Table 3.6-7). As  
3 discussed in SEIS Section 3.5.1, the streams within the proposed project area generally only  
4 flow during the wet season in response to snow melt or precipitation events. Beaver Creek and  
5 Pass Creek do not provide continuous, stable aquatic habitat to support these aquatic species;  
6 therefore, NRC staff predict potential impacts to be SMALL.

7  
8 Table 3.6-7 lists BLM sensitive amphibians, including frogs, and reptile species, including  
9 snakes and turtles, that could occur in the proposed project area. The snapping turtle (*Chelyd*  
10 *serpentine*) would be one of the most likely BLM sensitive turtle species to occur in the area  
11 (Bandas, 2004), although snapping turtles were not observed during wildlife surveys. This  
12 species can be found in any permanent water body in the state and are rarely seen out of the  
13 water except for nesting and basking in the sun (Bandas, 2004). The spiny softshell turtle  
14 (*Apalone spinifera*) is a state rare species that prefers highly oxygenated, fast flowing rivers,  
15 lakes, and streams, but is also found in impoundments and reservoirs (Somma, 2011; Bandas,  
16 2004). As described in SEIS Section 3.6.1.2.3, the applicant reported a spiny softshell  
17 subspecies in Beaver Creek during fish surveys downstream of the proposed project area.  
18 Turtles usually spend the winter in rivers, lakes, streams, and reservoirs with muddy or sandy  
19 bottoms and require soil exposed to sunlight, often near sand or gravel bars, during late spring  
20 or summer for a proper nest environment (Somma, 2011). Common toads and frogs were  
21 observed during wildlife surveys, but BLM sensitive amphibian species were not reported. For  
22 the same reasons explained in SEIS Section 4.6.1.1.1.2, NRC concludes potential impact to  
23 these sensitive reptiles and amphibians will be SMALL.

24  
25 Snakes and lizards are generally less dependent than or nondependent on permanent water  
26 bodies compared to amphibians. Snakes and lizards could occur within grassland, shrubland,  
27 and sometimes woodland habitats depending on the species. The plains or western hognose  
28 snake (*Heterodon nasicus*) is a BLM sensitive species that typically burrows into sandy,  
29 gravelly, or floodplain areas, but may also occur in agricultural, shrub, and woodland habitats  
30 (WGFD, 2010). The Greater short-horned lizard (*Phrynosoma hernandesi*) is also a burrowing  
31 BLM sensitive species that prefers grassland and sagebrush habitats (BLM, 2009). Both of  
32 these species are known to be distributed within the region, but were not observed during  
33 Dewey-Burdock wildlife surveys. As described in SEIS Section 4.6.1.1.1.2, potential impacts  
34 to reptiles could include loss or fragmentation of habitat, displacement, disturbance from noise  
35 and human proximity, and increased risk of equipment encounters and vehicular collision. In  
36 addition, snakes can be unnecessarily killed by humans who think snakes are harmful. For  
37 example, the hognose snake resembles the rattlesnake and may invoke undue harm (WGFD,  
38 2010), although it is not venomous and does not typically respond to enemies by biting  
39 regardless of their dramatic defense display. Construction activities are not planned during the  
40 winter months when these species will be hibernating and less responsive to ground-disturbing  
41 activities that may result in loss of life. In addition, due to the sequential development and small  
42 amount of land that will be disturbed for construction under the deep Class V injection well  
43 disposal option {approximately 98 ha [243 ac]}, staff do not expect construction impacts to  
44 measurably affect any reptile species population. Therefore, potential impacts to these  
45 sensitive reptile species during the construction phase will also be SMALL.

#### 46 47 4.6.1.1.2 Operations Impacts

48  
49 The potential impact to ecological resources during operations under the deep Class V injection  
50 well disposal option at the proposed Dewey-Burdock ISR Project will be consistent with the  
51 findings described in the GEIS summarized previously in SEIS Section 4.6. Only minor impacts

1 to vegetative communities will occur because most of the clearing for the ISR facility will have  
2 occurred during the construction phase. Invasive and noxious weeds could potentially colonize  
3 disturbed areas, but the applicant has committed to monitor and control these. In addition,  
4 material spills and failure of settling and holding pond liners or embankment systems could also  
5 occur during the operations phase. The applicant has proposed to minimize vehicular access to  
6 specific roads and revegetate disturbed areas with an SDDENR- and BLM-approved seed  
7 mixture to prevent the establishment of competitive weeds and restore habitat to native species  
8 (Powertech, 2009a).

9  
10 There will be less noise and less traffic during the operations phase of the proposed project  
11 compared to the construction phase; therefore, the potential to disrupt wildlife populations will  
12 be reduced along with a decrease in the probability of vehicular collisions. Wildlife use of areas  
13 adjacent to ISR operations would be expected to increase as animals became habituated to site  
14 activities. Potential impacts to wildlife, including state and BLM species of concern, during the  
15 operations phase will continue to be SMALL because operations will not threaten the continued  
16 existence of any particular species in the proposed license area. Leak detection systems, soil  
17 monitoring, and spill response plans to remove affected soils and capture released fluids (SEIS  
18 Section 4.4.1) will minimize the impact of wildlife exposure to potentially toxic levels of  
19 chemicals. Further mitigation measures, such as the use of fencing and continuation of grazing  
20 described in SEIS Sections 4.2.1 and 4.6.1.1.1.2 will be used to mitigate impacts to wildlife.

21  
22 Potential conflicts between active raptor nest sites and operations-related activities, especially  
23 the expansion of wellfield areas, will be mitigated by adherence to BLM timing and spatial  
24 restrictions within specified distances of active raptor nests during the breeding season, as  
25 outlined in Table 4.6-3. As described in SEIS Section 2.1.1.1.2.4, the applicant's deep Class V  
26 injection well disposal option will require the use of settling and holding ponds. The applicant  
27 has proposed predisposal wastewater treatment, including reverse osmosis, ion-exchange, and  
28 radium settling to remove or reduce regulated and hazardous constituents discharged to the  
29 storage ponds (SEIS Sections 2.1.1.1.6.2 and 4.14.1). The proposed wastewater treatment  
30 approaches include monitoring the post-treatment water quality to ensure compliance with NRC,  
31 EPA, and SDDENR requirements as well as any applicable NRC license conditions  
32 (Section 4.14.1). Liquid wastes discharged to settling and holding ponds will be treated to water  
33 quality appropriate for discharge by land application or injection into permitted Class V  
34 (nonhazardous) deep disposal wells (Powertech, 2009a), thus minimizing impacts to wildlife,  
35 especially birds.

36  
37 The types of potential impacts (chemical and radiological) to aquatic species and habitat during  
38 operations will be similar to those described for potential aquatic impacts from construction  
39 (SEIS Section 4.6.1.1.1.3). Based on the previous assessment, the potential impact to  
40 ecological resources (including vegetation, big game, upland game birds, raptors, waterfowl and  
41 shorebirds, nongame/migratory birds, other mammals, aquatic species, and sensitive and  
42 protected species) during the operations phase for the deep Class V injection well disposal  
43 option will be SMALL and less than that experienced during the construction phase. Therefore,  
44 NRC staff predict potential impacts to aquatic species will remain SMALL.

#### 45 46 4.6.1.1.3 Aquifer Restoration Impacts

47  
48 Impacts to ecological resources for the Class V injection well disposal option at the proposed  
49 Dewey-Burdock ISR Project during aquifer restoration will be consistent with the impact  
50 conclusions described in the GEIS, as summarized in SEIS Section 4.6, and consistent with

1 those potential impacts described previously for the construction phase and the operations  
2 phase. Because the existing infrastructure from the operations phase will continue to be used  
3 during aquifer restoration and the applicant will continue to apply the mitigation measures  
4 described previously, the potential impact to ecological resources will be similar to that  
5 described for the operations phase. In addition, the applicant's adherence to the BMPs  
6 proposed for seasonal noise, vehicular traffic, and human proximity measures will further reduce  
7 potential impacts to ecological resources. Therefore, the potential impact to ecological  
8 resources (including vegetation, big game, upland game birds, raptors, waterfowl and  
9 shorebirds, nongame/migratory birds, other mammals, aquatic species, and protected and  
10 sensitive species) during aquifer restoration will be SMALL.

#### 11 12 4.6.1.1.4 Decommissioning Impacts 13

14 The activities resulting in impacts to ecological resources during the proposed Dewey-Burdock  
15 ISR Project decommissioning activities under the Class V injection well disposal option are  
16 consistent with the activities described in the GEIS as summarized in SEIS Section 4.6.  
17 Impacts to ecological resources during the decommissioning phase will be similar to those  
18 experienced during the construction phase with respect to noise, traffic flow, and earthmoving  
19 activities. However, the decommissioning phase will temporarily disrupt slightly more natural  
20 habitat than will have occurred during the construction phase of the ISR process; this is  
21 because of an increase in land-disturbing activities for dismantling, removing, and disposing of  
22 facilities, equipment, and excavated contaminated soils. Decommissioning and reclamation  
23 activities, as described in SEIS Section 4.2 for land use, will primarily be conducted in the  
24 previously disturbed areas of the site in accordance with the NRC-approved decommissioning  
25 plan and BLM-approved reclamation plan (BLM, 2012a). Affected areas will be revegetated  
26 using a final reclamation seed mix developed through discussions with the landowner and  
27 approved by the SDDENR and BLM (Powertech, 2009a; BLM, 2012e).

28  
29 Little loss of vegetative communities beyond those disturbed during construction will  
30 be expected during decommissioning. Piping removal will have the greatest impact on  
31 vegetation that had reestablished itself since being disturbed during previous ISR phases. The  
32 dismantling of the proposed project facilities, infrastructure, and roads, and reseeded and  
33 placement/contouring of soil will have impacts similar in scale to the construction phase. The  
34 decommissioning process will be expected to create increased noise, traffic, and sediment  
35 runoff as buildings are taken down and hauled away. During this time, wildlife could  
36 either come in conflict with heavy equipment or could move elsewhere due to higher-than-  
37 normal noise. As required, the applicant will submit an NRC-approved decommissioning plan  
38 and all decommissioning activities will be carried out in accordance with 10 CFR Part 40 and  
39 other applicable federal regulatory requirements. Decommissioning of plant facilities at the  
40 proposed Dewey-Burdock ISR Project is estimated to take 2 years. Temporarily displaced  
41 wildlife could return to the area once decommissioning and reclamation were completed. The  
42 applicant's implementation of the previously discussed mitigation measures will further reduce  
43 potential impact.

44  
45 At the proposed Dewey-Burdock ISR Project, the impact from dismantling and decontaminating  
46 the central plant, satellite facility, roads, and support facilities will be consistent with the  
47 conclusions reached in the GEIS. The potential impacts to ecological resources (including  
48 vegetation, big game, upland game birds, raptors, waterfowl and shorebirds,  
49 nongame/migratory birds, other mammals, reptiles and amphibians, and protected species)  
50 during decommissioning for the deep Class V injection well disposal option would include  
51 disturbance of about 98 ha [243 ac] of vegetation, primarily in the upland grassland and



1 greasewood shrubland vegetation communities. Although certain vegetative communities  
2 (shrubland) are difficult to reestablish and can take as many as 10 years to achieve full site  
3 recovery (WGFD, 2007), the applicant commits to ongoing vegetation reestablishment efforts  
4 throughout the ISR facility life cycle. New vegetative growth could be affected by future grazing,  
5 droughts, or intense winters, thus reducing the rate of plant productivity and delaying full  
6 recovery (WGFD, 2007). For these reasons, NRC staff conclude there will be a MODERATE  
7 impact on vegetation from decommissioning and reclamation under the deep Class V injection  
8 well disposal option; once vegetation has been reestablished, this impact will be SMALL.  
9 Potential impacts to big game, upland game birds, raptors, waterfowl and shorebirds,  
10 nongame/migratory birds, other mammals, reptiles and amphibians, and protected species will  
11 remain SMALL and comparable to those described for the construction phase. The removal of  
12 perimeter fencing will increase big game passage and vegetative forage. As with construction,  
13 operations, and aquifer restoration phases, potential impacts to big game during  
14 decommissioning will remain SMALL. Potential impact to aquatic species and amphibians will  
15 also remain SMALL because of the limited occurrence of surface water, and the applicant plans  
16 to not disturb water bodies located on the proposed project site.

17

#### 18 **4.6.1.2 Disposal Via Land Application**

19

20 If a permit for Class V injection wells cannot be obtained from EPA, the applicant proposes to  
21 dispose of liquid waste generated at the proposed Dewey-Burdock ISR Project by land  
22 application (see SEIS Section 2.1.1.1.2.4.2). Potential environmental impacts on ecology from  
23 construction, operations, aquifer restoration, and decommissioning associated with the land  
24 application liquid waste disposal option are discussed in the following sections.

25

##### 26 4.6.1.2.1 Construction Impacts

27

28 Planned vegetation disturbance for the land application disposal option is provided in  
29 Table 4.6-3. Approximately 566 ha [1,398 ac] of land or 13.2 percent of the proposed permit  
30 area will be potentially disturbed by activities associated with construction of facilities,  
31 pipelines, wellfields, storage ponds, irrigation areas, and access roads (Powertech, 2012a,  
32 2010a). Disturbance to the vegetative communities will include that described in SEIS  
33 Section 4.6.1.1.1.1 for construction under the deep Class V injection well disposal option in  
34 addition to disturbance from increased pond capacity totaling approximately 55 ha [136 ac] and  
35 irrigation areas for potential land application totaling approximately 425.7 ha [1,052 ac]. The  
36 same area of BLM land will be disturbed during construction for both the deep Class V injection  
37 well and land application disposal options.

38

39 Figure 4.6-3 shows the planned facilities and vegetation communities for the land application  
40 disposal option. The additional ponds in the Dewey and Burdock areas will be located primarily  
41 in the greasewood shrubland and upland grassland vegetative communities. Ponds in the  
42 Dewey area will also be located in the silver sagebrush shrubland community just west of  
43 Dewey Road. Land application areas in the Dewey area will primarily be located in the  
44 greasewood shrubland community and a portion within the upland grassland community. The  
45 land application areas in the Burdock area will be located in the greasewood shrubland, upland  
46 grassland, big sagebrush shrubland, and silver sagebrush shrubland vegetative communities.  
47 Table 4.6-4 provides the amount of disturbance in each vegetation community.

48

49 During the construction phase, land application piping and pivot installation will create similar  
50 impacts described in SEIS Section 4.6.1.1.1.1 including (i) modification of vegetative structure,

1  
2

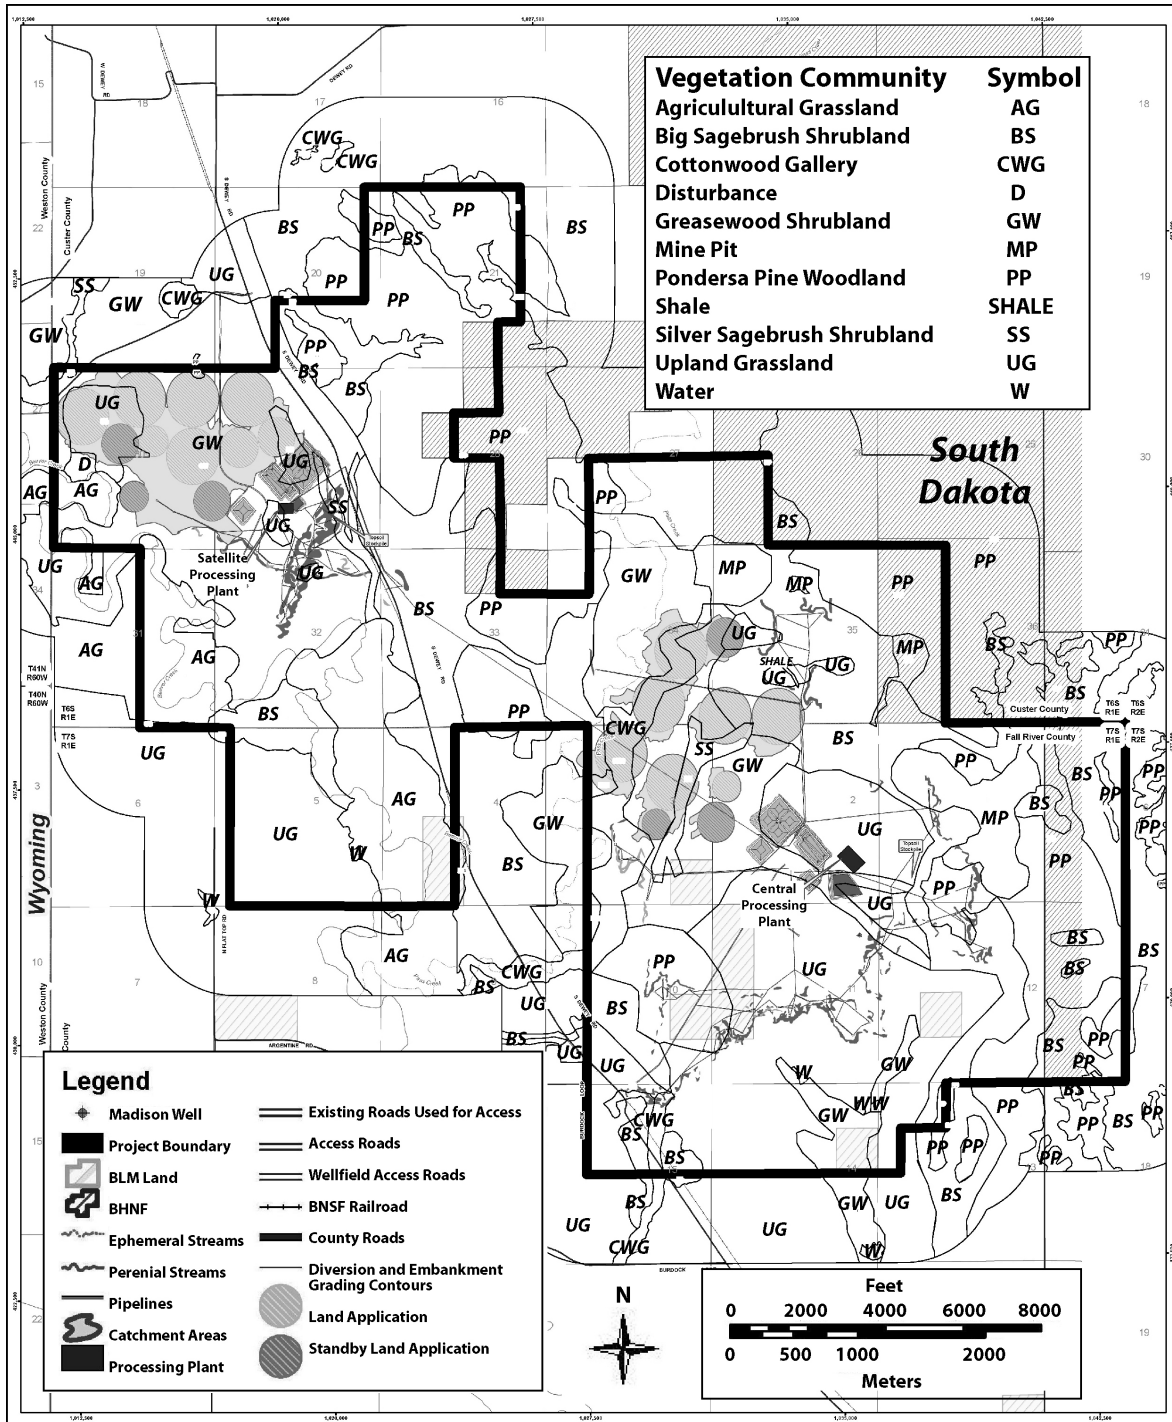


Figure 4.6-3. Map of Dewey-Burdock Planned Facilities and Vegetation Communities for the Land Application Option. Source: Powertech, 2012a.

**Table 4.6-4. Disturbed Land by Vegetation Type for Dewey-Burdock Land Application Option**

Activity	Vegetation Community {Hectares [acres]}							Total Disturbed Area Hectares [acres]
	Big Sage-brush Shrub-land	Cotton-wood Gallery	Grease-wood Shrub-land	Mine Pit	Ponderosa Pine Wood-land	Silver Sage-brush Shrub-land	Upland Grass-land	
Site Facilities	0.8 [2]	0	3.2 [8]	0	0.4 [1]	0	5.7 [14]	9.7 [24]
Trunklines	2.4 [6]	0	2.4 [6]	0	1.2 [3]	0.8 [2]	3.2 [8]	10.1 [25]
Access Roads	2.0 [5]	0	2.0 [5]	0.4 [1]	0.8 [2]	0.4 [1]	2.4 [6]	8.5 [21]
Well Fields	8.5 [21]	0	18.2 [45]	2.0 [5]	8.5 [21]	4.4 [11]	15.0 [37]	56.6 [140]
Impoundments	1.6 [4]	0	20.2 [50]	0	0.4 [1]	3.2 [8]	29.5 [73]	55.0 [136]
Land Application	75.7 [187]	0	267.9 [662]	0	0	6.9 [17]	72.4 [179]	425.7 [1,052]
Totals	90.6 [224]	0	314.4 [777]	2.0 [5]	11.3 [28]	15.8 [39]	128.3 [317]	565.8 [1,398]

Source: Powertech 2012a

- 1  
2 species composition, and areal extent of cover types (density); (ii) potential invasion,  
3 establishment, and expansion of invasive or nonnative species; (iii) potential soil erosion;  
4 (iv) reduction of wildlife habitat and livestock forage; and (v) changes in visual aesthetics.  
5
- 6 NRC staff expect the entire land application area to be converted into agricultural land where  
7 alfalfa, corn, sorghum, and several species of salt-tolerant wheatgrass will be planted and  
8 grown (Powertech, 2009b); however, application of liquid waste will not begin until the  
9 operations phase. NRC expects the applicant or landowners to use earth-moving equipment to  
10 clear and till the soil in preparation of planting crops in the land application areas. The applicant  
11 will employ similar mitigative measures previously discussed for the deep Class V injection well  
12 option to minimize potential construction impacts to vegetation and habitat during construction  
13 for the land application option. NRC staff expect potential impacts to vegetation and wildlife  
14 from the increased pond capacity totaling approximately 55 ha [136 ac] will not result in  
15 measurably higher impacts to wildlife because of the small amount of additional area that will be  
16 disturbed. However, combined with the irrigation areas of approximately 426 ha [1,052 ac],  
17 greater impacts to wildlife are expected.  
18
- 19 As described in SEIS Section 2.1.1.1.2.4.2, the maximum estimated area for land application is  
20 426 ha [1,052 ac] and includes operating irrigation pivots, standby irrigation pivots, and areas  
21 constructed to contain surface runoff. As described in SEIS Section 4.6, the GEIS evaluated  
22 ISR facilities that ranged in facility size from 1,000 to 7,000 ha [2,471 to 17,297 ac] with  
23 disturbed area estimates of 49 to 753 ha [120 to 1,860 ac] (NRC, 2009a) and land application of  
24 treated wastewater. The GEIS concluded that potential impacts from operations during land  
25 application will be small, but the GEIS did not evaluate the impacts of planting crops in the  
26 irrigation areas prior to land application activities, which could have a greater impact than


1 conducting land application on native vegetation. Because of the long-term direct impacts of  
2 approximately 566 ha [1,398 ac] of native vegetation, of which 426 ha [1,052 ac] will be  
3 converted into crops, staff conclude impacts to vegetation will be MODERATE.

4  
5 BLM-managed lands within the project area are not located within proposed irrigation areas and  
6 will not experience any additional direct vegetation modification from irrigation activities under  
7 the land application disposal option. The applicant may construct fencing around land  
8 application areas to control livestock access, which could indirectly increase livestock grazing  
9 activities on BLM lands, if BLM decides to allow such activities. Because BLM land is  
10 considered a public resource and is traditionally used for livestock grazing in this region, NRC  
11 staff expect the potential indirect impacts on the vegetation of these BLM lands to be SMALL.  
12 Staff also expect that in addition to potential impacts described earlier for the deep Class V  
13 injection well option, big game species may experience additional restricted movement due to  
14 fencing around land application areas and reduced forage and carrying capacity in the land  
15 application areas. However, because the project area is not within big game migration  
16 pathways and does not contain critical habitat and because big game species have larger home  
17 ranges and are highly mobile, the continued existence of big game species will not be  
18 threatened and impacts on big game will be SMALL.

19 The black-tailed prairie dog colony located within the Dewey area in land application areas  
20 could attract black-footed ferrets. The colony supports small- to medium-sized mammals that  
21 burrow in the ground, raptors and ground dwelling birds, and reptiles as described in SEIS  
22 Sections 4.6.1.1.1.1.2 and 4.6.1.1.1.1.4. Figure 4.6-4 shows the 16-ha [40-ac] areas where  
23 raptors nests are located near the proposed project. The potential wellfield areas in SEIS  
24 Figure 2.1-6 identify where potential drilling/distruptive activity could occur around each  
25 orebody, if a particular orebody were mined. Converting land application areas into cropland  
26 during construction under this option will have a greater overall impact on such wildlife than  
27 during the construction phase under the deep Class V injection well disposal option due to the  
28 additional 481 ha [1,188] of habitat alteration and land disturbance (Table 2.1-8). The removal  
29 of sagebrush communities would most impact sagebrush obligate species, such as sage-  
30 grouse, sharp-tailed grouse, sage thrasher, and some small mammals. NRC staff expect that  
31 prey-predator relationships would be altered within the irrigation areas during construction  
32 activities and prey-predator species would leave those areas temporarily during construction  
33 activities. Raptors that nest within the proposed project area could abandon their nests. Staff  
34 expect some species to return to the area after the irrigation areas are reestablished because  
35 the cropland will provide additional nesting sites, cover, and food. Staff also expect that once  
36 the crops have been established, some raptors will also return to this area to use the cropland  
37 for active hunting.

38 Because NRC staff expect the applicant or landowners to disturb the surface soil to plant crops  
39 in the irrigation areas, staff also expect an increase in potential soil erosion and sedimentation  
40 could impact surface water on and downstream from the site. Land application sites are located  
41 within 0.4 km [0.25 mi] of Beaver Creek within the Dewey area; however, ISR construction  
42 activities are not expected to significantly affect surface water quality unless irrigation activities  
43 cross over into jurisdictional waters. In addition, the applicant has committed to implementing  
44 mitigation measures to control erosion, runoff, and sedimentation (SEIS Section 4.5.1.1).  
45 Because the applicant does not plan to disturb any additional water bodies and perennial  
46 streams within the proposed project area (Powertech, 2009a), NRC staff expect that aquatic  
47 species and amphibians will not be directly affected by construction of land application areas  
48 and expect impacts to be SMALL.

1  
2  
3

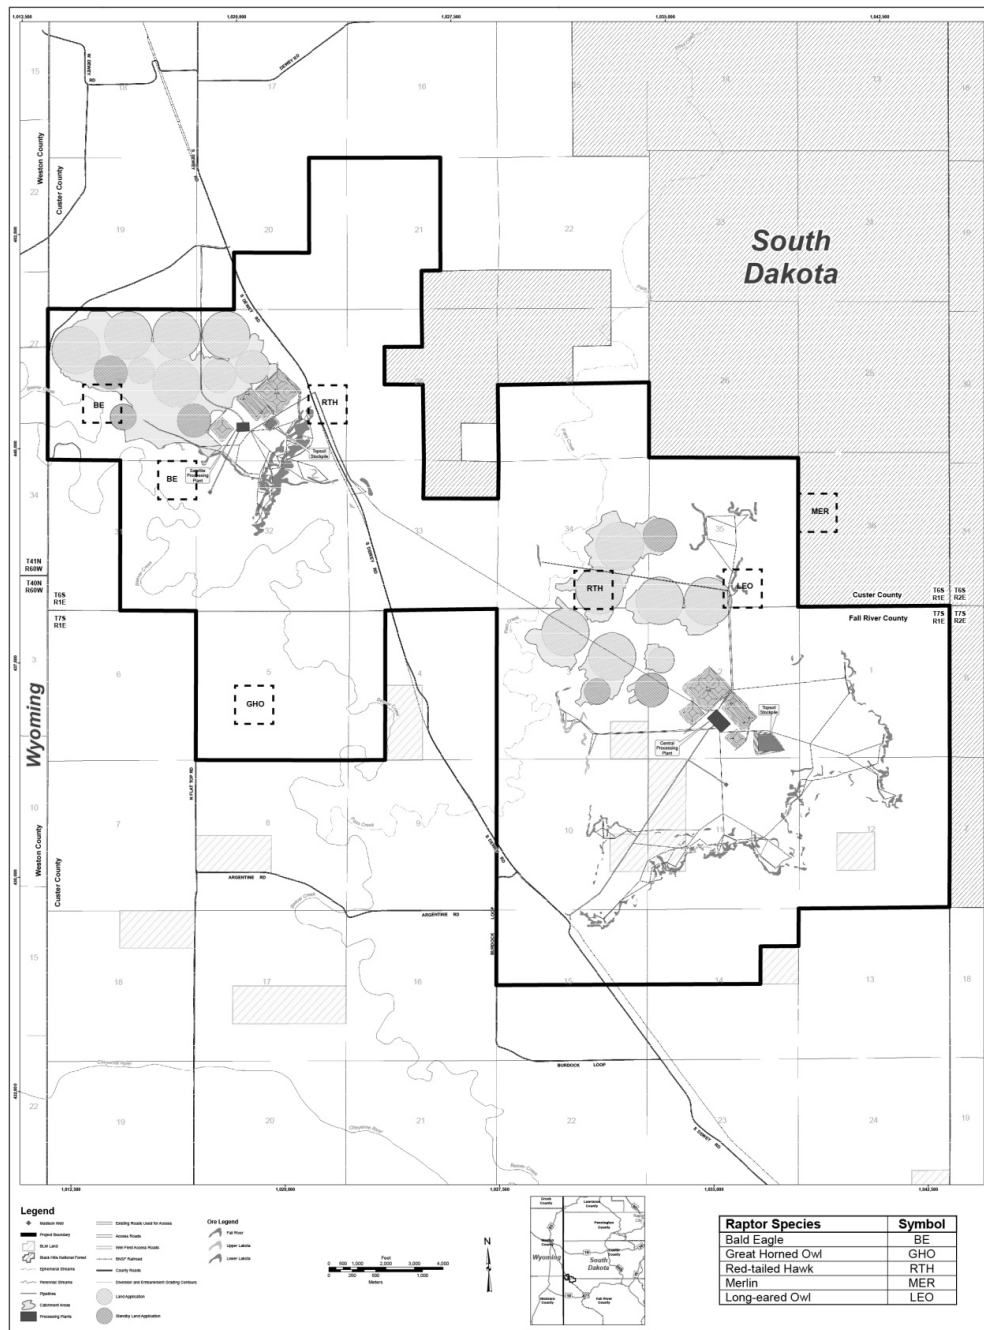

**Figure 4.6-4. Map of Raptor Nest Locations in the Dewey-Burdock Project Area and Planned Facilities for the Land Application Option.**  
Source: Powertech, 2012a.

4  
5

1 NRC staff expect the same mitigation measures will be followed for the land application option  
2 that were previously explained for the deep Class V injection well option. NRC staff conclude  
3 the additional amount of land that will be disturbed for construction under the land application  
4 disposal option is expected to noticeably alter, but not destabilize, the vegetation and important  
5 wildlife habitat that occur at the site. Therefore, the potential impact to ecological resources,  
6 including vegetation, upland game birds, raptors, waterfowl and shorebirds, nongame/migratory  
7 birds, other mammals, reptiles, and some protected and sensitive species, will be MODERATE  
8 from construction of the land application option. Because no federally threatened or  
9 endangered species are expected to occur in the project area, potential impacts to threatened  
10 or endangered species will be SMALL. NRC staff expect that construction impacts will not  
11 threaten any species' population or current existence.

#### 12 13 4.6.1.2.2 Operations Impacts

14  
15 Surface disturbance, including the application of waste water, will be the primary change to  
16 ecology during the operations phase of the proposed Dewey-Burdock ISR Project under the  
17 land application option. Wellfield expansion that will disturb approximately 56.7 ha [140 ac] of  
18 land during the operations phase will have similar impacts to vegetation wildlife impacts as  
19 expected during the operations phase for the deep Class V injection well option. Disturbance of  
20 irrigation areas totaling approximately 426 ha [1,052 ac] will have similar impacts on vegetation  
21 and wildlife as impacts expected to vegetation and wildlife during the construction phase of the  
22 land application option.

23  
24 Potential exposure of wildlife to holding/settling pond constituents and potential failure of settling  
25 and holding pond liners or embankment systems will increase under the land application waste  
26 disposal option due the additional pond capacity. In addition, the GEIS identified the following  
27 potential land application impacts from operations related to ecology: (i) reduction in growth of  
28 vegetation due to soil salination; (ii) accumulation of contaminants, dissolved solids, and  
29 radionuclides in the root zone; and (iii) increased vegetation growth due to the increase of  
30 available water (NRC, 2009a).

31  
32 According to SEIS Chapter 2, the irrigation pivots will operate 24 hours a day and irrigated  
33 areas will receive approximately 1,124 Lpm [297 gpm] from March 29 to May 10, approximately  
34 2,472 Lpm [653 gpm] from May 11 to September 24, and approximately 1,124 Lpm [297 gpm]  
35 from September 25 to October 31. From November to March, land application will not be used  
36 and treated liquid waste will be temporarily stored in ponds located near the Burdock central  
37 plant and Dewey satellite facility (Powertech, 2011). Land application activities during  
38 operations under this option will have a similar overall impact on wildlife as those expected  
39 during the construction phase under the deep Class V injection well disposal option because  
40 of the continuous disturbance from irrigation activities. NRC staff expect that few animals  
41 will inhabit the land application areas during continuous irrigation. NRC staff also expect that  
42 prey-predator relationships will be altered within the irrigation areas because of seasonal  
43 irrigation activities and may not return during the winter season when irrigation activities are not  
44 planned. Upland game birds, raptors, waterfowl and shorebirds, nongame and migratory birds,  
45 small- and medium-sized mammals, and reptiles will experience direct, long-term habitat loss  
46 and reduction in the carrying capacity during the operations phase of the land application option.  
47 Staff expect that in general, birds are mobile and able to relocate to other available regional  
48 habitat (SEIS Section 4.6.1.1.1.4). Temporary direct impacts to animals and nests could  
49 include disturbance from sprayed irrigation water that the wind carries outside of the land  
50 application areas.

51

1 At NRC-licensed ISL facilities, the licensee is required to monitor and control irrigation areas to  
2 maintain levels of radioactive constituents within allowable release standards outlined in  
3 10 CFR Part 20, Appendix B both during and after disposal by land application (NRC, 2009a).  
4 In addition, South Dakota regulates land application of wastewater and may impose release  
5 limits on nonradiological constituents to reduce negative impacts on soils and vegetation. As  
6 stated in SEIS 2.1.1.1.6.2 for radiological emissions, the applicant proposes regular monitoring  
7 of air, soil, biomass (i.e., crops and livestock), surface water, and groundwater to identify the  
8 presence of NRC- and SDDENR-regulated constituents. Monitoring results must be reported to  
9 NRC semiannually (see SEIS Chapter 7).

10  
11 The NRC staff conclude the overall impact on vegetation, small- to medium-sized mammals,  
12 upland game birds, raptors, waterfowl and shorebirds, nongame and migratory birds, and  
13 reptiles from operations for the land application liquid waste disposal option will be MODERATE  
14 because of the planned 8-year operation period that will alter approximately 426 ha [1,052 ac] of  
15 vegetation, wildlife distribution, and wildlife habitat. Based on the foregoing analysis, the  
16 impacts are expected to noticeably alter important attributes of the terrestrial environment;  
17 however, staff do not expect these impacts to threaten the continued existence of any species.

18  
19 Because the land application option would not disturb any additional water bodies and perennial  
20 streams within the proposed project area (Powertech, 2009a), staff expect that aquatic habitat  
21 will not be directly affected by land application activities and potential impacts to aquatic species  
22 and amphibians will be SMALL. For the same reasons explained for construction impacts on  
23 big game from the land application option, staff expect potential operations impacts to big game  
24 from operations during the land application option to be SMALL.

#### 25 26 4.6.1.2.3 Aquifer Restoration Impacts

27  
28 During aquifer restoration, potential impacts to ecological resources for the land application  
29 liquid waste disposal option at the proposed Dewey-Burdock ISR Project will remain similar to  
30 those described previously for the operations phase. Planned activities using existing  
31 infrastructure during the aquifer restoration phase are described in SEIS Section 4.2.1.2.3.  
32 NRC staff expect land application activities to continue during the aquifer restoration phase.  
33 Because construction and drilling equipment are not used during the aquifer restoration phase,  
34 NRC staff expect impacts from human presence, noise, and wildlife mortalities from equipment  
35 to decrease compared to human presence, noise, and wildlife mortalities expected during the  
36 operations phase. The expected liquid waste flow rates for each land application area will be  
37 approximately 2,070 Lpm [547 gpm] during concurrent uranium production and aquifer  
38 restoration and approximately 1,892 Lpm [500 gpm] during aquifer restoration alone (SEIS  
39 Section 2.1.1.1.4.1.2). This expected rate of liquid waste land application is less than the  
40 maximum rate predicted for each land application area during operations, approximately  
41 2,472 Lpm [653 gpm] from May 11 to September 24.

42  
43 As with the operations phase, impacts to potential land application areas during aquifer  
44 restoration will be mitigated by implementing a monitoring program and maintaining levels of  
45 contaminants in treated waste water to allowable release limits contained in 10 CFR Part 20,  
46 Appendix B (Powertech, 2009a, 2011). Thus, NRC staff conclude that the overall potential  
47 impacts to vegetation, small- to medium-sized mammals, raptors, upland game birds, waterfowl  
48 and shorebirds, nongame and migratory birds, and reptiles will remain MODERATE. Potential  
49 impacts to big game, aquatic species, and amphibians during the aquifer restoration phase will  
50 not increase beyond those of the operations phase and will therefore be SMALL.

#### 4.6.1.2.4 Decommissioning Impacts

Staff expect the potential ecological impacts of decommissioning for the land application liquid waste disposal option will be similar to those described in SEIS Section 4.6.1.1.4 for the deep Class V injection well disposal option, including increased human presence, noise, and construction and field equipment. In addition to those activities planned for decommissioning under the deep Class V injection well disposal option, irrigation area pipelines, access roads, and larger pond areas will be directly impacted under the land application disposal option as explained in SEIS Section 4.6.1.2.1.

The dismantling of the proposed project facilities, piping, infrastructure, and roads and reseeding and placement of soil will have fewer ecological impacts than those experienced during the construction phase due to continuous revegetation efforts during the ISR lifecycle. However, noise, vehicle and equipment use, and human presence will increase to levels similar to those experienced during the construction phase and for the same expected amount of time (2 years). For these reasons, NRC staff conclude there will be a MODERATE impact on vegetation, small- to medium-sized mammals, raptors, upland game birds, waterfowl and shorebirds, nongame and migratory birds, and reptiles from decommissioning and reclamation under the land application liquid waste disposal option until vegetation has been reestablished and preconstruction wildlife populations return to the area. For the same reasons explained in SEIS Section 4.6.1.1.4, potential impact to big game, aquatic species, and amphibians will remain SMALL from decommissioning under the land application option for the proposed project.

#### 4.6.1.3 Disposal Via Combination of Class V Injection and Land Application

For the combined deep Class V injection well disposal and land application option, land application facilities and infrastructure will be constructed, operated, restored, and decommissioned on an as-needed basis depending on the Class V injection well disposal capacity (Powertech, 2011). For the reasons explained in SEIS Section 4.2.1.3 for operations impacts to land use under the land application option, the significance of impacts that could impact either vegetation or wildlife populations for the combined disposal option will be less than for the land application option but greater than for the deep Class V injection well disposal option, as reflected in Table 4.6-5. Therefore, NRC staff conclude that the ecological impacts of the combined deep Class V injection well and land application disposal option for each phase of the proposed Dewey-Burdock ISR Project will bound the significance of ecological impacts of the deep Class V injection well option and the land application option.

#### 4.6.2 No-Action (Alternative 2)

Under the No-Action alternative, there will be no ISR facility construction, operations, aquifer restoration, or decommissioning associated with this project; therefore, there will be no land disturbance from the proposed action that could impact either vegetation or wildlife populations. The area will continue to sustain vegetation communities and wildlife habitat typical of the region, as characterized in SEIS Section 3.6. Land will continue to be used for livestock grazing and extraction activities. Grazing of existing vegetation, particularly the grassland communities, will continue. Wildlife within the proposed license area could be affected by ongoing grazing if species were displaced by cattle populations due to lack of forage and cover; however, there will be no impacts to ecological resources from the proposed Dewey-Burdock ISR Project under the No-Action alternative.



1

**Table 4.6-5. Significance of Ecological Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL for vegetation, terrestrial, and aquatic species	MODERATE for vegetation, small- to medium-sized mammals, raptors, waterfowl and shorebirds, upland game birds, nongame and migratory birds, and reptiles  SMALL for big game, aquatic species, amphibians	SMALL to MODERATE for vegetation, terrestrial, and aquatic species
Operations	SMALL for vegetation, terrestrial, and aquatic species	MODERATE for vegetation, small- to medium-sized mammals, raptors, waterfowl and shorebirds, upland game birds, nongame and migratory birds, and reptiles  SMALL for big game, aquatic species, amphibians	SMALL to MODERATE for vegetation, terrestrial, and aquatic species
Aquifer Restoration	SMALL for vegetation, terrestrial, and aquatic species	MODERATE for vegetation, small- to medium-sized mammals, raptors, waterfowl and shorebirds, upland game birds, nongame and migratory birds, and reptiles  SMALL for big game, aquatic species, amphibians	SMALL to MODERATE for vegetation, terrestrial, and aquatic species

2

1

**Table 4.6-5. Significance of Ecological Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project (continued)**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Decommissioning	MODERATE before vegetation is reestablished	MODERATE before vegetation is reestablished	MODERATE before vegetation is reestablished
	SMALL after vegetation is reestablished	SMALL after vegetation is reestablished	SMALL after vegetation is reestablished
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well disposal and land application disposal options.			

2

### 3 **4.7 Air Quality Impacts**

4

5 As described in GEIS Section 4.4.6, potential environmental impacts to air quality could occur  
6 during all phases of the ISR facility lifecycle (NRC, 2009a). Nonradiological air emission  
7 impacts primarily involve fugitive road dust from vehicles traveling on unpaved roads and  
8 combustion engine emissions from vehicles and diesel equipment. In general, any  
9 nonradiological emissions from pipeline system venting, resin transfer, and elution would be  
10 expected to be at such low levels that they would be negligible. Such emissions were not  
11 considered in the analysis. Radon could also be released from well system relief valves, resin  
12 transfer, or elution. Potential radiological air impacts, including radon release impacts, are  
13 addressed in the Public and Occupational Health and Safety Impacts analyses in SEIS  
14 Section 4.13.

15

16 Factors NRC staff used in determining the magnitude of the potential impacts are described  
17 in GEIS Section 4.4.6 (NRC, 2009a) and include whether (i) the air quality of the site's region of  
18 influence (ROI) is in compliance with the National Ambient Air Quality Standards (NAAQS),  
19 (ii) the facility can be classified as a major source under the New Source Review or operating  
20 (Title V of the Clean Air Act) permit programs, and (iii) the presence of Prevention of Significant  
21 Deterioration (PSD) Class I areas within the region could be impacted by emissions from the  
22 proposed action.

23

#### 24 GEIS Construction Phase Summary

25

26 As discussed in GEIS Section 4.4.6.1, fugitive dust and combustion (vehicle and  
27 diesel equipment) emissions during land-disturbing activities associated with construction  
28 would be expected to be short term and reduced through BMPs (e.g., wetting of roads and  
29 cleared land areas to reduce dust emissions). Estimated ISR-construction-phase fugitive dust  
30 annual concentrations used in the GEIS are expected to be well below the PM<sub>2.5</sub> NAAQS.  
31 Additionally, particulate, sulfur dioxide, and nitrogen dioxide concentration estimates used in the  
32 GEIS are expected to be below PSD Class II allowable increments (1 to 9 percent) and the  
33 stricter Class I increments (7 to 84 percent). NRC staff concluded in the GEIS that for NAAQS  
34 attainment areas, nonradiological impacts would be SMALL. (NRC, 2009a)

35

### GEIS Operations Phase Summary

GEIS Section 4.4.6.2 stated that operating ISR facilities are not major point source emitters and are not expected to be classified as major sources under the operation (Title V) permitting program. The GEIS states that the primary nonradiological emissions during operations include fugitive dust and combustion products from equipment, maintenance, transport trucks, and other vehicles. Additionally, NRC staff concluded in the GEIS that any nonradiological emissions from pipeline system venting, resin transfer, and elution would be expected to be at such low levels that they would be negligible and were not considered in the analysis. For NAAQS attainment areas, NRC staff concluded in the GEIS that nonradiological air quality impacts would be SMALL. (NRC, 2009a)

### GEIS Aquifer Restoration Phase Summary

As described in GEIS Section 4.4.6.3, because the same infrastructure would be used during the aquifer restoration as during operations, air quality impacts from aquifer restoration would be similar to, or less than, those during operations. Additionally, fugitive dust and combustion emissions from vehicles and equipment during aquifer restoration would be similar to, or less than, the dust and combustion emissions during operations. For NAAQS attainment areas, NRC staff concluded in the GEIS that nonradiological air quality impacts would be SMALL. (NRC, 2009a)

### GEIS Decommissioning Phase Summary

As discussed in GEIS Section 4.4.6.4, fugitive dust, vehicle emissions, and diesel emissions during land-disturbing activities from the decommissioning phase would come from many of the same sources as the construction phase. In the short term, emission levels are expected to increase given the activity (i.e., demolishing of process and administrative buildings, excavating and removing contaminated soils, and grading of disturbed areas). However, such emissions would be expected to decrease as decommissioning proceeds, and therefore, overall, impacts would be similar to, or less than, those associated with construction; would be short term; and would be reduced through BMPs (e.g., dust suppression). NRC staff concluded in the GEIS that for NAAQS attainment areas, nonradiological impacts would be SMALL. (NRC, 2009a)

Potential environmental impacts on air quality during construction, operations, aquifer restoration, and decommissioning phases of the proposed Dewey-Burdock ISR Project are discussed in the following sections. The discussion also addresses the impacts on air quality during the peak year. The peak year accounts for the time when all four phases occur simultaneously and represents the highest amount of emissions the proposed action would generate in any 1 year. The applicant identifies 2 years when all four phases will occur simultaneously and 7 years when construction and operation phases will occur simultaneously (Powertech, 2012d).

#### **4.7.1 Proposed Action (Alternative 1)**

As described in SEIS Section 3.7.2, the air quality of the Black Hills-Rapid City Intrastate Air Quality Control Region, where the proposed Dewey-Burdock ISR Project is located, is designated as an attainment area for all NAAQS pollutants and is located in a Class II area for PSD designation. The nearest PSD Class I area, Wind Cave National Park, located about 47 km [29 mi] northeast of the proposed Dewey-Burdock ISR Project, is also located in this same

1 air quality control region and is also classified as an attainment area. The attainment status of  
2 the air quality surrounding the proposed license area provides a measure of current air quality  
3 conditions and affects considerations for allowing new emission sources.

4  
5 While NRC is responsible for assessing the potential environmental impacts from the proposed  
6 action pursuant to the National Environmental Policy Act (NEPA) of 1969, as amended, NRC  
7 does not have the authority to develop or enforce regulations to control nonradiological air  
8 emissions from equipment licensees use. For the proposed Dewey-Burdock ISR Project, this  
9 authority rests with SDDENR. To ensure the air quality of South Dakota is adequately  
10 protected, in addition to addressing all NRC regulatory requirements for radiological emissions,  
11 NRC applicants and licensees must comply with all applicable state and federal air quality  
12 regulatory compliance and permitting requirements.

13  
14 Classification as a major or minor source is the purview of the regulatory authority, SDDENR.  
15 NRC staff acknowledge that SDDENR has not yet conducted the formal air quality permitting for  
16 the proposed Dewey-Burdock ISR Project (see Table 1.6-1). In the absence of a formal  
17 determination and permitting by SDDENR, NRC staff will characterize the magnitude of air  
18 effluents from the proposed project throughout SEIS Section 4.7.1 in part by comparing (i) the  
19 emission levels to PSD and Title V thresholds and (ii) the modeled concentrations to regulatory  
20 standards such as NAAQS. This characterization is meant to provide a context for  
21 understanding the magnitude of the proposed project's air effluents. The NRC description in  
22 this SEIS does not document or represent the formal SDDENR determination. As such, the  
23 SDDENR determination and permitting may vary with the NRC description.

24  
25 Expressing the proposed project's emissions in concentrations can help in characterizing the  
26 magnitude of the emission levels because regulatory standards, such as NAAQS and PSD, are  
27 also expressed in concentrations. The AERMOD dispersion model was used to predict  
28 pollutant concentrations at 47 locations on and in the vicinity of the proposed site based on the  
29 annual emission mass flow rates from the sources in Tables 2.1-1 and 2.1-2. These  
30 concentrations were calculated for the construction, operation, aquifer restoration, and  
31 decommissioning phases and are based on the emission estimates from stationary and mobile  
32 sources. Figure 4.7-1 identifies the locations. Tables C-5 to C-8 presents the detailed  
33 modeling results. This modeling used the initial emission inventory the applicant provided  
34 (Powertech, 2010a). However, the applicant revised the mobile source emission inventory in  
35 part to incorporate mitigation measures and improve the accuracy of the emissions expected  
36 from the ISR activities (Powertech, 2012d). Section C.2.1 describes the differences between  
37 the initial and revised emission inventory. The applicant committed to perform air dispersion  
38 modeling using the revised emission inventory before the final SEIS is prepared (Powertech,  
39 2012d). Hence, this updated modeling has not yet been provided to NRC. Therefore, the  
40 modeling results based on the initial inventory were used to generate the peak year pollution  
41 concentrations for the updated emission inventory. Section C.2.3 explains how this was done.  
42 Table 4.7-1 contains the peak year pollutant concentrations from combustion emissions from  
43 stationary and mobile sources. This table also compares these concentrations to NAAQS and  
44 PSD standards. These standards are described in SEIS Section 3.7.2.

45  
46 The modeling and associated impact analyses in the final SEIS should be updated to include  
47 the following:

- 48  
49 • Incorporate the revised fugitive dust emission inventory, including both the project-specific  
50 onsite and offsite emissions, into the air dispersion modeling.



**Table 4.7-1. NAAQS Pollutant Concentrations from the Nonradiological Combustion Emissions from Stationary and Mobile Sources for the Peak Year\* of the Proposed Action**

Pollutant	Time	Concentration for Peak Year†	Percentage of NAAQS‡	Percentage of Prevention of Significant Deterioration Class II Standards ‡
PM <sub>10</sub> §	24-hour mean	8.2 µg/m <sup>3</sup>	5.5	27.3
Sulfur Dioxide§	24-hour mean	9.6 ppb	6.8	26.0
	Annual mean	0.25 ppb	0.8	3
Nitrogen Oxides	Annual mean	1.3 ppb	2.4	18.9
Carbon Monoxide	8-hour mean	0.0459 ppm	0.5	na
	1-hour mean	0.359 ppm	1.0	na

Source: Modified from Powertech (2010a, 2012d)  
 \*Because ISR phases can overlap, the peak year accounts for when all four phases occur simultaneously and represents the highest amount of emissions the proposed action would generate in any one project year.  
 †Values not the result of direct modeling of the revised inventory (see SEIS Section C.2.3 for a detailed explanation).  
 ‡See SEIS Section 3.7.2 for discussion of NAAQS and Prevention of Significant Deterioration Class II standards.  
 §Sulfur dioxide concentrations compared to the previous standards as presented in GEIS Table 3.2-8.

- 1
- 2 • Update the air dispersion modeling for NAAQS compliance by (i) using the revised
- 3 inventory and (ii) including the following information not provided in the initial modeling:
- 4 PM<sub>2.5</sub> (annual and 24 hour), SO<sub>2</sub> (1 hour), and NO<sub>2</sub> (1 hour).
- 5
- 6 • Update the air dispersion modeling for PSD compliance by (i) using the revised
- 7 inventory, (ii) analyzing for both Class II (at site) and Class I (at Wind Cave National
- 8 Park), and (iii) including modeling results for all of the pollutants and timeframes as
- 9 described in 40 CFR 52.21.
- 10
- 11 • Provide modeling results for the Air Quality Related Values for the Wind Cave
- 12 National Park.
- 13
- 14 • Revise the level of detail associated with the emission inventory, if needed, to
- 15 accommodate for the air dispersion modeling associated with short timeframes
- 16 (e.g., 1-hour or 24-hour averaging periods).
- 17
- 18 • Use the appropriate emission inventory data for determining NAAQS or PSD modeling
- 19 results for specific averaging times (e.g., an annual emission value may not be the
- 20 appropriate information base for determining a 1-hour or 24-hour averaging
- 21 time concentration).
- 22
- 23 • Provide model receptor diagrams with the modeling analyses (i.e., identify the receptor
- 24 locations where the pollutant concentrations were calculated).
- 25
- 26 If during the process of conducting the revised air modeling it is determined that any of the
- 27 topics for the model update are not addressed as indicated here, NRC shall provide a
- 28 justification for this change. The Dewey-Burdock site-specific modeling results in the final SEIS
- 29 will replace the modeling results (i.e., pollutant concentrations) in the draft SEIS as described in
- 30 the preceding paragraph. This impact analysis in the final SEIS will be based on the new
- 31 modeling results. Potentially, the impact magnitude in the final SEIS could be different than that

1 in the draft SEIS. As described in Table 4.7.1, the draft SEIS categorizes the air quality impacts  
2 for the various phases and waste disposal options as ranging from SMALL to MODERATE. For  
3 particular phases or waste disposal options, the new modeling results could indicate that the  
4 impact magnitude could be reduced to only SMALL. In this case the draft SEIS, which  
5 characterizes the impact magnitude up to MODERATE, presents a conservative or bounding  
6 analysis. Conversely, the impact magnitude could be greater and classified as LARGE. For  
7 example, if the revised pollutant concentration exceeded a regulatory NAAQS or PSD standard,  
8 the impact magnitude would be changed to LARGE. Mitigation could be implemented that could  
9 reduce the emission levels and associated pollutant concentrations. If mitigation is incorporated  
10 into the final SEIS impact analysis (e.g., to lower emission levels or pollutant concentrations  
11 such that the impact magnitude level was changed), the final SEIS would describe the  
12 effectiveness of the mitigation. SEIS Chapter 6 identifies various air quality mitigation  
13 measures. However, possible mitigation measures for implementation based on the results of  
14 the modeling effort would not be limited to the ones identified in SEIS Chapter 6.

15  
16 The NRC staff conclude that the site-specific conditions at the proposed Dewey-Burdock ISR  
17 Project are not bounded by those described in the GEIS for air quality. The estimated emission  
18 levels for the proposed project described in SEIS Section 2.1.1.1.6.1.1 are greater than those  
19 cited in GEIS Table 2.7-2 (NRC, 2009a). The level of activity for the proposed project is greater  
20 than that cited in the GEIS in terms of the amount of equipment used and amount of time this  
21 equipment is operated. For example, drill rigs are the primary source for emissions for the  
22 mobile construction and drilling field equipment category (see Table C-2). For the proposed  
23 Dewey-Burdock ISR Project, these estimates were calculated utilizing 13 drilling rigs each  
24 operating 10 hours a day (Powertech, 2010a). Estimates in GEIS Table 2.7-1 cite the use of up  
25 to eight drilling rigs for 8 hours a day (NRC, 2009a).

26  
27 The environmental impacts on air quality for each of the liquid waste disposal options the  
28 applicant proposed (i.e., deep well disposal via Class V injection wells, land application, or  
29 combined deep well disposal and land application) are discussed in the following sections.

30

#### 31 **4.7.1.1 Disposal Via Class V Injection Wells**

32

33 As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid  
34 wastes is deep well disposal via Class V injection wells. Potential environmental impacts on air  
35 quality from construction, operations, aquifer restoration, and decommissioning associated with  
36 the Class V injection well disposal option at the proposed Dewey-Burdock ISR Project are  
37 discussed in the following sections.

38

##### 39 4.7.1.1.1 Construction Impacts

40

41 To help characterize the magnitude of the proposed project's air effluents, the emission levels  
42 are compared to regulatory thresholds, such as the New Source Review program threshold for  
43 classification as a major source. Based on stationary source emission levels from Table 2.1-1,  
44 NRC staff would not consider the proposed facility to be classified as a major source for air  
45 emissions under the New Source Review program described in SEIS Section 2.1.1.1.6.1.1. The  
46 New Source Review permitting program threshold for classification as a major source in an  
47 attainment area for the proposed Dewey-Burdock ISR Project would be 227 metric tons [250  
48 short tons]. The estimated emission levels of NAAQS pollutants for stationary sources for the  
49 proposed Dewey-Burdock ISR Project listed in Table 2.1-1 are well below this threshold with the  
50 highest estimate at 2.4 metric tons [2.6 short tons] for NO<sub>x</sub>. All of the estimated annual emission

1 levels of nonradiological pollutants from mobile sources the NRC staff evaluated (see  
2 Tables 2.1-2, 2.1-3, and 2.1-6) were lower than the New Source Review thresholds except for  
3 fugitive dust, which was higher.

4  
5 Air emission during the construction phase of the proposed Dewey-Burdock ISR Project would  
6 consist primarily of combustion emissions and fugitive road dust. The construction phase  
7 emissions from mobile sources generate the highest levels of NAAQS pollutants when  
8 compared to the other three phases (Table 2.1-2) and the stationary sources (Table 2.1-1). For  
9 the construction phase combustion emissions, the NAAQS pollutants with the highest emission  
10 levels are NO<sub>x</sub> and CO (see Table 2.1-2).

11  
12 For combustion emissions, the peak year concentrations for each of the NAAQS pollutants are  
13 below the NAAQS (see Table 2.1-4). These concentrations include both stationary sources  
14 from Table 2.1-1 and mobile sources from Table 2.1-2. The estimated project level sulfur  
15 dioxide concentration is at 7 percent of the NAAQS. The estimated PM<sub>10</sub> level (24-hour mean)  
16 is about 6 percent of the NAAQS. All of the other pollutant concentrations are no more than  
17 about 2 percent of the NAAQS. As described in Table C-11, the construction phase  
18 contribution to the peak year emissions varies between 67 and 78 percent depending on the  
19 particular pollutant. For the construction phase only, the estimated sulfur dioxide concentration  
20 is about 5 percent of the NAAQS and the PM<sub>10</sub> concentration is about 4 percent of the NAAQS.

21  
22 While the NAAQS primarily relate to an area's attainment classification (see SEIS Section  
23 3.7.2), the PSD standards relate to pollution levels made by individual projects. The peak year  
24 concentrations for each pollutant are below the PSD Class II standards (see Table 2.1-4). The  
25 estimated project level PM<sub>10</sub> concentration is about 27 percent of the PSD Class II standard.  
26 The estimated sulfur dioxide (24-hour mean) concentration is about 26 percent of the PSD  
27 Class II standard. All of the other pollutant concentrations are no more than about 19 percent of  
28 the PSD Class II standards. For the construction phase only, the estimated PM<sub>10</sub> concentration  
29 is about 19 percent of the PSD Class II standard and the sulfur dioxide concentration is about  
30 18 percent of the standard. The applicant did not provide air dispersion modeling beyond the  
31 immediate vicinity of the proposed site, a Class II area. Wind Cave National Park is a Class I  
32 area located about 46.7 km [29.0 m] northeast of the proposed project area, and the  
33 predominant wind direction is from the southeast (see Figure 3.7-1). The applicant has  
34 committed to update the air dispersion modeling before the final SEIS is prepared (Powertech,  
35 2012d). The final SEIS analyses would be based on this updated modeling. SEIS Section 4.7.1  
36 describes the scope of this update, which would include PSD and Air Quality Related Values  
37 modeling for the Wind Cave National Park. The applicant has yet to complete the formal air  
38 quality permit process including providing any SDDENR-required documentation and  
39 information (Powertech, 2010a).

40  
41 The pollution concentrations described in this SEIS section are based on the revised emission  
42 inventory (Powertech, 2012d). The applicant revised the initial mobile combustion emission  
43 inventory, in part, to incorporate mitigation measures and improve the accuracy of the emissions  
44 expected from the ISR activities. In association with the revised inventory, the applicant  
45 committed to the following actions (Powertech, 2012d):

- 46  
47 • Lowering the drill rig engine horsepower from 550 horsepower to 300 horsepower,  
48 except for the deep well drill rig



- Using Tier 1, or higher, drill rig engines and Tier 3, or higher, construction equipment engines

The various tiers refer to a phased program of federal standards that requires newly manufactured engines to generate lower pollutant emission levels. Higher tier numbers correlate stricter emission standards and lower pollutant levels. Section C.2.1 describes how changes in engines used are incorporated into the calculation of the revised emissions inventory. Table C-4 describes the effectiveness (i.e., the percentage of emissions reduction) of the different tier levels based on the associated emission factors. The applicant identified other mitigation measures it will implement (see Table 6.2-1); however, these other measures are not incorporated in the calculation of the revised emissions inventory.

Revised air dispersion modeling results (i.e., pollutant concentrations) were not provided with the revised emission inventory. As stated earlier in this section, the applicant committed to perform air dispersion modeling using the revised emission inventory before the final SEIS is prepared (Powertech, 2012d). The scope of the modeling update is described in SEIS Section 4.7.1. Meanwhile, NRC staff used the modeling results based on the initial emission inventory to generate pollutant concentrations for the revised emission inventory (see Table 2.1-4). This process is described in Section C.2.3.

All phases of the proposed Dewey-Burdock ISR Project would also result in greenhouse gas emissions (see Table 2.1-5). These estimated levels of greenhouse gas emissions for the construction phase are lower than the current EPA permitting threshold, as described in SEIS Section 3.7.2. For comparison, the annual estimated greenhouse gas emissions for the construction phase from all sources (i.e., stationary, mobile, and electrical consumption) were at 23,748 metric tons [26,178 short tons], which is a small fraction of those produced annually in South Dakota at 36.5 million metric tons [40.2 million short tons] of gross CO<sub>2</sub>e emissions (Center for Climate Strategies, 2007). NRC staff conclusions concerning potential greenhouse gas impacts are addressed in SEIS Section 5.7 on air quality cumulative effects.

The construction phase generates the highest levels of fugitive dust relative to the other phases (see Table 2.1-6). Travel on unpaved roads generates more fugitive emissions than wind erosion (see Tables 2.1-6 and 2.1-7). The fugitive road dust estimate exceeds the New Source Review permitting threshold for classification as a major source as described in SEIS Section 2.1.1.1.6.1.1. For travel on unpaved roads, the onsite construction phase (facilities and well field) emission levels are at 290.7 metric tons [320.4 short tons] for PM<sub>10</sub> and 29.1 metric tons [32.1 short tons] for PM<sub>2.5</sub>. Inclusion of the wind erosion emission would slightly increase these totals. The peak year onsite emission level estimates for travel on unpaved roads are at 481.8 metric tons [531.1 short tons] for PM<sub>10</sub> and 48.2 metric tons [53.1 short tons] for PM<sub>2.5</sub>. The fugitive dust estimate calculation incorporates one mitigation measure. The estimate credits water spray for a 50 percent reduction of all fugitive emissions generated from onsite unpaved roads. In addition, the applicant has proposed the following mitigation measures to further reduce and control air emissions (Powertech, 2009a):

- Implement standard dust control measures such as speed limits.
- Coordinate dust-producing activities to reduce maximum dust levels.
- Maintain vehicles to meet applicable EPA emission standards.
- Restore and reseed disturbed areas.
- Encourage employee carpooling.

1 As previously described, the fugitive dust emissions are not included in the modeling results in  
2 Table 2.1-4. The applicant committed to perform air dispersion modeling using the revised  
3 emission inventory before the final SEIS is prepared (Powertech, 2012d). The final SEIS  
4 analyses would be based on this updated modeling. SEIS Section 4.7.1 describes the scope of  
5 this update, which would include incorporating fugitive dust emissions from the proposed  
6 project. Meanwhile, as described in Section C.4.2, the modeling results for pollution  
7 concentrations from a similar project are used to generate pollution concentrations for the  
8 proposed project. By this method, the Dewey-Burdock onsite peak year fugitive dust  
9 concentrations (24-hour mean) would be 23.3  $\mu\text{g}/\text{m}^3$  for  $\text{PM}_{10}$  and 1.2  $\mu\text{g}/\text{m}^3$  for  $\text{PM}_{2.5}$ . These  
10 concentrations are below the applicable NAAQS with  $\text{PM}_{10}$  at about 15 percent and  $\text{PM}_{2.5}$  at  
11 about 3 percent. These concentrations are also below the applicable PSD Class II standards  
12 with  $\text{PM}_{10}$  at about 78 percent and  $\text{PM}_{2.5}$  at about 13 percent. Table C-18 contains the pollution  
13 concentrations for the construction phase fugitive emissions. These concentrations are below  
14 the applicable NAAQS with  $\text{PM}_{10}$  at about 7 percent and  $\text{PM}_{2.5}$  at about 2 percent. These  
15 concentrations are also below the applicable PSD Class II standards with  $\text{PM}_{10}$  at about  
16 32 percent and  $\text{PM}_{2.5}$  at about 6 percent.

17  
18 The proposed action's dispersion modeling results that address emissions from the burning of  
19 fossil fuels for the stationary and mobile sources indicate that pollution concentration levels in  
20 and around the proposed site are low. Both the peak year and construction phase only pollutant  
21 concentrations are below the NAAQS. In addition, both concentrations are below the PSD  
22 standards, which relate to the pollution concentration increment a project is allowed. Therefore,  
23 the low level of combustion emissions would result in a SMALL impact on air quality.

24  
25 The fugitive dust emissions are below NAAQS and PSD standards. However, the mass of  
26 particulate matter generated from fugitive emissions is much greater than that generated from  
27 combustion emissions (see Tables 2.1-2 and 2.1-6). In addition, these fugitive dust emission  
28 sources consist of many sources spread out over a large area that tend to generate emissions  
29 sporadically. Due to the level and nature of these fugitive emissions, there is a potential for  
30 noticeable localized dust emissions. Short-term, intermittent impacts are possible to the area in  
31 and around the site, particularly when vehicles travel on unpaved roads. At times, the fugitive  
32 emission would result in a MODERATE impact on air quality. The NRC staff conclude that the  
33 overall air quality during the construction phase for the Class V injection well disposal option  
34 would range from SMALL to MODERATE.

#### 35 36 4.7.1.1.2 Operations Impacts

37  
38 The construction phase combustion emission impact analyses in SEIS Section 4.7.1.1.1 present  
39 (i) the description and use of the revised emission inventory, (ii) inclusion of mitigation in the  
40 calculation of the revised inventory emission levels, (iii) lack of air dispersion modeling beyond  
41 the proposed site, and (iv) the use of the modeling results based on the initial emission  
42 inventory to generate pollutant concentrations for the revised emission inventory. SEIS  
43 Section 4.7.1 describes the applicant's commitment to provide updated air dispersion modeling  
44 for incorporation into the final SEIS as well as the scope of this updated modeling. This  
45 information also applies to the operation phase impact analyses.

46  
47 For the proposed Dewey-Burdock ISR Project, all of the air emissions from stationary sources  
48 were attributed to the operations phase (Table 2.1-2). NRC staff would not consider the  
49 proposed facility to be a major source for air emissions based on the emission levels of the  
50 stationary sources identified in Table 2.1-1. The Title V or operating permit threshold for  
51 classification as a major source in an attainment area is 90.7 metric tons [100 short tons] for any

1 of the NAAQS regulated pollutants. The estimated emission levels of NAAQS pollutants for  
2 stationary sources for the proposed action listed in Table 2.1-1 are well below the major source  
3 threshold. The pollutant with the highest emission level, NO<sub>x</sub>, was under 3 percent of this  
4 threshold. The estimated annual emission levels of nonradiological pollutants from  
5 nonstationary sources the NRC staff evaluated (see SEIS Section 2.1.1.6.1.1) were lower  
6 than the operating permit threshold, except for fugitive road dust, which was higher.

7  
8 Air emissions during the operation phase of the proposed Dewey-Burdock ISR Project would  
9 consist primarily of combustion emissions and fugitive road dust. For the operations phase  
10 combustion emissions, the NAAQS pollutants with the highest emission levels are NO<sub>x</sub> and CO  
11 (see Table 2.1-2).

12  
13 As described previously in SEIS Section 4.7.1.1.1, the peak year concentrations for each  
14 NAAQS pollutant are below the NAAQS (see Table 2.1-4). These concentrations include both  
15 stationary sources from SEIS Table 2.1-1 and mobile sources from SEIS Table 2.1-2. As  
16 described in Table C-11, the operation phase contribution to the peak year emissions varies  
17 between 13 and 19 percent depending on the particular pollutant. For the operation phase only,  
18 both sulfur dioxide and PM<sub>10</sub> are about 1 percent of the NAAQS. The peak year concentrations  
19 for each pollutant are also below the PSD Class II standards. For the operation phase only, the  
20 PM<sub>10</sub> concentration is about 5 percent of the PSD Class II standard and the sulfur dioxide  
21 concentration is about 4 percent of the standard.

22  
23 The operations phase generates the most overall greenhouse gas emissions relative to the  
24 other three phases. The annual estimated emissions for the operation phase from all sources  
25 (i.e., stationary, mobile, and electrical consumption) were at 55,764 metric tons [61,469 short  
26 tons] of CO<sub>2</sub>e. Stationary sources accounted for less than 5 percent of the overall carbon  
27 dioxide emissions (Table 2.1-5). These estimated levels of greenhouse gas emissions are  
28 lower than the current EPA permitting threshold as described in SEIS Section 3.7.2. NRC staff  
29 conclusions concerning potential greenhouse gas impacts are addressed in SEIS Section 5.7  
30 on air quality cumulative effects.

31  
32 For the operation phase, travel on unpaved roads generates more fugitive emissions than wind  
33 erosion (see Tables 2.1-6 and 2.1-7). The fugitive road dust estimate exceeds the Title V or  
34 operating permit threshold for classification as a major source. For travel on unpaved roads, the  
35 onsite operation phase emission levels are at 155.6 metric tons [171.5 short tons] for PM<sub>10</sub> and  
36 15.6 metric tons [17.2 short tons] for PM<sub>2.5</sub>. Inclusion of the wind erosion emission would  
37 slightly increase these totals. The peak year onsite emission level estimates for travel on  
38 unpaved roads are at 481.8 metric tons [531.1 short tons] for PM<sub>10</sub> and 48.2 metric tons  
39 [53.1 short tons] for PM<sub>2.5</sub>. The fugitive dust estimate calculation incorporates one mitigation  
40 measure. The estimate credits water spray for a 50 percent reduction of all fugitive emissions  
41 generated from onsite unpaved roads. In addition, the applicant has proposed other mitigation  
42 measures to further reduce and control air emissions (see Table 6.2-1).

43  
44 As previously described, the fugitive dust emissions are not included in the modeling results in  
45 Table 2.1-4. The applicant committed to perform air dispersion modeling using the revised  
46 emission inventory before the final SEIS is prepared (Powertech, 2012d). The final SEIS  
47 analyses would be based on this updated modeling. SEIS Section 4.7.1 describes the scope of  
48 this update, which would include incorporating fugitive dust emissions from the proposed  
49 project. Meanwhile, as described in Section C.4.2, the modeling results (i.e., pollution  
50 concentrations) from a similar project are used to generate pollution concentrations for the

1 proposed project. SEIS Section 4.7.1.1.1 describes the Dewey-Burdock onsite peak year  
2 fugitive dust concentrations and compliance with applicable NAAQS and PSD standards.  
3 Table C-18 contains the pollution concentrations for the operation phase fugitive emissions.  
4 These concentrations are below the applicable NAAQS with PM<sub>10</sub> at about 5 percent and PM<sub>2.5</sub>  
5 at about 1 percent. These concentrations are also below the applicable PSD Class II standards  
6 with PM<sub>10</sub> at about 25 percent and PM<sub>2.5</sub> at about 4 percent.

7  
8 The proposed actions dispersion modeling results that address emissions from the burning of  
9 fossil fuels for the stationary and mobile sources associated with the operation phase indicate  
10 that the PM<sub>10</sub> pollution concentration levels in and around the proposed site are low. Both the  
11 peak year and operation phase only pollutant concentrations are below the NAAQS. In addition,  
12 both concentrations are below the PSD Class II standards, which relate to the pollution  
13 concentration increment a project is allowed. Therefore, the low level of combustion emissions  
14 would result in a SMALL impact on air quality.

15  
16 The fugitive dust emissions are below NAQQS and PSD Class II standards. However, the mass  
17 of particulate matter generated from fugitive emissions is much greater than that generated from  
18 combustion emissions (see Tables 2.1-2 and 2.1-6). In addition, these fugitive dust emission  
19 sources consist of many sources spread out over a large area that tend to generate emissions  
20 sporadically. Due the level and nature of these fugitive emissions, there is a potential for  
21 noticeable localized dust emissions. Short-term, intermittent impacts are possible to the area in  
22 and around the site, particularly when vehicles travel on unpaved roads. At times, the fugitive  
23 emission would result in a MODERATE impact on air quality. The NRC staff conclude that the  
24 overall air quality during the construction phase for the Class V injection well disposal option  
25 would range from SMALL to MODERATE.

#### 26 27 4.7.1.1.3 Aquifer Restoration Impacts

28  
29 The construction phase combustion emission impact analyses in SEIS Section 4.7.1.1.1 present  
30 (i) the description and use of the revised emission inventory, (ii) inclusion of mitigation in the  
31 calculation of the revised inventory emission levels, (iii) lack of air dispersion modeling beyond  
32 the proposed site, and (iv) the use of the modeling results based on the initial emission  
33 inventory to generate pollutant concentrations for the revised emission inventory. SEIS  
34 Section 4.7.1 describes the applicant's commitment to provide updated air dispersion modeling  
35 for incorporation into the final SEIS as well as the scope of this updated modeling. This  
36 information also applies to the aquifer restoration phase impact analyses.

37  
38 Air emissions during the aquifer restoration phase of the proposed Dewey-Burdock ISR Project  
39 would consist primarily of combustion emissions and fugitive road dust. For the proposed  
40 project, the aquifer restoration phase generates by far the lowest levels of air emission relative  
41 to the other three phases. For the aquifer restoration phase, the NAAQS pollutants with the  
42 highest emission levels are NO<sub>x</sub> and CO (see Table 2.1-2).

43  
44 As described previously in SEIS Section 4.7.1.1.1, the peak year concentrations for each of the  
45 NAAQS pollutant are below the NAAQS (see Table 2.1-4). These concentrations include both  
46 stationary sources from Table 2.1-1 and mobile sources from Table 2.1-2. As described in  
47 Table C-11, the aquifer restoration phase contribution to the peak year emissions varies  
48 between 0.7 and 1.8 percent depending on the particular pollutant. For the aquifer restoration  
49 phase only, both sulfur dioxide and PM<sub>10</sub> are less than 0.1 percent of the NAAQS. The peak  
50 year concentrations for each pollutant are also below the PSD Class II standards. For the

1 aquifer restoration phase only, both sulfur dioxide and PM<sub>10</sub> concentrations are less than  
2 0.5 percent of the PSD Class II standard.

3  
4 Overall, the total CO<sub>2</sub>e emissions from the aquifer restoration phase are about six times lower  
5 than the operations phase (see Table 2.1-5). Most of the aquifer restoration phase greenhouse  
6 gas emissions are attributed to indirect electrical consumption (Table 2.1-5). These estimated  
7 levels of greenhouse gas emissions are lower than the current EPA permitting threshold as  
8 described in SEIS Section 3.7.2. NRC staff conclusions concerning potential greenhouse gas  
9 impacts are addressed in SEIS Section 5.7 on air quality cumulative effects.

10  
11 For the aquifer restoration phase, wind erosion can generate higher fugitive dust level  
12 emissions compared to travel on unpaved roads (see Tables 2.1-6 and 2.1-7). For travel on  
13 unpaved roads, the onsite aquifer restoration phase emission levels are at 11.8 metric tons  
14 [13.0 short tons] for PM<sub>10</sub> and 1.2 metric tons [1.3 short tons] for PM<sub>2.5</sub>. Wind erosion emission  
15 levels can generate up to 29.7 metric tons [32.7 short tons] for PM<sub>10</sub> and 4.4 metric tons  
16 [4.8 short tons] for PM<sub>2.5</sub>. The peak year onsite emission level estimates for travel on unpaved  
17 roads are at 481.8 metric tons [531.1 short tons] for PM<sub>10</sub> and 48.2 metric tons [53.1 short tons]  
18 for PM<sub>2.5</sub>. The fugitive dust estimate calculation incorporates one mitigation measure. The  
19 estimate credits water spray for a 50 percent reduction of all fugitive emissions generated from  
20 onsite unpaved roads. In addition, the applicant has proposed other mitigation measures to  
21 further reduce and control air emissions (see SEIS Section 4.7.1.1.1).

22  
23 As previously described, the fugitive dust emissions are not included in the modeling results in  
24 Table 2.1-4. The applicant committed to perform air dispersion modeling using the revised  
25 emission inventory before the final SEIS is prepared (Powertech, 2012d). The final SEIS  
26 analyses would be based on this updated modeling. SEIS Section 4.7.1 describes the scope of  
27 this update, which would include incorporating fugitive dust emissions from the proposed  
28 project. Meanwhile, as described in Section C.4.2, the modeling results (i.e., pollution  
29 concentrations) from a similar project are used to generate pollution concentrations for the  
30 proposed project. SEIS Section 4.7.1.1.1 describes the Dewey-Burdock onsite peak year  
31 fugitive dust concentrations and compliance with applicable NAAQS and PSD Class II  
32 standards. Table C-18 contains the pollution concentrations for the aquifer restoration phase  
33 fugitive emissions. These concentrations are below the applicable NAAQS with PM<sub>10</sub> under  
34 1 percent and PM<sub>2.5</sub> under 0.1 percent. These concentrations are also below the applicable  
35 PSD Class II standards with PM<sub>10</sub> at about 2 percent and PM<sub>2.5</sub> under 1 percent.

36  
37 The proposed action dispersion modeling results that address emissions from the burning of  
38 fossil fuels for the stationary and mobile sources associated with the aquifer restoration phase  
39 indicate that the PM<sub>10</sub> pollution concentration levels in and around the proposed site are low.  
40 Both the peak year and aquifer restoration phase only pollutant concentrations are below the  
41 NAAQS standard. In addition, both concentrations are below the PSD Class II standards, which  
42 relate to the pollution concentration increment a project is allowed. Therefore, the low level of  
43 combustion emissions would result in a SMALL impact on air quality.

44  
45 The fugitive dust emissions are below NAQQS and PSD standards. However, the mass of  
46 particulate matter generated from fugitive emissions is much greater than that generated from  
47 combustion emissions (see Tables 2.1-2 and 2.1-6). In addition, these fugitive dust emission  
48 sources consist of many sources spread out over a large area that tend to generate emissions  
49 sporadically. Due the level and nature of these fugitive emissions, there is a potential for  
50 noticeable localized dust emissions. Short-term, intermittent impacts are possible to the area in

1 and around the site particularly when vehicles travel on unpaved roads. At times, the fugitive  
2 emission would result in a MODERATE impact on air quality. The NRC staff conclude that the  
3 overall air quality during the construction phase for the Class V injection well disposal option  
4 would range from SMALL to MODERATE.

#### 5 6 4.7.1.1.4 Decommissioning Impacts

7  
8 The construction phase combustion emission impact analyses in SEIS Section 4.7.1.1.1 present  
9 (i) the description and use of the revised emission inventory, (ii) inclusion of mitigation in the  
10 calculation of the revised inventory emission levels, (iii) lack of air dispersion modeling beyond  
11 the proposed site, and (iv) the use of the modeling results based on the initial emission  
12 inventory to generate pollutant concentrations for the revised emission inventory. SEIS  
13 Section 4.7.1 describes the applicant's commitment to provide updated air dispersion modeling  
14 for incorporation into the final SEIS as well as the scope of this updated modeling. This  
15 information also applies to the decommissioning phase impact analyses.

16  
17 Air emissions during the decommissioning phase of the proposed Dewey-Burdock ISR  
18 Project would consist primarily of combustion emissions and fugitive road dust. For the  
19 decommissioning phase, the NAAQS pollutants with the highest emission levels are NO<sub>x</sub>  
20 and CO (see Table 2.1-2). As described previously in SEIS Section 4.7.1.1.1, the peak year  
21 concentrations for each of the NAAQS pollutant are below the NAAQS. These concentrations  
22 include both stationary sources from SEIS Table 2.1-1 and mobile sources from SEIS  
23 Table 2.1-2. As described in Table C-11, the decommissioning phase contribution to the peak  
24 year emissions varies between 8 and 15 percent depending on the particular pollutant. For the  
25 decommissioning phase only, the pollutant concentrations are below about 1 percent of the  
26 NAAQS. The peak year concentrations for each pollutant are also below the PSD Class II  
27 standards. For the decommissioning phase only, the pollutant concentrations are no more than  
28 about 4 percent of the PSD Class II standards.

29  
30 All phases of the proposed Dewey-Burdock ISR Project generate greenhouse gases with the  
31 operation phase producing the most. Overall, the total greenhouse gas emissions from the  
32 decommissioning phase are about 11 times lower than the operations phase. Most of the  
33 aquifer restoration phase greenhouse gas emissions are attributed to mobile sources  
34 (Table 2.1-5). These estimated levels of greenhouse gas emissions are lower than the  
35 current EPA permitting threshold described in SEIS Section 3.7.2. NRC staff conclusions  
36 concerning potential greenhouse gas impacts are addressed in SEIS Section 5.7 on air quality  
37 cumulative effects.

38  
39 For the decommissioning phase, travel on unpaved roads generates more fugitive emissions  
40 than wind erosion (see Tables 2.1-6 and 2.1-7). For travel on unpaved roads, the onsite  
41 decommissioning phase emission levels are at 84.9 metric tons [93.6 short tons] for PM<sub>10</sub> and  
42 8.5 metric tons [9.4 short tons] for PM<sub>2.5</sub>. Inclusion of the wind erosion emission would slightly  
43 increase these totals. The peak year onsite emission level estimates for travel on unpaved  
44 roads are at 481.8 metric tons [531.1 short tons] for PM<sub>10</sub> and 48.2 metric tons [53.1 short tons]  
45 for PM<sub>2.5</sub>. The fugitive dust estimate calculation incorporates one mitigation measure. The  
46 estimate credits water spray for a 50 percent reduction of all fugitive emissions generated from  
47 onsite unpaved roads. In addition, the applicant has proposed other mitigation measures to  
48 further reduce and control air emissions (see SEIS Section 4.7.1.1.1).

49  
50 As previously described, the fugitive dust emissions are not included in the modeling results in  
51 Table 2.1-4. The applicant committed to perform air dispersion modeling using the revised

1 emission inventory before the final SEIS is prepared (Powertech, 2012d). The final SEIS  
2 analyses would be based on this updated modeling. SEIS Section 4.7.1 describes the scope of  
3 this update, which would include incorporating fugitive dust emissions from the proposed  
4 project. Meanwhile, as described in Section C.4.2, the modeling results (i.e., pollution  
5 concentrations) from a similar project are used to generate pollution concentrations for the  
6 proposed project. SEIS Section 4.7.1.1.1 describes the Dewey-Burdock onsite peak year  
7 fugitive dust concentrations and compliance with applicable NAAQS and PSD Class II  
8 standards. Table C-18 contains the pollution concentrations for the decommissioning phase  
9 fugitive emissions. These concentrations are below the applicable NAAQS with PM<sub>10</sub> at about  
10 3 percent and PM<sub>2.5</sub> under 1 percent. These concentrations are also below the applicable PSD  
11 Class II standards with PM<sub>10</sub> at about 14 percent and PM<sub>2.5</sub> at about 2 percent.

12  
13 The proposed action dispersion modeling results that address emissions from the burning of  
14 fossil fuels for the stationary and mobile sources associated with the decommissioning phase  
15 indicate that the PM<sub>10</sub> pollution concentration levels in and around the proposed site are low.  
16 Both the peak year and decommissioning phase only pollutant concentrations are below the  
17 NAAQS. In addition, both concentrations are below the PSD Class II standards, which relate to  
18 the pollution concentration increment a project is allowed. Therefore, the low level of  
19 combustion emissions would result in a SMALL impact on air quality.

20  
21 The fugitive dust emissions are below NAQQS and PSD Class II standards. However, the mass  
22 of particulate matter generated from fugitive emissions is much greater than that generated from  
23 combustion emissions (see Tables 2.1-2 and 2.1-6). In addition, these fugitive dust emission  
24 sources consist of many sources spread out over a large area that tend to generate emissions  
25 sporadically. Due the level and nature of these fugitive emissions, there is a potential for  
26 noticeable localized dust emissions. Short-term, intermittent impacts are possible to the area in  
27 and around the site particularly when vehicles travel on unpaved roads. At times, the fugitive  
28 emission would result in a MODERATE impact on air quality. The NRC staff conclude that the  
29 overall air quality during the construction phase for the Class V injection well disposal option  
30 would range from SMALL to MODERATE.

31

#### 32 **4.7.1.2 Disposal Via Land Application**

33

34 If a permit for Class V injection wells cannot be obtained from EPA, the applicant proposes to  
35 dispose of liquid waste generated at the proposed Dewey-Burdock ISR Project by land  
36 application (see SEIS Section 2.1.1.1.2.4.2). Potential environmental impacts on air quality  
37 from construction, operations, aquifer restoration, and decommissioning associated with the  
38 land application liquid waste disposal option are discussed in the following sections. The  
39 discussion also addresses the impacts on air quality during the peak year when all four phases  
40 occur simultaneously.

41

##### 42 **4.7.1.2.1 Construction Impacts**

43

44 When examining combustion emissions, the land application liquid waste disposal option would  
45 not require the drilling of up to eight Class V deep disposal wells. The percentage of  
46 combustion emission from drill rigs (excluding the deep well rig) ranges from 61 to 81 percent  
47 depending on the pollutant (see Table C-4). However, the drilling of eight Class V deep  
48 disposal wells constitutes no more than about a third of 1 percent of the construction phase  
49 emissions for any single NAAQS pollutant. NRC staff conclude that the elimination of drilling

1 the Class V deep disposal wells would result in a very small reduction in the NAAQS pollutant  
2 emissions generated.

3  
4 The source that generates the majority of remaining combustion emissions is the construction  
5 and drilling field equipment (see Table C-2). As detailed in Table 4.2-1, the land application  
6 option would result in more land being disturbed than in the deep well disposal option.  
7 Specifically, the land application would require 425.7 ha [1,052 ac] of irrigation area and an  
8 additional 41.6 ha [103 ac] for impoundments. These types of land disturbances, particularly  
9 the addition of irrigation areas, would not be expected to generate many air emissions from the  
10 use of construction or field equipment. The amount of land disturbed for wellfields, access  
11 roads, trunkline installation, and site buildings is identical for the deep well disposal and land  
12 application options. These types of land disturbances would be more associated with the  
13 generation of air emissions from construction and field equipment use. Therefore, NRC staff  
14 conclude that the additional land disturbance associated with the land disposal option would  
15 result in a very small increase in the NAAQS pollutants generated from combustion emission  
16 sources other than the drilling rigs.

17  
18 For combustion emissions, NRC staff do not expect to see any appreciable difference in the  
19 overall NAAQS emission levels between the land disposal option and the deep well disposal  
20 option. Therefore, the magnitude of the air quality impacts would be expected to be the same  
21 for the two disposal options for both the construction phase and the peak year (i.e., all  
22 phases combined).

23  
24 The land application option analysis for greenhouse gases would mirror the NAAQS analyses  
25 because the combustion emission sources for the NAAQS pollutants and the greenhouse  
26 gases are the same. Using the same rationale as the NAAQS analysis, NRC staff do not  
27 expect to see any appreciable difference in the overall greenhouse gas emission levels between  
28 the land disposal option and the deep well disposal option for the construction phase. The  
29 impact analysis for greenhouse gases is addressed in SEIS Section 5.7 on air quality  
30 cumulative effects.

31  
32 Fugitive emissions are generated by both travel on unpaved roads and wind erosion of  
33 disturbed land. For the construction phase, travel on unpaved roads is the main source of  
34 fugitive emissions. As described in Table 4.2-1, the land application option would not require  
35 more access roads to be constructed. Furthermore, the land application option would not  
36 require additional land for wellfield or facility construction. Therefore, NRC staff conclude that  
37 the additional land disturbance associated with the land disposal option would result in a very  
38 small change in fugitive emissions from travel on unpaved roads.

39  
40 The amount of fugitive emissions from wind erosion is a function of the amount of disturbed  
41 land. The two liquid waste disposal options vary in the amount of land disturbed and,  
42 therefore, the amount of fugitive dust generated. As described in Table 2.1-7, the annual  
43 mass flow emission rate estimates from wind erosion varied little over the project lifetime with  
44 the deep well and land application options generating 10.1 metric tons [11.1 short tons] and  
45 29.7 metric ton [32.7 short tons] of PM<sub>10</sub>, respectively. When considered in conjunction with the  
46 onsite fugitive emissions from unpaved roads, the deep well and land application generate  
47 300.8 metric tons [331.6 short tons] and 320.4 metric tons [353.2 short tons] of PM<sub>10</sub>,  
48 respectively. The overall difference in fugitive emission level is about 6 percent.

49



1 NRC staff do not expect to see any appreciable difference in the overall fugitive dust emission  
2 levels between the land disposal option and the deep well disposal option. Therefore, the  
3 fugitive dust analyses presented for the deep well disposal option would still apply.

4  
5 As mentioned earlier in this section, the magnitude of the air quality impacts would be expected  
6 to the same for the two disposal options for both the construction phase and the peak year  
7 (i.e., all phases combined). The low level of combustion emissions would result in a SMALL  
8 impact on air quality. At times, the fugitive emission would result in a MODERATE impact on air  
9 quality from localized dust emissions that are short term and intermittent in nature. The NRC  
10 staff conclude that the overall air quality during the construction phase for the land application  
11 disposal option would range from SMALL to MODERATE.

#### 12 13 4.7.1.2.2 Operation Impacts

14  
15 For the operations phase, combustion emissions for NAAQS pollutants are basically evenly  
16 divided between the light duty vehicles and the construction and drilling field equipment (see  
17 Table C-2). As detailed in Table 4.2-1, the land application option would result in more land  
18 being disturbed than in the deep well disposal option. Specifically, the land application would  
19 require 425.7 ha [1,052 ac] of irrigation area and an additional 41.6 ha [103 ac] for  
20 impoundments. These types of land disturbances, particularly the addition of irrigation areas,  
21 would not be expected to generate many air emissions from the use of construction or field  
22 equipment. The amount of land disturbed for wellfields, access roads, trunkline installation, and  
23 site buildings is identical for the deep well disposal and land application options. These types of  
24 land disturbances would be more associated with the generation of air emissions from  
25 construction and field equipment use. Therefore, NRC staff conclude that the additional land  
26 disturbance associated with the land disposal option would result in a very small increase in the  
27 NAAQS pollutants generated from combustion emission sources.

28  
29 For combustion emissions, NRC staff do not expect to see any appreciable difference in the  
30 overall NAAQS emission levels between the land disposal option and the deep well disposal  
31 option. Therefore, the magnitude of the air quality impacts would be expected to the same for  
32 the two disposal options for both the operation phase and the peak year.

33  
34 The land application option analysis for greenhouse gases would mirror the NAAQS analyses  
35 because the combustion emission sources for the NAAQS pollutants and the greenhouse gases  
36 are the same. Using the same rationale as the NAAQS analysis, NRC staff do not expect to  
37 see any appreciable difference in the overall greenhouse gas emission levels between the land  
38 disposal option and the deep well disposal option for the operation phase. The impact analysis  
39 for greenhouse gases is addressed in SEIS Section 5.7 on air quality cumulative effects.

40  
41 Fugitive emissions are generated by both travel on unpaved roads and wind erosion of  
42 disturbed land. For the operation phase, travel on unpaved roads is the main source of fugitive  
43 emissions. As described in Table 4.2-1, the land application option would not require more  
44 access roads to be constructed. Furthermore, the land application option would not require  
45 additional land for wellfield or facility construction. Therefore, NRC staff conclude that the  
46 additional land disturbance associated with the land disposal option would result in a very small  
47 change in fugitive emissions from travel on unpaved roads.

48  
49 The amount of fugitive emissions from wind erosion is a function of the amount of disturbed  
50 land. The two liquid waste disposal options vary in the amount of land disturbed and, therefore,

1 the amount of fugitive dust generated. As described in Table 2.1-7, the annual mass flow  
2 emission rate estimates from wind erosion varied little over the project lifetime with the  
3 deep well and land application options generating 10.1 metric tons [11.1 short tons] and  
4 29.7 metric ton [32.7 short tons] of PM<sub>10</sub>, respectively. When considered in conjunction with the  
5 onsite fugitive emissions from unpaved roads, the deep well and land application generate  
6 165.7 metric tons [182.6 short tons] and 185.3 metric tons [204.3 short tons] of PM<sub>10</sub>,  
7 respectively. The overall difference in fugitive emission level is about 9 percent.

8  
9 NRC staff do not expect to see any appreciable difference in the overall fugitive dust emission  
10 levels between the land disposal option and the deep well disposal option. Therefore, the  
11 fugitive dust analyses presented for the deep well disposal option would still apply.

12  
13 As mentioned earlier in this section, the magnitude of the air quality impacts would be  
14 expected to the same for the two disposal options for the operation phase. The low level of  
15 combustion emissions would result in a SMALL impact on air quality. At times, the fugitive  
16 emission would result in a MODERATE impact on air quality from localized dust emissions that  
17 are short term and intermittent in nature. The NRC staff conclude that the overall air quality  
18 during the operation phase for the land application disposal option would range from SMALL  
19 to MODERATE.

#### 20 21 4.7.1.2.3 Aquifer Restoration Impacts

22  
23 For the aquifer restoration phase, combustion emissions are limited to light duty vehicles  
24 (see Table C-2). As detailed in Table 4.2-1, the land application option would result in more  
25 land being disturbed than in the deep well disposal option. Specifically, the land application  
26 would require 425.7 ha [1,052 ac] of irrigation area and an additional 41.6 ha [103 ac] for  
27 impoundments. These types of land disturbances, particularly the addition of irrigation areas,  
28 would not be expected to generate much change in air emissions from light duty vehicles.  
29 Therefore, NRC staff conclude that the additional land disturbance associated with the land  
30 disposal option would result in a very small increase in the NAAQS pollutants generated from  
31 combustion emission sources.

32  
33 For combustion emissions, NRC staff do not expect to see any appreciable difference in the  
34 overall NAAQS emission levels between the land disposal option and the deep well disposal  
35 option. Therefore, the magnitude of the air quality impacts would be expected to the same for  
36 the two disposal options for both the aquifer restoration phase and the peak year.

37  
38 The land application option analysis for greenhouse gases would mirror the NAAQS analysis  
39 because the combustion emission sources for the NAAQS pollutants and the greenhouse gases  
40 are the same. Using the same rationale as the NAAQS analysis, NRC staff do not expect to  
41 see any appreciable difference in the overall greenhouse gas emission levels between the  
42 land disposal option and the deep well disposal option for the aquifer restoration phase. The  
43 impact analysis for greenhouse gases is addressed in SEIS Section 5.7 on air quality  
44 cumulative effects.

45  
46 Fugitive emissions are generated by both travel on unpaved roads and wind erosion of  
47 disturbed land. For the aquifer restoration phase, wind erosion generates more fugitive  
48 emissions than travel on unpaved roads. As described in Table 4.2-1, the land application  
49 option would not require more access roads to be constructed. Furthermore, the land  
50 application option would not require additional land for wellfield or facility construction.  
51 Therefore, NRC staff conclude that the additional land disturbance associated with the land

1 disposal option would result in a very small change in fugitive emissions from travel on  
2 unpaved roads.

3  
4 The amount of fugitive emissions from wind erosion is a function of the amount of disturbed  
5 land. The two liquid waste disposal options vary in the amount of land disturbed and  
6 therefore, the amount of fugitive dust generated. As described in Table 2.1-7, the annual mass  
7 flow emission rate estimates from wind erosion varied little over the project lifetime with the  
8 deep well and land application options generating 10.1 metric tons [11.1 short tons] and  
9 29.7 metric ton [32.7 short tons] of PM<sub>10</sub>, respectively. When considered in conjunction with the  
10 onsite fugitive emissions from unpaved roads, the deep well and land application generate  
11 21.9 metric tons [24.1 short tons] and 41.5 metric tons [45.7 short tons] of PM<sub>10</sub>, respectively.  
12 The overall difference in fugitive emission level is about 47 percent.

13  
14 Although there is some difference in the overall fugitive dust emission levels between the land  
15 disposal option and the deep well disposal option, the impact magnitude would be expected to  
16 be similar. Therefore, the fugitive dust analyses presented for the deep well disposal option  
17 would still apply.

18  
19 As mentioned earlier in this section, the magnitude of the air quality impacts would be expected  
20 to be the same for the two disposal options for the aquifer restoration phase. The low level of  
21 combustion emissions would result in a SMALL impact on air quality. At times, the fugitive  
22 emission would result in a MODERATE impact on air quality from localized dust emissions that  
23 are short term and intermittent in nature. The NRC staff conclude that the overall air quality  
24 during the aquifer restoration phase for the land application disposal option would range from  
25 SMALL to MODERATE.

#### 26 27 4.7.1.2.4 Decommissioning Impacts

28  
29 For the decommissioning phase, the majority of the combustion emissions are from the  
30 construction and drilling field equipment. As detailed in Table 4.2-1, the land application option  
31 would result in more land being disturbed than in the deep well disposal option. Specifically, the  
32 land application would require 425.7 ha [1,052 ac] of irrigation area and an additional 41.6 ha  
33 [103 ac] for impoundments. Reclaiming the additional disturbed land, particularly the  
34 impoundments, could result in a slight increase in the emissions from construction and drilling  
35 field equipment. Therefore, NRC staff conclude that the additional land disturbance associated  
36 with the land disposal option would result in a very small increase in the NAAQS pollutants  
37 generated from combustion emission sources.

38  
39 For combustion emissions, NRC staff do not expect to see any appreciable difference in the  
40 overall NAAQS emission levels between the land disposal option and the deep well disposal  
41 option. Therefore, the magnitude of the air quality impacts would be expected to be the same for  
42 the two disposal options for both the decommissioning phase and the peak year.

43  
44 The land application option analysis for greenhouse gases would mirror the NAAQS analysis  
45 because the emission sources for the NAAQS and greenhouse gases are the same. Using the  
46 same rationale as the NAAQS analysis, NRC staff do not expect to see any appreciable  
47 difference in the overall greenhouse gas emission levels between the land disposal option and  
48 the deep well disposal option for the decommissioning phase. The impact analysis for  
49 greenhouse gases is addressed in SEIS Section 5.7 on air quality cumulative effects.

50

1 Fugitive emissions are generated by both travel on unpaved roads and wind erosion of  
2 disturbed land. For the decommissioning phase, travel on unpaved roads is the main source of  
3 fugitive emissions. As described in Table 4.2-1, the land application option would not require  
4 more access roads to be constructed. Furthermore, the land application option would not  
5 require additional land for wellfield or facility construction. Therefore, NRC staff conclude that  
6 the additional land disturbance associated with the land disposal option would result in a very  
7 small change in fugitive emissions from travel on unpaved roads.

8  
9 The amount of fugitive emissions from wind erosion is a function of the amount of disturbed  
10 land. The two liquid waste disposal options vary in the amount of land disturbed and,  
11 therefore, the amount of fugitive dust generated. As described in Table 2.1-7, the annual  
12 mass flow emission rate estimates from wind erosion varied little over the project lifetime with  
13 the deep well and land application options generating 10.1 metric tons [11.1 short tons] and  
14 29.7 metric ton [32.7 short tons] of PM<sub>10</sub>, respectively. When considered in conjunction with the  
15 onsite fugitive emissions from unpaved roads, the deep well and land application generate  
16 95.0 metric tons [104.7 short tons] and 114.6 metric tons [126.3 short tons] of PM<sub>10</sub>,  
17 respectively. The overall difference in fugitive emission level is about 17 percent.

18  
19 NRC staff do not expect to see any appreciable difference in the overall fugitive dust emission  
20 levels between the land disposal option and the deep well disposal option. Therefore, the  
21 fugitive dust analyses presented for the deep well disposal option would still apply.

22  
23 As mentioned earlier in this section, the magnitude of the air quality impacts would be expected  
24 to the same for the two disposal options for decommissioning phase. The low level of  
25 combustion emissions would result in a SMALL impact on air quality. At times, the fugitive  
26 emission would result in a MODERATE impact on air quality from localized dust emissions that  
27 are short term and intermittent in nature. The NRC staff conclude that the overall air quality  
28 during the decommissioning phase for the land application disposal option would range from  
29 SMALL to MODERATE.

#### 30 31 **4.7.1.3 Disposal Via Combination of Class V Injection and Land Application**

32  
33 If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is  
34 insufficient to dispose of all liquid wastes generated at the proposed Dewey-Burdock ISR  
35 Project, the applicant has proposed to dispose of liquid waste by a combination of Class V  
36 injection wells and land application (see SEIS Section 2.1.1.1.2.4.3). For the combined option,  
37 land application facilities and infrastructure would be constructed, operated, restored, and  
38 decommissioned on an as-needed basis depending on the deep well disposal capacity  
39 (Powertech, 2011).

40  
41 The potential environmental impacts from fugitive dust emissions for all of the phases would be  
42 greater for the land application option because of the increased wind erosion emission levels  
43 caused by the increased amount of land disturbed. When considering the combustion  
44 emissions, the main difference between the two disposal options is the emissions from the deep  
45 well rig used to drill the Class V wells. The land application option eliminates this particular  
46 source. This distinction would only affect the operation phase because this is where all of the  
47 drill rig emissions occur. For the combustion emissions, the potential environmental impacts for  
48 the operations phase would be greater for the Class V injection well option because of the  
49 additional drill rig emissions. For the remaining three phases, the combustion emissions would  
50 basically be the same for both disposal options.

51

1 For the combined option, the air emissions associated with the development of all the Class V  
 2 injection disposal wells would be supplemented with the emissions associated with the  
 3 development, at some level, of the irrigation areas and increased pond capacity. Fugitive dust  
 4 emissions for all four phases would include the additional contribution of the wind erosion from  
 5 the increased land disturbance from the land application option. The operations phase would  
 6 include the combustion emissions from the deep well drill rig. Therefore, NRC staff conclude  
 7 that the environmental impacts of the combined option for the construction, operation, aquifer  
 8 restoration, and decommissioning phases of the proposed Dewey-Burdock ISR Project would  
 9 be greater than either the Class V deep injection well option or the land application option.  
 10 However, the changes in air emissions levels would be subtle and not result in any distinctions  
 11 concerning the magnitude of the environmental impacts (see Table 4.7.2).  
 12

13 **4.7.2 No Action (Alternative 2)**

14  
 15 Under this alternative, there would be no change in the air quality at this site or at any  
 16 surrounding receptors. The Black Hills-Rapid City Intrastate Air Quality Control Region currently  
 17 meets the NAAQS, and it is expected that this area would continue to meet the NAAQS based  
 18 on the current land use.  
 19

20 **4.8 Noise Impacts**

21  
 22 NRC staff concluded in GEIS Section 4.4.7 that the noise impact at an ISR facility may range  
 23 from SMALL to MODERATE during all four phases of an ISR project, depending on the distance  
 24 between the nearest resident and the activities occurring at the ISR facility (NRC, 2009a).  
 25 Noise may also impact wildlife in the vicinity of the ISR facility. These impacts will be from the  
 26 operation of equipment such as trucks, bulldozers, and compressors; from either commuting  
 27 worker traffic or material and waste shipments; and from operation of the wellfields, central  
 28 processing plant, satellite plant, and associated equipment. For workers at an ISR  
 29 facility, administrative and engineering controls will be used to maintain noise levels in work  
 30 areas below Occupational Safety and Health Administration (OSHA) regulatory limits  
 31 (29 CFR 1910.95) and will be further mitigated by use of personal hearing protection.  
 32  
 33

**Table 4.7-2. Significance of the Air Quality Environmental Impacts for the Proposed Liquid Waste Disposal Options for Each Phase\* of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application</b>
Construction	SMALL to MODERATE	SMALL to MODERATE	SMALL to MODERATE
Operations	SMALL to MODERATE	SMALL to MODERATE	SMALL to MODERATE
Aquifer Restoration	SMALL to MODERATE	SMALL to MODERATE	SMALL to MODERATE
Decommissioning	SMALL to MODERATE	SMALL to MODERATE	SMALL to MODERATE
*The peak year (i.e., when all four phases occur simultaneous) impacts would also range between SMALL to MODERATE.			

GEIS Construction Phase Summary

Potential noise impacts will be greatest during construction of an ISR facility. The use of drill rigs, heavy trucks, bulldozers, and other equipment used to construct and operate wellfields, drill wells, construct access roads, and build the processing facilities will generate noise exceeding undisturbed background levels. Noise levels are expected to be higher during daylight hours when construction is more likely to occur and more noticeable in proximity to the operating equipment. For individuals living in the vicinity of the site, ambient noise levels will return to background at distances more than 305 m [1,000 ft] from the construction activities. Wildlife will be expected to avoid areas where noise-generating activities occur, although continuous elevated noise levels may reduce the breeding success of certain wildlife (e.g., sage-grouse). Overall, these types of noise impacts will be SMALL, given the use of hearing controls for workers and the expected distance of nearest residents to the site. Traffic noise during construction (e.g., commuting workers; truck shipments to and from the facility; and construction equipment such as trucks, bulldozers, and compressors) is expected to be localized and limited to highways in the vicinity of the site, access roads within the site, and roads in the wellfields. The relative short-term increase in noise levels from passing traffic will be SMALL for the larger roads, but could be MODERATE for lightly traveled rural roads through smaller communities. (NRC, 2009a).

GEIS Operations Phase Summary

During ISR operations, noise-generating activities will occur mainly indoors within the central uranium processing facilities; therefore, offsite sound levels will be reduced during the operations phase. Wellfield equipment (e.g., pumps, compressors) will be contained within structures (e.g., header houses, satellite facilities), thus limiting the propagation of noise to offsite individuals. Traffic noise from commuting workers, truck shipments to and from the facility, and facility equipment will be localized and limited to highways in the vicinity of the site, access roads within the proposed license area, and wellfield roads. Relative short-term increases in noise levels from traffic will be SMALL for the larger roads, but could be MODERATE for lightly traveled rural roads through smaller communities. Thus, NRC staff concluded in the GEIS that potential impacts from noise during the operations phase may range from SMALL to MODERATE. (NRC, 2009a)

GEIS Aquifer Restoration Phase Summary

General noise levels during aquifer restoration will be expected to be similar to, or less than, noise levels during operations. The noise from pumps and other wellfield equipment contained within buildings would reduce sound levels to offsite receptors. The existing operational infrastructure will be used, and traffic volume will be less than during the construction and operations phases. NRC staff concluded in the GEIS the potential impact from noise during aquifer restoration will range from SMALL to MODERATE, depending on the location of the nearest resident. (NRC, 2009a)

GEIS Decommissioning Phase Summary

General noise levels generated during decommissioning and reclamation will be similar to the noise generated during construction. Equipment used to dismantle buildings and milling equipment, remove potentially contaminated soils, or grade the surface as part of reclamation activities will generate audible noise at above-background levels. This noise will be temporary, and when decommissioning and reclamation activities are completed, noise levels will return to

1 baseline, with occasional noise from longer term monitoring activities. Like the construction  
2 phase, the noise level will be greater during daylight hours when decommissioning and  
3 reclamation are more likely to occur and most noticeable in proximity to the operating  
4 equipment. Given the likely distance to nearby residents {i.e., greater than 305 m [1,000 ft]},  
5 NRC staff concluded in the GEIS that noise will not be discernible to offsite residents or  
6 communities. Therefore, NRC staff concluded in the GEIS that the impact from noise generated  
7 during decommissioning may range from SMALL to MODERATE. (NRC, 2009a)

8  
9 The potential site-specific environmental impacts from noise during construction, operations,  
10 aquifer restoration, and decommissioning of the proposed Dewey-Burdock ISR Project are  
11 described in the following sections.

#### 12 13 **4.8.1 Proposed Action (Alternative 1)**

14  
15 As described in SEIS Section 3.8, the majority of existing ambient noise (i.e., background noise)  
16 at the proposed Dewey-Burdock ISR Project site will be generated by traffic from U.S. Highway  
17 18 and State Highway 89 (see Figure 3.3-1) and freight/coal trains from the BSNF railroad (see  
18 Figure 3.2-1). Dwellings within and in the vicinity of the proposed site that may be impacted by  
19 noise generated by ISR activities are listed in Table 3.2-1 and shown in Figure 3.2-1.  
20 Edgemont, South Dakota (population 774), is the closest community to the proposed site,  
21 approximately 21 km [13 mi] to the south-southeast (see Figure 1.1-1). Other towns within  
22 80 km [50 mi] of the proposed project area include Hot Springs and Custer, South Dakota, and  
23 Newcastle, Wyoming. As discussed in SEIS Section 3.6.3, no federally listed threatened or  
24 endangered species are known to occur within the proposed project area. However, five raptor  
25 nests were observed within the proposed project area and two raptor nests were observed  
26 within 1.6 km [1 mi] of the proposed project area during applicant surveys. As described in  
27 SEIS Section 3.6.1.2.2, one active bald eagle nest (a state-listed species) was reported in 2011  
28 within the proposed project area along Beaver Creek, about 1.6 km [1 mi] west of the proposed  
29 Dewey satellite facility. The nearest recreational areas that may be impacted by noise are  
30 parcels of the Black Hills National Forest (BHNF) bordering the proposed project area to the  
31 east and northeast and the Buffalo Gap National Grassland located about 4.8 km [3 mi] south of  
32 the project boundary.

33  
34 As described in SEIS Section 2.1.1.1.2.4, options for liquid waste disposal at the proposed  
35 Dewey-Burdock ISR Project are (i) Class V deep injection wells, (ii) land application, or  
36 (iii) combined Class V deep injection wells and land application. The environmental impacts  
37 from noise for each of the waste disposal options are discussed in the following sections.

#### 38 39 **4.8.1.1 Disposal Via Class V Injection Wells**

40  
41 As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid  
42 wastes is deep well disposal via Class V injection wells. EPA is currently reviewing the  
43 applicant's UIC permit application for Class V injection wells. The locations of the first four  
44 Class V injection wells are shown in Figure 2.1-10.

##### 45 46 **4.8.1.1.1 Construction Impacts**

47  
48 As noted in SEIS Section 2.1.1.1.2, the construction phase of the proposed Dewey-Burdock ISR  
49 Project will involve the use of heavy equipment to create and improve road surfaces, furnish  
50 supplies, excavate foundations, erect buildings, and install wells and pipelines in the wellfields.

1 Equipment such as bulldozers, graders, tractor trailers, excavators, cranes, and drill rigs will  
2 create noise that will be audible above background noise levels. For the Class V injection well  
3 disposal option, additional noise will be generated by the installation of the Class V injection  
4 wells. Noise will also be generated by heavy equipment used to construct pipelines to transport  
5 liquid waste from the processing facilities to the Class V injection wells. Construction of  
6 processing facilities, pipelines, access roads, ponds, Class V injection wells, and wellfields is  
7 expected to be completed within 2 years (see Figure 2.1-1), followed by phased construction of  
8 additional wellfields during the operations phase.

9  
10 Expected noise levels generated during construction activities at the Dewey-Burdock site will be  
11 most noticeable in proximity to operating equipment, such as drill rigs, heavy trucks, and  
12 bulldozers. Mitigation measures that the applicant will implement to minimize noise impacts  
13 include avoiding construction activities during the night, using sound abatement controls on  
14 operating equipment and facilities, and using personal hearing protection for workers in any high  
15 noise areas (Powertech, 2009a). These mitigation measures will ensure that noise levels  
16 remain below guidelines for offsite receptors [e.g., 55-decibel daytime guideline to protect  
17 against activity interference and annoyance (EPA, 1974)] and below OSHA regulatory limits for  
18 workers in 29 CFR 1910.95.

19  
20 As described in SEIS Section 3.2, two permanently occupied dwellings (Putnum residence and  
21 Beaver Creek Ranch Headquarters), one vacant dwelling (Spencer residence), and one  
22 seasonally occupied dwelling (Daniels residence) are located within the proposed project area  
23 (see Figure 3.2-1). All of these onsite dwellings are located more than 1.6 km [1.0 mi] from  
24 proposed processing facilities and Class V injection wells in the Dewey and Burdock areas. The  
25 permanently occupied Beaver Creek Ranch Headquarters and Putnum residence are located  
26 approximately 0.8 km [0.5 mi] west and 1.3 km [0.8 mi] south of proposed wellfields in the  
27 Dewey area (see Figure 3.2-1). These distances are greater than the 305-m [1,000-ft] radius for  
28 noise from construction activities to return to background ambient noise levels (NRC, 2009a).  
29 However, the seasonally occupied Daniels residence is located within 305 m [1,000 ft] of  
30 defined wellfield areas B-WF6 and B-WF7 in the Burdock area (see Figure 2.1-6). Therefore,  
31 the Daniels residence is expected to experience short-term (1 to 2 years) noise above  
32 background levels during construction activities associated with development of these wellfields.

33  
34 All offsite residential receptors are located more than 1.6 km [1.0 mi] from proposed processing  
35 facilities and deep Class V injection wells in the Dewey and Burdock areas. The nearest  
36 offsite residential receptors are located approximately 1.3 km [0.8 mi] south (Kennobie  
37 residence) and 1.3 km [0.8 mi] southwest (Peterson residence) of proposed wellfields in the  
38 Burdock area (see Figure 3.2-1). This distance also exceeds the 305-m [1,000-ft] radius for  
39 noise from construction activities to return to background ambient noise levels (NRC, 2009a).  
40 In addition, because of decreasing noise levels with distance, construction activities will have  
41 only SMALL and temporary noise impacts for nearby communities (e.g., Edgemont,  
42 Hot Springs, Custer, and Newcastle) and recreational areas (e.g., BHNH and Buffalo Gap  
43 National Grassland).

44  
45 Truck transport of construction materials would be the primary noise source that may potentially  
46 affect the public. The incremental increase in construction-related noise due to traffic on the  
47 heavily traveled public roadways in the area (e.g., U.S. Highway 18 and State Highway 89) will  
48 not be expected to be noticeable. Traffic noise along Dewey Road from Edgemont to the  
49 Dewey-Burdock site will increase during construction activities due to workers commuting to and  
50 from the job site and truck shipments to and from the facilities during daylight hours. As  
51 described in SEIS Section 3.8, the maximum sound levels from heavy trucks (70 dBA) traveling



1 along Dewey Road will diminish to approximately 57 dBA at a distance of approximately 480 m  
2 [1,575 ft] from the source. At distances beyond 480 m [1,575 ft] from Dewey Road, it is  
3 assumed that sound levels generated by heavy trucks will be approximately 40 dBA. Based on  
4 typical land uses within and surrounding the project site (e.g., rangeland, wildlife habitat, and  
5 recreation), sound levels ranging from 40 to 57 dBA are within Federal Highway Administration  
6 (FHWA) noise abatement criteria established in 23 CFR Part 772. These criteria are described  
7 in Table 3.8-1. In addition, Dewey Road is a lightly traveled county road with few residences,  
8 and increases in noise levels associated with passing heavy truck traffic during the construction  
9 phase will be short term (1 to 2 years; see Figure 2.1-1).

10  
11 Elevated noise levels associated with construction activities may affect wildlife behavior  
12 (Federal Highway Administration, 2004; Brattstrom and Bondello, 1983; BLM, 2008). As noted  
13 in GEIS Section 4.4.7.1, wildlife is expected to avoid areas where noise-generating activities are  
14 ongoing (NRC, 2009a). However, raptors are particularly sensitive to noise and the presence of  
15 human activity, which will be heightened during the construction phase. As noted in SEIS  
16 Section 4.6.1.1.1.2, the bald eagle, red-tailed hawk, American kestrel, and northern harrier  
17 were the most commonly seen raptor species in the proposed project area and will be the  
18 primary raptor species impacted by project activities. These species are not imperiled with the  
19 exception of the bald eagle, which is a state-threatened species (SDGFP, 2010c). Direct  
20 impacts to raptor species from noise will include displacement, increased potential for nest  
21 abandonment and reproductive failure, and potential reduction in prey populations. To reduce  
22 noise impacts to raptors, the applicant has committed to adhering to FWS and SDGFP seasonal  
23 noise, vehicular traffic, and human proximity guidelines during the construction phase of the  
24 proposed project (see SEIS Section 4.6.1.1.1.2). The applicant will also locate all planned  
25 facilities outside of BLM recommended buffer zones for all raptor nests identified within the  
26 proposed project area (Powertech, 2009a). Furthermore, the applicant has committed to follow  
27 an FWS-approved raptor monitoring and mitigation plan to reduce conflicts between active nest  
28 sites and project-related activities if direct impacts to raptors occurs (Powertech, 2009a).

29  
30 With the exception of the seasonally occupied Daniels residence in the Burdock area, noise  
31 levels associated with project-related construction activities will not impact onsite or offsite  
32 residential receptors. Residents at the Daniels residence will experience noise levels above  
33 background due to heavy equipment use associated with the development of wellfields B-WF6  
34 and B-WF7. However, these noise levels will be short term (1 to 2 years for each wellfield) and  
35 the residence will not be occupied year round. Implementation of mitigation measures, such as  
36 using sound abatement controls on operating equipment and facilities and using personal  
37 hearing protection for workers in high noise areas, will ensure that noise levels remain within  
38 guidelines for offsite receptors and workers. Noise levels associated with project-related  
39 transportation activities on Dewey Road leading to and from the site will be within FHWA noise  
40 abatement criteria at a distance of 480 m [1,575 ft] or greater and will be temporary (1 to  
41 2 years). Noise impacts to raptors will be mitigated by adhering to FWS and SDGFP seasonal  
42 noise guidelines, locating all planned facilities outside of BLM recommended buffer zones for all  
43 raptor nests, and following an FWS-approved raptor monitoring and mitigation plan. Therefore,  
44 the NRC staff concludes that the overall site-specific impacts from noise during construction for  
45 the Class V injection well disposal option will be SMALL.

#### 46 47 4.8.1.1.2 Operations Impacts

48  
49 The potential impact from onsite-generated noise during the operations phase of the proposed  
50 Dewey-Burdock ISR Project will be less than during the construction phase because fewer

1 pieces of heavy machinery will be used. However, a variety of mechanical equipment  
2 (e.g., generators; pumps; air compressors; and heating, ventilation, and air conditioning  
3 systems) at the Burdock central processing plant, at the Dewey satellite facility, and in the  
4 wellfields will generate noise during the operations phase. Equipment such as pumps used to  
5 recover uranium from the pregnant lixiviant and dryers used to process and package the  
6 uranium slurry into yellowcake will be contained within the processing buildings, thus limiting the  
7 propagation of noise to onsite and offsite receptors. In the wellfields, pumps and compressors  
8 used for injection, recovery, and transfer of lixiviant will be contained within header houses.  
9 Likewise, pumps and compressors used to inject liquid wastes into deep disposal wells will be  
10 contained within locked buildings constructed around the wells (Powertech, 2010a). Mitigation  
11 measures, such as the use of sound abatement controls on operating equipment in processing  
12 facilities and wellfields, will further reduce the propagation of noise to onsite and offsite  
13 receptors. Noise impacts to workers during operations will be mitigated by the use of  
14 personal hearing protection in areas where noise levels exceed OSHA exposure limits in  
15 29 CFR 1910.95 (Powertech, 2009a).

16  
17 As noted in the previous section, the seasonally occupied Daniels residence is within 305 m  
18 [1,000 ft] of proposed wellfields B-WF6 and B-WF7 in the Burdock area (see Figure 2.1-6).  
19 Therefore, the Daniels residence may experience noise above background levels during  
20 activities associated with operations in these wellfields. Because wellfields will be developed  
21 and operated sequentially, these potential noise levels will be short term (1 to 2 years for each  
22 wellfield; see SEIS Section 2.1.1.1). In addition, the Daniels residence will not be occupied  
23 year round.

24  
25 Heavy truck traffic associated with transporting uranium-loaded resins to and from the  
26 central processing plant and shipments of yellowcake will result in temporary noise. Shipments  
27 of yellowcake will be infrequent (see SEIS Section 2.1.1.1.7) and will have only a SMALL impact  
28 on noise levels on Dewey Road and highways in the vicinity of the site (e.g., U.S. Highway 18  
29 through Edgemont). Traffic noise from commuting workers on highways in the vicinity of the site  
30 and on Dewey Road leading to and from the site will increase during operations when facilities  
31 are experiencing peak employment. However, because of the remote location of the site and  
32 lack of sensitive receptors leading to the site, noise impacts from passing traffic during  
33 operations will be SMALL.

34  
35 As noted previously, there will be less noise from heavy equipment during the operations phase  
36 of the proposed project compared to the construction phase; therefore, the potential for noise to  
37 disrupt wildlife will be reduced. During operations, wildlife is anticipated to avoid areas where  
38 noise-generating activities are ongoing (NRC, 2009a). Potential noise-related impacts to active  
39 raptor nests due to operations-related activities will continue to be mitigated by adherence to  
40 timing and spatial restrictions within specified distances of active raptor nests as determined by  
41 appropriate regulatory agencies (e.g., FWS, SDGFP, and BLM) (Powertech, 2009a).

42  
43 In summary, much of the noise generated during the operations phase of the proposed project  
44 will be contained within buildings and structures. Because of decreasing noise levels with  
45 distance, noise from operation activities will have no impact on residents, communities, or  
46 recreational areas that are located more than 305 m [1,000 ft] from specific noise-generating  
47 activities (NRC, 2009a). As noted previously, the seasonally occupied Daniels residence is  
48 located within 305 m [1,000 ft] of proposed wellfields B-WF6 and B-WF7 in the Burdock area  
49 and may experience noise above background levels during activities associated with operations  
50 in these wellfields. Because wellfields will be developed and operated sequentially (see SEIS  
51 Section 2.1.1.1), potential noise levels above background at the Daniels residence will be short

1 term (1 to 2 years for each wellfield). In addition, the Daniels residence will not be occupied  
2 year round. Noise levels to onsite and offsite receptors will be mitigated by use of sound  
3 abatement controls on operating equipment, adherence to OSHA regulatory limits, and use of  
4 personal hearing protection. Heavy truck traffic associated with yellowcake shipments will be  
5 infrequent and result in only short-term noise on local roads and highways. Noise impacts to  
6 raptors will continue to be mitigated by adhering to FWS and SDGFP seasonal noise, vehicular  
7 traffic, and human proximity guidelines and following an FWS-approved raptor monitoring and  
8 mitigation plan (Powertech, 2009a). Therefore, the NRC staff conclude that the overall site-  
9 specific impacts from noise during operations for the Class V injection well disposal option will  
10 be SMALL.

#### 11 12 4.8.1.1.3 Aquifer Restoration Impacts 13

14 NRC staff conclude that noise generated during the aquifer restoration phase of the proposed  
15 Dewey-Burdock ISR Project will either be similar to, or less than, noise generated during the  
16 operations phase. Pumps and compressors used to inject liquid wastes generated by aquifer  
17 restoration activities into Class V injection wells will be contained within locked buildings  
18 constructed around the wells (Powertech, 2010a). Noise from traffic will be limited to delivery of  
19 supplies and workers traveling to and from the site; therefore, there will be fewer vehicular trips  
20 than during the operations phase. In the wellfields, compressors and pumps will be the largest  
21 contributors to noise, but will be operated only for a relatively short daytime duration. Although  
22 potential noise generation during aquifer restoration is expected to be of short duration, aquifer  
23 restoration activities will continue over much of the life of the proposed project as operations are  
24 completed in sequentially developed wellfields (see Figure 2.1-1).

25  
26 Because the amount of equipment used and the volume of traffic will be less than during the  
27 operations phase, noise impacts during aquifer restoration will remain SMALL. Furthermore,  
28 because of decreasing noise levels with distance, aquifer restoration activities and associated  
29 traffic will be expected to have only SMALL and temporary noise impacts for residences,  
30 communities, or sensitive areas that are located more than 305 m [1,000 ft] from specific  
31 noise-generating activities (NRC, 2009a). The seasonally occupied Daniels residence, which is  
32 located within 305 m [1,000 ft] of proposed wellfields B-WF6 and B-WF7 in the Burdock area  
33 may experience noise above background levels during activities associated with aquifer  
34 restoration. Because wellfields will be operated and restored sequentially, potential noise levels  
35 above background at the Daniels residence will be short term (1 to 2 years for each wellfield).  
36 In addition, the Daniels residence will not be occupied year round. Noise impacts to workers  
37 during aquifer restoration will be mitigated by adherence to OSHA noise regulations, and wildlife  
38 is anticipated to avoid areas where noise-generating activities are ongoing (NRC, 2009a).  
39 Potential noise-related impacts to active raptor nest sites will continue to be mitigated by  
40 adherence to timing and spatial restrictions within specified distances of active raptor nests as  
41 determined by appropriate regulatory agencies (e.g., FWS, SDGFP, and BLM) and by following  
42 an FWS-approved raptor monitoring and mitigation plan (Powertech, 2009a). Therefore, NRC  
43 staff conclude that the potential impact from noise during aquifer restoration for the Class V  
44 injection well disposal option will be SMALL.

#### 45 46 4.8.1.1.4 Decommissioning Impacts 47

48 The noise generated during decommissioning of the proposed Dewey-Burdock ISR Project will  
49 be similar to or less than that generated during the construction phase. The sources of noise  
50 will include earthmoving, excavation, and building demolition activities. In the wellfields, the

1 greatest source of noise will be from equipment used during plugging and abandonment of  
2 production, injection, and monitoring wells. Cement mixers, compressors, and pumps will be  
3 the largest contributors to noise, but will be operated only for a relatively short daytime duration.  
4 Fewer shipments to and from the proposed site will occur as decommissioning progresses,  
5 resulting in less noise from traffic. Because of decreasing noise levels with distance,  
6 decommissioning activities and associated traffic will be expected to have only SMALL and  
7 temporary noise impacts for residences, communities, or sensitive areas that are located  
8 more than 305 m [1,000 ft] from specific noise-generating activities (NRC, 2009a). The  
9 seasonally occupied Daniels residence, which is located within 305 m [1,000 ft] of  
10 proposed wellfields B-WF6 and B-WF7 in the Burdock area, may experience noise above  
11 background levels during activities associated with decommissioning in these wellfields.  
12 However, potential noise levels above background at the Daniels residence during wellfield  
13 decommissioning will be temporary and the Daniels residence will not be occupied year round.  
14 Noise impacts to workers during decommissioning will be mitigated by adherence to OSHA  
15 noise regulations, and wildlife is expected to avoid areas where noise generating activities are  
16 ongoing (NRC, 2009a). Potential noise-related impacts between active raptor nest sites and  
17 decommissioning activities will continue to be mitigated by adherence to timing and spatial  
18 restrictions within specified distances of active raptor nests as determined by appropriate  
19 regulatory agencies (e.g., FWS, SDGFP, and BLM) and by following an FWS-approved raptor  
20 monitoring and mitigation plan (Powertech, 2009a). Therefore, NRC staff conclude that the  
21 potential impact from noise during decommissioning for the Class V injection well disposal  
22 option will be SMALL.

#### 23 24 **4.8.1.2 Disposal Via Land Application**

25  
26 If a permit for Class V injection wells cannot be obtained from EPA, the applicant will dispose of  
27 liquid waste generated at the proposed Dewey-Burdock ISR Project by land application (see  
28 SEIS Section 2.1.1.1.2.4.2). The locations of land application areas for this disposal option are  
29 shown in Figure 2.1-12. Potential environmental impacts from noise during construction,  
30 operations, aquifer restoration, and decommissioning for the land application option are  
31 discussed in the following sections.

##### 32 33 **4.8.1.2.1 Construction Impacts**

34  
35 For the land application disposal option, noise impacts to onsite and offsite human receptors  
36 and wildlife from the use of heavy equipment to create and improve road surfaces, furnish  
37 supplies, excavate foundations, erect buildings, and install wells and pipelines during the  
38 construction phase will be similar to those described in SEIS Section 4.8.1.1.1 for the Class V  
39 injection well disposal option. However, additional noise will be generated by heavy equipment  
40 used to construct (i) pipelines that transport the liquid waste from the processing facilities to land  
41 application areas and (ii) catchment areas adjacent to land application areas to control runoff.  
42 To minimize noise impacts due to construction activities in land application areas, the same  
43 mitigation measures described in SEIS Section 4.8.1.1.1 will be implemented. These mitigation  
44 measures would include using sound abatement controls on operating equipment and facilities,  
45 avoiding construction activities during the night, and using personal hearing protection for  
46 workers operating heavy equipment (Powertech, 2009a). The applicant will limit worker  
47 exposure to noise in accordance with OSHA regulations in 29 CFR 1910.95.

48  
49 In addition to the seasonally occupied Daniels residence, which is located within 305 m  
50 [1,000 ft] of proposed wellfields B-WF6 and B-WF7 in the Burdock area, the permanently  
51 occupied Beaver Creek Ranch Headquarters is located within 305 m [1,000 ft] of land

1 application areas in the Dewey area. Because of its proximity to land application areas,  
2 residents at the Beaver Creek Ranch Headquarters may be impacted by noise associated with  
3 construction of pipelines and catchment areas in proposed land application areas in the  
4 Dewey area. Therefore, onsite receptors at both the Daniels residence and the Beaver Creek  
5 Ranch Headquarters may experience short-term (1 to 2 years) noise levels above background  
6 during construction phase activities if land application is implemented to dispose of  
7 liquid wastes.

8  
9 With the exception of the Stodart residence (see Figure 3.2-1), all offsite residences are located  
10 more than 1.6 km [1.0 mi] from proposed land application areas. The Stodart residence is  
11 located approximately 0.8 km [0.5 mi] northwest of land application areas in the Dewey area.  
12 This distance is greater than the 305-m [1,000-ft] radius for noise from construction activities to  
13 return to background noise levels (NRC, 2009a).

14  
15 With the exception of the seasonally occupied Daniels residence in the Burdock area and  
16 the Beaver Creek Ranch Headquarters in the Dewey area, noise levels associated with  
17 project-related construction activities will not impact onsite or offsite residential receptors.  
18 Residents at the Daniels residence and Beaver Creek Ranch Headquarters will experience  
19 noise levels above background due to heavy equipment use associated with the development of  
20 wellfields B-WF6 and B-WF7 in the Burdock area and land application areas in the Dewey area.  
21 However, these noise levels will be short term (1 to 2 years). Implementation of mitigation  
22 measures, such as using sound abatement controls on operating equipment and facilities and  
23 using personal hearing protection for workers in high noise areas, will ensure that noise levels  
24 remain within guidelines for offsite receptors and workers. Noise levels associated with  
25 project-related transportation activities on Dewey Road leading to and from the site will be within  
26 FHWA noise abatement criteria at distances of 480 m [1,575 ft] or greater and will be temporary  
27 (1 to 2 years). Noise impacts to raptors at the proposed project will be mitigated by adhering to  
28 FWS and SDGFP seasonal noise guidelines, locating all planned facilities outside of BLM  
29 recommended buffer zones of all raptor nests, and following an FWS-approved raptor  
30 monitoring and mitigation plan (Powertech, 2009a). Therefore, the NRC staff conclude that the  
31 overall site-specific impacts from noise during construction for the land application disposal  
32 option will be SMALL.

#### 33 34 4.8.1.2.2 Operations Impacts

35  
36 For the land application disposal option, noise impacts to onsite and offsite human receptors  
37 and wildlife generated by mechanical equipment at the processing facilities and wellfields and  
38 by heavy truck and commuter traffic during the operations phase of the project will be similar to  
39 those described in SEIS Section 4.8.1.1.2 for the Class V injection well disposal option.  
40 Additional noise will be generated by pumps and the motors or engines used to drive irrigation  
41 pivots in land application areas. Noise levels generated by irrigation equipment in land  
42 application areas may be substantially reduced by installing exhaust and inlet silencers on  
43 engines, using electric motor drives instead of internal combustion engines, and erecting  
44 acoustic barriers to block the line of hearing from the exhaust engine and inlet toward the  
45 receptors (either human or wildlife) to be protected from noise.

46  
47 As noted in the previous section, the seasonally occupied Daniels residence is located within  
48 305 m [1,000 ft] of proposed wellfields B-WF6 and B-WF7 in the Burdock area and the Beaver  
49 Creek Ranch Headquarters is located within 305 m [1,000 ft] of proposed land application areas  
50 in the Dewey area (see Figure 2.1-6). Therefore, these residences may experience noise

1 above background levels during activities associated with wellfield and land application  
2 operations. Because wellfields will be developed and operated sequentially, potential noise  
3 levels above background due to wellfield operations will be short term (1 to 2 years for each  
4 wellfield). In addition, land application areas will not be operated year round. As described in  
5 SEIS Section 2.1.1.1.6.2, treated wastewater will be applied to the land during the growing  
6 season to irrigate alfalfa (May 11 to September 24). Beyond the growing season, land irrigation  
7 will be conducted as conditions permit, relying on evaporation to remove water from soils.

8  
9 Much of the noise generated during the operations phase of the project will be contained within  
10 buildings and structures. Because of decreasing noise levels with distance, noise from  
11 operation activities will have no impact on residents, communities, or recreational areas that are  
12 located more than 305 m [1,000 ft] from specific noise-generating activities (NRC, 2009a). As  
13 noted previously, residents at the seasonally occupied Daniels residence and the Beaver Creek  
14 Ranch Headquarters may experience noise above background levels during activities  
15 associated with operations in wellfields B-WF6 and B-WF7 and land application areas in the  
16 Dewey area. Because wellfields will be developed and operated sequentially (see SEIS  
17 Section 2.1.1.1), potential noise levels above background at the Daniels residence will be short  
18 term (1 to 2 years for each wellfield). In addition, the Daniels residence will not be occupied  
19 year round. Likewise, residents at the Beaver Creek Ranch Headquarters will only be  
20 exposed to noise from nearby land application areas during the growing season (May 11 to  
21 September 24). Noise levels to onsite and offsite receptors will be further mitigated by use of  
22 sound abatement controls on operating equipment, adherence to OSHA regulatory limits, and  
23 use of personal hearing protection. Heavy truck traffic associated with yellowcake shipments  
24 will be infrequent and result in only short-term noise on local roads and highways. During  
25 operations, wildlife is expected to avoid areas where noise-generating activities are ongoing  
26 (NRC, 2009a). Noise impacts to raptors at the proposed project will continue to be mitigated by  
27 adhering to FWS and SDGFP seasonal noise guidelines and by following an FWS-approved  
28 raptor monitoring and mitigation plan (Powertech, 2009a). Therefore, the NRC staff conclude  
29 that the overall site-specific impacts from noise during operations for the land application  
30 disposal option will be SMALL.

#### 31 32 4.8.1.2.3 Aquifer Restoration Impacts

33  
34 For the land application liquid waste disposal option, noise generated during the aquifer  
35 restoration phase of the proposed Dewey-Burdock ISR Project will either be similar to, or less  
36 than, noise generated during the operations phase. Noise levels generated by irrigation  
37 equipment in land application areas may be substantially reduced by installing exhaust and inlet  
38 silencers on engines, using electric motor drives instead of internal combustion engines, and  
39 erecting acoustic barriers to block the line of hearing from the exhaust engine and inlet toward  
40 the receptors (either human or wildlife). Noise from traffic will be limited to delivery of supplies  
41 and workers traveling to and from the site; therefore, there will be fewer vehicular trips than  
42 during the operations phase. In the wellfields, compressors and pumps will be the largest  
43 contributors to noise, but will be operated only for a relatively short daytime duration. Although  
44 potential noise generation during aquifer restoration in each wellfield is expected to be of short  
45 duration, aquifer restoration activities will continue over much of the life of the project as  
46 operations are completed in sequentially developed wellfields (see Figure 2.1-1).

47  
48 Because the amount of equipment used and the volume of traffic will be less than during the  
49 operations phase, noise impacts during aquifer restoration will remain SMALL. Furthermore,  
50 because of decreasing noise levels with distance, aquifer restoration activities and associated  
51 traffic will be expected to have only SMALL and temporary noise impacts for residences,

1 communities, or sensitive areas that are located more than 305 m [1,000 ft] from specific  
2 noise-generating activities (NRC, 2009a). Residents at the seasonally occupied Daniels  
3 residence and the Beaver Creek Ranch Headquarters may experience noise above background  
4 levels during activities associated with aquifer restoration activities in wellfields B-WF6 and  
5 B-WF7 and land application areas in the Dewey area. Because wellfields will be developed and  
6 operated sequentially (see SEIS Section 2.1.1.1), potential noise levels above background at  
7 the Daniels residence will be short term (1 to 2 years for each wellfield). In addition, the Daniels  
8 residence will not be occupied year round. Likewise, residents at the Beaver Creek Ranch  
9 Headquarters will only be exposed to noise from nearby land application areas during the  
10 growing season. Noise impacts to workers during aquifer restoration will be mitigated by  
11 adherence to OSHA noise regulations, and wildlife is anticipated to avoid areas where  
12 noise-generating activities are ongoing (NRC, 2009a). Potential noise-related impacts between  
13 active raptor nest sites and aquifer restoration activities will continue to be mitigated by  
14 adherence to timing and spatial restrictions within specified distances of active raptor nests as  
15 determined by appropriate regulatory agencies (e.g., FWS, SDGFP, and BLM) (Powertech,  
16 2009a). Therefore, the potential impact from noise during aquifer restoration for the land  
17 application disposal option will be SMALL.

18

#### 19 4.8.1.2.4 Decommissioning Impacts

20

21 The noise generated during decommissioning of the proposed Dewey-Burdock ISR Project will  
22 be similar to or less than that generated during the construction phase. The sources of noise  
23 will include earthmoving, excavation, and building demolition activities. In the wellfields, the  
24 greatest source of noise will be from equipment used during plugging and abandonment of  
25 production, injection, and monitoring wells. Cement mixers, compressors, and pumps will be  
26 the largest contributors to noise, but will be operated only for a relatively short daytime duration.  
27 Fewer shipments to and from the proposed site would occur as decommissioning progressed,  
28 resulting in less noise from traffic. Because of decreasing noise levels with distance,  
29 decommissioning activities and associated traffic will be expected to have only SMALL and  
30 temporary noise impacts for residences, communities, or sensitive areas that are located more  
31 than 305 m [1,000 ft] from specific noise-generating activities (NRC, 2009a). The seasonally  
32 occupied Daniels residence and the Beaver Creek Ranch Headquarters may experience noise  
33 above background levels during activities associated with decommissioning activities in  
34 wellfields B-WF6 and B-WF7 and land application areas in the Dewey area. However, potential  
35 noise levels above background at the Daniels residence and the Beaver Creek Ranch  
36 Headquarters during decommissioning will be temporary. In addition, the Daniels residence will  
37 not be occupied year round. Noise impacts to workers during decommissioning will be  
38 mitigated by adherence to OSHA noise regulations, and wildlife is expected to avoid areas  
39 where noise-generating activities are ongoing (NRC, 2009a). Potential noise-related impacts  
40 between active raptor nest sites and decommissioning activities will continue to be mitigated by  
41 adherence to timing and spatial restrictions within specified distances of active raptor nests as  
42 determined by appropriate regulatory agencies (e.g., FWS, SDGFP, and BLM) (Powertech,  
43 2009a). Therefore, NRC staff conclude that the potential impact from noise during  
44 decommissioning for the land application disposal option will be SMALL.

45

#### 46 4.8.1.3 Disposal Via Combination of Class V Injection and Land Application

47

48 If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is  
49 insufficient to dispose of all liquid wastes generated at the proposed Dewey-Burdock ISR  
50 Project, the applicant will dispose of liquid waste by a combination of Class V injection wells and

1 land application (see SEIS Section 2.1.1.1.2.4.3). For the combined Class V injection well  
2 disposal and land application option, land application facilities and infrastructure will be  
3 constructed, operated, restored, and decommissioned on an as-needed basis depending on  
4 the Class V injection well disposal capacity (Powertech, 2011). As described in SEIS  
5 Sections 4.8.1.1 and 4.8.1.2, many project-related noise impacts to onsite and offsite receptors  
6 will be similar for either the Class V injection well or land application disposal options. However,  
7 for the land application option, additional noise will be generated by construction of land  
8 application facilities and infrastructure (e.g., irrigation areas, pipelines, and ponds for liquid  
9 waste storage during nonirrigation periods) and operation of center pivot irrigation systems. In  
10 comparison, for the Class V injection well disposal option, additional noise will be generated by  
11 construction of four to eight Class V injection wells (see SEIS Section 2.1.1.1.2.4.1). During  
12 operations, pumps and compressors used to inject liquid wastes into Class V injection wells will  
13 be contained within buildings constructed around the wells (Powertech, 2010a), which will  
14 reduce noise impacts to onsite and offsite residents and workers. Therefore, the environmental  
15 noise impacts of liquid waste disposal by land application for all phases of the ISR process will  
16 be greater than for liquid waste disposal by Class V well injection. Furthermore, because only a  
17 portion of land application facilities and infrastructure will be constructed, operated, and  
18 decommissioned, the significance of environmental noise impacts for the combined disposal  
19 option will be less than for the land application option alone. Therefore, NRC staff conclude that  
20 the environmental noise impacts of the combined Class V injection well and land application  
21 option for each phase of the proposed project will be bounded by the significance of  
22 environmental noise impacts of the Class V injection well option and the land application option  
23 as summarized in Table 4.8.1.

24

25 **4.8.2 No Action (Alternative 2)**

26

27 Under the No-Action alternative, there will be no change to the sound levels either within the  
28 proposed license area or to surrounding receptors. While natural resource exploration activities  
29 will continue and could potentially expand in the future, they will typically be of short duration  
30 and will involve few vehicles and no permanent, noise-emitting infrastructure. The natural  
31 setting of the proposed project area and the continuation of ongoing natural resource  
32 exploration activities will result in sound levels remaining at ambient levels.

33

34 **4.9 Historic and Cultural Resources Impacts**

35

36 As discussed in GEIS Section 4.4.8, potential environmental impacts on historic and cultural  
37 resources may occur during all phases of an ISR facility’s lifecycle (NRC, 2009a). Loss of and  
38

**Table 4.8-1. Significance of Environmental Noise Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL	SMALL	SMALL

\*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.

39



1 damage to historic, cultural, and archaeological resources may result from land disturbance as  
2 part of construction, operations, aquifer restoration, and decommissioning activities.

#### 3 4 GEIS Construction Phase Summary

5  
6 As discussed in GEIS Section 4.4.8.1, the potential impacts during ISR facility construction may  
7 include loss of, or damage to, historic and cultural resources due to excavation and earthmoving  
8 activities. An NRC licensee will be required, under conditions in its NRC license, to stop work  
9 upon discovery of previously undocumented historic or cultural resources and notify the  
10 appropriate federal, tribal, and state agencies with regard to mitigation measures. NRC staff  
11 concluded in the GEIS that potential impacts to historic and cultural resources from construction  
12 will be SMALL to LARGE depending on the presence or absence of historic and cultural  
13 resources within the project area. (NRC, 2009a)

#### 14 15 GEIS Operations Phase Summary

16  
17 As discussed in GEIS Section 4.4.8.2, it is expected that potential impacts to historic and  
18 cultural resources from operations will be less than during construction, because less land  
19 disturbance occurs during this phase. Additionally, conditions in the NRC license typically  
20 require the licensee to stop work upon discovery of previously undocumented historic or cultural  
21 resources and to notify the appropriate federal, tribal, and state agencies with regard to  
22 mitigation measures. For these reasons, NRC staff determined in the GEIS that ISR operation  
23 impacts to historic and cultural resources will be SMALL. (NRC, 2009a)

#### 24 25 GEIS Aquifer Restoration Phase Summary

26  
27 In GEIS Section 4.4.8.3, NRC staff determined that aquifer restoration impacts to historic and  
28 cultural resources are expected to be similar to, or less than, potential impacts from operations.  
29 Aquifer restoration activities are generally limited to the existing infrastructure and previously  
30 disturbed areas (e.g., access roads, central processing plant). Additionally, conditions in the  
31 NRC license regarding the discovery of previously undocumented historic or cultural  
32 resources will remain in effect. For these reasons, NRC staff concluded in the GEIS that the  
33 potential impacts from aquifer restoration on historic and cultural resources will be SMALL.  
34 (NRC, 2009a)

#### 35 36 GEIS Decommissioning Phase Summary

37  
38 GEIS Section 4.4.8.4 discussed potential impacts from decommissioning to historic and  
39 cultural resources. Decommissioning and reclamation activities will focus on previously  
40 disturbed areas, and historic and cultural resources within the potential area of effect will  
41 already be known. As a result, NRC staff determined in the GEIS the potential impacts to  
42 historic, cultural, and archaeological resources during decommissioning and reclamation will be  
43 SMALL. (NRC, 2009a)

44  
45 The potential impacts to historic and cultural resources from construction, operations, aquifer  
46 restoration, and decommissioning for the proposed Dewey-Burdock ISR Project are discussed  
47 in the following sections.

#### 4.9.1 Proposed Action (Alternative 1)

Impacts on historic and cultural resources at the proposed Dewey-Burdock ISR Project will be linked to the physical footprints of structures and infrastructure associated with the proposed action. As described in SEIS Section 2.1.1.2, a central processing plant in the Burdock area, a satellite facility in the Dewey area, access roads, wellfields, pipelines, surface impoundments, and potential land irrigation areas will be constructed at the proposed project site. The applicant is proposing the following options for liquid waste disposal that include deep well disposal via Class V injection wells, land application, or disposal via combination of Class V injection and land application (see SEIS Section 2.1.1.1.2.4). The locations of proposed site facilities and infrastructure for the Class V injection well and land application disposal options are shown in Figures 2.1-10 and 2.1-12, respectively. The locations of wellfields for the proposed project are shown in Figure 2.1-6.

The applicant plans to use existing power line corridors wherever possible when constructing new power lines. However, a new power line corridor will be constructed alongside the county road between the Dewey and Burdock areas to connect the Dewey satellite facility and the Burdock central processing plant. This proposed corridor is approximately 9 m [30 feet] in width; the poles are approximately 0.3 m [1.0 ft] in diameter and will be placed every 30-91 m [100-300 ft]. No roadways will be built during construction of the power lines and minimal disturbance to the ground surface is anticipated. No sites currently listed or eligible for listing in the NRHP or unevaluated sites will be adversely impacted by the proposed construction of new power lines.

The impacts on historic and cultural resources for each of the applicant-proposed liquid waste disposal options (i.e., disposal via Class V injection wells, disposal via land application, or disposal via combination of Class V injection wells and land application) are discussed in the following sections.

##### 4.9.1.1 Disposal Via Class V Injection Wells

As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred disposal option for liquid waste is deep well disposal via Class V injection wells. Potential impacts on historic and cultural resources from construction, operations, aquifer restoration, and decommissioning associated with the Class V injection well disposal option at the proposed Dewey-Burdock ISR Project are discussed in the following sections.

###### 4.9.1.1.1 Construction Impacts

As discussed in the SEIS Section 4.2.1.1.1, a total of 98.3 ha [243 ac] or 2.3 percent of the proposed permit area will be potentially disturbed by activities associated with construction of site buildings, pipelines, wellfields, ponds, and access roads for the Class V injection well disposal option (Powertech, 2010a).

NRC evaluated the results of historic and cultural resource surveys, conducted as part of prelicense application activities, in making recommendations on the eligibility of historic properties for the NRHP. NRC applies the criteria in found in the NHPA implementing regulations at 36 CFR 60.4(a)–(d) in making its National Register eligibility recommendations. These determinations are discussed in the sections below. Efforts to identify and evaluate places of religious and cultural importance to Indian tribes through consultation are on-going.

1 Consultation involving NRC, the applicant, South Dakota State Historical Preservation Office  
2 (SD SHPO), BLM, and EPA, and 20 Indian tribes is being conducted (see SEIS Section 1.7.3.5)  
3 to determine: 1) whether significant properties are present, 2) whether properties will be  
4 disturbed by site activities, and 3) what mitigation measures should be implemented. NRC also  
5 requires licensed facilities to submit a decommissioning plan for review, which will ensure  
6 compliance with Section 106 of the NHPA during the decommissioning phase.

7  
8 As described in SEIS Section 3.9.2.1, more than 300 archaeological sites were recorded during  
9 the field investigations. Two-hundred and twenty sites were recommended as ineligible for  
10 listing in the NRHP and 80 sites consisted of isolated finds. At this time a total of 18 historic  
11 properties within the proposed project area are listed or recommended as eligible for listing on  
12 the NRHP. As of this date, SD SHPO has not concurred with sites recommended eligible to the  
13 NRHP. Avoidance of historic properties is the goal during development and production of the  
14 proposed project. The applicant committed to fencing known historic properties in areas where  
15 construction, wellfield development and project operations will occur so disturbance to these  
16 areas can be avoided. In addition, the location of historic properties will be made known to  
17 employees in advance of ground disturbing activities. The use of archaeological and tribal  
18 monitors has been proposed during ground disturbing activities, as well (Powertech, 2009a).

19  
20 As described in SEIS Section 4.10.1.1.1, the applicant has committed to minimize potential  
21 impacts to visual and scenic resources with the use of building materials and paint colors that  
22 complement the natural environment, in keeping with BLM guidelines. Construction and  
23 placement of proposed structures will use topography to conceal wellheads, plant facilities, and  
24 roads from public vantage points in order to mitigate visual impacts (Powertech, 2009b).

25  
26 The 18 historic properties currently listed or recommended eligible for listing on the NRHP,  
27 including their impact analyses, are listed in Tables 4.9-1 and 4.9-2 and discussed below.

28  
29 Sites 39CU577, 39CU578, 39CU586, 39CU588, 39CU2733, 39CU2738, and 39CU590 are  
30 Native American occupation sites. Site 39CU2735 is an Archaic occupation site. Site 39CU593  
31 contains both Native American and Euroamerican components, with artifact scatters extending  
32 down a hillslope. Site 39CU584 is a Native American occupation site and burial (affiliation  
33 unknown) located on a ridge slope. Each of these sites has been recommended as eligible for  
34 listing in the NRHP (Kruse, et al., 2008). However, all are located outside of proposed areas of  
35 development in the Dewey area. Because these properties are not threatened by site activities  
36 and will be avoided, no impacts to these sites are anticipated.

37  
38 The Edna and Ernest Young Ranch Historic District (90000949) and the Bakewell Ranch  
39 (CU0000050) within this historic district are listed on the NRHP and were described in detail  
40 in Section 3.9.2.2. The properties are located south of Beaver Creek in the northwestern part  
41 of the APE, southwest of the proposed wellfield areas in the Dewey area. As noted in  
42 Section 4.10.1.1.1, the applicant has committed to use building materials and paint colors  
43 that complement the natural surroundings in accordance with BLM guidelines to mitigate  
44 visual impacts. These properties are located outside the area that will be affected by  
45 construction, operations, or decommissioning; therefore, no impacts to these historic properties  
46 are anticipated.

47  
48 Five historic properties (39CU3592, 39CU271, 39FA1941, 39CU2000, and 39FA2000) could be  
49 impacted by proposed construction activities associated with the Class V injection well disposal  
50 option. These sites are described next.

1 Site 39CU3592 is a Native American artifact scatter and hearth site located within a proposed  
2 wellfield area south of the Dewey satellite facility. NRC staff has recommended that a buffer  
3 zone and protective fencing be erected around 39CU3592 to ensure this historic property is not  
4 adversely impacted during project activities. The applicant committed to protect this property by  
5 establishing a buffer zone and installing protective fencing around the site (Powertech, 2012e).  
6

7 Site 39CU271 is an Archaic occupation site with 238 associated hearth features and a cairn  
8 feature. Site 39CU271 is located to the east of a proposed monitoring well ring in the Dewey  
9 area. NRC staff recommend avoidance of site 39CU271 and the applicant committed to avoid  
10 this site (Powertech, 2012e).  
11

12 Site 39FA1941 is an Archaic artifact scatter and hearth site located on a ridgetop, east of the  
13 proposed Burdock central processing plant. The southern portion of this site lies within a  
14 proposed wellfield area. NRC staff recommend avoidance of site 39FA1941. If avoidance of  
15 this historic property is not possible, NRC staff has recommended that a treatment plan be  
16 developed in consultation involving the NRC, SD SHPO, BLM, tribal representatives, and the  
17 applicant to formalize mitigation and data recovery measures.  
18

**Table 4.9-1. Historic Properties Within or Adjacent to the APE That Are Currently Listed in NRHP or Sites Recommended as Eligible for Listing in the NRHP**

Historic Property (Site Number, Structure Identification, or Historic District)	Description	Currently Listed on the NRHP or Eligible for Listing on NRHP	Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D	Impact Analysis
39CU3592	Native American artifact scatter and hearth site	Eligible	D	Site is located within a proposed wellfield area south of the Dewey satellite facility. Site will need to be fenced off to ensure avoidance.
Log Barn (Structure CU02500002)	Log barn was found eligible for listing on NRHP in April 2012 under Criteria A.	Eligible	A	Site is located approximately 76 m [250 ft] south of land application areas. The site will be fenced off to ensure avoidance. No adverse visual impacts are anticipated.

19

1

**Table 4.9-1. Historic Properties Within or Adjacent to the APE That Are Currently Listed in NRHP or Sites Recommended as Eligible for Listing in the NRHP (continued)**

<b>Historic Property (Site Number, Structure Identification, or Historic District)</b>	<b>Description</b>	<b>Currently Listed on the NRHP or Eligible for Listing on NRHP</b>	<b>Evaluation Criteria— Determination of Eligibility for listing in NRHP Under Criteria A, B, C, or D</b>	<b>Impact Analysis</b>
39CU577	Native American/ Euroamerican/ Occupation site; artifact scatter	Eligible	D	Site will be avoided; no impact anticipated.
39CU2735	Archaic- Prehistoric occupation site	Eligible	D	Site will be avoided; no impact anticipated.
39CU578	Euroamerican/ Native American Historic dump and occupation site located on a ridge slope	Eligible	D	Site will be avoided; no impact anticipated.
39CU586	Native American and Late Archaic occupation site on a ridge crest	Eligible	D	Site will be avoided; no impact anticipated.
39CU588	Native American occupation site on a ridge crest	Eligible	D	Site will be avoided; no impact anticipated.
39CU2733	Native American hearth and artifact scatter on a ridge slope	Eligible	D	Site will be avoided; no impact anticipated.

2

1

**Table 4.9-1. Historic Properties Within or Adjacent to the APE That Are Currently Listed in NRHP or Sites Recommended as Eligible for Listing in the NRHP (continued)**

Historic Property (Site Number, Structure Identification, or Historic District)	Description	Currently Listed on the NRHP or Eligible for Listing on NRHP	Evaluation Criteria— Determination of Eligibility for listing in NRHP Under Criteria A, B, C, or D	Impact Analysis
39CU2738	Native American occupation site on a ridge crest	Eligible	D	Site will be avoided; no impact anticipated.
39CU590	Native American artifact scatter on a ridge saddle	Eligible	D	Site will be avoided; no impact anticipated.
39CU593	Native American and Euroamerican occupation and artifact scatter on a hillslope	Eligible	D	Site will be avoided; no impact anticipated.
39FA1941	Native American artifact scatter and hearth site	Eligible	D	Site is located approximately 91 m [300 ft] east of the proposed Burdock central processing plant and is within a proposed wellfield area;
39CU2000	Historic Railroad	Eligible	A and C	Site crosses proposed wellfield areas; however, no portion of the site will be adversely impacted.
39FA2000	Historic Railroad	Eligible	A and C	Site crosses proposed wellfield areas; however, no portion of the site will be adversely impacted.

2

1

**Table 4.9-1. Historic Properties Within or Adjacent to the APE That Are Currently Listed in NRHP or Sites Recommended as Eligible for Listing in the NRHP (continued)**

Historic Property (Site Number, Structure Identification, or Historic District)	Description	Currently Listed on the NRHP or Eligible for Listing on NRHP	Evaluation Criteria— Determination of Eligibility for listing in NRHP Under Criteria A, B, C, or D	Impact Analysis
Historic District 90000949- Edna and Ernest Young Ranch	This historic district covers 52.6 ha [130 ac] and is located approximately 4.8 km [3 mi] south of Dewey and south of Beaver Creek. The area of significance is exploration/settlement during 1900–1924 and 1925–1949. There are 13 contributing buildings, one contributing structure, and one non-contributing structure.	Listed in the NRHP in 1990	A	National Register Historic District will be avoided; no impact anticipated. No adverse visual impacts are anticipated.
Bakewell Ranch (Structure CU00000050)	The Bakewell Ranch is located within the Edna and Ernest Young Ranch National Register Historic District.	Listed on the NRHP	A	Historic property will be avoided; no impact anticipated. No adverse visual impacts are anticipated.

2  
3

1 Sites 39CU2000 and 39FA2000 are historic properties with 1889 portions of the Burlington  
2 Northern Railroad that run the length of the APE. Site 39CU2000 crosses proposed wellfield  
3 areas east of the proposed Dewey satellite facility. Additionally, a portion of site 39FA2000  
4 crosses a proposed wellfield area located southwest of the Burdock central processing plant,  
5 NRC staff recommend avoidance of the railroad segments and the applicant has committed to  
6 avoid these historic properties (Powertech, 2012e).  
7

8 As discussed in SEIS Sections 3.9.2.1 and 3.9.3, historic and ethnographic evidence indicate  
9 that sites with cairn features served as markers for trails, camps, burials, caches, and  
10 ceremonial centers. Sites with burials or cairn features are listed in Table 4.9-2 and are  
11 protected by law in South Dakota (South Dakota Codified Law (SDCL) 34-27). Sites 39FA1902  
12 and 39FA778, and 39FA96 are located near proposed construction activities for the Class V  
13 injection well disposal option and are discussed next.  
14

**Table 4.9-2. Burial, Cairn, and Other Sites Within or Adjacent to APE**

<b>Site Number</b>	<b>Description</b>	<b>Eligibility Designation</b>	<b>Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D</b>	<b>Impact Analysis</b>
39CU271	Native American and Archaic artifact scatter and occupation site on a ridge slope with a cairn feature	Eligible	D	Site is located approximately 61 m [200 ft] east of proposed wellfield areas; site will be avoided.
39CU584	Native American occupation site and burial (affiliation unknown) on a ridge slope	Eligible	D	Site will be avoided; no impact anticipated.
39FA1902	Historic site with Euroamerican burial	Unevaluated		Euroamerican burial site is located approximately 152 m [500 ft] west of the proposed Burdock central processing plant. The site will be protected by a buffer zone and fencing.

15



1

**Table 4.9-2. Burial, Cairn, and Other Sites Within or Adjacent to APE (continued)**

<b>Site Number</b>	<b>Description</b>	<b>Eligibility Designation</b>	<b>Evaluation Criteria— Determination of Eligibility for Listing in NRHP Under Criteria A, B, C, or D</b>	<b>Impact Analysis</b>
39CU3584	Cairn site	Not Eligible		Site is located in an area of potential impacts within land application areas. The site will be protected by a buffer zone and fencing.
39CU3587	Two historic Euroamerican burials	Unevaluated		Site will be avoided; no impact anticipated.
39CU530	Cairn site	Unevaluated		Site will be avoided; no impact anticipated.
39CU3564	Cairn site	Unevaluated		Site will be avoided; no impact anticipated.
39CU3620	Cairn site	Unevaluated		Site will be avoided; no impact anticipated.
39FA1862	Cairn site with stone circles	Unevaluated		Site will be avoided; no impact anticipated.
39FA1863	Cairn site with stone circles	Unevaluated		Site will be avoided; no impact anticipated.
39FA1881	Cairn site	Unevaluated		Site will be avoided; no impact anticipated.
39FA1890	Cairn site	Unevaluated		Site will be avoided; no impact anticipated.
39FA1927	Cairn site	Unevaluated		Site will be avoided; no impact anticipated.

2

3 Site 39FA1902 is a historic site with a Euroamerican burial located approximately 152 m [500 ft]  
4 west of the proposed Burdock central processing plant and will not be affected by project  
5 construction or operational activities. As described in SEIS Section 3.9.2.1, this site contains a  
6 historic bridge structure (FA00000151). The site has not been evaluated for eligibility for listing  
7 on the NRHP. The applicant has committed to avoid this site through the use of a buffer zone  
8 and protective fencing (Powertech, 2012e).

9

10 Site 39FA778 is an historic farmstead located within the center of the proposed Burdock central  
11 processing plant footprint. NRC staff has recommended that construction activities that may  
12 affect site 39FA778 be delayed until evaluative testing is completed and a determination of  
13 eligibility for listing on the NRHP is made.

14

15 Area 8 is an historic component of the multi-component site 39FA96. As discussed in  
16 Section 3.9.2.1, evaluative testing of the prehistoric component of site 39FA96 demonstrated  
17 the prehistoric component is a deflated surface scatter of artifacts and hearths and therefore not

1 eligible for listing on the NRHP under Criterion D (Palmer and Kruse, 2012). However,  
2 preliminary information gathered through consultation with the tribes indicate Areas 1 and 6 at  
3 site 39FA96 have the potential to be of religious and cultural importance to the tribes based on  
4 the number of hearth features and extensive size of the site. NRC staff is awaiting additional  
5 information from the tribes before making a recommendation of eligibility.  
6

7 The historic component in Area 8 consists of two log cabins, a cistern, a collapsed outbuilding, a  
8 remnant of a foundation, and piles of foundation rubble. Additional evaluative testing within the  
9 historic cabin structures is planned to allow for a determination of NRHP eligibility (Powertech,  
10 2012f). For this reason, NRC staff recommend that disturbance of Area 8 at 39FA96 be  
11 delayed until evaluative testing is completed and a recommendation on the eligibility for listing  
12 the property on the NRHP is made.  
13

14 Archaeological investigations have not identified other cairn sites within or in the vicinity of  
15 construction impact areas for the Class V injection well disposal option. No other listed or sites  
16 eligible for listing on the NRHP have been identified within proposed Class V construction areas.  
17 The sites discussed above would be avoided during the construction phase of the Class V  
18 injection well disposal facilities, if implemented; therefore, impacts to these sites are not  
19 anticipated.  
20

21 The applicant stated the overall goal during development and production of the proposed project  
22 is the avoidance of archaeological sites (Powertech, 2009a, Section 3.8.1). Unevaluated sites  
23 that lie within 76 m [250 ft] of proposed wellfields and land application areas are presented in  
24 Table 4.9-3. The applicant does not plan to engage in actions that will disturb these sites and  
25 for this reason the sites remain unevaluated. Areas containing historic properties and  
26 unevaluated sites will be fenced to ensure their protection. In addition, construction personnel  
27 will be advised of the location of historic properties and unevaluated sites prior to any ground-  
28 disturbing activities (Powertech, 2009a). If construction plans change and NRHP-eligible  
29 properties are impacted, mitigation strategies must be developed, evaluated, and completed  
30 prior to the start of construction. Prior to construction, the applicant will also develop an  
31 Unexpected Discovery Plan that would outline  
32

**Table 4.9-3. List of Unevaluated Sites Within 76 m [250 ft] of Project Activity Areas**

Unevaluated Site	Location
39FA778	This historic farmstead is located within the proposed Burdock central processing plant footprint. Site will undergo further evaluative testing. Until testing is completed, avoidance of the site is recommended.
Areas 1, 6, and 8 at 39FA96	Areas 1, 6, and 8 at site 39FA96 are located within a proposed wellfield area. Until testing at Area 8 is completed, avoidance of the site is recommended. Until tribes review Areas 1 and 6, avoidance is recommended.
39CU3624	Site 39CU3624 is located south of Pass Creek less than 30.5 m [100 ft] north of a proposed wellfield area.
39FA1920	Site 39FA1920 is located at the southeast corner of the APE approximately 30.5 m [100 ft] south of a proposed wellfield area.

1 the steps required in the event that unexpected historical and cultural resources  
2 are encountered.

3  
4 The NRC review is based on analyses of the historic and cultural resource investigations; a  
5 review of available literature; a search of records and collections maintained by the South  
6 Dakota Archaeological Research Center; and supplemental field investigations, including  
7 evaluative testing, and commitments made by the applicant to implement mitigation measures  
8 when sites will be affected. The NRC staff conclude the impacts to historic and cultural  
9 resources at the proposed Dewey-Burdock site will range from SMALL to LARGE. This finding  
10 reflects that efforts to identify and evaluate properties of religious and cultural significance to  
11 tribes are incomplete and Section 106 consultation is ongoing (see SEIS Section 1.7.3.5 and  
12 Appendix A).

#### 13 14 4.9.1.1.2 Operations Impacts

15  
16 There would be minimal impacts from facility operations or maintenance on historic and cultural  
17 resources because any impacts to these sites will be mitigated prior to facility construction.  
18 Visual impacts for cultural resources are the same as described in Section 4.9.1.1.1. If there is  
19 an inadvertent discovery of historic and cultural resources during routine maintenance activities,  
20 the Unexpected Discovery Plan committed to by the applicant will be implemented. For these  
21 reasons, the impacts to historic and cultural resources during the operations phase for the  
22 Class V injection well disposal option will be SMALL.

#### 23 24 4.9.1.1.3 Aquifer Restoration Impacts

25  
26 Aquifer restoration impacts to historic and cultural resources will be similar to, or less than,  
27 impacts from operations. Impacts to these resources would have been mitigated prior to the  
28 facility construction. Historic and cultural resources encountered during aquifer restoration  
29 activities, will be dealt with under the applicant's Unexpected Discovery Plan will be  
30 implemented. Work at the immediate area would stop and proper notifications would be  
31 undertaken. Therefore, the impacts to historic and cultural resources during the aquifer  
32 restoration phase for the Class V injection well disposal option will be SMALL.

#### 33 34 4.9.1.1.4 Decommissioning Impacts

35  
36 Decommissioning and reclamation activities will be limited to previously disturbed areas.  
37 Therefore, there will be minimal impacts on historic and cultural resources. These sites would  
38 have been avoided from the construction phase through the decommissioning phase. Visual  
39 impacts for cultural resources are discussed in Section 4.9.1.1.1. If historic and cultural  
40 resources are encountered during decommissioning and reclamation activities, the Unexpected  
41 Discovery Plan will be implemented. Work would stop in the immediate area and proper  
42 notifications would be undertaken. Therefore, the impacts to historic and cultural resources  
43 during decommissioning for the Class V injection well disposal option will be SMALL.

#### 44 45 **4.9.1.2 Disposal Via Land Application**

46  
47 If a permit for Class V injection wells cannot be obtained from EPA, the applicant proposes to  
48 dispose of liquid waste generated at the proposed Dewey-Burdock ISR Project by land  
49 application (see SEIS Section 2.1.1.1.2.4.2). The potential impacts on historic and cultural

1 resources during construction, operations, aquifer restoration, and decommissioning associated  
2 with the land application liquid waste disposal option are discussed in the following sections.

#### 3 4 4.9.1.2.1 Construction Impacts

5  
6 As noted in SEIS Section 4.2.1.2.1, approximately 566 ha [1,398 ac] of land are projected to be  
7 disturbed by construction activities for the land application option (see Table 4.2-1). As with the  
8 Class V injection well disposal option, mitigation measures, such as limiting construction of new  
9 access and secondary roads, would minimize surface disturbance (Powertech, 2009a) during  
10 this option and would limit impacts to historic and cultural resources.

11  
12 As discussed in SEIS Section 4.9.1.1.1, the applicant has conducted historic and cultural  
13 resource surveys and provided eligibility recommendations under criteria in 36 CFR 60.4(a)–(d)  
14 as part of prelicense application activities. To determine impacts, consultations involving NRC,  
15 the applicant, SD SHPO, BLM and EPA, and Native American tribes are being conducted as  
16 part of the NEPA review process. NRC also requires licensed facilities to submit a  
17 decommissioning plan for review, which will ensure compliance with Section 106 of the NHPA  
18 during the decommissioning phase.

19  
20 Sites listed or recommended as eligible for listing on the NRHP are presented in Table 4.9-1  
21 with an assessment of the expected impact on the properties for each proposed waste disposal  
22 method (see also, SEIS Section 4.9.1.1.1). With the exception of site CU02500002, impacts  
23 and recommended mitigation measures to ensure that these sites are not impacted by  
24 construction activities will be identical to those described in SEIS Section 4.9.1.1.1 for the Class  
25 V injection well disposal option. Site CU02500002 is a log barn structure located approximately  
26 76 m [250 ft] south of proposed land application areas in the Burdock area, and therefore,  
27 outside the area of impact. NRC recommends that a buffer zone and protective fencing be  
28 erected around the perimeter of the log barn structure to minimize impacts during construction.  
29 If avoidance is not possible, NRC recommends that the structure be mitigated through Historic  
30 American Buildings Survey (HABS) level documentation. Visual impacts for historic and cultural  
31 resources are the same as described in Section 4.9.1.1.1.

32  
33 As noted in SEIS Section 3.9.2.1, historic and ethnographic evidence indicate that sites with  
34 cairn features may have served as markers for trails, camps, burials, caches, and ceremonial  
35 centers for Native American tribes. Sites with burials or cairn features are listed in Table 4.9-2  
36 (see SEIS Section 4.9.1.1.1). Measures that should be employed in order to avoid or mitigate  
37 impacts to sites 39FA1902 (Euroamerican burial) and 39FA778 (Euroamerican farmstead) are  
38 described in SEIS Section 4.9.1.1.1. Cairn site 39CU3584 is located within a proposed land  
39 application area at the Dewey site. Site 39CU3584 was recommended as not eligible for listing  
40 in under Criterion D, due to a lack of diagnostic artifacts and intact cultural deposits. To date,  
41 preliminary information from the tribes regarding cairn and burial sites suggest that 39CU2584  
42 would be significant to tribes. Consultation with tribal representatives on the significance of this  
43 site and others is on-going. With the exception of 39CU2584, no other unevaluated cairn sites  
44 or those recommended as eligible for listing on the NRHP are located within proposed  
45 construction impact areas for the land application disposal option. If avoidance of these  
46 sites during the construction phase of the project is possible, impacts to these sites are  
47 not anticipated.

48  
49 Four unevaluated sites (39FA778, Areas 1, 6, and 8 at 39FA96, 39CU3624, and 39FA1920) are  
50 located within 76 m [250 ft] of proposed wellfields and plant facilities (see Table 4.9-3). To  
51 ensure these unevaluated sites not disturbed prior to evaluation, NRC staff recommend use of a

1 buffer zone and protective fencing around the perimeter of the sites prior to construction. If the  
2 sites cannot be avoided, NRC staff recommend evaluative testing to determine NRHP-eligibility  
3 and data recovery efforts.

4  
5 The NRC review is based on analyses of the historic and cultural resource investigations;  
6 a review of available literature; a search of records and collections maintained by the  
7 South Dakota Archaeological Research Center; and supplemental field investigations, including  
8 evaluative testing, and commitments made by the applicant to implement mitigation measures  
9 when sites will be affected. NRC staff conclude that the impacts to historic and cultural  
10 resources at the proposed Dewey-Burdock site under this alternative would range from SMALL  
11 to LARGE. This finding reflects that efforts to identify and evaluate properties of religious and  
12 cultural significance to tribes are incomplete and Section 106 consultation is ongoing (see SEIS  
13 Section 1.7.3.5 and Appendix A).

#### 14 15 4.9.1.2.2 Operations Impacts

16  
17 Only minimal impacts are expected from facility operation or maintenance on historic and  
18 cultural resources because impacts to these properties will be mitigated prior to  
19 facility construction. Visual impacts for historic properties are the same those as described in  
20 Section 4.9.1.1.1. If there is an inadvertent discovery of historic and cultural resources during  
21 routine maintenance activities, the Unexpected Discovery Plan committed to by the applicant  
22 will be implemented. For these reasons, the impacts to historic and cultural resources during  
23 the operations phase for the land application disposal option will be SMALL.

#### 24 25 4.9.1.2.3 Aquifer Restoration Impacts

26  
27 Aquifer restoration impacts to historic and cultural resources will be similar to, or less than, the  
28 impacts from operations. Impacts to these resources will have been mitigated prior to the  
29 construction phase of the proposed project. Historic and cultural resources encountered during  
30 aquifer restoration activities, will be dealt with under the applicant's Unexpected Discovery Plan  
31 will be implemented. Work at the immediate area would stop and proper notifications would be  
32 undertaken. Therefore, the impacts to historic and cultural resources during the aquifer  
33 restoration phase for the land application disposal option will be SMALL.

#### 34 35 36 4.9.1.2.4 Decommissioning Impacts

37  
38 Decommissioning and reclamation activities will focus on previously disturbed areas. Therefore,  
39 there will be minimal decommissioning impacts on historic and cultural resources. These sites  
40 would have been avoided from the construction phase through the decommissioning phase.  
41 Visual impacts for cultural resources are discussed in Section 4.9.1.1.1. If historic and cultural  
42 resources are encountered during decommissioning and reclamation activities, the Unexpected  
43 Discovery Plan will be implemented. Work would stop in the immediate area and proper  
44 notifications would be undertaken. Therefore, the impacts to historic and cultural resources  
45 during decommissioning for the land application disposal option will be SMALL.

#### 46 47 **4.9.1.3 Disposal Via Combination of Class V Injection and Land Application**

48  
49 If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is  
50 insufficient to dispose of all liquid wastes generated at the proposed Dewey-Burdock ISR

1 Project, the applicant has proposed to dispose of liquid waste by a combination of deep well  
2 disposal using Class V injection wells and land application (see SEIS Section 2.1.1.1.2.4.3). In  
3 order to implement the combined option, land application facilities and infrastructure will be  
4 constructed, operated, restored, and decommissioned on an as-needed basis, depending on  
5 the disposal capacity Class V injection wells (Powertech, 2011). Increased land disturbance  
6 and added access restrictions associated with the addition of irrigation areas and increased  
7 pond capacity for storage during nonirrigation periods will result in different environmental  
8 impacts for the combined option. Specifically, the potential environmental impacts of liquid  
9 waste disposal by land application for all phases of the ISR process will be greater than for  
10 liquid waste disposal by Class V injection wells (see SEIS Table 4.2.1). However, because only  
11 a portion of land application facilities and infrastructure (e.g., irrigation areas and storage ponds)  
12 will be constructed, operated, and decommissioned, the impacts to historic and cultural  
13 resources for the combined disposal option will be less than for the land application option, but  
14 greater than for the Class V injection well disposal option. Therefore, NRC staff conclude that  
15 the impacts on historic and cultural resources of the combined Class V injection well and land  
16 application disposal option for each phase of the proposed Dewey-Burdock ISR Project will be  
17 no greater than the impacts of the Class V injection well option and the land application option  
18 as summarized in Table 4.9-4.

19

20 **4.9.2 No-Action (Alternative 2)**

21

22 Under the No-Action alternative, no ISR facility will be constructed or operated at the proposed  
23 Dewey-Burdock ISR Project. Therefore, no historic properties would be affected by the No-  
24 Action alternative. The impacts associated with current land activities, such as, CBM extraction,  
25 oil and gas extraction, and cattle ranching would continue.

26

27 **4.10 Visual and Scenic Resources Impacts**

28

29 As discussed in GEIS Section 4.4.9, potential visual and scenic impacts from an ISR facility in  
30 the Nebraska-South Dakota-Wyoming Uranium Milling Region may occur during all phases of  
31 the ISR facility lifecycle. These impacts will come primarily from the use of equipment such as  
32 drill rigs; dust and other emissions from such equipment; construction of central and satellite  
33 plants and storage structures and site and wellfield access roads; land clearing and grading  
34 activities; and lighting for nighttime operations. Such impacts may be mitigated by rolling  
35 topography, the use of color considerations for structures, and dust suppression techniques.  
36 (NRC, 2009a)

37

**Table 4.9-4. Significance of Historic and Cultural Resources Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL to LARGE	SMALL to LARGE	SMALL to LARGE
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL	SMALL	SMALL
* Significance of impacts on historic and cultural resources for the combined disposal option is bounded by the significance of impacts on historic and cultural resources for the Class V injection well and land application disposal options.			

### GEIS Construction Phase Summary

Visual impacts during construction can result from the presence of equipment (e.g., drill rig masts, cranes), dust and diesel emissions from construction equipment, and hillside and roadside cuts. Depending on the location of an ISR facility relative to viewpoints, such as highways, facility construction and of drill rigs may be visible. For nighttime operations, the drill rigs will be lighted, thus creating a visual impact on elevated areas. Most impacts will be temporary as equipment is moved and will be mitigated by BMPs (e.g., dust suppression). Additionally, because these sites are located in sparsely populated areas with rolling topography, most visual impacts during construction will not be visible from more than about 1 km [0.6 mi]. Therefore, NRC staff concluded in the GEIS that visual and scenic impacts from operations will be SMALL. (NRC, 2009a)

### GEIS Operations Phase Summary

Visual impacts during operations will be less than those from construction because the wellfield surface infrastructure will have a low profile, and most piping and cables will be buried. The tallest structures will be expected to include the central processing plant {9 m [30 ft] in height} and power lines {6 m [20 ft] in height}. Because ISR sites are typically located in sparsely populated areas with generally rolling topography, most visual impacts during operations will be limited to a distance of not more than about 1 km [0.6 mi]. The irregular layout of wellfield surface structures, such as wellhead protection and header houses, will further reduce visual contrast. BMPs, design (e.g., painting buildings), and landscaping techniques will be used to mitigate potential visual impact. Therefore, NRC staff concluded in the GEIS that visual and scenic impacts from operations will be SMALL. (NRC, 2009a)

### GEIS Aquifer Restoration Phase Summary

Aquifer restoration activities will be expected to take place some years after the facility has been in operation, and restoration activities will use in-place infrastructure. As a result, potential visual impacts will be similar to those experienced during operations. Mitigation measures (e.g., dust suppression) may be used to further reduce visual and scenic impacts. Therefore, potential impacts from aquifer restoration will be SMALL. (NRC, 2009a)

### GEIS Decommissioning Phase Summary

Because similar equipment will be used and similar activities conducted, potential visual impacts during decommissioning will be similar to those experienced during construction. The greatest potential visual impacts during decommissioning will be temporary as equipment is moved from place to place and mitigated by BMPs (e.g., dust suppression). Additionally, visual impacts will be low, because these sites are expected to be located in sparsely populated areas of the Nebraska-South Dakota-Wyoming Uranium Milling Region, and the impacts will diminish as decommissioning activities decrease and disturbed surfaces become re-vegetated. NRC licensees are required to conduct final site decommissioning and reclamation under an approved site reclamation plan, with the goal of returning the landscape to preconstruction conditions. While some roadside cuts and hill slope modifications may persist beyond decommissioning and reclamation, NRC staff concluded in the GEIS that visual and scenic impacts from decommissioning will be SMALL. (NRC, 2009a)

1 Potential environmental impacts on visual and scenic resources from construction, operations,  
2 aquifer restoration, and decommissioning of the proposed Dewey-Burdock ISR Project are  
3 discussed in the following sections.

#### 4 5 **4.10.1 Proposed Action (Alternative 1)**

6  
7 The BLM Visual Resource Management (VRM) classification of landscapes (BLM, 1984, 1986)  
8 was considered in assessing the significance and management objectives of visual impacts. As  
9 described in GEIS Section 3.4.9, most of the landscape in the Nebraska-South Dakota-  
10 Wyoming Uranium Milling Region is identified as VRM Class III or Class IV (BLM, 2000). These  
11 classes are based on a combination of scenic quality, sensitivity levels, and distance zones  
12 (BLM, 1984, 1986). This classification allows for an activity to contrast with basic elements of  
13 the characteristic landscape to a moderate extent for a Class III designation or to a much  
14 greater extent for a Class IV designation.

15  
16 As described in SEIS Section 3.10, the applicant classified the project area and the 3.2-km  
17 [2-mi] area surrounding the project area as VRM Class IV (Powertech, 2009a). The objective of  
18 this class is to provide management for activities that might require major modifications of the  
19 existing character of the landscape (BLM, 1986). The level of change permitted for this class is  
20 the least restrictive and can be high. Some VRM Class II areas have been identified around  
21 Devil's Tower National Monument and BHNF along the Wyoming-South Dakota border (BLM,  
22 2000). VRM Class II allows an activity to contrast with basic elements of the characteristic  
23 landscape to a limited extent. However, these VRM Class II areas are more than 80 km [50 mi]  
24 from the proposed project area. As previously discussed, PSD Class I areas require more  
25 stringent air quality standards that can affect visual impacts (see SEIS Section 4.7). The  
26 nearest PSD Class I area is located at Wind Cave National Park, approximately 47 km [29 mi]  
27 east of the proposed Dewey-Burdock site. Other recreational areas in the broader region  
28 include Jewel Cave National Monument and Mount Rushmore National Memorial, managed by  
29 the U.S. Department of the Interior. These recreational areas are located approximately 37 km  
30 [23 mi] north and 71 km [44 mi] northeast of the proposed project, respectively (see  
31 Figure 3.2-2). In addition, the SDGFP-managed George S. Mickelson Trail parallels  
32 State Highway 89 between Custer, South Dakota, and U.S. Highway 18 connecting Edgemont  
33 to Hot Springs and comes within approximately 27 km [17 mi] of the proposed project area.

#### 34 35 **4.10.1.1 Disposal Via Class V Injection Wells**

36  
37 The applicant's preferred option for disposal of liquid wastes is deep well disposal via Class V  
38 injection wells (see SEIS Section 2.1.1.1.2.4). EPA is currently reviewing the applicant's UIC  
39 permit application for Class V injection wells. The applicant-proposed locations of the first four  
40 Class V injection wells are shown in Figure 2.1-10. Potential environmental impacts on visual  
41 and scenic resources for the Class V injection well disposal option are discussed in the  
42 following sections.

#### 43 44 **4.10.1.1.1 Construction Impacts**

45  
46 Visual impacts related to facilities construction at the proposed Dewey-Burdock ISR Project will  
47 include addition of access roads, overhead electrical lines, processing facilities (central  
48 processing plant and satellite facility buildings), storage ponds, wellhead covers, header  
49 houses, piping, and ancillary buildings (Powertech, 2009a). Additional visual impacts related to  
50 facilities construction associated with the Class V injection well disposal option will include the



1 construction of four to eight Class V injection wells. After construction, buildings will be  
2 constructed around the Class V injection wells to limit access (see SEIS Section 4.2.1.1.1).

3  
4 During construction, most impacts to visual resources at the proposed Dewey-Burdock site will  
5 result from well development, when drilling rig masts contrast with the general topography.  
6 Approximately 646 wells will be installed during initial wellfield development, and approximately  
7 406 wells will be installed annually over the operational life of the proposed project (Powertech,  
8 2010b). Multiple drill rigs will likely be operating during wellfield construction. In addition, four to  
9 eight Class V deep injection wells will be drilled and developed for liquid waste disposal. Visual  
10 impacts from drilling activities will be temporary. Once a well is completed and conditioned for  
11 use, the drill rig will be moved to a new location to drill the next hole. In the wellfields, wellheads  
12 will be covered to prevent freezing and protect the wells. These covers will be low structures  
13 {1–2 m [3–6 ft] high} and will present only a slight contrast to the existing landscape. Unless the  
14 topography is extremely flat and void of vegetation, these structures will not be visible from  
15 distances of 1 km [0.6 mi] or more.

16  
17 Visual and scenic impacts from land disturbance associated with facilities construction at the  
18 proposed Dewey-Burdock site will be short term (1 to 2 years; see Figure 2.1-1). The applicant  
19 has indicated that temporary impacted areas will be reclaimed after construction is complete  
20 and debris created during construction will be removed as soon as possible (Powertech,  
21 2009a). Roads and structures will be more long lasting, but will be removed and reclaimed after  
22 operations cease. The applicant proposes to minimize the potential impacts to visual and  
23 scenic resources by selecting building materials and paint that complement the natural  
24 environment (Powertech, 2009a). Construction and placement of structures and roads will  
25 consider the landscape topography to conceal wellheads, plant facilities, access roads, and  
26 areas of disturbance from public vantage points. Standard dust control measures (e.g., water  
27 application, speed limits, and coordinating dust-producing activities) will be implemented to  
28 reduce visual impacts from fugitive dust (Powertech, 2009a). The applicant is also considering  
29 other measures to mitigate the potential visual and scenic resource impacts, including using  
30 exterior lighting only where needed to accomplish facility tasks, limiting the height of exterior  
31 lighting units, and using shielded or directional lighting to limit lighting only to areas where it is  
32 needed (Powertech, 2009a).

33  
34 As discussed previously, the proposed project site is located more than 16 km [10 mi] from the  
35 PSD Class I area at Wind Cave National Park, VRM Class II regions, and other recreational  
36 areas in the surrounding region. Therefore, the visual and scenic impacts associated with ISR  
37 construction at the proposed project will be consistent with the predominant VRM Class III and  
38 IV designations for the Nebraska-South Dakota-Wyoming Milling Region (BLM, 2000; NRC,  
39 2009a). Based on the remote location of the proposed project site, the short-term nature of the  
40 construction activities, and the mitigation measures that will be used to reduce potential visual  
41 and scenic impacts, the NRC staff conclude that visual and scenic impacts from ISR facilities  
42 and equipment during construction activities for the Class V injection well disposal option will  
43 be SMALL.

#### 44 4.10.1.1.2 Operations Impacts

45  
46  
47 Most of the pipes and cables associated with wellfield operations at the Dewey-Burdock ISR  
48 Project will be buried at least 1.5 m [5 ft] below grade to protect them from freezing, and they  
49 will not be visible during operations (Powertech, 2009a). The applicant will sequentially  
50 phase in wellfields as the uranium reserves are defined (Powertech, 2009a); therefore, there

1 will not be a large expanse of land undergoing development at one time. Because wellhead  
2 covers will typically be low {1–2 m [3–6 ft]} structures and there is no active drilling in operating  
3 wellfields, the overall visual impact of an operating wellfield will be the same as or less than  
4 from construction.

5  
6 The central processing plant, satellite facility, header houses, Class V injection well buildings,  
7 access roads, and overhead powerlines at the project will be the main operational facilities and  
8 infrastructure affecting the visual landscape. The visibility of aboveground facilities and  
9 infrastructure will depend on the location of the observer, intervening topography, and distance.  
10 The construction and placement of aboveground structures will consider the topography to  
11 conceal plant facilities, infrastructure, and roads from public vantage points (Powertech, 2009a).  
12 In addition, building materials and paint will be selected to complement the natural environment.  
13 As discussed in SEIS Section 4.7, standard dust control measures (e.g., water application and  
14 speed limits) will be implemented, which will reduce visual impacts from fugitive dust during  
15 operations activities (Powertech, 2009a).

16  
17 The proposed project site is located more than 16 km [10 mi] from the PSD Class I area at Wind  
18 Cave National Park, VRM Class II regions, and recreational areas in the surrounding region.  
19 Therefore, the visual impacts associated with operations will be consistent with the predominant  
20 VRM Classes III and IV for the region (BLM, 2000; NRC, 2009a). Because construction of  
21 aboveground structures will consider topography to conceal plant facilities and infrastructure  
22 and mitigation measures (e.g., water application to control fugitive dust) will be implemented to  
23 reduce impacts to visual and scenic resources, NRC staff conclude that the visual and scenic  
24 impacts from operations for the Class V injection well disposal option will be SMALL.

#### 25 26 4.10.1.1.3 Aquifer Restoration Impacts

27  
28 Much of the same equipment and infrastructure used during the operational period of the project  
29 will be employed during aquifer restoration, so impacts to the visual landscape will be similar to  
30 those during operations. Because there is no active drilling, potential visual impacts during  
31 aquifer restoration are expected to be less than those during construction and of short duration.  
32 As with construction and operations, the visual impacts associated with aquifer restoration will  
33 be consistent with the predominant VRM Classes III and IV for the region (BLM, 2000; NRC,  
34 2009a). No modifications to either scenery or topography will occur during restoration.  
35 Standard dust control measures (e.g., water application and speed limits) will be implemented to  
36 further reduce the overall visual and scenic impacts of aquifer restoration (Powertech, 2009a).  
37 Therefore, NRC staff conclude that the visual and scenic impacts from aquifer restoration for the  
38 Class V injection well disposal option will be SMALL.

#### 39 40 4.10.1.1.4 Decommissioning Impacts

41  
42 When project operations and aquifer restoration are complete at the proposed Dewey-Burdock  
43 site, the applicant will return all lands disturbed by the ISR facility to their preoperational land  
44 use of livestock grazing and wildlife habitat unless the state justifies and approves an alternative  
45 use (e.g., the landowner may request to retain structures and roads for further use) (Powertech,  
46 2009a). Reclamation will return the landscape to baseline contours and will reduce the visual  
47 impact by removing buildings and associated infrastructure. After reclamation activities are  
48 completed, there will be no restrictions on surface use. Prior to final site decommissioning, the  
49 applicant will submit a decommissioning plan to NRC, in accordance with 10 CFR Part 40.

50

1 During decommissioning and reclamation activities, temporary impacts to the visual  
2 environment will be similar to or less than those during the construction phase. Equipment used  
3 to dismantle buildings and milling equipment, remove any contaminated soils, or grade the  
4 surface as part of reclamation activities will generate temporary visual contrasts. In the  
5 wellfields, the greatest source of visual contrast will be from equipment used when production,  
6 injection, and monitor wells are plugged and abandoned. Temporary visual contrasts  
7 associated with the Class V injection well disposal option will include the dismantling of  
8 buildings housing the Class V injection wells and the plugging and abandonment of the wells.  
9 Visual and scenic resources may be affected by fugitive dust emissions from decommissioning  
10 activities. The applicant will implement dust suppression measures (e.g., water application and  
11 speed limits) to reduce dust emissions (Powertech, 2009a). Once decommissioning and  
12 reclamation activities are complete, the visual landscape will be returned to baseline conditions,  
13 with the potential exception of equipment related to longer term monitoring activities. Therefore,  
14 the NRC staff conclude that the visual and scenic impacts from decommissioning for the  
15 Class V injection well disposal option will be SMALL.

16

#### 17 **4.10.1.2 Disposal Via Land Application**

18

19 If a permit for Class V injection wells cannot be obtained from EPA, the applicant will dispose of  
20 liquid waste generated at the proposed Dewey-Burdock ISR Project by land application (see  
21 SEIS Section 2.1.1.1.2.4.2). The locations of land application areas for this disposal option are  
22 shown in Figure 2.1-12. Potential environmental impacts on visual and scenic resources during  
23 construction, operations, aquifer restoration, and decommissioning for the land application  
24 option are discussed in the following sections.

25

##### 26 **4.10.1.2.1 Construction Impacts**

27

28 As with the Class V injection well disposal option, visual impacts related to facilities construction  
29 for the land application option at the proposed Dewey-Burdock ISR Project will include addition  
30 of access roads, overhead electrical lines, processing facilities (central processing plant and  
31 satellite facility buildings), storage ponds, wellhead covers, header houses, piping, and ancillary  
32 buildings (Powertech, 2009a). Additional visual impacts related to facilities construction for the  
33 land application option will include the addition of center pivot irrigation systems in land  
34 application areas. As described in SEIS Section 2.1.1.1.2.4.2, the Dewey area will contain five  
35 20-ha [50-ac] pivots, four 10-ha [25-ac] pivots, and one 6-ha [15-ac] pivot and the Burdock area  
36 will contain six 20-ha [50-ac] pivots, two 10-ha [25-ac] pivots, and two 6-ha [15-ac] pivots.

37

38 Similar to the Class V injection well disposal option, visual and scenic impacts associated with  
39 facilities construction for the land application option at the proposed site will be short term  
40 (1 to 2 years) and minimized by mitigation measures. Applicant-proposed mitigation  
41 measures to reduce visual impacts include (i) reclaiming temporary impacted areas after  
42 construction and removing debris; (ii) removing and reclaiming roads and structures after  
43 operations cease; (iii) selecting building materials and paint that complement the natural  
44 environment; (iv) considering landscape topography to conceal wellheads, plant facilities,  
45 access roads, and center pivot irrigation systems; and (v) implementing standard dust  
46 suppression techniques to reduce visual impacts of fugitive dust (Powertech, 2009a). The  
47 applicant is also considering other measures to mitigate the potential visual and scenic resource  
48 impacts, including using exterior lighting only where needed to accomplish facility task, limiting  
49 the height of exterior lighting units, and using shielded or directional lighting to limit lighting only  
50 to areas where it is needed (Powertech, 2009a).

1 During construction of facilities and infrastructure for the land application option, most impacts to  
2 visual resources at the proposed site will result from development of wellfields (as described in  
3 SEIS Section 4.10.1.1.1 for the Class V injection well disposal option) and the placement of  
4 center pivot irrigation systems. Visual impacts of center pivot irrigation systems will last over the  
5 life of proposed project. Center pivot irrigation systems will not be visible to individuals on  
6 heavily traveled public roadways in the area (e.g., U.S. Highway 18 and State Highway 89).  
7 However, proposed land application areas in the Dewey area are within 1 km [0.6 mi] of  
8 Dewey Road (see Figure 2.1-12), and therefore center pivots in the Dewey area will be visible to  
9 travelers along Dewey Road.

10  
11 As discussed previously, the proposed Dewey-Burdock site is located more than 16 km [10 mi]  
12 from the PSD Class I area at Wind Cave National Park, VRM Class II regions, and other  
13 recreational areas in the surrounding region. Therefore, the visual and scenic impacts  
14 associated with ISR construction at the proposed project will be consistent with the predominant  
15 VRM Class III and IV designations for the Nebraska-South Dakota-Wyoming Milling Region  
16 (BLM, 2000; NRC, 2009a). Center pivot irrigation systems in proposed land application areas in  
17 the Dewey area will be visible to travelers on Dewey Road; however, Dewey Road is a lightly  
18 traveled county road with few residences. In 2009, the estimated average daily traffic count on  
19 Dewey Road was 25 vehicles (BLM, 2009). Based on the remote location of the proposed  
20 project site, the short-term nature of the construction activities, and the mitigation measures that  
21 will be used to reduce potential visual and scenic impacts, the NRC staff conclude that visual  
22 and scenic impacts from ISR construction activities for the land application disposal option will  
23 be SMALL.

#### 24 25 4.10.1.2.2 Operations Impacts

26  
27 For the land application liquid waste disposal option, the central processing plant, satellite  
28 facility, header houses, access roads, overhead powerlines, and center pivot irrigation  
29 systems will be the main operational facilities and infrastructure affecting the visual landscape at  
30 the proposed site. As with the Class V injection well disposal option, most of the pipes and  
31 cables associated with wellfield operations at the project will be buried at least 1.5 m [5 ft] below  
32 grade to protect them from freezing, and they will not be visible during operations (Powertech,  
33 2009a). The applicant proposes to sequentially phase in wellfields as the uranium reserves are  
34 defined (Powertech, 2009a); therefore, there will not be a large expanse of land undergoing  
35 development at one time. Because wellhead covers will typically be low {1–2 m [3–6 ft]}  
36 structures and there is no active drilling in operating wellfields, the overall visual impact of an  
37 operating wellfield will be the same as or less than from construction. As noted in the previous  
38 section, center pivot irrigation systems will not be visible to individuals on heavily traveled public  
39 roadways in the area (e.g., U.S. Highway 18 and State Highway 89). However, due to the  
40 proximity of proposed land application areas in the Dewey area to Dewey Road, center pivots  
41 will be visible to travelers along Dewey Road (see Figure 2.1-12). As noted in the previous  
42 section, Dewey Road is a lightly traveled county road with few residences. In 2009, the  
43 estimated average daily traffic count on Dewey Road was 25 vehicles (BLM, 2009).

44  
45 The visibility of aboveground facilities and infrastructure will depend on the location of the  
46 observer, intervening topography, and distance. The construction and placement of  
47 aboveground structures will consider the topography to conceal plant facilities, infrastructure,  
48 center pivots in potential land application areas, and roads from public vantage points  
49 (Powertech, 2009a). In addition, building materials and paint will be selected to complement the  
50 natural environment. As discussed in SEIS Section 4.7, standard dust control measures

1 (e.g., water application and speed limits) will be implemented, which will reduce visual impacts  
2 from fugitive dust during operations activities (Powertech, 2009a).

3  
4 The proposed Dewey-Burdock site is located more than 16 km [10 mi] from the PSD Class I  
5 area at Wind Cave National Park, VRM Class II regions, and recreational areas in the  
6 surrounding region. Therefore, the visual impacts associated with operations will be consistent  
7 with the predominant VRM Classes III and IV for the region (BLM, 2000; NRC, 2009a). Center  
8 pivot irrigation systems in proposed land application areas in the Dewey area will be visible to  
9 travelers on Dewey Road; however, Dewey Road is a lightly traveled county road with few  
10 residences. Based on the remote location of the project site, the use of topography to conceal  
11 plant facilities and infrastructure, and mitigation measures (e.g., water application to control  
12 fugitive dust) that will be implemented to reduce impacts to visual and scenic resources, NRC  
13 staff conclude that the visual and scenic impacts from operations for the land application  
14 disposal option will be SMALL.

#### 15 16 4.10.1.2.3 Aquifer Restoration Impacts

17  
18 Much of the same equipment and infrastructure used during the operational period of the project  
19 will be employed during aquifer restoration, so impacts to the visual landscape would be similar  
20 to those during operations. Because there is no active drilling, potential visual impacts during  
21 aquifer restoration are expected to be less than those during construction and of short duration.  
22 As with construction and operations, the visual impacts associated with aquifer restoration will  
23 be consistent with the predominant VRM Classes III and IV for the region (BLM, 2000; NRC,  
24 2009a). Neither scenery nor topography will be modified during restoration. Standard dust  
25 control measures (e.g., water application and speed limits) will be implemented to further reduce  
26 the overall visual and scenic impacts of aquifer restoration (Powertech, 2009a). Therefore,  
27 NRC staff conclude that the visual and scenic impacts from aquifer restoration for the land  
28 application disposal option will be SMALL.

#### 29 30 4.10.1.2.4 Decommissioning Impacts

31  
32 Prior to final site decommissioning, the applicant will submit a decommissioning plan to NRC, in  
33 accordance with 10 CFR Part 40. During decommissioning and reclamation, temporary impacts  
34 to the visual environment will be similar to or less than those during the construction phase.  
35 Equipment used to dismantle buildings and milling equipment, remove any contaminated soils,  
36 or grade the surface as part of reclamation activities will generate temporary visual contrasts. In  
37 the wellfields, the greatest source of visual contrast will be from equipment used when  
38 production, injection, and monitor wells are plugged and abandoned. Temporary visual  
39 contrasts associated with the land application disposal option will include the dismantling and  
40 removal of center pivot irrigation systems in land application areas. Visual and scenic resources  
41 may be affected by fugitive dust emissions from decommissioning activities. The applicant will  
42 implement dust suppression measures (e.g., water application and speed limits) to reduce dust  
43 emissions (Powertech, 2009a). Once decommissioning and reclamation activities are complete,  
44 the visual landscape will be returned to baseline conditions, with the potential exception of  
45 equipment related to longer term monitoring activities. Therefore, the NRC staff conclude that  
46 the visual and scenic impacts from decommissioning for the land application disposal option will  
47 be SMALL.

**4.10.1.3 Disposal Via Combination of Class V Injection and Land Application**

If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is insufficient to dispose of all liquid wastes generated at the proposed Dewey-Burdock ISR Project, the applicant will dispose of liquid waste by a combination of Class V deep injection wells and land application (see SEIS Section 2.1.1.1.2.4.3). For the combined Class V injection well and land application disposal option, land application facilities and infrastructure will be constructed, operated, restored, and decommissioned on an as-needed basis depending on the Class V injection well disposal capacity (Powertech, 2011). Because of the placement of center pivot irrigation systems in proposed land application areas, the potential visual impacts of liquid waste disposal by land application for all phases of the ISR process will be greater than for liquid waste disposal by Class V well injection (see SEIS Section 4.10.1.2). Furthermore, because only a portion of the center pivot irrigation systems will be constructed, operated, and decommissioned for the combined disposal option, the significance of visual impacts for the combined disposal option will be less than for the land application option. Therefore, NRC staff conclude that visual and scenic impacts of the combined Class V injection well and land application disposal option for each phase of the proposed will be bounded by the significance of visual and scenic impacts of the Class V injection well option and the land application option as summarized in Table 4.10.1.

**4.10.2 No Action (Alternative 2)**

Under the No-Action alternative, no ISR facility will be constructed and there will be no change to the existing visual and scenic resources at the proposed Dewey-Burdock Project site. No additional structures or uses associated with the proposed project will be introduced from the proposed action to affect the existing viewsapes, and the existing scenic quality will remain unchanged (BLM VRM Classes III and IV, as defined in SEIS Section 3.10). Natural resource exploration activities and cattle grazing will continue in the area.

**4.11 Socioeconomics Impacts**

Socioeconomic impacts are defined in terms of changes to the demographic and economic characteristics and social conditions of a region. For example, the number of jobs created by a proposed action could affect regional employment, income, and expenditures. Job creation is characterized by two types: (i) construction-related jobs, which are transient, short in duration, and less likely to have a long-term socioeconomic impact on the region and (ii) operation-related jobs in support of facility operations, which have a greater potential for permanent, long-term socioeconomic impacts in a region.

**Table 4.10-1. Significance of Visual and Scenic Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL	SMALL	SMALL
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.			

1 GEIS Section 4.4.10 describes the socioeconomic impacts expected during the ISR facility  
2 lifecycle (NRC, 2009a). Potential environmental impacts to socioeconomics could occur during  
3 all phases of the facility's lifecycle. The GEIS socioeconomic analysis for the Nebraska-South  
4 Dakota-Wyoming Uranium Milling Region was based on 2000 U.S. Census Bureau (USCB)  
5 data. The socioeconomic analysis presented in this SEIS for the proposed Dewey-Burdock  
6 Project Region of Influence (ROI) is based on 2010 USCB data. Though specific numbers will  
7 differ between the 2000 and 2010 USCB data, the NRC analysis of socioeconomics presented  
8 in GEIS Section 4.4.10 remains valid for the proposed Dewey-Burdock ISR Project as explained  
9 in the following sections and expected impacts will be similar in scale to NRC staff conclusions  
10 in the GEIS.

#### 11 12 **4.11.1 Proposed Action (Alternative 1)**

13  
14 As discussed in SEIS Section 3.11, the analysis for the proposed action focuses on the impacts  
15 of constructing, operating, restoring the aquifer, and decommissioning the proposed ISR facility  
16 in Custer and Fall River Counties in South Dakota and Weston County in Wyoming. The  
17 applicant expects to directly employ 86 workers during construction and 84 workers during  
18 operations of the proposed project (Powertech, 2009a). A smaller number of workers are  
19 expected to be involved in aquifer restoration and decommissioning activities (Powertech,  
20 2010a). The applicant expects nine workers to be directly involved in aquifer restoration  
21 activities and nine workers to be directly involved in decommissioning activities. The workforce  
22 for each phase of the proposed Dewey-Burdock ISR Project is not expected to change in  
23 number or skill level based on the liquid waste disposal option that the applicant will ultimately  
24 implement (Powertech, 2009a, 2010a). In other words, the number of skilled and unskilled  
25 workers required for construction, operations, aquifer restoration, and decommissioning for the  
26 Class V injection well disposal option, the land application disposal option, or the combined  
27 Class V injection well and land application disposal option will be the same. Therefore, NRC  
28 staff conclude that the demands of the workforce on existing public and social services,  
29 housing, and infrastructure (schools, utilities, local finance) will be similar regardless of the liquid  
30 waste disposal option the applicant implements. Socioeconomic impacts from construction,  
31 operations, aquifer restoration, and decommissioning of the proposed Dewey-Burdock ISR  
32 Project are discussed in the following sections.

##### 33 34 **4.11.1.1 Construction Impacts**

35  
36 In GEIS Section 4.4.10.1, NRC staff discussed the potential impacts to socioeconomics from  
37 construction of an ISR facility. These impacts will result predominantly from employment at an  
38 ISR facility and demands on the existing public and social services, tourism/recreation, housing,  
39 infrastructure (schools, utilities), and the local workforce. In the GEIS, NRC staff estimated total  
40 peak construction employment at an ISR facility to be about 200 people, including company  
41 employees and local contractors. During surface facility and wellfield construction, local  
42 contractors will generally be used (e.g., drillers, construction workers), as available, and local  
43 building materials and building supplies will be used to the extent practical. NRC staff also  
44 estimated an additional 140 indirect jobs may be created to support the construction of an ISR  
45 facility. Indirect jobs represent employees hired by producers of materials, equipment, and  
46 services that are used on the project. (NRC, 2009a)

47  
48 In the GEIS, NRC staff assumed that most construction workers will choose to live in larger  
49 communities with access to more services. However, NRC staff expected that some  
50 construction workers will commute from outside the county to the construction site and that

1 skilled employees (e.g., engineers, accountants, managers) will come from outside the local  
2 workforce. The potential also exists that some of these employees will temporarily relocate to  
3 the proposed project area and contribute to the local economy through purchasing goods and  
4 services and through paying taxes. Depending on where the workforce and supplies come  
5 from, the GEIS determined that potential impacts to towns and communities, in terms of housing  
6 and employment structure, may be SMALL to MODERATE. Given the expected short duration  
7 of construction activities (12 to 18 months), families are not expected to relocate closer to the  
8 site. For this reason, potential impacts to education and use of local services was determined to  
9 be SMALL. (NRC, 2009a)

10  
11 Construction of the proposed Dewey-Burdock ISR Project is expected to last for 2 years (see  
12 Figure 2.1-1) and employ 86 people (Powertech, 2009a). In addition, 45 indirect jobs are  
13 expected to be created to support construction of the proposed project (Powertech, 2009a).  
14 Based on the smaller number of required construction workers for the proposed project  
15 (86 workers) when compared to the ISR construction workforce estimated in the GEIS  
16 (200 workers), the NRC staff conclude that the site-specific impacts of constructing the  
17 proposed project will be smaller than the impacts described in the GEIS.

18  
19 Because of the small relative size of the ISR construction workforce, the overall potential  
20 impacts to socioeconomics from construction of the proposed Dewey-Burdock ISR Project will  
21 be SMALL. The following subsections describe the construction impacts related to  
22 demographics, income, housing, employment rate, local finance, education, and health and  
23 social services for the proposed project.

#### 24 25 4.11.1.1.1 Demographics

26  
27 A workforce of 86 employees engaged directly in construction activities is expected during the  
28 construction phase of the Dewey-Burdock ISR Project (Powertech, 2009a). An additional  
29 45 indirect jobs are expected to be created to support construction activities for a total of  
30 131 people (Powertech, 2009a). Construction of the buildings, initial wellfields, and waste  
31 disposal systems for the proposed project is anticipated to take 2 years (see Figure 2.1-1).  
32 Construction workers are likely to locate in nearby communities such as Edgemont and Hot  
33 Springs in Fall River County, Custer in Custer County, and Newcastle in Weston County.  
34 Based on housing data presented in SEIS Section 3.11.3, all of the counties have available  
35 housing to manage increases in population. Likewise, based on school enrollment and  
36 student-teacher ratio data presented in SEIS Section 3.11.6, schools have available capacities  
37 to manage increases in population. Furthermore, as described in SEIS Section 3.11.7,  
38 surrounding communities have adequate health and social services to serve increases in  
39 population. Due to the short duration of construction, the expected 86 construction workers and  
40 45 supporting personnel will have a short-term impact on public services and community  
41 infrastructure in surrounding communities.

42  
43 Increases in population will have the greatest impact on small communities close to the  
44 proposed project site, such as Edgemont (population 774). The construction workforce will be  
45 made up predominantly of skilled trades (e.g., carpenters, electricians, welders, plumbers) and  
46 unskilled workers sourced from nearby communities and counties. The applicant  
47 will preferentially source the labor force for construction from within the surrounding region  
48 to mitigate any burden on public services and community infrastructure in the nearby towns  
49 (Powertech, 2009a). Further, due to the short duration of construction (2 years maximum),  
50 construction workers with families will be less likely to relocate their entire families to the region,  
51 thus minimizing impacts from an outside workforce. Therefore, the NRC staff conclude that the



1 impacts to demographics on nearby communities such as Edgemont, Custer, Hot Springs, and  
2 Newcastle during the construction phase will be SMALL.

#### 3 4 4.11.1.1.2 Income

5  
6 The applicant has estimated a construction workforce of 86 employees (Powertech, 2009a).  
7 Construction of the proposed project will preferentially draw upon the labor force within the  
8 region before going outside the region (Powertech, 2009a). Construction workers will likely  
9 come from nearby communities such as Edgemont, Hot Springs, and Custer in Custer and  
10 Fall River Counties and from Newcastle in Weston County, Wyoming. As noted previously, the  
11 construction workforce will be made up predominantly of skilled trades and unskilled workers. It  
12 is expected that the construction workforce will be paid at rates typical of the region. Income  
13 information including median household income and per capita income for Fall River, Custer,  
14 and Weston Counties is presented in SEIS Section 3.11.2. Because the construction workforce  
15 will be paid at rates typical of the region, the NRC staff conclude that the overall impacts to  
16 income during the construction phase of the proposed project will be SMALL.

#### 17 18 4.11.1.1.3 Housing

19  
20 The number of construction workers will cause a short-term increase in the demand of  
21 temporary (rental) housing units in Fall River, Custer, and Weston Counties. Based on 2010  
22 USCB housing information, the vacancy rate is 21.9 percent (919 vacant units) in Fall River  
23 County, 21.4 percent (992 vacant units) in Custer County, and 14.5 percent (512 vacant units)  
24 in Weston County (see SEIS Section 3.11.3). Hence, any changes in employment will have  
25 little to no noticeable effect on the availability of housing in Custer, Fall River, and Weston  
26 Counties. Due to the short duration of construction activities (2 years), the number of  
27 construction workers (86 workers), and the availability of housing in the region, there will be little  
28 or no employment-related housing impacts. Therefore, the impact of the proposed action on  
29 housing availability will be SMALL.

#### 30 31 4.11.1.1.4 Employment Structure

32  
33 Construction of the proposed Dewey-Burdock ISR Project will create employment opportunities  
34 for 86 construction workers, with the potential of up to 45 jobs being generated to support this  
35 activity in the local economy. As described in SEIS Section 3.11.4, total 2012 county labor  
36 forces were estimated to be 3,660 for Fall River County, 4,390 for Custer County, and 3,308 for  
37 Weston County (SDDOL, 2012; WDWS, 2012). Unemployment rates in 2012 were 4.7, 4.0, and  
38 5.1 percent in Fall River, Custer, and Weston Counties, respectively (SDDOL, 2012; WDWS,  
39 2012). Because of the short duration (2 years) and small size of the construction workforce  
40 (86 workers), the effect on employment in the region will be SMALL.

#### 41 42 4.11.1.1.5 Local Finance

43  
44 Construction of the proposed ISR facility at the Dewey-Burdock ISR Project site will generate  
45 some tax revenue in the local economy through the purchase of goods and services as well as  
46 contribute to increased county and state tax revenues through an increased tax base. As  
47 described in SEIS Section 3.11.5, towns in South Dakota may impose up to a 1 percent sales  
48 and use tax on various sales including lodging, restaurant meals, alcoholic beverages, and  
49 admissions to places of entertainment and up to a 2 percent sales and use tax on all products  
50 and services subject to the state sales or use tax (SDDRR, 2011). Sales and use tax revenues

1 totaled \$165 million for Custer County and \$134 million for Fall River County in 2011 (SDDRR,  
2 2012). Weston County has a 5 percent sales and use tax (4 percent state base tax and a  
3 1 percent optional county tax) and a 4 percent lodging tax (Wyoming Department of Revenue,  
4 2010). Sales and use tax revenues totaled \$11.2 million for Weston County in 2011. Smaller  
5 towns, such as Edgemont, experiencing increased population/public service demand may not  
6 receive a proportionate level of tax increase, because sales tax revenue is more likely to  
7 increase in larger communities, such as Custer and Hot Springs. Because of the short duration  
8 of construction (2 years) and small size of the construction workforce (86 workers) in relation to  
9 the total labor forces in Fall River, Custer, and Weston Counties (see previous section),  
10 construction of the proposed ISR facility at the Dewey-Burdock site will have a SMALL impact  
11 on local finances.

#### 12 13 4.11.1.1.6 Education

14  
15 If the construction workforce for the Dewey-Burdock ISR Project and their families secure local  
16 housing, an increased demand for schools will occur. However, construction workers are less  
17 likely to relocate their entire families to the region, especially given the relative short duration  
18 (2 years) of construction activities. Based on school enrollment and student-teacher ratio data  
19 presented in SEIS Section 3.11.6, school districts have available capacities to manage  
20 increases in school-aged children relocating to the area. The NRC staff concludes that the  
21 overall impacts on educational services during the construction phase of the proposed project  
22 will be SMALL.

#### 23 24 4.11.1.1.7 Health and Social Services

25  
26 The construction workforce is expected to cause only a small short-term increase in the demand  
27 for doctors, hospitals, social services, and police during the construction phase of the proposed  
28 Dewey-Burdock ISR Project. Due to the short duration of construction (2 years maximum),  
29 construction workers with families will be less likely to relocate their entire families to the region,  
30 thus minimizing impacts on health and social services. As presented in SEIS Section 3.11.7,  
31 towns surrounding the proposed project have adequate medical facilities; social services; and  
32 police, fire, and emergency medical services to accommodate workers and their families. Local  
33 governments are expected to have the capacity to effectively plan for and manage the  
34 increased demands on health and social services because population increases will be small  
35 (86 construction workers). Therefore, impacts to health and social services during the  
36 construction phase of the proposed project will be SMALL.

#### 37 38 4.11.1.2 Operations Impacts

39  
40 GEIS Section 4.4.10.2 describes employment levels during ISR facility operations and assumes  
41 50 to 80 workers will support this phase of the ISR lifecycle. Use of local contract workers and  
42 local building materials will diminish, because drilling and facility construction will diminish.  
43 Revenues will be generated from federal, state, and local taxes on the facility and the uranium  
44 produced. Employment types are expected to be more technical during operations, and as a  
45 result, the majority of the operational workforce is expected to be staffed from outside the  
46 region, particularly during initial operations. According to the GEIS, effects on community  
47 services (e.g., education, health care, utilities, shopping, and recreation) during facility  
48 operations will be similar to effects experienced during construction, except fewer people will be  
49 employed for a longer duration. Overall, NRC staff determined in the GEIS that potential  
50 impacts to socioeconomics from operations will be SMALL to MODERATE. (NRC, 2009a)

51

1 The operations phase of the proposed Dewey-Burdock ISR Project is expected to last for  
2 8 years and employ 84 workers (Powertech, 2009a). In addition, 36 indirect jobs are expected  
3 to be created to support operations of the proposed project (Powertech, 2009a). The operations  
4 phase will impact the local economy through creating jobs, purchasing local goods and services,  
5 and increasing county and state tax revenues. Severance tax on the uranium extracted will also  
6 be collected at the state level and would contribute to the State of South Dakota general fund.  
7 Because the anticipated size of the ISR operations workforce (84 payroll employees) is only  
8 slightly larger than the 50 to 80 employees analyzed in the GEIS, the NRC staff conclude that  
9 the site-specific impacts of operating the proposed project will be comparable to the impacts  
10 described in the GEIS. The following subsections describe the operations impacts related to  
11 demographics, income, housing, employment rate, local finance, education, and health and  
12 social services.

13

#### 14 4.11.1.2.1 Demographics

15

16 A peak workforce of 84 employees engaged directly in operations activities will be expected  
17 during the operations phase of the proposed Dewey-Burdock ISR Project (Powertech, 2009a).  
18 Although about equal to the construction workforce (86 employees), the operations workforce is  
19 expected to stay in the area longer (approximately 8 years) and so will be more likely to secure  
20 permanent or semi-permanent housing in the area than the construction workforce. The  
21 operations phase will require a number of specialized workers, such as plant managers,  
22 technical professionals, and skilled tradesmen. As described in GEIS Section 4.4.10.2,  
23 because of the highly technical nature of ISR operations (requiring professionals in the areas of  
24 health physics, chemistry, laboratory analysis, geology and hydrogeology, and engineering), the  
25 majority (approximately 70 percent) of the workforce during operations is expected to be staffed  
26 from outside the region (NRC, 2009a). Therefore, up to 59 personnel (86 employees × 0.7) for  
27 the operations phase of the proposed project could be sourced from outside the local area. The  
28 remaining workforce will most likely come from the local labor pool. The increase in population  
29 during the operations phase will spur additional job creation to serve the larger population. The  
30 applicant has estimated that an additional 36 indirect jobs are expected during the operations  
31 phase of the project (Powertech, 2009a).

32

33 Because of the small size of the operations workforce (84 workers) and the potential addition  
34 of 36 (indirect) workers in support of facility operations, demographic conditions in Custer,  
35 Fall River, and Weston Counties are not likely to change. The combined effect of 84 to  
36 120 new jobs in the region (assuming that all of the direct and indirect workers will relocate to  
37 the ROI) constitutes less than 1 percent of the current combined civilian labor force in Custer,  
38 Fall River, and Weston Counties (see SEIS Section 3.11.4). Therefore, the impact on  
39 demographic conditions will be SMALL.

40

#### 41 4.11.1.2.2 Income

42

43 Operations at the proposed project will create skilled positions such as project managers, plant  
44 operators, lab technicians, and drilling contractors. These skilled workers will command salaries  
45 that provide income levels equal to or higher than the average local and statewide income  
46 levels. The total annual payroll for the proposed project is estimated at \$5,600,000 (Powertech,  
47 2009a). The average annual salary for all full-time employees would be roughly \$66,700. This  
48 is more than the South Dakota median household income of \$46,369 and the Wyoming median  
49 household income of \$53,802 (see SEIS Section 3.11.2). This is also above the Fall River  
50 County median household income of \$35,833, the Custer County median household income

1 of \$46,743, and the Weston County median household income of \$53,853 (see SEIS  
2 Section 3.11.2). Therefore, the proposed project will have a positive effect on local average  
3 annual incomes during ISR facility operations. However, because the operations workforce  
4 (84 workers) is small in comparison to the combined labor force in Custer, Fall River, and  
5 Weston Counties (see SEIS Section 3.11.4), overall impacts to local income during ISR facility  
6 operations will be SMALL.

#### 7 8 4.11.1.2.3 Housing

9  
10 Housing demand is anticipated to increase during operations. The operations workforce is  
11 expected to stay in the area longer, approximately 8 years (see Figure 2.1-1), and so will be  
12 more likely to secure permanent or semi-permanent housing in the area than the construction  
13 workforce. Most workers moving into the area will relocate to the surrounding towns of  
14 Edgemont, Custer, Hot Springs, and Newcastle. Discussions with officials of the Edgemont  
15 Chamber of Commerce and Custer County Economic Development Committee indicated that  
16 housing in the towns of Edgemont and Custer will be available to accommodate the projected  
17 operations workforce (NRC, 2009c). Vacancy rates are currently high (14.5 to 22 percent) in  
18 Custer, Fall River, and Weston Counties (see SEIS Section 3.11.3), and the added workforce  
19 will have little impact on the housing inventory. Because of the small size of both the  
20 operations workforce (84 workers) and the workforce indirectly supporting facility operations  
21 (36 workers), impacts to housing during ISR operations at the proposed project will be SMALL.

#### 22 23 4.11.1.2.4 Employment Structure

24  
25 As previously discussed, ISR facility operations at the proposed Dewey-Burdock ISR Project will  
26 generate 84 new jobs, such as project managers, plant operators, lab technicians, and drill  
27 contractors. Most skilled positions are likely to be filled by people moving into the area rather  
28 than providing employment opportunities for people living in nearby communities. As described  
29 in GEIS Section 4.4.10.2, because of the highly technical nature of ISR operations (requiring  
30 professionals in the areas of health physics, chemistry, laboratory analysis, geology and  
31 hydrogeology, and engineering), the majority (approximately 70 percent) of the workforce  
32 during operations is expected to be staffed from outside the region. The proposed project  
33 will provide some jobs to the local labor pool to support ISR facility operations. However,  
34 because the number of skilled workers drawn from areas outside of the ROI will be relatively  
35 small (e.g., 84 workers  $\times$  0.7 = 59 workers), ISR facility operations at the proposed project  
36 will not noticeably affect employment rates in Custer, Fall River, and Weston Counties.  
37 Therefore, the impact on the employment structure will be SMALL.

#### 38 39 4.11.1.2.5 Local Finance

40  
41 Tax revenue will profit Fall River and Custer Counties through the projected 8-year operations  
42 phase. Personal property tax will be applied to the value of all equipment the project uses. In  
43 addition, a state mineral severance tax will be applied to the milled uranium; however, this tax  
44 will go to the State of South Dakota general fund and not be directly returned to the counties in  
45 the ROI (see SEIS Section 8.3). A county *ad valorem* tax for production will also contribute to  
46 local government revenue. The counties and municipalities will indirectly benefit from increased  
47 sales tax revenue from the increased population and resultant demand for goods and services.  
48 Because the construction workforce (86 workers) is small in relation to the total labor forces in  
49 Fall River and Custer Counties (see SEIS Section 3.11.4), the tax-revenue impact from ISR  
50 facility operations on local taxing jurisdictions in Fall River and Custer Counties will be positive  
51 and SMALL.

#### 4.11.1.2.6 Education

The added population associated with the additional 86 workers and their families relocating during operations may have an impact on local public schools and education-related services. The average family size in South Dakota is 2.43 (USCB, 2012). Assuming a two-parent family, a conservative upper estimate for the number of school-aged children that may relocate to the ROI will be 40 children of various ages. The potential increase in school-aged children will likely be split between the seven school districts in the ROI (see SEIS Section 3.11.5). The five closest school districts are Edgemont, Custer, Hot Springs, Weston County #1, and Weston County #7. Compared to the South Dakota statewide student-teacher ratio of 13.4:1, the Edgemont and Custer student-teacher ratios are low (10:1 and 12:1, respectively) and will not be significantly affected (SDDOE, 2010). The Hot Springs student-teacher ratio of 14:1 is slightly above the statewide ratio. Compared to the Wyoming statewide student-teacher ratio of 12.4:1, the Weston County #1 and Weston County #7 student-teacher ratios are low (11:1 and 10:1, respectively) and will not be significantly affected (Wyoming Department of Education, 2010). Comprising various ages and spread across schools and classrooms in the 5 closest school districts (kindergarten and grades 1 through 12), the small number of children (40) will not likely have a noticeable effect on student-teacher ratios. In addition, city and county planners indicated that the schools could accommodate an increase in the number of students (NRC, 2009c). The impact on schools and education-related service during the ISR facility operations phase will be SMALL.

#### 4.11.1.2.7 Health and Social Services

A small increase in demand will be expected for health and social services during the operations phase of the proposed Dewey-Burdock ISR Project from workers and their families relocating to the ROI. These operational impacts are not expected to differ significantly from those during the construction phase of the ISR facility. Therefore, the small additional increase in demand that will occur for the operations phase will likely already have been met during the construction phase. Discussions with city and county planners indicated that current and planned upgrades to health care and hospitals in the region could accommodate projected increases in population (NRC, 2009c). Further, by license condition, NRC staff will require the applicant to coordinate emergency response activities with local authorities, fire departments, medical facilities, and other emergency services before operations begin (NRC, 2012). The applicant will be required to document the coordination activities and maintain the documentation onsite. Impacts to health and social services during operations will remain SMALL.

#### 4.11.1.3 Aquifer Restoration Impacts

NRC staff determined in GEIS Section 4.4.10.3 that the socioeconomic impact from aquifer restoration will be similar to impacts experienced during ISR facility operations. This is because the level of employment and demand on services will not change. NRC staff concluded in the GEIS the potential impacts to socioeconomics will be SMALL. (NRC, 2009a)

Socioeconomic impacts from the aquifer restoration process at the proposed Dewey-Burdock site will be similar to those experienced during ISR facility operations. Initial aquifer restoration of wellfields will be conducted in conjunction with the operations phase and will not require additional workers with specialized skills (Powertech, 2009a). An aquifer restoration workforce of nine direct employees has been estimated for the proposed project (Powertech, 2010a). Because aquifer restoration will be short term [i.e., extending 4 to 5 years after operations cease

1 (Powertech, 2009a)], workers performing aquifer restoration activities will likely be sourced from  
2 the operations phase workforce and any additional workers will likely be drawn from the local  
3 area. Impacts on demographics; income; housing; employment; tax revenue; and health, social,  
4 and educational services will remain unchanged because it is likely that workers taken from the  
5 operations workforce will have already relocated their families to the area and temporary  
6 workers will not relocate their families to the area. Therefore, the overall socioeconomic impact  
7 of aquifer restoration will be SMALL.  
8

#### 9 **4.11.1.4 Decommissioning Impacts**

10  
11 GEIS Section 4.4.10.3 discusses the potential socioeconomic impacts of decommissioning.  
12 Decommissioning and reclamation activities (e.g., dismantling surface structures,  
13 removing pumps, plugging and abandoning wells, and reclaiming and recontouring the  
14 ground surface) will likely draw on a skill set similar to the ISR facility construction workforce.  
15 Decommissioning activities will be expected to be short in duration (24 to 30 months), and so  
16 employment will be temporary. Impacts to employment structure and housing are expected to  
17 be similar to those for construction, due to similar employment levels. NRC staff determined in  
18 the GEIS that overall, potential impacts to socioeconomics from decommissioning will be  
19 SMALL to MODERATE. (NRC, 2009a)  
20

21 Final decommissioning of wellfields, the central processing plant, and the satellite facility at the  
22 proposed Dewey-Burdock ISR Project is expected to take 2 years (Powertech, 2009a). A  
23 workforce of nine employees engaged directly in these activities has been estimated  
24 (Powertech, 2010a). Decommissioning activities for the proposed project could impact the  
25 demand for housing and local infrastructure, as well as health, social, and educational services  
26 if new workers relocate their families to the local area. However, due to the size of the expected  
27 workforce needed for decommissioning (nine direct employees), these impacts will be SMALL  
28 and further reduced if a number of the ISR facility operations and aquifer restoration employees  
29 remain to assist in the decommissioning activities.  
30

#### 31 **4.11.2 No-Action (Alternative 2)**

32  
33 Under the No-Action alternative, the ISR facility will not be constructed or operated at the  
34 proposed Dewey-Burdock site. Socioeconomic conditions in Custer and Fall River Counties in  
35 South Dakota and Weston County in Wyoming will not change under the No-Action alternative.  
36

### 37 **4.12 Environmental Justice Impacts**

38  
39 As required by Title VI of the Civil Rights Act of 1964, federal agencies must consider whether  
40 their actions may cause disproportionately negative impacts on minority or low-income  
41 populations. Executive Order 12898 (59 FR 7629) (1994), "Federal Actions to Address  
42 Environmental Justice in Minority Populations and Low-Income Populations," requires  
43 similar analysis.  
44

45 In response to Executive Order 12898, the Commission issued a Policy Statement on the  
46 Treatment of Environmental Justice Matters in NRC Regulatory and Licensing Actions  
47 (69 FR 52040). The Policy Statement explains that "The Commission is committed to the  
48 general goals set forth in Executive Order 12898, and strives to meet those goals as part of its  
49 NEPA review process."  
50

1 In 1997, the Council on Environmental Quality (CEQ) provided the following guidance relevant  
2 to determining when an agency's actions may disproportionately affect certain populations:

3  
4 Disproportionately High and Adverse Human Health Effects. Adverse health effects are  
5 measured in risks and rates that could result in latent cancer fatalities, as well as other  
6 fatal or nonfatal adverse impacts on human health. Adverse health effects may include  
7 bodily impairment, infirmity, illness, or death. Disproportionately high and adverse  
8 human health effects occur when the risk or rate of exposure to an environmental hazard  
9 for a minority or low-income population is significant (as defined by NEPA) and  
10 appreciably exceeds the risk or exposure rate for the general population or for another  
11 appropriate comparison group. (CEQ, 1997)

12  
13 Disproportionately High and Adverse Environmental Effects. A disproportionately high  
14 environmental impact that is significant (as defined by NEPA) refers to an impact or risk  
15 of an impact on the natural or physical environment in a low-income or minority  
16 community that appreciably exceeds the environmental impact on the larger community.  
17 Such effects may include ecological, cultural, human health, economic, or social  
18 impacts. An adverse environmental impact is an impact that is determined to be both  
19 harmful and significant (as defined by NEPA). In assessing cultural and aesthetic  
20 environmental impacts, impacts that uniquely affect geographically dislocated or  
21 dispersed minority or low-income populations or American Indian tribes are considered.  
22 (CEQ, 1997)

23  
24 The following environmental justice analysis assesses whether issuing a license for the  
25 proposed Dewey-Burdock ISR facility might cause disproportionately high and adverse human  
26 health or environmental effects on minority and low-income populations. In assessing the  
27 effects, the following CEQ (1997) definitions of minority individuals, minority populations, and  
28 low-income populations were used:

29  
30 Minority individuals. Individuals who identify themselves as members of the following  
31 population groups: Hispanic or Latino, American Indian or Alaska Native, Asian, Black or  
32 African American, Native Hawaiian or Other Pacific Islander, or two or more races  
33 meaning individuals who identified themselves on a Census form as being a member of  
34 two or more races, for example, Hispanic and Asian.

35  
36 Minority populations. Minority populations are identified when (i) the minority population  
37 of an affected area exceeds 50 percent or (ii) the minority population percentage of the  
38 affected area is meaningfully greater than the minority population percentage in the  
39 general population or other appropriate unit of geographic analysis.

40  
41 Low-income population. Low-income populations in an affected area are identified with  
42 the annual statistical poverty thresholds from the Census Bureau's Current Population  
43 Reports, Series PB60, on Income and Poverty.

#### 44 **4.12.1 Analysis of Impacts**

##### 45 **Methodology**

46  
47  
48  
49 NRC addresses environmental justice matters for license reviews through (i) identifying minority  
50 and low-income populations that may be affected by the proposed construction and operations

1 of the proposed Dewey-Burdock ISR facility and (ii) examining any potential human health or  
2 environmental effects on these populations to determine whether these effects may be  
3 disproportionately high and adverse.

4  
5 In January and February 2010, the NRC staff published an advertisement in six newspapers  
6 circulated near the proposed project area (Rapid City Journal, Edgemont Herald Tribune,  
7 Custer Chronicle, Hot Springs Star, Lakota Country Times, and the Native Sun) to inform the  
8 public and solicit comments on the proposed action. As part of information gathering, the NRC  
9 staff also contacted potentially interested Native American tribes, local authorities, and public  
10 interest groups in person, by email, and by telephone.

11  
12 The 2010 Census provides race and poverty characteristics in Custer and Fall River Counties in  
13 South Dakota and Weston County in Wyoming, which are the counties potentially affected by  
14 the proposed project. For the year 2010, Table 4.12-1 shows the percentage of people living in  
15

**Table 4.12-1. Percent Living in Poverty and Percent Minority in 2010**

<b>Geographic Unit</b>	<b>Percent Living in Poverty</b>	<b>Percent Minority</b>
<b>United States</b>	13.8	36.3
South Dakota	13.7	15.3
<i>Custer County</i>	9.7	7.2
Custer County Census Tract 9651	8.0	6.6
Block Group 1	NA	7.5
Block Group 2	NA	3.9
Block Group 3	NA	3.9
Custer County Census Tract 9652	12.9	8.4
Block Group 1	NA	7.1
Block Group 2	NA	4.2
Block Group 3	NA	12.6
<i>Fall River County</i>	17.4	12.6
Fall River County Census Tract 9641	13.4	8.7
Block Group 1	NA	5.1
Block Group 2	NA	6.1
Block Group 3	NA	13.6
Fall River County Census Tract 9642	20.5	15.2
Block Group 1	NA	10.0
Block Group 2	NA	12.1
Block Group 3	NA	16.0
<b>Wyoming</b>	9.8	14.1
<i>Weston County</i>	7.9	6.2
Weston County Census Tract 9511	7.7	5.7
Block Group 1	NA	5.0
Block Group 2	NA	6.3
Weston County Census Tract 9513	8.1	6.6
Block Group 1	NA	6.5
Block Group 2	NA	3.4
Block Group 3	NA	7.7
Source: USCB (2012) NA = Not available		



1 poverty and minority populations in the United States, South Dakota and Wyoming, and in  
2 Custer, Fall River, and Weston Counties. The table also includes the census tracts and block  
3 groups in these counties. Note that poverty data from the 2010 Census are not yet available at  
4 the block group level.

## 6 Impact Analysis

8 In 2010, the populations of Custer, Fall River, and Weston Counties were 8,216, 7,094, and  
9 7,208, respectively (USCB, 2012). In 2010, 15.3 percent of the South Dakota population and  
10 14.1 percent of the Wyoming population was classified as minority (Table 4.12-1). The  
11 percentage of the population classified as minority in Custer, Fall River, and Weston Counties  
12 was 7.2, 12.6, and 6.2 percent, respectively, which is below the state minority population  
13 percentages. The minority population in census tracts in Custer and Fall River Counties  
14 potentially affected by the proposed Dewey-Burdock ISR Project ranged from 6.6 to  
15 15.2 percent which is at or below the state average of 15.3. The minority population in block  
16 groups in Custer and Fall River Counties ranged from 3.9 to 16 percent. In Weston County, the  
17 minority population in the census tracts potentially affected by the proposed project ranged from  
18 5.7 to 6.6 percent, which is below the Wyoming state average of 14.1 percent. The minority  
19 population in block groups in Weston County ranged from 3.4 to 7.7 percent.

21 As described in SEIS Section 3.11.1 and summarized in Table 3.11-1, the population in Fall  
22 River County fell approximately 5 percent between 2000 and 2010, in comparison to  
23 approximately 9 and 13 percent gains in Weston and Custer Counties over the same period,  
24 respectively. Weston County's population is expected to grow at a similar rate of approximately  
25 9 percent over the next decade (WDAL, 2011). The populations of Fall River and Custer  
26 Counties are expected to remain relatively constant through 2020 (Brooks, 2008).

28 Demographic information on race and ethnicity in 2000 and 2010 for Custer, Fall River, and  
29 Weston Counties is provided in Table 4.12-2. Since 2000, minority populations have increased  
30 by 0.6 percent (111 persons) in Custer County, 1.9 percent (98 persons) in Fall River County,  
31 and 1.0 percent (100 persons) in Weston County. In Custer and Weston Counties, most of this  
32 increase was due to an influx of Hispanic or Latinos (72 persons in Custer County and 79  
33 persons in Weston County). In Fall River County, the increase was due to an influx of Black or  
34 African Americans (18 persons), American Indian and Alaska Natives (24 persons), and  
35 Hispanic or Latinos (29 persons).

37 The U.S. population living below the poverty level was identified as 13.8 percent in 2010  
38 (Table 4.12-1). In South Dakota and Wyoming, the populations living below the poverty level  
39 were 13.7 and 9.8 percent, respectively. The percentage of people living below the poverty  
40 level in Custer, Fall River, and Weston Counties is 9.7, 17.4, and 7.9, respectively. The  
41 percentage of people living below the poverty level within the census tracts surrounding the  
42 proposed Dewey-Burdock ISR Project ranged from 7.7 to 20.5 percent (Table 4.12-1).

44 As described in SEIS Section 3.11.2 and summarized in Table 3.11-3, the median household  
45 income for South Dakota and Wyoming in 2010 was \$46,369 and \$53,802, respectively. In  
46 South Dakota, 8.7 percent of families live below the federal poverty threshold (the 2012 federal  
47 poverty threshold is \$23,050 for a family of four). In Wyoming, 6.2 percent of families live below  
48 the federal poverty threshold. Custer and Weston Counties had similar median household  
49 incomes (\$46,743 and \$53,853, respectively) and a lower percentage of families living below  
50

**Table 4.12-2. Demographic Profile Comparison of the 2000 and 2010 Population in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming**

Population Category	Custer County		Fall River County		Weston County	
	2000	2010	2000	2010	2000	2010
Race (Percent of Total Population, Not Hispanic or Latino)						
White	93.4	92.8	89.3	87.4	94.8	93.8
Black/African American	0.3	0.2	0.3	0.6	0.1	0.2
American Indian, Alaskan Native	3.1	2.8	6.1	6.7	1.3	1.2
Asian	0.2	0.3	0.2	0.4	0.2	0.3
Native Hawaiian, Pacific Islander	0.0	0.0	0.1	0.0	0.0	0.0
Some other race	0.4	0.0	0.3	0.0	0.9	0.0
Two or More Races	1.9	1.7	2.5	2.6	1.5	1.4
Ethnicity						
Hispanic or Latino (number of people)	110	182	130	159	137	216
Percent of total population	1.5	2.2	1.7	2.2	2.1	3.0
Minority Population (Including Hispanic or Latino Ethnicity)						
Total minority population	481	592	797	895	346	446
Percent minority	6.6	7.2	10.7	12.6	5.2	6.2
Source: USCB, 2012						

1  
2 the poverty level (4.3 percent and 5.8 percent, respectively) than the state average (see  
3 Table 3.11-3). Fall River County had a lower median household income (\$35,833) and a higher  
4 percentage of families living below the poverty level (11.4 percent) than the state average (see  
5 Table 3.11-3).  
6

7 If the percentage for either minority or low-income population in block groups significantly  
8 exceeds that of the state or county percentage, environmental justice will have to be considered  
9 in greater detail (NRC, 2003a). As a general matter, NRC staff consider differences greater  
10 than 20 percentage points to be significant (NRC, 2003a, Appendix C). Additionally, if either the  
11 minority or low-income population percentage exceeds 50 percent, environmental justice will  
12 have to be considered in greater detail. The percentages of minority populations living in the  
13 affected block groups do not significantly exceed the percentage of minority populations  
14 recorded at the state and county. No significant minority populations were identified as residing  
15 near the proposed Dewey-Burdock ISR Project. Therefore, NRC staff conclude that there will  
16 be no disproportionately high or adverse impacts to minority populations from the proposed  
17 project. As noted previously, low-income data from the 2010 Census at the block group level is  
18 not yet available. However, the percentages of the population living in poverty at the census  
19 tract level do not significantly exceed the percentage of low-income populations recorded at  
20 the state or county level. In addition, the percentage of families living below the poverty level  
21 in the affected counties does not significantly exceed the percentage of families living in  
22 poverty at the state level. Therefore, NRC staff conclude that it is realistic to expect that  
23 low-income percentages for the counties at the block group level will not be an environmental  
24 justice concern.  
25

26 The closest population to the proposed Dewey-Burdock ISR Project that could be impacted by  
27 environmental justice concerns is the Pine Ridge Indian Reservation located approximately  
28 80 km [50 mi] to the east in Shannon County, South Dakota. Communities within the Pine  
29 Ridge Indian Reservation include the towns of Oglala and Pine Ridge. Based on 2010 USCB  
30 data, these towns have both minority {greater than 95 percent Native American (Oglala Sioux  
31 Tribe)} and low-income populations (USCB, 2012).

1 This environmental justice impact analysis evaluates the potential for disproportionately high  
2 and adverse human health and environmental effects on minority and low-income populations  
3 that could result from the proposed action. Adverse health effects are measured in terms of the  
4 risk and rate of fatal or nonfatal adverse impacts on human health. Disproportionately high and  
5 adverse human health effects occur when the risk or rate of exposure to an environmental  
6 hazard for a minority or low-income population is significant and exceeds the risk or exposure  
7 rate for the general population or for another appropriate comparison group. Disproportionately  
8 high environmental effects refer to impacts or risk of impact on the natural or physical  
9 environment in a minority or low-income community that are significant and appreciably exceed  
10 the environmental impact on the larger community.

11  
12 Disproportionately high effects may include biological, cultural, economic, or social impacts  
13 (CEQ, 1997). Some of these potential effects have been identified in the resource areas  
14 discussed in SEIS Chapter 4. For example, ground-disturbing activities during the construction  
15 phase of the proposed ISR facility could disproportionately affect cultural and historic resources  
16 important to Native American populations. On the other hand, minority and low-income  
17 populations, such as Native American tribes, are subsets of the general public residing around  
18 the proposed Dewey-Burdock ISR Project site. All populations, regardless of their status, would  
19 be exposed to the same health and environmental effects associated with construction,  
20 operations, aquifer restoration, and decommissioning activities at the Dewey-Burdock site.

#### 21 22 **4.12.2 Proposed Action (Alternative 1)**

23  
24 Potential impacts to minority and low-income populations due to the construction, operations,  
25 and decommissioning of the proposed ISR facility and aquifer restoration at the Dewey-Burdock  
26 site will mostly consist of environmental and socioeconomic effects (e.g., noise, dust, traffic,  
27 employment, housing, and cultural impacts). Noise and dust impacts will be short term and  
28 limited to onsite activities. Minority and low-income populations residing along site access  
29 roads could experience increased commuter vehicle traffic during shift changes. As  
30 construction and operations employment increases at the proposed project site, employment  
31 opportunities for minority and low-income populations may also increase. Increased demand for  
32 housing during peak construction could disproportionately affect low-income populations.  
33 According to the latest census information, 2,423 vacant housing units in the census tracts in  
34 Custer, Fall River, and Weston Counties would be potentially affected by the proposed project  
35 (Table 4.12-3). Based on this information and the analysis of human health and environmental  
36 impacts presented in this chapter, there will not be disproportionately high and adverse impacts  
37 to minority and low-income populations from the construction, operations, and decommissioning  
38 of the proposed ISR facility and aquifer restoration at the Dewey-Burdock site.

39  
40 As described in GEIS Section 6.4, Native American tribes in the Black Hills region believe that  
41 preserving and maintaining access to sacred lands is essential to both cultural and spiritual  
42 aspects of traditional Native American societies of the northern plains. Protection of the cultural  
43 and historic resources as well as the spiritual value of the land (e.g., identification of TCPs)  
44 within the proposed Dewey-Burdock ISR Project area will be addressed through the National  
45 Historic Preservation Act (NHPA) Section 106 consultation process as described in SEIS  
46 Section 4.9.1. Mitigation measures to minimize adverse impacts to cultural and historic  
47 resources will be developed in consultation with the applicant, NRC, SD SHPO, Native  
48 American tribes [Tribal government or designated Tribal Historic Preservation Officer (THPO)],  
49 and other government agencies (e.g., BLM, ARC). The Section 106 consultation process

50

**Table 4.12-3. Housing in Custer and Fall River Counties, South Dakota, and Weston County, Wyoming, in 2010**

<b>Geographic Unit</b>	<b>Total Housing Units</b>	<b>Vacant Units</b>
Custer County	4,628	992
Custer County Census Tract 9651	3,173	715
Custer County Census Tract 9652	1,455	277
Fall River County	4,191	919
Fall River County Census Tract 9641	1,940	649
Fall River County Census Tract 9642	2,251	270
Weston County	3,533	512
Weston County Census Tract 9511	1,584	262
Weston County Census Tract 9513	1,949	250
Source: USCB, 2012		

1 provides an avenue for potentially affected Native American tribes to become consulting parties  
2 with regard to heritage interests related to the proposed project site. Potential impacts to sites  
3 of religious or cultural significance to tribes will be reduced through mitigation strategies  
4 developed during Section 106 consultations.  
5

6  
7 As part of addressing environmental justice associated with license reviews, NRC also analyzed  
8 the risk of radiological exposure through the consumption patterns of special pathway receptors,  
9 including subsistence consumption of fish, native vegetation, surface waters, sediments, and  
10 local produce; absorption of contaminants in sediments through the skin; and inhalation of plant  
11 materials. The special pathway receptors analysis is important to the environmental justice  
12 analysis because consumption patterns may reflect the traditional or cultural practices of  
13 minority and low-income populations in the area.  
14

15 **Subsistence Consumption of Fish and Wildlife**

16  
17 Executive Order 12898 (59 FR 7629) directs federal agencies, whenever practical and  
18 appropriate, to collect and analyze information on the consumption patterns of populations  
19 that rely principally on fish and wildlife for subsistence and to communicate the risks of these  
20 consumption patterns to the public. For this SEIS, NRC considered whether there were any  
21 means for minority or low-income populations to be disproportionately affected by examining  
22 impacts to traditional lifestyle special pathway receptors. Special pathways that were  
23 considered included the potential levels of contaminants in native vegetation, crops, soils and  
24 sediments, surface water, fish, and game animals on or near the proposed Dewey-Burdock site.  
25

26 Potential impacts to minority and low-income populations will mostly consist of radiological  
27 effects; however, radiation doses from ISR facility operations will be expected to be well below  
28 regulatory limits as described in SEIS Section 4.13. As described in GEIS Section 6.4, the land  
29 in the area of the Black Hills has historically provided sustenance to many Native American  
30 tribes by way of fishing, hunting, and plant food gathering. The results of background  
31 radiological monitoring of soils and sediments, surface water, livestock, fish, and vegetation at  
32 the proposed Dewey-Burdock Project site are described in SEIS Sections 3.12.1 and 3.6.2. In  
33 general, the results of the radiological monitoring indicate that radionuclide concentrations in  
34 soils and sediments and surface water were often elevated in abandoned open pit surface mine  
35 areas in the eastern and northeastern parts of the Burdock area. In addition, surface water  
36 samples from Beaver Creek and the Cheyenne River often exceeded EPA-regulated MCLs for

1 radionuclides (e.g., uranium, gross alpha, Ra-226, and Pb-210) in drinking water as established  
2 in 40 CFR Part 141. In general, radionuclide concentrations in vegetation and fish were present  
3 at low concentrations and radionuclide concentrations in local livestock were at or below the  
4 lower limits of detection.

5  
6 As described in SEIS Section 4.2, fencing will be installed in areas of active ISR operations  
7 such as wellfields, processing plants, and possible land application areas. This will limit hunting  
8 within the permitted boundary of the Dewey-Burdock ISR Project area. Limits on hunting will  
9 continue over the operational life of the project. However, substantial land surrounding the  
10 4,282-ha [10,580-ac] project site will remain open to big game hunting and therefore the impacts  
11 to hunting on Native American tribes will be SMALL. The applicant's SWMP will limit adverse  
12 impacts on aquatic habitat and species within the proposed project area resulting from planned  
13 construction and operational activities (Powertech, 2009a). As discussed in SEIS Section  
14 4.5.1.1.2, no surface water will be diverted, no process water will be discharged into aquatic  
15 habitat, and storm water runoff will be managed through the applicant's NPDES permit.  
16 Therefore, potential impacts to aquatic species and habitats will be SMALL.

17  
18 To mitigate exposure or health risks associated with contaminants reaching the food chain in  
19 potential land application areas, the applicant proposes treating liquid wastes applied to  
20 potential land application areas so that they meet NRC release limit criteria for radionuclides in  
21 10 CFR Part 20, Appendix B (Standards for Protection Against Radiation) (Powertech, 2009a,  
22 2011). During decommissioning of the proposed project, seeded soil will be returned to areas  
23 from which it was removed and contoured to blend with the natural terrain. At the end of  
24 decommissioning all lands will be returned to their preextraction use of livestock grazing and  
25 wildlife habitat.

26  
27 Based on this information and the analysis of human health and environmental impacts  
28 presented in this SEIS, the proposed action will not have disproportionately high and adverse  
29 human health and environmental effects on Native American and other traditional lifestyle  
30 pathway receptors in the vicinity of the Dewey-Burdock project area. The impacts to Native  
31 American tribes will, for the most part, be no different than those other populations experience  
32 within the vicinity of the project area. Mitigation strategies will be developed through the  
33 ongoing Section 106 consultation for impacts to sites of religious or cultural significance to the  
34 tribes, if identified in the proposed project area.

#### 35 36 **4.12.3 No-Action (Alternative 2)**

37  
38 Under the No-Action alternative, the ISR facility will not be constructed and operated at  
39 the proposed Dewey-Burdock ISR Project site. The relative conditions affecting minority and  
40 low-income populations in the vicinity of the proposed project site will remain unchanged.  
41 Therefore, there will be no disproportionately high or adverse impacts to minority and low-  
42 income populations from this alternative.

#### 43 44 **4.13 Public and Occupational Health and Safety Impacts**

45  
46 As described in GEIS Section 4.4.11, potential radiological and nonradiological impacts from  
47 ISR activities may occur during all phases of the ISR facility's lifecycle (NRC, 2009a). These  
48 impacts may occur during normal operations where proposed activities are executed as planned  
49 or during potential accident conditions when unplanned events can generate additional hazards.  
50 Additionally, the potential hazards and associated impacts can be either radiological or

1 nonradiological. Therefore, the impact analysis in this section evaluates the radiological and  
2 nonradiological potential public and occupational health and safety impacts for normal and  
3 accident conditions in each phase of the ISR facility lifecycle.

#### 4 5 GEIS Construction Phase Summary

6  
7 Standard construction safety practices will address nonradiological worker safety during ISR  
8 facility construction. Construction emissions will be primarily from fugitive dust and diesel-  
9 powered construction equipment exhausts. Fugitive dust generated from construction activities  
10 and vehicle traffic will be of short duration, and because the average natural levels of  
11 radioactivity in soils are low, it will not result in a radiological dose to workers and the public.  
12 Diesel emissions from construction equipment will also be of short duration and readily  
13 dispersed into the atmosphere. For these reasons, NRC staff concluded in the GEIS that  
14 potential impacts to public and occupational health and safety from construction will be SMALL.  
15 (NRC, 2009a)

#### 16 17 GEIS Operations Phase Summary

18  
19 Potential public and occupational radiological impacts from normal operations may result from  
20 (i) exposure to radon gas from the wellfields, (ii) ion-exchange resin transfer operations, and  
21 (iii) venting during processing activities. Workers may also be exposed to airborne uranium  
22 particulates from dryer operations and maintenance activities. Potential public exposures to  
23 radiation may occur from the same radon releases and uranium particulate releases (i.e., from  
24 facilities without vacuum dryer technology). Both worker and public radiological exposures are  
25 addressed in NRC regulations at 10 CFR Part 20, which require licensees to implement an  
26 NRC-approved radiation protection program. NRC periodically inspects those programs to  
27 ensure compliance. Measured and calculated doses for workers and the public are commonly  
28 only a fraction of regulatory limits. For these reasons, NRC staff concluded in the GEIS that  
29 potential radiological impacts to workers and the public from operations will be SMALL.  
30 (NRC, 2009a)

31  
32 Nonradiological worker safety at ISR facilities will be addressed through occupational health and  
33 safety regulations and practices (NRC, 2009a). The potential impact from nonradiological  
34 accidents includes high consequence chemical release events (e.g., of ammonia) that may  
35 expose workers and nearby populations. However, NRC staff concluded that the likelihood of  
36 such a release would be low, based on historical operating experience at NRC-licensed  
37 facilities, primarily because operators follow chemical safety and handling protocols. Therefore,  
38 NRC staff concluded in the GEIS that radiological and nonradiological impacts from accidents  
39 during operations may range from SMALL to MODERATE. (NRC, 2009a)

#### 40 41 GEIS Aquifer Restoration Phase Summary

42  
43 Activities occurring during aquifer restoration will overlap similar activities occurring during  
44 operations (e.g., operation of wellfields, wastewater treatment and disposal). Therefore, the  
45 potential impact on public and occupational health and safety will be bound by the operational  
46 impacts. In the GEIS, NRC staff also stated that the reduction of some operational activities  
47 (e.g., yellowcake production and drying, remote ion-exchange) as aquifer restoration proceeded  
48 would be expected to limit the relative magnitude of potential worker and public health and  
49 safety hazards. NRC staff concluded in the GEIS that the overall impacts to workers and the  
50 public from aquifer restoration will be SMALL. (NRC, 2009a)

51

## GEIS Decommissioning Phase Summary

During decommissioning, the degree of potential impact decreases as hazards are reduced or removed, soils and facility structures are decontaminated, and lands are restored to preoperational conditions. To ensure the safety of workers and the public during decommissioning, NRC requires ISR licensees to submit a decommissioning plan for review and approval. NRC will then periodically inspect the facility to ensure that the decommissioning plan is implemented properly. The plan includes details of the radiation safety program that is implemented during decommissioning activities. The plan is developed to minimize health and safety hazards and to be compliant with worker and public dose limits in 10 CFR Part 20, Subparts C and D limits. An approved plan will also provide “as low as reasonably achievable” (ALARA) provisions under 10 CFR Part 20, Subpart B to further ensure best safety practices are being used to minimize radiation exposures (see SEIS Section 3.12.3). Adequate protection of workers and the public during decommissioning will therefore be ensured through NRC review and approval of the applicant’s decommissioning plan, license conditions, inspection, and enforcement. Based on the NRC review and approval of the applicant’s decommissioning plan, the NRC application of any site-specific license conditions, and NRC inspection and enforcement actions to ensure compliance with NRC radiation safety requirements, NRC staff concluded in the GEIS the potential public and occupational health and safety impacts for decommissioning will be SMALL. (NRC, 2009a)

### **4.13.1 Proposed Action (Alternative 1)**

As described in SEIS Section 2.1.1.1.2.4, the applicant has proposed to dispose of liquid wastes by deep well disposal via Class V injection wells, land application, or combined deep well disposal via Class V injection wells and land application. The environmental impacts on public and occupational health and safety for each of the liquid waste disposal options are discussed in the following sections.

#### **4.13.1.1 Disposal Via Class V Injection Wells**

As described in SEIS Section 2.1.1.1.2.4, the applicant’s preferred option for disposal of liquid wastes is deep well disposal via Class V injection wells. Potential environmental impacts to public and occupational health and safety from construction, operations, aquifer restoration, and decommissioning associated with the Class V injection well disposal option are discussed in the following sections.

##### **4.13.1.1.1 Construction Impacts**

As described in SEIS Section 2.1.1.1.2, construction activities at the Dewey-Burdock ISR Project will include clearing and grading for roads, building foundations and surface impoundments, drilling wells, trenching, laying pipelines, and assembling buildings. Construction activities for the Class V injection well disposal option will also involve the installation of four to eight Class V injection wells (see SEIS Section 2.1.1.1.2.4.1). The important radiation exposure pathways during the construction phase will be through direct exposure, inhalation or ingestion of radionuclides during well construction, construction activities that disturbed soils, and fugitive dust from vehicular traffic. These activities are equivalent to the activities analyzed in GEIS Section 4.4.11.

1 Drilling wells at the proposed project will use a common technique known as mud rotary drilling  
2 (see SEIS Section 2.1.1.1.2.3.5). This technique uses fluid moving through a drill stem, out the  
3 drill bit, and back to the surface between the drill stem and host rock. When the fluid returns to  
4 the surface, it passes through a trough to a mud pit, where the cuttings settle out and the fluid  
5 is recycled down the borehole. Residual cuttings and drilling fluids are typically held in the  
6 mud pit after drilling and construction activities are completed (NRC, 2009a). Because the  
7 cuttings are taken from very near and within the ore deposits, they have the potential to be more  
8 contaminated than soil samples at the surface. Depending on state and local regulations, such  
9 mud pits are backfilled and graded or are alternatively emptied and cleaned, and residual solids  
10 and liquids transported and disposed of offsite (NRC, 2006). After well drilling is completed at  
11 the proposed project, the applicant proposes to redeposit the excavated subsoil in the mud pit  
12 followed by topsoil application and grading, usually within 30 days of the initial excavation of the  
13 mud pit (Powertech, 2009a).

14  
15 As described in SEIS Section 3.12.1, the average concentration of radionuclides measured in  
16 the soil at the proposed Dewey-Burdock site is low. With outliers removed, the mean Ra-226  
17 concentration of surface soils in surface mine areas and the broader permit area was  
18 0.048 Bq/g [1.3 pCi/g]. Fugitive dust generated from construction activities will be of short  
19 duration (1 to 2 years; see Figure 2.1-1), and because the average levels of radioactivity in soils  
20 are low, inhalation of fugitive dust will not result in a radiological dose to workers and the public.  
21 In addition, the applicant has proposed to implement standard dust control measures, such as  
22 water application and speed limits, to reduce and control fugitive dust emissions (Powertech,  
23 2009a). Therefore, NRC staff estimate that the direct exposure, inhalation, or ingestion of  
24 fugitive dust will not result in a radiological dose to workers and the general public during the  
25 construction phase of the proposed project. The applicant calculated the amount of radon  
26 released from wellfield development using methods described in NUREG-1748 (NRC, 2003a).  
27 Using conservative estimates, the applicant calculated a release rate of  $1.35 \times 10^6$   
28 disintegrations per second/yr [ $3.6 \times 10^{-5}$  Ci/yr] (Powertech, 2009a). This represents a negligible  
29 fraction of the amount of radon generated during operations as described in SEIS  
30 Section 4.13.1.1.2) and would result in a radiological dose that is well below the 10 CFR Part 20  
31 occupational and public dose limits of 0.05 Sv/yr and 1 mSv/yr [5 and 100 mrem/yr],  
32 respectively. Based on the low average concentration of radionuclides in soils at the  
33 proposed site, the proposed mitigation measures that will be implemented to control fugitive  
34 dust, and the negligible amount of radon that will be released during wellfield development, the  
35 NRC staff conclude that the radiological impacts to workers and the general public from the  
36 construction phase for the Class V injection well disposal option will be SMALL.

37  
38 The potential nonradiological air quality impacts from fugitive dust and diesel emissions are  
39 evaluated in SEIS Section 4.7.1. Construction equipment will be diesel powered and will emit  
40 diesel exhaust, which includes small particles ( $PM_{10}$ ). The impacts and potential human  
41 exposures from these emissions will be SMALL because the releases are usually short and are  
42 readily dispersed into the atmosphere. The potential impacts to air quality from proposed  
43 diesel emissions, including comparisons with health-based standards, are detailed in SEIS  
44 Section 4.7.1. In SEIS Section 4.7.1.1, NRC staff concluded that implementation of mitigation  
45 measures will result in fugitive dust emission levels that will not destabilize the air quality of the  
46 local area nor change the current attainment status of the air quality surrounding the proposed  
47 site areas. However, despite the use of controls, short-term and intermediate fugitive dust  
48 emissions are possible when vehicles travel on unpaved roads. The NRC staff conclude that  
49 short-term and intermediate MODERATE impacts from fugitive dust are possible, but because  
50 average air quality is expected to remain in compliance with ambient standards, the overall  
51 impacts will be SMALL. The applicant's compliance with federal and state occupational safety



1 regulations will limit the potential nonradiological impacts of fugitive dust and diesel emissions to  
2 levels acceptable for workers and the public. Based on the foregoing analysis, NRC staff  
3 conclude that overall nonradiological impacts on workers and the general public from the  
4 construction phase for the Class V injection well disposal option will be SMALL.

#### 5 6 4.13.1.1.2 Operations Impacts

##### 7 8 4.13.1.1.2.1 Radiological Impacts from Normal Operations

9  
10 As discussed in GEIS Section 4.2.11.2.1, some amount of radioactive materials will be released  
11 to the environment during normal ISR operations. The potential impact from these releases can  
12 be evaluated by the MILDOS-AREA computer code (MILDOS), which Argonne National  
13 Laboratory developed for calculating offsite facility radiation doses to individuals and  
14 populations. MILDOS uses a multi-pathway analysis for determining external dose; inhalation  
15 dose; and dose from ingestion of soil, plants, meat, milk, aquatic foods, and water. The primary  
16 radionuclide of interest at an ISR facility is Rn-222. MILDOS uses a sector-average Gaussian  
17 plume dispersion model to estimate downwind concentrations. This model typically assumes  
18 minimal dilution and provides conservative estimates of downwind air concentrations and doses  
19 to human receptors.

20  
21 GEIS Section 4.2.11.2.1 presented historical data for ISR operations, providing a range of  
22 estimated offsite doses associated with six current or former ISR facilities. For these  
23 operations, doses to potential offsite exposure (human receptor) locations range between  
24 0.004 mSv [0.4 mrem] per year for the Crow Butte facility in Nebraska and 0.32 mSv [32 mrem]  
25 per year for the Irigaray facility in Johnson County, Wyoming. Each value is well below the  
26 10 CFR Part 20 annual radiation public dose limit of 1 mSv/yr [100 mrem/yr] (NRC, 2009a).

27  
28 GEIS Section 4.2.11.2.1 also provides a summary of doses to occupationally exposed workers  
29 at ISR facilities. As stated, doses will be similar regardless of the facility's location and are well  
30 within the 10 CFR Part 20 annual occupational dose limit of 0.05 Sv [5 rem] per year. The  
31 largest annual average dose to a worker at a uranium recovery facility over a 10-year period  
32 [1994–2006] was 0.007 Sv [0.7 rem]. More recently, the maximum total dose equivalents  
33 reported for 2005 and 2006 were 0.00675 and 0.00713 Sv [0.675 and 0.713 rem]. Similarly, the  
34 average and maximum worker exposure to radon and radon daughter products ranged from  
35 2.5 to 16 percent of the occupational exposure limit of 4 working-level months. NRC staff  
36 concluded in the GEIS that the radiological impacts to workers during normal operations at ISR  
37 facilities will be SMALL.

38  
39 At the proposed Dewey-Burdock site, planned ISR facility design and operations for the Class V  
40 injection well disposal option are consistent with the projects analyzed in the GEIS. To mitigate  
41 radiological exposure to workers, the applicant will (i) install ventilation designed to limit worker  
42 exposure to radon; (ii) install gamma exposure rate monitors, air particulate monitors, and radon  
43 daughter product monitors to verify that expected radiation levels are met; and (iii) conduct work  
44 area radiation and contamination surveys to help prevent and limit the spread of contamination  
45 (Powertech, 2009a). The applicant's airborne radiation monitoring program is further described  
46 in SEIS Section 7.2.1.

47  
48 GEIS Section 4.2.11.1.2 noted that radon gas is emitted from ISR wellfields and processing  
49 facilities during operations and is the only radiological airborne effluent during normal operations  
50 for facilities using vacuum dryer technology (NRC, 2009a). The applicant plans to dry

1 yellowcake using a rotary vacuum dryer (Powertech, 2009a). Therefore, during normal  
2 operations, emissions other than radon are not expected.

3  
4 In its environmental report, the applicant evaluated the potential consequences of radiological  
5 emissions at the proposed Dewey-Burdock ISR Project (Powertech, 2009a, Section 4.14.2).  
6 Sources of radon emanation the applicant identified and modeled included land application of  
7 treated wastewater, wellfield operations, central processing plant operations, and resin  
8 transfers in the satellite facility (Powertech, 2009a). The applicant described its implementation  
9 of the computer code MILDOS that was used to model radiological impacts on human and  
10 environmental receptors (e.g., air and soil) using site-specific data that included Rn-222 release  
11 estimates, meteorological and population data, and other parameters. The estimated  
12 radiological impacts from routine site activities were compared to applicable public dose limits in  
13 10 CFR Part 20 {1 mSv/yr [100 mrem/yr]}, as well as to baseline radiological conditions (see  
14 SEIS Section 3.12.1).


15  
16 The NRC review of the applicant's radiological impact modeling (Powertech, 2009a, 2011)  
17 independently verified that appropriate exposure pathways were modeled and reasonable input  
18 parameters were used. The applicant also listed the origin of the input parameters and provided  
19 justification for their use. The applicant described the source terms, and the NRC staff review  
20 concluded that the source terms represented operations at full capacity and consisted of ISR  
21 operations at two wellfields, releases from the central plant and the satellite plant, and releases  
22 from one center pivot land irrigation area in the Dewey area and three center pivot land irrigation  
23 areas in the Burdock area. The applicant calculated the total effective dose equivalent (TEDE)  
24 at the site boundary in 16 compass directions each from the central plant and the satellite  
25 facility, 7 residences, and the town of Edgemont (a total of 40 locations).

26  
27 Results of the applicant's modeling (Powertech, 2011) indicated that the maximum TEDE of  
28 0.06 mSv/yr [6.0 mrem/yr] is located southeast of the Dewey satellite facility within the proposed  
29 project boundary (Figure 4.13-1). The applicant calculations also demonstrated that land  
30 application sources accounted for 80 percent of the TEDE at this location (Powertech, 2009a).  
31 Therefore, for the Class V injection well disposal option, the maximum TEDE located southeast  
32 of the Dewey satellite facility within the proposed project boundary would be 20 percent of  
33 0.06 mSv/yr [6.0 mrem/yr] or 0.012 mSv/yr [1.2 mrem/yr]. This dose is 1.2 percent of the  
34 10 CFR Part 20 public dose limit of 1 mSv/yr [100 mrem/yr]. Thus, the 10 CFR Part 20 public  
35 dose limit is not exceeded at any property boundary.

36  
37 The maximum TEDE at a residence was 0.0448 mSv/yr [4.48 mrem/yr] at Spencer Ranch  
38 located approximately 2 km [1.25 mi] northwest of the proposed central processing plant in the  
39 Burdock area (see location AMS-02 in Figure 4.13-1). The applicant calculations also  
40 demonstrated that land application sources accounted for 62 percent of the TEDE at the most  
41 highly exposed residence (Powertech, 2009a). Therefore, for the Class V injection well disposal  
42 option, the maximum TEDE at the Spencer Ranch residence would be 38 percent of 0.0448  
43 mSv/yr [4.48 mrem/yr] or 0.017 mSv/yr [1.7 mrem/yr]. This is 1.7 percent of the 10 CFR Part 20  
44 public dose limit of 1 mSv/yr [100 mrem/yr]. Hence, the TEDE at nearby receptor locations will  
45 not exceed the public dose limit.

46  
47 Because Rn-222 is the only radionuclide emitted during normal operations, the public  
48 dose requirements in 40 CFR 190.10 and the 0.1 mSv/yr [10 mrem/yr] constraint rule in  
49 10 CFR 20.1101 do not apply. However, even if 100 percent of the Rn-222 contained in  
50 production fluids was released to the atmosphere (instead of 10 percent as assumed in the  
51 applicant's calculations), the TEDE and Rn-222 air concentrations at residential receptor  
52

1

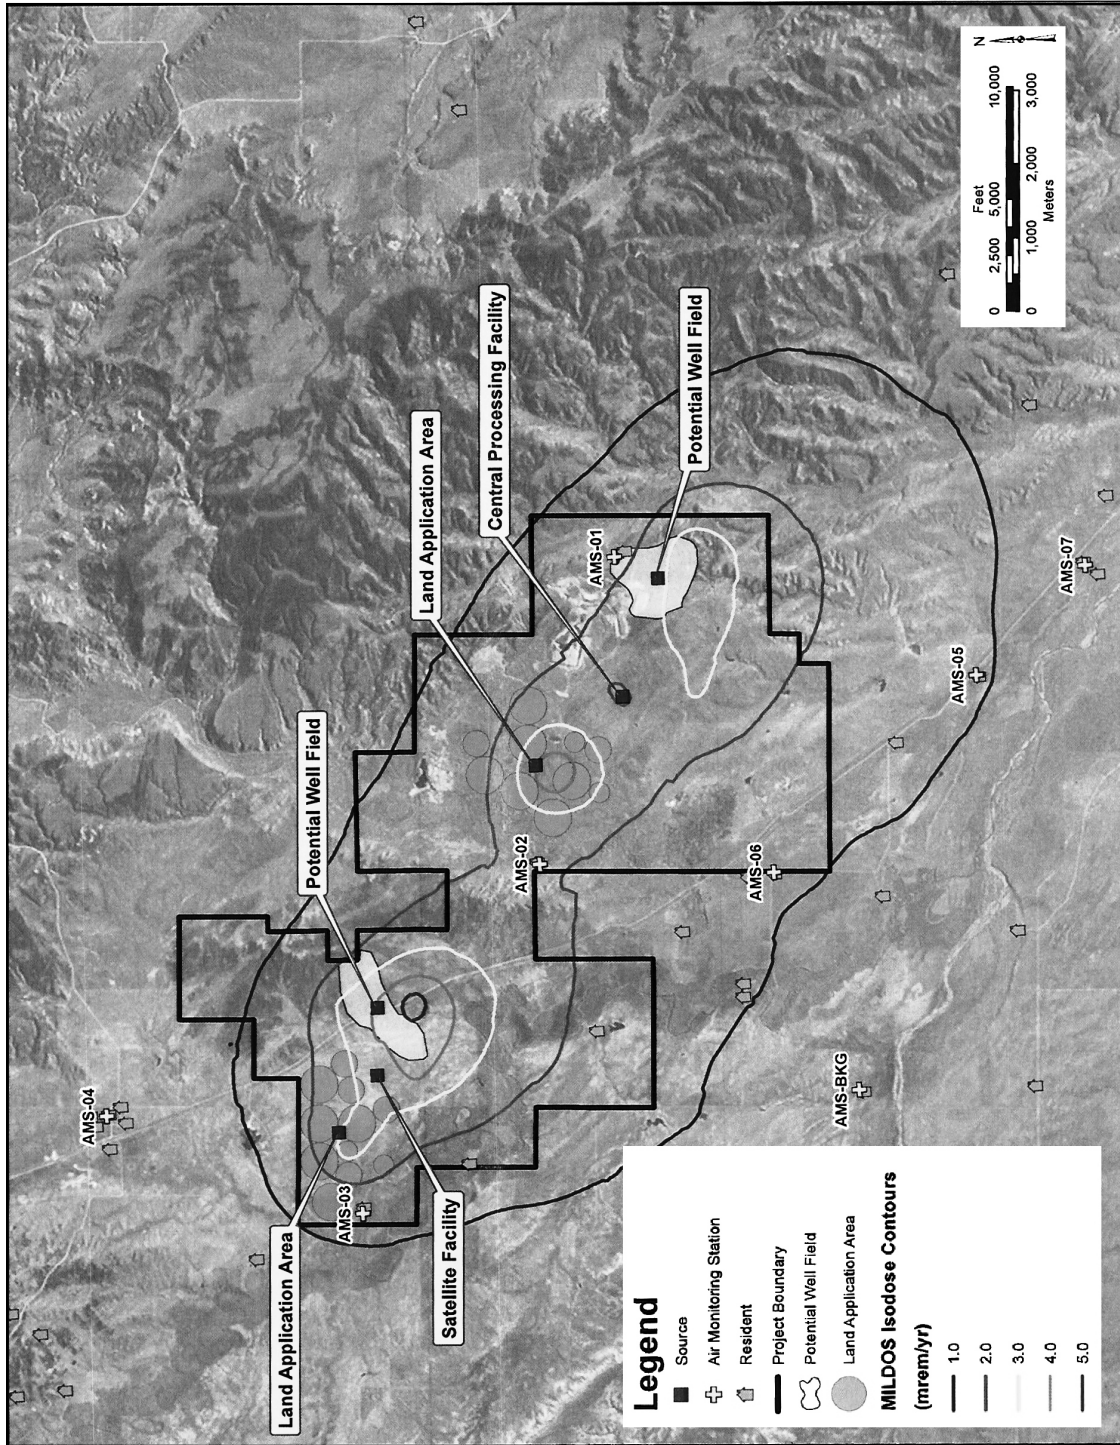

2

Figure 4.13-1. Map Showing Isodose Contours Obtained From MILDOS Modeling at the Proposed Dewey-Burdock ISR Project Site. Source: Modified From Powertech (2011).

1 locations surrounding the facility would be less than the 1 mSv [100 mrem] public dose limit and  
2 the Rn-222 effluent concentration limit, respectively. Therefore, radiological dose impacts to the  
3 public from normal operations will be SMALL.

4  
5 In summary, for the Class V injection well disposal option, potential radiation doses to  
6 occupationally exposed workers and members of the public during normal operations will be  
7 SMALL. Calculated radiation doses from the releases of radioactive materials to the  
8 environment are small fractions of the limits in 10 CFR Part 20 that have been established for  
9 the protection of public health and safety. In addition, the applicant is required to implement an  
10 NRC-approved radiation protection program to protect occupational workers and ensure that  
11 radiological doses are ALARA. The applicant's radiation protection program includes  
12 commitments for implementing management controls, engineering controls, radiation safety  
13 training, radon monitoring and sampling, and audit programs (Powertech, 2011).

#### 14 15 4.13.1.1.2.2 Radiological Impacts from Accidents

16  
17 GEIS Section 4.2.11.2.2 describes and evaluates numerous accident scenarios that may result  
18 in impacts to public health and safety and identifies mitigation measures for each accident  
19 scenario. Radiological accident risks may involve processing equipment failures leading to  
20 yellowcake slurry spills, or radon gas or uranium particulate releases. NRC staff state in the  
21 GEIS that consequences of these accidents to workers and the public are generally low, with  
22 the exception of a dryer explosion, which may result in a worker dose exceeding NRC limits  
23 (NRC, 1980). However, the likelihood of such an accident is low, due to design considerations  
24 and operational monitoring, and therefore NRC staff considered the risk also to be low.

25  
26 GEIS Section 4.2.11.2.2 also noted that in addition to accident mitigation measures, other  
27 measures will be in place to protect workers and members of the public. Employee personnel  
28 dosimetry programs are required. As part of worker protection, respiratory protection programs  
29 will be in place, as well as bioassay programs that detect uranium intake in employees.  
30 Contamination control programs will be in place, which involve surveying personnel, clothing,  
31 and equipment prior to their removal to an unrestricted area.

32  
33 As described in GEIS Section 4.2.11.2.2, a radiological hazard assessment (Mackin, et al.,  
34 2001) considered three types of accidents, representing the sources containing the higher levels  
35 of radioactivity for all aspects of operations:

- 36
- 37 • Thickener failure or spill
- 38 • Pregnant lixiviant and loaded resin spills (radon release)
- 39 • Yellowcake dryer accident release
- 40

41 In addition, SEIS Section 4.3.1.2 evaluates the impacts of shipping uranium-loaded exchange  
42 resins from the Dewey satellite facility to the Burdock central processing plant.

43  
44 The following discussion presents an overview of the accident scenarios, as evaluated in the  
45 GEIS, along with site-specific application to the proposed Dewey-Burdock ISR Project.  
46 Table 4.13-1 summarizes the potential dose to workers and the public from the accident  
47 scenarios using data adapted from the GEIS.

1

**Table 4.13-1. Generic Accident Dose Analysis for ISR Operations**

Accident Scenario	Maximum Dose to Workers	Maximum Dose to Public
Thickener spill	50 mSv [5,000 mrem]	0.25 mSv [25 mrem]
Pregnant lixiviant, resin spill	13 mSv [1,300 mrem]	<0.13 mSv [13 mrem]
Yellowcake dryer release	0.088 Sv [8.8 rem] Generic <0.01 Sv [1 rem]	<1 mSv [100 mrem]
Data adapted from the GEIS (NRC, 2009a)		

2

3 Thickener Failure and Spill. Thickeners are used to concentrate the yellowcake (U<sub>3</sub>O<sub>8</sub>) slurry  
 4 before it is transferred to the dryer or packaged for offsite shipment. Yellowcake may be  
 5 inadvertently released to the atmosphere through a thickener failure or spill. The accident  
 6 scenario evaluated in GEIS Section 4.2.11.2.2 assumed a tank or pipe leak that releases  
 7 20 percent of the thickener outside of the processing building. The analyses included a variety  
 8 of wind speeds, stability classes, release durations, and receptor distances. A minimum  
 9 receptor distance of 500 m [1,640 ft] was selected because it was found to be the shortest  
 10 distance between a processing facility and an urban development for current operating ISR  
 11 facilities. Offsite, unrestricted doses from such a U<sub>3</sub>O<sub>8</sub> spill could result in a dose of 0.25 mSv  
 12 [25 mrem], or 25 percent of the annual public dose limit of 1 mSv [100 mrem] with negligible  
 13 external doses based on sufficient distance between the facility and receptor (NRC, 2009a).  
 14 Because the nearest onsite resident is located 1 km [0.6 mi] south of the proposed wellfields in  
 15 the Dewey area and the nearest offsite resident is located 0.64 km [0.4 mi] south of the  
 16 proposed permit boundary and 1.45 km [0.9 mi] from proposed wellfields in the Burdock area,  
 17 the potential dose from a similar accident scenario involving a thickener failure or spill at the  
 18 proposed project would be even less.

19

20 The applicant also discussed the accident analysis of a catastrophic tank failure involving a  
 21 yellowcake thickener (Mackin, et al., 2001) as a worst-case accident scenario (Powertech,  
 22 2010a). The applicant’s analysis was based on an accident described in Mackin, et al. (2001)  
 23 that involved a thickener containing 278 m<sup>3</sup> [73,500 gal] of yellowcake slurry. The applicant’s  
 24 proposed yellowcake thickener is sized to contain 143 m<sup>3</sup> [37,800 gal] of yellowcake slurry. Two  
 25 yellowcake thickener vessels are planned for the central processing plant for a combined  
 26 capacity of 286 m<sup>3</sup> [75,600 gal]. The plan for the central processing plant at the proposed  
 27 project also includes a 15.2-cm [6-in]-high concrete containment curb (Powertech, 2011). The  
 28 capacity of the curbed area would be 304 m<sup>3</sup> [80,308 gal]; it would contain the entire contents of  
 29 both thickeners in the event both thickeners failed simultaneously and spilled their entire  
 30 contents onto the floor of the central processing plant before the contents flowed into floor  
 31 sumps (Powertech, 2011). The sumps would provide additional temporary containment  
 32 capacity. The total containment capacity of curbs and sumps at the proposed project will  
 33 exceed 200 percent of the largest liquid-containing tank or vessel in the central processing plant  
 34 (Powertech, 2011). Based on the design of the central plant, a catastrophic yellowcake  
 35 thickener spill at the proposed project will be similar in volume to that evaluated in Mackin, et al.  
 36 (2001) but will be contained in the central plant structure. Therefore, potential doses to the  
 37 public will be smaller and well within the annual public dose limit of 1 mSv [100 mrem].

38

39 As discussed in GEIS Section 4.2.11.2.2, doses to unprotected workers inside the facility from a  
 40 thickener failure or spill have the potential to exceed the annual dose limit of 0.05 mSv [5 mrem]  
 41 if timely corrective measures are not taken. In addition, the applicant is required to implement  
 42 an NRC-approved radiation protection program to protect occupational workers and ensure  
 43 that radiological doses are ALARA. The applicant’s radiation protection program includes

1 commitments for implementing management controls, radiation safety training, radon monitoring  
2 and sampling, and audit programs (Powertech, 2011). These protection measures, along with  
3 engineering controls such as concrete curbs and sumps to contain process spills at the central  
4 processing plant, will reduce worker exposures and the resulting doses to a small fraction of  
5 those evaluated.  
6

7 Pregnant Lixiviant and Loaded Resin Spills. Process equipment (ion-exchange columns, drying  
8 and packing facilities) will be located on curbed concrete pads to prevent any liquids from  
9 exiting the building via spills or leaks and contaminating the outside environment (NRC, 2009a).  
10 The total containment capacity of curbs and sumps at the proposed project will exceed 200  
11 percent of the largest liquid-containing tank or vessel in the central processing plant (Powertech,  
12 2011). The primary radiation source for liquid releases within the facility will be the resulting  
13 airborne radon (Rn-222) released from the liquid or resin tank spill.  
14

15 The radon accident release scenario assumes a pipe or valve of the ion-exchange system,  
16 containing pregnant lixiviant, develops a leak and releases (almost instantaneously) all present  
17 Rn-222 at a high activity level  $\{2.96 \times 10^7 \text{ Bq/m}^3 [8 \times 10^5 \text{ pCi/L}]\}$ . For a 30-minute exposure, the  
18 dose to a worker located inside the central plant performing light activities without respiratory  
19 protection was calculated to be 13 mSv [1,300 mrem], which is below the 10 CFR Part 20  
20 occupational annual dose limit. The analysis did not evaluate public dose; however, because  
21 atmospheric transport offsite will reduce the airborne levels by several orders of magnitude, any  
22 dose to a member of the public will be less than the 1 mSv [100 mrem] public dose limit of  
23 10 CFR Part 20 (see Table 4.13-1). The applicant's radiation protection program's controls and  
24 monitoring measures will be expected to minimize the magnitude of any such release and  
25 further reduce the consequences of this type of accident. Typical control and monitoring  
26 measures will include radiation and occupational monitoring, respiratory protection, engineering  
27 controls, standard operating procedures for spill response and cleanup, and worker training in  
28 radiological health and emergency response (Powertech, 2011).  
29

30 The applicant also described an accident involving a process tank failure (Powertech, 2009a).  
31 The applicant indicated that the central processing plant at the proposed project will be  
32 designed to control and confine liquid spills from tanks should they occur. The central plant  
33 building structure will be designed with a 15.2-cm [6-in] concrete curb designed to contain liquid  
34 spills from the leakage or rupture of a process vessel and would direct any spilled solution to a  
35 floor sump (see SEIS Section 2.1.1.1.2.1). The floor sump system will be designed to direct any  
36 spilled solutions back into the plant process circuit or to the waste disposal system. As noted  
37 previously, the total containment capacity of curbs and sumps at the proposed project will  
38 exceed 200 percent of the largest liquid-containing tank or vessel in the central processing plant  
39 (Powertech, 2011). Bermed areas, tank containments, and/or double-walled tanks are designed  
40 to perform a similar function for any process chemical vessels located outside the central plant  
41 building (Powertech, 2009a).  
42

43 Yellowcake Dryer Accident Release. Dryers used to produce yellowcake powder from  
44 yellowcake slurry are another source of accidental release of radionuclides. A multiple-hearth  
45 dryer is capable of releasing yellowcake powder inside the processing building as a result of an  
46 explosion. This scenario was evaluated in GEIS Section 4.2.11.2.2 to establish a bounding  
47 condition for other accident scenarios involving dryers. The analysis in the GEIS assumes that  
48 about 4,309 kg [9,500 lb] of uranium yellowcake is released within the building area housing the  
49 dryer and that 1 kg [2.2 lb] is subsequently released as an airborne effluent to the outside  
50 atmosphere as a 100 percent respirable powder. Due to the nature of the material, most of the  
51 yellowcake would rapidly fall out of airborne suspension. For the occupationally exposed

1 worker using respiratory protection, which is the normal mode during dryer access and drum-  
2 filling operations, the dose was calculated to be 0.088 Sv [8.8 rem], which exceeds the annual  
3 occupational dose limit of 0.05 Sv [5 rem] established in 10 CFR Part 20. The amount assumed  
4 to remain airborne and to be transported outside the building for atmospheric dispersion to an  
5 offsite location would be 1 kg [2.2 lb] of yellowcake. The rapid fallout within the building and the  
6 atmospheric dispersion would significantly reduce the exposure to members of the public to  
7 about  $6.5 \times 10^{-4}$  Sv [65 mrem] (NRC, 1980), which is less than the 10 CFR Part 20 public dose  
8 limit of 1 mSv [100 mrem].  
9

10 The applicant proposes to use a rotary vacuum dryer with heat-transfer fluid that circulates  
11 through the dryer shell (Powertech, 2009a). This configuration separates the heater combustion  
12 source from the dryer itself, thereby mostly eliminating the possibility of an explosion, which is  
13 the initiating event for the assumed catastrophic failure and significant release of dryer  
14 radioactive content. Additionally, NRC will require the applicant to have emergency response  
15 procedures in place to mitigate worker exposures. Emergency training drills, dosimetry,  
16 respiratory protection, contamination control, and decontamination will all be required elements  
17 of the applicant's radiation protection program that will further reduce the consequences of a  
18 dryer accident.  
19

20 Accident Analysis Conclusions. In the unlikely event of an unmitigated accident, and depending  
21 on the type of accident, potential doses to workers may result in a MODERATE impact to  
22 occupational health and safety. However, there will be only a SMALL impact to public health  
23 and safety. Typical protection measures, such as radiation and occupational monitoring,  
24 respiratory protection, standard operating procedures for spill response and cleanup, and  
25 worker training in radiological health and emergency response, will be required as a part of the  
26 applicant's NRC-approved radiation protection program (Powertech, 2011). These procedures  
27 and plans will reduce the radiological consequences to workers from accidents. Therefore,  
28 NRC staff conclude that the overall radiological impacts from accidents for the Class V injection  
29 well disposal option will be SMALL.  
30

#### 31 4.13.1.1.2.3 Nonradiological Impacts from Normal Operations 32

33 GEIS Section 4.2.11.2.4 identifies the various chemicals, hazardous and nonhazardous, that  
34 are typically used at ISR facilities. The GEIS also identifies the typical quantities of these  
35 chemicals that are used. The use of hazardous chemicals at ISR facilities is controlled under  
36 several regulations that are designed to provide adequate protection to workers and the public.  
37 The primary regulations applicable to use and storage include the following:  
38

- 39 • 40 CFR Part 68, Chemical Accident Prevention Provisions. This regulation lists  
40 regulated toxic substances and threshold quantities for accidental release prevention.
- 41 • 29 CFR 1910.119, OSHA Standards (which includes Process Safety Management).  
42 This regulation lists highly hazardous chemicals, including toxic and reactive materials  
43 that have the potential for a catastrophic event at or above the threshold quantity.
- 44 • 40 CFR Part 355, Emergency Planning and Notification. This regulation lists extremely  
45 hazardous substances and their threshold planning quantities for the development and  
46 implementation of emergency response procedures. A list of reportable quantity values  
47 is also provided for reporting releases.

1 • 40 CFR 302.4, Designation, Reportable Quantities, and Notification—Designation of  
2 Hazardous Substances. This regulation lists Comprehensive Environmental Response,  
3 Compensation, and Liability Act hazardous substances compiled from the Clean Water  
4 Act, Clean Air Act, Resource Conservation and Recovery Act, and the Toxic Substances  
5 and Control Act.

6 Chemicals would be utilized at the proposed Dewey-Burdock ISR Project during the extraction  
7 process and during restoration of groundwater quality (see SEIS Section 2.1.1.1.3). The  
8 hazardous chemicals and their associated protective provisions expected to be used at the  
9 proposed project are as follows:

- 10
- 11 • Sodium chloride (NaCl) and sodium bicarbonate (NaHCO<sub>3</sub>)—Systems utilizing these  
12 chemicals will be designed to industry standards. These chemicals will be stored in  
13 tanks inside the central processing plant.
  - 14 • Barium chloride (BaCl<sub>2</sub>)—Systems utilizing these chemicals will be designed to industry  
15 standards. Barium chloride will be stored in tanks inside a metal building adjacent to the  
16 radium settling and storage ponds.
  - 17 • Hydrochloric acid (HCl) and sulfuric acid (H<sub>2</sub>SO<sub>4</sub>)—Due to the quantities that will be  
18 used, reporting will be required under 40 CFR 302.4. The hydrochloric acid and sulfuric  
19 acid storage tanks will be located away from other process tanks to prevent accidental  
20 mixing with other chemicals.
  - 21 • Hydrogen peroxide [50 percent (H<sub>2</sub>O<sub>2</sub>)]—Because the concentration will be <52 percent,  
22 no additional regulatory protective measures will be required. Bulk storage tanks for the  
23 hydrogen peroxide will be located outside the central processing plant.
  - 24 • Carbon dioxide (CO<sub>2</sub>)—Carbon dioxide will be stored adjacent to the plant facilities.  
25 Floor-level ventilation and low-point carbon dioxide monitors will be installed to prevent a  
26 buildup of carbon dioxide in occupied areas.
  - 27 • Oxygen (O<sub>2</sub>)—Oxygen will be stored near, but a safe distance from, plant facilities or  
28 within wellfield areas. The oxygen storage facility will be designed to meet industry  
29 standards contained in National Fire Protection Association 50—(National Fire  
30 Protection Association, 2001). Procedures will be developed for releases or fires in the  
31 oxygen system.
  - 32 • Sodium hydroxide (NaOH)—Systems utilizing NaOH will be designed to industry  
33 standards and stored in tanks outside the central processing plant.
  - 34 • Diesel, gasoline, and bottled gases—Systems utilizing these chemicals will be  
35 designed to industry standards. All bulk quantities of these chemicals will be stored  
36 outside of plant facilities. All gasoline and diesel storage tanks will be above ground  
37 and within secondary containment structures that are designed and constructed to meet  
38 EPA requirements.

39 The typical onsite quantities for some of these chemicals may exceed the regulated, minimum  
40 reporting quantities and trigger an increased level of regulatory oversight regarding possession  
41 (type and quantities), storage, use, and disposal practices (NRC, 2009a). Compliance with



1 applicable regulations reduces the likelihood of a release, which may result in injury or illness to  
2 an exposed worker. Because chemicals used in the ISR process are stored and used in or near  
3 plant facilities and wellfields, offsite impacts of a chemical spill will be SMALL and do not  
4 typically pose a significant risk to the public. Workers involved in a response and cleanup to a  
5 chemical spill may experience MODERATE impacts if the proper emergency and cleanup  
6 procedures and worker training were not available or were inadequate. Risk assessments  
7 completed in NUREG/CR-6733 (Mackin, et al., 2001) identified anhydrous ammonia and bulk  
8 acid (sulfuric and hydrochloric) storage as the chemicals with the greatest potential for impacts  
9 to occupational and public safety.

10  
11 In general, the handling and storage of chemicals at the proposed project will follow standard  
12 industrial safety practices. The applicant has committed to developing and implementing  
13 standard operating procedures regarding receiving, storing, handling, and disposing of  
14 chemicals (Powertech, 2009a). The applicant is also required to comply with EPA, SDDENR,  
15 and OSHA regulations regarding inspections and the industrial and environmental safety  
16 aspects associated with the use of chemicals. South Dakota Occupational Safety and Health  
17 Administration regulates the industrial safety aspects associated with the use of hazardous  
18 chemicals. At the proposed project site, bulk chemicals will be stored in areas at a distance  
19 from the processing facilities, which will minimize the risk to public and worker health and safety  
20 (Powertech, 2009a). As described in SEIS Section 2.1.1.1.2.1, bulk storage tanks for process  
21 chemicals, such as sulfuric acid, hydrochloric acid, sodium hydroxide, and hydrogen peroxide,  
22 will be outside the central processing plant in concrete secondary containment basins designed  
23 to contain 110 percent of the tank volume plus withstand a 25-year, 24-hour storm event. The  
24 secondary containment basins will be separate from the containment basins for other chemical  
25 systems. The types and quantities of chemicals (hazardous and nonhazardous) identified for  
26 use at the proposed project are consistent with those evaluated in the GEIS. The information  
27 the applicant provided regarding chemicals does not give NRC any reason to question the GEIS  
28 conclusions regarding potential impacts to public or occupational health and safety. Therefore,  
29 NRC staff conclude that the nonradiological impacts during normal operations for the Class V  
30 injection well disposal option will be SMALL.

#### 31 32 4.13.1.1.2.4 Nonradiological Impacts from Accidents

33  
34 The risks from accidents associated with the use of the typical hazardous and nonhazardous  
35 chemicals for ISR operations are not different from those for other typical industrial applications.  
36 Potential nonradiological accidents impacts include high consequence chemical release events  
37 (e.g., of ammonia) involving both workers and nearby populations. In GEIS Section 4.2.11.2.2,  
38 NRC staff state that the likelihood of such release events will be low based on historical  
39 operating experience at NRC-licensed facilities, primarily due to operators following commonly  
40 applied chemical safety and handling protocols. NRC staff concluded in the GEIS that  
41 nonradiological impacts due to accidents will be expected to be SMALL offsite and potentially  
42 MODERATE for workers involved in accident response and cleanup.

43  
44 GEIS Appendix E, Hazardous Chemicals, provides an accident analysis for the more hazardous  
45 chemicals. This accident analysis indicates that chemicals commonly used at ISR facilities can  
46 pose a serious safety hazard if not properly handled. The GEIS does not evaluate potential  
47 hazards to workers or the public due to specific types of high consequence, low probability  
48 accidents (e.g., a fire or large magnitude sudden release of chemicals from a major tank rupture  
49 or piping system rupture). The application of common safety practices for handling and use of  
50 chemicals is expected to decrease the likelihood of these high consequence events. The spills

1 of reportable quantities from chemical bulk storage areas must be reported to SDDENR in  
2 accordance with ARSD Chapter 74:34 (Regulated Substance Discharges) and to EPA in  
3 accordance with 40 CFR Part 302 (Comprehensive Environmental Response, Compensation,  
4 and Liability Act). These procedures and reporting requirements would mitigate the impacts of  
5 an accident involving hazardous and nonhazardous chemicals.  
6

7 The types and quantities of chemicals (hazardous and nonhazardous) to be used at the  
8 proposed project do not differ from those evaluated in the GEIS. Nor is there any new or  
9 significant information that conflicts with the conclusions drawn in the GEIS regarding the  
10 potential nonradiological impacts on public and occupational health and safety from chemical  
11 accidents. Offsite impacts involving hazardous and nonhazardous chemicals will be SMALL  
12 and do not typically pose a significant risk to the public. Workers involved in a response and  
13 cleanup could experience MODERATE impacts, but training requirements and adherence to  
14 established procedures will reduce the impact to SMALL. Based on the foregoing analysis  
15 and the GEIS conclusions, for the Class V injection well disposal option at the proposed  
16 Dewey-Burdock ISR Project, the impacts from potential accidents for both occupationally  
17 exposed workers and members of the public will be SMALL.  
18

#### 19 4.13.1.1.3 Aquifer Restoration Impacts 20

21 For the Class V injection well disposal option, the proposed aquifer restoration activities are  
22 similar to activities that will take place during operations (e.g., operation of wellfields,  
23 wastewater treatment and disposal). Therefore, the potential impact on public and occupational  
24 health and safety would be expected to be similar to the operational impacts. The reduction or  
25 elimination of some operational activities (e.g., yellowcake production and drying, remote  
26 ion-exchange) will further limit potential worker and public health and safety hazards. The  
27 radiation doses associated with restoration are included in the operations assessment in  
28 Section 4.13.1.1.2.1. Similarly, nonradiological hazards during aquifer restoration are assessed  
29 in Section 4.13.1.1.2.3. Accident consequences would be expected to be smaller than those  
30 evaluated in Sections 4.13.1.1.2.2 and 4.13.1.1.2.4. Therefore, for the Class V injection well  
31 disposal option, aquifer restoration will be expected to have a localized SMALL occupational  
32 impact on workers (primarily from radon gas) and to the general public.  
33

#### 34 4.13.1.1.4 Decommissioning Impacts 35

36 Prior to decommissioning, the applicant will have to submit a decommissioning plan for NRC  
37 review and approval at least 12 months before any decommissioning activities begin. The plan  
38 will need to include the types of safety information described in the GEIS. The applicant will  
39 also be required to comply with any site-specific, NRC-established license conditions.  
40 Additionally, the applicant will be subjected to NRC safety inspections during the course of  
41 decommissioning activities.  
42

43 The applicant's proposal does not contain any new or significant information that questions the  
44 conclusions in the GEIS regarding potential impacts to public and occupational health and  
45 safety from decommissioning. The majority of safety issues that are addressed during  
46 decommissioning involve radiological hazards at the facility (NRC, 2009a). Removal of  
47 nonradiological hazardous chemicals would be conducted in accordance with applicable state  
48 and federal hazardous waste disposal and occupational health and safety requirements.  
49 Following decommissioning, the site could be released for unrestricted use in conformance with  
50 NRC license conditions and the dose criteria for site release in 10 CFR Part 40, Appendix A.  
51 The criteria in 10 CFR Part 40, Appendix A limit the dose from radiological contamination that

1 may exist at the site after decommissioning is completed to levels that are sufficiently low to  
2 protect public health and safety.

3  
4 Assuming NRC review and approval of the applicant's decommissioning plan, the  
5 applicant's compliance with any applicable license conditions, and regular NRC inspection  
6 and enforcement activities, the anticipated impact from decommissioning for the Class V  
7 injection well disposal option will be short term and SMALL.

#### 8 9 **4.13.1.2 Disposal Via Land Application**

10  
11 If the applicant cannot obtain a permit for Class V injection wells from EPA, it proposes to  
12 dispose of liquid waste by land application (see SEIS Section 2.1.1.1.2.4.2). The locations of  
13 land application areas are shown in Figure 4.13-1. The following sections discuss how the  
14 land application option could potentially affect health and safety during various phases of the  
15 ISR lifecycle.

##### 16 17 **4.13.1.2.1 Construction Impacts**

18  
19 Construction activities and the potential impact on occupational health and safety for the land  
20 application liquid waste option will be similar to those for the Class V injection well disposal  
21 option. Instead of installing four to eight Class V injection wells, the land application option will  
22 require the installation of irrigation areas and equipment (e.g., center pivot irrigation systems)  
23 and the placement and construction of additional infrastructure (e.g., storage ponds for  
24 non-irrigation periods).

25  
26 For the land application option, the important radiation exposure pathways during construction  
27 will be the same as for the Class V injection well disposal option. These pathways will include  
28 direct exposure, inhalation, or ingestion of radionuclides during well construction; construction  
29 activities that disturb soils; and fugitive dust from vehicular traffic. As described in SEIS  
30 Section 4.13.1.1.1, the average concentrations of radionuclides in soils at the proposed  
31 Dewey-Burdock site are low. Standard dust control measures, such as water application and  
32 speed limits, will be implemented to control fugitive dust, and well development during the  
33 construction phase will release a negligible fraction of the amount of radon generated during  
34 operations. Therefore, NRC staff conclude that for the land application option the radiological  
35 impacts to worker and the general public during the construction phase will be SMALL.

36  
37 As described in SEIS Section 4.13.1.1.1, the nonradiological impacts and potential human  
38 exposures from diesel equipment emissions during construction will be SMALL because the  
39 releases are usually of short duration and are readily dispersed into the atmosphere.  
40 Section 4.7.1 details the potential impacts to air quality from diesel emissions, including  
41 comparisons to health-based standards. Furthermore, as described in SEIS Section 4.7.1.1,  
42 NRC staff concluded that despite use of dust control measures, short-term and intermediate  
43 MODERATE impacts from fugitive dust are possible, but average air quality is expected to  
44 comply with ambient air standards. The NRC staff therefore conclude that overall, for the land  
45 application option, the nonradiological impacts on workers and the general public during the  
46 construction phase will be SMALL.

## 1 4.13.1.2.2 Operations Impacts

2  
3 4.13.1.2.2.1 Radiological Impacts from Normal Operations

4  
5 For the land application liquid waste option, the potential impacts on public and occupational  
6 health and safety during operations will be similar to the impacts for the Class V injection well  
7 disposal option described in SEIS Section 4.13.1.1.2.1. Radon gas is the only radiological  
8 airborne effluent emitted during normal operations at ISR wellfields and at processing facilities  
9 that use vacuum dryer technology. Because the applicant plans to dry yellowcake using a  
10 rotary vacuum dryer (see SEIS Section 2.1.1.1.6.1.2), emissions other than radon during normal  
11 operations are not expected.

12  
13 The applicant used the MILDOS computer code to model sources of radon emission, including  
14 land application of treated wastewater, wellfield operations, central processing plant operations,  
15 and resin transfers in the satellite facility (Powertech, 2009a, 2011). As discussed in SEIS  
16 Section 4.13.1.1.2.1, NRC reviewed the applicant's radiological impact modeling and verified  
17 that appropriate exposure pathways were modeled and reasonable input parameters  
18 were used.

19  
20 Results of the applicant's modeling (Powertech, 2011) indicated that the maximum TEDE of  
21 0.06 mSv/yr [6.0 mrem/yr] is located southeast of the Dewey satellite facility within the proposed  
22 project boundary (Figure 4.13-1). This dose is 6 percent of the 10 CFR Part 20 public dose limit  
23 of 1 mSv/yr [100 mrem/yr]. Thus, the 10 CFR Part 20 public dose limit is not exceeded at any  
24 property boundary. The applicant's calculations also demonstrated that land application  
25 sources accounted for 80 percent of the TEDE at this location (Powertech, 2009a).

26  
27 The maximum TEDE at a residence was 0.0448 mSv/yr [4.48 mrem/yr] at Spencer Ranch,  
28 located approximately 2 km [1.25 mi] northwest of the proposed central processing plant in the  
29 Burdock area (see location AMS-02 in SEIS Figure 4.13-1). This is 4.48 percent of the  
30 10 CFR Part 20 public dose limit of 1 mSv/yr [100 mrem/yr]. Therefore, the TEDE at nearby  
31 receptor locations will not exceed the public dose limit. The applicant's calculations also  
32 demonstrated that land application sources accounted for 62 percent of the TEDE at the most  
33 highly exposed residence (Powertech, 2009a).

34  
35 Because Rn-222 is the only radionuclide emitted during normal operations, the public  
36 dose requirements in 40 CFR 190.10 and the 0.1 mSv/yr [10 mrem/yr] constraint rule in  
37 10 CFR 20.1101 do not apply. However, even if 100 percent of the Rn-222 contained in  
38 production fluids was released to the atmosphere (instead of 10 percent as assumed in the  
39 applicant's calculations), the TEDE and Rn-222 air concentrations at the calculated receptor  
40 locations surrounding the facility will be less than the 1 mSv [100 mrem] public dose limit and  
41 the Rn-222 effluent concentration limit, respectively. Therefore, radiological dose impacts to the  
42 public from normal operations will be SMALL.

43  
44 In summary, for the land application option, potential radiation doses to occupationally  
45 exposed workers and members of the public during operations will be SMALL. Calculated  
46 radiation doses from the releases of radioactive materials to the environment are small fractions  
47 of the limits of 10 CFR Part 20 that have been established for the protection of public health  
48 and safety.

49  
50

#### 4.13.1.2.2.2 Radiological Impacts from Accidents

For the land application option, the types of accidents that could occur and their radiological impacts will be identical to those described in SEIS Section 4.13.1.1.2.2 for the Class V injection well disposal option. Therefore, the discussion of accident scenarios and the site-specific analysis in SEIS Section 4.13.1.1.2.2 for the Class V injection well disposal option applies equally to the land application option. Based on the discussion presented in SEIS Section 4.13.1.1.2.2, in the unlikely event of an unmitigated accident and depending on the type of accident, potential doses to workers at the proposed Dewey-Burdock ISR Project may result in a MODERATE impact to occupational health and safety, while doses to the general public will result in only a SMALL impact to public health and safety. However, typical protection measures, such as radiation and occupational monitoring, respiratory protection, standard operating procedures for spill response and cleanup, and worker training in radiological health and emergency response, will be required as a part of the applicant's NRC-approved Radiation Protection Program (Powertech, 2011). These procedures and plans will reduce the radiological consequences to workers from accidents. Therefore, NRC staff conclude that for the land application option, the overall radiological impacts from accidents will be SMALL.

#### 4.13.1.2.2.3 Nonradiological Impacts from Normal Operations

For the land application option, the types and quantities of chemicals (hazardous and nonhazardous) and the related impacts during operations will be the same as those described in SEIS Section 4.13.1.1.2.3 for the Class V injection well disposal option. The discussion of the chemicals used in the ISR process, handling and storage of these chemicals, and regulations designed to protect workers and the public in SEIS Section 4.13.1.1.2.3 for the Class V injection well disposal option applies equally to the land application option. The applicant must implement standard operating procedures regarding receiving, storing, handling, and disposing of chemicals and is required to comply with EPA, SDDENR, and OSHA regulations regarding inspections and the industrial and environmental safety aspects associated with the use of chemicals.

The types and quantities of chemicals (hazardous and nonhazardous) identified for use at the proposed Dewey-Burdock ISR Project are consistent with those evaluated in the GEIS. There is no new or significant information that changes the GEIS conclusions regarding potential impacts to public or occupational health and safety. Therefore, for the land application option, the nonradiological impacts during normal operations will be SMALL.

#### 4.13.1.2.2.4 Nonradiological Impacts from Accidents During Operations

For the land application option, the risks from accidents associated with the use of typical hazardous and nonhazardous chemicals are no different than those described in SEIS Section 4.13.1.1.2.4 for the Class V injection well disposal option. As described in SEIS Section 4.13.1.1.2.4, an accident analysis provided in GEIS Appendix E indicates that certain hazardous chemicals used at ISR facilities can pose a serious safety hazard if not properly handled. The applicant has committed to following standards put in place by relevant regulatory agencies and industries for handling and managing hazardous chemicals (Powertech, 2009b).

The types and quantities of chemicals (hazardous and nonhazardous) to be used at the proposed Dewey-Burdock ISR Project do not differ from those evaluated in the GEIS. There is no new or significant information that changes the conclusions in the GEIS regarding potential

1 nonradiological impacts on health and safety from chemical accidents. Offsite impacts involving  
2 hazardous and nonhazardous chemicals will be SMALL and do not typically pose a significant  
3 risk to the public. Workers involved in a response and cleanup may experience MODERATE  
4 impacts, but training requirements and adherence to established procedures will reduce the  
5 impact to SMALL. Based on the foregoing analysis and the GEIS conclusions, for the land  
6 application option, the impacts from potential accidents for both occupationally exposed workers  
7 and members of the public will be SMALL.

#### 8 9 4.13.1.2.3 Aquifer Restoration Impacts

10  
11 For the land application option, the proposed aquifer restoration activities are similar to activities  
12 during operations (e.g., operation of wellfields, wastewater treatment and disposal in land  
13 application areas). Therefore, the potential impacts on public and occupational health and  
14 safety will be expected to be similar to the operational impacts. The reduction or elimination of  
15 some operational activities (e.g., yellowcake production and drying, remote ion-exchange) will  
16 further limit the relative magnitude of potential worker and public health and safety hazards.  
17 The radiation doses associated with restoration are included in the operations assessment in  
18 Section 4.13.1.2.2.1. Similarly, nonradiological hazards during aquifer restoration are assessed  
19 in Section 4.13.1.2.2.3. Accident consequences will be expected to be smaller than those  
20 evaluated in Sections 4.13.1.2.2.2 and 4.13.1.2.2.4. Accordingly, for the land application option,  
21 a localized SMALL occupational impact to workers (primarily from radon gas) and to the general  
22 public will be expected during the aquifer restoration phase.

#### 23 24 4.13.1.2.4 Decommissioning Impacts

25  
26 For the land application option, decommissioning procedures and activities will be similar to  
27 those described in SEIS Section 4.13.1.1.4 for the Class V injection well disposal option. Prior  
28 to decommissioning the proposed Dewey-Burdock ISR Project, the applicant will need to submit  
29 a decommissioning plan that includes the types of safety information described in the GEIS.  
30 The applicant will also need to comply with any site-specific, NRC-established license  
31 conditions. Additionally, the applicant will be subjected to NRC safety inspections during the  
32 course of decommissioning activities.

33  
34 Typically, the initial decommissioning steps include removal of hazardous chemicals; this will be  
35 conducted in accordance with applicable state and federal hazardous waste disposal and  
36 occupational health and safety requirements. Following decommissioning, the site could be  
37 released for unrestricted use in conformance with the conditions of the NRC license and the  
38 dose criteria for site release in 10 CFR Part 40, Appendix A. The criteria in 10 CFR Part 40,  
39 Appendix A limit the dose from radiological contamination that may exist at the site after  
40 decommissioning is completed to levels that are sufficiently low to protect public health  
41 and safety.

42  
43 The applicant's proposal does not contain any new or significant information that changes the  
44 GEIS's conclusions regarding potential impacts to public and occupational health and safety.  
45 The applicant will be required to submit a detailed decommissioning plan for NRC approval at  
46 least 12 months before decommissioning activities begin. With the combination of NRC review  
47 and approval of the plan, and compliance with any applicable license conditions and regular  
48 NRC inspection and enforcement activities, the anticipated impact from decommissioning for the  
49 land application option at the proposed project will be short-term and SMALL.

50  
51

### 4.13.1.3 Disposal Via Combination of Class V Injection and Land Application

If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is insufficient to dispose of all liquid wastes, the applicant proposes to use a combination of deep well disposal via Class V injection wells and land application (see SEIS Section 2.1.1.1.2.4.3). For the combined disposal option, land application facilities and infrastructure will be constructed, operated, restored, and decommissioned on an as-needed basis depending on the Class V injection well disposal capacity (Powertech, 2011). Based on the discussions in SEIS Sections 4.13.1.1 and 4.13.1.2, the potential impacts to occupational and public health and safety would be similar regardless of whether Class V injection well disposal or land application is used, except for radiological impacts from normal operations. As described in SEIS Sections 4.13.1.1.2.1 and 4.13.1.2.2.1, the 10 CFR Part 20 public dose limit of 1 mSv/yr [100 mrem/yr] would not be exceeded at the project boundary or nearby receptor locations under either the Class V injection well disposal option or the land application option during normal operations. Calculated maximum TEDEs were 0.012 mSv [1.2 mrem/yr] for the Class V injection well disposal option and 0.06 mSv/yr [6 mrem/yr] for the land application option. Calculated maximum TEDEs at a residence were 0.017 mSv/yr [1.7 mrem/yr] for the Class V injection well disposal option and 0.0448 mSv/yr [4.48 mrem/yr] for the land application option. Because only a portion of land irrigation areas would be operated for the combined disposal option, maximum calculated TEDEs are expected to lie between or be bounded by the maximum TEDEs calculated for the Class V injection well disposal option and the land application option. Therefore, the 10 CFR Part 20 public dose limit will not be exceeded at the project boundary or nearby receptor locations for the combined disposal option. Thus, NRC staff conclude that during the operations phase, the radiological impacts to occupational and public health and safety for the combined disposal option will be SMALL. In addition, as noted previously, the potential impacts to occupational and public health and safety for all other phases of the proposed project will be SMALL regardless of whether Class V injection well disposal or land application is used. Therefore, NRC staff conclude that during all other phases the radiological and nonradiological impacts to occupational and public health and safety for the combined disposal option will be SMALL, as summarized in Table 4.13-2.

### 4.13.2 No-Action (Alternative 2)

Under the No-Action alternative, there would be no occupational exposure. There would be no additional radiological exposures to the general public from project-related effluent releases, and there would be no impact on long-term environmental radiological conditions. Radiation exposure and risk to the general public would continue to be determined by exposure from natural background, medical-related exposures, and exposures from existing residual contamination.

## 4.14 Waste Management Impacts

As described in GEIS Section 4.4.12, environmental impacts on waste management could occur during all phases of the ISR lifecycle. The proposed project will generate radiological and nonradiological liquid and solid materials that must be handled and disposed of properly. The primary radiological materials that must be disposed are process-related liquids and process-contaminated structures, equipment, and soils, all of which are classified as byproduct material.

1

**Table 4.13-2. Significance of Occupational and Public Health and Safety Impacts for the Proposed Liquid Waste Disposal Options for Each Phase of the Proposed Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction			
Radiological	SMALL	SMALL	SMALL
Nonradiological	SMALL	SMALL	SMALL
Operations			
Radiological (Normal Operations)	SMALL	SMALL	SMALL
Radiological (Accidents)	SMALL	SMALL	SMALL
Nonradiological (Normal Operations)	SMALL	SMALL	SMALL
Nonradiological (Accidents)	SMALL	SMALL	SMALL
Aquifer Restoration			
Radiological	SMALL	SMALL	SMALL
Nonradiological	SMALL	SMALL	SMALL
Decommissioning			
Radiological	SMALL	SMALL	SMALL
Nonradiological	SMALL	SMALL	SMALL
*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the Class V injection well and land application disposal options.			

2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12

Before operations could begin, NRC requires an ISR facility to have an agreement in place with a licensed disposal facility to accept byproduct material. NRC will require by license condition that the disposal agreement be in place before the initiation of operations. Lack of a signed disposal agreement will be grounds for a temporary cessation of operations.

GEIS Construction Phase Summary

In GEIS Section 4.4.12.1, NRC staff concluded that waste management impacts from the construction phase of an ISR facility will be SMALL. Because construction activities will be on a relatively small scale, a low volume of construction waste will be generated. (NRC, 2009a)



### GEIS Operations Phase Summary

According to GEIS Section 2.7, byproduct material generated during the operations phase at an ISR facility will primarily be liquid consisting of process bleed (1 to 3 percent of the process flow rate). NRC staff also noted in the GEIS that byproduct material will be generated from flushing of eluant to limit impurities, resin transfer wash, filter washing, uranium precipitation process wastes (brine), and plant washdown water. Treatment and disposal methods described in the GEIS for liquid byproduct material at ISR facilities were characterized as effective at reducing the volume of material prior to disposal at an approved facility. Solid byproduct material would be decontaminated and released for other use or disposed of at approved waste disposal facilities. NRC staff concluded in the GEIS that the waste management impact from disposal of byproduct material will be SMALL given the required preoperational disposal agreements between an applicant and a licensed byproduct material disposal site. The impact from hazardous waste disposal was expected to be SMALL because of the small volume of hazardous waste generated. The impact from disposal of nonhazardous solid waste was expected to be SMALL based on the available disposal capacity of municipal solid waste facilities. (NRC, 2009a)

### GEIS Aquifer Restoration Phase Summary

GEIS Section 4.4.12.3 described waste management activities that will occur during the aquifer restoration phase of an ISR project and noted that the same treatment and disposal options would be implemented as used during operations. Therefore, the waste management impacts will be similar to those during the operations phase of an ISR project. Some increase in wastewater volumes could occur, but the increase in volume will be offset by the decrease in production capacity. NRC staff concluded in the GEIS that the impact on waste management from aquifer restoration will be SMALL. (NRC, 2009a)

### GEIS Decommissioning Phase Summary

GEIS Section 2.6 stated that wastes generated from decommissioning an ISR facility will be predominantly byproduct material and nonhazardous solid waste. GEIS Section 4.4.12.4 stated that decommissioning byproduct material (including contaminated facility demolition materials, process and wellfield equipment, excavated soil, and pond bottoms) will be disposed of at a licensed facility. As stated previously, to ensure that sufficient disposal capacity is available for byproduct material (including that generated by decommissioning activities), NRC requires a preoperational agreement with a licensed disposal facility to accept byproduct material for disposal. NRC staff concluded in the GEIS that because the volume of byproduct material, chemical, and solid wastes generated during decommissioning will be small, the impact on waste management will also be SMALL. (NRC, 2009a)

Environmental impacts on waste management resources during the construction, operations, aquifer restoration, and decommissioning phases of the proposed ISR project are discussed next. The environmental impacts of the proposed waste management actions on other resources are evaluated within the applicable subsections of each impact analysis in this chapter.

**4.14.1 Proposed Action (Alternative 1)**

Under the proposed action, the types of waste streams that could be generated are discussed in SEIS Section 2.1.1.1.6. The primary radiological materials the proposed Dewey-Burdock ISR Project will dispose of are process-related liquid effluent and process-contaminated structures, equipment, and soils, all of which are classified as byproduct material. As described in SEIS Section 2.1.1.1.6.3, the applicant has identified White Mesa for disposal of solid byproduct material. The applicant's preferred method for disposal of liquid byproduct material is by Class V injection well. If a permit cannot be obtained from EPA for Class V injection, the applicant will pursue land application of treated liquid effluent. If the capacity of either method is limited, the applicant will pursue a combination of both Class V injection and land application. The impacts on waste management from the Class V injection well option are described in Section 4.14.1.1. The impacts on waste management from the land application option and combined Class V injection and land application are described in SEIS Sections 4.14.1.2 and 4.14.1.3. Alternative wastewater disposal options, including evaporation ponds and surface water discharge, are described in SEIS Section 4.14.1.4.

**4.14.1.1 Disposal Via Class V Injection Wells**

As described in SEIS Section 2.1.1.1.2.4, the applicant's preferred option for disposal of liquid wastes is deep well disposal via Class V injection wells. Potential environmental impacts on waste management from construction, operations, aquifer restoration, and decommissioning associated with the deep Class V injection well disposal option at the proposed Dewey-Burdock ISR Project are discussed in the following sections.

**4.14.1.1.1 Construction Impacts**

The primary wastes to be disposed of during this phase of the ISR facility lifecycle will be nonhazardous solid waste, such as building materials and piping. As discussed in SEIS Sections 2.1.1.1.6.3 and 3.13.2, the applicant has proposed to dispose of nonhazardous solid wastes at the Custer-Fall River Waste Management District landfill located at Edgemont, South Dakota, approximately 24 km [15 mi] southeast of the proposed Dewey-Burdock ISR Project site or at the Newcastle, Wyoming, landfill, approximately 64 km [40 mi] north of the proposed project site if additional capacity is needed (Powertech, 2010a). As described in SEIS Section 3.13.2, these landfills are not at or near capacity.

The proposed activities to manage construction waste generated by the proposed project are discussed in SEIS Section 2.1.1.1.6. The proposed action will annually generate a volume of 144 m<sup>3</sup> [188 yd<sup>3</sup>] of nonhazardous solid waste during the construction phase (SEIS Section 2.1.1.1.6.3), which is 1 percent or less of the annual volume of waste disposed at either the Custer-Fall River Waste Management District landfill or the Newcastle landfill (SEIS Section 3.13.2). Nonhazardous solid waste generated at the proposed annual rate for the duration of the construction phase (6 years) would account for 1 percent or less of the capacity of either landfill. Because there is available capacity and the ISR construction phase will annually generate a small volume, the NRC staff conclude the impact on waste management from the Class V injection well disposal option at the proposed project will be SMALL.

## 4.14.1.1.2 Operations Impacts

Liquid byproduct material generated during operations is composed of production bleed, waste brine streams from elution and precipitation, resin transfer wash, laundry water, plant washdown water, and laboratory chemicals (SEIS Section 2.1.1.1.6.2). The applicant estimates the maximum production of liquid byproduct material at any time considering concurrent uranium recovery operations and aquifer restoration activities is 746 L/min [197 gal/min] for the deep Class V disposal well option (Powertech, 2011). The applicant proposes to treat this combined liquid byproduct material stream onsite to remove radium and uranium by radium settling and ion exchange, respectively (SEIS Section 2.1.1.1.6.2). This will reduce radionuclide activities below the established NRC limits under 10 CFR Part 20, Appendix B, Table 2, Column 2 prior to injecting the material into a deep Class V disposal well (Powertech, 2011). 10 CFR Part 20, Appendix B, Table 2, Column 2 includes effluent concentration limits for natural uranium, Ra-226, Pb-210 and Th-230. As stated in Section 2.1.1.1.6.2, the applicant will have to meet applicable EPA and NRC requirements before injection in a deep Class V injection well begins. When evaluating permit applications for Class V wells, EPA considers the characteristics of the operation, the material proposed to be injected, and the surrounding environment and determines whether the proposed injection would endanger public health or the environment (EPA, 2012). An EPA permit, if granted, will also prohibit hazardous waste (as defined by RCRA) from being injected. NRC will require (i) liquid byproduct material to be treated prior to injection and (ii) treatment systems to be constructed, operated, and monitored to ensure requirements in 10 CFR Part 20, Subparts D and K and Appendix B are met. The applicant proposes to have 4 to 8 Class V injection wells with a capacity of 1,136 L/min [300 gal/min], sufficient to accommodate the estimated 746 L/min [197 gal/min] of liquid byproduct material generated from the proposed operation. Based on the applicant's proposal to obtain adequate disposal capacity as well as requirements to comply with EPA Class V disposal permit conditions, NRC effluent limits, and other NRC safety regulations, the NRC staff conclude that the waste management impacts from the disposal of liquid byproduct material via deep Class V injection wells during the ISR operation phase will be SMALL.

Solid byproduct material generated during operations could include maintenance and housekeeping rags and trash; packing materials; replaced components; filters; protective clothing; and solids removed from process pumps, vessels, and ponds. As discussed in SEIS Section 2.1.1.1.6.3, the applicant estimates, during the operational period and assuming combined operations and aquifer restoration, the proposed Dewey-Burdock facility will produce 22 m<sup>3</sup> [29 yd<sup>3</sup>] of solid byproduct material from radium settling ponds annually from the deep Class V disposal well option (Powertech, 2011). Solid byproduct material will be stored onsite within a restricted area until sufficient volume is generated for disposal. Based on the disposal options currently available and the disposal agreement that NRC requires prior to operations (SEIS Section 2.1.1.1.6.3), the NRC staff conclude that the impacts on waste management from the disposal of solid byproduct material during the ISR operations phase will be SMALL.

Nonhazardous solid wastes generated during operations could include facility trash, septic solids, and other uncontaminated solid wastes (e.g., piping, valves, instrumentation, and equipment). Because the proposed generation rate of nonhazardous solid waste (SEIS Section 2.1.1.1.6.3) will be a small percentage of the landfill capacity (SEIS Section 3.13.2), the NRC staff conclude the impact on waste management will be SMALL.

1 As discussed in SEIS Section 2.1.1.1.6.3, the applicant has stated it will likely be classified as a  
2 CESQG. The applicant will transport its hazardous waste to a permitted hazardous waste  
3 facility for disposal (Powertech, 2009a).

4  
5 Based on the type and quantity of byproduct material and waste expected to be generated and  
6 the available capacity for disposal, the NRC staff conclude the waste management activities  
7 during the ISR operations phase of the proposed Dewey-Burdock Project will have a SMALL  
8 impact on waste management resources.

#### 9 10 4.14.1.1.3 Aquifer Restoration Impacts

11  
12 For the proposed Dewey-Burdock Project, the applicant will use the same waste  
13 management systems for aquifer restoration as used during ISR operations discussed in SEIS  
14 Section 2.1.1.1.6.

15  
16 Liquid byproduct material generated during aquifer restoration is composed of reverse osmosis  
17 brine (SEIS Section 2.1.1.1.6.2). The applicant proposes to manage aquifer restoration  
18 wastewater (i.e., liquid byproduct material) by treating the wastewater by reverse osmosis and  
19 reinjecting the treated water (i.e., permeate) back into the aquifer production zone undergoing  
20 restoration (see SEIS Section 2.1.1.1.4.1). The applicant will combine the contaminants  
21 removed from water with operational wastewater and transfer the combined wastewater to the  
22 radium settling ponds for further treatment prior to disposal in the deep Class V wells. As stated  
23 in SEIS Section 2.1.1.1.6.2, the applicant will have to meet applicable EPA and NRC  
24 requirements before injection in a deep Class V disposal well begins. When evaluating permit  
25 applications for Class V wells, EPA considers the characteristics of the operation, the material to  
26 be injected, and the surrounding environment and determines whether the proposed injection  
27 will endanger public health or the environment (EPA, 2012). NRC will require liquid byproduct  
28 material to be treated prior to injection and treatment systems be constructed, operated, and  
29 monitored to ensure requirements in 10 CFR Part 20, Subparts D and K and Appendix B are  
30 met. The applicant proposes to have 4 to 8 Class V injection wells with a capacity of  
31 1,136 L/min [300 gal/min], sufficient to accommodate the estimated 746 L/min [197 gal/min] of  
32 liquid byproduct material generated from the proposed operation. Based on the applicant's  
33 proposal to obtain adequate disposal capacity as well requirements to comply with EPA Class V  
34 disposal permit conditions, NRC effluent limits, and other NRC safety regulations, the NRC staff  
35 conclude that the waste management impacts from the disposal of liquid byproduct material via  
36 deep Class V injection wells during the ISR aquifer restoration phase will be SMALL.

37  
38 Solid byproduct material generated during aquifer restoration could include maintenance and  
39 housekeeping rags and trash; packing materials; replaced components; filters; protective  
40 clothing; and solids removed from process pumps, vessels, and ponds. As discussed in SEIS  
41 Section 2.1.1.1.6.3, the applicant estimates, during the operational period and assuming  
42 combined operations and aquifer restoration, the proposed Dewey-Burdock facility will produce  
43 22 m<sup>3</sup> [29 yd<sup>3</sup>] of solid byproduct material from radium settling ponds annually from the deep  
44 Class V disposal well option (Powertech, 2011). Solid byproduct material will be stored onsite  
45 within a restricted area until sufficient volume is generated for disposal. Based on the disposal  
46 options currently available and the disposal agreement that NRC requires prior to operations  
47 (SEIS Section 2.1.1.1.6.3), the NRC staff conclude that the waste management impacts from  
48 the generation of byproduct material during the ISR operations phase will be SMALL.

49  
50 Nonhazardous solid wastes generated during aquifer restoration could include facility trash,  
51 septic solids, and other uncontaminated solid wastes (e.g., piping, valves, instrumentation, and

1 equipment). Because the proposed generation rate of nonhazardous solid waste (SEIS  
2 Section 2.1.1.1.6.3) will be a small percentage of the landfill capacity (SEIS Section 3.13.2), the  
3 NRC staff conclude the impact on waste management will be SMALL.

4  
5 As discussed in SEIS Section 2.1.1.1.6.3, the applicant has stated it will likely be classified as a  
6 CESQG. The applicant will transport its hazardous waste to a permitted hazardous waste  
7 facility for disposal (Powertech, 2009a).

8  
9 Based on the type and quantity of waste expected to be generated and the available  
10 capacity for disposal, the NRC staff conclude the waste management actions during the ISR  
11 aquifer restoration phase of the proposed project will have a SMALL impact on waste  
12 management resources.

#### 13 14 4.14.1.1.4 Decommissioning Impacts

15  
16 The anticipated decommissioning activities occurring at the proposed Dewey-Burdock ISR  
17 Project site will be comparable to those described in GEIS Section 2.6. The applicant proposed  
18 to conduct radiological surveys of decommissioned facilities and equipment and classify  
19 materials in accordance with the applicable disposition of the materials (Powertech, 2009b,  
20 2011), including decontamination, recycling and reuse, disposal as byproduct material at a  
21 licensed facility, or disposal as nonhazardous solid waste at a municipal solid waste landfill  
22 (Powertech, 2009b, 2011).

23  
24 As discussed in SEIS Section 2.1.1.1.6.3, the applicant's estimate for byproduct material  
25 generated from decommissioning the plant facilities and all wellfields (over a planned 2-year  
26 period) is 1,419 m<sup>3</sup> [1,856 yd<sup>3</sup>] for the deep Class V injection well disposal option (Powertech,  
27 2011). As discussed in SEIS Section 2.1.1.1.6.3, the applicant does not have a disposal  
28 agreement in place with a licensed site to accept solid byproduct material, and as discussed in  
29 SEIS Section 4.14.1.1.2, NRC will require that the applicant enter into a written agreement with  
30 a disposal site to ensure adequate capacity for byproduct material disposal. The applicant has  
31 proposed to pursue an agreement with the White Mesa site in Blanding, Utah, for disposal of  
32 solid byproduct material (SEIS Section 3.13.2). Based on the disposal options currently  
33 available for byproduct material and the disposal agreement which NRC will require by license  
34 condition prior to operations, the NRC staff conclude that the impact on waste management  
35 from the generation of byproduct material during decommissioning will be SMALL.

36  
37 The applicant's estimate of the total volume of nonhazardous solid waste that will be generated  
38 from decommissioning is 10,427 m<sup>3</sup> [13,638 yd<sup>3</sup>] for the deep Class V injection well disposal  
39 option (Powertech, 2011). From this estimate, the NRC staff derived an annual nonhazardous  
40 solid waste generation of 5,213 m<sup>3</sup> [6,819 yd<sup>3</sup>] from decommissioning by dividing the applicant's  
41 total estimate by 2 (the applicant's proposed decommissioning period in years). This estimated  
42 solid waste volume is greater than what was analyzed in the GEIS {715 m<sup>3</sup> [935 yd<sup>3</sup>]} and thus  
43 not bounded by the impact assessment described in the GEIS; therefore, the NRC staff  
44 considered additional site-specific information to evaluate impacts.

45  
46 Although permitted landfill disposal capacities of the Custer-Fall River Waste Management  
47 District landfill and the Newcastle landfill are currently available (SEIS Section 3.13.2),  
48 considering the proposed project duration and limited future disposal capacity, the NRC staff  
49 evaluated the estimated landfill capacities and demand at the time of decommissioning. Based  
50 on the current operational life of 12 years (SEIS Section 3.13.2), the Newcastle landfill will not

1 be open to accept waste at the planned time of decommissioning (15 and 16 years after the  
2 start of construction; Figure 2.1-1) unless the landfill capacity is expanded. The Custer-Fall  
3 River landfill, with an estimated operational life of 17 years after midyear 2012, will still be in  
4 operation at the time of decommissioning if project construction started in 2013; therefore, this  
5 landfill was evaluated in more detail. NRC staff projections suggest the remaining capacity of  
6 the Custer-Fall River landfill at the time of proposed decommissioning will be insufficient to  
7 accommodate all decommissioning nonhazardous solid waste and serve the regional annual  
8 demand for disposal capacity unless existing landfill capacity and operations are expanded.  
9 Furthermore, the NRC staff estimate the additional demand for capacity will consume the  
10 remaining landfill capacity at a faster rate with the landfill reaching full capacity approximately  
11 1 year earlier than current projections. The staff's projections supporting these conclusions are  
12 detailed in the following paragraphs.

13  
14 The NRC staff's landfill capacity analysis calculated the total disposal demand from mid-year  
15 2012 through the end of the proposed decommissioning period and compared it with the  
16 reported remaining landfill capacity as of mid-year 2012. NRC staff used this comparison of  
17 projected demand and capacity to evaluate whether sufficient capacity will be available to  
18 dispose of the additional waste from the proposed project. The total disposal demand of  
19 148,079 t [163,229 T] was based on the sum of the regional disposal demand<sup>1</sup> and the project  
20 disposal demand<sup>2</sup> from mid-2012 through the end of the proposed decommissioning period in  
21 2028. The projected demand exceeds the available capacity of 139,619 t [154,000 T]<sup>3</sup> by  
22 8,372 t [9,229 T].<sup>4</sup>

23  
24 The staff also evaluated the difference in the projected time the landfill will reach full capacity  
25 with and without disposal of waste from the proposed Dewey-Burdock ISR Project. The  
26 purpose of this analysis was to evaluate the impact of the additional disposal demand on the  
27 projected operational life of the landfill. The NRC staff calculated when the landfill would reach  
28 full capacity with the additional disposal of proposed project waste by first calculating the  
29 available landfill capacity at the end of 2027 after 1 year of decommissioning waste  
30 disposal and 15.5 years of post mid-2012 regional waste disposal.<sup>5</sup> Next, the NRC staff  
31 derived a combined monthly disposal demand<sup>6</sup> for year 2028 from the projected disposal rates  
32 for decommissioning waste and regional waste. At the combined monthly disposal demand, the

<sup>1</sup>The regional demand of 134,717 t [148,500T] was calculated based on the product of the annual average disposal volume received by the Custer-Fall River landfill of 8,160 t/yr [9,000 T/yr] (SEIS Section 3.13.2) and 16.5 (the number of years from mid-2012 to the end of proposed decommissioning in 2028).

<sup>2</sup>The project demand (i.e., total nonhazardous solid waste volume from decommissioning) of 13,354 t [14,729 T] is the volume of this waste from SEIS Section 2.1.1.1.6.3 converted to mass using 1.08T/yr<sup>3</sup> multiplier.

<sup>3</sup>The available landfill capacity reported in SEIS Section 3.13.2 as of the end of June 2012 is 139,619 t [154,000 T].

<sup>4</sup> The available capacity of 139,619 t [154,000 T] was subtracted from the total disposal demand of 148,079 t [163,229 T] (the sum of footnotes 1 and 2) to obtain the result of 8,372 t [9,229 T].

<sup>5</sup> The calculated available capacity at the beginning of year 2028 is 6,473 t [7,136 T]. This is the result of subtracting 133,150 [146,865 T] of the combined disposal demand (from regional and decommissioning wastes) for mid-2012 to year 2027 from the available landfill capacity as of mid-2012 of 139,619 t [154,000 T] (SEIS Section 3.13.2). The combined disposal demand was calculated as the product of the annual average disposal volume received by the Custer-Fall River landfill of 8,160 t/yr [9,000 T/yr] (SEIS Section 3.13.2) and 15.5 (the number of years from mid 2012 to the end of the first year of proposed decommissioning in 2027) added to the volume of nonhazardous decommissioning solid waste for year 2027 of 6,680 t [7,364 T] {half of the 2 year decommissioning total waste volume of 13,354 t [14,729 T]}.

<sup>6</sup>The combined monthly disposal demand for year 2028 of 1,237 t/month [1,364 T/month] is the sum of derived monthly disposal demands (i.e., waste generation rates) for proposed decommissioning and regional waste. Specifically, the derived monthly proposed decommissioning disposal demand is the total amount of proposed decommissioning waste of 13,354 t [14,729 T] for 2 years converted to a monthly rate of 557 t/month [614 T/month]. Similarly, the derived monthly regional disposal demand is the Custer-Fall River landfill annual average disposal amount of 8,160 t/yr [9000 T/yr] converted to a monthly rate of 680 t [750 T/month].

1 projected year 2028 remaining capacity of 6,473 t [7,136 T] would be depleted within the first  
2 half of 2028.<sup>7</sup> For comparison, the projected operational life of the landfill without disposal of  
3 waste from the proposed action (SEIS Section 3.13.2) is 17 years beyond mid-2012 or mid-year  
4 2029. Therefore, the analysis suggests disposal of waste from the proposed Dewey Burdock  
5 ISR Project will cause the landfill to reach full capacity 1 year earlier than expected if the  
6 proposed decommissioning was executed on schedule and regional disposal demand continued  
7 at the current rate.

8  
9 The potential for future expansion of capacity is being considered at both landfills (AET, Inc.,  
10 2011; SDDENR, 2010); however, specific long-term actions remain uncertain. If one of these  
11 landfills does not expand capacity in the future, the applicant will have to dispose of waste  
12 elsewhere. Another more distant and higher capacity landfill serving Rapid City is projected to  
13 be operational until 2050 (HDR Engineering Inc., 2010). Therefore, the staff consider regional  
14 capacity will be available during the period of decommissioning if local capacity is limited or  
15 otherwise unavailable.

16  
17 Based on the preceding capacity analysis, the NRC staff conclude that the potential impacts  
18 on waste management resources will vary depending on the long-term status of the existing  
19 local landfill resources. If local landfill capacity is not expanded prior to the proposed  
20 decommissioning period, the staff conclude that there will be no impacts to the Newcastle  
21 landfill because it will not be open to accept waste at the planned time of decommissioning and  
22 the proposed Dewey-Burdock ISR Project would not be able to dispose waste at that location.  
23 In turn, impacts to the Custer-Fall River landfill will be MODERATE because the increased  
24 demand for capacity will more rapidly consume the waste management resources during the  
25 last years of its projected operational life. Any waste disposed at the Rapid City landfill will have  
26 SMALL impacts based on the projected operational life and available capacity. Alternatively, if  
27 the local landfill capacity is expanded prior to the proposed project decommissioning phase, the  
28 impacts on the available capacity of the expanded landfill (Newcastle or Custer-Fall River) will  
29 be SMALL.

30  
31 The applicant estimates the volume of hazardous waste generated from decommissioning  
32 activities will be less than 91 kg [200 lb] (Powertech, 2009b). The hazardous waste streams  
33 from decommissioning will be similar to the waste streams generated during the ISR  
34 construction phase and could include used oil, batteries, and cleaning solvents. The applicant  
35 will have in place a hazardous material program that complies with applicable EPA and  
36 SDDENR requirements for its handling, storage, and disposal at approved facilities. Because  
37 the volume of hazardous wastes generated by the proposed action will be small and the waste  
38 will be handled, stored, and disposed of in accordance with applicable regulations, the NRC  
39 staff conclude the impacts on waste management will be SMALL.

40  
41 In summary, NRC staff conclude the impacts to waste management resources during the  
42 decommissioning phase of the proposed project for the deep Class V injection well disposal  
43 option will be SMALL for all materials except nonhazardous solid waste, which will be SMALL to  
44 MODERATE depending on the long-term status of the existing local landfill resources. Based  
45 on the type and quantity of waste expected to be generated and the available capacity for  
46 disposal, waste management actions during the decommissioning phase will have a SMALL

---

<sup>7</sup>The time to reach full capacity of 5.2 months was calculated as the ratio of the available year 2028 capacity of 6,473 t [7,136 T] from footnote 4 and the combined monthly disposal demand of 1,237 t/month [1,364 T/month] from footnote 5.

1 impact on waste management resources for byproduct material and hazardous waste and a  
2 SMALL to MODERATE impact for nonhazardous solid waste.

#### 3 4 **4.14.1.2 Disposal Via Land Application**

5  
6 If a permit for Class V injection wells cannot be obtained from EPA or the capacity of the  
7 Class V wells is insufficient, the applicant proposes to dispose of liquid byproduct material  
8 generated at the proposed Dewey-Burdock ISR Project by land application (see SEIS  
9 Section 2.1.1.1.2.4.2). The locations of land application areas for this disposal option are shown  
10 in Figure 2.1-12. Potential environmental impacts on waste management resources from  
11 construction, operations, aquifer restoration, and decommissioning associated with the land  
12 application disposal option are discussed in the following sections.

##### 13 14 4.14.1.2.1 Construction Impacts

15  
16 The primary wastes to be disposed of during this phase of the ISR facility lifecycle will be  
17 nonhazardous solid waste, such as building materials and piping. As discussed in SEIS  
18 Sections 2.1.1.1.6.3 and 3.13.2, the applicant has proposed to dispose of nonhazardous solid  
19 wastes at the Custer-Fall River Waste Management District landfill located at Edgemont,  
20 South Dakota, approximately 24 km [15 mi] southeast of the proposed Dewey-Burdock Project  
21 site or at the Newcastle, Wyoming, landfill, approximately 64 km [40 mi] north of the proposed  
22 Dewey-Burdock Project site if additional capacity is needed (Powertech, 2010a). As described  
23 in SEIS Section 3.13.2, these landfills are not at or near capacity.

24  
25 The proposed activities to manage construction waste generated by the proposed project  
26 are discussed in SEIS Section 2.1.1.1.6. The proposed action will annually generate a  
27 volume of 144 m<sup>3</sup> [188 yd<sup>3</sup>] of nonhazardous solid waste during the construction phase (SEIS  
28 Section 2.1.1.1.6.3), which is 1 percent or less of the volume of waste disposed at either the  
29 Custer-Fall River Waste Management District landfill or the Newcastle landfill (SEIS  
30 Section 3.13.2). Nonhazardous solid waste generated at the proposed annual rate for the  
31 duration of the construction phase (6 years) will account for 1 percent or less of the capacity of  
32 either landfill. Because there is available capacity and the ISR construction phase will annually  
33 generate a small volume, the NRC staff conclude the impact on waste management from the  
34 land application disposal option at the proposed project will be SMALL.

##### 35 36 4.14.1.2.2 Operations Impacts

37  
38 Liquid byproduct material generated during operations is composed of production bleed, waste  
39 brine streams from elution and precipitation, resin transfer wash, laundry water, plant washdown  
40 water, and laboratory chemicals (SEIS Section 2.1.1.1.6.2). The applicant estimates the  
41 maximum production of liquid byproduct material at any time, considering concurrent uranium  
42 recovery operations and aquifer restoration activities, is 2,080 L/min [547 gal/min] for the land  
43 application option (Powertech, 2011). The applicant proposes to treat this combined liquid  
44 byproduct material stream onsite using ion exchange and radium settling prior to land  
45 application. The applicant proposes to treat the liquid waste (SEIS Section 2.1.1.1.6.2) to  
46 reduce radionuclide activities below the established NRC limits under 10 CFR Part 20,  
47 Appendix B, Table 2, Column 2 (Powertech, 2011) for discharge of radionuclides to the  
48 environment. 10 CFR Part 20, Appendix B, Table 2, Column 2 includes effluent concentration  
49 limits for natural uranium, Ra-226, Pb-210 and Th-230. As stated in SEIS Section 2.1.1.1.6.2,  
50 the land application will be carried out under a GDP through SDDENR (Powertech, 2012c). In  
51 accordance with permit program objectives, the applicant's proposed land application



1 operations will have to meet applicable state groundwater quality standards. NRC will require  
2 (i) liquid byproduct material be treated prior to injection and (ii) treatment systems be  
3 constructed, operated, and monitored to ensure requirements in 10 CFR Part 20, Subparts D  
4 and K and Appendix B are met. While land application capacity varies throughout the year, the  
5 applicant estimates that each land application area will be able to dispose of at least  
6 1,124 L/min [297 gal/min] during the period from March 29 to through October 31. The  
7 applicant proposes two land application areas, which will provide at least 2,248 L/min  
8 [594 gal/min] of capacity. The applicant's proposed disposal capacity is sufficient to  
9 accommodate the proposed maximum generation rate of liquid byproduct material. Based on  
10 the applicant's proposal to obtain adequate disposal capacity and comply with state  
11 groundwater quality standards, NRC effluent limits, and other NRC safety regulations, the NRC  
12 staff conclude that the waste management impacts from the disposal of liquid byproduct  
13 material via land application during the ISR operation phase will be SMALL.

14  
15 Solid byproduct material generated during operations could include maintenance and  
16 housekeeping rags and trash; packing materials; replaced components; filters; protective  
17 clothing; and solids removed from process pumps, vessels, and ponds. As discussed in SEIS  
18 Section 2.1.1.1.6.3, the applicant estimates, during the operational period and assuming  
19 combined operations and aquifer restoration, the proposed Dewey-Burdock facility will produce  
20 50 m<sup>3</sup> [66 yd<sup>3</sup>] of solid byproduct material from the land application option (Powertech, 2011).  
21 Solid byproduct material will be stored onsite within a restricted area until sufficient volume is  
22 generated for disposal. Based on the disposal options currently available and the disposal  
23 agreement that NRC requires prior to operations (SEIS Section 2.1.1.1.6.3), the NRC staff  
24 conclude that the impacts on waste management from the disposal of solid byproduct material  
25 under the land application option during the ISR operations phase will be SMALL.

26  
27 Nonhazardous solid wastes generated during operations could include facility trash, septic  
28 solids, and other uncontaminated solid wastes (e.g., piping, valves, instrumentation, and  
29 equipment). Because the proposed generation rate of nonhazardous solid waste (SEIS  
30 Section 2.1.1.1.6.3) will be a small percentage of the landfill capacity (SEIS Section 3.13.2), the  
31 NRC staff conclude the impact on waste management will be SMALL.

32  
33 As discussed in SEIS Section 2.1.1.1.6.3, the applicant has stated it will likely be classified as a  
34 CESQG. The applicant will transport its hazardous waste to a permitted hazardous waste  
35 facility for disposal (Powertech, 2009a).

36  
37 Based on the type and quantity of byproduct material and waste expected to be generated and  
38 the available capacity for disposal, the NRC staff conclude the waste management activities  
39 during the ISR operations phase of the proposed project will have a SMALL impact on waste  
40 management resources.

#### 41 42 4.14.1.2.3 Aquifer Restoration Impacts

43  
44 For the proposed Dewey-Burdock ISR Project, the applicant will use the same waste  
45 management systems for aquifer restoration as used during ISR operations discussed in SEIS  
46 Section 2.1.1.1.6.

47  
48 Liquid byproduct material generated during aquifer restoration is composed of produced water  
49 from the ore zone aquifer (Powertech, 2009b). The applicant estimates the maximum  
50 production of liquid byproduct material at any time, considering concurrent uranium recovery

1 operations and aquifer restoration activities, is 2,080 L/min [547 gal/min] for the land application  
2 option (Powertech, 2011). The applicant proposes to manage aquifer restoration wastewater  
3 (i.e., liquid byproduct material) by treating the wastewater onsite by ion exchange and radium  
4 settling prior to land application (SEIS Section 2.1.1.1.6.2). As stated in Section 2.1.1.1.6.2, the  
5 land application will be carried out under a GDP through SDDENR (Powertech, 2012c). In  
6 accordance with permit program objectives, the applicant's proposed land application  
7 operations will have to meet applicable state groundwater quality standards. NRC will require  
8 liquid byproduct material be treated prior to injection and treatment systems be constructed,  
9 operated, and monitored to ensure requirements in 10 CFR Part 20, Subparts D and K and  
10 Appendix B are met. While land application capacity varies throughout the year, the applicant  
11 estimates that each land application area will be able to dispose of at least 1,124 L/min  
12 [297 gal/min] during the period from March 29 to through October 31. The applicant proposes  
13 2 land application areas, which will provide at least 2,248 L/min [594 gal/min] of capacity. The  
14 applicant's proposed disposal capacity is sufficient to accommodate the proposed maximum  
15 generation rate of liquid byproduct material. Based on the applicant's proposal to obtain  
16 adequate disposal capacity and comply with state groundwater quality standards, NRC effluent  
17 limits, and other NRC safety regulations, the staff conclude that the waste management impacts  
18 from the disposal of liquid byproduct material via land application during the ISR aquifer  
19 restoration phase will be SMALL.

20  
21 Solid byproduct material generated during aquifer restoration could include maintenance and  
22 housekeeping rags and trash; packing materials; replaced components; filters; protective  
23 clothing; and solids removed from process pumps, vessels, and ponds. As discussed in SEIS  
24 Section 2.1.1.1.6.3, the applicant estimates, during the operational period and assuming  
25 combined operations and aquifer restoration, the proposed Dewey-Burdock facility will produce  
26 50 m<sup>3</sup> [66 yd<sup>3</sup>] of solid byproduct material from the land application option (Powertech, 2011).  
27 Solid byproduct material will be stored onsite within a restricted area until sufficient volume is  
28 generated for disposal. Based on the disposal options currently available and the disposal  
29 agreement that NRC requires prior to operations (SEIS Section 2.1.1.1.6.3), the NRC staff  
30 conclude that the waste management impacts from the generation of byproduct material during  
31 the ISR operations phase will be SMALL.

32  
33 Nonhazardous solid wastes generated during aquifer restoration could include facility trash,  
34 septic solids, and other uncontaminated solid wastes (e.g., piping, valves, instrumentation, and  
35 equipment). Because the proposed generation rate of nonhazardous solid waste (SEIS  
36 Section 2.1.1.1.6.3) will be a small percentage of the landfill capacity (SEIS Section 3.13.2), the  
37 NRC staff conclude the impact on waste management will be SMALL.

38  
39 As discussed in SEIS Section 2.1.1.1.6.3, the applicant has stated it will likely be classified as a  
40 CESQG. The applicant would transport its hazardous waste to a permitted hazardous waste  
41 facility for disposal (Powertech, 2009a).

42  
43 Based on the type and quantity of waste expected to be generated and the available  
44 capacity for disposal, the NRC staff conclude the waste management actions during the ISR  
45 aquifer restoration phase of the proposed project will have a SMALL impact on waste  
46 management resources.

#### 47 48 4.14.1.2.4 Decommissioning Impacts

49  
50 The anticipated decommissioning activities occurring at the proposed Dewey-Burdock ISR  
51 Project site will be comparable to those described in GEIS Section 2.6. The applicant proposed

1 to conduct radiological surveys of decommissioned facilities and equipment and classify  
2 materials in accordance with the applicable disposition of the materials (Powertech, 2009b,  
3 2011), including decontamination, recycling and reuse, disposal as byproduct material at a  
4 licensed facility, or disposal as nonhazardous solid waste at a municipal solid waste landfill  
5 (Powertech, 2009b, 2011).  
6

7 As discussed in SEIS Section 2.1.1.1.6.3, the applicant's estimate for byproduct material  
8 generated from decommissioning the plant facilities and all wellfields (over a planned 2-year  
9 period) is 1,580 m<sup>3</sup> [2,067 yd<sup>3</sup>] for the land application option (Powertech, 2011). As discussed  
10 in SEIS Section 2.1.1.1.6.3, the applicant does not have a disposal agreement in place with a  
11 licensed site to accept solid byproduct material, and as discussed in SEIS Section 4.14.1.1.2,  
12 NRC will require that the applicant enter into a written agreement with a disposal site to ensure  
13 adequate capacity for byproduct material disposal. The applicant has proposed to pursue an  
14 agreement with the White Mesa site in Blanding, Utah, for disposal of solid byproduct material  
15 (SEIS Section 3.13.2). Based on the disposal options currently available for byproduct material  
16 and the disposal agreement, which NRC will require by license condition prior to operations, the  
17 NRC staff conclude that the impact on waste management from the generation of byproduct  
18 material under the land application option during decommissioning will be SMALL.  
19

20 The applicant's estimate of the total volume of nonhazardous solid waste that will be generated  
21 from decommissioning is 12,496 m<sup>3</sup> [16,344 yd<sup>3</sup>] for the land application option (Powertech,  
22 2011). From this estimate, the NRC staff derived an annual nonhazardous solid waste  
23 generation of 6,248 m<sup>3</sup> [8,172 yd<sup>3</sup>] from decommissioning by dividing the applicant's total  
24 estimate by 2 (the applicant's proposed decommissioning period in years). This estimated solid  
25 waste volume is greater than what was analyzed in the GEIS {715 m<sup>3</sup> [935 yd<sup>3</sup>]} and thus not  
26 bounded by the GEIS impact assessment; therefore, the NRC staff considered additional  
27 site-specific information to evaluate impacts.  
28

29 Although permitted landfill disposal capacities at the Custer-Fall River Waste Management  
30 District landfill and the Newcastle landfill are currently available (SEIS Section 3.13.2),  
31 considering the proposed project duration and limited future disposal capacity, the NRC staff  
32 evaluated the estimated landfill capacities and demand at the time of decommissioning. Based  
33 on the current operational life of 12 years (SEIS Section 3.13.2), the Newcastle landfill will not  
34 be open to accept waste at the planned time of decommissioning (15 and 16 years after the  
35 start of construction; SEIS Figure 2.1-1) unless the landfill capacity was expanded. The  
36 Custer-Fall River landfill, with an estimated operational life of 17 years after mid-year 2012, will  
37 still be in operation at the time of decommissioning if project construction started in 2013;  
38 Section 106 consultation between NRC, SD SHPO, BLM, tribal representatives, and the  
39 applicant therefore, this landfill was evaluated in more detail. NRC staff projections suggest the  
40 remaining capacity of the Custer-Fall River landfill at the time of proposed decommissioning will  
41 be insufficient to accommodate all decommissioning nonhazardous solid waste and serve the  
42 regional annual demand for disposal capacity unless existing landfill capacity and operations  
43 were expanded. Furthermore, the NRC staff estimate the additional demand for capacity would  
44 consume the remaining landfill capacity at a faster rate with the landfill reaching full capacity  
45 approximately 1 year earlier than current projections. The NRC staff's projections supporting  
46 these conclusions are detailed in the following paragraphs.  
47

48 The NRC staff's landfill capacity analysis calculated the total disposal demand from mid-year  
49 2012 through the end of the proposed decommissioning period and compared it with the  
50 reported remaining landfill capacity as of mid-year 2012. NRC staff used this comparison of

1 projected demand and capacity to evaluate whether sufficient capacity would be available to  
2 dispose of the additional waste from the proposed Dewey-Burdock ISR Project. The total  
3 disposal demand of 150,730 t [166,152 T] was based on the sum of the regional disposal  
4 demand<sup>8</sup> and the project disposal demand<sup>9</sup> from mid-2012 through the end of the proposed  
5 decommissioning period in 2028. The projected demand exceeds the available capacity of  
6 139,619 t [154,000 T]<sup>10</sup> by 11,024 t [12,152 T].<sup>11</sup>

7  
8 The staff also evaluated the difference in the projected time the landfill will reach full capacity  
9 with and without disposal of waste from the proposed Dewey-Burdock ISR Project. The  
10 purpose of this analysis was to evaluate the impact of the additional disposal demand on the  
11 projected operational life of the landfill. The NRC staff calculated when the landfill would reach  
12 full capacity with the additional disposal of proposed project waste by first calculating the  
13 available landfill capacity at the end of 2027 after 1 year of decommissioning waste disposal  
14 and 15.5 years of post mid-2012 regional waste disposal.<sup>12</sup> Next, the NRC staff derived a  
15 combined monthly disposal demand<sup>13</sup> for year 2028 from the projected disposal rates for  
16 decommissioning waste and regional waste. At the combined monthly disposal demand the  
17 projected year 2028 remaining capacity of 5,147 t [5,674 T] would be depleted within the first  
18 half of 2028.<sup>14</sup> For comparison, the projected operational life of the landfill without disposal of  
19 waste from the proposed action (SEIS Section 3.13.2) is 17 years beyond mid-2012 or mid-year  
20 2029. Therefore, the analysis suggests disposal of waste from the proposed Dewey-Burdock  
21 ISR Project will cause the Custer-Fall River landfill to reach full capacity 1 year earlier than  
22 expected if the proposed decommissioning was executed on schedule and regional disposal  
23 demand continued at the current rate.

24  
25 The potential for future expansion of capacity is being considered at both landfills (AET, Inc.,  
26 2011; SDDENR, 2010); however, specific long term actions remain uncertain. If one of these  
27 landfills does not expand capacity in the future, the applicant will have to dispose of waste  
28 elsewhere. Another more distant and higher capacity landfill serving Rapid City is projected to  
29 be operational until 2050 (HDR Engineering Inc., 2010). Therefore, the staff consider regional

---

<sup>8</sup>The regional demand of 134,717 t [148,500 T] was calculated based on the product of the annual average disposal volume received by the Custer-Fall River landfill of 8,160 t/yr [9,000 T/yr] (SEIS Section 3.13.2) and 16.5 (the number of years from mid-2012 to the end of proposed decommissioning in 2028).

<sup>9</sup>The project demand (i.e., total nonhazardous solid waste volume from decommissioning) of 16,003 t [17,652 T] is the volume of this waste from SEIS Section 2.1.1.1.6.3 converted to mass using 1.08T/yd<sup>3</sup> as a multiplier.

<sup>10</sup>The available landfill capacity reported in SEIS Section 3.13.2 as of the end of June 2012 is 139,619 t [154,000 T].

<sup>11</sup>The available capacity of 139,619 t [154,000 T] was subtracted from the total disposal demand of 150,730 t [166,152 T] (the sum of footnotes 8 and 9) to obtain the result of 11,024 t [12,152 T].

<sup>12</sup>The calculated available capacity at the beginning of year 2028 is 5,147 t [5,674 T]. This is the result of subtracting the combined disposal demand (from regional and decommissioning wastes) from mid-2012 to year 2027 from the available landfill capacity as of mid-2012 of 139,619 t [154,000 T] (SEIS Section 3.13.2). The combined disposal demand was calculated as the product of the annual average disposal volume received by the Custer-Fall River landfill of 8,160 t/yr [9,000 T/yr] (SEIS Section 3.13.2) and 15.5 (the number of years from mid-2012 to the end of the first year of proposed decommissioning in 2027) added to the volume of nonhazardous decommissioning solid waste for year 2027 of 8,007 t [8,826 T] {half of the 2 year decommissioning total waste volume of 16,003 t [17,652 T]}.

<sup>13</sup>The combined monthly disposal demand for year 2028 of 1,348 t/month [1,486 T/month] is the sum of derived monthly disposal demands (i.e., waste generation rates) for proposed decommissioning and regional waste. Specifically, the derived monthly proposed decommissioning disposal demand is the total amount of proposed decommissioning waste of 16,003 t [17,652 T] for 2 years converted to a monthly rate of 667 t/month [736 T/month]. Similarly, the derived monthly regional disposal demand is the Custer-Fall River landfill annual average disposal amount of 8,160 t/yr [9,000 T/yr] converted to a monthly rate of 680t/month [750 T/month].

<sup>14</sup>The time to reach full capacity of 3.8 months was calculated as the ratio of the available year 2028 capacity of 5,147 t [5,674 T] from footnote 10 and the combined monthly disposal demand of 1,348 t/month [1,486 T/month] from footnote 11.

1 capacity will be available during the period of decommissioning if local capacity is limited or  
2 otherwise unavailable.

3  
4 Based on the preceding capacity analysis, the NRC staff conclude that the potential impacts on  
5 waste management resources will vary depending on the long-term status of the existing local  
6 landfill resources. If local landfill capacity is not expanded prior to the proposed  
7 decommissioning period, the NRC staff conclude that there will be no impacts to the Newcastle  
8 landfill because it will not be open to accept waste at the planned time of decommissioning and  
9 the proposed Dewey-Burdock IRS Project will not be able to dispose waste at that location. In  
10 turn, impacts to the Custer-Fall River landfill will be MODERATE because the increased  
11 demand for capacity will more rapidly consume the waste management resources during the  
12 last years of its projected operational life. Any waste disposed at the Rapid City landfill will have  
13 SMALL impacts based on the projected operational life and available capacity. Alternatively, if  
14 the local landfill capacity is expanded prior to the proposed project decommissioning phase, the  
15 impacts on the available capacity of the expanded landfill (Newcastle or Custer-Fall River) will  
16 be SMALL.

17  
18 The applicant estimates the volume of hazardous waste generated from decommissioning  
19 activities will be less than 91 kg [200 lb] (Powertech, 2009b). The hazardous waste streams  
20 from decommissioning will be similar to the waste streams generated during the ISR  
21 construction phase and could include used oil, batteries, and cleaning solvents. The applicant  
22 will have in place a hazardous material program that complies with applicable EPA and  
23 SDDENR requirements for its handling, storage, and disposal at approved facilities. Because  
24 the volume of hazardous wastes generated by the proposed action will be small and the waste  
25 will be handled, stored, and disposed of in accordance with applicable regulations; the NRC  
26 staff conclude the impacts on waste management will be SMALL.

27  
28 In summary, NRC staff conclude the impacts to waste management resources during the  
29 decommissioning phase of the proposed project for the land application liquid waste disposal  
30 option will be SMALL for all materials except nonhazardous solid waste, which will be SMALL to  
31 MODERATE depending on the long-term status of the existing local landfill resources. Based  
32 on the type and quantity of waste expected to be generated and the available capacity for  
33 disposal, waste management actions during the decommissioning phase will have a SMALL  
34 impact on waste management resources for byproduct material and hazardous waste and a  
35 SMALL to MODERATE impact for nonhazardous solid waste.

#### 36 37 **4.14.1.3 Disposal Via Combination of Class V Injection and Land Application**

38  
39 If a permit for Class V injection wells is obtained from EPA but the capacity of the wells is  
40 insufficient to dispose of all liquid wastes generated at the proposed Dewey-Burdock ISR  
41 Project, the applicant has proposed to dispose of liquid waste by a combination of deep well  
42 disposal using Class V injection wells and land application (see SEIS Section 2.1.1.1.2.4.3).  
43 For the combined deep Class V injection well and land application disposal option, land  
44 application facilities and infrastructure will be constructed, operated, restored, and  
45 decommissioned on an as-needed basis depending on the deep Class V injection well disposal  
46 capacity (Powertech, 2011). The land application option will require the construction and  
47 operation of irrigation areas and increased pond capacity for storage of liquid wastes during  
48 nonirrigation periods (see SEIS Section 2.1.1.1.2.4.2), whereas the deep Class V injection well  
49 disposal option will require the construction and operation of four to eight deep disposal wells  
50 (see SEIS Section 2.1.1.1.2.4.1).

1 The relative volumes of byproduct material generated by the two disposal options differ during  
2 operations, aquifer restoration, and decommissioning phases with the land application option  
3 generating the larger amount of material for offsite disposal in each phase. The relative  
4 volumes of nonhazardous solid waste generated by the two disposal options differ during the  
5 decommissioning phase. The significance of these differences with regard to environmental  
6 impacts is low and does not change the impact conclusions for each disposal option. Therefore,  
7 the environmental impacts on waste management resources associated with the land  
8 application option will be the same for the deep Class V injection well disposal option for all  
9 phases of the ISR process. Furthermore, only a portion of land application facilities and  
10 infrastructure (e.g., irrigation areas and storage ponds) will be constructed, operated, and  
11 decommissioned for the combined disposal option. Therefore, the significance of environmental  
12 impacts on waste management resources for the combined disposal option will be less than for  
13 the land application option alone. Based on this reasoning, NRC staff conclude that the  
14 environmental impacts on waste management of the combined deep Class V injection well and  
15 land application disposal option for each phase of the proposed Dewey-Burdock ISR Project will  
16 be bounded by the significance of environmental land use impacts of the deep Class V injection  
17 well disposal option and the land application disposal option as summarized in Table 4.14-1.  
18

19 **4.14.1.4 Alternative Wastewater Disposal Options**

20  
21 If the applicant cannot obtain a UIC Class V injection well permit or the necessary permits for  
22 land application, it will have to identify another wastewater disposal option. Because these  
23 options are hypothetical and not proposed by the applicant, this section evaluates the  
24 environmental impacts broadly on any resource from implementing the alternate wastewater  
25 disposal options identified in SEIS Section 2.1.1.2. All of these alternative wastewater disposal  
26 options will involve treatment of the wastewater resulting in the generation of solid waste, which  
27 also must be managed.  
28

29 In the alternative wastewater disposal options considered in the following sections, the footprint  
30 of the disposal system would be similar to or increase as compared to disposal via a UIC  
31 Class V injection well (the applicant's preferred waste disposal option) (SEIS Section 4.14.1.1)  
32 and be similar to or decrease as compared to the applicant's land application option or  
33 combination of both. Increasing the size of the proposed facility would lead to more land  
34 disturbance and a heavier use of construction equipment, with an anticipated increase in  
35

**Table 4.14-1. Significance of Environmental Impacts on Liquid Waste Management  
for the Proposed Waste Disposal Options for Each Phase of the Proposed  
Dewey-Burdock ISR Project**

	<b>Class V Injection Wells</b>	<b>Land Application</b>	<b>Combined Class V Injection Wells and Land Application*</b>
Construction	SMALL	SMALL	SMALL
Operations	SMALL	SMALL	SMALL
Aquifer Restoration	SMALL	SMALL	SMALL
Decommissioning	SMALL, MODERATE depending on future status of local landfills	SMALL, MODERATE depending on future status of local landfills	SMALL, MODERATE depending on future status of local landfills

\*Significance of environmental impact for the combined disposal option is bounded by the significance of environmental impacts for the deep Class V injection well disposal and land application disposal options.

1 potential impacts to resource areas, such as ecological and wetland systems, cultural and  
2 historical resources, and nonradiological air quality. The applicant would have to amend its  
3 license application to select one of these alternative wastewater disposal options. NRC staff  
4 would perform an additional environmental and safety review before deciding whether to grant  
5 or deny the license amendment request for the new wastewater disposal option. The applicant  
6 would survey the areas to be affected prior to construction, and the applicant and NRC staff  
7 would consult with agencies such as the SD SHPO, SDGFP, and FWS, as appropriate.  
8 Mitigation measures, such as avoidance of sensitive areas or documentation of cultural  
9 resources, would be discussed and implemented, as appropriate, as part of these consultations.  
10 If mitigation measures were implemented, the estimated impacts would be SMALL.

#### 11 12 4.14.1.4.1 Evaporation Ponds 13

14 The types of waste streams and the infrastructure necessary for the use of evaporation ponds  
15 as a wastewater disposal option are described in SEIS Section 2.1.1.2.1. The type and volume  
16 of wastewater that would be disposed in an evaporation pond would be the same as described  
17 in SEIS Section 4.14.1.1 for disposal by injection into a deep Class V UIC well. Before the  
18 applicant could begin disposing wastewater into an evaporation pond system, the NRC staff  
19 would review the design and construction of the ponds and monitoring system against the  
20 criteria in 10 CFR Part 40, Appendix A (NRC, 2003b, 2008), taking into consideration EPA  
21 criteria in 40 CFR Part 61, Subpart W. The applicant would be required to demonstrate that the  
22 evaporation ponds could be designed, operated, and decommissioned to prevent migration of  
23 wastewater to subsurface soil, surface water, or groundwater. The applicant would also be  
24 required to demonstrate that monitoring requirements would be established to detect migration  
25 of contaminants to groundwater. The NRC staff would establish needed license conditions to  
26 ensure that the applicant met the necessary requirements.  
27

28 Individual evaporation ponds could have a surface area of up to 2.5 ha [6.25 ac], and the total  
29 pond system could be as much as 40 ha [100 ac]. During the ISR operations period for the  
30 proposed Dewey-Burdock ISR Project, this area would be fenced to exclude wildlife and  
31 livestock. A 40-ha [100-ac] footprint would be less than about 1 percent of the total permitted  
32 area {4,282 ha [10,580 ac]} for the proposed Dewey-Burdock ISR Project (including both the  
33 Dewey and Burdock sites), but it would be much larger than the footprint for a central  
34 processing plant without evaporation ponds (Powertech, 2009b). The additional land  
35 disturbance required to install an evaporation pond system for wastewater disposal would be  
36 similar in scale to the current proposed action for the land application option {55 ha [136 ac]} for  
37 the proposed Dewey-Burdock ISR Project. It is also anticipated that the applicant would need to  
38 have at least one other wastewater disposal option or additional storage capacity during the  
39 winter months in South Dakota because of the low evaporation rates during that season.  
40

41 Although a wastewater disposal option that uses an evaporation pond system would roughly  
42 double the facility footprint relative to UIC Class V injection wells, the total amount of disturbed  
43 and fenced land would be small compared to the permitted area and comparable to the generic  
44 conditions evaluated in the GEIS with respect to land use. For these reasons, the overall  
45 impact on land use associated with an evaporation pond system would be SMALL.  
46

47 Construction of an evaporation pond system would require earthmoving equipment, such as  
48 bulldozers, backhoes, and trucks, to prepare the site and construct the impoundment. The  
49 equipment would produce diesel emissions and fugitive dust emissions during construction that  
50 could have a temporary effect on nonradiological air quality. Depending on how the applicant

1 elected to phase in the pond system, these effects could extend into the operational phase of  
2 the facility as well. BMPs, such as wetting unpaved roads, would minimize fugitive dust, and the  
3 anticipated impacts to nonradiological air quality would be SMALL. The applicant may also  
4 need to obtain a National Emission Standards for Hazardous Air Pollutants (NESHAP) review to  
5 evaluate whether the anticipated radiological releases to air from the evaporation ponds would  
6 meet the criteria in 40 CFR Part 61, Subpart W. The applicant would also be required to have  
7 an NRC-approved air monitoring system for the wastewater disposal system. Keeping the pond  
8 wet to reduce dust and radon emissions would effectively reduce potential air emissions, and  
9 the estimated impacts on radiological air quality would be SMALL.

10  
11 Evaporation ponds, if designed and constructed following NRC guidance (NRC, 2008), would  
12 utilize clay or geotextile liners to reduce the potential for infiltration into the subsurface. An  
13 NRC-approved monitoring system would be installed to detect leaks from the ponds, and the  
14 applicant would also implement an NRC-approved inspection plan for the ponds (NRC, 2008).  
15 Based on these measures, the estimated impacts on surface water and groundwater resources  
16 would be SMALL.

17  
18 The evaporation ponds would be constructed at the same time and with the same mitigation  
19 measures described in SEIS Section 4.6 (Ecological Resources) for the construction of the rest  
20 of the facility. For these reasons, the estimated impact on ecological resources from an  
21 evaporation pond disposal system would be the same as identified in SEIS Section 4.6 and  
22 could be reduced to SMALL.

23  
24 At the end of the operational phase of the facility, all of the pond liners and berms, as well as  
25 accumulated precipitates and sludges, would be classified as solid byproduct material. For  
26 example, the GEIS indicates that about 52 m<sup>3</sup> [68 yd<sup>3</sup>] of byproduct material would be generated  
27 during evaporation pond decommissioning. These solids would need to be transported to a  
28 licensed facility for disposal as part of the decommissioning program. This would increase the  
29 total amount of decommissioning byproduct material, increasing the number of truck trips  
30 needed to transport the materials to a disposal facility. Given the potential limitations on  
31 available byproduct waste disposal capacity, it is anticipated that the impacts from an  
32 evaporation pond wastewater disposal system to waste management would be SMALL to  
33 MODERATE during the decommissioning phase of the facility. Note that at the conclusion of  
34 operations, the licensee would be required to provide a decommissioning plan for NRC review  
35 that demonstrates it has a disposal path for any decommissioning wastes, including those  
36 related to the wastewater disposal system. The NRC staff would conduct detailed technical and  
37 environmental reviews of the proposed decommissioning program for the facility at that time.

#### 38 39 4.14.1.4.2 Surface Water Discharge

40  
41 For surface discharge of wastewater, the applicant would be required to meet the regulatory  
42 provisions in 10 CFR Part 20, Subparts D and K and Appendix B. The applicant would also be  
43 required to obtain a zero-release surface water discharge permit from SDDENR. In accordance  
44 with EPA regulations, the applicant would not be allowed to discharge process wastewater to  
45 navigable waters of the United States (NRC, 2003b). The applicant would need to develop  
46 storage capabilities prior to treatment to 10 CFR Part 20 standards. In addition, the applicant  
47 would need to characterize and remediate any residual radioactivity at the discharge point or  
48 from storage facilities (tanks, impoundments), radium settling basins, and related liners and  
49 sludges above NRC limits as part of the decommissioning of the facility (NRC, 2003b; Sanford  
50 Cohen and Associates, 2008).



1 Establishing the discharge point for the treated effluent would likely require short-term use of  
2 earthmoving equipment to install pipelines, small berms, access roads, and fencing to exclude  
3 livestock and wildlife. The amount of land to be fenced for the discharge point alone would be  
4 limited (see SEIS Section 2.1.1.2.2), and the estimated impact on land use would likely be  
5 SMALL. As is the case with both land application and a deep Class V disposal well, the  
6 wastewater would likely require treatment to meet state surface water discharge zero-release  
7 permit requirements, including treatment facilities to provide an ion-exchange circuit, reverse  
8 osmosis, one or more radium settling basins {0.1 to 1.6 ha [0.25 to 4 ac]}, or purge storage  
9 reservoirs {4 ha [10 ac] or more}. These treatment facilities would also be fenced to exclude  
10 wildlife and livestock and limit public access. The amount of land needed for the wastewater  
11 treatment facilities would be similar to that for land application and deep Class V disposal wells.  
12 As with evaporation ponds, land application, and Class V disposal wells, the increased footprint  
13 for the additional wastewater treatment facilities needed to meet state surface water discharge  
14 requirements would be small relative to the entire permitted area {4,282 ha [10,580 ac]}, but  
15 large relative to the central processing plant as described for the proposed action (SEIS  
16 Section 4.2.1) (Powertech, 2009b). The proposed action would further disturb about 98 ha  
17 [243 ac] of previously disturbed land under the deep well disposal option and about 566 ha  
18 [1,398 ac] of previously disturbed land under the land application option or a combination of  
19 both for the proposed Dewey-Burdock Project. Overall, the increase in the disturbed area to  
20 accommodate the addition of a wastewater treatment facility would be about 1 to 4 percent and  
21 would have a SMALL impact on land use.

22  
23 Constructing the wastewater treatment facilities (e.g., radium settling basins) would require  
24 earthmoving equipment, such as bulldozers, backhoes, and trucks, to prepare the site and  
25 construct the impoundment(s). This would be similar to the proposed action (both deep Class V  
26 disposal well and land application options) because wastewater treatment facilities are included  
27 in the proposed plans for the Dewey-Burdock Project. The equipment would produce diesel  
28 emissions and fugitive dust emissions during construction that could temporarily affect  
29 nonradiological air quality. BMPs, such as wetting unpaved roads, would reduce fugitive dust  
30 emissions. Taking into consideration the likely short-term duration of the construction period,  
31 the anticipated impacts to nonradiological air quality would be SMALL. The applicant may also  
32 need to consider emissions of radionuclides such as radon from the surface discharge points.  
33 Because the SDDENR permit would require the applicant to monitor and maintain low  
34 radionuclide concentrations for the treated wastewater, the estimated impacts on radiological air  
35 quality would be SMALL.

36  
37 The proposed Dewey satellite facility and wellfields would be developed in the Beaver Creek  
38 drainage basin, while the Burdock central processing facility and wellfields would be developed  
39 within the Pass Creek drainage (SEIS Section 3.5.1). Beaver Creek is a perennial drainage  
40 with periods of low flow, but a surface water discharge option would increase water flow and  
41 result in the development of aquatic habitat. Pass Creek is intermittent, and surface discharge  
42 could result in increased erosion and suspended sediments in the existing stream channel.  
43 Sediment loads would likely taper off quickly both in time and distance; therefore, the long-term  
44 impact would be SMALL.

45  
46 As noted previously, the applicant would not be allowed to discharge treated wastewater into  
47 navigable waters of the United States. A recent wetlands delineation survey identified four  
48 potential jurisdictional wetlands in the Dewey-Burdock ISR Project (SEIS Section 3.5.1 and  
49 Figure 4.5-1). These jurisdictional wetlands include Beaver and Pass Creeks and two  
50 tributaries. A Nationwide Permit 44 under Section 404 of the Clean Water Act would be

1 required for discharges of dredged or fill material into a wetland or WUS exceeding 0.2 ha  
2 [0.5 ac]. The NRC staff assume that, if the applicant pursued surface discharge of treated  
3 effluent, the proposed Dewey-Burdock ISR Project would avoid surface discharge points that  
4 might disturb any of these wetlands areas, and potential impacts to these wetlands from surface  
5 discharge of treated wastewater would be SMALL.  
6

7 The applicant would be required to demonstrate that any soil affected by the surface discharge  
8 of treated wastewater would meet 10 CFR Part 20 requirements. In addition, during operations  
9 the applicant would be required to routinely monitor the soils and discharged water to ensure  
10 predicted concentrations were not exceeded. For these reasons, it is not anticipated that  
11 decommissioning the surface discharge point would produce additional solid byproduct material  
12 for disposal. As with the land application wastewater disposal option, however,  
13 decommissioning wastewater treatment facilities may produce solid byproduct material, such as  
14 spent resins, sludges, and liners from radium settling basin(s), or contaminated building debris.  
15 These solids would need to be transported to a licensed facility for disposal as part of the  
16 decommissioning program. This would increase the total amount of decommissioning  
17 byproduct materials, increasing the number of truck trips needed to transport the materials to a  
18 disposal facility. Given the potential limitations on available byproduct material disposal  
19 capacity, it is anticipated that the potential impacts on waste management from  
20 decommissioning the radium settling basin(s) and other storage facilities associated with  
21 treating wastewater for surface water discharge would range from SMALL to MODERATE.  
22

23 Note that at the conclusion of operations, the licensee would be required to provide a detailed  
24 decommissioning plan for NRC review. The decommissioning plan would include final  
25 radiological surveys to identify whether there were any areas of soil contamination that would  
26 require disposal as byproduct material. The NRC staff would conduct detailed technical and  
27 environmental reviews of the proposed decommissioning program for the facility at that time.  
28 Topsoil that was removed and stored during construction would be reapplied during land  
29 reclamation. Final revegetation of the project area would involve seeding the area with a seed  
30 mixture approved by SDDENR, the local conservation district, BLM, and landowners. SDDENR  
31 would determine when final revegetation is complete and when the conditions for bond release  
32 have been met.  
33

#### 34 **4.14.2 No-Action (Alternative 2)**

35  
36 Under the No-Action alternative, there will be no waste generated from the proposed action.  
37 There will be neither deep Class V well injection nor land application of liquid wastes and no  
38 disposal of byproduct material, hazardous wastes, or nonhazardous solid wastes. Therefore,  
39 there will be no impact on waste management from implementing this alternative.  
40

#### 41 **4.15 References**

42  
43 10 CFR Part 20. *Code of Federal Regulations*, Title 10, *Energy*, Part 20. "Standards for  
44 Protection Against Radiation." Washington, DC: U.S. Government Printing Office.  
45

46 10 CFR Part 40. Appendix A. *Code of Federal Regulations*, Title 10, *Energy*, Part 40,  
47 Appendix A. "Criteria Relating to the Operations of Uranium Mills and to the Disposition of  
48 Tailings or Wastes Produced by the Extraction or Concentration of Source Material from Ores  
49 Processed Primarily from their Source Material Content." Washington, DC: U.S. Government  
50 Printing Office.

- 1 23 CFR Part 772. *Code of Federal Regulations*, Title 23, *Highways*, Part 772. "Procedures for  
2 Abatement of Highway Traffic Noise and Construction Noise." Washington, DC:  
3 U.S. Government Printing Office.  
4
- 5 29 CFR Part 1910. *Code of Federal Regulations*, Title 29, *Labor*, Part 1910. "Occupational  
6 Safety and Health Standards." Washington, DC: U.S. Government Printing Office.  
7
- 8 36 CFR Part 60. *Code of Federal Regulations*, Title 36, *Parks, Forests, and Public*  
9 *Property*, Part 60. "National Register of Historic Places." Washington, DC: U.S. Government  
10 Printing Office.  
11
- 12 40 CFR Part 61. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 61.  
13 "National Emission Standards for Hazardous Air Pollutants (NESHAPS)." Washington, DC:  
14 U.S. Government Printing Office.  
15
- 16 40 CFR Part 68. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 68.  
17 "Chemical Accident Prevention Provisions." Washington, DC: U.S. Government Printing Office.  
18
- 19 40 CFR Part 141. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 141.  
20 "National Primary Drinking Water Regulations." Washington, DC: U.S. Government  
21 Printing Office.  
22
- 23 40 CFR Part 146. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 146.  
24 "Underground Injection Control Program: Criteria and Standards." Washington, DC:  
25 U.S. Government Printing Office.  
26
- 27 40 CFR Part 190. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 190.  
28 "Environmental Radiation Protection Standards for Nuclear Power Operations." Washington,  
29 DC: U.S. Government Printing Office.  
30
- 31 40 CFR Part 302. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 302.  
32 "Designation, Reportable Quantities, and Notification." Washington, DC: U.S. Government  
33 Printing Office.  
34
- 35 40 CFR Part 355. *Code of Federal Regulations*, Title 40, *Protection of Environment*, Part 355.  
36 "Emergency Planning and Notification." Washington, DC: U.S. Government Printing Office.  
37
- 38 59 FR 7629. Executive Order 12898. "Federal Actions to Address Environmental Justice in  
39 Minority Populations and Low-Income Populations." *Federal Register*. Vol. 59, No. 32,  
40 p. 7629. Washington, DC: U.S. Government Printing Office. February 16, 1994.  
41
- 42 69 FR 52040. "Policy Statement on the Treatment of Environmental Justice matters in NRC  
43 Regulatory and Licensing Actions." *Federal Register*. Vol. 69, No. 163. August 24, 2004.  
44
- 45 AET, Inc. "Solid Waste Management Permit Renewal Application, Newcastle Landfill #2,  
46 Newcastle, Wyoming." AET #18-03607. Rapid City, SD: American Engineering Testing, Inc.  
47 October 10, 2011.  
48
- 49 ARSD (Administrative Rules of South Dakota). "Chapter 74:11:08: Capping, Sealing, and  
50 Plugging Exploration Test Holes." South Dakota Legislature Administrative Rules.

- 1 ARSD. "Chapter 74:34: Regulated Substances Discharges." South Dakota Legislature  
2 Administrative Rules.  
3
- 4 ARSD. "Chapter 74:52. Surface Water Discharge Permits." South Dakota Legislature  
5 Administrative Rules.  
6
- 7 Avian Power Line Interaction Committee. "Suggested Practices for Avian Protection on  
8 Power Lines: The State of the Art in 2006." ML12243A391. Washington, DC: Edison Electric  
9 Institute. and Sacramento, California: Avian Power Line Interaction Committee and the  
10 California Energy Commission. 2006. <[http://www.aplic.org/uploads/files/2643/  
11 SuggestedPractices2006\(LR-2\).pdf](http://www.aplic.org/uploads/files/2643/SuggestedPractices2006(LR-2).pdf)> (13 October 2009).  
12
- 13 Bandas, S.J. and K.F. Higgins. "Field Guide to South Dakota Turtles."  
14 SDCES EC 919. ML12241A389. Brookings, South Dakota: South Dakota State University.  
15 2004. <[http://pubstorage.sdstate.edu/AgBio\\_Publications/articles/EC919.pdf](http://pubstorage.sdstate.edu/AgBio_Publications/articles/EC919.pdf)> (08 May 2012).  
16
- 17 BLM (U.S. Bureau of Land Management). Email Subject "Mitigation and Reclamation  
18 Guideline" and attachments. From M. Iverson, BLM, Acting Field Manager, South Dakota Field  
19 Office, to A. Hester, CNWRA, Southwest Research Institute®. ML12250A802. June 25, 2012a.  
20
- 21 BLM. Email Subject "Appendix E Wildlife Stipulations" and attachments. From M. Iverson,  
22 BLM, Acting Field Manager, South Dakota Field Office, to A. Hester, CNWRA, Southwest  
23 Research Institute®. ML12250A838. June 25, 2012b.  
24
- 25 BLM. Email Subject "Sage Grouse Stipulation Meeting/Call." From M. Iverson, BLM, Acting  
26 Field Manager, South Dakota Field Office, to H. Yilma, Project Manager, Office of Federal and  
27 State Materials and Environmental Management Programs, U.S. Nuclear Regulatory  
28 Commission. ML12249A030. June 28, 2012c.  
29
- 30 BLM. Email Subject "Wildlife and Special Status Stipulations in the 1896 South Dakota  
31 Resource Management Plan" and attachment. From M. Iverson, BLM, Acting Field Manager,  
32 South Dakota Field Office, to H. Yilma, Project Manager, Office of Federal and State Materials  
33 and Environmental Management Programs, U.S. Nuclear Regulatory Commission.  
34 ML12249A033. June 25, 2012d.  
35
- 36 BLM. Email Subject "Dewey-Burdock Uranium Seed Mix" and attachment. From M. Iverson,  
37 BLM, Acting Field Manager, South Dakota Field Office, to A. Hester, CNWRA, Southwest  
38 Research Institute®. ML12250A751. June 25, 2012e.  
39
- 40 BLM. (U.S. Bureau of Land Management). "Wyoming Sage-Grouse RPM Amendments."  
41 Released August 2011. <[https://www.blm.gov/epl-front-office/eplanning/planAndProjectSite.do?  
42 methodName=dispatchToPatternPage&currentPageId=18704](https://www.blm.gov/epl-front-office/eplanning/planAndProjectSite.do?methodName=dispatchToPatternPage&currentPageId=18704)> (23 January 2012).  
43
- 44 BLM. "Draft Environmental Impact Statement, Dewey Conveyor Project." ML12209A089.  
45 DOI-BLM-MT-040-2009-002-EIS. Belle Fourche, South Dakota: BLM Field Office,  
46 U.S. Department of Interior. January 2009. <[http://www.blm.gov/pgdata/etc/medialib/  
47 blm/mt/field\\_offices/south\\_dakota/dakotah.Par.28318.File.dat/DeweyDEIS.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/mt/field_offices/south_dakota/dakotah.Par.28318.File.dat/DeweyDEIS.pdf)> (25 July 2012).  
48

- 1 BLM. "Proposed Resource Management Plan and Final Environmental Impact Statement for  
2 Public Lands Administered by the Bureau of Land Management Rawlins Field Office."  
3 ML12209A103. Rawlins, Wyoming: BLM, Rawlins Field Office. 2008.  
4 <[http://www.blm.gov/pgdata/etc/medialib/blm/wy/programs/planning/rmps/rawlins/  
5 feis.Par.38532.File.dat/009\\_Chapter-3.pdf](http://www.blm.gov/pgdata/etc/medialib/blm/wy/programs/planning/rmps/rawlins/feis.Par.38532.File.dat/009_Chapter-3.pdf)> (19 November 2009).  
6
- 7 BLM. "Newcastle Resource Management Plan." ML12209A101. Newcastle, Wyoming: BLM,  
8 Newcastle Field Office. 2000. <<http://www.blm.gov/rmpweb/Newcastle/rmp.pdf>>  
9 (16 October 2009).  
10
- 11 BLM. "Visual Resource Inventory." Manual H-8410-1. ML12237A196. Washington, DC:  
12 BLM. 1986. <<http://www.blm.gov/nstc/VRM/8410.html>> (16 October 2009).  
13
- 14 BLM. "Visual Resource Management." Manual 8400. ML12237A194. Washington, DC: BLM.  
15 1984. <<http://www.blm.gov/nstc/VRM/8400.html#Anchor-06-23240>> (16 October 2009).  
16
- 17 Brattstrom, B.H. and M.C. Bondello. "Effects of Off-Road Vehicle Noise on Desert  
18 Vertebrates." *Environmental Effects of Off-Road Vehicles, Impacts and Management in  
19 Arid Regions*. R.N. Webb and H.G. Wilshire, eds. New York City, New York: Springer-Verlag  
20 Publishing. 1983.  
21
- 22 Brooks, T., M. McCurry, and D. Hess. "South Dakota State and County Demographic Profiles."  
23 ML12237A222. Brookings, South Dakota: South Dakota Rural Life and Census Data Center.  
24 May 2008. <[http://www.sdstate.edu/soc/rlcdc/i-o/reports/upload/South-Dakota-State-and-  
25 County-Demographic-Profiles-B755.pdf](http://www.sdstate.edu/soc/rlcdc/i-o/reports/upload/South-Dakota-State-and-County-Demographic-Profiles-B755.pdf)> (22 August 2012).  
26
- 27 Center for Climate Strategies. "South Dakota Greenhouse Gas Inventory and Reference  
28 Case Projections 1990-2020." 2007. <[http://www.climatestrategies.us/ewebeditpro/items/  
29 O25F18227.pdf](http://www.climatestrategies.us/ewebeditpro/items/O25F18227.pdf)> (21 December 2009).  
30
- 31 CEQ (Council of Environmental Quality). "Environmental Justice Guidance Under the National  
32 Environmental Policy Act." Washington, DC: Executive Office of the President.  
33 December 1997.  
34
- 35 Chapman, S.S., S.A. Bryce, J.M. Omernik, D.G. Despain, J. ZumBerge, and M. Conrad.  
36 "Ecoregions of Wyoming." U.S. Geological Survey Map. Scale 1:1,400,000. 2004.  
37
- 38 EPA (U.S. Environmental Protection Agency). "National Recommended Water Quality Criteria."  
39 2012. <<http://water.epa.gov/scitech/swguidance/standards/current/index.cfm#altable>>  
40 (11 May 2012).  
41
- 42 EPA. "Total Maximum Daily Loads, Section 303(d) List Fact Sheet for Watershed, BEAVER."  
43 2009. <[http://ofmpub.epa.gov/tmdl/attains\\_watershed.control?  
44 p\\_huc=10120107&p\\_state=SD&p\\_cycle=&p\\_report\\_type=T](http://ofmpub.epa.gov/tmdl/attains_watershed.control?p_huc=10120107&p_state=SD&p_cycle=&p_report_type=T)> (05 November 2009).  
45
- 46 EPA. "Information on Levels of Environmental Noise Requisite To Protect Health and Welfare  
47 With an Adequate Margin of Safety." EPA 550/9-74-005. ML12241A393. Washington, DC:  
48 EPA. 1974. <<http://www.nonoise.org/library/levels74/levels74.htm>> (20 August 2012).  
49  
50

- 1 Federal Highway Administration. "Synthesis of Noise Effects on Wildlife Populations."  
2 FHWA-HEP-06-016. ML12241A397. Washington, DC: FHWA, Department of  
3 Transportation. 2004. <[http://www.fhwa.dot.gov/environment/noise/  
4 noise\\_effect\\_on\\_wildlife/effects/effects.pdf](http://www.fhwa.dot.gov/environment/noise/noise_effect_on_wildlife/effects/effects.pdf)> (20 August 2012).  
5
- 6 Fellows, S. D., and S. L. Jones. "Status Assessment and Conservation Action Plan for the  
7 Long-billed Curlew (*Numenius americanus*)." Biological Technical Publication,  
8 FWS/BTP-R6012-2009, Washington, DC: U.S. Department of Interior, Fish and Wildlife  
9 Service. 2009.
- 10
- 11 FWS (U.S. Fish and Wildlife Service). "U.S. Fish and Wildlife Service Releases Draft Report to  
12 Help Sage-Grouse Conservation Objectives." ML12276A248. August 23, 2012.  
13 <[http://www.fws.gov/mountain-prairie/pressrel/2012/08232012\\_Sage\\_Grouse.html](http://www.fws.gov/mountain-prairie/pressrel/2012/08232012_Sage_Grouse.html)>  
14 (30 August 2012).  
15
- 16 FWS. "U.S. Fish and Wildlife Service Species Assessment Listing Priority and Assignment  
17 Form, Sprague's Pipit." ML12276A165. May 31, 2011. <[http://ecos.fws.gov/docs/candidate/  
18 assessments/2012/r6/B0GD\\_V01.pdf](http://ecos.fws.gov/docs/candidate/assessments/2012/r6/B0GD_V01.pdf)> (30 August 2012).  
19
- 20 FWS. "Environmental Comments on Powertech Dewey-Burdock Project, Custer and Fall River  
21 County, South Dakota." ML100970556. Washington, DC: FWS, Department of the Interior.  
22 March 29, 2010.  
23
- 24 FWS. "Whooping Cranes and Wind Development – An Issue Paper." April 2009.  
25 <[ftp://wiley.kars.ku.edu/windresource/Whooping Crane and Wind Development FWS %20A  
26 pril%202009.pdf](ftp://wiley.kars.ku.edu/windresource/Whooping_Crane_and_Wind_Development_FWS_20April%202009.pdf)> (20 November 2009).  
27
- 28 FWS. "Candidate and Listing Priority Assignment Form." ML12241A398. Pierre, South  
29 Dakota: U.S. Fish and Wildlife Service. 2000. <[http://www.fws.gov/mountain-  
30 prairie/species/mammals/swiftfox/candidate\\_assignment\\_form.pdf](http://www.fws.gov/mountain-prairie/species/mammals/swiftfox/candidate_assignment_form.pdf)> (30 September 2012).  
31
- 32 HDR Engineering Inc. "Solid Waste Management Plan Rapid City Planning Area Rapid City,  
33 South Dakota." HDR Project No. 00000000111705. Omaha, NE: HDR Engineering, Inc.  
34 January, 2010.  
35
- 36 Hodorff. "Habitat Assessment and Conservation Strategy for Sage Grouse and Other Selected  
37 Species on Buffalo Gap National Grassland." ML120240626. Hot Springs, South Dakota: .  
38 U.S. Department of Agriculture, Forest Service. September 2005.  
39
- 40 Kempema, S., C. Marsh, and K. Marsh. "Colony Acreage and Distribution of the Black-Tailed  
41 Prairie Dog in South Dakota, 2008." Pierre, South Dakota: Game Fish and Parks. August  
42 2009. <<http://gfp.sd.gov/wildlife/docs/prairedog-distribution-report.pdf>> (03 October 2012).  
43
- 44 Kruse, J.M., T.V. Gillen, J.R. Bozell, L. Palmer, and A.A. Buhta. "A Level III Cultural Resources  
45 Evaluation of Powertech (USA) Incorporated's Proposed Dewey-Burdock Uranium Project  
46 Locality Within the Southern Black Hills, Custer and Fall River Counties, South Dakota."  
47 ML100670302, ML100670309, ML100670314, ML100670318, ML100670240, ML100670250,  
48 ML100670255, ML100670257, ML100670258, ML100670259, ML100670261, ML100670267,  
49 ML100670277, ML100670280, ML100670286, ML100670289, ML100670363, ML100670365,  
50 ML100670366, ML100670482, ML100670232. Archeological Contract Series No. 216. Sioux  
51 Falls, South Dakota: Archeology Laboratory, Augustana College. 2008.

- 1 Mackin, P.C., D. Daruwalla, J. Winterle, M. Smith, and D.A. Pickett. NUREG/CR-6733,  
2 “A Baseline Risk-Informed Performance-Based Approach for *In-Situ* Leach Uranium Extraction  
3 Licensees.” Washington, DC: NRC. September 2001.  
4
- 5 National Fire Protection Association. *NPFA 50 Standard for Bulk Oxygen Systems at  
6 Consumer Sites*. 2001 Edition. Quincy, MA: National Fire Protection Association. 2001.  
7
- 8 Naus, C.A., D.G. Driscoll, and J.M. Carter. “Geochemistry of the Madison and Minnelusa  
9 Aquifers in the Black Hills Area, South Dakota.” U.S. Geological Survey Water Resources  
10 Investigation Report 01-4129. ML12240A265. 2001.  
11 <<http://pubs.usgs.gov/wri/wri014129/pdf/wri014129.pdf>> (17 August 2012).  
12
- 13 NRC (U.S. Nuclear Regulatory Commission). “Draft License SUA-1600 for Powertech (USA),  
14 Inc.” ML12207A480. Washington, DC: NRC. 2012.  
15
- 16 NRC. NUREG-1910, “Generic Environmental Impact Statement for *In-Situ* Leach Uranium  
17 Milling Facilities.” ML091480244, ML091480188. Washington, DC: NRC. May 2009a.  
18
- 19 NRC. “Staff Assessment of Groundwater Impacts from Previously Licensed In-Situ Uranium  
20 Recovery Facilities.” Memorandum to Chairman Jaczko, Commissioner Klein, and  
21 Commissioner Svinicki, NRC from C. Miller, Director, Office of Federal and State Materials and  
22 Environmental Management Programs, NRC. ML091770187. July 10, 2009b.  
23
- 24 NRC. “Site Visit to the Proposed Dewey-Burdock Uranium Project, Fall River and Custer  
25 Counties, South Dakota, and Meetings with Federal, State, and County Agencies, and Local  
26 Organizations, November 30–December 4, 2009.” ML093631627. Washington, DC: NRC.  
27 2009c.  
28
- 29 NRC. NRC Regulatory Guide 3.11, “Design, Construction, and Inspection of Embankment  
30 Retention Systems at Uranium Recovery Facilities.” Rev. 3. Washington, DC: NRC.  
31 November 2008.  
32
- 33 NRC. “Environmental Assessment for the Addition of the Reynolds Ranch Mining Area to  
34 Power Resources, Inc.’s Smith Ranch/Highlands Uranium Project Converse County, Wyoming.”  
35 Source Material License No. SUA-1548. Docket No. 40-8964. Washington, DC: NRC. 2006.  
36
- 37 NRC. NUREG-1748, “Environmental Review Guidance for Licensing Actions Associated With  
38 NMSS Programs.” Washington, DC: NRC. August 2003a.  
39
- 40 NRC. NUGEG-1569, “Standard Review Plan for *In-Situ* Leach Uranium Extraction License  
41 Applications—Final Report.” Washington, DC: NRC. June 2003b.  
42
- 43 NRC. NUREG-0706, “Final Generic Environmental Impact Statement on Uranium Milling  
44 Project M-25.” Washington, DC: NRC. September 1980.  
45
- 46 Peterson, R.A. “The South Dakota Breeding Bird Atlas.” Jamestown, North Dakota: Northern  
47 Prairie Wildlife Research Center. 1995. <[http://www.npwrc.usgs.gov/  
48 resource/birds/sdatlas/index.htm](http://www.npwrc.usgs.gov/resource/birds/sdatlas/index.htm)> (16 March 2010).  
49

- 1 Powertech [Powertech (USA) Inc.]. "Re: Dewey-Burdock Project, Proposed Operational  
2 Facilities with Vegetation Overlay and Associated Table." Letter (June 8) to H. Yilma, Project  
3 Manager, Office of Federal and State Materials and Environmental Management Programs,  
4 U.S. Nuclear Regulatory Commission from R. Blubaugh, Vice President, Environmental Health  
5 and Safety Resources. ML12166A037. Greenwood Village, Colorado: Powertech. 2012a  
6
- 7 Powertech. "Re: Dewey-Burdock Meeting with Landowners to Discuss Post-Mining Land Use,  
8 Reclamation Seed Mix, Entering and Commencing Operations, and Land Application of Treated  
9 Process Water." Letter (May 1) to M. Atkins, U.S. Department of Interior Bureau of Land  
10 Management from R. Blubaugh, Vice President, Environmental Health and Safety Resources.  
11 Greenwood Village, Colorado: Powertech. 2012b.  
12
- 13 Powertech. "Dewey-Burdock Project Groundwater Discharge Plan Custer and Fall River  
14 Counties, South Dakota." ML12195A039, ML12195A040. Edgemont, South Dakota:  
15 Powertech. March 2012c.  
16
- 17 Powertech. "Dewey-Burdock Project Emissions Inventory Revisions." Email (July 31) from  
18 R. Blubaugh to Bradley Werling (Southwest Research Institute®). ML12216A220. San Antonio,  
19 Texas: Southwest Research Institute®. 2012d.  
20
- 21 Powertech. "Mitigation Regarding Archaeological Sites." E-mail (September 14) from R.  
22 Blubaugh to H. Yilma, Project Manager, Office of Federal and State Materials and  
23 Environmental Management Programs, U.S. Nuclear Regulatory Commission. ML12262A486.  
24 2012e.  
25
- 26 Powertech. "SHPO Comments and Related Commitments." E-mail (August 3) from R.  
27 Blubaugh to H. Yilma, Project Manager, Office of Federal and State Materials and  
28 Environmental Management Programs, U.S. Nuclear Regulatory Commission. ML12262A491.  
29 Greenwood Village, Colorado: Powertech. 2012f.  
30
- 31 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
32 and Custer Counties, South Dakota, Technical Report RAI Responses, June, 2011."  
33 ML112071064. Greenwood Village, Colorado: Powertech. 2011.  
34
- 35 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
36 and Custer Counties, South Dakota ER\_RAI Response August 11, 2010." ML102380516.  
37 Greenwood Village, Colorado: Powertech. 2010a.  
38
- 39 Powertech. "Subject: Powertech (USA), Inc's Responses to the U.S. Nuclear Regulatory  
40 Commission (NRC) Staff's Verbal Request for Clarification of Response Regarding Inclusion of  
41 Emissions from Drilling Disposal Wells; Dewey-Burdock Uranium Project Environmental Review  
42 Docket No. 40-9075; TAC No. J 00533." Letter (November 17) to R. Burrows, Project Manager,  
43 Office of Federal and State Materials and Environmental Management Programs, U.S. Nuclear  
44 Regulatory Commission from R. Blubaugh, Vice President, Environmental Health and Safety  
45 Resources. ML103220208. Greenwood Village, Colorado: Powertech. 2010b.  
46  
47



- 1 Powertech. Letter (April 20) from R. Blubaugh, Vice President-Environmental Health and Safety  
2 Resources, Powertech (USA) Inc., to B. Walsh, Hydrologist, Groundwater Quality Program,  
3 South Dakota Department of Environment and Natural Resources. "Re: 1) Class V  
4 Underground Injection Control (UIC) Permit Application to EPA; Dewey-Burdock Project, Fall  
5 River and Custer Counties, South Dakota, 2) Land Application Monitoring Plan Summary for the  
6 Groundwater Discharge Plan Application." Greenwood Village, Colorado: Powertech. 2010c.  
7
- 8 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
9 and Custer Counties, South Dakota—Environmental Report." Docket No. 040-09075.  
10 ML092870160. Greenwood Village, Colorado: Powertech. August 2009a.  
11
- 12 Powertech. "Dewey-Burdock Project, Application for NRC Uranium Recovery License Fall River  
13 and Custer Counties, South Dakota—Technical Report." Docket No. 040-09075.  
14 ML092870160. Greenwood Village, Colorado: Powertech. August 2009b.  
15
- 16 Powertech. "Dewey-Burdock Project, Supplement to Application for NRC Uranium Recovery  
17 License Dated February 2009." Docket No. 040-09075. ML092870160. Greenwood Village,  
18 Colorado: Powertech. August 2009c.  
19
- 20 Powertech. "Dewey-Burdock Project Underground Injection Control Permit Application."  
21 Greenwood Village, Colorado: Powertech. December 2008.  
22
- 23 Sanford Cohen and Associates. "Final Report Review of Existing and Proposed Tailings  
24 Impoundment Technologies." ML12237A191. Vienna, Virginia: Sanford Cohen and  
25 Associates. September 2008. <[http://www.epa.gov/radiation/docs/neshaps/subpart-w/tailings-  
26 impoundment-tech.pdf](http://www.epa.gov/radiation/docs/neshaps/subpart-w/tailings-impoundment-tech.pdf)> (19 July 2010).  
27
- 28 SDDENR (South Dakota Department of Environment and Natural Resources). "RE: Attn:  
29 Steve Kropp—Limited Request for Information (Stats for Local Landfill) for USNRC Review."  
30 E-mail (December 20) to P. LaPlante, Southwest Research Institute. ML111300205. Pierre,  
31 South Dakota: SDDENR. December 20, 2010.  
32
- 33 SDDOE (South Dakota Department of Education). "Statistical Digest." 2010.  
34 <<http://doe.sd.gov/ofm/applications/StatDigest/default.asp>> (30 April 2012).  
35
- 36 SDDOL (South Dakota Department of Labor). "Labor Force." Pierre, South Dakota: South  
37 Dakota Department of Labor, Labor Market Information Center. 2012. <[http://dol.sd.gov/lmic/  
38 menu\\_labor\\_force.aspx](http://dol.sd.gov/lmic/menu_labor_force.aspx)> (7 June 2012).  
39
- 40 SDDOT (South Dakota Department of Transportation). "Statewide Traffic Flow Map."  
41 ML12240A386. 2011. <[http://www.sddot.com/transportation/highways/  
42 traffic/docs/Traffic\\_2011.pdf](http://www.sddot.com/transportation/highways/traffic/docs/Traffic_2011.pdf)> (14 June 2012).  
43
- 44 SDDRR (South Dakota Department of Revenue and Regulation). "South Dakota Sales and Use  
45 Tax Report." January 5, 2012. ML12241A182. Pierre, South Dakota: SDDRR.  
46 <[http://www.state.sd.us/drr2/businessstax/statistics/2011/CY%202011/  
47 CY11CountybyCitybyMG.pdf](http://www.state.sd.us/drr2/businessstax/statistics/2011/CY%202011/CY11CountybyCitybyMG.pdf)> (08 June 2012).  
48

- 1 SDDRR. "Sales and Use Tax Guide." ML12240A388. Pierre, South Dakota: South Dakota  
2 Department of Revenue. July 2011. <[http://www.state.sd.us/drr2/businessstax/  
3 publications/st/salestaxguide.pdf](http://www.state.sd.us/drr2/businessstax/publications/st/salestaxguide.pdf)> (11 June 2012).  
4
- 5 SDGFP (South Dakota Game, Fish, and Parks). "Threatened & Endangered or Rare Species."  
6 2012a. <<http://gfp.sd.gov/wildlife/threatened-endangered/default.aspx>> (25 November 2009).  
7
- 8 SDGFP. "Peregrine Falcon Recovery in South Dakota." <[http://gfp.sd.gov/wildlife/  
9 management/diversity/peregrine-falcon-recovery.aspx](http://gfp.sd.gov/wildlife/management/diversity/peregrine-falcon-recovery.aspx)> 2012b. (03 May 2012).  
10
- 11 SDGFP. Email Subject "SD GFP wildlife data" and attachments. From S. Michals, SDGFP  
12 Energy and Minerals Coordinator. To A. Hester, CNWRA. ML12249A230. January 31, 2012c.  
13
- 14 SDGFP. "Prairie Dogs." <[http://gfp.sd.gov/hunting/predator-varmint-furbearer/prairie-  
15 dogs.aspx](http://gfp.sd.gov/hunting/predator-varmint-furbearer/prairie-dogs.aspx)> 2012d. (4 May 2012).  
16
- 17 SDGFP. "Subject: Dewey-Burdock Crucial Big Game Habitats and Migratory Corridors." Letter  
18 (May 7) from S. Michals, Energy and Minerals Coordinator. Rapid City, South Dakota: SDGFP.  
19 2010a.  
20
- 21 SDGFP. "South Dakota Mountain Lion Management Plan 2010-2015." Version 10-1.  
22 ML12241A406. Rapid City, South Dakota: South Dakota Game, Fish, and Parks. June 2010b  
23 <<http://gfp.sd.gov/wildlife/critters/mammals/docs/2010mtlion-managementplan.pdf>>  
24 (16 August 2012).  
25
- 26 SDGFP . "Threatened & Endangered or Rare Species ." March 16, 2010c.  
27 <<http://gfp.sd.gov/wildlife/threatened-endangered/default.aspx>> (17 January 2012).  
28
- 29 SDGFP. "South Dakota Wildlife." ML12241A402. 2009a.  
30 <<http://gfp.sd.gov/wildlife/docs/sdwildlife-brochure.pdf>> (25 November 2009).  
31
- 32 SDGFP. "Turkeys." 2009b. <<http://gfp.sd.gov/wildlife/private-land/turkeys.aspx>>  
33 (25 November 2009).  
34
- 35 SDGFP. "Greater Sage Grouse Management Plan South Dakota." ML12241A215. 2008.  
36 <<http://gfp.sd.gov/wildlife/docs/sage-grouse-management-plan.pdf>> (2 April 2012).  
37
- 38 SDGFP. "A Birder's Guide to the George S. Mickelson Trail." ML12241A204. Rapid City,  
39 South Dakota: SDGFP. 2005a. <<http://gfp.sd.gov/to-do/docs/mickelson-trail-birding.pdf>>  
40 (19 March 2010).  
41
- 42 SDGFP. " South Dakota All Bird Conservation Plan." 2005b. ML12241A195. Pierre, South  
43 Dakota: South Dakota Game Fish and Parks. 2005b. <[http://gfp.sd.gov/wildlife/docs/bird-  
44 plan.pdf](http://gfp.sd.gov/wildlife/docs/bird-plan.pdf)> (23 April 2012).  
45
- 46 Somma, L. A. "Nonindigenous Aquatic Species, "*Apalone spinifera*." 2011.  
47 Gainesville, Florida; U.S. Geological Survey. <[http://nas.er.usgs.gov/queries/  
48 FactSheet.aspx?SpeciesID=1274](http://nas.er.usgs.gov/queries/FactSheet.aspx?SpeciesID=1274)> November 2011. (08 May 2012).  
49

- 1 South Dakota Birds and Birding. "Clark's Nutcracker *Nucifraga columbiana*" 2012.  
2 <[http://sdakotabirds.com/species/clarks\\_nutcracker\\_info.htm](http://sdakotabirds.com/species/clarks_nutcracker_info.htm)> (01 May 2012).  
3
- 4 U.S. Census Bureau (USCB), "American FactFinder, Census 2000 and 2010, 2006–2010  
5 American Community Survey 5-Year Estimate, State and County QuickFacts." ML12248A240.  
6 2012. <<http://factfinder.census.gov>, <http://quickfacts.census.gov>> (17 April 2012).  
7
- 8 USGS (U.S. Geological Survey). "Restoring and Rehabilitating Sagebrush Habitats." Corvallis,  
9 Oregon: USGS Forest and Rangeland Ecosystem Science Center. April 2009.
- 10 USGS. "Frail Legacy, Endangered, Threatened & Rare Animals of South Dakota, Peregrine  
11 Falcon." August 2006. <[http://www.npwrc.usgs.gov/resource/  
12 wildlife/sdrare/species/falcpere.htm](http://www.npwrc.usgs.gov/resource/wildlife/sdrare/species/falcpere.htm)> (03 May 2012).  
13
- 14 WDAI (Wyoming Department of Administration and Information). "Population of Wyoming,  
15 Counties, Cities, and Towns : 2010 to 2030 ." ML12250A716. Cheyenne, Wyoming, Wyoming  
16 Department of Administration and Information, Economic Analysis Division. 2011.  
17 <<http://eadiv.state.wy.us/pop/wyc&sc30.htm>> (25 June 2012).  
18
- 19 WDWS (Wyoming Department of Workforce Services). "Local Area Unemployment Statistics."  
20 Casper, Wyoming: WDWS , Research and Planning. <<http://doe.state.wy.us/LMI/laus.htm>>  
21 (07 June 2012).  
22
- 23 WGFD (Wyoming Game and Fish Department). "State Wildlife Action Plan 2010."  
24 ML12241A410. Cheyenne, Wyoming: Wyoming Game and Fish Department. 2010.  
25 <[http://gf.state.wy.us/web2011/Departments/Wildlife/pdfs/  
26 SWAP\\_2012\\_FULL0002194.pdf](http://gf.state.wy.us/web2011/Departments/Wildlife/pdfs/SWAP_2012_FULL0002194.pdf)> (08 May 2012).  
27
- 28 WGFD. "Sage-Grouse Habitat Management Guidelines for Wyoming." ML12276A277. 2007.  
29 <[http://wgfd.wyo.gov/web2011/Departments/Wildlife/  
30 pdfs/SG\\_HABITATMNGGUIDELINES0000691.pdf](http://wgfd.wyo.gov/web2011/Departments/Wildlife/pdfs/SG_HABITATMNGGUIDELINES0000691.pdf)> (04 April 2012).  
31
- 32 Wyoming Department of Education. "Wyoming School District Statistical Report Series #2."  
33 2010. <<http://edu.wyoming.gov/DataInformationAndReporting/StatisticalReportSeries2.aspx>>  
34 (01 May 2012).  
35
- 36 Wyoming Department of Revenue. "Sales and Use Tax Distribution Reports." 2010.  
37 <<http://revenue.state.wy.us/PortalVBVS/DesktopDefault.aspx?tabindex=3&tabid=10>>  
38 (11 September 2010).  
39
- 40 Zollinger, R. "2012 North Dakota Weed Control Guide." W-253. Fargo, North Dakota:  
41 North Dakota State University Extension Service. January 2012. <[http://www.ag.ndsu.edu/  
42 weeds/weed-control-guides/nd-weed-control-guide-1](http://www.ag.ndsu.edu/weeds/weed-control-guides/nd-weed-control-guide-1)> (05 April 2012).



**BIBLIOGRAPHIC DATA SHEET**

(See instructions on the reverse)

1. REPORT NUMBER  
(Assigned by NRC, Add Vol., Supp., Rev., and Addendum Numbers, if any.)

NUREG-1910, Supplement 4,  
Volume 1

2. TITLE AND SUBTITLE

Environmental Impact Statement for the Dewey-Burdock In-Situ Recovery Project in Fall River and Custer Counties, South Dakota

Supplement to the Generic Environmental Impact Statement for In-Situ Leach Uranium Milling Facilities

3. DATE REPORT PUBLISHED

MONTH	YEAR
November	2012

4. FIN OR GRANT NUMBER

5. AUTHOR(S)

6. TYPE OF REPORT

Technical

7. PERIOD COVERED (Inclusive Dates)

8. PERFORMING ORGANIZATION - NAME AND ADDRESS (If NRC, provide Division, Office or Region, U. S. Nuclear Regulatory Commission, and mailing address; if contractor, provide name and mailing address.)

Division of Waste Management and Environmental Protection  
Office of Federal and State Materials and Environmental Management Programs  
U.S. Nuclear Regulatory Commission  
Washington, DC 20555-001

9. SPONSORING ORGANIZATION - NAME AND ADDRESS (If NRC, type "Same as above", if contractor, provide NRC Division, Office or Region, U. S. Nuclear Regulatory Commission, and mailing address.)

Same as above

10. SUPPLEMENTARY NOTES

11. ABSTRACT (200 words or less)

By letter dated August 10, 2009, Powertech (USA), Inc. (Powertech, the applicant) submitted a source material license application to the U.S. Nuclear Regulatory Commission (NRC) for the Dewey-Burdock in-situ recovery (ISR) Project. Powertech is proposing to construct, operate, conduct aquifer restoration, and decommission an ISR facility at the Dewey-Burdock ISR Project site, located in Fall River and Custer Counties, South Dakota. The NRC staff evaluated site-specific data and information to assess whether the applicant-proposed activities were consistent with activities considered in NUREG-1910, "Generic Environmental Impact Statement for In-Situ Leach Uranium Milling Facilities" (GEIS) and determined which GEIS data and analyses could be incorporated by reference and what resource areas required site-specific review. The draft SEIS describes the environment potentially affected by the proposed site activities, describes the potential environmental impacts, and describes Powertech's environmental monitoring program and proposed mitigation measures. The NRC staff will respond to public comments received on the draft SEIS in the final SEIS.

12. KEY WORDS/DESCRIPTORS (List words or phrases that will assist researchers in locating the report.)

Uranium Recovery  
In-Situ Recovery Process  
Uranium  
Environmental Impact Statement  
Supplemental Environmental Impact Statement

13. AVAILABILITY STATEMENT

unlimited

14. SECURITY CLASSIFICATION

(This Page)

unclassified

(This Report)

unclassified

15. NUMBER OF PAGES

16. PRICE



Federal Recycling Program





**UNITED STATES  
NUCLEAR REGULATORY COMMISSION**  
WASHINGTON, DC 20555-0001  
-----  
OFFICIAL BUSINESS



**NUREG-1910  
Supplement 4, Vol. 1  
Draft**

**Environmental Impact Statement for the Dewey-Burdock Project in  
Custer and Fall River Counties, South Dakota**

**November 2012**