



Nebraska Public Power District

Always there when you need us

NLS2019024
April 30, 2019

U.S. Nuclear Regulatory Commission
Attention: Document Control Desk
Washington, D.C. 20555-0001

Subject: Annual Radioactive Effluent Release Report
Cooper Nuclear Station, Docket No. 50-298, DPR-46

Dear Sir or Madam:

The purpose of this letter is to transmit to the Nuclear Regulatory Commission (NRC) the Cooper Nuclear Station (CNS) Annual Radioactive Effluent Release Report for the period January 1, 2018, through December 31, 2018. This report is included as Enclosure 1. This letter also transmits a copy of the current Offsite Dose Assessment Manual (ODAM) as Enclosure 2. During the period from January 1, 2018, through December 31, 2018, there were no changes to the Process Control Program (PCP), and as such, a copy of the PCP is not being transmitted with this letter. These documents are being submitted for NRC use per the requirements of Technical Specification 5.6.3 and CNS ODA Section D 5.3.

This letter contains no regulatory commitments.

Should you have any questions or require additional information, please contact me at (402) 825-2788.

Sincerely,

Jim Shaw
Licensing Manager

/tf

IE48
A009
NRR

NLS2019024

Page 2 of 2

Enclosure 1 - Annual Radioactive Effluent Release Report January 1, 2018 through
December 31, 2018

Enclosure 2 - Cooper Nuclear Station Offsite Dose Assessment Manual

cc: Regional Administrator w/ enclosures
USNRC - Region IV

Senior Resident Inspector w/ enclosures
USNRC - CNS

Cooper Project Manager w/ enclosures
USNRC - NRR Plant Licensing Branch IV

CNS Records w/ enclosures

NPG Distribution w/o enclosures

NLS2019024
Enclosure 1

Enclosure 1

Annual Radioactive Effluent Release Report
January 1, 2018 through December 31, 2018

**NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION**

RADIOACTIVE EFFLUENT RELEASE REPORT

January 1, 2018 through December 31, 2018

USNRC Docket 50-298

CONTENTS

Introduction

Appendix A: Source Terms

Appendix B: Meteorology

Appendix C: Dose Calculations

Appendix D: 2018 Groundwater Report

References

INTRODUCTION

This report summarizes meteorological data and doses from radioactive effluents for the Cooper Nuclear Station for the period January through December, 2018. The data presented is consistent with guidance provided in Regulatory Guide 1.21 of the U.S. Nuclear Regulatory Commission (Revision 1, 1974) for reporting meteorological data and radioactive effluent data.

The report is organized into four parts. Appendix A presents the effluent and waste disposal source term data. Appendix B presents a summary of onsite meteorological data for the report period, including atmospheric diffusion estimates and a description of the atmospheric diffusion model. Appendix C presents the doses from liquid and gaseous radioactive effluents. Descriptions of the dose calculation models are also included. Appendix D presents the latest groundwater report.

APPENDIX A

SOURCE TERMS

EFFLUENT AND WASTE DISPOSAL REPORTS

SUPPLEMENTAL INFORMATION

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT

January 1, 2018 through December 31, 2018

Cooper Nuclear Station effluent and waste disposal data are presented in the format prescribed by Regulatory Guide 1.21. Meteorological data required by Table 4A&B of Regulatory Guide 1.21 is included in the Meteorological Section of the Annual Radioactive Material Release Report - Radioactive Effluents.

Facility Cooper Nuclear Station License DPR-46.

A. Regulatory Limits

1. Gaseous Waste Effluents

- a. The dose rates due to radioactive materials released in gaseous effluents offsite shall be limited to the following:
 1. Noble Gases: Less than or equal to 500 mrem/yr to the total body and less than or equal to 3000 mrem/yr to the skin.
 2. I-131, I-133, tritium, and all radionuclides in particulate form with half-lives greater than or equal to 8 days: Less than or equal to 1500 mrem/yr to any organ.
- b. The air dose due to noble gases released in gaseous effluents offsite shall be limited to the following:
 1. During any calendar quarter: Less than or equal to 5 mrad from gamma radiation and less than or equal to 10 mrad from beta radiation.
 2. During any calendar year: Less than or equal to 10 mrad from gamma radiation and less than or equal to 20 mrad from beta radiation.
- c. The dose to a member of the public due to I-131, I-133, and radioactive materials in particulate form with half-lives greater than 8 days in gaseous effluents offsite shall be limited to the following:
 1. During any calendar quarter: Less than or equal to 7.5 mrem to any organ.
 2. During any calendar year: Less than or equal to 15 mrem to any organ.

2. Liquid Waste Effluents

- a. January 1, 2018 through December 31, 2018

The concentration of radioactive material in water offsite due to radioactive liquid effluents shall not exceed the concentration specified in 10 CFR 20 Part 20.1302 for radionuclides other than dissolved or entrained noble gases. For dissolved or entrained noble gases, the concentration shall not exceed 2×10^{-4} $\mu\text{Ci/ml}$ total activity. (CNS Technical Specification Amendment 174 Implementation)

- b. The dose to a member of the public due to radioactive material in liquid effluents offsite shall be limited to the following:
 - 1. During any calendar quarter: Less than or equal to 1.5 mrem to the total body and less than or equal to 5 mrem to any organ.
 - 2. During any calendar year: Less than or equal to 3 mrem to the total body and less than or equal to 10 mrem to any organ.

B. Maximum Permissible Concentrations

- 1. Water: Covered in Section A.2.
- 2. Air: Covered in Section A.1.

C. Average Energy

The average energy (E) of the radionuclide mixtures of fission and activation gases released is not applicable. This information is not utilized for dose or release calculations.

D. Measurements and Approximations of Total Radioactivity

The methods used to measure or approximate the total radioactivity in effluents and to determine radionuclide composition are as follows:

1. Gaseous Effluents

a. Fission and Activation Gases:

Radioactivity and radionuclide composition is determined by laboratory HPGe detector analysis in correlation with continuous gross radioactivity monitoring by a beta scintillation detector in the release pathway.

b. Iodines:

Charcoal cartridges provide continuous sample collection. These cartridges are analyzed for radioactivity and radionuclide composition in the laboratory by a HPGe detector gamma spectrometer.

c. Particulates:

Particulate filters provide continuous sample collection. These filters are analyzed for radioactivity and radionuclide composition in the laboratory by a HPGe detector gamma spectrometer. An aliquot of a filter composite from each release point was analyzed for Sr-89, Sr-90, and gross alpha by an offsite laboratory.

d. Tritium:

A portable sampling apparatus is utilized to collect a quarterly sample of each radioactive vent effluent. These samples are analyzed using a liquid scintillation counter.

e. Carbon-14:

Carbon-14 source term was estimated using 2018 plant operational data and applying the methodology outlined in EPRI Technical Report 1021106 (EPRI, 2010).

2. Liquid Effluents

a. Principal gamma emitters and dissolved and entrained gases:

Each batch of liquid effluent is analyzed for radioactivity and radionuclide composition in the laboratory by a HPGe detector gamma spectrometer. In addition, each batch is monitored for gross gamma radioactivity by a NaI detector in-line with the release pathway.

b. Tritium:

An aliquot of a monthly composite is analyzed using a liquid scintillation counter.

c. Sr-89 and Sr-90:

An aliquot from a quarterly composite is analyzed by an offsite laboratory.

d. Gross alpha:

An aliquot from a monthly composite is analyzed by an offsite laboratory.

e. Fe-55:

An aliquot from a quarterly composite is analyzed by an offsite laboratory.

E. Batch Releases

a. Liquid

1.	Number of batch releases	42	
2.	Total time period for batch releases	10,738	minutes
3.	Maximum time period for batch release	324	minutes
4.	Average time period for batch release	256	minutes
5.	Minimum time period for batch release	122	minutes
6.	Average stream flow during periods of release of effluent into a flowing stream	1.30E+08	liters/minute
7.	Total activity released	1.55E-02	Ci

b. Gaseous

1.	Number of batch releases	0	
2.	Total time period for batch releases	0	minutes
3.	Maximum time period for batch release	0	minutes
4.	Average time period for batch release	0	minutes
5.	Minimum time period for batch release	0	minutes

F. Abnormal Release

a. Liquid

1.	Number of releases:	0	
2.	Total activity released	0	Ci

b. Gaseous

1.	Number of releases:	0	
2.	Total activity released	0	Ci

**TABLE 1A
EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
GASEOUS EFFLUENTS-SUMMATION OF ALL RELEASES**

	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR	EST. TOTAL ERROR %
A. Fission and activation gases						
1. Total release	Ci	8.39E+00	4.04E-01	4.28E+00	9.63E+00	2.0E+01
2. Average release rate for period	μCi/sec	1.08E+00	5.14E-02	5.38E-01	1.21E+00	
B. Iodines						
1. Total iodine 131	Ci	2.31E-05	1.53E-05	1.71E-05	4.16E-05	3.0E+01
2. Average release rate for period	μCi/sec	2.97E-06	1.95E-06	2.15E-06	5.23E-06	
C. Particulates						
1. Particulates with half-lives >8 days	Ci	1.35E-05	3.48E-05	4.18E-05	3.46E-04	5.0E+01
2. Average release rate for period	μCi/sec	1.74E-06	4.43E-06	5.26E-06	4.36E-05	
3. Gross alpha radioactivity	Ci	1.46E-06	2.41E-06	2.53E-06	5.50E-06	
D. Tritium						
1. Total release	Ci	3.04E+00	4.49E+00	3.51E+00	1.17E+00	3.0E+01
2. Average release rate for period	μCi/sec	3.91E-01	5.71E-01	4.42E-01	1.47E-01	
E. Carbon-14						
1. Total release	Ci	2.54E+00	2.57E+00	2.60E+00	2.60E+00	NA
2. Release Rate	μCi/sec	3.27E-01	3.27E-01	3.27E-01	3.27E-01	

TABLE 1B
EFFLUENT AND GASEOUS WASTE DISPOSAL ANNUAL REPORT
GASEOUS EFFLUENT-ELEVATED RELEASE
CONTINUOUS MODE *BATCH

NUCLIDES RELEASED	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR
1. Fission gases					
argon-41	Ci	1.68E-01	1.29E-02	7.72E-02	2.26E-01
krypton-83m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-85m	Ci	2.65E-01	6.51E-03	8.95E-02	3.79E-01
krypton-85	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-87	Ci	1.17E+00	2.09E-02	2.96E-01	1.76E+00
krypton-88	Ci	8.73E-01	2.36E-02	2.06E-01	1.33E+00
krypton-89	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-131m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-133m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-133	Ci	2.31E-01	6.62E-03	1.10E-01	1.19E-01
xenon-135m	Ci	1.08E+00	5.91E-02	6.28E-01	1.07E+00
xenon-135	Ci	2.49E+00	9.54E-02	1.03E+00	1.53E+00
xenon-137	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-138	Ci	2.11E+00	1.79E-01	1.84E+00	3.22E+00
Total for period	Ci	8.39E+00	4.04E-01	4.28E+00	9.63E+00
2. Iodines					
iodine-131	Ci	2.16E-05	1.51E-05	1.56E-05	2.88E-05
iodine-132	Ci	1.55E-05	4.57E-06	4.66E-05	4.41E-05
iodine-133	Ci	1.02E-04	2.08E-05	6.70E-05	2.00E-04
iodine-134	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
iodine-135	Ci	7.15E-05	2.48E-05	6.45E-05	1.49E-04
Total for period	Ci	2.11E-04	6.53E-05	1.94E-04	4.22E-04

* No batch discharges were made

TABLE 1B
EFFLUENT AND GASEOUS WASTE DISPOSAL ANNUAL REPORT
GASEOUS EFFLUENT-ELEVATED RELEASE (CONTINUED)
CONTINUOUS MODE *BATCH

NUCLIDES RELEASED	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR
3. Particulates					
sodium-24	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
chromium-51	Ci	7.57E-07	1.37E-05	7.98E-06	1.99E-06
manganese-54	Ci	0.00E+00	8.39E-07	4.92E-07	4.44E-07
manganese-56	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
iron-59	Ci	0.00E+00	5.70E-07	2.75E-07	6.86E-08
cobalt-58	Ci	5.08E-08	8.70E-07	4.37E-07	1.84E-07
cobalt-60	Ci	7.86E-07	4.71E-06	2.51E-06	1.28E-06
zinc-65	Ci	0.00E+00	6.51E-07	3.41E-07	8.50E-08
zinc-69	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
rubidium-88	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
rubidium-89	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-89	Ci	3.72E-06	2.80E-06	4.95E-06	5.10E-05
strontium-90	Ci	2.58E-08	2.16E-08	1.80E-08	4.82E-07
strontium-91	Ci	1.63E-05	1.87E-05	8.82E-05	5.00E-04
yttrium-91m	Ci	0.00E+00	4.57E-07	0.00E+00	0.00E+00
yttrium-93	Ci	0.00E+00	0.00E+00	0.00E+00	2.54E-05
niobium-95	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ruthenium-103	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
silver-110m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
antimony-124	Ci	0.00E+00	1.16E-07	8.29E-08	2.06E-08
antimony-125	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
tellurium-132	Ci	0.00E+00	0.00E+00	0.00E+00	1.05E-07
cesium-137	Ci	1.84E-07	1.16E-07	8.06E-08	1.15E-06
cesium-138	Ci	5.04E-03	9.28E-05	4.58E-02	2.51E-01
barium-139	Ci	1.32E-03	1.03E-03	7.32E-03	5.20E-02
barium-140	Ci	7.99E-07	8.19E-07	7.02E-06	5.76E-05
lanthanum-140	Ci	8.84E-07	9.36E-08	5.69E-06	4.06E-05
cerium-144	Ci	0.00E+00	0.00E+00	0.00E+00	1.71E-07
praesodymium-144	Ci	0.00E+00	0.00E+00	0.00E+00	1.71E-07
Total for period	Ci	6.38E-03	1.17E-03	5.32E-02	3.04E-01
Total for period with >8d half life	Ci	6.32E-06	2.52E-05	2.42E-05	1.14E-04

* No batch discharges were made

TABLE 1C
EFFLUENT AND GASEOUS WASTE DISPOSAL ANNUAL REPORT
GASEOUS EFFLUENT-BUILDING VENT RELEASE
CONTINUOUS MODE *BATCH

NUCLIDES RELEASED	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR
1. Fission gases					
krypton-83m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-85m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-85	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-87	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-88	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
krypton-89	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-131m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-133m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-133	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-135m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-135	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-137	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-138	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total for period	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
2. Iodines					
iodine-131	Ci	1.50E-06	2.16E-07	1.50E-06	1.28E-05
iodine-132	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
iodine-133	Ci	5.69E-06	0.00E+00	6.16E-06	0.00E+00
iodine-134	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
iodine-135	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total for period	Ci	7.19E-06	2.16E-07	7.66E-06	1.28E-05

* No batch discharges were made.

TABLE 1C
EFFLUENT AND GASEOUS WASTE DISPOSAL ANNUAL REPORT
GASEOUS EFFLUENT-BUILDING VENT RELEASE (CONTINUED)
CONTINUOUS MODE *BATCH

NUCLIDES RELEASED	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR
3. Particulates					
sodium-24	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
chromium-51	Ci	0.00E+00	0.00E+00	0.00E+00	1.16E-04
manganese-54	Ci	0.00E+00	0.00E+00	3.92E-07	9.79E-06
manganese-56	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cobalt-57	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cobalt-58	Ci	0.00E+00	0.00E+00	0.00E+00	4.99E-06
iron-59	Ci	0.00E+00	0.00E+00	0.00E+00	3.89E-06
cobalt-60	Ci	7.15E-06	9.36E-06	1.65E-05	9.26E-05
zinc-65	Ci	0.00E+00	0.00E+00	0.00E+00	3.79E-06
rubidium-89	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-89	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-90	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-91	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-92	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
yttrium-91m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
niobium-95	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
technetium-99m	Ci	3.59E-07	6.90E-07	9.74E-08	0.00E+00
ruthenium-103	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
silver-110m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
antimony-124	Ci	0.00E+00	0.00E+00	0.00E+00	4.40E-07
cesium-137	Ci	3.68E-08	2.19E-07	6.96E-07	5.05E-07
cesium-138	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
barium-139	Ci	0.00E+00	0.00E+00	0.00E+00	4.28E-04
barium-140	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
lanthanum-140	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cerium-141	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cerium-144	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
praseodymium-144	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Total for period	Ci	7.55E-06	1.03E-05	1.77E-05	6.60E-04
 Total for period >8 day half life	Ci	7.19E-06	9.58E-06	1.76E-05	2.32E-04

* No batch discharges were made

**TABLE 2A
EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
LIQUID EFFLUENTS-SUMMATION OF ALL RELEASES**

	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR	EST. TOTAL ERROR %
A. Fission and activation products						
1. Total release (not including tritium, gases or alpha)	Ci	0.00E+00	0.00E+00	9.79E-03	5.67E-03	2.0E+01
2. Average diluted concentration during period	μCi/ml	0.00E+00	0.00E+00	5.50E-10	1.51E-09	
B. Tritium						
1. Total release	Ci	0.00E+00	0.00E+00	2.55E+00	9.53E-01	2.0E+01
2. Average diluted concentration during period	μCi/ml	0.00E+00	0.00E+00	1.43E-07	2.55E-07	
C. Dissolved and entrained gases						
1. Total release	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.0E+01
2. Average diluted concentration during period	μCi/ml	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
D. Gross alpha radioactivity						
1. Total release	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.0E+01
E. Volume of waste released (prior to dilution)						
	liters	0.00E+00	0.00E+00	1.66E+06	7.12E+05	1.0E+01
F. Volume of dilution water used during period						
	liters	0.00E+00	0.00E+00	1.78E+10	3.74E+09	1.0E+01

TABLE 2B
EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
LIQUID EFFLUENTS (CONTINUED)
CONTINUOUS MODE *BATCH MODE

NUCLIDES RELEASED	UNIT	1st QTR	2nd QTR	3rd QTR	4th QTR
sodium-24	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
chromium-51	Ci	0.00E+00	0.00E+00	0.00E+00	6.31E-04
manganese-54	Ci	0.00E+00	0.00E+00	4.82E-04	6.79E-04
iron-55	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cobalt-57	Ci	0.00E+00	0.00E+00	0.00E+00	5.21E-06
cobalt-58	Ci	0.00E+00	0.00E+00	1.26E-04	2.96E-04
iron-59	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cobalt-60	Ci	0.00E+00	0.00E+00	7.71E-03	3.40E-03
zinc-65	Ci	0.00E+00	0.00E+00	1.97E-04	4.30E-04
strontium-89	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-90	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
strontium-92	Ci	0.00E+00	0.00E+00	1.11E-05	0.00E+00
niobium-97	Ci	0.00E+00	0.00E+00	0.00E+00	1.27E-05
technetium-99m	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
antimony-124	Ci	0.00E+00	0.00E+00	0.00E+00	3.87E-05
iodine-131	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
iodine-133	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
cesium-134	Ci	0.00E+00	0.00E+00	3.50E-06	0.00E+00
cesium-137	Ci	0.00E+00	0.00E+00	1.26E-03	1.73E-04
cerium-144	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total for period	Ci	0.00E+00	0.00E+00	9.79E-03	5.67E-03
xenon-133	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00
xenon-135	Ci	0.00E+00	0.00E+00	0.00E+00	0.00E+00

* No continuous mode discharges were made

TABLE 3

SOLID WASTE AND IRRADIATED FUEL SHIPMENTS
PERIOD: January 1, 2018 through December 31, 2018

A. Solid Waste Shipped Offsite for Burial or Disposal (Not Irradiated Fuel)

1. Type of Waste

	Unit	12 Month Period	Est. Total Error %
a. Spent resins, filter sludges, evaporator bottoms, etc.	m ³	4.58E+01	N/A
	Ci	4.01E+01	15%
b. Dry compressible waste, contaminated equip, etc.	m ³	3.15E+02	N/A
	Ci	4.85E-01	25%
c. Irradiated components, control rods, etc.	m ³	0.0	N/A
	Ci	0.0	N/A
d. Other	m ³	0.0	N/A
	Ci	0.0	N/A

2. Estimate of Major Nuclide Composition (By Type of Waste), Percent %

a. Resin

americium-241	1.10E-03	iron-59	0.00E-00
antimony-124	0.00E-00	lanthanum-140	2.00E-03
barium-140	1.72E-03	maganese-54	2.12E+00
carbon-14	3.17E-01	nickel-63	9.36E-01
cesuim-134	5.49E-02	niobium-95	0.00E-00
cesium-137	1.40E+00	plutonium-238	1.00E-03
chromium-51	0.00E-00	plutonium-239	1.00E-03
cobalt-57	0.00E-00	plutonium-241	1.98E-01
cobalt-58	1.82E-01	silver-110m	1.16E-01
cobalt-60	6.26E+01	strontium-89	1.13E-01
curium-242	6.23E-04	strontium-90	2.66E-02
curium-244	9.76E-04	technetium-99	9.99E-03
iodine-129	1.64E-02	tritium	1.27E-01
iodine-131	3.82E-03	zinc-65	2.36E-00
iron-55	2.93E+01		

TABLE 3

SOLID WASTE AND IRRADIATED FUEL SHIPMENTS (continued)

PERIOD: January 1, 2018 through December 31, 2018

b. DAW

americium-241	1.68E-04	nickel-63	8.94E-01
antimony-124	8.73E-02	niobium-94	0.00E-00
carbon-14	3.68E-02	niobium-95	4.29E-02
cesium-137	3.42E-02	plutonium-238	1.54E-04
chromium-51	6.23E+00	plutonium-239	2.45E-04
cobalt-58	7.61E-01	plutonium-241	3.04E-02
cobalt-60	5.99E+01	silver-110m	0.00E-00
curium-242	9.80E-05	strontium-89	2.08E-02
curium-244	1.50E-04	strontium-90	5.02E-03
iodine-129	3.77E-04	technetium-99	9.66E-03
iron-55	2.82E+01	tritium	2.87E-02
iron-59	4.52E-01	zinc-65	1.48E-00
manganese-54	1.76E+00	zirconium-95	0.00E-00
nickel-59	0.00E-00		

c. N/A

TABLE 3

SOLID WASTE AND IRRADIATED FUEL SHIPMENTS (continued)
PERIOD: January 1, 2018 through December 31, 2018

3. Solid Waste Disposition

<u>Number of Shipments</u>	<u>Mode of Transportation</u>	<u>Destination</u>
8	Exclusive Use	UT
6	Exclusive Use	TN

4. Solidification Agent

None

B. Irradiated Fuel Shipments (Disposition)

<u>Number of Shipments</u>	<u>Mode of Transportation</u>	<u>Destination</u>
None	NA	NA

**GASEOUS RADIOACTIVE WASTES
CUMULATIVE DOSE DATA**

A.	Maximum gamma air dose		<u>1st Qtr</u>	<u>2nd Qtr</u>	<u>3rd Qtr</u>	<u>4th Qtr</u>	<u>Annual</u>
	Site boundary*		N	N	N	N	N
	1. Total	mrad	1.42E-05	6.72E-06	2.21E-05	3.10E-05	1.52E-04
	Percent of Technical Specification						
	2. Limit		0.00%	0.00%	0.00%	0.00%	0.00%
	Most Exposed Resident*		NW	NW	NW	NW	NW
	1. Total	mrad	2.23E-04	1.85E-05	2.14E-05	3.54E-04	8.54E-04
	Percent of Technical Specification						
	2. Limit		0.00%	0.00%	0.00%	0.01%	0.01%
B.	Maximum beta air dose						
	Site boundary*		N	N	N	N	N
	1. Total	mrad	9.27E-06	3.74E-06	1.31E-05	1.93E-05	9.52E-05
	Percent of Technical Specification						
	2. Limit		0.00%	0.00%	0.00%	0.00%	0.00%
	Most Exposed Resident*		NW	NW	NW	NW	NW
	1. Total	mrad	1.46E-04	1.03E-05	1.85E-05	2.21E-04	5.35E-04
	Percent of Technical Specification						
	2. Limit		0.00%	0.00%	0.00%	0.00%	0.00%
C.	Maximum organ dose due to I-131, I-133, and particulates (>8 day half lives)						
	Site boundary*		N	N	N	N	N
	1. Total	mrem	1.31E-03	1.54E-03	2.69E-03	1.39E-02	1.92E-02
	Percent of Technical Specification						
	2. Limit		0.02%	0.02%	0.04%	0.19%	0.13%
	3. Organ		Thyroid	Thyroid	Thyroid	Thyroid	Thyroid
	4. Exposed Individual		Infant	Infant	Infant	Infant	Infant
	Most Exposed Resident*		NW	NW	NW	NW	NW
	1. Total	mrem	8.25E-04	1.02E-03	1.28E-03	3.22E-03	7.59E-03
	Percent of Technical Specification						
	2. Limit		0.01%	0.01%	0.02%	0.04%	0.05%
	3. Organ		Thyroid	Thyroid	Thyroid	Thyroid	Thyroid
	4. Exposed Individual		Infant	Infant	Infant	Infant	Infant
D.	Maximum organ dose rate due to I-131, I-133, tritium, and particulates (>8 day half-lives) was 0.0192 mrem/year which was 0.13% of the Technical Specification Limit.						
E.	All radioactive noble gas effluent monitors were set to automatically alarm when the monitor alarm set point, determined as specified in the Offsite Dose Assessment Manual (ODAM), was exceeded. This is required to ensure that the 500 mrem/yr to the total body and the 3000 mrem/yr to the skin limits are not exceeded.						

*Resident and Site Boundary Key: N is 0.67 miles North, SE is 0.65 miles Southeast,
and NW residence is 0.90 miles Northwest.

GASEOUS RADIOACTIVE WASTES (Continued)
CUMULATIVE DOSE DATA

F. Maximum organ dose due to Carbon-14*			<u>1st Qtr</u>	<u>2nd Qtr</u>	<u>3rd Qtr</u>	<u>4th Qtr</u>	<u>Annual</u>
1.	Total	mrem	8.90E-01	8.66E-01	1.15E+00	9.61E-01	3.95E+00
2.	Percent of Technical Specification Limit		8.90%	8.66%	11.54%	9.61%	19.74%
3.	Organ	mrem	Bone	Bone	Bone	Bone	Bone
4.	Exposed Individual		Child	Child	Child	Child	Child

*Maximum organ dose due to Carbon-14 is based on summation of organ dose pathways from the nearest garden, nearest meat animal, and nearest milk animal. Inhalation pathway was negligible.

LIQUID RADIOACTIVE WASTES
CUMULATIVE DOSE DATA

A. Maximum whole body dose			<u>1st Qtr</u>	<u>2nd Qtr</u>	<u>3rd Qtr</u>	<u>4th Qtr</u>	<u>Annual</u>
1.	Total	mrem	0.00E+00	0.00E+00	6.27E-02	5.14E-02	1.14E-01
2.	Percent of Technical Specification Limit		0.00%	0.00%	4.18%	3.43%	3.80%
B. Maximum Organ Dose							
1.	Total	mrem	0.00E+00	0.00E+00	1.15E-01	9.01E-02	2.05E-01
2.	Percent of Technical Specification Limit		0.00%	0.00%	2.30%	1.80%	2.05%

SUPPLEMENTAL INFORMATION

A. Unplanned Releases, Leaks, or Spills:

None

B. NPPD Initiated Changes to the Process Control Program:

None.

C. Changes to the Offsite Dose Assessment Manual:

LBDCR 2018-013 - ODAM: Milk Sampling Stations 102 & 103 were removed from Appendix C (page C-7) and also from Figures 1 & 2 (pages C-7 & C8) because neither farm has milk-producing livestock any longer. Removal of Sampling Stations 102 and 103 does not reduce the overall effectiveness of the REMP program. Deletion of these sampling stations has no impact on CNS generated effluents, nor impact the ability for CNS to maintain dose at the site boundary or general public dose within limits.

In accordance with Technical Specifications (TS) 5.5.1.c.3, a complete, legible copy of the entire Offsite Dose Assessment Manual (ODAM) is being submitted along with the 2018 Annual Radioactive Effluent Release Report. Specific 2018 changes are identified with revision bars and date in the right-hand margin of affected pages.

D. Reports Required by the Offsite Dose Assessment Manual:

- 1) The following is being reported per the requirements of ODAM Specification D3.3.2, Condition B, Required Action B.2.1. This condition is being reported below due to the condition continuing for a period of greater than 31 days during the January 1 - December 31, 2018 reporting period.
 - a) The ERP process flow element was declared inoperable on 08/27/2017 at 11:20, due to lightning strike impacting process flow logic. A replacement part was pulled from spares to repair this condition (reduced spares count for this part to zero), and the ERP process flow element was declared operable in 3 1/2 days. A second lightning strike also resulted in the ERP process flow element being declared inoperable on 10/14/2017 at 09:15. This occurred before a new part was available, due to a 4 month lead time. The CNS Materials, Purchasing & Contracts department adjusted the part min/max requirements in support of this or similar conditions. This condition was captured in the station Corrective Actions program (CR CNS-2017-5852). TCC 5213829 was installed to provide the process flow element a conservative flow signal until parts were obtained.
 - b) The aforementioned condition carried over into the January 1-December 31, 2018 reporting period. Once applicable parts were obtained, repairs were completed on 3/17/2018. During 2018, the ERP process flow element was inoperable for almost 76 consecutive days (75 days, 15 hours).

APPENDIX B
METEOROLOGY

CONTENTS

	<u>Page</u>
METEOROLOGICAL DATA SUMMARIES	B1
MONTHLY SUMMARY TABLES OF HOURLY METEOROLOGICAL DATA	B6
JOINT FREQUENCY DISTRIBUTION TABLES	B130
ATMOSPHERIC DIFFUSION ESTIMATES	B239
ATMOSPHERIC DIFFUSION MODEL	B324

METEOROLOGICAL DATA SUMMARIES

Meteorological data collected onsite for the period January 1, 2018 through December 31, 2018, were reduced, validated, summarized for analysis, and included in appropriate dose calculations. Hourly data summaries are provided for all pertinent parameters and for the joint frequency distributions (JFD's) of wind speed and wind direction by atmospheric stability class.

DATA RECOVERY

Data recovery statistics are provided in Table 1 for all pertinent meteorological parameters. Average data recovery for all parameters in 2018 was approximately 99.9%.

	<u>Average Data Recovery</u>
January 1 - March 31, 2018 (Q1)	100.0%
April 1 - June 30, 2018 (Q2)	99.9%
First Semiannual Period - January 1 - June 30, 2018 (SEM1)	99.9%
July 1 - September 30, 2018 (Q3)	99.9%
October 1 - December 31, 2018 (Q4)	99.9%
Second Semiannual Period - July 1 - December 31, 2018 (SEM2)	99.9%
Annual Period - January 1 - December 31, 2018 (ANN)	99.9%

WIND AT 100-METER LEVEL AND 10-METER LEVEL

	<u>Predominant Wind Direction at 100m Level</u>		<u>Predominant Wind Direction at 10m Level</u>
Q1	North-northwest	16.2%	North-northwest 14.5%
Q2	South	12.9%	South 12.7%
SEM1	North-northwest	12.5%	North 12.1%
Q3	South	16.1%	South 16.9%
Q4	North-northwest	13.1%	South 14.0%
SEM2	South	14.5%	South 15.4%
ANN	South	12.7%	South 13.6%

	<u>Mean Wind Speed at 100m Level</u>	<u>Mean Wind Speed at 10m Level</u>
Q1	14.7 MPH	9.5 MPH
Q2	13.7 MPH	8.7 MPH
SEM1	14.2 MPH	9.1 MPH
Q3	10.9 MPH	6.3 MPH
Q4	13.0 MPH	7.5 MPH
SEM2	11.9 MPH	6.9 MPH
ANN	13.0 MPH	8.0 MPH

	<u>Maximum Hourly Average Wind Speed/ (Date at 100m Level)</u>	<u>Maximum Hourly Average Wind Speed/ (Date at 10m Level)</u>
Q1	36.2 MPH/(18/01/26)	28.4 MPH/(18/02/18)
Q2	42.1 MPH/(18/04/30)	34.7 MPH/(18/04/30)
SEM1	42.1 MPH/(18/04/30)	34.7 MPH/(18/04/30)
Q3	40.4 MPH/(18/09/01)	25.5 MPH/(18/08/27)
Q4	41.4 MPH/(18/11/25)	27.7 MPH/(18/11/25)
SEM2	41.4 MPH/(18/11/25)	27.7 MPH/(18/11/25)
ANN	42.1 MPH/(18/04/30)	34.7 MPH/(18/04/30)

TEMPERATURE AT 10-METER LEVEL

	<u>Mean Hourly Average Temperature</u>	<u>Average Daily Maximum</u>	<u>Average Daily Minimum</u>
Q1	31.3 Degrees F	40.8 Degrees F	22.9 Degrees F
Q2	65.1 Degrees F	75.5 Degrees F	54.9 Degrees F
SEM1	48.3 Degrees F	58.3 Degrees F	39.0 Degrees F
Q3	73.5 Degrees F	82.1 Degrees F	65.2 Degrees F
Q4	39.8 Degrees F	48.2 Degrees F	32.1 Degrees F
SEM2	56.7 Degrees F	65.1 Degrees F	48.7 Degrees F
ANN	52.5 Degrees F	61.7 Degrees F	43.8 Degrees F

	<u>Maximum Temperature (Date)</u>	<u>Minimum Temperature (Date)</u>
Q1	69.8 Degrees F (18/02/27)	-13.7 Degrees F (18/01/01)
Q2	97.9 Degrees F (18/05/26)	14.2 Degrees F (18/04/02)
SEM1	97.9 Degrees F (18/05/26)	-13.7 Degrees F (18/01/01)
Q3	96.7 Degrees F (18/07/12)	46.1 Degrees F (18/09/29)
Q4	89.8 Degrees F (18/10/03)	11.6 Degrees F (18/11/27)
SEM2	96.7 Degrees F (18/07/12)	11.6 Degrees F (18/11/27)
ANN	97.9 Degrees F (18/05/26)	-13.7 Degrees F (18/01/01)

PRECIPITATION

	<u>Total Precipitation</u>	<u>Maximum Daily Precipitation Total/ (Date)</u>	<u>Maximum Hourly Precipitation Total/ (Date)</u>
Q1	3.45 Inches	1.61 Inches (18/03/26)	0.69 Inches (18/03/26)
Q2	10.02 Inches	1.39 Inches (18/06/19)	0.94 Inches (18/06/06)
SEM1	13.47 Inches	1.61 Inches (18/03/26)	0.94 Inches (18/06/06)
Q3	14.82 Inches	2.10 Inches (18/09/02)	1.22 Inches (18/14/09)
Q4	8.54 Inches	1.28 Inches (18/12/01)	0.64 Inches (18/10/08)
SEM2	23.36 Inches	2.10 Inches (18/09/02)	1.22 Inches (18/08/14)
ANN	36.83 Inches	2.10 Inches (18/09/02)	1.22 Inches (18/08/14)

ATMOSPHERIC STABILITY

Atmospheric stability is determined through classification of differential temperature data based on JFD of the 100-meter wind and the delta T (100m - 10m) stability data.

	<u>Unstable Conditions Classes A-C</u>	<u>Neutral Conditions Class D</u>	<u>Stable Conditions Classes E-G</u>
Q1	1%	62%	38%
Q2	4%	54%	43%
SEM1	2%	58%	40%
Q3	<1%	55%	45%
Q4	0%	53%	47%
SEM2	0%	54%	46%
ANN	1%	56%	43%

TABLE 1. Meteorological Data Recovery

Data Recovery (% of total Observations)

	January- March 2018	April- June 2018	January- June 2018	July- Sept. 2018	October- Dec. 2018	July- Dec. 2018	January- Dec. 2018
100m wind speed	99.9	99.9	99.9	99.9	99.9	99.9	99.9
100m wind direction	100.0	100.0	100.0	100.0	99.9	99.9	99.9
100m ambient temperature	100.0	100.0	100.0	100.0	100.0	100.0	100.0
60m wind speed	100.0	100.0	100.0	100.0	99.9	99.9	99.9
60m wind direction	100.0	100.0	100.0	100.0	99.9	99.9	99.9
60m ambient temperature	100.0	100.0	100.0	100.0	100.0	100.0	100.0
10m wind speed	100.0	99.8	99.1	100.0	99.8	99.9	99.9
10m wind direction	100.0	99.8	99.1	100.0	99.8	99.9	99.9
10m ambient temperature	100.0	100.0	100.0	100.0	100.0	100.0	100.0
10m dew point	100.0	99.6	99.8	98.6	99.5	99.8	99.8
100m-10m delta T	100.0	100.0	100.0	100.0	100.0	100.0	100.0
100m-60m delta T	100.0	100.0	100.0	100.0	100.0	100.0	100.0
60m-10m delta T	100.0	100.0	100.0	100.0	100.0	100.0	100.0
Precipitation	100.0	99.9	99.9	99.9	100.0	99.9	99.9
100m JFD	100.0	100.0	100.0	100.0	100.0	100.0	100.0
10m JFD	100.0	99.8	99.9	100.0	99.8	99.9	99.9

JFD - Joint Frequency Distribution of wind speed, wind direction and atmospheric stability.

MONTHLY SUMMARY TABLES OF HOURLY METEOROLOGICAL DATA

The tables presented in this section provide a summary of hourly averages of measured meteorological parameters. The tables provide summaries by month for the annual period January through December, 2018. Summaries for the first quarter, second quarter, third quarter, fourth quarter, and semiannual periods are also provided. The parameters provided are listed below.

- * 10 meter ambient temperature.
- * Wind direction frequencies at 10 meters and 100 meters.
- * Precipitation.

Any missing or non-measured data are indicated by a field of 9's.

**10-Meter Ambient Temperature
and
10-Meter Dew Point Temperature**

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JAN-MAR 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

JANUARY

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULE	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	31	23.4	31	17.4	31	78.8	31	3.2	31	21.5
2	31	22.7	31	17.0	31	80.0	31	3.1	31	21.0
3	31	22.2	31	16.7	31	80.5	31	3.1	31	20.5
4	31	21.7	31	16.2	31	80.4	31	3.0	31	20.1
5	31	21.2	31	15.9	31	80.5	31	3.0	31	19.6
6	31	20.7	31	15.7	31	81.5	31	3.0	31	19.3
7	31	20.1	31	15.4	31	82.3	31	2.9	31	18.8
8	31	19.6	31	15.0	31	82.5	31	2.9	31	18.4
9	31	19.9	31	14.9	31	81.3	31	2.9	31	18.6
10	31	21.4	31	15.4	31	78.2	31	3.0	31	19.7
11	31	23.6	31	16.1	31	73.4	31	3.1	31	21.5
12	31	25.8	31	17.0	31	69.6	31	3.2	31	23.2
13	31	27.9	31	17.5	31	65.7	31	3.3	31	24.7
14	31	29.6	31	18.2	31	63.5	31	3.3	31	25.9
15	31	31.0	31	19.2	31	62.8	31	3.4	31	27.1
16	31	31.8	31	20.2	31	63.5	31	3.5	31	27.8
17	31	31.7	31	20.6	31	64.9	31	3.5	31	27.8
18	31	30.2	31	20.5	31	68.4	31	3.5	31	26.9
19	31	28.7	31	20.4	31	72.0	31	3.5	31	25.9
20	31	27.8	31	20.1	31	73.6	31	3.5	31	25.3
21	31	26.8	31	19.7	31	75.5	31	3.4	31	24.5
22	31	26.3	31	19.6	31	76.9	31	3.4	31	24.1
23	31	26.0	31	19.3	31	76.9	31	3.4	31	23.8
24	31	25.4	31	19.0	31	77.7	31	3.3	31	23.3
HOURLY MEAN		25.2		17.8		74.6		3.2		22.9
AVG DAILY MAX		35.0		25.4		88.7		4.2		31.0
AVG DAILY MIN		16.7		11.8		60.0		2.5		15.7
ABSOLUTE MAX		59.2		49.5		100.0		9.2		49.5
ABSOLUTE MIN		-13.7		-19.6		33.3		.5		-14.2
TOTAL OBS		744		744		744		744		744

B8

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JAN-MAR 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

FEBRUARY

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER OBS	(DEG F)	NUMBER OBS	(DEG F)	NUMBER OBS	(%)	NUMBER OBS	(GM/M3)	NUMBER OBS	(DEG F)
1	28	25.6	28	20.5	28	81.6	28	3.4	28	23.9
2	28	24.9	28	20.1	28	82.6	28	3.4	28	23.3
3	28	24.3	28	19.8	28	83.8	28	3.3	28	22.8
4	28	23.9	28	19.4	28	83.7	28	3.3	28	22.5
5	28	23.3	28	18.8	28	83.8	28	3.2	28	21.9
6	28	22.7	28	18.0	28	83.3	28	3.1	28	21.3
7	28	22.4	28	17.6	28	82.6	28	3.1	28	21.0
8	28	22.1	28	17.4	28	82.8	28	3.0	28	20.7
9	28	22.5	28	17.6	28	81.8	28	3.0	28	21.1
10	28	23.9	28	17.9	28	78.3	28	3.1	28	22.1
11	28	25.8	28	18.1	28	73.5	28	3.2	28	23.4
12	28	28.0	28	18.5	28	68.8	28	3.2	28	25.0
13	28	30.0	28	19.1	28	65.8	28	3.3	28	26.4
14	28	31.5	28	19.6	28	63.6	28	3.3	28	27.4
15	28	32.6	28	19.9	28	62.4	28	3.3	28	28.1
16	28	33.2	28	20.6	28	62.8	28	3.4	28	28.7
17	28	33.5	28	21.5	28	64.3	28	3.5	28	29.1
18	28	32.9	28	22.0	28	67.1	28	3.6	28	28.9
19	28	31.4	28	22.0	28	70.1	28	3.6	28	28.1
20	28	30.0	28	22.0	28	73.6	28	3.6	28	27.2
21	28	28.8	28	22.0	28	76.7	28	3.6	28	26.5
22	28	27.8	28	21.8	28	79.2	28	3.6	28	25.8
23	28	27.0	28	21.5	28	80.4	28	3.6	28	25.2
24	28	26.2	28	21.3	28	82.0	28	3.5	28	24.6
HOURLY MEAN		27.3		19.9		75.6		3.3		24.8
AVG DAILY MAX		36.7		27.9		89.7		4.5		32.3
AVG DAILY MIN		18.6		13.3		58.5		2.5		17.3
ABSOLUTE MAX		69.8		51.4		100.0		9.8		55.9
ABSOLUTE MIN		.1		-4.2		30.8		1.0		-.2
TOTAL OBS		672		672		672		672		672

B9

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JAN-MAR 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

MARCH

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	31	38.8	31	31.9	31	78.1	31	5.0	31	36.0
2	31	38.0	31	31.8	31	80.0	31	4.9	31	35.5
3	31	37.5	31	31.8	31	81.3	31	4.9	31	35.2
4	31	36.6	31	31.3	31	82.4	31	4.9	31	34.5
5	31	36.1	31	31.2	31	83.1	31	4.8	31	34.2
6	31	35.7	31	31.1	31	84.2	31	4.8	31	33.9
7	31	35.1	31	31.2	31	86.0	31	4.8	31	33.6
8	31	35.2	31	31.0	31	85.3	31	4.8	31	33.6
9	31	36.3	31	31.0	31	81.9	31	4.7	31	34.2
10	31	38.3	31	31.1	31	77.0	31	4.7	31	35.4
11	31	40.5	31	31.1	31	72.0	31	4.7	31	36.7
12	31	42.5	31	31.3	31	68.2	31	4.7	31	37.9
13	31	44.4	31	31.4	31	64.2	31	4.8	31	38.9
14	31	46.0	31	31.3	31	60.4	31	4.7	31	39.8
15	31	47.2	31	31.4	31	58.5	31	4.8	31	40.4
16	31	48.1	31	31.5	31	57.0	31	4.8	31	41.0
17	31	48.4	31	31.5	31	56.5	31	4.8	31	41.2
18	31	48.0	31	31.9	31	57.8	31	4.9	31	41.1
19	31	46.4	31	32.2	31	61.0	31	4.9	31	40.3
20	31	44.2	31	32.2	31	65.4	31	5.0	31	39.2
21	31	42.9	31	31.9	31	67.7	31	4.9	31	38.4
22	31	41.6	31	31.8	31	70.4	31	4.9	31	37.6
23	31	40.4	31	31.6	31	72.8	31	4.9	31	36.9
24	31	39.4	31	31.6	31	75.5	31	4.9	31	36.2
HOURLY MEAN		41.2		31.5		71.9		4.8		37.2
AVG DAILY MAX		50.4		36.3		90.2		5.8		43.1
AVG DAILY MIN		32.9		26.7		52.7		4.0		31.2
ABSOLUTE MAX		67.8		50.6		100.0		9.6		55.4
ABSOLUTE MIN		20.3		14.0		21.3		2.2		19.2
TOTAL OBS		744		744		744		744		744

B10

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JAN-MAR 2018

JAN-MAR HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	90	29.4	90	23.4	90	79.4	90	3.9	90	27.3
2	90	28.7	90	23.1	90	80.8	90	3.8	90	26.7
3	90	28.1	90	22.9	90	81.8	90	3.8	90	26.3
4	90	27.5	90	22.4	90	82.1	90	3.7	90	25.8
5	90	27.0	90	22.1	90	82.4	90	3.7	90	25.4
6	90	26.5	90	21.7	90	83.0	90	3.6	90	24.9
7	90	26.0	90	21.5	90	83.7	90	3.6	90	24.5
8	90	25.7	90	21.2	90	83.6	90	3.6	90	24.3
9	90	26.4	90	21.3	90	81.6	90	3.6	90	24.7
10	90	28.0	90	21.6	90	77.8	90	3.6	90	25.9
11	90	30.1	90	21.9	90	73.0	90	3.7	90	27.3
12	90	32.3	90	22.4	90	68.9	90	3.7	90	28.8
13	90	34.2	90	22.8	90	65.2	90	3.8	90	30.1
14	90	35.9	90	23.1	90	62.5	90	3.8	90	31.2
15	90	37.1	90	23.6	90	61.2	90	3.9	90	32.0
16	90	37.8	90	24.2	90	61.1	90	3.9	90	32.6
17	90	38.0	90	24.6	90	61.8	90	4.0	90	32.8
18	90	37.2	90	24.9	90	64.4	90	4.0	90	32.4
19	90	35.7	90	25.0	90	67.6	90	4.0	90	31.6
20	90	34.1	90	24.9	90	70.8	90	4.0	90	30.7
21	90	33.0	90	24.6	90	73.2	90	4.0	90	29.9
22	90	32.0	90	24.5	90	75.4	90	4.0	90	29.3
23	90	31.3	90	24.2	90	76.6	90	4.0	90	28.7
24	90	30.5	90	24.0	90	78.3	90	3.9	90	28.2
HOURLY MEAN		31.3		23.2		74.0		3.8		28.4
AVG DAILY MAX		40.8		29.9		89.5		4.9		35.6
AVG DAILY MIN		22.9		17.4		57.0		3.0		21.5
ABSOLUTE MAX		69.8		51.4		100.0		9.8		55.9
ABSOLUTE MIN		-13.7		-19.6		21.3		.5		-14.2
TOTAL OBS		2160		2160		2160		2160		2160

B11

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY APR-JUN 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

APRIL

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	30	42.2	30	32.2	30	69.3	30	5.2	30	37.9
2	30	41.0	30	32.0	30	71.7	30	5.1	30	37.1
3	30	39.9	30	31.8	30	74.4	30	5.1	30	36.4
4	30	39.1	30	31.5	30	75.9	30	5.1	30	35.9
5	30	38.0	30	31.3	30	78.2	30	5.0	30	35.2
6	30	37.0	30	31.0	30	80.4	30	5.0	30	34.5
7	30	37.1	30	31.0	30	80.0	30	5.0	30	34.6
8	30	38.9	30	31.7	30	76.7	30	5.1	30	35.9
9	30	41.8	29	32.2	29	70.2	29	5.2	29	37.7
10	30	44.7	29	32.3	29	64.6	29	5.2	29	39.3
11	30	47.2	29	32.2	29	59.4	29	5.1	29	40.6
12	30	49.3	29	32.4	29	55.7	29	5.1	29	41.7
13	30	51.2	29	32.6	29	53.0	29	5.2	29	42.7
14	30	52.6	29	33.0	29	51.7	29	5.2	29	43.6
15	30	53.6	29	33.3	29	50.8	29	5.3	29	44.2
16	30	54.1	29	33.7	29	50.1	29	5.3	29	44.6
17	30	54.3	30	33.8	30	50.7	30	5.4	30	44.5
18	30	54.3	30	34.0	30	50.6	30	5.4	30	44.6
19	30	53.1	30	34.3	30	52.8	30	5.4	30	44.1
20	30	50.5	30	34.0	30	57.0	30	5.4	30	42.8
21	30	48.4	30	33.8	30	60.4	30	5.4	30	41.7
22	30	47.0	30	33.5	30	62.6	30	5.3	30	40.8
23	30	45.7	30	33.4	30	64.9	30	5.4	30	40.2
24	30	44.7	30	33.5	30	67.3	30	5.4	30	39.6
HOURLY MEAN		46.1		32.7		63.8		5.2		40.0
AVG DAILY MAX		57.1		38.4		85.9		6.4		46.7
AVG DAILY MIN		34.3		26.8		44.5		4.1		32.0
ABSOLUTE MAX		85.0		63.7		100.0		14.8		69.6
ABSOLUTE MIN		14.2		8.9		19.8		1.9		14.1
TOTAL OBS		720		712		712		712		712

B12

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY APR-JUN 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

MAY

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	31	66.9	31	60.1	31	80.4	31	13.3	31	62.8
2	31	66.0	31	60.2	31	83.1	31	13.4	31	62.5
3	31	65.0	31	60.0	31	85.2	31	13.3	31	62.0
4	31	64.2	31	60.0	31	87.3	31	13.4	31	61.7
5	31	63.5	31	59.9	31	88.9	31	13.3	31	61.3
6	31	62.6	31	59.6	31	90.7	31	13.2	31	60.9
7	31	63.6	31	59.7	31	87.8	31	13.3	31	61.3
8	31	66.3	31	60.1	31	81.4	31	13.4	31	62.6
9	31	69.5	31	60.4	31	74.2	31	13.4	31	63.9
10	31	72.4	31	60.4	31	68.0	31	13.3	31	65.0
11	31	74.8	31	60.1	31	62.6	31	13.2	31	65.7
12	31	76.7	31	59.5	31	58.2	31	12.9	31	66.1
13	31	78.5	31	59.2	31	54.7	31	12.7	31	66.6
14	31	80.4	31	58.6	31	50.4	31	12.5	31	67.0
15	31	81.7	31	58.1	31	47.6	31	12.2	31	67.2
16	31	81.0	31	58.4	31	49.8	31	12.3	31	67.1
17	31	81.0	31	58.5	31	50.3	31	12.4	31	67.1
18	31	80.1	31	59.0	31	52.6	31	12.6	31	67.0
19	31	78.8	31	60.1	31	56.1	31	13.1	31	67.1
20	31	75.9	31	60.6	31	62.0	31	13.3	31	66.4
21	31	73.2	31	60.6	31	67.0	31	13.4	31	65.4
22	31	71.5	31	60.7	31	70.7	31	13.5	31	64.8
23	31	69.7	31	60.7	31	74.7	31	13.5	31	64.2
24	31	68.2	31	60.6	31	78.3	31	13.5	31	63.6
HOURLY MEAN		72.2		59.8		69.2		13.1		64.6
AVG DAILY MAX		83.2		63.7		92.4		14.9		68.8
AVG DAILY MIN		61.9		55.3		44.6		11.1		60.2
ABSOLUTE MAX		97.9		69.4		100.0		17.6		76.4
ABSOLUTE MIN		50.3		41.7		24.3		6.5		50.3
TOTAL OBS		744		744		744		744		744

B13

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY APR-JUN 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

JUNE

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	30	73.0	30	67.0	30	82.2	30	16.8	30	69.1
2	30	71.8	30	66.7	30	84.8	30	16.6	30	68.5
3	30	70.9	30	66.4	30	86.6	30	16.5	30	68.0
4	30	70.1	30	66.3	30	88.4	30	16.5	30	67.7
5	30	69.2	30	65.9	30	89.8	30	16.2	30	67.1
6	30	69.0	30	65.6	30	89.3	30	16.1	30	66.9
7	30	70.1	30	65.7	30	86.6	30	16.1	30	67.3
8	30	72.1	30	66.1	30	82.3	30	16.3	30	68.2
9	30	74.5	30	66.6	30	77.4	30	16.5	30	69.4
10	30	76.9	30	67.1	30	73.0	30	16.7	30	70.4
11	30	79.0	30	67.0	30	68.6	30	16.7	30	71.1
12	30	81.0	30	66.8	30	64.3	30	16.5	30	71.6
13	30	82.3	30	66.7	30	61.4	30	16.5	30	72.0
14	30	83.4	30	66.4	30	58.4	30	16.2	30	72.1
15	30	84.2	30	66.5	30	56.9	30	16.2	30	72.4
16	30	84.7	30	66.9	30	56.5	30	16.4	30	72.8
17	30	84.9	30	67.1	30	56.6	30	16.5	30	73.0
18	30	84.2	30	67.8	30	59.2	30	17.0	30	73.2
19	30	83.0	30	68.3	30	62.7	30	17.3	30	73.1
20	30	79.6	30	68.2	30	69.4	30	17.3	30	72.1
21	30	77.2	30	68.3	30	75.4	30	17.4	30	71.3
22	30	76.0	30	68.3	30	78.4	30	17.5	30	70.9
23	30	74.9	30	67.8	30	79.7	30	17.2	30	70.3
24	30	73.6	30	67.7	30	82.6	30	17.1	30	69.7
HOURLY MEAN		76.9		67.0		73.8		16.7		70.3
AVG DAILY MAX		85.9		71.1		93.7		19.0		74.4
AVG DAILY MIN		68.1		62.8		53.5		14.4		65.8
ABSOLUTE MAX		97.7		80.1		100.0		25.2		81.1
ABSOLUTE MIN		59.0		47.1		33.1		8.0		56.1
TOTAL OBS		720		720		720		720		720

B14

PROGRAM: WETTEMP
 VERSION: PC-1.0

NFPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY APR-JUN 2018

APR-JUN HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	91	60.8	91	53.2	91	77.3	91	11.8	91	56.7
2	91	59.7	91	53.0	91	79.9	91	11.7	91	56.1
3	91	58.7	91	52.8	91	82.1	91	11.7	91	55.6
4	91	57.9	91	52.7	91	83.9	91	11.7	91	55.2
5	91	57.0	91	52.4	91	85.7	91	11.5	91	54.6
6	91	56.3	91	52.1	91	86.9	91	11.4	91	54.2
7	91	57.0	91	52.2	91	84.8	91	11.5	91	54.5
8	91	59.2	91	52.7	91	80.2	91	11.6	91	55.6
9	91	62.0	90	53.3	90	74.0	90	11.8	90	57.3
10	91	64.7	90	53.6	90	68.6	90	11.8	90	58.5
11	91	67.1	90	53.4	90	63.6	90	11.7	90	59.4
12	91	69.1	90	53.2	90	59.4	90	11.6	90	60.1
13	91	70.7	90	53.2	90	56.4	90	11.5	90	60.7
14	91	72.2	90	53.0	90	53.5	90	11.4	90	61.2
15	91	73.3	90	52.9	90	51.7	90	11.3	90	61.5
16	91	73.4	90	53.3	90	52.2	90	11.4	90	61.7
17	91	73.5	91	53.2	91	52.5	91	11.4	91	61.6
18	91	73.0	91	53.7	91	54.1	91	11.7	91	61.7
19	91	71.7	91	54.3	91	57.2	91	11.9	91	61.5
20	91	68.7	91	54.3	91	62.8	91	12.0	91	60.5
21	91	66.4	91	54.3	91	67.6	91	12.1	91	59.5
22	91	64.9	91	54.2	91	70.6	91	12.1	91	58.9
23	91	63.5	91	54.0	91	73.1	91	12.0	91	58.3
24	91	62.2	91	54.0	91	76.1	91	12.0	91	57.7
HOURLY MEAN		65.1		53.3		68.9		11.7		58.4
AVG DAILY MAX		75.5		57.8		90.7		13.5		63.4
AVG DAILY MIN		54.9		48.4		47.5		9.9		52.7
ABSOLUTE MAX		97.9		80.1		100.0		25.2		81.1
ABSOLUTE MIN		14.2		8.9		19.8		1.9		14.1
TOTAL OBS		2184		2176		2176		2176		2176

B15

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JAN-JUN 2018

JAN-JUN HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	181	45.2	181	38.4	181	78.4	181	7.8	181	42.1
2	181	44.2	181	38.1	181	80.3	181	7.8	181	41.5
3	181	43.5	181	37.9	181	81.9	181	7.8	181	41.0
4	181	42.8	181	37.6	181	83.0	181	7.7	181	40.6
5	181	42.1	181	37.3	181	84.1	181	7.6	181	40.1
6	181	41.5	181	37.0	181	84.9	181	7.6	181	39.6
7	181	41.6	181	36.9	181	84.3	181	7.6	181	39.6
8	181	42.5	181	37.1	181	81.8	181	7.6	181	40.1
9	181	44.3	180	37.3	180	77.8	180	7.7	180	41.0
10	181	46.5	180	37.6	180	73.2	180	7.7	180	42.2
11	181	48.7	180	37.7	180	68.3	180	7.7	180	43.4
12	181	50.8	180	37.8	180	64.1	180	7.7	180	44.5
13	181	52.6	180	38.0	180	60.8	180	7.7	180	45.4
14	181	54.1	180	38.0	180	58.0	180	7.6	180	46.2
15	181	55.3	180	38.3	180	56.5	180	7.6	180	46.8
16	181	55.7	180	38.8	180	56.6	180	7.7	180	47.2
17	181	55.8	181	39.0	181	57.1	181	7.7	181	47.3
18	181	55.2	181	39.4	181	59.2	181	7.9	181	47.1
19	181	53.8	181	39.7	181	62.4	181	8.0	181	46.6
20	181	51.5	181	39.7	181	66.8	181	8.1	181	45.6
21	181	49.8	181	39.5	181	70.4	181	8.1	181	44.8
22	181	48.5	181	39.4	181	73.0	181	8.1	181	44.2
23	181	47.5	181	39.2	181	74.8	181	8.0	181	43.6
24	181	46.4	181	39.1	181	77.2	181	8.0	181	43.0
HOURLY MEAN		48.3		38.3		71.5		7.8		43.5
AVG DAILY MAX		58.3		43.9		90.1		9.2		49.5
AVG DAILY MIN		39.0		33.0		52.2		6.5		37.2
ABSOLUTE MAX		97.9		80.1		100.0		25.2		81.1
ABSOLUTE MIN		-13.7		-19.6		19.8		.5		-14.2
TOTAL OBS		4344		4336		4336		4336		4336

B16

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JUL-SEP 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

JULY

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	31	72.7	31	68.7	31	87.9	31	17.7	31	70.1
2	31	71.7	31	68.2	31	89.4	31	17.4	31	69.4
3	31	70.8	31	67.6	31	90.1	31	17.1	31	68.7
4	31	69.8	31	67.1	31	91.6	31	16.8	31	68.1
5	31	69.3	31	67.0	31	92.9	31	16.8	31	67.9
6	31	68.5	31	66.5	31	93.7	31	16.5	31	67.2
7	31	69.4	31	66.5	31	90.9	31	16.5	31	67.6
8	31	71.6	31	66.6	31	84.8	31	16.5	31	68.4
9	31	74.0	31	66.8	31	78.9	31	16.6	31	69.3
10	31	76.6	31	67.1	31	73.0	31	16.7	31	70.4
11	31	78.9	31	67.0	31	67.4	31	16.6	31	71.1
12	31	80.6	31	66.8	31	63.3	31	16.4	31	71.5
13	31	82.0	31	66.2	31	59.8	31	16.0	31	71.6
14	31	82.8	31	66.2	31	58.3	31	16.0	31	71.8
15	31	83.0	31	66.1	31	57.6	31	15.9	31	71.8
16	31	83.4	31	66.4	31	57.6	31	16.1	31	72.1
17	31	83.3	31	66.9	31	59.0	31	16.4	31	72.4
18	31	83.2	31	68.1	31	61.5	31	17.0	31	73.1
19	31	83.0	31	69.5	31	64.8	31	17.9	31	73.9
20	31	80.3	31	70.5	31	72.9	31	18.6	31	73.7
21	31	77.6	31	70.8	31	80.2	31	18.8	31	73.0
22	31	76.0	31	70.5	31	83.7	31	18.7	31	72.3
23	31	74.9	31	69.9	31	85.1	31	18.3	31	71.6
24	31	73.6	31	69.2	31	86.5	31	17.9	31	70.7
HOURLY MEAN		76.5		67.8		76.3		17.0		70.7
AVG DAILY MAX		84.5		71.8		96.7		19.4		74.4
AVG DAILY MIN		67.9		64.1		54.2		14.9		66.8
ABSOLUTE MAX		96.7		78.1		100.0		23.7		80.8
ABSOLUTE MIN		60.8		55.6		41.7		11.1		60.0
TOTAL OBS		744		744		744		744		744

B17

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JUL-SEP 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

AUGUST

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	31	71.3	31	67.6	31	88.9	31	17.1	31	68.9
2	31	70.6	31	67.4	31	90.2	31	17.0	31	68.5
3	31	69.9	31	67.0	31	91.3	31	16.8	31	68.1
4	31	69.3	31	66.8	31	92.6	31	16.7	31	67.7
5	31	68.7	31	66.5	31	93.3	31	16.5	31	67.2
6	31	68.2	31	66.2	31	93.7	31	16.3	31	66.9
7	31	68.3	31	66.0	31	93.1	31	16.3	31	66.8
8	31	69.9	31	66.7	31	90.2	31	16.6	31	67.8
9	31	71.8	31	67.1	31	86.1	31	16.8	31	68.8
10	31	74.3	31	67.6	31	80.6	31	17.0	31	69.9
11	31	76.7	31	67.6	31	74.7	31	16.9	31	70.7
12	31	78.7	31	67.3	31	69.9	31	16.7	31	71.2
13	31	80.4	31	67.0	31	65.8	31	16.5	31	71.5
14	31	81.5	31	66.8	31	63.6	31	16.4	31	71.8
15	31	82.4	31	66.7	31	61.9	31	16.3	31	72.1
16	31	82.9	31	66.5	31	60.6	31	16.2	31	72.1
17	31	83.1	31	67.1	31	60.9	31	16.5	31	72.4
18	31	82.6	31	67.8	31	63.0	31	16.9	31	72.7
19	31	80.9	31	69.2	31	69.5	31	17.8	31	73.0
20	31	77.8	31	69.4	31	76.9	31	18.0	31	72.2
21	31	75.7	31	69.2	31	81.6	31	17.9	31	71.4
22	31	74.3	31	68.9	31	84.3	31	17.8	31	70.8
23	31	73.4	31	68.4	31	85.5	31	17.5	31	70.1
24	31	72.5	31	68.0	31	87.1	31	17.3	31	69.6
HOURLY MEAN		75.2		67.4		79.4		16.9		70.1
AVG DAILY MAX		84.1		71.2		96.9		19.1		74.1
AVG DAILY MIN		66.6		63.6		57.2		14.8		65.6
ABSOLUTE MAX		96.2		76.7		100.0		22.6		79.6
ABSOLUTE MIN		57.2		54.4		32.9		10.6		55.8
TOTAL OBS		744		744		744		744		744

B18

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JUL-SEP 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

SEPTEMBER

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER OBS	(DEG F)	NUMBER OBS	(DEG F)	NUMBER OBS	(%)	NUMBER OBS	(GM/M3)	NUMBER OBS	(DEG F)
1	30	65.6	30	62.9	30	91.2	30	15.1	30	64.0
2	30	65.1	30	62.5	30	91.6	30	14.9	30	63.6
3	30	64.6	30	62.3	30	92.5	30	14.8	30	63.2
4	30	63.9	30	62.0	30	93.9	30	14.7	30	62.8
5	30	63.3	30	61.9	30	95.3	30	14.6	30	62.5
6	30	62.8	30	61.7	30	96.1	30	14.5	30	62.2
7	30	62.6	30	61.4	30	95.8	30	14.4	30	61.9
8	30	63.6	29	61.4	29	92.1	29	14.4	29	62.4
9	30	66.2	29	62.0	29	86.6	29	14.7	29	63.7
10	30	68.9	29	62.0	29	79.8	29	14.6	29	64.7
11	30	71.2	29	62.2	29	74.9	29	14.6	29	65.6
12	30	72.9	29	62.1	29	71.3	29	14.6	29	66.1
13	30	74.0	29	61.6	29	68.1	29	14.3	29	66.2
14	30	74.8	29	61.3	29	66.7	29	14.2	29	66.3
15	30	75.3	29	60.8	29	64.7	29	13.9	29	66.3
16	30	75.5	30	60.6	30	63.4	30	13.8	30	66.3
17	30	75.7	30	60.7	30	63.3	30	13.9	30	66.4
18	30	74.8	30	61.5	30	66.1	30	14.2	30	66.5
19	30	72.1	30	62.6	30	73.6	30	14.8	30	66.1
20	30	70.0	30	63.1	30	80.0	30	15.1	30	65.7
21	30	68.3	30	63.1	30	84.1	30	15.1	30	65.1
22	30	67.0	30	62.6	30	86.6	30	15.0	30	64.4
23	30	66.1	30	62.3	30	88.2	30	14.8	30	63.9
24	30	65.3	30	62.3	30	90.5	30	14.8	30	63.6
HOURLY MEAN		68.7		62.0		81.6		14.6		64.5
AVG DAILY MAX		77.5		65.6		98.7		16.4		68.3
AVG DAILY MIN		60.9		58.4		58.9		12.9		60.2
ABSOLUTE MAX		93.4		75.6		100.0		22.0		79.3
ABSOLUTE MIN		46.1		34.3		28.5		5.0		45.4
TOTAL OBS		720		712		712		712		712

B19

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JUL-SEP 2018

JUL-SEP HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	92	69.9	92	66.4	92	89.3	92	16.6	92	67.7
2	92	69.2	92	66.1	92	90.4	92	16.5	92	67.2
3	92	68.5	92	65.7	92	91.3	92	16.2	92	66.7
4	92	67.7	92	65.4	92	92.7	92	16.1	92	66.2
5	92	67.1	92	65.2	92	93.8	92	16.0	92	65.9
6	92	66.5	92	64.8	92	94.5	92	15.8	92	65.5
7	92	66.8	92	64.7	92	93.2	92	15.7	92	65.5
8	92	68.4	91	65.0	91	89.0	91	15.9	91	66.3
9	92	70.7	91	65.4	91	83.8	91	16.0	91	67.3
10	92	73.3	91	65.6	91	77.8	91	16.1	91	68.4
11	92	75.7	91	65.7	91	72.3	91	16.1	91	69.2
12	92	77.4	91	65.5	91	68.1	91	15.9	91	69.7
13	92	78.8	91	65.0	91	64.5	91	15.6	91	69.9
14	92	79.7	91	64.8	91	62.8	91	15.5	91	70.1
15	92	80.3	91	64.6	91	61.3	91	15.4	91	70.1
16	92	80.6	92	64.5	92	60.5	92	15.4	92	70.2
17	92	80.8	92	65.0	92	61.1	92	15.6	92	70.5
18	92	80.3	92	65.8	92	63.5	92	16.1	92	70.8
19	92	78.7	92	67.2	92	69.2	92	16.8	92	71.1
20	92	76.1	92	67.7	92	76.6	92	17.2	92	70.6
21	92	73.9	92	67.7	92	82.0	92	17.3	92	69.9
22	92	72.5	92	67.4	92	84.8	92	17.2	92	69.2
23	92	71.5	92	66.9	92	86.2	92	16.9	92	68.6
24	92	70.5	92	66.5	92	88.0	92	16.7	92	68.0
HOURLY MEAN		73.5		65.8		79.1		16.2		68.5
AVG DAILY MAX		82.1		69.6		97.4		18.3		72.3
AVG DAILY MIN		65.2		62.1		56.8		14.2		64.2
ABSOLUTE MAX		96.7		78.1		100.0		23.7		80.8
ABSOLUTE MIN		46.1		34.3		28.5		5.0		45.4
TOTAL OBS		2208		2200		2200		2200		2200

B20

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY OCT-DEC 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

OCTOBER

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	-----		-----		-----		-----		-----	
	NUMBER	(DEG F)	NUMBER	(DEG F)	NUMBER	(%)	NUMBER	(GM/M3)	NUMBER	(DEG F)
-----	OBS	-----	OBS	-----	OBS	-----	OBS	-----	OBS	-----
1	31	49.9	31	45.4	31	85.4	31	8.2	31	47.7
2	31	48.9	31	45.0	31	87.0	31	8.1	31	47.0
3	31	48.2	31	44.8	31	88.5	31	8.1	31	46.6
4	31	47.7	31	44.6	31	89.5	31	8.0	31	46.2
5	31	47.2	31	44.3	31	90.0	31	8.0	31	45.9
6	31	46.8	31	44.2	31	90.9	31	7.9	31	45.6
7	31	46.5	31	43.8	31	90.9	31	7.9	31	45.3
8	31	46.6	31	43.4	31	89.0	31	7.8	31	45.2
9	31	48.3	31	43.4	31	84.0	31	7.8	31	46.1
10	31	50.5	31	43.5	31	78.2	31	7.8	31	47.3
11	31	52.9	31	43.8	31	73.6	31	7.9	31	48.6
12	31	55.1	31	44.0	31	69.7	31	8.0	31	49.7
13	31	56.8	31	44.1	31	66.4	31	8.0	31	50.6
14	31	58.3	31	43.9	31	63.7	31	8.0	31	51.2
15	31	59.4	31	44.2	31	62.5	31	8.1	31	51.9
16	31	60.1	31	44.7	31	62.3	31	8.2	31	52.4
17	31	60.3	31	44.9	31	62.2	31	8.3	31	52.6
18	31	59.0	31	45.9	31	65.8	31	8.6	31	52.4
19	31	56.5	31	46.5	31	72.1	31	8.7	31	51.5
20	31	54.7	31	46.4	31	75.6	31	8.6	31	50.5
21	31	53.6	31	46.4	31	78.3	31	8.6	31	50.0
22	31	52.6	31	46.3	31	80.6	31	8.5	31	49.4
23	31	51.4	31	45.8	31	82.5	31	8.4	31	48.7
24	31	50.6	31	45.4	31	83.5	31	8.2	31	48.1
HOURLY MEAN		52.6		44.8		78.0		8.1		48.8
AVG DAILY MAX		61.5		50.5		95.4		10.0		54.3
AVG DAILY MIN		44.4		39.3		58.3		6.5		42.9
ABSOLUTE MAX		89.8		70.8		100.0		18.8		76.1
ABSOLUTE MIN		31.8		24.9		26.0		3.5		30.9
TOTAL OBS		744		744		744		744		744

B21

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY OCT-DEC 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

NOVEMBER

10.0 METERS LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER OBS	(DEG F)	NUMBER OBS	(DEG F)	NUMBER OBS	(%)	NUMBER OBS	(GM/M3)	NUMBER OBS	(DEG F)
1	30	32.8	30	28.6	30	85.2	30	4.5	30	31.2
2	30	32.1	30	28.2	30	86.3	30	4.4	30	30.6
3	30	31.3	30	27.7	30	86.9	30	4.3	30	30.0
4	30	30.7	30	27.2	30	87.1	30	4.3	30	29.4
5	30	30.0	30	27.0	30	88.8	30	4.2	30	28.9
6	30	29.6	30	26.9	30	89.8	30	4.2	30	28.6
7	30	29.3	30	26.7	30	90.1	30	4.2	30	28.4
8	30	29.1	30	26.4	30	89.8	30	4.2	30	28.1
9	30	30.0	30	26.2	30	85.9	30	4.1	30	28.7
10	30	32.0	30	26.7	30	81.0	30	4.2	30	30.1
11	30	33.9	30	27.5	30	77.8	30	4.3	30	31.6
12	30	35.8	30	27.9	30	73.9	30	4.4	30	32.8
13	30	37.6	30	27.8	30	69.0	30	4.4	30	33.8
14	30	38.8	30	28.0	30	66.6	30	4.4	30	34.6
15	30	39.9	30	28.3	30	65.5	30	4.5	30	35.3
16	30	40.4	30	29.0	30	65.8	30	4.6	30	35.9
17	30	40.2	30	29.4	30	67.1	30	4.6	30	35.9
18	30	38.7	30	30.1	30	72.5	30	4.7	30	35.2
19	30	37.3	30	30.1	30	76.0	30	4.7	30	34.4
20	30	36.1	30	29.9	30	78.7	30	4.7	30	33.7
21	30	35.0	30	29.5	30	81.0	30	4.6	30	32.9
22	30	34.3	30	29.3	30	82.5	30	4.6	30	32.4
23	30	33.8	30	29.0	30	83.3	30	4.5	30	31.9
24	30	33.1	30	28.7	30	84.7	30	4.5	30	31.4
HOURLY MEAN		34.2		28.2		79.8		4.4		31.9
AVG DAILY MAX		42.5		33.9		95.4		5.4		38.0
AVG DAILY MIN		26.3		22.7		61.5		3.6		25.6
ABSOLUTE MAX		60.3		49.5		100.0		9.2		51.1
ABSOLUTE MIN		11.6		3.9		28.0		1.5		10.6
TOTAL OBS		720		720		720		720		720

B22

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY OCT-DEC 2018

MONTHLY HOUR AVERAGES FOR THE PERIOD

DECEMBER

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER OBS	(DEG F)	NUMBER OBS	(DEG F)	NUMBER OBS	(%)	NUMBER OBS	(GM/M3)	NUMBER OBS	(DEG F)
1	31	31.0	31	27.7	31	88.1	31	4.3	31	29.8
2	31	30.4	31	27.6	31	89.6	31	4.2	31	29.3
3	31	30.0	31	27.3	31	89.8	31	4.2	31	29.0
4	31	29.5	31	27.0	31	90.7	31	4.2	31	28.6
5	31	29.1	31	26.8	31	91.2	31	4.2	31	28.3
6	31	28.8	31	26.7	31	92.3	31	4.2	31	28.1
7	31	28.7	31	26.6	31	92.1	31	4.1	31	28.0
8	31	28.5	31	26.4	31	92.2	31	4.1	31	27.7
9	31	28.6	31	26.1	31	90.5	31	4.0	31	27.8
10	31	30.1	31	26.8	31	87.3	31	4.1	31	28.9
11	31	32.1	31	27.4	31	83.1	31	4.3	31	30.4
12	31	34.2	31	28.0	31	78.5	31	4.3	31	31.9
13	31	35.9	31	28.0	31	73.5	31	4.3	31	32.9
14	31	37.2	31	28.2	31	71.1	31	4.3	31	33.7
15	31	38.3	31	28.7	31	69.8	31	4.4	31	34.5
16	31	38.6	31	28.9	31	69.7	31	4.4	31	34.8
17	31	37.6	31	29.5	31	73.9	31	4.5	31	34.4
18	31	35.6	31	29.8	31	80.1	31	4.6	31	33.3
19	31	34.3	31	29.4	31	82.7	31	4.5	31	32.4
20	31	33.2	31	29.0	31	84.9	31	4.5	31	31.6
21	31	32.5	31	28.5	31	85.3	31	4.4	31	31.0
22	31	31.9	31	28.0	31	86.2	31	4.3	31	30.4
23	31	31.1	31	27.8	31	88.2	31	4.3	31	29.9
24	31	30.8	31	27.4	31	87.6	31	4.2	31	29.6
HOURLY MEAN		32.4		27.8		84.1		4.3		30.7
AVG DAILY MAX		40.4		32.7		95.9		5.1		36.7
AVG DAILY MIN		25.4		22.7		67.3		3.5		24.7
ABSOLUTE MAX		55.0		52.3		100.0		10.2		52.6
ABSOLUTE MIN		12.1		7.7		40.4		1.8		11.2
TOTAL OBS		744		744		744		744		744

B23

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY OCT-DEC 2018

OCT-DEC HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	92	37.9	92	33.9	92	86.2	92	5.7	92	36.3
2	92	37.2	92	33.7	92	87.6	92	5.6	92	35.7
3	92	36.6	92	33.3	92	88.4	92	5.6	92	35.3
4	92	36.0	92	33.0	92	89.1	92	5.5	92	34.8
5	92	35.5	92	32.8	92	90.0	92	5.5	92	34.4
6	92	35.1	92	32.7	92	91.0	92	5.5	92	34.2
7	92	34.9	92	32.4	92	91.1	92	5.4	92	33.9
8	92	34.8	92	32.1	92	90.3	92	5.4	92	33.7
9	92	35.7	92	32.0	92	86.8	92	5.3	92	34.2
10	92	37.6	92	32.4	92	82.2	92	5.4	92	35.5
11	92	39.7	92	33.0	92	78.1	92	5.5	92	36.9
12	92	41.7	92	33.4	92	74.0	92	5.6	92	38.2
13	92	43.5	92	33.3	92	69.7	92	5.6	92	39.2
14	92	44.8	92	33.4	92	67.2	92	5.6	92	39.9
15	92	45.9	92	33.8	92	65.9	92	5.7	92	40.6
16	92	46.4	92	34.3	92	65.9	92	5.8	92	41.1
17	92	46.1	92	34.7	92	67.7	92	5.8	92	41.0
18	92	44.5	92	35.3	92	72.8	92	6.0	92	40.3
19	92	42.7	92	35.4	92	77.0	92	6.0	92	39.5
20	92	41.4	92	35.2	92	79.8	92	5.9	92	38.7
21	92	40.4	92	34.8	92	81.5	92	5.9	92	38.0
22	92	39.6	92	34.6	92	83.1	92	5.8	92	37.5
23	92	38.8	92	34.3	92	84.7	92	5.7	92	36.9
24	92	38.2	92	33.9	92	85.3	92	5.7	92	36.4
HOURLY MEAN		39.8		33.6		80.6		5.6		37.2
AVG DAILY MAX		48.2		39.1		95.6		6.9		43.0
AVG DAILY MIN		32.1		28.3		62.4		4.5		31.1
ABSOLUTE MAX		89.8		70.8		100.0		18.8		76.1
ABSOLUTE MIN		11.6		3.9		26.0		1.5		10.6
TOTAL OBS		2208		2208		2208		2208		2208

B24

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JUL-DEC 2018

JUL-DEC HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	184	53.9	184	50.2	184	87.8	184	11.2	184	52.0
2	184	53.2	184	49.9	184	89.0	184	11.0	184	51.5
3	184	52.5	184	49.5	184	89.9	184	10.9	184	51.0
4	184	51.9	184	49.2	184	90.9	184	10.8	184	50.5
5	184	51.3	184	49.0	184	91.9	184	10.7	184	50.2
6	184	50.8	184	48.7	184	92.7	184	10.6	184	49.8
7	184	50.8	184	48.6	184	92.1	184	10.6	184	49.7
8	184	51.6	183	48.5	183	89.7	183	10.6	183	49.9
9	184	53.2	183	48.6	183	85.3	183	10.6	183	50.7
10	184	55.5	183	48.9	183	80.0	183	10.7	183	51.9
11	184	57.7	183	49.2	183	75.2	183	10.8	183	53.0
12	184	59.6	183	49.3	183	71.1	183	10.7	183	53.8
13	184	61.2	183	49.1	183	67.1	183	10.6	183	54.4
14	184	62.3	183	49.0	183	65.0	183	10.5	183	54.9
15	184	63.1	183	49.1	183	63.6	183	10.5	183	55.3
16	184	63.5	184	49.4	184	63.2	184	10.6	184	55.6
17	184	63.4	184	49.8	184	64.4	184	10.7	184	55.7
18	184	62.4	184	50.6	184	68.2	184	11.0	184	55.6
19	184	60.7	184	51.3	184	73.1	184	11.4	184	55.3
20	184	58.7	184	51.5	184	78.2	184	11.6	184	54.6
21	184	57.2	184	51.3	184	81.7	184	11.6	184	53.9
22	184	56.1	184	51.0	184	84.0	184	11.5	184	53.3
23	184	55.2	184	50.6	184	85.5	184	11.3	184	52.7
24	184	54.4	184	50.2	184	86.6	184	11.2	184	52.2
HOURLY MEAN		56.7		49.7		79.9		10.9		52.8
AVG DAILY MAX		65.1		54.3		96.5		12.6		57.7
AVG DAILY MIN		48.7		45.2		59.6		9.4		47.7
ABSOLUTE MAX		96.7		78.1		100.0		23.7		80.8
ABSOLUTE MIN		11.6		3.9		26.0		1.5		10.6
TOTAL OBS		4416		4408		4408		4408		4408

B25

PROGRAM: WETTEMP
 VERSION: PC-1.0

NPPD-COOPER NUCLEAR STATION 10-M TEMPERATURE SUMMARY JAN-DEC 2018

JAN-DEC HOUR AVERAGES FOR THE PERIOD

10.0 METER LEVEL

HOUR	TEMPERATURE		DEW POINT		RELATIVE HUM		ABSOLUTE HUM		WET BULB	
	NUMBER		NUMBER		NUMBER		NUMBER		NUMBER	
	OBS	(DEG F)	OBS	(DEG F)	OBS	(%)	OBS	(GM/M3)	OBS	(DEG F)
1	365	49.6	365	44.3	365	83.1	365	9.5	365	47.1
2	365	48.8	365	44.1	365	84.7	365	9.4	365	46.5
3	365	48.0	365	43.8	365	85.9	365	9.3	365	46.0
4	365	47.4	365	43.5	365	87.0	365	9.3	365	45.6
5	365	46.7	365	43.2	365	88.0	365	9.2	365	45.2
6	365	46.2	365	42.9	365	88.9	365	9.1	365	44.8
7	365	46.3	365	42.8	365	88.2	365	9.1	365	44.7
8	365	47.1	364	42.8	364	85.8	364	9.1	364	45.0
9	365	48.8	363	43.0	363	81.6	363	9.2	363	45.9
10	365	51.0	363	43.3	363	76.6	363	9.2	363	47.1
11	365	53.2	363	43.5	363	71.8	363	9.2	363	48.2
12	365	55.2	363	43.6	363	67.6	363	9.2	363	49.2
13	365	56.9	363	43.6	363	64.0	363	9.1	363	50.0
14	365	58.3	363	43.6	363	61.5	363	9.1	363	50.6
15	365	59.2	363	43.8	363	60.1	363	9.1	363	51.1
16	365	59.7	364	44.1	364	60.0	364	9.1	364	51.4
17	365	59.7	365	44.4	365	60.8	365	9.2	365	51.5
18	365	58.8	365	45.0	365	63.7	365	9.5	365	51.4
19	365	57.3	365	45.5	365	67.8	365	9.7	365	51.0
20	365	55.2	365	45.6	365	72.5	365	9.8	365	50.2
21	365	53.5	365	45.5	365	76.1	365	9.8	365	49.4
22	365	52.3	365	45.3	365	78.5	365	9.8	365	48.8
23	365	51.4	365	45.0	365	80.2	365	9.7	365	48.2
24	365	50.4	365	44.7	365	82.0	365	9.6	365	47.6
HOURLY MEAN		52.5		44.0		75.7		9.4		48.2
AVG DAILY MAX		61.7		49.2		93.3		10.9		53.6
AVG DAILY MIN		43.8		39.1		55.9		7.9		42.5
ABSOLUTE MAX		97.9		80.1		100.0		25.2		81.1
ABSOLUTE MIN		-13.7		-19.6		19.8		.5		-14.2
TOTAL OBS		8760		8744		8744		8744		8744

B26

Wind Direction Frequencies

10-Meter Level

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JANUARY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	6.5	3.2	3.2	00.0	3.2	00.0	3.2	6.5	22.6	12.9	00.0	3.2	00.0	9.7	6.5	19.4	00.0	100.
2	9.7	3.2	3.2	00.0	6.5	00.0	3.2	12.9	12.9	6.5	3.2	3.2	3.2	6.5	12.9	9.7	3.2	100.
3	16.1	00.0	00.0	3.2	00.0	00.0	00.0	12.9	19.4	3.2	6.5	3.2	00.0	6.5	16.1	12.9	00.0	100.
4	12.9	3.2	00.0	3.2	00.0	00.0	00.0	19.4	9.7	6.5	3.2	6.5	00.0	6.5	16.1	12.9	00.0	100.
5	16.1	3.2	00.0	00.0	6.5	3.2	00.0	16.1	6.5	9.7	3.2	00.0	00.0	6.5	16.1	12.9	00.0	100.
6	12.9	3.2	3.2	00.0	3.2	00.0	00.0	12.9	16.1	9.7	00.0	3.2	3.2	00.0	16.1	16.1	00.0	100.
7	9.7	00.0	3.2	00.0	3.2	00.0	00.0	16.1	12.9	6.5	00.0	3.2	00.0	3.2	00.0	38.7	3.2	100.
8	6.5	9.7	3.2	00.0	00.0	3.2	00.0	16.1	12.9	9.7	00.0	00.0	9.7	3.2	12.9	12.9	00.0	100.
9	00.0	9.7	00.0	00.0	00.0	3.2	00.0	9.7	22.6	16.1	00.0	00.0	00.0	3.2	12.9	22.6	00.0	100.
10	9.7	3.2	3.2	00.0	00.0	00.0	6.5	12.9	12.9	12.9	3.2	00.0	3.2	00.0	16.1	12.9	3.2	100.
11	12.9	6.5	6.5	00.0	00.0	3.2	00.0	9.7	12.9	9.7	6.5	6.5	3.2	00.0	16.1	6.5	00.0	100.
12	9.7	6.5	6.5	00.0	3.2	3.2	00.0	6.5	9.7	12.9	16.1	3.2	00.0	3.2	12.9	6.5	00.0	100.
13	12.9	3.2	3.2	00.0	00.0	9.7	3.2	3.2	12.9	16.1	12.9	00.0	00.0	6.5	9.7	6.5	00.0	100.
14	9.7	00.0	3.2	3.2	00.0	12.9	00.0	3.2	9.7	19.4	6.5	6.5	3.2	3.2	12.9	6.5	00.0	100.
15	6.5	3.2	3.2	00.0	3.2	9.7	00.0	3.2	12.9	9.7	16.1	00.0	6.5	6.5	12.9	6.5	00.0	100.
16	9.7	3.2	3.2	3.2	00.0	3.2	6.5	12.9	6.5	9.7	16.1	00.0	00.0	6.5	9.7	9.7	00.0	100.
17	9.7	3.2	6.5	00.0	00.0	6.5	3.2	6.5	12.9	16.1	00.0	3.2	3.2	9.7	9.7	9.7	00.0	100.
18	9.7	3.2	3.2	00.0	6.5	00.0	3.2	3.2	12.9	19.4	00.0	00.0	6.5	3.2	16.1	9.7	3.2	100.
19	12.9	3.2	00.0	3.2	3.2	3.2	3.2	6.5	16.1	9.7	3.2	00.0	3.2	3.2	16.1	9.7	3.2	100.
20	12.9	00.0	3.2	00.0	00.0	6.5	3.2	6.5	16.1	6.5	12.9	3.2	3.2	00.0	12.9	12.9	00.0	100.
21	12.9	3.2	00.0	00.0	00.0	6.5	9.7	6.5	19.4	00.0	6.5	6.5	3.2	3.2	6.5	12.9	3.2	100.
22	6.5	3.2	3.2	00.0	3.2	00.0	6.5	6.5	19.4	6.5	6.5	00.0	00.0	6.5	12.9	9.7	9.7	100.
23	6.5	3.2	00.0	6.5	00.0	00.0	6.5	6.5	19.4	6.5	3.2	6.5	6.5	3.2	12.9	9.7	3.2	100.
24	9.7	00.0	00.0	3.2	3.2	00.0	3.2	9.7	22.6	9.7	3.2	3.2	3.2	3.2	3.2	19.4	3.2	100.
ALL	10.1	3.4	2.6	1.1	1.9	3.1	2.6	9.4	14.7	10.2	5.4	2.6	2.6	4.3	12.1	12.8	1.5	100.

NUMBER OF OBS = 744

B28

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

FEBRUARY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.7	3.6	3.6	00.0	00.0	7.1	00.0	10.7	17.9	3.6	00.0	3.6	3.6	7.1	3.6	25.0	00.0	100.
2	14.3	00.0	7.1	00.0	00.0	7.1	3.6	17.9	7.1	7.1	00.0	3.6	3.6	3.6	3.6	21.4	00.0	100.
3	14.3	10.7	7.1	00.0	00.0	7.1	7.1	3.6	10.7	00.0	7.1	3.6	3.6	00.0	10.7	14.3	00.0	100.
4	17.9	00.0	7.1	00.0	3.6	7.1	00.0	7.1	10.7	7.1	3.6	3.6	3.6	3.6	7.1	17.9	00.0	100.
5	14.3	3.6	7.1	00.0	00.0	3.6	00.0	3.6	21.4	7.1	7.1	3.6	00.0	10.7	00.0	17.9	00.0	100.
6	10.7	7.1	3.6	3.6	00.0	00.0	3.6	7.1	21.4	3.6	3.6	3.6	7.1	7.1	3.6	14.3	00.0	100.
7	21.4	3.6	3.6	3.6	00.0	00.0	3.6	3.6	17.9	10.7	3.6	3.6	00.0	7.1	7.1	10.7	00.0	100.
8	17.9	7.1	7.1	7.1	00.0	00.0	3.6	7.1	7.1	7.1	7.1	3.6	3.6	7.1	3.6	10.7	00.0	100.
9	14.3	10.7	00.0	00.0	3.6	3.6	00.0	7.1	17.9	10.7	3.6	3.6	3.6	3.6	3.6	14.3	00.0	100.
10	14.3	7.1	7.1	3.6	00.0	3.6	00.0	7.1	17.9	7.1	7.1	3.6	3.6	00.0	3.6	14.3	00.0	100.
11	21.4	7.1	7.1	3.6	00.0	00.0	3.6	7.1	14.3	7.1	10.7	00.0	00.0	3.6	10.7	3.6	00.0	100.
12	21.4	3.6	10.7	3.6	00.0	00.0	3.6	3.6	10.7	7.1	10.7	3.6	00.0	00.0	10.7	10.7	00.0	100.
13	14.3	10.7	00.0	7.1	00.0	3.6	3.6	00.0	14.3	7.1	10.7	3.6	00.0	00.0	17.9	7.1	00.0	100.
14	14.3	7.1	00.0	7.1	3.6	00.0	3.6	00.0	10.7	10.7	10.7	7.1	00.0	00.0	14.3	10.7	00.0	100.
15	17.9	3.6	00.0	10.7	00.0	3.6	00.0	00.0	10.7	7.1	14.3	10.7	00.0	00.0	10.7	10.7	00.0	100.
16	14.3	7.1	3.6	7.1	00.0	3.6	00.0	00.0	14.3	7.1	10.7	7.1	00.0	7.1	7.1	10.7	00.0	100.
17	14.3	7.1	10.7	00.0	00.0	3.6	00.0	3.6	10.7	7.1	3.6	7.1	10.7	3.6	3.6	14.3	00.0	100.
18	17.9	00.0	10.7	3.6	00.0	3.6	00.0	00.0	21.4	3.6	10.7	00.0	7.1	00.0	7.1	14.3	00.0	100.
19	10.7	7.1	3.6	3.6	3.6	00.0	3.6	00.0	17.9	7.1	3.6	3.6	3.6	00.0	10.7	21.4	00.0	100.
20	14.3	10.7	3.6	3.6	00.0	3.6	00.0	7.1	21.4	3.6	00.0	3.6	00.0	3.6	7.1	17.9	00.0	100.
21	25.0	3.6	3.6	00.0	3.6	00.0	00.0	3.6	28.6	7.1	3.6	3.6	00.0	3.6	00.0	14.3	00.0	100.
22	17.9	7.1	00.0	3.6	3.6	00.0	7.1	10.7	17.9	3.6	3.6	3.6	00.0	00.0	3.6	17.9	00.0	100.
23	7.1	7.1	3.6	00.0	3.6	00.0	7.1	3.6	14.3	7.1	3.6	00.0	10.7	00.0	3.6	25.0	3.6	100.
24	7.1	10.7	3.6	00.0	00.0	3.6	3.6	10.7	14.3	3.6	00.0	7.1	3.6	3.6	00.0	25.0	3.6	100.
ALL	15.3	6.1	4.8	3.0	1.0	2.7	2.4	5.2	15.5	6.4	5.8	4.0	2.8	3.1	6.4	15.2	.3	100.

NUMBER OF OBS = 672

B29

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

MARCH

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	16.1	3.2	3.2	3.2	9.7	6.5	16.1	00.0	3.2	00.0	3.2	00.0	3.2	00.0	16.1	12.9	3.2	100.
2	6.5	6.5	00.0	00.0	19.4	9.7	6.5	3.2	6.5	3.2	00.0	00.0	3.2	3.2	9.7	16.1	6.5	100.
3	3.2	3.2	6.5	00.0	12.9	3.2	16.1	3.2	00.0	6.5	3.2	00.0	00.0	6.5	16.1	19.4	00.0	100.
4	16.1	3.2	3.2	00.0	16.1	3.2	9.7	9.7	00.0	3.2	00.0	00.0	00.0	9.7	12.9	12.9	00.0	100.
5	12.9	00.0	3.2	3.2	16.1	3.2	12.9	3.2	3.2	3.2	00.0	6.5	00.0	6.5	6.5	19.4	00.0	100.
6	9.7	3.2	3.2	00.0	16.1	3.2	12.9	3.2	9.7	00.0	00.0	3.2	00.0	9.7	9.7	16.1	00.0	100.
7	9.7	6.5	00.0	3.2	12.9	12.9	9.7	6.5	3.2	3.2	00.0	00.0	3.2	6.5	9.7	12.9	00.0	100.
8	16.1	00.0	00.0	00.0	12.9	3.2	16.1	9.7	3.2	3.2	3.2	00.0	00.0	3.2	16.1	12.9	00.0	100.
9	16.1	00.0	3.2	3.2	6.5	6.5	12.9	9.7	6.5	00.0	00.0	00.0	00.0	6.5	6.5	22.6	00.0	100.
10	16.1	3.2	00.0	00.0	6.5	9.7	16.1	6.5	3.2	00.0	6.5	00.0	3.2	6.5	9.7	12.9	00.0	100.
11	16.1	3.2	00.0	00.0	3.2	16.1	9.7	12.9	3.2	00.0	00.0	6.5	00.0	3.2	12.9	12.9	00.0	100.
12	16.1	3.2	00.0	00.0	9.7	16.1	6.5	9.7	3.2	3.2	00.0	6.5	00.0	3.2	9.7	12.9	00.0	100.
13	16.1	3.2	00.0	3.2	6.5	12.9	12.9	3.2	3.2	3.2	3.2	6.5	00.0	3.2	9.7	12.9	00.0	100.
14	25.8	3.2	00.0	00.0	12.9	9.7	9.7	3.2	3.2	00.0	3.2	6.5	6.5	3.2	9.7	3.2	00.0	100.
15	16.1	3.2	00.0	3.2	9.7	9.7	6.5	9.7	00.0	00.0	6.5	6.5	3.2	3.2	6.5	16.1	00.0	100.
16	19.4	3.2	00.0	3.2	12.9	6.5	6.5	9.7	3.2	00.0	6.5	00.0	00.0	6.5	6.5	16.1	00.0	100.
17	19.4	9.7	00.0	00.0	16.1	6.5	6.5	9.7	00.0	00.0	6.5	00.0	3.2	6.5	3.2	12.9	00.0	100.
18	9.7	12.9	3.2	6.5	9.7	6.5	6.5	6.5	3.2	6.5	3.2	00.0	00.0	6.5	3.2	16.1	00.0	100.
19	22.6	3.2	3.2	9.7	6.5	12.9	6.5	3.2	3.2	6.5	00.0	00.0	6.5	00.0	6.5	9.7	00.0	100.
20	16.1	3.2	6.5	6.5	3.2	12.9	9.7	3.2	00.0	3.2	3.2	00.0	3.2	00.0	6.5	19.4	3.2	100.
21	19.4	3.2	3.2	6.5	3.2	6.5	16.1	3.2	00.0	3.2	00.0	00.0	3.2	00.0	6.5	22.6	3.2	100.
22	12.9	3.2	3.2	00.0	9.7	3.2	12.9	6.5	3.2	00.0	00.0	6.5	3.2	00.0	12.9	19.4	3.2	100.
23	9.7	6.5	00.0	6.5	6.5	6.5	12.9	3.2	00.0	6.5	00.0	6.5	00.0	00.0	12.9	19.4	3.2	100.
24	12.9	6.5	6.5	3.2	3.2	6.5	12.9	6.5	00.0	3.2	3.2	00.0	3.2	00.0	6.5	22.6	3.2	100.
ALL	14.8	4.0	2.0	2.6	10.1	8.1	11.0	6.0	2.7	2.4	2.2	2.3	1.9	3.9	9.4	15.6	1.1	100.

NUMBER OF OBS = 744

B30

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JAN-MAR

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	11.1	3.3	3.3	1.1	4.4	4.4	6.7	5.6	14.4	5.6	1.1	2.2	2.2	5.6	8.9	18.9	1.1	100.
2	10.0	3.3	3.3	00.0	8.9	5.6	4.4	11.1	8.9	5.6	1.1	2.2	3.3	4.4	8.9	15.6	3.3	100.
3	11.1	4.4	4.4	1.1	4.4	3.3	7.8	6.7	10.0	3.3	5.6	2.2	1.1	4.4	14.4	15.6	00.0	100.
4	15.6	2.2	3.3	1.1	6.7	3.3	3.3	12.2	6.7	5.6	2.2	3.3	1.1	6.7	12.2	14.4	00.0	100.
5	14.4	2.2	3.3	1.1	7.8	3.3	4.4	7.8	10.0	6.7	3.3	3.3	00.0	7.8	7.8	16.7	00.0	100.
6	11.1	4.4	3.3	1.1	6.7	1.1	5.6	7.8	15.6	4.4	1.1	3.3	3.3	5.6	10.0	15.6	00.0	100.
7	13.3	3.3	2.2	2.2	5.6	4.4	4.4	8.9	11.1	6.7	1.1	2.2	1.1	5.6	5.6	21.1	1.1	100.
8	13.3	5.6	3.3	2.2	4.4	2.2	6.7	11.1	7.8	6.7	3.3	1.1	4.4	4.4	11.1	12.2	00.0	100.
9	10.0	6.7	1.1	1.1	3.3	4.4	4.4	8.9	15.6	8.9	1.1	1.1	1.1	4.4	7.8	20.0	00.0	100.
10	13.3	4.4	3.3	1.1	2.2	4.4	7.8	8.9	11.1	6.7	5.6	1.1	3.3	2.2	10.0	13.3	1.1	100.
11	16.7	5.6	4.4	1.1	1.1	6.7	4.4	10.0	10.0	5.6	5.6	4.4	1.1	2.2	13.3	7.8	00.0	100.
12	15.6	4.4	5.6	1.1	4.4	6.7	3.3	6.7	7.8	7.8	8.9	4.4	00.0	2.2	11.1	10.0	00.0	100.
13	14.4	5.6	1.1	3.3	2.2	8.9	6.7	2.2	10.0	8.9	8.9	3.3	00.0	3.3	12.2	8.9	00.0	100.
14	16.7	3.3	1.1	3.3	5.6	7.8	4.4	2.2	7.8	10.0	6.7	6.7	3.3	2.2	12.2	6.7	00.0	100.
15	13.3	3.3	1.1	4.4	4.4	7.8	2.2	4.4	7.8	5.6	12.2	5.6	3.3	3.3	10.0	11.1	00.0	100.
16	14.4	4.4	2.2	4.4	4.4	4.4	4.4	7.8	7.8	5.6	11.1	2.2	00.0	6.7	7.8	12.2	00.0	100.
17	14.4	6.7	5.6	00.0	5.6	5.6	3.3	6.7	7.8	7.8	3.3	3.3	5.6	6.7	5.6	12.2	00.0	100.
18	12.2	5.6	5.6	3.3	5.6	3.3	3.3	3.3	12.2	10.0	4.4	00.0	4.4	3.3	8.9	13.3	1.1	100.
19	15.6	4.4	2.2	5.6	4.4	5.6	4.4	3.3	12.2	7.8	2.2	1.1	4.4	1.1	11.1	13.3	1.1	100.
20	14.4	4.4	4.4	3.3	1.1	7.8	4.4	5.6	12.2	4.4	5.6	2.2	2.2	1.1	8.9	16.7	1.1	100.
21	18.9	3.3	2.2	2.2	2.2	4.4	8.9	4.4	15.6	3.3	3.3	3.3	2.2	2.2	4.4	16.7	2.2	100.
22	12.2	4.4	2.2	1.1	5.6	1.1	8.9	7.8	13.3	3.3	3.3	3.3	1.1	2.2	10.0	15.6	4.4	100.
23	7.8	5.6	1.1	4.4	3.3	2.2	8.9	4.4	11.1	6.7	2.2	4.4	5.6	1.1	10.0	17.8	3.3	100.
24	10.0	5.6	3.3	2.2	2.2	3.3	6.7	8.9	12.2	5.6	2.2	3.3	3.3	2.2	3.3	22.2	3.3	100.
ALL	13.3	4.4	3.1	2.2	4.4	4.7	5.4	6.9	10.8	6.3	4.4	2.9	2.4	3.8	9.4	14.5	1.0	100.

NUMBER OF OBS = 2160

B31

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

APRIL

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	16.7	6.7	10.0	00.0	00.0	3.3	3.3	13.3	3.3	00.0	3.3	6.7	3.3	00.0	3.3	20.0	6.7	100.
2	20.0	6.7	10.0	3.3	00.0	6.7	3.3	16.7	3.3	3.3	00.0	00.0	6.7	6.7	00.0	13.3	00.0	100.
3	16.7	6.7	6.7	00.0	6.7	6.7	3.3	6.7	3.3	6.7	6.7	3.3	00.0	3.3	13.3	10.0	00.0	100.
4	16.7	10.0	00.0	6.7	3.3	3.3	10.0	6.7	3.3	3.3	3.3	3.3	00.0	3.3	10.0	13.3	3.3	100.
5	13.3	13.3	00.0	6.7	00.0	6.7	6.7	6.7	10.0	6.7	3.3	00.0	00.0	10.0	10.0	6.7	00.0	100.
6	10.0	13.3	00.0	00.0	3.3	6.7	10.0	13.3	3.3	3.3	3.3	00.0	3.3	00.0	13.3	13.3	3.3	100.
7	20.0	6.7	00.0	00.0	3.3	6.7	13.3	10.0	6.7	3.3	00.0	3.3	00.0	3.3	10.0	10.0	3.3	100.
8	20.0	10.0	00.0	00.0	3.3	6.7	10.0	00.0	20.0	6.7	00.0	00.0	6.7	00.0	3.3	13.3	00.0	100.
9	6.7	16.7	6.7	3.3	3.3	00.0	16.7	3.3	20.0	00.0	00.0	3.3	00.0	00.0	3.3	16.7	00.0	100.
10	10.0	16.7	00.0	6.7	10.0	00.0	10.0	10.0	6.7	6.7	3.3	00.0	6.7	00.0	6.7	6.7	00.0	100.
11	16.7	00.0	10.0	6.7	3.3	6.7	10.0	6.7	10.0	3.3	00.0	6.7	6.7	00.0	6.7	6.7	00.0	100.
12	20.0	6.7	3.3	3.3	10.0	00.0	6.7	6.7	6.7	13.3	00.0	3.3	6.7	3.3	3.3	6.7	00.0	100.
13	16.7	00.0	3.3	3.3	10.0	00.0	10.0	6.7	00.0	10.0	3.3	00.0	6.7	6.7	3.3	20.0	00.0	100.
14	20.0	00.0	3.3	6.7	3.3	00.0	10.0	10.0	10.0	3.3	00.0	00.0	6.7	3.3	10.0	13.3	00.0	100.
15	16.7	6.7	6.7	00.0	6.7	00.0	13.3	6.7	6.7	6.7	00.0	00.0	00.0	10.0	13.3	6.7	00.0	100.
16	20.0	00.0	3.3	6.7	3.3	3.3	10.0	10.0	10.0	3.3	00.0	00.0	00.0	3.3	10.0	16.7	00.0	100.
17	13.3	6.7	3.3	6.7	3.3	6.7	6.7	10.0	10.0	6.7	00.0	00.0	00.0	00.0	6.7	20.0	00.0	100.
18	3.3	3.3	3.3	10.0	3.3	10.0	10.0	3.3	10.0	3.3	00.0	6.7	00.0	00.0	3.3	30.0	00.0	100.
19	6.7	6.7	3.3	10.0	6.7	10.0	10.0	6.7	6.7	3.3	00.0	6.7	00.0	00.0	3.3	20.0	00.0	100.
20	10.0	00.0	10.0	3.3	3.3	10.0	6.7	6.7	10.0	3.3	00.0	3.3	3.3	00.0	6.7	20.0	3.3	100.
21	16.7	6.7	00.0	3.3	3.3	13.3	00.0	16.7	00.0	10.0	00.0	3.3	00.0	00.0	13.3	10.0	3.3	100.
22	13.3	6.7	6.7	00.0	6.7	6.7	6.7	6.7	6.7	6.7	3.3	00.0	3.3	00.0	3.3	20.0	3.3	100.
23	26.7	00.0	00.0	10.0	3.3	3.3	3.3	10.0	10.0	6.7	00.0	00.0	3.3	00.0	3.3	16.7	3.3	100.
24	16.7	10.0	3.3	6.7	00.0	6.7	00.0	6.7	16.7	6.7	00.0	00.0	00.0	00.0	6.7	13.3	6.7	100.
ALL	15.3	6.7	3.9	4.3	4.2	5.1	7.9	8.3	8.1	5.3	1.3	2.1	2.6	2.2	6.9	14.3	1.5	100.

NUMBER OF OBS = 720

B32

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

MAY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	20.0	3.3	3.3	3.3	3.3	3.3	3.3	10.0	6.7	13.3	6.7	00.0	00.0	6.7	6.7	10.0	00.0	100.
2	16.7	16.7	00.0	00.0	00.0	00.0	6.7	10.0	3.3	16.7	00.0	6.7	00.0	00.0	6.7	16.7	00.0	100.
3	9.7	9.7	6.5	00.0	3.2	00.0	6.5	12.9	9.7	6.5	3.2	9.7	00.0	6.5	6.5	9.7	00.0	100.
4	12.9	12.9	00.0	3.2	00.0	3.2	3.2	12.9	6.5	3.2	6.5	6.5	3.2	3.2	6.5	12.9	3.2	100.
5	16.1	3.2	00.0	3.2	00.0	00.0	9.7	12.9	9.7	6.5	3.2	6.5	3.2	6.5	9.7	9.7	00.0	100.
6	16.1	3.2	3.2	00.0	00.0	3.2	9.7	6.5	16.1	9.7	3.2	3.2	00.0	9.7	9.7	6.5	00.0	100.
7	12.9	12.9	3.2	3.2	00.0	6.5	12.9	12.9	9.7	3.2	3.2	3.2	00.0	6.5	6.5	00.0	3.2	100.
8	9.7	9.7	6.5	3.2	3.2	9.7	12.9	6.5	12.9	3.2	00.0	9.7	00.0	9.7	3.2	00.0	00.0	100.
9	9.7	9.7	3.2	3.2	00.0	9.7	6.5	9.7	9.7	12.9	00.0	3.2	6.5	6.5	3.2	6.5	00.0	100.
10	9.7	00.0	9.7	6.5	00.0	6.5	16.1	3.2	6.5	6.5	3.2	9.7	3.2	9.7	6.5	3.2	00.0	100.
11	6.5	3.2	12.9	00.0	3.2	6.5	9.7	6.5	9.7	3.2	6.5	9.7	3.2	6.5	3.2	9.7	00.0	100.
12	00.0	19.4	6.5	9.7	00.0	12.9	3.2	9.7	9.7	3.2	3.2	9.7	6.5	3.2	00.0	3.2	00.0	100.
13	12.9	12.9	9.7	6.5	3.2	6.5	3.2	9.7	6.5	3.2	12.9	00.0	9.7	3.2	00.0	00.0	00.0	100.
14	9.7	9.7	3.2	00.0	6.5	16.1	6.5	3.2	19.4	3.2	00.0	6.5	6.5	00.0	6.5	3.2	00.0	100.
15	16.1	9.7	3.2	00.0	3.2	9.7	9.7	3.2	12.9	12.9	00.0	6.5	6.5	3.2	3.2	00.0	00.0	100.
16	6.5	9.7	3.2	3.2	00.0	9.7	9.7	9.7	3.2	3.2	3.2	12.9	3.2	9.7	9.7	00.0	00.0	100.
17	3.2	9.7	00.0	3.2	00.0	3.2	12.9	12.9	3.2	6.5	6.5	3.2	6.5	3.2	3.2	22.6	00.0	100.
18	9.7	9.7	6.5	6.5	00.0	6.5	3.2	12.9	3.2	3.2	6.5	3.2	9.7	6.5	3.2	9.7	00.0	100.
19	12.9	19.4	3.2	00.0	3.2	6.5	3.2	6.5	9.7	6.5	3.2	00.0	6.5	3.2	9.7	6.5	00.0	100.
20	16.1	6.5	9.7	00.0	3.2	9.7	3.2	9.7	6.5	6.5	3.2	3.2	6.5	3.2	3.2	9.7	00.0	100.
21	12.9	6.5	3.2	00.0	9.7	00.0	6.5	12.9	3.2	9.7	3.2	6.5	00.0	00.0	3.2	19.4	3.2	100.
22	16.1	9.7	3.2	00.0	3.2	3.2	6.5	12.9	6.5	16.1	3.2	00.0	3.2	00.0	6.5	9.7	00.0	100.
23	6.7	6.7	3.3	3.3	3.3	00.0	10.0	6.7	6.7	13.3	3.3	6.7	3.3	3.3	6.7	16.7	00.0	100.
24	13.3	6.7	3.3	00.0	3.3	00.0	6.7	20.0	6.7	3.3	3.3	3.3	3.3	6.7	6.7	3.3	10.0	100.
ALL	11.5	9.2	4.5	2.4	2.2	5.5	7.6	9.7	8.2	7.3	3.6	5.0	4.2	4.6	5.4	8.2	.8	100.

NUMBER OF OBS = 740

B33

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JUNE

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.0	00.0	3.3	6.7	00.0	00.0	13.3	6.7	26.7	13.3	00.0	3.3	00.0	6.7	3.3	6.7	00.0	100.
2	6.7	00.0	3.3	00.0	6.7	00.0	6.7	6.7	30.0	16.7	3.3	3.3	00.0	10.0	00.0	6.7	00.0	100.
3	13.3	00.0	00.0	00.0	6.7	10.0	00.0	10.0	23.3	16.7	00.0	00.0	00.0	13.3	00.0	3.3	3.3	100.
4	20.0	00.0	00.0	00.0	6.7	00.0	3.3	6.7	30.0	6.7	6.7	3.3	00.0	6.7	3.3	6.7	00.0	100.
5	6.7	3.3	6.7	6.7	00.0	00.0	00.0	6.7	26.7	13.3	3.3	6.7	6.7	6.7	3.3	3.3	00.0	100.
6	3.3	6.7	00.0	00.0	13.3	6.7	00.0	6.7	20.0	16.7	3.3	3.3	6.7	3.3	00.0	6.7	3.3	100.
7	00.0	3.3	6.7	3.3	00.0	6.7	6.7	13.3	23.3	6.7	6.7	10.0	6.7	3.3	00.0	3.3	00.0	100.
8	3.3	00.0	00.0	3.3	00.0	16.7	10.0	3.3	23.3	13.3	6.7	3.3	00.0	00.0	10.0	6.7	00.0	100.
9	00.0	00.0	00.0	10.0	6.7	16.7	6.7	3.3	3.3	23.3	3.3	6.7	3.3	6.7	6.7	3.3	00.0	100.
10	3.3	00.0	00.0	16.7	3.3	3.3	6.7	6.7	10.0	23.3	10.0	00.0	3.3	6.7	3.3	3.3	00.0	100.
11	3.3	00.0	00.0	3.3	10.0	3.3	10.0	6.7	13.3	26.7	3.3	00.0	6.7	3.3	6.7	3.3	00.0	100.
12	6.7	3.3	00.0	00.0	6.7	10.0	3.3	10.0	30.0	13.3	00.0	00.0	3.3	3.3	3.3	6.7	00.0	100.
13	00.0	00.0	3.3	00.0	6.7	6.7	10.0	10.0	26.7	13.3	00.0	00.0	3.3	3.3	6.7	10.0	00.0	100.
14	6.7	00.0	00.0	3.3	3.3	16.7	3.3	10.0	26.7	10.0	3.3	00.0	00.0	3.3	3.3	10.0	00.0	100.
15	6.7	00.0	3.3	3.3	6.7	10.0	10.0	3.3	30.0	13.3	00.0	00.0	00.0	3.3	3.3	6.7	00.0	100.
16	6.7	3.3	00.0	00.0	00.0	23.3	3.3	20.0	20.0	6.7	00.0	00.0	00.0	6.7	00.0	10.0	00.0	100.
17	3.3	00.0	3.3	00.0	00.0	16.7	6.7	16.7	23.3	10.0	00.0	00.0	00.0	00.0	10.0	10.0	00.0	100.
18	10.0	00.0	00.0	00.0	00.0	13.3	10.0	23.3	13.3	10.0	3.3	00.0	00.0	3.3	10.0	3.3	00.0	100.
19	3.3	00.0	00.0	00.0	00.0	13.3	16.7	10.0	20.0	10.0	3.3	00.0	3.3	3.3	6.7	10.0	00.0	100.
20	3.3	3.3	00.0	3.3	3.3	13.3	10.0	16.7	10.0	6.7	3.3	3.3	00.0	3.3	13.3	6.7	00.0	100.
21	3.3	00.0	00.0	3.3	6.7	3.3	13.3	20.0	13.3	6.7	3.3	00.0	6.7	6.7	3.3	10.0	00.0	100.
22	6.7	00.0	00.0	6.7	6.7	3.3	10.0	13.3	23.3	00.0	10.0	00.0	3.3	6.7	6.7	3.3	00.0	100.
23	6.7	00.0	00.0	3.3	3.3	3.3	13.3	10.0	23.3	13.3	00.0	3.3	00.0	6.7	3.3	3.3	6.7	100.
24	10.0	00.0	00.0	13.3	00.0	3.3	6.7	10.0	33.3	6.7	00.0	00.0	00.0	6.7	6.7	00.0	3.3	100.
ALL	6.0	1.0	1.3	3.6	4.0	8.3	7.5	10.4	21.8	12.4	3.1	1.9	2.2	5.1	4.7	6.0	.7	100.

NUMBER OF OBS = 720

B34

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

APR-JUN

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	15.6	3.3	5.6	3.3	1.1	2.2	6.7	10.0	12.2	8.9	3.3	3.3	1.1	4.4	4.4	12.2	2.2	100.
2	14.4	7.8	4.4	1.1	2.2	2.2	5.6	11.1	12.2	12.2	1.1	3.3	2.2	5.6	2.2	12.2	00.0	100.
3	13.2	5.5	4.4	00.0	5.5	5.5	3.3	9.9	12.1	9.9	3.3	4.4	00.0	7.7	6.6	7.7	1.1	100.
4	16.5	7.7	00.0	3.3	3.3	2.2	5.5	8.8	13.2	4.4	5.5	4.4	1.1	4.4	6.6	11.0	2.2	100.
5	12.1	6.6	2.2	5.5	00.0	2.2	5.5	8.8	15.4	8.8	3.3	4.4	3.3	7.7	7.7	6.6	00.0	100.
6	9.9	7.7	1.1	00.0	5.5	5.5	6.6	8.8	13.2	9.9	3.3	2.2	3.3	4.4	7.7	8.8	2.2	100.
7	11.0	7.7	3.3	2.2	1.1	6.6	11.0	12.1	13.2	4.4	3.3	5.5	2.2	4.4	5.5	4.4	2.2	100.
8	11.0	6.6	2.2	2.2	2.2	11.0	11.0	3.3	18.7	7.7	2.2	4.4	2.2	3.3	5.5	6.6	00.0	100.
9	5.5	8.8	3.3	5.5	3.3	8.8	9.9	5.5	11.0	12.1	1.1	4.4	3.3	4.4	4.4	8.8	00.0	100.
10	7.7	5.5	3.3	9.9	4.4	3.3	11.0	6.6	7.7	12.1	5.5	3.3	4.4	5.5	5.5	4.4	00.0	100.
11	8.8	1.1	7.7	3.3	5.5	5.5	9.9	6.6	11.0	11.0	3.3	5.5	5.5	3.3	5.5	6.6	00.0	100.
12	8.8	9.9	3.3	4.4	5.5	7.7	4.4	8.8	15.4	9.9	1.1	4.4	5.5	3.3	2.2	5.5	00.0	100.
13	9.9	4.4	5.5	3.3	6.6	4.4	7.7	8.8	11.0	8.8	5.5	00.0	6.6	4.4	3.3	9.9	00.0	100.
14	12.1	3.3	2.2	3.3	4.4	11.0	6.6	7.7	18.7	5.5	1.1	2.2	4.4	2.2	6.6	8.8	00.0	100.
15	13.2	5.5	4.4	1.1	5.5	6.6	11.0	4.4	16.5	11.0	00.0	2.2	2.2	5.5	6.6	4.4	00.0	100.
16	11.0	4.4	2.2	3.3	1.1	12.1	7.7	13.2	11.0	4.4	1.1	1.1	4.4	4.4	6.6	12.1	00.0	100.
17	6.6	5.5	2.2	3.3	1.1	8.8	8.8	13.2	12.1	7.7	2.2	1.1	2.2	1.1	6.6	17.6	00.0	100.
18	7.7	4.4	3.3	5.5	1.1	9.9	7.7	13.2	8.8	5.5	3.3	3.3	3.3	3.3	5.5	14.3	00.0	100.
19	7.7	8.8	2.2	3.3	3.3	9.9	9.9	7.7	12.1	6.6	2.2	2.2	3.3	2.2	6.6	12.1	00.0	100.
20	9.9	3.3	6.6	2.2	3.3	11.0	6.6	11.0	8.8	5.5	2.2	3.3	3.3	2.2	7.7	12.1	1.1	100.
21	11.0	4.4	1.1	2.2	6.6	5.5	6.6	16.5	5.5	8.8	2.2	3.3	2.2	2.2	6.6	13.2	2.2	100.
22	12.1	5.5	3.3	2.2	5.5	4.4	7.7	11.0	12.1	7.7	5.5	00.0	3.3	2.2	5.5	11.0	1.1	100.
23	13.3	2.2	1.1	5.6	3.3	2.2	8.9	8.9	13.3	11.1	1.1	3.3	2.2	3.3	4.4	12.2	3.3	100.
24	13.3	5.6	2.2	6.7	1.1	3.3	4.4	12.2	18.9	5.6	1.1	1.1	1.1	4.4	6.7	5.6	6.7	100.
ALL	10.9	5.6	3.2	3.4	3.4	6.3	7.7	9.5	12.7	8.3	2.7	3.0	3.0	4.0	5.7	9.5	1.0	100.

NUMBER OF OBS = 2180

B35

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JAN-JUN

HR. OF DAY	WIND DIRECTION																CALM	TOTAL
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
1	13.3	3.3	4.4	2.2	2.8	3.3	6.7	7.8	13.3	7.2	2.2	2.8	1.7	5.0	6.7	15.6	1.7	100.
2	12.2	5.6	3.9	.6	5.6	3.9	5.0	11.1	10.6	8.9	1.1	2.8	2.8	5.0	5.6	13.9	1.7	100.
3	12.2	5.0	4.4	.6	5.0	4.4	5.5	8.3	11.0	6.6	4.4	3.3	.6	6.1	10.5	11.6	.6	100.
4	16.0	5.0	1.7	2.2	5.0	2.8	4.4	10.5	9.9	5.0	3.9	3.9	1.1	5.5	9.4	12.7	1.1	100.
5	13.3	4.4	2.8	3.3	3.9	2.8	5.0	8.3	12.7	7.7	3.3	3.9	1.7	7.7	7.7	11.6	00.0	100.
6	10.5	6.1	2.2	.6	6.1	3.3	6.1	8.3	14.4	7.2	2.2	2.8	3.3	5.0	8.8	12.2	1.1	100.
7	12.2	5.5	2.8	2.2	3.3	5.5	7.7	10.5	12.2	5.5	2.2	3.9	1.7	5.0	5.5	12.7	1.7	100.
8	12.2	6.1	2.8	2.2	3.3	6.6	8.8	7.2	13.3	7.2	2.8	2.8	3.3	3.9	8.3	9.4	00.0	100.
9	7.7	7.7	2.2	3.3	3.3	6.6	7.2	7.2	13.3	10.5	1.1	2.8	2.2	4.4	6.1	14.4	00.0	100.
10	10.5	5.0	3.3	5.5	3.3	3.9	9.4	7.7	9.4	9.4	5.5	2.2	3.9	3.9	7.7	8.8	.6	100.
11	12.7	3.3	6.1	2.2	3.3	6.1	7.2	8.3	10.5	8.3	4.4	5.0	3.3	2.8	9.4	7.2	00.0	100.
12	12.2	7.2	4.4	2.8	5.0	7.2	3.9	7.7	11.6	8.8	5.0	4.4	2.8	2.8	6.6	7.7	00.0	100.
13	12.2	5.0	3.3	3.3	4.4	6.6	7.2	5.5	10.5	8.8	7.2	1.7	3.3	3.9	7.7	9.4	00.0	100.
14	14.4	3.3	1.7	3.3	5.0	9.4	5.5	5.0	13.3	7.7	3.9	4.4	3.9	2.2	9.4	7.7	00.0	100.
15	13.3	4.4	2.8	2.8	5.0	7.2	6.6	4.4	12.2	8.3	6.1	3.9	2.8	4.4	8.3	7.7	00.0	100.
16	12.7	4.4	2.2	3.9	2.8	8.3	6.1	10.5	9.4	5.0	6.1	1.7	2.2	5.5	7.2	12.2	00.0	100.
17	10.5	6.1	3.9	1.7	3.3	7.2	6.1	9.9	9.9	7.7	2.8	2.2	3.9	3.9	6.1	14.9	00.0	100.
18	9.9	5.0	4.4	4.4	3.3	6.6	5.5	8.3	10.5	7.7	3.9	1.7	3.9	3.3	7.2	13.8	.6	100.
19	11.6	6.6	2.2	4.4	3.9	7.7	7.2	5.5	12.2	7.2	2.2	1.7	3.9	1.7	8.8	12.7	.6	100.
20	12.2	3.9	5.5	2.8	2.2	9.4	5.5	8.3	10.5	5.0	3.9	2.8	2.8	1.7	8.3	14.4	1.1	100.
21	14.9	3.9	1.7	2.2	4.4	5.0	7.7	10.5	10.5	6.1	2.8	3.3	2.2	2.2	5.5	14.9	2.2	100.
22	12.2	5.0	2.8	1.7	5.5	2.8	8.3	9.4	12.7	5.5	4.4	1.7	2.2	2.2	7.7	13.3	2.8	100.
23	10.6	3.9	1.1	5.0	3.3	2.2	8.9	6.7	12.2	8.9	1.7	3.9	3.9	2.2	7.2	15.0	3.3	100.
24	11.7	5.6	2.8	4.4	1.7	3.3	5.6	10.6	15.6	5.6	1.7	2.2	2.2	3.3	5.0	13.9	5.0	100.
ALL	12.1	5.0	3.1	2.8	3.9	5.5	6.5	8.2	11.7	7.3	3.5	3.0	2.7	3.9	7.5	12.0	1.0	100.

NUMBER OF OBS = 4340

B36

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JULY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	12.9	3.2	6.5	3.2	00.0	00.0	9.7	6.5	12.9	9.7	3.2	00.0	3.2	6.5	6.5	12.9	3.2	100.
2	16.1	6.5	3.2	3.2	00.0	3.2	9.7	6.5	16.1	3.2	00.0	3.2	9.7	9.7	6.5	3.2	00.0	100.
3	9.7	9.7	6.5	3.2	00.0	00.0	9.7	3.2	9.7	3.2	3.2	00.0	6.5	12.9	16.1	6.5	00.0	100.
4	12.9	6.5	00.0	6.5	3.2	6.5	6.5	00.0	6.5	9.7	00.0	3.2	3.2	6.5	19.4	6.5	3.2	100.
5	12.9	6.5	9.7	00.0	3.2	9.7	6.5	3.2	6.5	9.7	6.5	3.2	6.5	3.2	6.5	3.2	6.5	100.
6	12.9	9.7	00.0	00.0	3.2	9.7	6.5	6.5	16.1	3.2	3.2	9.7	00.0	3.2	6.5	6.5	3.2	100.
7	6.5	6.5	9.7	3.2	00.0	3.2	6.5	12.9	19.4	00.0	00.0	00.0	9.7	3.2	6.5	9.7	3.2	100.
8	9.7	6.5	6.5	6.5	6.5	12.9	9.7	3.2	19.4	3.2	00.0	00.0	00.0	9.7	6.5	00.0	00.0	100.
9	6.5	9.7	6.5	6.5	9.7	00.0	19.4	12.9	9.7	3.2	3.2	00.0	00.0	6.5	00.0	6.5	00.0	100.
10	12.9	9.7	9.7	3.2	6.5	12.9	3.2	9.7	9.7	3.2	00.0	9.7	3.2	6.5	00.0	00.0	00.0	100.
11	19.4	9.7	6.5	6.5	9.7	3.2	6.5	16.1	3.2	3.2	3.2	3.2	00.0	6.5	3.2	00.0	00.0	100.
12	16.1	12.9	12.9	3.2	3.2	6.5	3.2	16.1	6.5	00.0	3.2	3.2	3.2	3.2	3.2	3.2	00.0	100.
13	12.9	29.0	6.5	00.0	3.2	3.2	3.2	19.4	3.2	3.2	3.2	3.2	3.2	00.0	6.5	00.0	00.0	100.
14	22.6	25.8	3.2	3.2	00.0	00.0	12.9	9.7	6.5	6.5	3.2	00.0	00.0	3.2	3.2	00.0	00.0	100.
15	12.9	12.9	9.7	6.5	3.2	00.0	9.7	16.1	6.5	00.0	3.2	3.2	00.0	00.0	12.9	3.2	00.0	100.
16	16.1	16.1	6.5	6.5	6.5	3.2	12.9	12.9	00.0	3.2	00.0	00.0	00.0	3.2	6.5	6.5	00.0	100.
17	22.6	9.7	6.5	6.5	3.2	3.2	22.6	6.5	00.0	3.2	3.2	00.0	00.0	3.2	9.7	00.0	00.0	100.
18	12.9	22.6	6.5	6.5	6.5	3.2	19.4	3.2	00.0	00.0	00.0	00.0	3.2	00.0	12.9	3.2	00.0	100.
19	3.2	16.1	6.5	16.1	00.0	6.5	19.4	00.0	3.2	00.0	6.5	00.0	00.0	00.0	9.7	12.9	00.0	100.
20	19.4	3.2	3.2	9.7	6.5	3.2	9.7	6.5	00.0	3.2	3.2	3.2	6.5	6.5	12.9	3.2	00.0	100.
21	16.1	3.2	3.2	6.5	00.0	3.2	9.7	00.0	9.7	00.0	3.2	3.2	00.0	6.5	19.4	16.1	00.0	100.
22	16.1	9.7	6.5	3.2	00.0	3.2	6.5	3.2	00.0	6.5	3.2	6.5	3.2	12.9	9.7	3.2	6.5	100.
23	16.1	9.7	00.0	3.2	3.2	00.0	3.2	6.5	6.5	12.9	6.5	3.2	3.2	6.5	9.7	6.5	3.2	100.
24	22.6	3.2	00.0	00.0	3.2	00.0	12.9	6.5	3.2	6.5	00.0	3.2	00.0	12.9	3.2	12.9	9.7	100.
ALL	14.2	10.8	5.6	4.7	3.4	4.0	9.9	7.8	7.3	4.0	2.6	2.7	2.6	5.6	8.1	5.4	1.3	100.

NUMBER OF OBS = 744

B37

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

AUGUST

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	12.9	00.0	00.0	00.0	00.0	3.2	3.2	6.5	22.6	6.5	12.9	3.2	6.5	3.2	3.2	16.1	00.0	100.
2	16.1	00.0	00.0	00.0	3.2	3.2	6.5	6.5	22.6	12.9	00.0	00.0	00.0	00.0	6.5	12.9	9.7	100.
3	16.1	00.0	00.0	3.2	6.5	00.0	9.7	6.5	16.1	6.5	3.2	6.5	00.0	6.5	3.2	12.9	3.2	100.
4	12.9	6.5	00.0	6.5	00.0	00.0	3.2	9.7	16.1	9.7	3.2	6.5	00.0	6.5	00.0	12.9	6.5	100.
5	6.5	3.2	00.0	3.2	00.0	00.0	3.2	12.9	16.1	12.9	9.7	3.2	3.2	6.5	6.5	12.9	00.0	100.
6	12.9	00.0	00.0	00.0	3.2	00.0	3.2	12.9	19.4	9.7	6.5	3.2	00.0	9.7	6.5	12.9	00.0	100.
7	12.9	6.5	00.0	00.0	3.2	00.0	6.5	12.9	22.6	12.9	00.0	00.0	00.0	3.2	00.0	16.1	3.2	100.
8	12.9	3.2	3.2	00.0	3.2	00.0	19.4	6.5	22.6	3.2	00.0	3.2	00.0	00.0	12.9	6.5	3.2	100.
9	19.4	3.2	00.0	00.0	00.0	9.7	19.4	6.5	19.4	3.2	6.5	00.0	3.2	3.2	00.0	3.2	3.2	100.
10	12.9	3.2	3.2	3.2	6.5	3.2	9.7	12.9	19.4	6.5	6.5	00.0	6.5	00.0	3.2	3.2	00.0	100.
11	16.1	3.2	00.0	6.5	6.5	6.5	9.7	9.7	16.1	6.5	12.9	00.0	00.0	3.2	3.2	00.0	00.0	100.
12	9.7	9.7	3.2	3.2	3.2	6.5	9.7	3.2	19.4	6.5	3.2	6.5	3.2	6.5	6.5	00.0	00.0	100.
13	12.9	3.2	6.5	6.5	6.5	6.5	3.2	9.7	16.1	6.5	6.5	3.2	00.0	6.5	00.0	6.5	00.0	100.
14	12.9	3.2	12.9	3.2	00.0	3.2	12.9	3.2	25.8	00.0	9.7	3.2	00.0	00.0	3.2	6.5	00.0	100.
15	9.7	6.5	6.5	3.2	00.0	3.2	9.7	16.1	9.7	6.5	3.2	9.7	00.0	3.2	6.5	6.5	00.0	100.
16	12.9	3.2	00.0	9.7	3.2	00.0	6.5	12.9	12.9	9.7	3.2	3.2	3.2	3.2	00.0	16.1	00.0	100.
17	9.7	9.7	3.2	16.1	00.0	3.2	9.7	9.7	12.9	9.7	00.0	3.2	00.0	3.2	00.0	9.7	00.0	100.
18	16.1	3.2	9.7	9.7	00.0	00.0	9.7	9.7	16.1	6.5	00.0	6.5	00.0	3.2	00.0	9.7	00.0	100.
19	19.4	3.2	6.5	3.2	3.2	00.0	9.7	6.5	12.9	6.5	6.5	00.0	3.2	00.0	6.5	9.7	3.2	100.
20	6.5	6.5	00.0	3.2	3.2	3.2	6.5	3.2	16.1	3.2	3.2	6.5	00.0	3.2	12.9	22.6	00.0	100.
21	12.9	3.2	00.0	00.0	6.5	3.2	9.7	3.2	16.1	00.0	6.5	3.2	00.0	3.2	9.7	19.4	3.2	100.
22	12.9	6.5	00.0	00.0	3.2	3.2	9.7	3.2	19.4	6.5	3.2	00.0	3.2	00.0	9.7	16.1	3.2	100.
23	12.9	00.0	00.0	3.2	00.0	00.0	9.7	6.5	16.1	12.9	6.5	6.5	3.2	9.7	6.5	6.5	00.0	100.
24	6.5	3.2	00.0	00.0	3.2	3.2	6.5	3.2	25.8	6.5	6.5	00.0	3.2	3.2	9.7	16.1	3.2	100.
ALL	12.8	3.8	2.3	3.5	2.7	2.6	8.6	8.1	18.0	7.1	5.0	3.2	1.6	3.6	4.8	10.6	1.7	100.

NUMBER OF OBS = 744

B38

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

SEPTEMBER

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	6.7	10.0	10.0	00.0	00.0	00.0	6.7	00.0	33.3	00.0	6.7	00.0	3.3	3.3	6.7	3.3	10.0	100.
2	10.0	3.3	13.3	3.3	3.3	3.3	3.3	00.0	33.3	13.3	00.0	00.0	3.3	3.3	00.0	3.3	3.3	100.
3	10.0	3.3	3.3	3.3	6.7	3.3	3.3	13.3	20.0	13.3	00.0	00.0	3.3	3.3	00.0	6.7	6.7	100.
4	10.0	6.7	3.3	3.3	3.3	3.3	6.7	6.7	26.7	6.7	00.0	3.3	00.0	00.0	6.7	3.3	10.0	100.
5	10.0	6.7	3.3	3.3	00.0	3.3	3.3	10.0	20.0	3.3	6.7	00.0	3.3	6.7	6.7	10.0	3.3	100.
6	13.3	6.7	00.0	3.3	00.0	00.0	3.3	16.7	20.0	10.0	00.0	00.0	6.7	3.3	6.7	3.3	6.7	100.
7	13.3	6.7	00.0	00.0	00.0	6.7	3.3	20.0	16.7	6.7	6.7	3.3	00.0	00.0	6.7	00.0	10.0	100.
8	3.3	10.0	6.7	00.0	00.0	10.0	00.0	26.7	33.3	00.0	00.0	3.3	00.0	3.3	00.0	3.3	00.0	100.
9	3.3	10.0	3.3	00.0	3.3	6.7	6.7	26.7	20.0	10.0	3.3	00.0	00.0	00.0	00.0	6.7	00.0	100.
10	3.3	10.0	3.3	3.3	00.0	6.7	10.0	13.3	30.0	6.7	3.3	00.0	00.0	00.0	6.7	3.3	00.0	100.
11	00.0	3.3	16.7	00.0	00.0	3.3	6.7	6.7	36.7	13.3	3.3	00.0	00.0	00.0	00.0	10.0	00.0	100.
12	00.0	6.7	10.0	3.3	3.3	3.3	3.3	13.3	30.0	13.3	3.3	00.0	00.0	00.0	00.0	10.0	00.0	100.
13	3.3	10.0	6.7	00.0	3.3	6.7	00.0	10.0	33.3	10.0	6.7	3.3	00.0	00.0	00.0	6.7	00.0	100.
14	3.3	16.7	3.3	3.3	3.3	3.3	00.0	16.7	23.3	16.7	3.3	00.0	00.0	00.0	00.0	6.7	00.0	100.
15	00.0	20.0	6.7	3.3	6.7	3.3	00.0	10.0	26.7	16.7	00.0	00.0	00.0	00.0	00.0	6.7	00.0	100.
16	00.0	6.7	10.0	10.0	3.3	00.0	3.3	16.7	26.7	10.0	3.3	00.0	00.0	00.0	00.0	10.0	00.0	100.
17	3.3	13.3	3.3	10.0	00.0	00.0	10.0	10.0	30.0	13.3	00.0	00.0	00.0	00.0	00.0	6.7	00.0	100.
18	00.0	13.3	10.0	00.0	10.0	00.0	3.3	16.7	16.7	16.7	3.3	00.0	00.0	3.3	00.0	6.7	00.0	100.
19	00.0	13.3	3.3	3.3	10.0	00.0	3.3	13.3	13.3	23.3	3.3	00.0	00.0	00.0	3.3	10.0	00.0	100.
20	3.3	13.3	10.0	3.3	3.3	00.0	6.7	3.3	26.7	13.3	3.3	3.3	00.0	00.0	6.7	3.3	00.0	100.
21	00.0	23.3	3.3	3.3	3.3	00.0	3.3	3.3	26.7	10.0	00.0	00.0	00.0	6.7	3.3	10.0	3.3	100.
22	13.3	10.0	3.3	3.3	3.3	3.3	3.3	3.3	30.0	6.7	00.0	3.3	00.0	3.3	3.3	10.0	00.0	100.
23	6.7	13.3	6.7	00.0	3.3	00.0	6.7	10.0	23.3	3.3	3.3	6.7	00.0	3.3	6.7	6.7	00.0	100.
24	13.3	16.7	3.3	00.0	3.3	00.0	3.3	13.3	20.0	10.0	3.3	00.0	6.7	00.0	6.7	00.0	00.0	100.
ALL	5.4	10.6	6.0	2.6	3.1	2.8	4.2	11.7	25.7	10.3	2.6	1.1	1.1	1.7	2.9	6.1	2.2	100.

NUMBER OF OBS = 720

B39

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JUL-SEP

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.9	4.3	5.4	1.1	00.0	1.1	6.5	4.3	22.8	5.4	7.6	1.1	4.3	4.3	5.4	10.9	4.3	100.
2	14.1	3.3	5.4	2.2	2.2	3.3	6.5	4.3	23.9	9.8	00.0	1.1	4.3	4.3	4.3	6.5	4.3	100.
3	12.0	4.3	3.3	3.3	4.3	1.1	7.6	7.6	15.2	7.6	2.2	2.2	3.3	7.6	6.5	8.7	3.3	100.
4	12.0	6.5	1.1	5.4	2.2	3.3	5.4	5.4	16.3	8.7	1.1	4.3	1.1	4.3	8.7	7.6	6.5	100.
5	9.8	5.4	4.3	2.2	1.1	4.3	4.3	8.7	14.1	8.7	7.6	3.3	3.3	6.5	5.4	9.8	1.1	100.
6	13.0	5.4	00.0	1.1	2.2	3.3	4.3	12.0	18.5	7.6	3.3	4.3	2.2	5.4	6.5	7.6	3.3	100.
7	10.9	6.5	3.3	1.1	1.1	3.3	5.4	15.2	19.6	6.5	2.2	1.1	3.3	2.2	4.3	8.7	5.4	100.
8	8.7	6.5	5.4	2.2	3.3	7.6	9.8	12.0	25.0	2.2	00.0	2.2	00.0	4.3	6.5	3.3	1.1	100.
9	9.8	7.6	3.3	2.2	4.3	5.4	15.2	15.2	16.3	5.4	4.3	00.0	1.1	3.3	00.0	5.4	1.1	100.
10	9.8	7.6	5.4	3.3	4.3	7.6	7.6	12.0	19.6	5.4	3.3	3.3	3.3	2.2	3.3	2.2	00.0	100.
11	12.0	5.4	7.6	4.3	5.4	4.3	7.6	10.9	18.5	7.6	6.5	1.1	00.0	3.3	2.2	3.3	00.0	100.
12	8.7	9.8	8.7	3.3	3.3	5.4	5.4	10.9	18.5	6.5	3.3	3.3	2.2	3.3	3.3	4.3	00.0	100.
13	9.8	14.1	6.5	2.2	4.3	5.4	2.2	13.0	17.4	6.5	5.4	3.3	1.1	2.2	2.2	4.3	00.0	100.
14	13.0	15.2	6.5	3.3	1.1	2.2	8.7	9.8	18.5	7.6	5.4	1.1	00.0	1.1	2.2	4.3	00.0	100.
15	7.6	13.0	7.6	4.3	3.3	2.2	6.5	14.1	14.1	7.6	2.2	4.3	00.0	1.1	6.5	5.4	00.0	100.
16	9.8	8.7	5.4	8.7	4.3	1.1	7.6	14.1	13.0	7.6	2.2	1.1	1.1	2.2	2.2	10.9	00.0	100.
17	12.0	10.9	4.3	10.9	1.1	2.2	14.1	8.7	14.1	8.7	1.1	1.1	00.0	2.2	3.3	5.4	00.0	100.
18	9.8	13.0	8.7	5.4	5.4	1.1	10.9	9.8	10.9	7.6	1.1	2.2	1.1	2.2	4.3	6.5	00.0	100.
19	7.6	10.9	5.4	7.6	4.3	2.2	10.9	6.5	9.8	9.8	5.4	00.0	1.1	00.0	6.5	10.9	1.1	100.
20	9.8	7.6	4.3	5.4	4.3	2.2	7.6	4.3	14.1	6.5	3.3	4.3	2.2	3.3	10.9	9.8	00.0	100.
21	9.8	9.8	2.2	3.3	3.3	2.2	7.6	2.2	17.4	3.3	3.3	2.2	00.0	5.4	10.9	15.2	2.2	100.
22	14.1	8.7	3.3	2.2	2.2	3.3	6.5	3.3	16.3	6.5	2.2	3.3	2.2	5.4	7.6	9.8	3.3	100.
23	12.0	7.6	2.2	2.2	2.2	00.0	6.5	7.6	15.2	9.8	5.4	5.4	2.2	6.5	7.6	6.5	1.1	100.
24	14.1	7.6	1.1	00.0	3.3	1.1	7.6	7.6	16.3	7.6	3.3	1.1	3.3	5.4	6.5	9.8	4.3	100.
ALL	10.9	8.3	4.6	3.6	3.0	3.1	7.6	9.1	16.9	7.1	3.4	2.4	1.8	3.7	5.3	7.4	1.8	100.

NUMBER OF OBS = 2208

B40

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

OCTOBER

HR. OF DAY	WIND DIRECTION																CALM	TOTAL
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
1	9.7	3.2	3.2	3.2	3.2	00.0	6.5	00.0	12.9	9.7	00.0	6.5	00.0	6.5	12.9	19.4	3.2	100.
2	19.4	00.0	6.5	00.0	00.0	3.2	3.2	00.0	12.9	9.7	9.7	00.0	3.2	3.2	9.7	12.9	6.5	100.
3	16.1	6.5	3.2	3.2	00.0	00.0	3.2	3.2	9.7	9.7	3.2	00.0	9.7	3.2	9.7	16.1	3.2	100.
4	22.6	6.5	3.2	6.5	00.0	00.0	3.2	00.0	16.1	00.0	3.2	00.0	6.5	6.5	12.9	9.7	3.2	100.
5	12.9	9.7	3.2	3.2	3.2	6.5	00.0	3.2	16.1	3.2	3.2	6.5	00.0	9.7	9.7	3.2	6.5	100.
6	12.9	12.9	3.2	00.0	3.2	00.0	6.5	3.2	9.7	9.7	3.2	00.0	00.0	6.5	16.1	6.5	6.5	100.
7	6.5	12.9	00.0	00.0	3.2	00.0	6.5	3.2	12.9	12.9	00.0	00.0	6.5	9.7	6.5	12.9	6.5	100.
8	9.7	9.7	00.0	3.2	00.0	12.9	00.0	6.5	16.1	9.7	00.0	3.2	3.2	9.7	9.7	3.2	3.2	100.
9	19.4	00.0	6.5	3.2	6.5	6.5	6.5	9.7	6.5	9.7	3.2	00.0	00.0	6.5	12.9	3.2	00.0	100.
10	16.1	9.7	3.2	6.5	6.5	3.2	9.7	3.2	12.9	3.2	3.2	00.0	6.5	9.7	3.2	00.0	100.	
11	16.1	16.1	00.0	6.5	6.5	00.0	3.2	9.7	6.5	9.7	9.7	00.0	3.2	00.0	3.2	9.7	00.0	100.
12	19.4	6.5	6.5	00.0	00.0	3.2	12.9	00.0	9.7	6.5	6.5	6.5	00.0	3.2	9.7	9.7	00.0	100.
13	9.7	9.7	6.5	3.2	3.2	00.0	16.1	00.0	6.5	9.7	00.0	12.9	00.0	3.2	6.5	12.9	00.0	100.
14	25.8	3.2	9.7	00.0	00.0	3.2	12.9	00.0	6.5	9.7	00.0	6.5	9.7	6.5	3.2	3.2	00.0	100.
15	16.1	9.7	12.9	3.2	3.2	00.0	6.5	6.5	3.2	9.7	3.2	6.5	3.2	9.7	3.2	3.2	00.0	100.
16	12.9	12.9	3.2	9.7	6.5	00.0	9.7	00.0	9.7	3.2	6.5	3.2	9.7	3.2	6.5	3.2	00.0	100.
17	19.4	6.5	9.7	3.2	3.2	00.0	00.0	12.9	6.5	12.9	3.2	00.0	3.2	6.5	6.5	6.5	00.0	100.
18	19.4	3.2	6.5	3.2	3.2	00.0	3.2	6.5	9.7	16.1	00.0	3.2	3.2	3.2	6.5	12.9	00.0	100.
19	16.1	3.2	3.2	00.0	3.2	00.0	3.2	00.0	22.6	12.9	3.2	6.5	00.0	00.0	6.5	19.4	00.0	100.
20	16.1	9.7	3.2	00.0	3.2	3.2	00.0	6.5	22.6	6.5	00.0	00.0	6.5	00.0	9.7	9.7	3.2	100.
21	12.9	6.5	3.2	00.0	3.2	3.2	3.2	6.5	22.6	6.5	00.0	3.2	00.0	3.2	6.5	16.1	3.2	100.
22	16.1	6.5	6.5	00.0	00.0	00.0	3.2	3.2	12.9	16.1	6.5	6.5	3.2	00.0	3.2	12.9	3.2	100.
23	6.5	6.5	3.2	00.0	00.0	3.2	6.5	3.2	12.9	6.5	12.9	3.2	3.2	3.2	12.9	12.9	3.2	100.
24	16.1	6.5	00.0	3.2	6.5	00.0	6.5	00.0	12.9	12.9	12.9	00.0	00.0	00.0	12.9	3.2	6.5	100.
ALL	15.3	7.4	4.4	2.6	2.8	2.0	5.5	3.6	12.1	9.0	3.9	3.2	3.1	4.6	8.6	9.4	2.4	100.

NUMBER OF OBS = 744

B41

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

NOVEMBER

HR. OF DAY	WIND DIRECTION															CALM	TOTAL	
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW			NNW
1	10.0	10.0	00.0	00.0	00.0	00.0	6.7	6.7	3.3	10.0	6.7	3.3	00.0	13.3	00.0	23.3	6.7	100.
2	13.3	6.7	00.0	00.0	00.0	3.3	3.3	6.7	13.3	3.3	10.0	3.3	3.3	10.0	10.0	13.3	00.0	100.
3	6.7	6.7	00.0	00.0	00.0	3.3	00.0	6.7	16.7	00.0	3.3	13.3	3.3	10.0	13.3	13.3	3.3	100.
4	3.3	6.7	3.3	00.0	00.0	3.3	3.3	6.7	16.7	6.7	00.0	3.3	6.7	16.7	10.0	13.3	00.0	100.
5	3.3	3.3	3.3	00.0	3.3	00.0	6.7	6.7	6.7	13.3	00.0	00.0	3.3	16.7	13.3	16.7	3.3	100.
6	6.7	3.3	00.0	3.3	00.0	3.3	6.7	10.0	6.7	13.3	00.0	6.7	00.0	13.3	13.3	13.3	00.0	100.
7	10.0	6.7	3.3	3.3	00.0	3.3	6.7	3.3	20.0	6.7	00.0	00.0	13.3	6.7	6.7	10.0	00.0	100.
8	3.3	13.3	00.0	00.0	6.7	00.0	6.7	16.7	3.3	10.0	00.0	3.3	13.3	00.0	10.0	13.3	00.0	100.
9	6.7	10.0	00.0	3.3	3.3	00.0	6.7	13.3	13.3	6.7	00.0	00.0	3.3	10.0	13.3	6.7	3.3	100.
10	10.3	6.9	00.0	3.4	3.4	00.0	10.3	13.8	13.8	00.0	00.0	00.0	6.9	6.9	17.2	3.4	3.4	100.
11	3.4	6.9	3.4	3.4	00.0	3.4	3.4	6.9	24.1	00.0	00.0	6.9	6.9	00.0	13.8	13.8	3.4	100.
12	6.9	3.4	6.9	3.4	00.0	6.9	00.0	10.3	17.2	00.0	3.4	13.8	3.4	00.0	10.3	13.8	00.0	100.
13	10.3	6.9	00.0	6.9	00.0	3.4	3.4	10.3	17.2	6.9	00.0	10.3	00.0	10.3	3.4	10.3	00.0	100.
14	10.3	10.3	00.0	3.4	3.4	3.4	6.9	3.4	13.8	10.3	10.3	3.4	00.0	6.9	10.3	3.4	00.0	100.
15	13.3	6.7	3.3	00.0	3.3	3.3	3.3	3.3	16.7	6.7	10.0	6.7	00.0	6.7	10.0	6.7	00.0	100.
16	6.7	3.3	3.3	6.7	3.3	00.0	00.0	3.3	16.7	6.7	13.3	00.0	6.7	6.7	6.7	16.7	00.0	100.
17	3.3	3.3	3.3	6.7	3.3	00.0	00.0	6.7	16.7	10.0	3.3	6.7	6.7	3.3	6.7	20.0	00.0	100.
18	10.0	10.0	00.0	00.0	3.3	00.0	00.0	20.0	10.0	3.3	6.7	3.3	3.3	6.7	6.7	16.7	00.0	100.
19	13.3	3.3	00.0	3.3	3.3	3.3	00.0	3.3	23.3	6.7	3.3	3.3	3.3	3.3	6.7	16.7	3.3	100.
20	10.0	6.7	00.0	3.3	3.3	00.0	00.0	10.0	23.3	3.3	00.0	00.0	6.7	10.0	6.7	16.7	00.0	100.
21	16.7	3.3	3.3	3.3	3.3	6.7	00.0	6.7	20.0	00.0	00.0	00.0	00.0	10.0	16.7	6.7	3.3	100.
22	10.0	3.3	00.0	3.3	3.3	00.0	00.0	13.3	13.3	6.7	3.3	3.3	00.0	13.3	6.7	16.7	3.3	100.
23	16.7	3.3	3.3	3.3	00.0	00.0	00.0	13.3	16.7	6.7	3.3	00.0	3.3	6.7	10.0	10.0	3.3	100.
24	10.0	6.7	3.3	3.3	00.0	00.0	3.3	3.3	16.7	6.7	3.3	6.7	00.0	10.0	16.7	3.3	6.7	100.
ALL	9.0	6.3	1.7	2.7	2.0	2.0	3.2	8.5	15.0	6.0	3.4	4.1	3.9	8.3	9.9	12.4	1.8	100.

NUMBER OF OBS = 715

B42

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

DECEMBER

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	6.5	3.2	00.0	3.2	3.2	6.5	3.2	3.2	16.1	6.5	6.5	00.0	6.5	00.0	22.6	9.7	3.2	100.
2	9.7	00.0	00.0	6.5	00.0	3.2	3.2	6.5	9.7	9.7	3.2	3.2	3.2	9.7	12.9	12.9	6.5	100.
3	12.9	00.0	00.0	3.2	3.2	00.0	6.5	3.2	9.7	16.1	3.2	3.2	3.2	6.5	16.1	6.5	6.5	100.
4	6.5	00.0	3.2	3.2	00.0	00.0	6.5	12.9	9.7	12.9	00.0	9.7	3.2	6.5	16.1	6.5	3.2	100.
5	6.5	3.2	00.0	9.7	00.0	00.0	3.2	3.2	16.1	9.7	6.5	6.5	00.0	12.9	9.7	12.9	00.0	100.
6	6.5	00.0	3.2	00.0	6.5	00.0	00.0	3.2	12.9	19.4	00.0	6.5	3.2	3.2	22.6	9.7	3.2	100.
7	6.5	00.0	00.0	6.5	3.2	00.0	3.2	00.0	12.9	16.1	00.0	6.5	9.7	9.7	6.5	12.9	6.5	100.
8	6.5	00.0	3.2	00.0	6.5	6.5	3.2	3.2	12.9	12.9	3.2	00.0	9.7	3.2	22.6	6.5	00.0	100.
9	9.7	00.0	3.2	3.2	3.2	3.2	3.2	9.7	9.7	19.4	00.0	00.0	9.7	00.0	19.4	6.5	00.0	100.
10	16.1	00.0	00.0	3.2	3.2	9.7	3.2	9.7	9.7	6.5	9.7	6.5	3.2	3.2	6.5	9.7	00.0	100.
11	6.5	9.7	00.0	6.5	00.0	3.2	12.9	6.5	9.7	12.9	6.5	3.2	00.0	6.5	6.5	9.7	00.0	100.
12	6.5	6.5	3.2	6.5	00.0	3.2	6.5	6.5	16.1	9.7	9.7	3.2	3.2	6.5	9.7	3.2	00.0	100.
13	9.7	3.2	3.2	00.0	00.0	3.2	9.7	00.0	16.1	12.9	12.9	6.5	3.2	00.0	9.7	9.7	00.0	100.
14	6.5	6.5	3.2	00.0	00.0	6.5	6.5	3.2	16.1	9.7	9.7	9.7	00.0	00.0	9.7	12.9	00.0	100.
15	6.5	6.5	00.0	3.2	00.0	6.5	6.5	00.0	19.4	9.7	6.5	9.7	3.2	00.0	9.7	12.9	00.0	100.
16	3.2	3.2	3.2	00.0	00.0	6.5	6.5	6.5	22.6	6.5	00.0	6.5	00.0	6.5	9.7	19.4	00.0	100.
17	6.5	3.2	00.0	00.0	00.0	9.7	6.5	3.2	19.4	6.5	3.2	6.5	3.2	6.5	9.7	16.1	00.0	100.
18	6.5	3.2	3.2	6.5	00.0	3.2	3.2	3.2	19.4	3.2	3.2	00.0	3.2	9.7	16.1	16.1	00.0	100.
19	3.2	00.0	3.2	6.5	00.0	3.2	3.2	6.5	16.1	9.7	3.2	3.2	00.0	9.7	9.7	19.4	3.2	100.
20	6.5	00.0	3.2	3.2	00.0	3.2	6.5	9.7	9.7	12.9	00.0	6.5	00.0	6.5	12.9	16.1	3.2	100.
21	9.7	00.0	00.0	3.2	00.0	3.2	6.5	00.0	16.1	9.7	3.2	3.2	00.0	16.1	16.1	9.7	3.2	100.
22	3.2	00.0	00.0	3.2	00.0	00.0	3.2	6.5	19.4	9.7	00.0	9.7	00.0	9.7	16.1	19.4	00.0	100.
23	3.2	3.2	00.0	00.0	3.2	00.0	6.5	3.2	19.4	9.7	3.2	3.2	6.5	9.7	12.9	16.1	00.0	100.
24	6.5	00.0	00.0	00.0	00.0	3.2	3.2	6.5	19.4	6.5	6.5	3.2	3.2	12.9	12.9	12.9	3.2	100.
ALL	7.1	2.2	1.5	3.2	1.3	3.5	5.1	4.8	14.9	10.8	4.2	4.8	3.2	6.5	13.2	12.0	1.7	100.

NUMBER OF OBS = 744

B43

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

OCT-DEC

HR. OF DAY	WIND DIRECTION																CALM	TOTAL
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
1	8.7	5.4	1.1	2.2	2.2	2.2	5.4	3.3	10.9	8.7	4.3	3.3	2.2	6.5	12.0	17.4	4.3	100.
2	14.1	2.2	2.2	2.2	00.0	3.3	3.3	4.3	12.0	7.6	7.6	2.2	3.3	7.6	10.9	13.0	4.3	100.
3	12.0	4.3	1.1	2.2	1.1	1.1	3.3	4.3	12.0	8.7	3.3	5.4	5.4	6.5	13.0	12.0	4.3	100.
4	10.9	4.3	3.3	3.3	00.0	1.1	4.3	6.5	14.1	6.5	1.1	4.3	5.4	9.8	13.0	9.8	2.2	100.
5	7.6	5.4	2.2	4.3	2.2	2.2	3.3	4.3	13.0	8.7	3.3	4.3	1.1	13.0	10.9	10.9	3.3	100.
6	8.7	5.4	2.2	1.1	3.3	1.1	4.3	5.4	9.8	14.1	1.1	4.3	1.1	7.6	17.4	9.8	3.3	100.
7	7.6	6.5	1.1	3.3	2.2	1.1	5.4	2.2	15.2	12.0	00.0	2.2	9.8	8.7	6.5	12.0	4.3	100.
8	6.5	7.6	1.1	1.1	4.3	6.5	3.3	8.7	10.9	10.9	1.1	2.2	8.7	4.3	14.1	7.6	1.1	100.
9	12.0	3.3	3.3	3.3	4.3	3.3	5.4	10.9	9.8	12.0	1.1	00.0	4.3	5.4	15.2	5.4	1.1	100.
10	14.3	5.5	1.1	4.4	4.4	4.4	7.7	8.8	12.1	3.3	4.4	3.3	3.3	5.5	11.0	5.5	1.1	100.
11	8.8	11.0	1.1	5.5	2.2	2.2	6.6	7.7	13.2	7.7	5.5	3.3	3.3	2.2	7.7	11.0	1.1	100.
12	11.0	5.5	5.5	3.3	00.0	4.4	6.6	5.5	14.3	5.5	6.6	7.7	2.2	3.3	9.9	8.8	00.0	100.
13	9.9	6.6	3.3	3.3	1.1	2.2	9.9	3.3	13.2	9.9	4.4	9.9	1.1	4.4	6.6	11.0	00.0	100.
14	14.3	6.6	4.4	1.1	1.1	4.4	8.8	2.2	12.1	9.9	6.6	6.6	3.3	4.4	7.7	6.6	00.0	100.
15	12.0	7.6	5.4	2.2	2.2	3.3	5.4	3.3	13.0	8.7	6.5	7.6	2.2	5.4	7.6	7.6	00.0	100.
16	7.6	6.5	3.3	5.4	3.3	2.2	5.4	3.3	16.3	5.4	6.5	3.3	5.4	5.4	7.6	13.0	00.0	100.
17	9.8	4.3	4.3	3.3	2.2	3.3	2.2	7.6	14.1	9.8	3.3	4.3	4.3	5.4	7.6	14.1	00.0	100.
18	12.0	5.4	3.3	3.3	2.2	1.1	2.2	9.8	13.0	7.6	3.3	2.2	3.3	6.5	9.8	15.2	00.0	100.
19	10.9	2.2	2.2	3.3	2.2	2.2	2.2	3.3	20.7	9.8	3.3	4.3	1.1	4.3	7.6	18.5	2.2	100.
20	10.9	5.4	2.2	2.2	2.2	2.2	2.2	8.7	18.5	7.6	00.0	2.2	4.3	5.4	9.8	14.1	2.2	100.
21	13.0	3.3	2.2	2.2	2.2	4.3	3.3	4.3	19.6	5.4	1.1	2.2	00.0	9.8	13.0	10.9	3.3	100.
22	9.8	3.3	2.2	2.2	1.1	00.0	2.2	7.6	15.2	10.9	3.3	6.5	1.1	7.6	8.7	16.3	2.2	100.
23	8.7	4.3	2.2	1.1	1.1	1.1	4.3	6.5	16.3	7.6	6.5	2.2	4.3	6.5	12.0	13.0	2.2	100.
24	10.9	4.3	1.1	2.2	2.2	1.1	4.3	3.3	16.3	8.7	7.6	3.3	1.1	7.6	14.1	6.5	5.4	100.
ALL	10.5	5.3	2.5	2.8	2.0	2.5	4.6	5.6	14.0	8.6	3.8	4.0	3.4	6.4	10.6	11.3	2.0	100.

NUMBER OF OBS = 2203

B44

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JUL-DEC

HR. OF DAY	WIND DIRECTION																CALM	TOTAL
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
1	9.8	4.9	3.3	1.6	1.1	1.6	6.0	3.8	16.8	7.1	6.0	2.2	3.3	5.4	8.7	14.1	4.3	100.
2	14.1	2.7	3.8	2.2	1.1	3.3	4.9	4.3	17.9	8.7	3.8	1.6	3.8	6.0	7.6	9.8	4.3	100.
3	12.0	4.3	2.2	2.7	2.7	1.1	5.4	6.0	13.6	8.2	2.7	3.8	4.3	7.1	9.8	10.3	3.8	100.
4	11.4	5.4	2.2	4.3	1.1	2.2	4.9	6.0	15.2	7.6	1.1	4.3	3.3	7.1	10.9	8.7	4.3	100.
5	8.7	5.4	3.3	3.3	1.6	3.3	3.8	6.5	13.6	8.7	5.4	3.8	2.2	9.8	8.2	10.3	2.2	100.
6	10.9	5.4	1.1	1.1	2.7	2.2	4.3	8.7	14.1	10.9	2.2	4.3	1.6	6.5	12.0	8.7	3.3	100.
7	9.2	6.5	2.2	2.2	1.6	2.2	5.4	8.7	17.4	9.2	1.1	1.6	6.5	5.4	5.4	10.3	4.9	100.
8	7.6	7.1	3.3	1.6	3.8	7.1	6.5	10.3	17.9	6.5	.5	2.2	4.3	4.3	10.3	5.4	1.1	100.
9	10.9	5.4	3.3	2.7	4.3	4.3	10.3	13.0	13.0	8.7	2.7	00.0	2.7	4.3	7.6	5.4	1.1	100.
10	12.0	6.6	3.3	3.8	4.4	6.0	7.7	10.4	15.8	4.4	3.8	3.3	3.3	3.8	7.1	3.8	.5	100.
11	10.4	8.2	4.4	4.9	3.8	3.3	7.1	9.3	15.8	7.7	6.0	2.2	1.6	2.7	4.9	7.1	.5	100.
12	9.8	7.7	7.1	3.3	1.6	4.9	6.0	8.2	16.4	6.0	4.9	5.5	2.2	3.3	6.6	6.6	00.0	100.
13	9.8	10.4	4.9	2.7	2.7	3.8	6.0	8.2	15.3	8.2	4.9	6.6	1.1	3.3	4.4	7.7	00.0	100.
14	13.7	10.9	5.5	2.2	1.1	3.3	8.7	6.0	15.3	8.7	6.0	3.8	1.6	2.7	4.9	5.5	00.0	100.
15	9.8	10.3	6.5	3.3	2.7	2.7	6.0	8.7	13.6	8.2	4.3	6.0	1.1	3.3	7.1	6.5	00.0	100.
16	8.7	7.6	4.3	7.1	3.8	1.6	6.5	8.7	14.7	6.5	4.3	2.2	3.3	3.8	4.9	12.0	00.0	100.
17	10.9	7.6	4.3	7.1	1.6	2.7	8.2	8.2	14.1	9.2	2.2	2.7	2.2	3.8	5.4	9.8	00.0	100.
18	10.9	9.2	6.0	4.3	3.8	1.1	6.5	9.8	12.0	7.6	2.2	2.2	2.2	4.3	7.1	10.9	00.0	100.
19	9.2	6.5	3.8	5.4	3.3	2.2	6.5	4.9	15.2	9.8	4.3	2.2	1.1	2.2	7.1	14.7	1.6	100.
20	10.3	6.5	3.3	3.8	3.3	2.2	4.9	6.5	16.3	7.1	1.6	3.3	3.3	4.3	10.3	12.0	1.1	100.
21	11.4	6.5	2.2	2.7	2.7	3.3	5.4	3.3	18.5	4.3	2.2	2.2	00.0	7.6	12.0	13.0	2.7	100.
22	12.0	6.0	2.7	2.2	1.6	1.6	4.3	5.4	15.8	8.7	2.7	4.9	1.6	6.5	8.2	13.0	2.7	100.
23	10.3	6.0	2.2	1.6	1.6	.5	5.4	7.1	15.8	8.7	6.0	3.8	3.3	6.5	9.8	9.8	1.6	100.
24	12.5	6.0	1.1	1.1	2.7	1.1	6.0	5.4	16.3	8.2	5.4	2.2	2.2	6.5	10.3	8.2	4.9	100.
ALL	10.7	6.8	3.6	3.2	2.5	2.8	6.1	7.4	15.4	7.9	3.6	3.2	2.6	5.0	7.9	9.3	1.9	100.

NUMBER OF OBS = 4411

B45

NPPD-COOPER NUCLEAR STATION 10-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JAN-DEC

HR. OF DAY	WIND DIRECTION																CALM	TOTAL
	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
1	11.5	4.1	3.8	1.9	1.9	2.5	6.3	5.8	15.1	7.1	4.1	2.5	2.5	5.2	7.7	14.8	3.0	100.
2	13.2	4.1	3.8	1.4	3.3	3.6	4.9	7.7	14.3	8.8	2.5	2.2	3.3	5.5	6.6	11.8	3.0	100.
3	12.1	4.7	3.3	1.6	3.8	2.7	5.5	7.1	12.3	7.4	3.6	3.6	2.5	6.6	10.1	11.0	2.2	100.
4	13.7	5.2	1.9	3.3	3.0	2.5	4.7	8.2	12.6	6.3	2.5	4.1	2.2	6.3	10.1	10.7	2.7	100.
5	11.0	4.9	3.0	3.3	2.7	3.0	4.4	7.4	13.2	8.2	4.4	3.8	1.9	8.8	7.9	11.0	1.1	100.
6	10.7	5.8	1.6	.8	4.4	2.7	5.2	8.5	14.2	9.0	2.2	3.6	2.5	5.8	10.4	10.4	2.2	100.
7	10.7	6.0	2.5	2.2	2.5	3.8	6.6	9.6	14.8	7.4	1.6	2.7	4.1	5.2	5.5	11.5	3.3	100.
8	9.9	6.6	3.0	1.9	3.6	6.8	7.7	8.8	15.6	6.8	1.6	2.5	3.8	4.1	9.3	7.4	.5	100.
9	9.3	6.6	2.7	3.0	3.8	5.5	8.8	10.1	13.2	9.6	1.9	1.4	2.5	4.4	6.8	9.9	.5	100.
10	11.3	5.8	3.3	4.7	3.8	4.9	8.5	9.1	12.6	6.9	4.7	2.7	3.6	3.8	7.4	6.3	.5	100.
11	11.5	5.8	5.2	3.6	3.6	4.7	7.1	8.8	13.2	8.0	5.2	3.6	2.5	2.7	7.1	7.1	.3	100.
12	11.0	7.4	5.8	3.0	3.3	6.0	4.9	8.0	14.0	7.4	4.9	4.9	2.5	3.0	6.6	7.1	00.0	100.
13	11.0	7.7	4.1	3.0	3.6	5.2	6.6	6.9	12.9	8.5	6.0	4.1	2.2	3.6	6.0	8.5	00.0	100.
14	14.0	7.1	3.6	2.7	3.0	6.3	7.1	5.5	14.3	8.2	4.9	4.1	2.7	2.5	7.1	6.6	00.0	100.
15	11.5	7.4	4.7	3.0	3.8	4.9	6.3	6.6	12.9	8.2	5.2	4.9	1.9	3.8	7.7	7.1	00.0	100.
16	10.7	6.0	3.3	5.5	3.3	4.9	6.3	9.6	12.1	5.8	5.2	1.9	2.7	4.7	6.0	12.1	00.0	100.
17	10.7	6.8	4.1	4.4	2.5	4.9	7.1	9.0	12.1	8.5	2.5	2.5	3.0	3.8	5.8	12.3	00.0	100.
18	10.4	7.1	5.2	4.4	3.6	3.8	6.0	9.0	11.2	7.7	3.0	1.9	3.0	3.8	7.1	12.3	.3	100.
19	10.4	6.6	3.0	4.9	3.6	4.9	6.8	5.2	13.7	8.5	3.3	1.9	2.5	1.9	7.9	13.7	1.1	100.
20	11.2	5.2	4.4	3.3	2.7	5.8	5.2	7.4	13.4	6.0	2.7	3.0	3.0	3.0	9.3	13.2	1.1	100.
21	13.2	5.2	1.9	2.5	3.6	4.1	6.6	6.8	14.5	5.2	2.5	2.7	1.1	4.9	8.8	14.0	2.5	100.
22	12.1	5.5	2.7	1.9	3.6	2.2	6.3	7.4	14.2	7.1	3.6	3.3	1.9	4.4	7.9	13.2	2.7	100.
23	10.4	4.9	1.6	3.3	2.5	1.4	7.1	6.9	14.0	8.8	3.8	3.8	3.6	4.4	8.5	12.4	2.5	100.
24	12.1	5.8	1.9	2.7	2.2	2.2	5.8	8.0	15.9	6.9	3.6	2.2	2.2	4.9	7.7	11.0	4.9	100.
ALL	11.4	5.9	3.4	3.0	3.2	4.1	6.3	7.8	13.6	7.6	3.6	3.1	2.7	4.5	7.7	10.6	1.4	100.

NUMBER OF OBS = 8751

B46

Wind Direction Frequencies

100-Meter Level

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
 VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JANUARY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	9.7	00.0	00.0	00.0	3.2	6.5	00.0	9.7	12.9	6.5	16.1	00.0	3.2	3.2	9.7	19.4	00.0	100.
2	9.7	00.0	3.2	00.0	9.7	00.0	00.0	9.7	9.7	6.5	16.1	00.0	3.2	6.5	12.9	12.9	00.0	100.
3	9.7	00.0	00.0	3.2	6.5	00.0	00.0	6.5	12.9	3.2	16.1	6.5	00.0	3.2	12.9	19.4	00.0	100.
4	6.5	00.0	3.2	00.0	6.5	00.0	00.0	9.7	9.7	6.5	9.7	6.5	00.0	3.2	22.6	16.1	00.0	100.
5	6.5	00.0	3.2	00.0	3.2	3.2	00.0	9.7	6.5	6.5	12.9	3.2	00.0	6.5	12.9	25.8	00.0	100.
6	6.5	00.0	3.2	00.0	6.5	00.0	00.0	9.7	12.9	00.0	12.9	3.2	00.0	00.0	22.6	22.6	00.0	100.
7	6.5	3.2	3.2	00.0	3.2	3.2	00.0	9.7	12.9	3.2	12.9	00.0	6.5	00.0	6.5	29.0	00.0	100.
8	00.0	3.2	6.5	00.0	3.2	3.2	00.0	9.7	9.7	6.5	12.9	00.0	3.2	9.7	9.7	22.6	00.0	100.
9	3.2	3.2	00.0	3.2	3.2	3.2	00.0	6.5	12.9	9.7	9.7	00.0	3.2	6.5	9.7	25.8	00.0	100.
10	9.7	00.0	3.2	00.0	3.2	00.0	6.5	6.5	16.1	6.5	9.7	00.0	6.5	3.2	12.9	16.1	00.0	100.
11	9.7	3.2	3.2	00.0	3.2	3.2	3.2	9.7	6.5	12.9	9.7	00.0	3.2	6.5	16.1	9.7	00.0	100.
12	3.2	3.2	6.5	00.0	00.0	9.7	00.0	6.5	6.5	16.1	12.9	6.5	00.0	00.0	16.1	12.9	00.0	100.
13	3.2	3.2	3.2	00.0	00.0	6.5	9.7	3.2	9.7	12.9	12.9	6.5	00.0	3.2	12.9	12.9	00.0	100.
14	3.2	00.0	6.5	00.0	3.2	3.2	9.7	3.2	9.7	12.9	12.9	6.5	00.0	6.5	9.7	12.9	00.0	100.
15	6.5	00.0	3.2	3.2	3.2	3.2	6.5	3.2	9.7	9.7	19.4	00.0	6.5	3.2	16.1	6.5	00.0	100.
16	6.5	00.0	3.2	9.7	00.0	00.0	9.7	3.2	16.1	9.7	12.9	3.2	00.0	6.5	9.7	9.7	00.0	100.
17	6.5	00.0	6.5	6.5	00.0	6.5	3.2	3.2	12.9	16.1	3.2	00.0	6.5	9.7	9.7	9.7	00.0	100.
18	6.5	00.0	6.5	00.0	3.2	6.5	3.2	9.7	12.9	12.9	3.2	3.2	3.2	3.2	16.1	9.7	00.0	100.
19	9.7	00.0	6.5	00.0	3.2	6.5	3.2	9.7	12.9	9.7	6.5	00.0	3.2	3.2	12.9	12.9	00.0	100.
20	6.5	3.2	00.0	3.2	3.2	6.5	3.2	6.5	16.1	9.7	6.5	00.0	6.5	00.0	12.9	16.1	00.0	100.
21	3.2	3.2	00.0	3.2	3.2	3.2	6.5	6.5	12.9	12.9	3.2	00.0	9.7	3.2	16.1	9.7	3.2	100.
22	3.2	3.2	00.0	3.2	00.0	6.5	6.5	3.2	16.1	12.9	00.0	6.5	6.5	6.5	12.9	9.7	3.2	100.
23	9.7	00.0	00.0	3.2	3.2	3.2	6.5	3.2	12.9	19.4	00.0	3.2	6.5	9.7	6.5	12.9	00.0	100.
24	6.5	00.0	00.0	00.0	3.2	6.5	6.5	3.2	12.9	12.9	3.2	6.5	6.5	6.5	9.7	16.1	00.0	100.
ALL	6.3	1.2	3.0	1.6	3.2	3.8	3.5	6.7	11.8	9.8	9.8	2.6	3.5	4.6	12.9	15.5	.3	100.

NUMBER OF OBS = 744

B48

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

FEBRUARY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	3.6	14.3	7.1	00.0	00.0	3.6	3.6	3.6	14.3	3.6	7.1	3.6	3.6	7.1	3.6	21.4	00.0	100.
2	10.7	00.0	14.3	00.0	00.0	00.0	3.6	7.1	14.3	7.1	00.0	3.6	10.7	00.0	00.0	28.6	00.0	100.
3	7.1	3.6	14.3	00.0	00.0	3.6	3.6	3.6	10.7	14.3	00.0	3.6	3.6	7.1	3.6	21.4	00.0	100.
4	17.9	00.0	3.6	10.7	00.0	7.1	00.0	3.6	14.3	10.7	3.6	00.0	3.6	7.1	3.6	14.3	00.0	100.
5	10.7	3.6	00.0	14.3	00.0	3.6	3.6	3.6	17.9	7.1	3.6	3.6	00.0	7.1	3.6	17.9	00.0	100.
6	10.7	7.1	3.6	7.1	00.0	7.1	3.6	00.0	14.3	7.1	7.1	3.6	00.0	10.7	3.6	14.3	00.0	100.
7	14.3	7.1	7.1	7.1	00.0	00.0	3.6	00.0	17.9	7.1	00.0	7.1	3.6	7.1	7.1	10.7	00.0	100.
8	14.3	7.1	00.0	3.6	7.1	00.0	00.0	3.6	10.7	14.3	00.0	3.6	3.6	10.7	3.6	17.9	00.0	100.
9	14.3	7.1	00.0	00.0	7.1	3.6	00.0	3.6	10.7	10.7	3.6	3.6	7.1	3.6	7.1	17.9	00.0	100.
10	10.7	3.6	3.6	3.6	00.0	7.1	00.0	00.0	17.9	10.7	00.0	10.7	3.6	3.6	3.6	21.4	00.0	100.
11	14.3	7.1	3.6	10.7	00.0	00.0	3.6	3.6	10.7	7.1	7.1	7.1	00.0	3.6	7.1	14.3	00.0	100.
12	17.9	10.7	3.6	7.1	00.0	00.0	3.6	00.0	14.3	3.6	14.3	3.6	00.0	00.0	10.7	10.7	00.0	100.
13	14.3	00.0	7.1	7.1	00.0	3.6	3.6	00.0	14.3	7.1	10.7	00.0	3.6	00.0	14.3	14.3	00.0	100.
14	14.3	3.6	3.6	3.6	7.1	00.0	3.6	00.0	3.6	17.9	7.1	7.1	3.6	00.0	14.3	10.7	00.0	100.
15	14.3	7.1	3.6	7.1	00.0	00.0	3.6	00.0	7.1	7.1	10.7	10.7	7.1	00.0	7.1	14.3	00.0	100.
16	17.9	3.6	3.6	7.1	00.0	3.6	00.0	00.0	7.1	10.7	10.7	7.1	3.6	7.1	3.6	14.3	00.0	100.
17	17.9	3.6	7.1	3.6	00.0	3.6	00.0	00.0	10.7	10.7	00.0	10.7	10.7	3.6	3.6	14.3	00.0	100.
18	10.7	3.6	7.1	7.1	00.0	3.6	00.0	00.0	17.9	7.1	7.1	3.6	7.1	00.0	3.6	21.4	00.0	100.
19	10.7	3.6	7.1	3.6	00.0	3.6	3.6	3.6	14.3	7.1	7.1	00.0	7.1	3.6	3.6	21.4	00.0	100.
20	14.3	3.6	10.7	00.0	3.6	00.0	3.6	3.6	17.9	10.7	00.0	00.0	3.6	3.6	7.1	17.9	00.0	100.
21	21.4	7.1	00.0	7.1	3.6	00.0	3.6	3.6	17.9	10.7	00.0	3.6	00.0	3.6	3.6	14.3	00.0	100.
22	14.3	7.1	00.0	7.1	7.1	00.0	3.6	7.1	17.9	3.6	3.6	3.6	00.0	00.0	7.1	17.9	00.0	100.
23	14.3	3.6	00.0	7.1	00.0	7.1	3.6	3.6	17.9	7.1	00.0	3.6	3.6	3.6	3.6	21.4	00.0	100.
24	7.1	10.7	3.6	00.0	00.0	3.6	3.6	7.1	14.3	3.6	00.0	10.7	3.6	3.6	3.6	25.0	00.0	100.
ALL	13.2	5.4	4.8	5.2	1.5	2.7	2.5	2.5	13.7	8.6	4.3	4.8	3.9	4.0	5.5	17.4	00.0	100.

NUMBER OF OBS = 672

B49

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

MARCH

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	16.1	3.2	00.0	3.2	9.7	19.4	3.2	9.7	3.2	3.2	3.2	00.0	3.2	00.0	9.7	12.9	00.0	100.
2	9.7	6.5	00.0	00.0	12.9	12.9	6.5	12.9	3.2	3.2	3.2	00.0	3.2	00.0	6.5	19.4	00.0	100.
3	9.7	00.0	6.5	00.0	9.7	9.7	6.5	12.9	3.2	6.5	3.2	00.0	00.0	3.2	16.1	12.9	00.0	100.
4	9.7	3.2	3.2	00.0	6.5	12.9	12.9	6.5	00.0	6.5	00.0	3.2	00.0	6.5	16.1	12.9	00.0	100.
5	3.3	3.3	3.3	00.0	3.3	20.0	6.7	6.7	3.3	6.7	00.0	3.3	00.0	3.3	16.7	20.0	00.0	100.
6	9.7	00.0	3.2	00.0	3.2	19.4	12.9	9.7	00.0	3.2	00.0	3.2	00.0	3.2	12.9	19.4	00.0	100.
7	9.7	6.5	00.0	00.0	9.7	12.9	12.9	9.7	00.0	3.2	00.0	00.0	3.2	6.5	9.7	16.1	00.0	100.
8	16.1	00.0	00.0	00.0	6.5	9.7	16.1	9.7	00.0	3.2	00.0	6.5	00.0	3.2	9.7	19.4	00.0	100.
9	9.7	3.2	00.0	00.0	3.2	9.7	19.4	6.5	3.2	3.2	3.2	00.0	00.0	6.5	6.5	25.8	00.0	100.
10	16.1	00.0	00.0	00.0	3.2	12.9	9.7	12.9	3.2	00.0	00.0	6.5	00.0	3.2	16.1	16.1	00.0	100.
11	12.9	00.0	00.0	00.0	00.0	19.4	9.7	12.9	00.0	3.2	00.0	6.5	00.0	3.2	12.9	19.4	00.0	100.
12	12.9	3.2	00.0	00.0	6.5	12.9	12.9	9.7	3.2	3.2	00.0	6.5	00.0	3.2	9.7	16.1	00.0	100.
13	16.1	3.2	00.0	00.0	6.5	16.1	9.7	6.5	3.2	00.0	6.5	6.5	00.0	3.2	9.7	12.9	00.0	100.
14	19.4	3.2	00.0	00.0	9.7	9.7	9.7	6.5	3.2	00.0	3.2	6.5	6.5	3.2	9.7	9.7	00.0	100.
15	16.1	3.2	00.0	00.0	12.9	9.7	6.5	6.5	3.2	00.0	3.2	12.9	00.0	3.2	6.5	16.1	00.0	100.
16	16.1	6.5	00.0	3.2	12.9	6.5	3.2	9.7	3.2	3.2	3.2	6.5	00.0	6.5	3.2	16.1	00.0	100.
17	16.1	3.2	3.2	00.0	12.9	9.7	6.5	12.9	00.0	00.0	6.5	00.0	3.2	6.5	3.2	16.1	00.0	100.
18	12.9	6.5	9.7	3.2	9.7	6.5	9.7	9.7	00.0	6.5	3.2	00.0	00.0	3.2	3.2	16.1	00.0	100.
19	12.9	6.5	6.5	6.5	12.9	6.5	9.7	6.5	00.0	3.2	3.2	00.0	6.5	3.2	6.5	9.7	00.0	100.
20	6.5	6.5	6.5	6.5	9.7	12.9	3.2	16.1	3.2	00.0	3.2	00.0	00.0	3.2	6.5	16.1	00.0	100.
21	6.5	9.7	6.5	12.9	6.5	9.7	6.5	12.9	00.0	00.0	3.2	3.2	3.2	00.0	6.5	12.9	00.0	100.
22	9.7	6.5	6.5	3.2	12.9	9.7	12.9	9.7	00.0	3.2	00.0	00.0	3.2	3.2	3.2	16.1	00.0	100.
23	9.7	3.2	3.2	9.7	9.7	9.7	12.9	9.7	00.0	00.0	3.2	00.0	3.2	00.0	12.9	12.9	00.0	100.
24	16.1	3.2	3.2	6.5	6.5	16.1	9.7	6.5	6.5	00.0	3.2	00.0	3.2	00.0	3.2	16.1	00.0	100.
ALL	12.2	3.8	2.6	2.3	8.2	12.2	9.6	9.7	1.9	2.6	2.3	3.0	1.6	3.2	9.0	15.9	00.0	100.

NUMBER OF OBS = 743

B50

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JAN-MAR

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.0	5.6	2.2	1.1	4.4	10.0	2.2	7.8	10.0	4.4	8.9	1.1	3.3	3.3	7.8	17.8	00.0	100.
2	10.0	2.2	5.6	00.0	7.8	4.4	3.3	10.0	8.9	5.6	6.7	1.1	5.6	2.2	6.7	20.0	00.0	100.
3	8.9	1.1	6.7	1.1	5.6	4.4	3.3	7.8	8.9	7.8	6.7	3.3	1.1	4.4	11.1	17.8	00.0	100.
4	11.1	1.1	3.3	3.3	4.4	6.7	4.4	6.7	7.8	7.8	4.4	3.3	1.1	5.6	14.4	14.4	00.0	100.
5	6.7	2.2	2.2	4.5	2.2	9.0	3.4	6.7	9.0	6.7	5.6	3.4	00.0	5.6	11.2	21.3	00.0	100.
6	8.9	2.2	3.3	2.2	3.3	8.9	5.6	6.7	8.9	3.3	6.7	3.3	00.0	4.4	13.3	18.9	00.0	100.
7	10.0	5.6	3.3	2.2	4.4	5.6	5.6	6.7	10.0	4.4	4.4	2.2	4.4	4.4	7.8	18.9	00.0	100.
8	10.0	3.3	2.2	1.1	5.6	4.4	5.6	7.8	6.7	7.8	4.4	3.3	2.2	7.8	7.8	20.0	00.0	100.
9	8.9	4.4	00.0	1.1	4.4	5.6	6.7	5.6	8.9	7.8	5.6	1.1	3.3	5.6	7.8	23.3	00.0	100.
10	12.2	1.1	2.2	1.1	2.2	6.7	5.6	6.7	12.2	5.6	3.3	5.6	3.3	3.3	11.1	17.8	00.0	100.
11	12.2	3.3	2.2	3.3	1.1	7.8	5.6	8.9	5.6	7.8	5.6	4.4	1.1	4.4	12.2	14.4	00.0	100.
12	11.1	5.6	3.3	2.2	2.2	7.8	5.6	5.6	7.8	7.8	8.9	5.6	00.0	1.1	12.2	13.3	00.0	100.
13	11.1	2.2	3.3	2.2	2.2	8.9	7.8	3.3	8.9	6.7	10.0	4.4	1.1	2.2	12.2	13.3	00.0	100.
14	12.2	2.2	3.3	1.1	6.7	4.4	7.8	3.3	5.6	10.0	7.8	6.7	3.3	3.3	11.1	11.1	00.0	100.
15	12.2	3.3	2.2	3.3	5.6	4.4	5.6	3.3	6.7	5.6	11.1	7.8	4.4	2.2	10.0	12.2	00.0	100.
16	13.3	3.3	2.2	6.7	4.4	3.3	4.4	4.4	8.9	7.8	8.9	5.6	1.1	6.7	5.6	13.3	00.0	100.
17	13.3	2.2	5.6	3.3	4.4	6.7	3.3	5.6	7.8	8.9	3.3	3.3	6.7	6.7	5.6	13.3	00.0	100.
18	10.0	3.3	7.8	3.3	4.4	5.6	4.4	6.7	10.0	8.9	4.4	2.2	3.3	2.2	7.8	15.6	00.0	100.
19	11.1	3.3	6.7	3.3	5.6	5.6	5.6	6.7	8.9	6.7	5.6	00.0	5.6	3.3	7.8	14.4	00.0	100.
20	8.9	4.4	5.6	3.3	5.6	6.7	3.3	8.9	12.2	6.7	3.3	00.0	3.3	2.2	8.9	16.7	00.0	100.
21	10.0	6.7	2.2	7.8	4.4	4.4	5.6	7.8	10.0	7.8	2.2	2.2	4.4	2.2	8.9	12.2	1.1	100.
22	8.9	5.6	2.2	4.4	6.7	5.6	7.8	6.7	11.1	6.7	1.1	3.3	3.3	3.3	7.8	14.4	1.1	100.
23	11.1	2.2	1.1	6.7	4.4	6.7	7.8	5.6	10.0	8.9	1.1	2.2	4.4	4.4	7.8	15.6	00.0	100.
24	10.0	4.4	2.2	2.2	3.3	8.9	6.7	5.6	11.1	5.6	2.2	5.6	4.4	3.3	5.6	18.9	00.0	100.
ALL	10.5	3.4	3.4	3.0	4.4	6.3	5.3	6.4	9.0	6.9	5.5	3.4	3.0	3.9	9.3	16.2	.1	100.

NUMBER OF OBS = 2159

BS1

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

APRIL

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	16.7	00.0	6.7	10.0	6.7	3.3	6.7	10.0	13.3	00.0	3.3	3.3	3.3	00.0	3.3	13.3	00.0	100.
2	16.7	3.3	6.7	6.7	6.7	3.3	6.7	10.0	10.0	3.3	3.3	00.0	3.3	3.3	00.0	16.7	00.0	100.
3	20.0	00.0	3.3	6.7	3.3	6.7	6.7	6.7	10.0	6.7	00.0	6.7	00.0	3.3	6.7	13.3	00.0	100.
4	10.0	10.0	3.3	3.3	3.3	6.7	6.7	6.7	10.0	00.0	6.7	00.0	3.3	6.7	10.0	13.3	00.0	100.
5	16.7	00.0	10.0	00.0	3.3	6.7	6.7	6.7	10.0	6.7	00.0	00.0	00.0	3.3	13.3	16.7	00.0	100.
6	16.7	3.3	6.7	00.0	6.7	6.7	6.7	6.7	6.7	10.0	00.0	00.0	00.0	6.7	6.7	16.7	00.0	100.
7	16.7	6.7	3.3	00.0	3.3	6.7	13.3	3.3	10.0	6.7	00.0	00.0	00.0	6.7	6.7	16.7	00.0	100.
8	13.3	10.0	6.7	00.0	00.0	3.3	10.0	6.7	13.3	6.7	3.3	00.0	6.7	00.0	3.3	16.7	00.0	100.
9	6.7	13.3	6.7	6.7	3.3	00.0	13.3	6.7	6.7	10.0	3.3	00.0	3.3	00.0	3.3	16.7	00.0	100.
10	10.0	10.0	3.3	6.7	13.3	00.0	6.7	6.7	6.7	10.0	3.3	00.0	6.7	00.0	6.7	10.0	00.0	100.
11	16.7	00.0	10.0	6.7	10.0	00.0	10.0	6.7	3.3	10.0	00.0	6.7	6.7	00.0	6.7	6.7	00.0	100.
12	16.7	6.7	3.3	3.3	10.0	00.0	6.7	6.7	3.3	16.7	00.0	3.3	3.3	6.7	3.3	10.0	00.0	100.
13	23.3	00.0	6.7	00.0	10.0	00.0	6.7	10.0	00.0	10.0	3.3	00.0	6.7	3.3	6.7	13.3	00.0	100.
14	20.0	00.0	3.3	6.7	3.3	00.0	10.0	10.0	10.0	3.3	00.0	00.0	6.7	3.3	10.0	13.3	00.0	100.
15	16.7	6.7	6.7	3.3	3.3	00.0	13.3	6.7	6.7	6.7	00.0	00.0	00.0	6.7	16.7	6.7	00.0	100.
16	20.0	3.3	00.0	10.0	3.3	3.3	10.0	10.0	10.0	3.3	00.0	00.0	00.0	3.3	10.0	13.3	00.0	100.
17	13.3	3.3	6.7	6.7	6.7	3.3	6.7	10.0	6.7	10.0	00.0	00.0	00.0	00.0	10.0	16.7	00.0	100.
18	3.3	3.3	3.3	6.7	6.7	10.0	3.3	13.3	6.7	3.3	00.0	6.7	00.0	00.0	3.3	30.0	00.0	100.
19	6.7	3.3	00.0	10.0	10.0	10.0	00.0	20.0	3.3	3.3	00.0	00.0	6.7	00.0	3.3	23.3	00.0	100.
20	10.0	3.3	00.0	10.0	6.7	13.3	3.3	16.7	3.3	3.3	00.0	00.0	6.7	00.0	10.0	13.3	00.0	100.
21	10.0	6.7	3.3	6.7	6.7	10.0	6.7	13.3	6.7	3.3	00.0	3.3	3.3	00.0	6.7	13.3	00.0	100.
22	13.3	3.3	6.7	00.0	16.7	6.7	6.7	13.3	6.7	3.3	00.0	3.3	3.3	00.0	6.7	10.0	00.0	100.
23	10.0	3.3	6.7	3.3	16.7	6.7	6.7	13.3	6.7	6.7	00.0	00.0	3.3	00.0	3.3	13.3	00.0	100.
24	6.7	6.7	6.7	13.3	6.7	3.3	6.7	13.3	10.0	3.3	3.3	3.3	00.0	00.0	00.0	16.7	00.0	100.
ALL	13.8	4.4	5.0	5.3	6.9	4.6	7.5	9.7	7.5	6.1	1.3	1.5	3.1	2.2	6.5	14.6	00.0	100.

NUMBER OF OBS = 720

BS2

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

MAY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	6.5	9.7	00.0	9.7	6.5	3.2	9.7	12.9	16.1	00.0	9.7	3.2	00.0	3.2	00.0	9.7	00.0	100.
2	9.7	00.0	6.5	9.7	3.2	3.2	6.5	16.1	6.5	9.7	6.5	6.5	00.0	00.0	6.5	9.7	00.0	100.
3	9.7	3.2	3.2	3.2	9.7	00.0	9.7	9.7	9.7	9.7	3.2	9.7	3.2	00.0	6.5	9.7	00.0	100.
4	12.9	00.0	9.7	3.2	3.2	6.5	9.7	3.2	12.9	12.9	00.0	6.5	6.5	00.0	9.7	3.2	00.0	100.
5	12.9	3.2	6.5	00.0	00.0	6.5	9.7	12.9	12.9	3.2	3.2	9.7	9.7	3.2	3.2	3.2	00.0	100.
6	9.7	6.5	6.5	3.2	00.0	6.5	12.9	9.7	3.2	9.7	00.0	12.9	9.7	3.2	6.5	00.0	00.0	100.
7	3.2	6.5	6.5	6.5	6.5	00.0	16.1	12.9	3.2	6.5	3.2	6.5	6.5	9.7	6.5	00.0	00.0	100.
8	3.2	6.5	3.2	6.5	3.2	12.9	6.5	9.7	6.5	9.7	3.2	6.5	6.5	3.2	9.7	3.2	00.0	100.
9	9.7	6.5	3.2	3.2	3.2	3.2	12.9	3.2	12.9	9.7	6.5	6.5	3.2	6.5	3.2	6.5	00.0	100.
10	9.7	00.0	6.5	3.2	3.2	6.5	16.1	6.5	6.5	6.5	3.2	9.7	3.2	9.7	6.5	3.2	00.0	100.
11	6.5	6.5	9.7	00.0	3.2	6.5	9.7	6.5	6.5	6.5	6.5	9.7	3.2	9.7	00.0	9.7	00.0	100.
12	00.0	19.4	6.5	6.5	00.0	6.5	6.5	12.9	12.9	00.0	6.5	9.7	00.0	9.7	00.0	3.2	00.0	100.
13	9.7	6.5	3.2	12.9	3.2	3.2	9.7	6.5	6.5	3.2	9.7	3.2	6.5	6.5	3.2	6.5	00.0	100.
14	12.9	9.7	00.0	00.0	6.5	16.1	6.5	00.0	19.4	6.5	00.0	6.5	6.5	3.2	3.2	3.2	00.0	100.
15	12.9	9.7	6.5	00.0	3.2	9.7	9.7	3.2	12.9	9.7	3.2	6.5	6.5	3.2	3.2	00.0	00.0	100.
16	6.5	9.7	3.2	3.2	00.0	3.2	16.1	9.7	3.2	3.2	3.2	3.2	12.9	3.2	9.7	9.7	00.0	100.
17	6.5	6.5	00.0	3.2	00.0	3.2	9.7	16.1	6.5	3.2	6.5	00.0	9.7	3.2	9.7	16.1	00.0	100.
18	12.9	9.7	3.2	6.5	00.0	6.5	3.2	12.9	3.2	3.2	3.2	6.5	9.7	6.5	3.2	9.7	00.0	100.
19	13.3	6.7	13.3	3.3	3.3	6.7	3.3	3.3	10.0	3.3	6.7	00.0	6.7	6.7	3.3	10.0	00.0	100.
20	16.1	9.7	9.7	3.2	3.2	6.5	9.7	6.5	9.7	3.2	6.5	00.0	6.5	3.2	00.0	6.5	00.0	100.
21	9.7	6.5	12.9	3.2	6.5	3.2	6.5	12.9	9.7	3.2	3.2	9.7	00.0	3.2	6.5	3.2	00.0	100.
22	6.7	6.7	16.7	3.3	3.3	3.3	10.0	13.3	6.7	3.3	3.3	10.0	00.0	3.3	00.0	10.0	00.0	100.
23	9.7	3.2	3.2	12.9	3.2	3.2	3.2	12.9	9.7	6.5	3.2	9.7	3.2	6.5	6.5	3.2	00.0	100.
24	6.5	3.2	3.2	6.5	9.7	9.7	6.5	9.7	6.5	3.2	3.2	9.7	3.2	6.5	6.5	6.5	00.0	100.
ALL	9.0	6.5	5.9	4.7	3.5	5.7	9.2	9.3	8.9	5.7	4.3	6.7	5.1	4.7	4.7	6.1	00.0	100.

NUMBER OF OBS = 742

B53

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JUNE

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	6.7	00.0	00.0	3.3	00.0	6.7	13.3	6.7	26.7	16.7	3.3	3.3	00.0	3.3	6.7	3.3	00.0	100.
2	3.3	00.0	3.3	00.0	3.3	3.3	16.7	3.3	23.3	20.0	3.3	3.3	00.0	3.3	3.3	10.0	00.0	100.
3	6.7	00.0	00.0	3.3	00.0	13.3	6.7	6.7	16.7	23.3	3.3	3.3	00.0	3.3	10.0	3.3	00.0	100.
4	16.7	00.0	00.0	00.0	00.0	6.7	10.0	3.3	16.7	16.7	6.7	10.0	3.3	3.3	3.3	3.3	00.0	100.
5	3.3	6.7	3.3	00.0	6.7	3.3	00.0	6.7	23.3	13.3	10.0	6.7	6.7	00.0	6.7	3.3	00.0	100.
6	6.7	00.0	6.7	3.3	6.7	6.7	3.3	10.0	30.0	10.0	00.0	6.7	3.3	3.3	00.0	3.3	00.0	100.
7	3.3	00.0	10.0	00.0	00.0	6.7	6.7	10.0	26.7	13.3	10.0	3.3	3.3	00.0	3.3	3.3	00.0	100.
8	6.7	00.0	00.0	3.3	00.0	3.3	13.3	6.7	26.7	10.0	3.3	13.3	00.0	3.3	3.3	6.7	00.0	100.
9	00.0	00.0	00.0	10.0	3.3	6.7	10.0	10.0	00.0	26.7	6.7	6.7	6.7	3.3	6.7	3.3	00.0	100.
10	3.3	00.0	00.0	10.0	10.0	00.0	10.0	3.3	10.0	26.7	6.7	3.3	3.3	6.7	6.7	00.0	00.0	100.
11	3.3	00.0	00.0	3.3	10.0	3.3	6.7	6.7	10.0	33.3	00.0	3.3	3.3	6.7	6.7	3.3	00.0	100.
12	3.3	00.0	3.3	00.0	6.7	6.7	10.0	6.7	26.7	16.7	00.0	00.0	3.3	3.3	3.3	10.0	00.0	100.
13	00.0	00.0	00.0	3.3	6.7	6.7	10.0	6.7	26.7	16.7	00.0	00.0	3.3	3.3	10.0	6.7	00.0	100.
14	3.3	00.0	00.0	3.3	3.3	13.3	6.7	10.0	26.7	13.3	00.0	00.0	00.0	3.3	3.3	13.3	00.0	100.
15	3.3	00.0	3.3	3.3	3.3	13.3	10.0	3.3	30.0	13.3	00.0	00.0	00.0	3.3	3.3	10.0	00.0	100.
16	3.3	00.0	3.3	00.0	3.3	10.0	13.3	13.3	26.7	6.7	00.0	00.0	00.0	6.7	00.0	13.3	00.0	100.
17	3.3	3.3	3.3	00.0	00.0	13.3	10.0	13.3	23.3	13.3	00.0	00.0	00.0	00.0	6.7	10.0	00.0	100.
18	6.7	3.3	00.0	00.0	00.0	10.0	13.3	16.7	23.3	6.7	3.3	00.0	00.0	6.7	6.7	3.3	00.0	100.
19	00.0	00.0	00.0	00.0	3.3	6.7	23.3	13.3	20.0	3.3	6.7	00.0	00.0	6.7	6.7	10.0	00.0	100.
20	6.7	00.0	3.3	00.0	3.3	6.7	23.3	16.7	13.3	6.7	00.0	6.7	00.0	00.0	6.7	6.7	00.0	100.
21	6.7	00.0	00.0	00.0	6.7	10.0	16.7	16.7	23.3	00.0	3.3	3.3	00.0	3.3	00.0	10.0	00.0	100.
22	10.0	3.3	00.0	00.0	6.7	13.3	13.3	10.0	26.7	3.3	00.0	3.3	00.0	6.7	3.3	00.0	00.0	100.
23	3.3	00.0	3.3	00.0	6.7	6.7	13.3	10.0	33.3	3.3	00.0	3.3	3.3	6.7	3.3	3.3	00.0	100.
24	6.7	00.0	00.0	6.7	3.3	3.3	10.0	16.7	26.7	13.3	00.0	00.0	3.3	3.3	6.7	00.0	00.0	100.
ALL	4.9	.7	1.8	2.2	3.9	7.5	11.2	9.4	22.4	13.6	2.8	3.3	1.8	3.8	4.9	5.8	00.0	100.

NUMBER OF OBS = 720

BS4

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

APR-JUN

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	9.9	3.3	2.2	7.7	4.4	4.4	9.9	9.9	18.7	5.5	5.5	3.3	1.1	2.2	3.3	8.8	00.0	100.
2	9.9	1.1	5.5	5.5	4.4	3.3	9.9	9.9	13.2	11.0	4.4	3.3	1.1	2.2	3.3	12.1	00.0	100.
3	12.1	1.1	2.2	4.4	4.4	6.6	7.7	7.7	12.1	13.2	2.2	6.6	1.1	2.2	7.7	8.8	00.0	100.
4	13.2	3.3	4.4	2.2	2.2	6.6	8.8	4.4	13.2	9.9	4.4	5.5	4.4	3.3	7.7	6.6	00.0	100.
5	11.0	3.3	6.6	00.0	3.3	5.5	5.5	8.8	15.4	7.7	4.4	5.5	5.5	2.2	7.7	7.7	00.0	100.
6	11.0	3.3	6.6	2.2	4.4	6.6	7.7	8.8	13.2	9.9	00.0	6.6	4.4	4.4	4.4	6.6	00.0	100.
7	7.7	4.4	6.6	2.2	3.3	4.4	12.1	8.8	13.2	8.8	4.4	3.3	3.3	5.5	5.5	6.6	00.0	100.
8	7.7	5.5	3.3	3.3	1.1	6.6	9.9	7.7	15.4	8.8	3.3	6.6	4.4	2.2	5.5	8.8	00.0	100.
9	5.5	6.6	3.3	6.6	3.3	3.3	12.1	6.6	6.6	15.4	5.5	4.4	4.4	3.3	4.4	8.8	00.0	100.
10	7.7	3.3	3.3	6.6	8.8	2.2	11.0	5.5	7.7	14.3	4.4	4.4	4.4	5.5	6.6	4.4	00.0	100.
11	8.8	2.2	6.6	3.3	7.7	3.3	8.8	6.6	6.6	16.5	2.2	6.6	4.4	5.5	4.4	6.6	00.0	100.
12	6.6	8.8	4.4	3.3	5.5	4.4	7.7	8.8	14.3	11.0	2.2	4.4	2.2	6.6	2.2	7.7	00.0	100.
13	11.0	2.2	3.3	5.5	6.6	3.3	8.8	7.7	11.0	9.9	4.4	1.1	5.5	4.4	6.6	8.8	00.0	100.
14	12.1	3.3	1.1	3.3	4.4	9.9	7.7	6.6	18.7	7.7	00.0	2.2	4.4	3.3	5.5	9.9	00.0	100.
15	11.0	5.5	5.5	2.2	3.3	7.7	11.0	4.4	16.5	9.9	1.1	2.2	2.2	4.4	7.7	5.5	00.0	100.
16	9.9	4.4	2.2	4.4	2.2	5.5	13.2	11.0	13.2	4.4	1.1	1.1	4.4	4.4	6.6	12.1	00.0	100.
17	7.7	4.4	3.3	3.3	2.2	6.6	8.8	13.2	12.1	8.8	2.2	00.0	3.3	1.1	8.8	14.3	00.0	100.
18	7.7	5.5	2.2	4.4	2.2	8.8	6.6	14.3	11.0	4.4	2.2	4.4	3.3	4.4	4.4	14.3	00.0	100.
19	6.7	3.3	4.4	4.4	5.6	7.8	8.9	12.2	11.1	3.3	4.4	00.0	4.4	4.4	4.4	14.4	00.0	100.
20	11.0	4.4	4.4	4.4	4.4	8.8	12.1	13.2	8.8	4.4	2.2	2.2	4.4	1.1	5.5	8.8	00.0	100.
21	8.8	4.4	5.5	3.3	6.6	7.7	9.9	14.3	13.2	2.2	2.2	5.5	1.1	2.2	4.4	8.8	00.0	100.
22	10.0	4.4	7.8	1.1	8.9	7.8	10.0	12.2	13.3	3.3	1.1	5.6	1.1	3.3	3.3	6.7	00.0	100.
23	7.7	2.2	4.4	5.5	8.8	5.5	7.7	12.1	16.5	5.5	1.1	4.4	3.3	4.4	4.4	6.6	00.0	100.
24	6.6	3.3	3.3	8.8	6.6	5.5	7.7	13.2	14.3	6.6	2.2	4.4	2.2	3.3	4.4	7.7	00.0	100.
ALL	9.2	3.9	4.3	4.1	4.8	5.9	9.3	9.5	12.9	8.4	2.8	3.9	3.3	3.6	5.4	8.8	00.0	100.

NUMBER OF OBS = 2182

BSS

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JAN-JUN

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	9.9	4.4	2.2	4.4	4.4	7.2	6.1	8.8	14.4	5.0	7.2	2.2	2.2	2.8	5.5	13.3	00.0	100.
2	9.9	1.7	5.5	2.8	6.1	3.9	6.6	9.9	11.0	8.3	5.5	2.2	3.3	2.2	5.0	16.0	00.0	100.
3	10.5	1.1	4.4	2.8	5.0	5.5	5.5	7.7	10.5	10.5	4.4	5.0	1.1	3.3	9.4	13.3	00.0	100.
4	12.2	2.2	3.9	2.8	3.3	6.6	6.6	5.5	10.5	8.8	4.4	4.4	2.8	4.4	11.0	10.5	00.0	100.
5	8.9	2.8	4.4	2.2	2.8	7.2	4.4	7.8	12.2	7.2	5.0	4.4	2.8	3.9	9.4	14.4	00.0	100.
6	9.9	2.8	5.0	2.2	3.9	7.7	6.6	7.7	11.0	6.6	3.3	5.0	2.2	4.4	8.8	12.7	00.0	100.
7	8.8	5.0	5.0	2.2	3.9	5.0	8.8	7.7	11.6	6.6	4.4	2.8	3.9	5.0	6.6	12.7	00.0	100.
8	8.8	4.4	2.8	2.2	3.3	5.5	7.7	7.7	11.0	8.3	3.9	5.0	3.3	5.0	6.6	14.4	00.0	100.
9	7.2	5.5	1.7	3.9	3.9	4.4	9.4	6.1	7.7	11.6	5.5	2.8	3.9	4.4	6.1	16.0	00.0	100.
10	9.9	2.2	2.8	3.9	5.5	4.4	8.3	6.1	9.9	9.9	3.9	5.0	3.9	4.4	8.8	11.0	00.0	100.
11	10.5	2.8	4.4	3.3	4.4	5.5	7.2	7.7	6.1	12.2	3.9	5.5	2.8	5.0	8.3	10.5	00.0	100.
12	8.8	7.2	3.9	2.8	3.9	6.1	6.6	7.2	11.0	9.4	5.5	5.0	1.1	3.9	7.2	10.5	00.0	100.
13	11.0	2.2	3.3	3.9	4.4	6.1	8.3	5.5	9.9	8.3	7.2	2.8	3.3	3.3	9.4	11.0	00.0	100.
14	12.2	2.8	2.2	2.2	5.5	7.2	7.7	5.0	12.2	8.8	3.9	4.4	3.9	3.3	8.3	10.5	00.0	100.
15	11.6	4.4	3.9	2.8	4.4	6.1	8.3	3.9	11.6	7.7	6.1	5.0	3.3	3.3	8.8	8.8	00.0	100.
16	11.6	3.9	2.2	5.5	3.3	4.4	8.8	7.7	11.0	6.1	5.0	3.3	2.8	5.5	6.1	12.7	00.0	100.
17	10.5	3.3	4.4	3.3	3.3	6.6	6.1	9.4	9.9	8.8	2.8	1.7	5.0	3.9	7.2	13.8	00.0	100.
18	8.8	4.4	5.0	3.9	3.3	7.2	5.5	10.5	10.5	6.6	3.3	3.3	3.3	3.3	6.1	14.9	00.0	100.
19	8.9	3.3	5.6	3.9	5.6	6.7	7.2	9.4	10.0	5.0	5.0	00.0	5.0	3.9	6.1	14.4	00.0	100.
20	9.9	4.4	5.0	3.9	5.0	7.7	7.7	11.0	10.5	5.5	2.8	1.1	3.9	1.7	7.2	12.7	00.0	100.
21	9.4	5.5	3.9	5.5	5.5	6.1	7.7	11.0	11.6	5.0	2.2	3.9	2.8	2.2	6.6	10.5	.6	100.
22	9.4	5.0	5.0	2.8	7.8	6.7	8.9	9.4	12.2	5.0	1.1	4.4	2.2	3.3	5.6	10.6	.6	100.
23	9.4	2.2	2.8	6.1	6.6	6.1	7.7	8.8	13.3	7.2	1.1	3.3	3.9	4.4	6.1	11.0	00.0	100.
24	8.3	3.9	2.8	5.5	5.0	7.2	7.2	9.4	12.7	6.1	2.2	5.0	3.3	3.3	5.0	13.3	00.0	100.
ALL	9.9	3.6	3.8	3.5	4.6	6.1	7.3	8.0	10.9	7.7	4.1	3.6	3.2	3.8	7.3	12.5	.0	100.

NUMBER OF OBS = 4341

B56

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JULY

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	9.7	6.5	12.9	6.5	6.5	3.2	6.5	12.9	12.9	6.5	00.0	6.5	00.0	00.0	3.2	6.5	00.0	100.
2	12.9	00.0	9.7	12.9	3.2	6.5	16.1	9.7	9.7	00.0	3.2	6.5	3.2	00.0	00.0	6.5	00.0	100.
3	12.9	3.2	12.9	3.2	9.7	3.2	9.7	16.1	9.7	3.2	00.0	3.2	00.0	6.5	00.0	6.5	00.0	100.
4	16.1	6.5	3.2	9.7	6.5	3.2	12.9	16.1	3.2	9.7	00.0	00.0	3.2	00.0	00.0	9.7	00.0	100.
5	16.1	3.2	6.5	6.5	3.2	6.5	12.9	16.1	3.2	12.9	00.0	3.2	00.0	3.2	3.2	3.2	00.0	100.
6	9.7	16.1	6.5	00.0	3.2	9.7	9.7	12.9	6.5	12.9	00.0	3.2	00.0	3.2	3.2	3.2	00.0	100.
7	9.7	12.9	3.2	9.7	00.0	3.2	9.7	12.9	9.7	6.5	3.2	00.0	3.2	3.2	3.2	9.7	00.0	100.
8	12.9	3.2	3.2	9.7	6.5	3.2	12.9	12.9	6.5	3.2	6.5	6.5	00.0	3.2	3.2	6.5	00.0	100.
9	9.7	9.7	3.2	6.5	3.2	6.5	12.9	12.9	6.5	3.2	9.7	3.2	3.2	3.2	00.0	6.5	00.0	100.
10	12.9	9.7	00.0	9.7	3.2	12.9	6.5	9.7	9.7	3.2	00.0	9.7	3.2	6.5	00.0	3.2	00.0	100.
11	19.4	9.7	9.7	3.2	3.2	9.7	3.2	19.4	3.2	00.0	6.5	3.2	00.0	3.2	6.5	00.0	00.0	100.
12	12.9	19.4	6.5	6.5	3.2	3.2	3.2	16.1	6.5	00.0	3.2	9.7	00.0	3.2	3.2	3.2	00.0	100.
13	19.4	22.6	6.5	00.0	3.2	00.0	6.5	22.6	3.2	00.0	3.2	3.2	3.2	00.0	6.5	00.0	00.0	100.
14	22.6	19.4	6.5	3.2	00.0	00.0	12.9	9.7	6.5	00.0	6.5	3.2	00.0	3.2	3.2	3.2	00.0	100.
15	12.9	16.1	6.5	3.2	6.5	3.2	3.2	22.6	3.2	00.0	3.2	3.2	00.0	00.0	12.9	3.2	00.0	100.
16	16.1	12.9	6.5	3.2	9.7	3.2	16.1	6.5	3.2	3.2	00.0	00.0	00.0	3.2	6.5	9.7	00.0	100.
17	22.6	12.9	3.2	6.5	6.5	3.2	16.1	6.5	3.2	3.2	3.2	00.0	00.0	00.0	12.9	00.0	00.0	100.
18	12.9	25.8	00.0	6.5	6.5	6.5	16.1	6.5	00.0	00.0	00.0	3.2	00.0	3.2	9.7	3.2	00.0	100.
19	6.5	16.1	9.7	9.7	3.2	6.5	22.6	3.2	00.0	00.0	3.2	00.0	00.0	00.0	9.7	9.7	00.0	100.
20	6.5	6.5	9.7	19.4	3.2	3.2	16.1	9.7	00.0	00.0	00.0	6.5	00.0	00.0	3.2	16.1	00.0	100.
21	9.7	12.9	12.9	12.9	00.0	9.7	12.9	12.9	00.0	00.0	3.2	00.0	3.2	00.0	3.2	6.5	00.0	100.
22	3.2	19.4	12.9	9.7	3.2	3.2	9.7	22.6	00.0	00.0	00.0	00.0	3.2	3.2	3.2	6.5	00.0	100.
23	9.7	12.9	9.7	16.1	3.2	3.2	9.7	9.7	9.7	00.0	00.0	00.0	00.0	3.2	6.5	6.5	00.0	100.
24	6.5	9.7	9.7	9.7	00.0	12.9	3.2	12.9	6.5	3.2	3.2	00.0	00.0	3.2	9.7	9.7	00.0	100.
ALL	12.6	12.0	7.1	7.7	4.0	5.2	10.9	13.0	5.1	3.0	2.4	3.1	1.1	2.3	4.7	5.8	00.0	100.

NUMBER OF OBS = 744

BS7

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

AUGUST

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	19.4	3.2	3.2	00.0	3.2	3.2	9.7	6.5	16.1	16.1	6.5	00.0	3.2	00.0	00.0	9.7	00.0	100.
2	16.1	6.5	3.2	00.0	00.0	6.5	6.5	9.7	16.1	12.9	6.5	3.2	00.0	00.0	3.2	9.7	00.0	100.
3	9.7	3.2	6.5	3.2	00.0	3.2	12.9	6.5	12.9	19.4	6.5	00.0	00.0	00.0	6.5	9.7	00.0	100.
4	6.5	6.5	3.2	3.2	3.2	12.9	9.7	6.5	6.5	9.7	16.1	00.0	00.0	3.2	00.0	12.9	00.0	100.
5	9.7	6.5	6.5	00.0	3.2	3.2	9.7	12.9	12.9	6.5	6.5	6.5	00.0	6.5	3.2	6.5	00.0	100.
6	6.5	3.2	6.5	3.2	00.0	6.5	3.2	12.9	16.1	6.5	3.2	12.9	00.0	3.2	00.0	16.1	00.0	100.
7	9.7	6.5	6.5	3.2	00.0	3.2	12.9	3.2	16.1	9.7	6.5	3.2	3.2	3.2	00.0	12.9	00.0	100.
8	6.5	12.9	3.2	00.0	00.0	3.2	16.1	3.2	16.1	6.5	3.2	6.5	00.0	6.5	3.2	9.7	3.2	100.
9	6.5	9.7	3.2	3.2	00.0	6.5	16.1	9.7	12.9	3.2	12.9	3.2	00.0	3.2	3.2	6.5	00.0	100.
10	6.5	9.7	3.2	3.2	6.5	3.2	12.9	12.9	6.5	16.1	6.5	00.0	3.2	3.2	3.2	3.2	00.0	100.
11	12.9	3.2	6.5	3.2	00.0	9.7	9.7	6.5	16.1	12.9	6.5	3.2	3.2	3.2	3.2	00.0	00.0	100.
12	12.9	6.5	3.2	3.2	3.2	6.5	6.5	6.5	16.1	9.7	3.2	3.2	6.5	3.2	9.7	00.0	00.0	100.
13	9.7	00.0	12.9	3.2	3.2	3.2	9.7	6.5	19.4	6.5	6.5	3.2	3.2	3.2	00.0	9.7	00.0	100.
14	9.7	00.0	16.1	00.0	3.2	3.2	6.5	9.7	22.6	3.2	6.5	6.5	00.0	00.0	3.2	9.7	00.0	100.
15	9.7	6.5	6.5	00.0	3.2	3.2	9.7	9.7	12.9	6.5	9.7	6.5	00.0	3.2	9.7	3.2	00.0	100.
16	12.9	00.0	6.5	3.2	3.2	3.2	6.5	12.9	9.7	9.7	6.5	3.2	3.2	3.2	9.7	6.5	00.0	100.
17	12.9	6.5	9.7	9.7	00.0	3.2	9.7	9.7	9.7	9.7	3.2	3.2	00.0	3.2	00.0	9.7	00.0	100.
18	9.7	6.5	3.2	12.9	00.0	00.0	9.7	9.7	19.4	6.5	00.0	6.5	00.0	3.2	00.0	12.9	00.0	100.
19	12.9	3.2	9.7	3.2	9.7	00.0	9.7	16.1	12.9	3.2	00.0	3.2	3.2	00.0	3.2	9.7	00.0	100.
20	9.7	9.7	3.2	00.0	12.9	6.5	12.9	6.5	19.4	3.2	00.0	6.5	00.0	00.0	00.0	9.7	00.0	100.
21	9.7	12.9	00.0	00.0	9.7	12.9	6.5	6.5	22.6	00.0	3.2	6.5	00.0	00.0	00.0	9.7	00.0	100.
22	9.7	12.9	00.0	6.5	3.2	3.2	6.5	9.7	22.6	3.2	00.0	3.2	9.7	00.0	00.0	9.7	00.0	100.
23	9.7	12.9	3.2	3.2	00.0	6.5	9.7	6.5	22.6	00.0	3.2	6.5	00.0	3.2	3.2	9.7	00.0	100.
24	22.6	3.2	3.2	3.2	3.2	6.5	6.5	6.5	19.4	6.5	6.5	3.2	00.0	00.0	00.0	9.7	00.0	100.
ALL	10.9	6.3	5.4	3.0	3.0	5.0	9.5	8.6	15.7	7.8	5.4	4.2	1.6	2.3	2.7	8.6	.1	100.

NUMBER OF OBS = 744

B58

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

SEPTEMBER

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.0	3.3	6.7	6.7	00.0	3.3	3.3	20.0	30.0	6.7	00.0	3.3	00.0	00.0	3.3	3.3	00.0	100.
2	6.7	3.3	10.0	10.0	3.3	00.0	00.0	16.7	26.7	16.7	00.0	00.0	00.0	3.3	3.3	00.0	00.0	100.
3	10.0	3.3	6.7	6.7	3.3	3.3	00.0	13.3	26.7	16.7	00.0	3.3	00.0	00.0	6.7	00.0	00.0	100.
4	10.0	3.3	00.0	10.0	00.0	6.7	3.3	6.7	36.7	10.0	6.7	00.0	00.0	00.0	6.7	00.0	00.0	100.
5	6.7	6.7	6.7	3.3	3.3	3.3	6.7	10.0	33.3	3.3	6.7	3.3	00.0	00.0	6.7	00.0	00.0	100.
6	10.0	3.3	3.3	6.7	3.3	3.3	3.3	13.3	33.3	00.0	10.0	3.3	00.0	00.0	6.7	00.0	00.0	100.
7	3.3	10.0	3.3	00.0	3.3	10.0	3.3	16.7	30.0	6.7	3.3	3.3	00.0	00.0	6.7	00.0	00.0	100.
8	00.0	10.0	6.7	3.3	00.0	10.0	3.3	13.3	33.3	10.0	00.0	00.0	3.3	00.0	3.3	3.3	00.0	100.
9	3.3	6.7	6.7	00.0	3.3	6.7	3.3	10.0	33.3	6.7	6.7	6.7	00.0	00.0	00.0	6.7	00.0	100.
10	3.3	3.3	10.0	00.0	3.3	6.7	3.3	10.0	23.3	16.7	6.7	3.3	00.0	00.0	6.7	3.3	00.0	100.
11	00.0	3.3	16.7	3.3	00.0	3.3	3.3	6.7	36.7	13.3	3.3	00.0	00.0	00.0	00.0	10.0	00.0	100.
12	00.0	3.3	13.3	6.7	00.0	3.3	3.3	3.3	40.0	13.3	3.3	00.0	00.0	00.0	00.0	10.0	00.0	100.
13	3.4	10.3	3.4	6.9	00.0	6.9	3.4	3.4	34.5	10.3	6.9	3.4	00.0	00.0	00.0	6.9	00.0	100.
14	00.0	10.3	10.3	3.4	00.0	6.9	00.0	13.8	20.7	17.2	6.9	00.0	00.0	00.0	00.0	10.3	00.0	100.
15	3.4	3.4	17.2	3.4	6.9	3.4	3.4	10.3	17.2	20.7	3.4	00.0	00.0	00.0	00.0	6.9	00.0	100.
16	00.0	00.0	16.7	6.7	3.3	3.3	3.3	13.3	23.3	16.7	3.3	00.0	00.0	00.0	3.3	6.7	00.0	100.
17	00.0	6.7	10.0	10.0	00.0	00.0	10.0	10.0	26.7	13.3	3.3	00.0	00.0	00.0	00.0	10.0	00.0	100.
18	00.0	6.7	13.3	3.3	6.7	6.7	00.0	20.0	16.7	20.0	00.0	00.0	00.0	00.0	00.0	6.7	00.0	100.
19	00.0	10.0	6.7	3.3	10.0	3.3	3.3	16.7	23.3	16.7	00.0	00.0	00.0	00.0	00.0	6.7	00.0	100.
20	3.3	3.3	13.3	3.3	6.7	3.3	13.3	13.3	20.0	16.7	00.0	00.0	00.0	00.0	00.0	3.3	00.0	100.
21	3.3	00.0	16.7	3.3	3.3	6.7	10.0	16.7	26.7	3.3	00.0	00.0	00.0	3.3	3.3	3.3	00.0	100.
22	10.0	3.3	13.3	3.3	00.0	6.7	10.0	16.7	16.7	10.0	00.0	00.0	00.0	00.0	3.3	6.7	00.0	100.
23	6.7	10.0	10.0	3.3	00.0	3.3	13.3	10.0	30.0	3.3	00.0	00.0	00.0	3.3	3.3	3.3	00.0	100.
24	6.7	10.0	10.0	3.3	00.0	3.3	6.7	16.7	26.7	6.7	00.0	3.3	00.0	00.0	00.0	6.7	00.0	100.
ALL	4.2	5.6	9.6	4.6	2.5	4.7	4.7	12.6	27.8	11.4	2.9	1.4	.1	.4	2.6	4.7	00.0	100.

NUMBER OF OBS = 717

B59

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JUL-SEP

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	13.0	4.3	7.6	4.3	3.3	3.3	6.5	13.0	19.6	9.8	2.2	3.3	1.1	00.0	2.2	6.5	00.0	100.
2	12.0	3.3	7.6	7.6	2.2	4.3	7.6	12.0	17.4	9.8	3.3	3.3	1.1	1.1	2.2	5.4	00.0	100.
3	10.9	3.3	8.7	4.3	4.3	3.3	7.6	12.0	16.3	13.0	2.2	2.2	00.0	2.2	4.3	5.4	00.0	100.
4	10.9	5.4	2.2	7.6	3.3	7.6	8.7	9.8	15.2	9.8	7.6	00.0	1.1	1.1	2.2	7.6	00.0	100.
5	10.9	5.4	6.5	3.3	3.3	4.3	9.8	13.0	16.3	7.6	4.3	4.3	00.0	3.3	4.3	3.3	00.0	100.
6	8.7	7.6	5.4	3.3	2.2	6.5	5.4	13.0	18.5	6.5	4.3	6.5	00.0	2.2	3.3	6.5	00.0	100.
7	7.6	9.8	4.3	4.3	1.1	5.4	8.7	10.9	18.5	7.6	4.3	2.2	2.2	2.2	3.3	7.6	00.0	100.
8	6.5	8.7	4.3	4.3	2.2	5.4	10.9	9.8	18.5	6.5	3.3	4.3	1.1	3.3	3.3	6.5	1.1	100.
9	6.5	8.7	4.3	3.3	2.2	6.5	10.9	10.9	17.4	4.3	9.8	4.3	1.1	2.2	1.1	6.5	00.0	100.
10	7.6	7.6	4.3	4.3	4.3	7.6	7.6	10.9	13.0	12.0	4.3	4.3	2.2	3.3	3.3	3.3	00.0	100.
11	10.9	5.4	10.9	3.3	1.1	7.6	5.4	10.9	18.5	8.7	5.4	2.2	1.1	2.2	3.3	3.3	00.0	100.
12	8.7	9.8	7.6	5.4	2.2	4.3	4.3	8.7	20.7	7.6	3.3	4.3	2.2	2.2	4.3	4.3	00.0	100.
13	11.0	11.0	7.7	3.3	2.2	3.3	6.6	11.0	18.7	5.5	5.5	3.3	2.2	1.1	2.2	5.5	00.0	100.
14	11.0	9.9	11.0	2.2	1.1	3.3	6.6	11.0	16.5	6.6	6.6	3.3	00.0	1.1	2.2	7.7	00.0	100.
15	8.8	8.8	9.9	2.2	5.5	3.3	5.5	14.3	11.0	8.8	5.5	3.3	00.0	1.1	7.7	4.4	00.0	100.
16	9.8	4.3	9.8	4.3	5.4	3.3	8.7	10.9	12.0	9.8	3.3	1.1	1.1	2.2	6.5	7.6	00.0	100.
17	12.0	8.7	7.6	8.7	2.2	2.2	12.0	8.7	13.0	8.7	3.3	1.1	00.0	1.1	4.3	6.5	00.0	100.
18	7.6	13.0	5.4	7.6	4.3	4.3	8.7	12.0	12.0	8.7	00.0	3.3	00.0	2.2	3.3	7.6	00.0	100.
19	6.5	9.8	8.7	5.4	7.6	3.3	12.0	12.0	12.0	6.5	1.1	1.1	1.1	00.0	4.3	8.7	00.0	100.
20	6.5	6.5	8.7	7.6	7.6	4.3	14.1	9.8	13.0	6.5	00.0	4.3	00.0	00.0	1.1	9.8	00.0	100.
21	7.6	8.7	9.8	5.4	4.3	9.8	9.8	12.0	16.3	1.1	2.2	2.2	1.1	1.1	2.2	6.5	00.0	100.
22	7.6	12.0	8.7	6.5	2.2	4.3	8.7	16.3	13.0	4.3	00.0	1.1	4.3	1.1	2.2	7.6	00.0	100.
23	8.7	12.0	7.6	7.6	1.1	4.3	10.9	8.7	20.7	1.1	1.1	2.2	00.0	3.3	4.3	6.5	00.0	100.
24	12.0	7.6	7.6	5.4	1.1	7.6	5.4	12.0	17.4	5.4	3.3	2.2	00.0	1.1	3.3	8.7	00.0	100.
ALL	9.3	8.0	7.3	5.1	3.2	5.0	8.4	11.4	16.1	7.3	3.6	2.9	1.0	1.7	3.4	6.4	.0	100.

NUMBER OF OBS = 2205

B60

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

OCTOBER

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	6.5	6.5	6.5	00.0	00.0	6.5	6.5	3.2	19.4	3.2	3.2	6.5	3.2	3.2	6.5	19.4	00.0	100.
2	16.1	6.5	3.2	00.0	00.0	6.5	3.2	6.5	9.7	12.9	3.2	3.2	3.2	6.5	6.5	12.9	00.0	100.
3	9.7	9.7	00.0	3.2	00.0	00.0	3.2	9.7	6.5	16.1	00.0	3.2	6.5	6.5	16.1	9.7	00.0	100.
4	22.6	3.2	3.2	3.2	00.0	3.2	6.5	3.2	9.7	3.2	3.2	3.2	9.7	9.7	6.5	9.7	00.0	100.
5	12.9	12.9	6.5	00.0	3.2	3.2	3.2	3.2	19.4	3.2	6.5	00.0	3.2	3.2	9.7	9.7	00.0	100.
6	9.7	3.2	9.7	9.7	3.2	00.0	6.5	3.2	12.9	9.7	3.2	00.0	00.0	3.2	16.1	9.7	00.0	100.
7	9.7	00.0	6.5	3.2	3.2	3.2	12.9	3.2	16.1	6.5	3.2	00.0	00.0	6.5	9.7	16.1	00.0	100.
8	9.7	6.5	3.2	3.2	00.0	12.9	9.7	3.2	9.7	3.2	9.7	00.0	00.0	16.1	6.5	6.5	00.0	100.
9	9.7	3.2	9.7	3.2	00.0	3.2	9.7	00.0	19.4	3.2	6.5	3.2	00.0	9.7	16.1	3.2	00.0	100.
10	12.9	3.2	6.5	3.2	3.2	3.2	9.7	3.2	12.9	9.7	3.2	3.2	00.0	12.9	6.5	6.5	00.0	100.
11	16.1	6.5	00.0	6.5	6.5	00.0	6.5	6.5	6.5	9.7	6.5	9.7	3.2	00.0	3.2	12.9	00.0	100.
12	22.6	00.0	3.2	3.2	3.2	00.0	16.1	00.0	6.5	9.7	6.5	6.5	00.0	3.2	6.5	12.9	00.0	100.
13	16.1	3.2	9.7	00.0	3.2	00.0	16.1	00.0	6.5	9.7	00.0	12.9	00.0	3.2	9.7	9.7	00.0	100.
14	22.6	3.2	12.9	00.0	00.0	6.5	12.9	00.0	6.5	6.5	3.2	6.5	6.5	6.5	3.2	3.2	00.0	100.
15	12.9	6.5	6.5	6.5	00.0	3.2	12.9	3.2	6.5	6.5	3.2	6.5	6.5	6.5	3.2	9.7	00.0	100.
16	9.7	9.7	00.0	12.9	00.0	3.2	9.7	3.2	6.5	6.5	3.2	6.5	9.7	3.2	9.7	6.5	00.0	100.
17	12.9	6.5	6.5	6.5	3.2	3.2	00.0	12.9	6.5	6.5	9.7	00.0	3.2	6.5	9.7	6.5	00.0	100.
18	9.7	12.9	12.9	3.2	3.2	00.0	3.2	6.5	12.9	9.7	3.2	3.2	00.0	9.7	00.0	9.7	00.0	100.
19	9.7	9.7	6.5	9.7	3.2	00.0	6.5	3.2	19.4	3.2	3.2	6.5	6.5	00.0	3.2	9.7	00.0	100.
20	9.7	12.9	3.2	6.5	9.7	00.0	3.2	12.9	9.7	9.7	00.0	3.2	6.5	00.0	3.2	9.7	00.0	100.
21	9.7	9.7	6.5	3.2	6.5	3.2	9.7	00.0	12.9	9.7	6.5	00.0	6.5	00.0	3.2	12.9	00.0	100.
22	12.9	6.5	3.2	9.7	3.2	3.2	3.2	6.5	16.1	6.5	6.5	9.7	00.0	00.0	3.2	9.7	00.0	100.
23	9.7	6.5	6.5	3.2	3.2	6.5	3.2	3.2	19.4	00.0	9.7	6.5	6.5	00.0	6.5	9.7	00.0	100.
24	9.7	6.5	3.2	3.2	3.2	6.5	6.5	00.0	19.4	3.2	6.5	9.7	00.0	3.2	6.5	12.9	00.0	100.
ALL	12.6	6.5	5.6	4.3	2.6	3.2	7.5	4.0	12.1	7.0	4.6	4.6	3.4	5.0	7.1	9.9	00.0	100.

NUMBER OF OBS = 744

B61

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

NOVEMBER

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.0	6.7	3.3	00.0	3.3	00.0	00.0	6.7	16.7	13.3	3.3	3.3	00.0	13.3	3.3	16.7	00.0	100.
2	10.0	6.7	6.7	00.0	00.0	00.0	3.3	6.7	10.0	10.0	6.7	6.7	3.3	6.7	6.7	16.7	00.0	100.
3	13.3	6.7	3.3	00.0	00.0	00.0	3.3	10.0	6.7	6.7	6.7	3.3	6.7	10.0	10.0	13.3	00.0	100.
4	10.0	3.3	6.7	3.3	00.0	00.0	6.7	3.3	13.3	3.3	3.3	6.7	3.3	13.3	6.7	16.7	00.0	100.
5	13.3	3.3	00.0	3.3	00.0	3.3	3.3	13.3	6.7	6.7	3.3	3.3	3.3	13.3	10.0	13.3	00.0	100.
6	13.3	6.7	00.0	3.3	00.0	00.0	10.0	6.7	13.3	3.3	6.7	00.0	3.3	13.3	10.0	10.0	00.0	100.
7	16.7	00.0	3.3	3.3	3.3	6.7	3.3	3.3	16.7	00.0	3.3	3.3	00.0	16.7	10.0	10.0	00.0	100.
8	16.7	00.0	00.0	00.0	10.0	3.3	3.3	3.3	20.0	00.0	3.3	00.0	6.7	13.3	6.7	13.3	00.0	100.
9	10.3	3.4	00.0	3.4	3.4	3.4	6.9	6.9	13.8	3.4	3.4	00.0	6.9	13.8	13.8	6.9	00.0	100.
10	13.3	3.3	00.0	00.0	6.7	00.0	6.7	6.7	13.3	3.3	3.3	00.0	00.0	10.0	16.7	16.7	00.0	100.
11	6.7	6.7	00.0	6.7	00.0	00.0	6.7	6.7	13.3	13.3	00.0	00.0	10.0	00.0	13.3	16.7	00.0	100.
12	10.0	3.3	3.3	6.7	00.0	00.0	3.3	10.0	16.7	3.3	00.0	13.3	00.0	6.7	10.0	13.3	00.0	100.
13	13.3	00.0	00.0	10.0	00.0	00.0	3.3	3.3	16.7	13.3	3.3	00.0	6.7	6.7	10.0	13.3	00.0	100.
14	20.0	3.3	00.0	00.0	6.7	00.0	3.3	10.0	13.3	10.0	6.7	6.7	00.0	6.7	13.3	00.0	00.0	100.
15	13.3	00.0	00.0	00.0	6.7	3.3	6.7	3.3	13.3	10.0	10.0	3.3	3.3	6.7	10.0	10.0	00.0	100.
16	6.7	00.0	00.0	10.0	3.3	00.0	00.0	3.3	16.7	10.0	6.7	6.7	6.7	6.7	10.0	13.3	00.0	100.
17	3.3	00.0	3.3	3.3	3.3	3.3	00.0	6.7	13.3	13.3	6.7	00.0	13.3	3.3	6.7	20.0	00.0	100.
18	6.7	3.3	3.3	3.3	3.3	00.0	00.0	10.0	10.0	13.3	00.0	10.0	3.3	6.7	6.7	20.0	00.0	100.
19	13.3	3.3	3.3	3.3	3.3	00.0	00.0	13.3	13.3	10.0	00.0	3.3	10.0	3.3	3.3	16.7	00.0	100.
20	13.3	3.3	3.3	00.0	3.3	00.0	00.0	10.0	16.7	10.0	3.3	00.0	3.3	6.7	10.0	16.7	00.0	100.
21	16.7	3.3	00.0	3.3	00.0	3.3	3.3	00.0	16.7	16.7	3.3	00.0	00.0	10.0	6.7	16.7	00.0	100.
22	10.0	00.0	3.3	3.3	00.0	3.3	3.3	00.0	20.0	13.3	3.3	00.0	00.0	6.7	13.3	20.0	00.0	100.
23	13.3	3.3	3.3	00.0	6.7	00.0	3.3	00.0	20.0	10.0	3.3	3.3	00.0	10.0	13.3	10.0	00.0	100.
24	10.0	6.7	3.3	00.0	3.3	3.3	00.0	6.7	16.7	10.0	3.3	3.3	00.0	3.3	13.3	16.7	00.0	100.
ALL	11.8	3.2	2.1	2.8	2.8	1.4	3.3	6.3	14.5	8.6	3.9	3.2	3.8	8.6	9.7	14.0	00.0	100.

NUMBER OF OBS = 719

B62

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

DECEMBER

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	9.7	00.0	00.0	3.2	3.2	6.5	3.2	9.7	9.7	6.5	3.2	6.5	00.0	9.7	12.9	16.1	00.0	100.
2	9.7	3.2	3.2	00.0	3.2	6.5	3.2	9.7	6.5	6.5	9.7	00.0	3.2	6.5	22.6	6.5	00.0	100.
3	9.7	3.2	00.0	00.0	6.5	3.2	6.5	3.2	12.9	9.7	3.2	00.0	6.5	9.7	19.4	6.5	00.0	100.
4	9.7	00.0	00.0	3.2	00.0	3.2	12.9	00.0	12.9	6.5	6.5	00.0	6.5	9.7	19.4	9.7	00.0	100.
5	6.5	00.0	00.0	3.2	3.2	3.2	6.5	6.5	9.7	6.5	6.5	00.0	6.5	12.9	16.1	12.9	00.0	100.
6	6.5	00.0	3.2	00.0	6.5	3.2	6.5	3.2	9.7	9.7	3.2	9.7	9.7	16.1	9.7	00.0	100.	
7	6.5	00.0	00.0	00.0	9.7	3.2	6.5	3.2	9.7	9.7	3.2	00.0	12.9	6.5	16.1	12.9	00.0	100.
8	6.5	00.0	00.0	00.0	3.2	9.7	6.5	6.5	6.5	3.2	12.9	3.2	9.7	3.2	9.7	19.4	00.0	100.
9	6.5	00.0	00.0	00.0	3.2	9.7	6.5	6.5	6.5	3.2	12.9	6.5	6.5	3.2	16.1	12.9	00.0	100.
10	3.2	00.0	00.0	3.2	00.0	6.5	3.2	6.5	16.1	3.2	6.5	9.7	9.7	3.2	9.7	19.4	00.0	100.
11	3.2	3.2	00.0	3.2	00.0	3.2	6.5	3.2	12.9	3.2	19.4	3.2	3.2	9.7	9.7	16.1	00.0	100.
12	9.7	00.0	3.2	3.2	00.0	3.2	6.5	00.0	12.9	19.4	9.7	3.2	3.2	6.5	6.5	12.9	00.0	100.
13	3.2	00.0	3.2	00.0	00.0	00.0	9.7	3.2	9.7	16.1	16.1	6.5	3.2	00.0	12.9	16.1	00.0	100.
14	3.2	3.2	3.2	00.0	00.0	3.2	9.7	3.2	12.9	12.9	3.2	12.9	3.2	00.0	9.7	19.4	00.0	100.
15	3.2	3.2	00.0	3.2	00.0	3.2	9.7	00.0	12.9	12.9	9.7	9.7	3.2	00.0	9.7	19.4	00.0	100.
16	00.0	3.2	00.0	3.2	00.0	6.5	6.5	6.5	12.9	12.9	3.2	3.2	3.2	6.5	12.9	19.4	00.0	100.
17	00.0	3.2	00.0	00.0	00.0	9.7	6.5	12.9	16.1	3.2	6.5	6.5	00.0	3.2	16.1	16.1	00.0	100.
18	3.2	3.2	3.2	00.0	3.2	3.2	6.5	12.9	12.9	9.7	00.0	3.2	3.2	6.5	12.9	16.1	00.0	100.
19	3.2	3.2	00.0	00.0	3.2	6.5	6.5	6.5	22.6	3.2	3.2	3.2	3.2	6.5	9.7	19.4	00.0	100.
20	3.2	3.2	00.0	00.0	3.2	3.2	6.5	9.7	12.9	9.7	6.5	3.2	6.5	3.2	6.5	22.6	00.0	100.
21	6.5	00.0	3.2	3.2	3.2	3.2	3.2	6.5	12.9	9.7	3.2	3.2	6.5	6.5	12.9	16.1	00.0	100.
22	9.7	00.0	3.2	00.0	00.0	3.2	6.5	6.5	16.1	3.2	6.5	3.2	3.2	9.7	12.9	16.1	00.0	100.
23	9.7	00.0	3.2	00.0	00.0	3.2	3.2	9.7	16.1	3.2	6.5	3.2	3.2	3.2	19.4	16.1	00.0	100.
24	6.5	00.0	3.2	3.2	00.0	3.2	3.2	12.9	9.7	6.5	3.2	6.5	3.2	9.7	9.7	19.4	00.0	100.
ALL	5.8	1.3	1.3	1.3	2.2	4.6	6.3	6.2	12.2	7.9	6.9	4.2	5.0	6.0	13.3	15.5	00.0	100.

NUMBER OF OBS = 744

B63

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

OCT-DEC

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	8.7	4.3	3.3	1.1	2.2	4.3	3.3	6.5	15.2	7.6	3.3	5.4	1.1	8.7	7.6	17.4	00.0	100.
2	12.0	5.4	4.3	00.0	1.1	4.3	3.3	7.6	8.7	9.8	6.5	3.3	3.3	6.5	12.0	12.0	00.0	100.
3	10.9	6.5	1.1	1.1	2.2	1.1	4.3	7.6	8.7	10.9	3.3	2.2	6.5	8.7	15.2	9.8	00.0	100.
4	14.1	2.2	3.3	3.3	00.0	2.2	8.7	2.2	12.0	4.3	4.3	3.3	6.5	10.9	10.9	12.0	00.0	100.
5	10.9	5.4	2.2	2.2	2.2	3.3	4.3	7.6	12.0	5.4	5.4	1.1	4.3	9.8	12.0	12.0	00.0	100.
6	9.8	3.3	4.3	4.3	3.3	1.1	7.6	4.3	12.0	7.6	4.3	1.1	4.3	8.7	14.1	9.8	00.0	100.
7	10.9	00.0	3.3	2.2	5.4	4.3	7.6	3.3	14.1	5.4	3.3	1.1	4.3	9.8	12.0	13.0	00.0	100.
8	10.9	2.2	1.1	1.1	4.3	8.7	6.5	4.3	12.0	2.2	8.7	1.1	5.4	10.9	7.6	13.0	00.0	100.
9	8.8	2.2	3.3	2.2	2.2	5.5	7.7	4.4	13.2	3.3	7.7	3.3	4.4	8.8	15.4	7.7	00.0	100.
10	9.8	2.2	2.2	2.2	3.3	3.3	6.5	5.4	14.1	5.4	4.3	4.3	3.3	8.7	10.9	14.1	00.0	100.
11	8.7	5.4	00.0	5.4	2.2	1.1	6.5	5.4	10.9	8.7	8.7	4.3	5.4	3.3	8.7	15.2	00.0	100.
12	14.1	1.1	3.3	4.3	1.1	1.1	8.7	3.3	12.0	10.9	5.4	7.6	1.1	5.4	7.6	13.0	00.0	100.
13	10.9	1.1	4.3	3.3	1.1	00.0	9.8	2.2	10.9	13.0	6.5	6.5	3.3	3.3	10.9	13.0	00.0	100.
14	15.2	3.3	5.4	00.0	2.2	3.3	8.7	4.3	10.9	9.8	4.3	8.7	3.3	4.3	8.7	7.6	00.0	100.
15	9.8	3.3	2.2	3.3	2.2	3.3	9.8	2.2	10.9	9.8	7.6	6.5	4.3	4.3	7.6	13.0	00.0	100.
16	5.4	4.3	00.0	8.7	1.1	3.3	5.4	4.3	12.0	9.8	4.3	5.4	6.5	5.4	10.9	13.0	00.0	100.
17	5.4	3.3	3.3	3.3	2.2	5.4	2.2	10.9	12.0	7.6	7.6	2.2	5.4	4.3	10.9	14.1	00.0	100.
18	6.5	6.5	6.5	2.2	3.3	1.1	3.3	9.8	12.0	10.9	1.1	5.4	2.2	7.6	6.5	15.2	00.0	100.
19	8.7	5.4	3.3	4.3	3.3	2.2	4.3	7.6	18.5	5.4	2.2	4.3	6.5	3.3	5.4	15.2	00.0	100.
20	8.7	6.5	2.2	2.2	5.4	1.1	3.3	10.9	13.0	9.8	3.3	2.2	5.4	3.3	6.5	16.3	00.0	100.
21	10.9	4.3	3.3	3.3	3.3	3.3	5.4	2.2	14.1	12.0	4.3	1.1	4.3	5.4	7.6	15.2	00.0	100.
22	10.9	2.2	3.3	4.3	1.1	3.3	4.3	4.3	17.4	7.6	5.4	4.3	1.1	5.4	9.8	15.2	00.0	100.
23	10.9	3.3	4.3	1.1	3.3	3.3	3.3	4.3	18.5	4.3	6.5	4.3	3.3	4.3	13.0	12.0	00.0	100.
24	8.7	4.3	3.3	2.2	2.2	4.3	3.3	6.5	15.2	6.5	4.3	6.5	1.1	5.4	9.8	16.3	00.0	100.
ALL	10.1	3.7	3.0	2.8	2.5	3.1	5.8	5.5	12.9	7.8	5.1	4.0	4.0	6.5	10.1	13.1	00.0	100.

NUMBER OF OBS = 2207

B64

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JUL-DEC

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.9	4.3	5.4	2.7	2.7	3.8	4.9	9.8	17.4	8.7	2.7	4.3	1.1	4.3	4.9	12.0	00.0	100.
2	12.0	4.3	6.0	3.8	1.6	4.3	5.4	9.8	13.0	9.8	4.9	3.3	2.2	3.8	7.1	8.7	00.0	100.
3	10.9	4.9	4.9	2.7	3.3	2.2	6.0	9.8	12.5	12.0	2.7	2.2	3.3	5.4	9.8	7.6	00.0	100.
4	12.5	3.8	2.7	5.4	1.6	4.9	8.7	6.0	13.6	7.1	6.0	1.6	3.8	6.0	6.5	9.8	00.0	100.
5	10.9	5.4	4.3	2.7	2.7	3.8	7.1	10.3	14.1	6.5	4.9	2.7	2.2	6.5	8.2	7.6	00.0	100.
6	9.2	5.4	4.9	3.8	2.7	3.8	6.5	8.7	15.2	7.1	4.3	3.8	2.2	5.4	8.7	8.2	00.0	100.
7	9.2	4.9	3.8	3.3	3.3	4.9	8.2	7.1	16.3	6.5	3.8	1.6	3.3	6.0	7.6	10.3	00.0	100.
8	8.7	5.4	2.7	2.7	3.3	7.1	8.7	7.1	15.2	4.3	6.0	2.7	3.3	7.1	5.4	9.8	.5	100.
9	7.7	5.5	3.8	2.7	2.2	6.0	9.3	7.7	15.3	3.8	8.7	3.8	2.7	5.5	8.2	7.1	00.0	100.
10	8.7	4.9	3.3	3.3	3.8	5.4	7.1	8.2	13.6	8.7	4.3	4.3	2.7	6.0	7.1	8.7	00.0	100.
11	9.8	5.4	5.4	4.3	1.6	4.3	6.0	8.2	14.7	8.7	7.1	3.3	3.3	2.7	6.0	9.2	00.0	100.
12	11.4	5.4	5.4	4.9	1.6	2.7	6.5	6.0	16.3	9.2	4.3	6.0	1.6	3.8	6.0	8.7	00.0	100.
13	10.9	6.0	6.0	3.3	1.6	1.6	8.2	6.6	14.8	9.3	6.0	4.9	2.7	2.2	6.6	9.3	00.0	100.
14	13.1	6.6	8.2	1.1	1.6	3.3	7.7	7.7	13.7	8.2	5.5	6.0	1.6	2.7	5.5	7.7	00.0	100.
15	9.3	6.0	6.0	2.7	3.8	3.3	7.7	8.2	10.9	9.3	6.6	4.9	2.2	2.7	7.7	8.7	00.0	100.
16	7.6	4.3	4.9	6.5	3.3	3.3	7.1	7.6	12.0	9.8	3.8	3.3	3.8	3.8	8.7	10.3	00.0	100.
17	8.7	6.0	5.4	6.0	2.2	3.8	7.1	9.8	12.5	8.2	5.4	1.6	2.7	2.7	7.6	10.3	00.0	100.
18	7.1	9.8	6.0	4.9	3.8	2.7	6.0	10.9	12.0	9.8	.5	4.3	1.1	4.9	4.9	11.4	00.0	100.
19	7.6	7.6	6.0	4.9	5.4	2.7	8.2	9.8	15.2	6.0	1.6	2.7	3.8	1.6	4.9	12.0	00.0	100.
20	7.6	6.5	5.4	4.9	6.5	2.7	8.7	10.3	13.0	8.2	1.6	3.3	2.7	1.6	3.8	13.0	00.0	100.
21	9.2	6.5	6.5	4.3	3.8	6.5	7.6	7.1	15.2	6.5	3.3	1.6	2.7	3.3	4.9	10.9	00.0	100.
22	9.2	7.1	6.0	5.4	1.6	3.8	6.5	10.3	15.2	6.0	2.7	2.7	2.7	3.3	6.0	11.4	00.0	100.
23	9.8	7.6	6.0	4.3	2.2	3.8	7.1	6.5	19.6	2.7	3.8	3.3	1.6	3.8	8.7	9.2	00.0	100.
24	10.3	6.0	5.4	3.8	1.6	6.0	4.3	9.2	16.3	6.0	3.8	4.3	.5	3.3	6.5	12.5	00.0	100.
ALL	9.7	5.8	5.2	3.9	2.8	4.0	7.1	8.4	14.5	7.6	4.4	3.4	2.5	4.1	6.7	9.8	.0	100.

NUMBER OF OBS = 4412

B65

NPPD-COOPER NUCLEAR STATION 100-M WIND DIRECTION 2018

PROGRAM: WINPER
VERSION: PC-1.0

HOURLY WIND ROSES (PERCENT)

JAN-DEC

WIND DIRECTION

HR. OF DAY	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM	TOTAL
1	10.4	4.4	3.8	3.6	3.6	5.5	5.5	9.3	15.9	6.8	4.9	3.3	1.6	3.6	5.2	12.6	00.0	100.
2	11.0	3.0	5.8	3.3	3.8	4.1	6.0	9.9	12.1	9.0	5.2	2.7	2.7	3.0	6.0	12.3	00.0	100.
3	10.7	3.0	4.7	2.7	4.1	3.8	5.8	8.8	11.5	11.2	3.6	3.6	2.2	4.4	9.6	10.4	00.0	100.
4	12.3	3.0	3.3	4.1	2.5	5.8	7.7	5.8	12.1	7.9	5.2	3.0	3.3	5.2	8.8	10.1	00.0	100.
5	9.9	4.1	4.4	2.5	2.7	5.5	5.8	9.1	13.2	6.9	4.9	3.6	2.5	5.2	8.8	11.0	00.0	100.
6	9.6	4.1	4.9	3.0	3.3	5.8	6.6	8.2	13.2	6.8	3.8	4.4	2.2	4.9	8.8	10.4	00.0	100.
7	9.0	4.9	4.4	2.7	3.6	4.9	8.5	7.4	14.0	6.6	4.1	2.2	3.6	5.5	7.1	11.5	00.0	100.
8	8.8	4.9	2.7	2.5	3.3	6.3	8.2	7.4	13.2	6.3	4.9	3.8	3.3	6.0	6.0	12.1	.3	100.
9	7.4	5.5	2.7	3.3	3.0	5.2	9.3	6.9	11.5	7.7	7.1	3.3	3.3	4.9	7.1	11.5	00.0	100.
10	9.3	3.6	3.0	3.6	4.7	4.9	7.7	7.1	11.8	9.3	4.1	4.7	3.3	5.2	7.9	9.9	00.0	100.
11	10.1	4.1	4.9	3.8	3.0	4.9	6.6	7.9	10.4	10.4	5.5	4.4	3.0	3.8	7.1	9.9	00.0	100.
12	10.1	6.3	4.7	3.8	2.7	4.4	6.6	6.6	13.7	9.3	4.9	5.5	1.4	3.8	6.6	9.6	00.0	100.
13	11.0	4.1	4.7	3.6	3.0	3.8	8.2	6.0	12.4	8.8	6.6	3.8	3.0	2.7	8.0	10.2	00.0	100.
14	12.6	4.7	5.2	1.6	3.6	5.2	7.7	6.3	12.9	8.5	4.7	5.2	2.7	3.0	6.9	9.1	00.0	100.
15	10.4	5.2	4.9	2.7	4.1	4.7	8.0	6.0	11.3	8.5	6.3	4.9	2.7	3.0	8.2	8.8	00.0	100.
16	9.6	4.1	3.6	6.0	3.3	3.8	7.9	7.7	11.5	7.9	4.4	3.3	3.3	4.7	7.4	11.5	00.0	100.
17	9.6	4.7	4.9	4.7	2.7	5.2	6.6	9.6	11.2	8.5	4.1	1.6	3.8	3.3	7.4	12.1	00.0	100.
18	7.9	7.1	5.5	4.4	3.6	4.9	5.8	10.7	11.2	8.2	1.9	3.8	2.2	4.1	5.5	13.2	00.0	100.
19	8.2	5.5	5.8	4.4	5.5	4.7	7.7	9.6	12.6	5.5	3.3	1.4	4.4	2.7	5.5	13.2	00.0	100.
20	8.8	5.5	5.2	4.4	5.8	5.2	8.2	10.7	11.8	6.8	2.2	2.2	3.3	1.6	5.5	12.9	00.0	100.
21	9.3	6.0	5.2	4.9	4.7	6.3	7.7	9.0	13.4	5.8	2.7	2.7	2.7	2.7	5.8	10.7	.3	100.
22	9.3	6.0	5.5	4.1	4.7	5.2	7.7	9.9	13.7	5.5	1.9	3.6	2.5	3.3	5.8	11.0	.3	100.
23	9.6	4.9	4.4	5.2	4.4	4.9	7.4	7.7	16.4	4.9	2.5	3.3	2.7	4.1	7.4	10.1	00.0	100.
24	9.3	4.9	4.1	4.7	3.3	6.6	5.8	9.3	14.5	6.0	3.0	4.7	1.9	3.3	5.8	12.9	00.0	100.
ALL	9.8	4.7	4.5	3.7	3.7	5.1	7.2	8.2	12.7	7.6	4.2	3.5	2.8	3.9	7.0	11.1	.0	100.

NUMBER OF OBS = 8753

Precipitation

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	1	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	7	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.00 .00	.03 .00	.07
18	1	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	11	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	1	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B68

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	1	18	.00 .00	.00 .00	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02
18	1	19	.00 .02	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.04
18	1	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.01 .13	.00 .02	.00 .00	.00 .00	.00 .00	.17
18	1	22	.00 .00	.00 .00	.00 .00	.04 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.05
18	1	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	25	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	29	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	1	31	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B69

MONTH OF JANUARY

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 15
 TOTAL DAYS WITH PRECIPITATION - 6
 TOTAL AMOUNT OF PRECIPITATION - .36 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .13 INCHES
 MAXIMUM DAILY PRECIPITATION - .17 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 21 HOUR 20 - .13 INCHES
 6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 21 HOUR 20 - .15 INCHES
 12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 21 HOUR 20 - .19 INCHES
 18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 21 HOUR 20 - .20 INCHES
 24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 21 HOUR 7 - .21 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 456
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 0
 TOTAL DAYS WITH PRECIPITATION - 0
 TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
 MAXIMUM DAILY PRECIPITATION - .00 INCHES

B70

MONTH OF JANUARY

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	15	54	91	121	147
.02	7	39	70	95	116
.03	3	23	43	61	80
.04	2	23	43	61	80
.05	1	14	32	44	59
.07	1	8	21	33	45
.10	1	6	12	18	24
.15	0	5	11	18	24
.20	0	0	0	6	16
.25	0	0	0	0	0
.30	0	0	0	0	0
.35	0	0	0	0	0
.40	0	0	0	0	0
.45	0	0	0	0	0
.50	0	0	0	0	0
.60	0	0	0	0	0
.70	0	0	0	0	0
.80	0	0	0	0	0
.90	0	0	0	0	0
1.00	0	0	0	0	0
1.10	0	0	0	0	0
1.20	0	0	0	0	0
1.30	0	0	0	0	0
1.40	0	0	0	0	0
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B71

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL	
18	2	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	8	.00 .05	.00 .03	.00 .03	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .02	.02 .00	.14
18	2	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	13	.00 .05	.00 .02	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .05	.05 .00	.13
18	2	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	
18	2	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00	

B72

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	2	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	2	19	.00 .00	.00 .00	.00 .00	.01 .00	.02 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	2	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	2	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	2	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .04	.00 .05	.00 .04	.00 .05	.00 .02	.20
18	2	23	.01 .06	.00 .03	.01 .02	.01 .01	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.02 .00	.20
18	2	24	.00 .01	.00 .00	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.02 .00	.05
18	2	25	.00 .02	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03 .00	.02 .00	.01 .00	.08
18	2	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	2	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	2	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B73

MONTH OF FEBRUARY

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 672
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 35
TOTAL DAYS WITH PRECIPITATION - 7
TOTAL AMOUNT OF PRECIPITATION - .83 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .06 INCHES
MAXIMUM DAILY PRECIPITATION - .20 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 23 HOUR 13 - .06 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 22 HOUR 20 - .21 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 22 HOUR 20 - .23 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 22 HOUR 20 - .32 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 22 HOUR 20 - .40 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 447
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 22
TOTAL DAYS WITH PRECIPITATION - 6
TOTAL AMOUNT OF PRECIPITATION - .55 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .06 INCHES
MAXIMUM DAILY PRECIPITATION - .20 INCHES

MONTH OF FEBRUARY

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	35	73	109	144	169
.02	21	63	102	139	166
.03	12	56	97	133	163
.04	8	43	80	110	137
.05	6	39	76	106	136
.07	0	30	60	86	116
.10	0	22	47	67	86
.15	0	5	19	31	38
.20	0	2	8	19	25
.25	0	0	0	5	11
.30	0	0	0	2	9
.35	0	0	0	0	7
.40	0	0	0	0	2
.45	0	0	0	0	0
.50	0	0	0	0	0
.60	0	0	0	0	0
.70	0	0	0	0	0
.80	0	0	0	0	0
.90	0	0	0	0	0
1.00	0	0	0	0	0
1.10	0	0	0	0	0
1.20	0	0	0	0	0
1.30	0	0	0	0	0
1.40	0	0	0	0	0
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B75

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	3	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	3	6	.00 .00	.00 .02	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	3	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	16	.00 .00	.00 .00	.00 .00	.00 .00	.03 .00	.08 .00	.01 .00	.01 .01	.06 .14	.08 .04	.00 .00	.00 .00	.46
18	3	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B76

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	3	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	3	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .08	.08
18	3	24	.00 .00	.00 .00	.01 .00	.01 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	3	25	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	26	.00 .12	.00 .01	.00 .01	.00 .00	.00 .02	.48 .01	.69 .00	.12 .00	.11 .00	.01 .00	.01 .00	.02 .00	1.61
18	3	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	3	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	29	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	3	31	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B77

MONTH OF MARCH

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 31
TOTAL DAYS WITH PRECIPITATION - 8
TOTAL AMOUNT OF PRECIPITATION - 2.26 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .69 INCHES
MAXIMUM DAILY PRECIPITATION - 1.61 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 7 - .69 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 6 - 1.42 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 6 - 1.60 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 6 - 1.61 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 6 - 1.61 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 113
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 0
TOTAL DAYS WITH PRECIPITATION - 0
TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
MAXIMUM DAILY PRECIPITATION - .00 INCHES

MONTH OF MARCH

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	31	74	120	156	192
.02	16	57	92	123	153
.03	12	54	89	119	149
.04	11	38	61	81	99
.05	10	36	59	78	96
.07	9	35	58	76	94
.10	6	30	54	72	90
.15	2	24	43	55	67
.20	2	11	26	41	54
.25	2	10	22	39	51
.30	2	8	15	27	39
.35	2	8	14	24	36
.40	2	7	14	23	35
.45	2	7	13	20	33
.50	1	6	12	18	24
.60	1	6	12	18	24
.70	0	6	12	18	24
.80	0	6	12	18	24
.90	0	6	12	18	24
1.00	0	5	12	18	24
1.10	0	5	12	18	24
1.20	0	4	10	16	22
1.30	0	3	9	15	21
1.40	0	3	9	15	21
1.50	0	0	5	11	17
1.60	0	0	1	7	13
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B79

JAN-MAR INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 2160
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 81
TOTAL DAYS WITH PRECIPITATION - 21
TOTAL AMOUNT OF PRECIPITATION - 3.45 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .69 INCHES
MAXIMUM DAILY PRECIPITATION - 1.61 INCHES

1	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	3	DAY	26	HOUR	7	-	.69	INCHES
6	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	3	DAY	26	HOUR	6	-	1.42	INCHES
12	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	3	DAY	26	HOUR	6	-	1.60	INCHES
18	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	3	DAY	26	HOUR	6	-	1.61	INCHES
24	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	3	DAY	26	HOUR	6	-	1.61	INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 1016
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 22
TOTAL DAYS WITH PRECIPITATION - 6
TOTAL AMOUNT OF PRECIPITATION - .55 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .06 INCHES
MAXIMUM DAILY PRECIPITATION - .20 INCHES

JAN-MAR INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	81	201	320	421	508
.02	44	159	264	357	435
.03	27	133	229	313	392
.04	21	104	184	252	316
.05	17	89	167	228	291
.07	10	73	139	195	255
.10	7	58	113	157	200
.15	2	34	73	104	129
.20	2	13	34	66	95
.25	2	10	22	44	62
.30	2	8	15	29	48
.35	2	8	14	24	43
.40	2	7	14	23	37
.45	2	7	13	20	33
.50	1	6	12	18	24
.60	1	6	12	18	24
.70	0	6	12	18	24
.80	0	6	12	18	24
.90	0	6	12	18	24
1.00	0	5	12	18	24
1.10	0	5	12	18	24
1.20	0	4	10	16	22
1.30	0	3	9	15	21
1.40	0	3	9	15	21
1.50	0	0	5	11	17
1.60	0	0	1	7	13
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

B81

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	4	1	.00 .00	.00 .00	.00 .00	.00 .03	.00 .02	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.06
18	4	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	3	.00 .05	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.17 .00	.25
18	4	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	9	.00 .00	.00 .00	.00 9.99	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .06	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.06
18	4	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.01 .00	.14 .00	.06 .00	.02 .00	.02 .00	.24
18	4	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B82

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	4	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	21	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.03
18	4	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	25	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03 .00	.03 .00	.08 .00	.04 .00	.02 .00	.01 .00	.21
18	4	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	29	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	4	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B83

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

MONTH OF APRIL

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 720
NUMBER OF MISSING HOURS - 1
TOTAL HOURS OF PRECIPITATION - 22
TOTAL DAYS WITH PRECIPITATION - 6
TOTAL AMOUNT OF PRECIPITATION - .85 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .17 INCHES
MAXIMUM DAILY PRECIPITATION - .25 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 3 HOUR 12 - .17 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 14 HOUR 8 - .24 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 3 HOUR 2 - .25 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 3 HOUR 2 - .25 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 13 HOUR 17 - .30 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 163
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 4
TOTAL DAYS WITH PRECIPITATION - 2
TOTAL AMOUNT OF PRECIPITATION - .07 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .03 INCHES
MAXIMUM DAILY PRECIPITATION - .06 INCHES

MONTH OF APRIL

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	22	57	96	127	151
.02	14	46	82	114	138
.03	10	41	78	111	135
.04	7	33	63	91	109
.05	6	33	63	91	109
.07	3	20	38	58	76
.10	2	18	36	54	72
.15	1	17	35	53	71
.20	0	12	31	50	68
.25	0	0	1	7	19
.30	0	0	0	0	5
.35	0	0	0	0	0
.40	0	0	0	0	0
.45	0	0	0	0	0
.50	0	0	0	0	0
.60	0	0	0	0	0
.70	0	0	0	0	0
.80	0	0	0	0	0
.90	0	0	0	0	0
1.00	0	0	0	0	0
1.10	0	0	0	0	0
1.20	0	0	0	0	0
1.30	0	0	0	0	0
1.40	0	0	0	0	0
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B85

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	5	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.00 .03	.00 .02	.00 .01	.07
18	5	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .33	.00 .80	.00 .10	.00 .02	.00 .00	.00 .00	.00 .00	1.25
18	5	3	.00 .00	.00 .00	.00 .01	.00 .38	.00 .13	.00 .04	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.56
18	5	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.01
18	5	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	11	.00 .00	.00 .00	.00 .00	.00 .00	.07 .00	.13 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.20
18	5	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .02	.00 .00	.02
18	5	14	.01 .00	.37 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .47	.86
18	5	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	5	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .02	.00 .01	.00 .00	.00 .00	.03
18	5	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	25	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	5	29	.00 .00	.00 .00	.03 .00	.03 .57	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .07	.00 .10	.80
18	5	30	.01 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02
18	5	31	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B87

MONTH OF MAY

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 29
TOTAL DAYS WITH PRECIPITATION - 10
TOTAL AMOUNT OF PRECIPITATION - 3.82 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .80 INCHES
MAXIMUM DAILY PRECIPITATION - 1.25 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 2 HOUR 19 - .80 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 2 HOUR 18 - 1.25 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 2 HOUR 18 - 1.25 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 2 HOUR 18 - 1.25 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 2 HOUR 18 - 1.77 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 0
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 0
TOTAL DAYS WITH PRECIPITATION - 0
TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
MAXIMUM DAILY PRECIPITATION - .00 INCHES

MONTH OF MAY

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	29	90	155	203	236
.02	20	73	128	176	210
.03	16	68	123	171	206
.04	13	59	108	151	181
.05	12	57	106	149	180
.07	12	50	93	135	168
.10	10	45	83	119	149
.15	6	42	80	116	147
.20	6	36	72	108	139
.25	6	31	61	91	116
.30	6	31	61	91	116
.35	5	30	60	90	116
.40	3	26	56	86	115
.45	3	23	47	71	93
.50	2	17	35	53	71
.60	1	6	17	35	51
.70	1	6	16	28	43
.80	1	6	12	18	29
.90	0	6	12	18	24
1.00	0	5	11	17	24
1.10	0	5	11	17	24
1.20	0	4	10	16	24
1.30	0	0	0	0	5
1.40	0	0	0	0	3
1.50	0	0	0	0	2
1.60	0	0	0	0	2
1.70	0	0	0	0	1
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	6	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	2	.00 .00	.25 .00	.08 .00	.17 .00	.12 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.63
18	6	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .94	.94
18	6	7	.03 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	6	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .48	.00 .01	.00 .00	.00 .00	.00 .00	.49
18	6	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B90

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	6	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.15 .00	.42 .00	.32 .00	.01 .00	.00 .00	.00 .00	.00 .49	1.39
18	6	20	.04 .00	.01 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.06
18	6	21	.00 .00	.00 .00	.00 .00	.03 .00	.02 .00	.01 .00	.03 .00	.01 .00	.03 .03	.01 .01	.01 .01	.01 .00	.21
18	6	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	25	.00 .09	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .02	.04 .00	.10 .00	.01 .00	.04 .00	.00 .00	.30
18	6	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	29	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	6	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.00 .00	.00 .17	.00 .26	.00 .83	.00 .03	1.30

B91

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

MONTH OF JUNE

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 720
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 40
TOTAL DAYS WITH PRECIPITATION - 9
TOTAL AMOUNT OF PRECIPITATION - 5.35 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .94 INCHES
MAXIMUM DAILY PRECIPITATION - 1.39 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 6 HOUR 24 - .94 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 30 HOUR 19 - 1.30 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 30 HOUR 13 - 1.30 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 30 HOUR 7 - 1.30 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 6 - 1.45 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 0
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 0
TOTAL DAYS WITH PRECIPITATION - 0
TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
MAXIMUM DAILY PRECIPITATION - .00 INCHES

MONTH OF JUNE

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	40	90	135	174	209
.02	26	79	125	165	201
.03	24	70	117	157	193
.04	18	66	115	155	192
.05	15	64	114	154	190
.07	15	56	98	141	177
.10	13	52	96	138	174
.15	11	43	86	129	165
.20	8	38	74	108	144
.25	8	37	74	108	138
.30	6	35	66	100	130
.35	5	32	62	91	115
.40	5	31	61	90	114
.45	4	30	60	89	113
.50	2	23	47	71	89
.60	2	16	34	53	71
.70	2	13	25	38	50
.80	2	12	24	38	50
.90	1	11	23	36	48
1.00	0	2	2	3	9
1.10	0	2	2	3	9
1.20	0	2	2	3	9
1.30	0	1	1	1	8
1.40	0	0	0	0	5
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B93

APR-JUN INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 2184
NUMBER OF MISSING HOURS - 1
TOTAL HOURS OF PRECIPITATION - 91
TOTAL DAYS WITH PRECIPITATION - 25
TOTAL AMOUNT OF PRECIPITATION - 10.02 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .94 INCHES
MAXIMUM DAILY PRECIPITATION - 1.39 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	6 DAY 6 HOUR 24	-	.94 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	6 DAY 30 HOUR 19	-	1.30 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	6 DAY 30 HOUR 13	-	1.30 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	6 DAY 30 HOUR 7	-	1.30 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	5 DAY 2 HOUR 18	-	1.77 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 163
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 4
TOTAL DAYS WITH PRECIPITATION - 2
TOTAL AMOUNT OF PRECIPITATION - .07 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .03 INCHES
MAXIMUM DAILY PRECIPITATION - .06 INCHES

APR-JUN INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	91	237	386	504	599
.02	60	198	335	455	551
.03	50	179	318	439	536
.04	38	158	286	397	484
.05	33	154	283	394	480
.07	30	126	229	334	421
.10	25	115	215	311	395
.15	18	102	201	298	383
.20	14	86	177	266	351
.25	14	68	136	206	273
.30	12	66	127	191	251
.35	10	62	122	181	231
.40	8	57	117	176	229
.45	7	53	107	160	206
.50	4	40	82	124	160
.60	3	22	51	88	122
.70	3	19	41	66	93
.80	3	18	36	56	79
.90	1	17	35	54	72
1.00	0	7	13	20	33
1.10	0	7	13	20	33
1.20	0	6	12	19	33
1.30	0	1	1	1	13
1.40	0	0	0	0	8
1.50	0	0	0	0	2
1.60	0	0	0	0	2
1.70	0	0	0	0	1
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

B95

JAN-JUN INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 4344
NUMBER OF MISSING HOURS - 1
TOTAL HOURS OF PRECIPITATION - 172
TOTAL DAYS WITH PRECIPITATION - 46
TOTAL AMOUNT OF PRECIPITATION - 13.47 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .94 INCHES
MAXIMUM DAILY PRECIPITATION - 1.61 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION	STARTS MONTH	6 DAY	6 HOUR	24 -	.94 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION	STARTS MONTH	3 DAY	26 HOUR	6 -	1.42 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION	STARTS MONTH	3 DAY	26 HOUR	6 -	1.60 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION	STARTS MONTH	3 DAY	26 HOUR	6 -	1.61 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION	STARTS MONTH	5 DAY	2 HOUR	18 -	1.77 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 1179
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 26
TOTAL DAYS WITH PRECIPITATION - 8
TOTAL AMOUNT OF PRECIPITATION - .62 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .06 INCHES
MAXIMUM DAILY PRECIPITATION - .20 INCHES

JAN-JUN INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	172	438	706	927	1115
.02	104	357	599	814	994
.03	77	312	547	754	936
.04	59	262	470	650	807
.05	50	243	450	623	778
.07	40	199	368	529	676
.10	32	173	328	468	595
.15	20	136	274	402	512
.20	16	99	211	332	446
.25	16	78	158	250	335
.30	14	74	142	220	299
.35	12	70	136	205	274
.40	10	64	131	199	266
.45	9	60	120	180	239
.50	5	46	94	142	184
.60	4	28	63	106	146
.70	3	25	53	84	117
.80	3	24	48	74	103
.90	1	23	47	72	96
1.00	0	12	25	38	57
1.10	0	12	25	38	57
1.20	0	10	22	35	55
1.30	0	4	10	16	34
1.40	0	3	9	15	29
1.50	0	0	5	11	19
1.60	0	0	1	7	15
1.70	0	0	0	0	1
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

B97

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	7	1	.15 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.16
18	7	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .05	.00 .00	.00 .05	.00 .04	.00 .00	.00 .00	.00 .00	.00 .00	.14
18	7	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	17	.00 .29	.00 .05	.00 .02	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.20 .00	.56

B98

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	7	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	7	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.06 .00	.00 .00	.00 .00	.00 .00	.00 .00	.06
18	7	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	25	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	7	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.00 .00	.01
18	7	28	.06 .00	.07 .00	.02 .00	.00 .00	.00 .00	.09 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .09	.33
18	7	29	.07 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.07
18	7	30	.00 .00	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	7	31	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B99

MONTH OF JULY

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 19
 TOTAL DAYS WITH PRECIPITATION - 9
 TOTAL AMOUNT OF PRECIPITATION - 1.35 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .29 INCHES
 MAXIMUM DAILY PRECIPITATION - .56 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 17 HOUR 13 - .29 INCHES
 6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 17 HOUR 12 - .56 INCHES
 12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 17 HOUR 12 - .56 INCHES
 18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 17 HOUR 12 - .56 INCHES
 24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 17 HOUR 12 - .56 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 0
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 0
 TOTAL DAYS WITH PRECIPITATION - 0
 TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
 MAXIMUM DAILY PRECIPITATION - .00 INCHES

B100

MONTH OF JULY

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	19	58	100	142	178
.02	15	43	73	103	127
.03	13	42	72	102	126
.04	13	42	72	102	126
.05	12	41	71	101	125
.07	7	33	57	81	99
.10	3	24	48	72	94
.15	3	18	36	54	71
.20	2	8	20	32	49
.25	1	6	17	29	47
.30	0	6	12	18	26
.35	0	6	12	18	24
.40	0	5	11	17	23
.45	0	5	11	17	23
.50	0	4	10	16	22
.60	0	0	0	0	0
.70	0	0	0	0	0
.80	0	0	0	0	0
.90	0	0	0	0	0
1.00	0	0	0	0	0
1.10	0	0	0	0	0
1.20	0	0	0	0	0
1.30	0	0	0	0	0
1.40	0	0	0	0	0
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B101

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	8	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02
18	8	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.00 .00	.01
18	8	7	.25 .00	.13 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.39
18	8	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	14	.00 .14	.00 .08	.00 .00	.00 .00	.01 .00	.03 .00	.07 .00	.10 .00	1.22 .00	.14 .01	.01 .00	.10 .00	1.91
18	8	15	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.37 .00	.05 .00	.00 .00	.00 .00	.00 .00	.00 .00	.43
18	8	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B102

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	8	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	19	.00 .09	.00 .04	.00 .05	.00 .07	.00 .08	.00 .15	.00 .16	.00 .24	.00 .09	.00 .58	.00 .03	.00 .00	1.58
18	8	20	.01 .54	.01 .04	.00 .00	.00 .01	.00 .00	.00 .00	.00 .00	.15 .00	.07 .00	.40 .00	.06 .00	.05 .00	1.34
18	8	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.07 .00	.11 .00	.00 .00	.00 .00	.19
18	8	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	25	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02
18	8	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	28	.00 .00	.00 .24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.01 .00	.00 .19	.04 .00	.00 .00	.49
18	8	29	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	8	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	8	31	.03 .02	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.06

B103

MONTH OF AUGUST

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 53
TOTAL DAYS WITH PRECIPITATION - 12
TOTAL AMOUNT OF PRECIPITATION - 6.45 INCHES
MAXIMUM 1-HOUR PRECIPITATION - 1.22 INCHES
MAXIMUM DAILY PRECIPITATION - 1.91 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 14 HOUR 9 - 1.22 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 14 HOUR 8 - 1.71 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 14 HOUR 5 - 1.90 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 20 - 2.23 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 15 - 2.78 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 0
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 0
TOTAL DAYS WITH PRECIPITATION - 0
TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
MAXIMUM DAILY PRECIPITATION - .00 INCHES

B104

MONTH OF AUGUST

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	53	129	187	229	271
.02	39	106	171	216	258
.03	36	89	142	178	208
.04	33	78	119	160	196
.05	30	77	118	159	195
.07	26	71	113	148	178
.10	18	68	110	146	176
.15	12	64	106	142	172
.20	8	52	93	124	148
.25	6	45	84	114	139
.30	5	40	80	112	137
.35	5	37	71	101	128
.40	4	33	67	98	125
.45	3	26	45	64	85
.50	3	24	42	54	76
.60	1	22	41	53	69
.70	1	18	38	51	66
.80	1	13	35	50	63
.90	1	13	32	49	62
1.00	1	12	30	48	60
1.10	1	11	30	48	60
1.20	1	9	27	46	58
1.30	0	7	25	46	58
1.40	0	6	18	36	48
1.50	0	5	15	35	47
1.60	0	3	9	28	41
1.70	0	1	7	20	34
1.80	0	0	6	19	33
1.90	0	0	3	15	30
2.00	0	0	0	2	13

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B105

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	9	1	.00 .00	.00 .00	.00 .00	.00 .00	.03 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.04
18	9	2	.00 .03	.00 .55	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .50	.00 .32	.00 .70	2.10
18	9	3	.42 .00	.12 .00	.19 .00	.23 .00	.23 .00	.48 .00	.19 .00	.03 .00	.00 .00	.00 .00	.00 .00	.00 .00	1.89
18	9	4	.00 .16	.00 .05	.00 .10	.00 .02	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.34
18	9	5	.00 .17	.00 .01	.15 .00	.07 .00	.14 .00	.04 .00	.11 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.70
18	9	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	7	.00 .04	.00 .04	.01 .07	.01 .01	.00 .00	.01 .00	.00 .00	.01 .00	.11 .00	.01 .00	.01 .00	.02 .00	.35
18	9	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	10	.00 .00	.00 9.99	.00 9.99	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B106

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	9	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.13
18	9	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .16	.00 .09	.00 .12	.00 .03	.40
18	9	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	25	.00 .00	.00 .00	.03 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.02 .00	.03 .00	.00 .00	.11
18	9	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	9	28	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.02
18	9	29	.00 .01	.00 .00	.00 .00	.00 .01	.00 .00	.00 .00	.00 .02	.01 .01	.00 .01	.00 .00	.14 .01	.58 .01	.81
18	9	30	.00 .01	.01 .02	.02 .01	.00 .01	.00 .02	.00 .00	.00 .01	.01 .00	.00 .00	.00 .00	.01 .00	.00 .00	.13

B107

MONTH OF SEPTEMBER

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 720
NUMBER OF MISSING HOURS - 2
TOTAL HOURS OF PRECIPITATION - 72
TOTAL DAYS WITH PRECIPITATION - 12
TOTAL AMOUNT OF PRECIPITATION - 7.02 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .70 INCHES
MAXIMUM DAILY PRECIPITATION - 2.10 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY	2 HOUR 24	-	.70 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY	2 HOUR 22	-	2.25 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY	2 HOUR 22	-	3.41 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY	2 HOUR 14	-	3.93 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY	2 HOUR 13	-	3.99 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 0
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 0
TOTAL DAYS WITH PRECIPITATION - 0
TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
MAXIMUM DAILY PRECIPITATION - .00 INCHES

MONTH OF SEPTEMBER

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	72	154	203	245	282
.02	44	136	189	231	274
.03	36	127	178	214	252
.04	30	113	171	207	243
.05	27	94	160	196	232
.07	26	85	152	194	230
.10	23	77	127	186	222
.15	15	66	107	138	177
.20	9	47	88	121	151
.25	7	41	82	116	146
.30	7	40	80	114	144
.35	6	35	62	93	123
.40	6	32	60	87	111
.45	5	28	50	72	90
.50	4	28	49	70	88
.60	1	19	34	56	78
.70	1	18	32	52	78
.80	0	12	19	31	51
.90	0	11	19	25	31
1.00	0	10	18	24	30
1.10	0	10	17	23	29
1.20	0	9	16	22	28
1.30	0	9	16	22	28
1.40	0	8	15	21	27
1.50	0	7	13	19	25
1.60	0	6	13	19	25
1.70	0	5	13	19	25
1.80	0	5	13	19	25
1.90	0	4	12	18	24
2.00	0	2	12	18	24

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B109

JUL-SEP INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 2208
 NUMBER OF MISSING HOURS - 2
 TOTAL HOURS OF PRECIPITATION - 144
 TOTAL DAYS WITH PRECIPITATION - 33
 TOTAL AMOUNT OF PRECIPITATION - 14.82 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - 1.22 INCHES
 MAXIMUM DAILY PRECIPITATION - 2.10 INCHES

1	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	8	DAY	14	HOUR	9	-	1.22	INCHES
6	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	9	DAY	2	HOUR	22	-	2.25	INCHES
12	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	9	DAY	2	HOUR	22	-	3.41	INCHES
18	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	9	DAY	2	HOUR	14	-	3.93	INCHES
24	HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH	9	DAY	2	HOUR	13	-	3.99	INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 0
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 0
 TOTAL DAYS WITH PRECIPITATION - 0
 TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
 MAXIMUM DAILY PRECIPITATION - .00 INCHES

JUL-SEP INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	144	342	498	633	754
.02	98	286	440	567	682
.03	85	259	399	511	609
.04	76	233	368	482	584
.05	69	212	349	459	561
.07	59	189	322	424	514
.10	44	169	285	404	492
.15	30	148	249	334	420
.20	19	107	201	277	348
.25	14	92	183	259	332
.30	12	86	172	244	307
.35	11	78	145	212	275
.40	10	70	138	202	259
.45	8	59	106	153	198
.50	7	56	101	140	186
.60	2	41	75	109	147
.70	2	36	70	103	144
.80	1	25	54	81	114
.90	1	24	51	74	93
1.00	1	22	48	72	90
1.10	1	21	47	71	89
1.20	1	18	43	68	86
1.30	0	16	41	68	86
1.40	0	14	33	57	75
1.50	0	12	28	54	72
1.60	0	9	22	47	66
1.70	0	6	20	39	59
1.80	0	5	19	38	58
1.90	0	4	15	33	54
2.00	0	2	12	20	37

B111

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	10	1	.00 .01	.00 .02	.00 .04	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.07
18	10	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	5	.00 .00	.00 .00	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .15	.05 .46	.00 .04	.71
18	10	6	.07 .01	.04 .00	.02 .01	.16 .00	.08 .00	.09 .01	.02 .01	.00 .01	.00 .01	.00 .00	.00 .00	.02 .00	.56
18	10	7	.00 .06	.00 .00	.00 .01	.00 .01	.01 .05	.00 .16	.00 .05	.02 .01	.10 .01	.14 .02	.09 .00	.15 .01	.90
18	10	8	.02 .00	.01 .00	.00 .00	.09 .64	.03 .14	.05 .02	.01 .00	.05 .01	.03 .04	.05 .01	.00 .01	.00 .04	1.25
18	10	9	.04 .22	.05 .02	.01 .01	.02 .01	.00 .00	.03 .00	.05 .00	.05 .00	.03 .00	.03 .00	.10 .00	.25 .00	.92
18	10	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	12	.00 .00	.00 .00	.00 .00	.01 .00	.03 .00	.03 .00	.05 .00	.02 .00	.02 .01	.02 .00	.02 .00	.03 .00	.24
18	10	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	14	.00 .02	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	10	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B112

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	10	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	25	.00 .02	.00 .01	.00 .03	.00 .03	.00 .01	.01 .02	.00 .02	.00 .01	.00 .01	.00 .00	.02 .00	.02 .00	.21
18	10	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	10	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	29	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	10	31	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B113

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

MONTH OF OCTOBER

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 95
TOTAL DAYS WITH PRECIPITATION - 10
TOTAL AMOUNT OF PRECIPITATION - 4.90 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .64 INCHES
MAXIMUM DAILY PRECIPITATION - 1.25 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 8 HOUR 16 - .64 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 8 HOUR 16 - .85 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 5 HOUR 22 - 1.13 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 8 HOUR 16 - 1.19 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 8 HOUR 16 - 1.82 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 2
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 0
TOTAL DAYS WITH PRECIPITATION - 0
TOTAL AMOUNT OF PRECIPITATION - .00 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .00 INCHES
MAXIMUM DAILY PRECIPITATION - .00 INCHES

B114

MONTH OF OCTOBER

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	95	166	208	239	269
.02	64	136	177	203	227
.03	44	132	174	200	224
.04	34	118	160	182	200
.05	28	105	151	177	195
.07	17	93	131	161	180
.10	12	80	110	136	161
.15	8	63	101	126	150
.20	4	44	90	116	142
.25	3	40	80	93	105
.30	2	30	75	91	103
.35	2	28	66	90	103
.40	2	25	55	87	102
.45	2	23	51	83	100
.50	1	21	50	82	98
.60	1	16	41	69	95
.70	0	9	33	60	82
.80	0	4	26	54	77
.90	0	0	15	39	63
1.00	0	0	7	31	54
1.10	0	0	4	18	43
1.20	0	0	0	0	24
1.30	0	0	0	0	8
1.40	0	0	0	0	4
1.50	0	0	0	0	4
1.60	0	0	0	0	3
1.70	0	0	0	0	3
1.80	0	0	0	0	2
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B115

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	11	1	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	2	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	3	.00 .01	.00 .00	.00 .00	.01 .00	.06 .00	.01 .00	.00 .00	.00 .00	.04 .00	.02 .00	.01 .00	.00 .00	.16
18	11	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	11	5	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.04 .00	.09 .00	.02 .00	.01 .00	.18
18	11	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	8	.00 .00	.00 .00	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	11	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03 .00	.03
18	11	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B116

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	11	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	19	.00 .11	.00 .08	.00 .03	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.02 .00	.02 .00	.28
18	11	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	25	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.03 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.04
18	11	26	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	27	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	11	28	.00 .00	.00 .01	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	11	29	.00 .00	.00 .01	.00 .01	.00 .00	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03
18	11	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B117

MONTH OF NOVEMBER

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 720
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 30
TOTAL DAYS WITH PRECIPITATION - 9
TOTAL AMOUNT OF PRECIPITATION - .77 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .11 INCHES
MAXIMUM DAILY PRECIPITATION - .28 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 13 - .11 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 11 - .27 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 11 - .28 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 11 - .28 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 19 HOUR 11 - .28 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 337
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 3
TOTAL DAYS WITH PRECIPITATION - 2
TOTAL AMOUNT OF PRECIPITATION - .03 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .01 INCHES
MAXIMUM DAILY PRECIPITATION - .02 INCHES

MONTH OF NOVEMBER

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	30	79	133	186	232
.02	14	56	98	141	184
.03	9	47	89	131	176
.04	6	32	56	80	104
.05	4	25	43	61	80
.07	3	23	41	59	77
.10	1	15	33	51	69
.15	0	11	29	47	65
.20	0	5	11	17	23
.25	0	3	9	15	21
.30	0	0	0	0	0
.35	0	0	0	0	0
.40	0	0	0	0	0
.45	0	0	0	0	0
.50	0	0	0	0	0
.60	0	0	0	0	0
.70	0	0	0	0	0
.80	0	0	0	0	0
.90	0	0	0	0	0
1.00	0	0	0	0	0
1.10	0	0	0	0	0
1.20	0	0	0	0	0
1.30	0	0	0	0	0
1.40	0	0	0	0	0
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B119

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	12	1	.15 .01	.11 .08	.17 .12	.13 .15	.02 .13	.02 .02	.08 .01	.03 .00	.01 .01	.00 .00	.00 .02	.00 .01	1.28
18	12	2	.00 .00	.01 .00	.01 .00	.01 .00	.02 .00	.02 .00	.03 .00	.01 .00	.02 .00	.04 .00	.04 .00	.07 .00	.28
18	12	3	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	4	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	5	.00 .01	.00 .01	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01 .00	.03
18	12	6	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	7	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	8	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	9	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	10	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	11	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	12	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	13	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	14	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	15	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	16	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	17	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B120

NPPD-COOPER NUCLEAR STATION PRECIPITATION DATA FOR 2018

RAIN VERSION PC-1.0

YR	MON	DAY	1AM 1PM	2AM 2PM	3AM 3PM	4AM 4PM	5AM 5PM	6AM 6PM	7AM 7PM	8AM 8PM	9AM 9PM	10AM 10PM	11AM 11PM	12N 12MDNT	TOTAL
18	12	18	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	19	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	20	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	21	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	22	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	23	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	24	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .01	.00 .01	.00 .00	.02
18	12	25	.01 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.01
18	12	26	.00 .01	.00 .16	.00 .20	.00 .00	.00 .02	.00 .02	.00 .02	.00 .00	.00 .03	.01 .09	.03 .07	.04 .18	.88
18	12	27	.20 .00	.10 .00	.01 .02	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.03 .00	.01 .00	.00 .00	.00 .00	.37
18	12	28	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	29	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	30	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00
18	12	31	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00 .00	.00

B121

MONTH OF DECEMBER

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 744
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 55
TOTAL DAYS WITH PRECIPITATION - 7
TOTAL AMOUNT OF PRECIPITATION - 2.87 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .20 INCHES
MAXIMUM DAILY PRECIPITATION - 1.28 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 27 HOUR 1 - .20 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 21 - .67 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 26 HOUR 14 - .99 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 1 HOUR 1 - 1.23 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS DAY 1 HOUR 1 - 1.28 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 355
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 2
TOTAL DAYS WITH PRECIPITATION - 2
TOTAL AMOUNT OF PRECIPITATION - .02 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .01 INCHES
MAXIMUM DAILY PRECIPITATION - .01 INCHES

MONTH OF DECEMBER

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	55	88	106	124	142
.02	36	81	100	118	136
.03	25	71	90	108	126
.04	20	62	70	76	82
.05	17	55	69	75	81
.07	17	48	62	69	75
.10	12	43	59	65	71
.15	7	34	55	64	70
.20	2	27	49	60	66
.25	0	24	44	58	64
.30	0	21	38	50	57
.35	0	19	38	45	52
.40	0	17	36	43	50
.45	0	12	36	43	50
.50	0	8	31	38	45
.60	0	3	16	30	41
.70	0	0	8	21	36
.80	0	0	3	13	23
.90	0	0	2	11	17
1.00	0	0	0	9	16
1.10	0	0	0	7	14
1.20	0	0	0	1	3
1.30	0	0	0	0	0
1.40	0	0	0	0	0
1.50	0	0	0	0	0
1.60	0	0	0	0	0
1.70	0	0	0	0	0
1.80	0	0	0	0	0
1.90	0	0	0	0	0
2.00	0	0	0	0	0

ENTRIES INDICATE NUMBER OF DURATION PERIODS WITH RAINFALL GREATER THAN OR EQUAL TO AMOUNT SHOWN

B123

OCT-DEC INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 2208
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 180
 TOTAL DAYS WITH PRECIPITATION - 26
 TOTAL AMOUNT OF PRECIPITATION - 8.54 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .64 INCHES
 MAXIMUM DAILY PRECIPITATION - 1.28 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 10 DAY 8 HOUR 16 - .64 INCHES
 6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 10 DAY 8 HOUR 16 - .85 INCHES
 12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 10 DAY 5 HOUR 22 - 1.13 INCHES
 18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 12 DAY 1 HOUR 1 - 1.23 INCHES
 24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 10 DAY 8 HOUR 16 - 1.82 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 694
 NUMBER OF MISSING HOURS - 0
 TOTAL HOURS OF PRECIPITATION - 5
 TOTAL DAYS WITH PRECIPITATION - 4
 TOTAL AMOUNT OF PRECIPITATION - .05 INCHES
 MAXIMUM 1-HOUR PRECIPITATION - .01 INCHES
 MAXIMUM DAILY PRECIPITATION - .02 INCHES

OCT-DEC INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	180	338	458	566	666
.02	114	278	386	479	570
.03	78	255	364	456	549
.04	60	217	297	355	409
.05	49	190	274	330	379
.07	37	169	245	306	355
.10	25	143	213	269	324
.15	15	113	196	254	308
.20	6	80	160	209	253
.25	3	71	143	182	212
.30	2	54	122	156	181
.35	2	50	113	150	176
.40	2	45	100	145	173
.45	2	37	95	140	170
.50	1	31	89	134	163
.60	1	19	63	111	154
.70	0	9	45	91	134
.80	0	4	29	71	110
.90	0	0	17	53	89
1.00	0	0	7	42	78
1.10	0	0	4	26	64
1.20	0	0	0	2	34
1.30	0	0	0	0	8
1.40	0	0	0	0	4
1.50	0	0	0	0	4
1.60	0	0	0	0	3
1.70	0	0	0	0	3
1.80	0	0	0	0	2
1.90	0	0	0	0	0
2.00	0	0	0	0	0

B125

JUL-DEC INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 4416
NUMBER OF MISSING HOURS - 2
TOTAL HOURS OF PRECIPITATION - 324
TOTAL DAYS WITH PRECIPITATION - 59
TOTAL AMOUNT OF PRECIPITATION - 23.36 INCHES
MAXIMUM 1-HOUR PRECIPITATION - 1.22 INCHES
MAXIMUM DAILY PRECIPITATION - 2.10 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 8 DAY 14 HOUR 9 - 1.22 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 22 - 2.25 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 22 - 3.41 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 14 - 3.93 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 13 - 3.99 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 694
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 5
TOTAL DAYS WITH PRECIPITATION - 4
TOTAL AMOUNT OF PRECIPITATION - .05 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .01 INCHES
MAXIMUM DAILY PRECIPITATION - .02 INCHES

JUL-DEC INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	324	680	962	1216	1443
.02	212	564	830	1060	1275
.03	163	514	767	981	1181
.04	136	450	668	849	1016
.05	118	402	625	800	963
.07	96	358	568	740	892
.10	69	312	498	674	825
.15	45	261	445	588	728
.20	25	187	361	486	601
.25	17	163	326	441	544
.30	14	140	294	400	488
.35	13	128	258	362	451
.40	12	115	238	347	432
.45	10	96	201	293	368
.50	8	87	190	274	349
.60	3	60	138	220	301
.70	2	45	115	194	278
.80	1	29	83	152	224
.90	1	24	68	127	182
1.00	1	22	55	114	168
1.10	1	21	51	97	153
1.20	1	18	43	70	120
1.30	0	16	41	68	94
1.40	0	14	33	57	79
1.50	0	12	28	54	76
1.60	0	9	22	47	69
1.70	0	6	20	39	62
1.80	0	5	19	38	60
1.90	0	4	15	33	54
2.00	0	2	12	20	37

B127

JAN-DEC INDEX

FOR ALL TEMPERATURES

TOTAL NUMBER OF HOURS - 8760
NUMBER OF MISSING HOURS - 3
TOTAL HOURS OF PRECIPITATION - 496
TOTAL DAYS WITH PRECIPITATION - 105
TOTAL AMOUNT OF PRECIPITATION - 36.83 INCHES
MAXIMUM 1-HOUR PRECIPITATION - 1.22 INCHES
MAXIMUM DAILY PRECIPITATION - 2.10 INCHES

1 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 8 DAY 14 HOUR 9 - 1.22 INCHES
6 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 22 - 2.25 INCHES
12 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 22 - 3.41 INCHES
18 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 14 - 3.93 INCHES
24 HOUR PERIOD IN MONTH WITH GREATEST AMOUNT PRECIPITATION STARTS MONTH 9 DAY 2 HOUR 13 - 3.99 INCHES

FOR TEMPERATURES LESS THAN OR EQUAL TO 32 DEGREES

TOTAL NUMBER OF HOURS - 1873
NUMBER OF MISSING HOURS - 0
TOTAL HOURS OF PRECIPITATION - 31
TOTAL DAYS WITH PRECIPITATION - 12
TOTAL AMOUNT OF PRECIPITATION - .67 INCHES
MAXIMUM 1-HOUR PRECIPITATION - .06 INCHES
MAXIMUM DAILY PRECIPITATION - .20 INCHES

JAN-DEC INDEX

PRECIPITATION INTENSITY - DURATION
(NUMBER OF OCCURRENCES)

AMOUNT INCHES	DURATION (HOURS)				
	1	6	12	18	24
.01	496	1123	1679	2160	2581
.02	316	926	1440	1891	2292
.03	240	831	1325	1752	2140
.04	195	717	1149	1516	1846
.05	168	650	1086	1440	1764
.07	136	562	947	1286	1591
.10	101	490	837	1159	1443
.15	65	402	730	1007	1263
.20	41	290	582	834	1069
.25	33	245	494	707	901
.30	28	218	446	636	809
.35	25	202	404	583	747
.40	22	183	379	562	720
.45	19	160	331	489	629
.50	13	137	294	432	555
.60	7	92	211	342	469
.70	5	74	178	294	417
.80	4	57	141	242	349
.90	2	51	125	215	300
1.00	1	38	90	168	247
1.10	1	36	85	150	231
1.20	1	31	74	120	196
1.30	0	22	59	98	148
1.40	0	19	50	86	128
1.50	0	12	33	65	95
1.60	0	9	23	54	84
1.70	0	6	20	39	63
1.80	0	5	19	38	60
1.90	0	4	15	33	54
2.00	0	2	12	20	37

B129

JOINT FREQUENCY DISTRIBUTION TABLES

The tables presented in this section are results obtained from processing of the hourly meteorological data collected at the Cooper Nuclear Station (CNS). The joint frequency distribution (JFD) tables represent the frequency of occurrence, in number of observations, that a particular wind speed, wind direction, and stability category occurred simultaneously. On a quarterly and semiannual basis, the JFDs were produced for wind speed and wind direction by atmospheric stability corresponding to the seven Pasquill stability classes, and for wind speed and wind direction for all stability categories combined. Atmospheric stability was classified per Regulatory Guide 1.23, using the 100-meter to 10-meter temperature difference (ΔT) for the 100-meter JFDs and the 60-meter to 10-meter ΔT for the 10-meter JFDs.

JFDs of 10-Meter Wind vs. Delta T

January-March 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	3	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	4
12.51-18.50	5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	5
18.51-24.00	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	9	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1	11

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	4	0	0	0	3	1	0	0	0	0	0	0	0	0	0	2	10
12.51-18.50	4	0	0	0	2	0	0	1	2	0	0	0	0	0	0	4	13
18.51-24.00	0	0	0	0	0	0	1	4	0	0	0	0	0	0	0	1	6
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	2
TOTAL	8	0	0	0	5	1	1	5	2	0	0	0	0	0	0	9	31

B132

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	1	0	0	1	2	1	0	0	2	0	0	0	1	0	0	0	8
7.51-12.50	5	3	0	0	1	1	1	2	1	0	0	0	0	0	1	3	18
12.51-18.50	7	4	0	0	1	2	2	1	4	0	1	5	0	0	1	4	32
18.51-24.00	1	0	0	0	0	1	3	5	3	0	0	0	0	0	0	1	14
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	14	7	0	1	4	5	6	8	10	0	1	5	1	0	2	8	72

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	6	2	5	5	2	5	2	5	2	4	2	3	4	2	1	1	51
3.51- 7.50	28	29	23	15	22	19	11	8	2	7	14	15	10	21	19	15	258
7.51-12.50	83	28	23	13	25	32	31	24	12	21	29	8	5	9	61	99	503
12.51-18.50	59	11	2	0	15	11	15	13	15	15	15	1	3	3	41	74	293
18.51-24.00	7	0	0	0	4	6	1	3	7	6	0	0	1	11	11	45	102
>24.00	0	0	0	0	0	0	0	0	8	2	0	0	1	0	3	3	17
TOTAL	183	70	53	33	68	73	60	53	46	55	60	27	24	46	136	237	1225

B133

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	6
1.01- 3.50	8	10	3	4	2	5	4	8	8	9	3	2	5	3	1	3	78
3.51- 7.50	16	10	6	7	3	9	10	13	21	8	7	6	5	14	22	22	179
7.51-12.50	14	2	1	1	1	4	19	19	29	27	8	11	7	5	22	8	178
12.51-18.50	2	0	1	0	6	0	3	8	23	9	1	1	0	2	1	10	67
18.51-24.00	0	0	0	0	0	0	0	0	6	1	0	0	0	3	0	0	10
>24.00	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	1
TOTAL	40	22	12	12	12	18	36	48	87	54	19	20	17	27	46	43	519

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	5
1.01- 3.50	8	5	0	0	0	1	4	9	12	13	6	7	3	2	7	5	82
3.51- 7.50	4	1	0	0	0	1	2	14	30	7	3	1	3	1	7	1	75
7.51-12.50	1	0	0	0	1	1	1	0	13	1	0	0	0	1	0	0	19
12.51-18.50	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	13	6	0	0	1	3	7	23	56	21	9	8	6	5	14	6	183

B134

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	9
1.01- 3.50	9	3	1	1	4	1	5	12	20	8	6	4	3	4	3	10	94
3.51- 7.50	1	0	1	0	0	0	0	3	6	3	0	0	0	0	0	0	14
7.51-12.50	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	10	3	2	1	4	1	5	15	28	11	6	4	3	4	3	10	119

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	21
1.01- 3.50	31	20	9	10	8	12	15	34	42	34	17	16	15	11	12	19	305
3.51- 7.50	50	40	30	23	27	30	23	38	61	25	24	22	19	36	48	38	534
7.51-12.50	110	33	24	14	31	40	52	45	57	49	37	19	12	15	84	112	734
12.51-18.50	77	15	3	0	24	13	20	23	45	24	17	7	3	5	43	92	411
18.51-24.00	9	0	0	0	4	7	5	12	16	7	0	0	1	15	11	48	135
>24.00	0	0	1	0	0	0	0	0	8	2	0	0	1	0	3	5	20
TOTAL	277	108	67	47	94	102	115	152	229	141	95	64	51	82	201	314	2160

B135

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2160

TOTAL NUMBER OF VALID OBSERVATIONS: 2160

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 9.5 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.51	1.44	3.33	56.71	24.03	8.47	5.51

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	9	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1	0
B	8	0	0	0	5	1	1	5	2	0	0	0	0	0	0	9	0
C	14	7	0	1	4	5	6	8	10	0	1	5	1	0	2	8	0
D	183	70	53	33	68	73	60	53	46	55	60	27	24	46	136	237	1
E	40	22	12	12	12	18	36	48	87	54	19	20	17	27	46	43	6
F	13	6	0	0	1	3	7	23	56	21	9	8	6	5	14	6	5
G	10	3	2	1	4	1	5	15	28	11	6	4	3	4	3	10	9
TOTAL	277	108	67	47	94	102	115	152	229	141	95	64	51	82	201	314	21

B136

JFDs of 10-Meter Wind vs. Delta T

April-June 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
7.51-12.50	1	0	3	1	2	0	1	0	0	0	0	0	0	0	1	0	9
12.51-18.50	1	0	0	0	0	0	3	1	13	1	0	0	0	0	1	0	20
18.51-24.00	0	0	0	0	0	0	0	5	15	0	0	0	0	0	0	0	20
>24.00	0	0	0	0	0	0	0	1	6	3	0	0	0	0	0	0	10
TOTAL	2	0	3	1	3	0	4	7	34	4	0	0	0	0	2	0	60

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	2	1	3	4	5	1	0	0	0	0	0	0	0	0	0	1	17
7.51-12.50	1	3	1	1	4	1	4	1	1	0	0	0	0	0	0	1	18
12.51-18.50	0	0	0	0	1	2	6	7	5	5	0	0	2	3	2	0	33
18.51-24.00	1	0	0	0	0	0	0	3	2	0	0	0	0	0	0	0	6
>24.00	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1
TOTAL	4	4	4	5	10	4	10	11	8	6	0	0	2	3	2	2	75

B138

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
3.51- 7.50	6	6	5	6	3	9	3	0	0	2	0	1	3	1	3	6	54
7.51-12.50	1	3	1	7	2	5	8	5	5	2	1	3	1	0	0	3	47
12.51-18.50	2	0	0	0	0	6	6	6	2	7	0	0	1	1	2	2	35
18.51-24.00	4	0	0	0	0	0	0	1	5	0	0	0	0	0	0	0	10
>24.00	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	3
TOTAL	13	10	6	13	5	20	17	12	15	11	1	4	5	2	5	11	150

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	4	5	6	5	5	9	5	4	4	1	1	0	2	2	2	1	56
3.51- 7.50	35	33	17	17	10	31	17	17	19	18	12	6	11	14	15	17	289
7.51-12.50	65	22	11	7	14	16	36	27	27	29	8	19	21	19	21	40	382
12.51-18.50	17	7	0	0	1	9	20	27	15	20	4	5	3	10	26	45	209
18.51-24.00	2	0	0	0	0	0	1	2	7	2	0	0	0	0	6	23	43
>24.00	1	0	0	0	0	0	0	0	6	0	0	0	0	0	0	5	12
TOTAL	124	67	34	29	30	65	79	77	78	70	25	30	37	45	70	131	991

B139

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	4
1.01- 3.50	7	11	7	9	4	8	8	10	15	5	3	3	3	6	2	4	105
3.51- 7.50	24	13	9	12	15	16	15	31	49	27	11	9	4	8	11	13	267
7.51-12.50	21	6	1	1	5	12	26	24	34	18	3	8	2	5	7	7	180
12.51-18.50	6	1	3	0	2	5	7	9	10	6	0	3	1	0	1	1	55
18.51-24.00	1	0	0	1	0	0	0	2	3	3	0	0	0	0	1	2	13
>24.00	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	3
TOTAL	59	31	20	23	26	41	56	79	111	59	17	23	10	19	22	27	627

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	6
1.01- 3.50	11	9	0	4	0	3	1	8	11	11	7	4	2	7	10	10	98
3.51- 7.50	7	1	2	0	0	0	3	2	10	10	2	3	3	2	2	2	49
7.51-12.50	1	0	0	0	0	3	0	0	3	1	0	1	0	4	2	0	15
12.51-18.50	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1
18.51-24.00	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	20	10	2	4	0	6	4	11	24	22	9	8	5	13	14	13	171

B140

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	12
1.01- 3.50	11	5	1	0	0	0	0	7	6	9	5	1	4	2	9	23	83
3.51- 7.50	0	2	0	0	0	0	0	1	1	0	1	1	2	1	0	0	9
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	11	7	1	0	0	0	0	8	7	9	6	2	6	5	9	23	106

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	22
1.01- 3.50	33	31	14	18	9	20	14	29	36	26	16	8	11	17	23	38	343
3.51- 7.50	74	56	36	39	34	57	38	51	79	57	26	20	23	26	31	39	686
7.51-12.50	90	34	17	17	27	37	75	57	70	50	12	31	24	30	31	51	653
12.51-18.50	26	8	3	0	4	22	42	51	45	39	4	8	7	14	32	48	353
18.51-24.00	9	0	0	1	0	0	1	13	32	5	0	0	0	0	7	26	94
>24.00	1	0	0	0	0	0	0	4	15	4	0	0	0	0	0	5	29
TOTAL	233	129	70	75	74	136	170	205	277	181	58	67	65	87	124	207	2180

B141

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2184

TOTAL NUMBER OF VALID OBSERVATIONS: 2180

TOTAL NUMBER OF MISSING OBSERVATIONS: 4

PERCENT DATA RECOVERY FOR THIS PERIOD: 99.8 %

MEAN WIND SPEED FOR THIS PERIOD: 8.7 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
2.75	3.44	6.88	45.46	28.76	7.84	4.86

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	2	0	3	1	3	0	4	7	34	4	0	0	0	0	2	0	0
B	4	4	4	5	10	4	10	11	8	6	0	0	2	3	2	2	0
C	13	10	6	13	5	20	17	12	15	11	1	4	5	2	5	11	0
D	124	67	34	29	30	65	79	77	78	70	25	30	37	45	70	131	0
E	59	31	20	23	26	41	56	79	111	59	17	23	10	19	22	27	4
F	20	10	2	4	0	6	4	11	24	22	9	8	5	13	14	13	6
G	11	7	1	0	0	0	0	8	7	9	6	2	6	5	9	23	12
TOTAL	233	129	70	75	74	136	170	205	277	181	58	67	65	87	124	207	22

B142

JFDs of 10-Meter Wind vs. Delta T

January-June 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
7.51-12.50	4	0	3	1	2	1	1	0	0	0	0	0	0	0	1	0	13
12.51-18.50	6	0	0	0	0	0	3	1	13	1	0	0	0	0	1	0	25
18.51-24.00	1	0	0	0	0	0	0	5	15	0	0	0	0	0	0	1	22
>24.00	0	0	0	0	0	0	0	1	6	3	0	0	0	0	0	0	10
TOTAL	11	0	3	1	3	1	4	7	34	4	0	0	0	0	2	1	71

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	2	1	3	4	5	1	0	0	0	0	0	0	0	0	0	1	17
7.51-12.50	5	3	1	1	7	2	4	1	1	0	0	0	0	0	0	3	28
12.51-18.50	4	0	0	0	3	2	6	8	7	5	0	0	2	3	2	4	46
18.51-24.00	1	0	0	0	0	0	1	7	2	0	0	0	0	0	0	1	12
>24.00	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	2	3
TOTAL	12	4	4	5	15	5	11	16	10	6	0	0	2	3	2	11	106

B144

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
3.51- 7.50	7	6	5	7	5	10	3	0	2	2	0	1	4	1	3	6	62
7.51-12.50	6	6	1	7	3	6	9	7	6	2	1	3	1	0	1	6	65
12.51-18.50	9	4	0	0	1	8	8	7	6	7	1	5	1	1	3	6	67
18.51-24.00	5	0	0	0	0	1	3	6	8	0	0	0	0	0	0	1	24
>24.00	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	3
TOTAL	27	17	6	14	9	25	23	20	25	11	2	9	6	2	7	19	222

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	10	7	11	10	7	14	7	9	6	5	3	3	6	4	3	2	107
3.51- 7.50	63	62	40	32	32	50	28	25	21	25	26	21	21	35	34	32	547
7.51-12.50	148	50	34	20	39	48	67	51	39	50	37	27	26	28	82	139	885
12.51-18.50	76	18	2	0	16	20	35	40	30	35	19	6	6	13	67	119	502
18.51-24.00	9	0	0	0	4	6	2	5	14	8	0	0	1	11	17	68	145
>24.00	1	0	0	0	0	0	0	0	14	2	0	0	1	0	3	8	29
TOTAL	307	137	87	62	98	138	139	130	124	125	85	57	61	91	206	368	2216

B145

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	10
1.01- 3.50	15	21	10	13	6	13	12	18	23	14	6	5	8	9	3	7	183
3.51- 7.50	40	23	15	19	18	25	25	44	70	35	18	15	9	22	33	35	446
7.51-12.50	35	8	2	2	6	16	45	43	63	45	11	19	9	10	29	15	358
12.51-18.50	8	1	4	0	8	5	10	17	33	15	1	4	1	2	2	11	122
18.51-24.00	1	0	0	1	0	0	0	2	9	4	0	0	0	3	1	2	23
>24.00	0	0	1	0	0	0	0	3	0	0	0	0	0	0	0	0	4
TOTAL	99	53	32	35	38	59	92	127	198	113	36	43	27	46	68	70	1146

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	11
1.01- 3.50	19	14	0	4	0	4	5	17	23	24	13	11	5	9	17	15	180
3.51- 7.50	11	2	2	0	0	1	5	16	40	17	5	4	6	3	9	3	124
7.51-12.50	2	0	0	0	1	4	1	0	16	2	0	1	0	5	2	0	34
12.51-18.50	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	2
18.51-24.00	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	3
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	33	16	2	4	1	9	11	34	80	43	18	16	11	18	28	19	354

B146

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	21
1.01- 3.50	20	8	2	1	4	1	5	19	26	17	11	5	7	6	12	33	177
3.51- 7.50	1	2	1	0	0	0	0	4	7	3	1	1	2	1	0	0	23
7.51-12.50	0	0	0	0	0	0	0	0	2	0	0	0	0	2	0	0	4
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	21	10	3	1	4	1	5	23	35	20	12	6	9	9	12	33	225

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	43
1.01- 3.50	64	51	23	28	17	32	29	63	78	60	33	24	26	28	35	57	648
3.51- 7.50	124	96	66	62	61	87	61	89	140	82	50	42	42	62	79	77	1220
7.51-12.50	200	67	41	31	58	77	127	102	127	99	49	50	36	45	115	163	1387
12.51-18.50	103	23	6	0	28	35	62	74	90	63	21	15	10	19	75	140	764
18.51-24.00	18	0	0	1	4	7	6	25	48	12	0	0	1	15	18	74	229
>24.00	1	0	1	0	0	0	0	4	23	6	0	0	1	0	3	10	49
TOTAL	510	237	137	122	168	238	285	357	506	322	153	131	116	169	325	521	4340

B147

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 4344

TOTAL NUMBER OF VALID OBSERVATIONS: 4340

TOTAL NUMBER OF MISSING OBSERVATIONS: 4

PERCENT DATA RECOVERY FOR THIS PERIOD: 99.9 %

MEAN WIND SPEED FOR THIS PERIOD: 9.1 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
1.64	2.44	5.12	51.06	26.41	8.16	5.18

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	11	0	3	1	3	1	4	7	34	4	0	0	0	0	2	1	0
B	12	4	4	5	15	5	11	16	10	6	0	0	2	3	2	11	0
C	27	17	6	14	9	25	23	20	25	11	2	9	6	2	7	19	0
D	307	137	87	62	98	138	139	130	124	125	85	57	61	91	206	368	1
E	99	53	32	35	38	59	92	127	198	113	36	43	27	46	68	70	10
F	33	16	2	4	1	9	11	34	80	43	18	16	11	18	28	19	11
G	21	10	3	1	4	1	5	23	35	20	12	6	9	9	12	33	21
TOTAL	510	237	137	122	168	238	285	357	506	322	153	131	116	169	325	521	43

B148

Stability Classes by Hour of Day

10-Meter Wind vs. Delta T

January-June 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	1	1	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	F	G	G	G	G
18	1	2	G	G	G	G	G	G	G	F	F	F	E	D	D	D	D	D	D	E	E	D	D	E	E	E
18	1	3	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	F	G
18	1	4	G	G	F	F	G	G	G	F	F	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	1	5	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D
18	1	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	D	D	E	E	E
18	1	7	E	E	F	F	E	F	F	E	E	E	E	E	E	E	D	D	D	E	E	F	E	E	E	E
18	1	8	E	E	E	E	E	E	F	F	E	D	D	D	D	D	D	D	D	E	G	G	G	F	F	F
18	1	9	F	F	F	F	G	F	E	E	E	E	D	D	E	D	E	E	E	E	E	E	E	E	E	D
18	1	10	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	F	F
18	1	11	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	1	12	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	1	13	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	1	14	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	1	15	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	1	16	D	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	F	F	F	G	G	G
18	1	17	G	G	F	E	E	E	F	F	E	D	D	D	D	D	D	D	D	E	E	E	E	F	E	E
18	1	18	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	F	G	F	F	E
18	1	19	E	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	E	E	F	F	F	G	G	G
18	1	20	G	G	G	G	G	G	G	G	G	F	E	D	D	D	D	D	D	E	E	E	E	F	F	F
18	1	21	E	F	E	E	E	E	E	E	E	E	E	E	E	D	E	F	F	E	E	E	E	E	E	E
18	1	22	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	1	23	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F
18	1	24	G	G	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	F	F	F	F	F
18	1	25	F	G	G	G	G	G	G	G	F	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F
18	1	26	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	1	27	E	E	E	E	E	F	F	F	E	D	D	D	D	D	D	D	D	E	E	F	G	G	G	G
18	1	28	G	G	G	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D
18	1	29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	1	30	E	E	E	D	D	D	D	D	D	D	C	C	C	D	D	D	D	E	E	E	E	E	E	E
18	1	31	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F
18	2	1	E	D	D	D	D	D	D	D	D	D	C	B	B	B	C	D	D	D	E	E	E	E	E	E
18	2	2	E	F	F	F	G	F	E	E	E	D	C	C	C	B	C	D	D	D	E	E	E	E	E	F
18	2	3	F	F	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D	D
18	2	4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F
18	2	5	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E
18	2	6	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	7	D	E	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F
18	2	8	F	F	F	F	F	F	F	E	D	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	2	9	D	D	D	D	D	D	D	D	D	D	C	C	C	C	C	D	D	D	D	D	D	D	D	D
18	2	10	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	11	D	D	D	D	D	D	E	E	E	E	D	D	D	D	D	D	D	D	E	F	G	G	G	G
18	2	12	G	G	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	E	E	D	D	D	D
18	2	13	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	G	F	E	E	E	E
18	2	14	E	F	F	F	F	F	F	E	E	E	D	D	D	D	D	D	D	E	E	F	F	G	G	G

B150

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	2	15	G	F	F	F	F	F	F	E	E	D	D	C	D	D	D	D	D	D	D	D	D	D	D	D
18	2	16	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	2	17	E	E	E	E	E	E	E	E	E	E	D	C	C	D	D	D	D	D	E	G	G	G	F	F
18	2	18	E	F	F	F	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18	2	19	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	20	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	21	D	D	D	D	D	D	D	D	D	D	C	D	C	C	D	D	D	D	D	D	D	D	D	D
18	2	22	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	23	D	D	D	D	D	E	E	E	E	D	D	D	D	C	C	D	D	D	D	D	D	D	D	D
18	2	24	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E
18	2	25	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	G	G	G	F	G
18	2	26	G	G	F	F	F	F	E	E	E	D	D	D	D	D	D	D	E	E	F	G	G	F	F	F
18	2	27	F	F	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	E	E	E	E	E
18	2	28	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D	E	D	E
18	3	1	E	E	E	E	E	E	E	E	E	D	C	A	A	A	B	D	D	D	E	F	G	F	G	G
18	3	2	G	G	G	G	F	E	E	E	D	C	E	D	B	C	C	D	D	E	E	E	E	E	E	F
18	3	3	F	F	E	E	E	E	E	E	D	C	B	B	B	B	C	D	D	E	E	E	E	E	E	E
18	3	4	E	E	E	E	E	E	D	D	D	D	C	C	C	C	C	D	D	D	D	D	D	D	D	D
18	3	5	D	D	D	D	D	D	D	D	D	E	E	D	D	F	D	E	D	D	E	E	E	E	E	D
18	3	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	7	D	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	D	D	D	D	E	E	E	E
18	3	8	E	E	D	D	D	D	D	D	D	D	F	C	C	C	F	D	D	D	E	G	G	F	F	E
18	3	9	E	E	E	E	E	F	E	F	F	C	B	A	B	B	C	D	D	E	E	E	E	E	E	E
18	3	10	E	E	E	E	E	E	E	D	D	D	C	D	D	D	D	D	D	E	F	G	F	E	E	E
18	3	11	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	12	D	D	D	D	D	D	D	D	D	D	C	B	C	A	B	B	D	D	E	E	E	E	E	E
18	3	13	E	E	E	E	E	E	F	E	D	C	B	A	A	A	B	B	C	D	E	E	F	G	G	G
18	3	14	G	G	G	G	G	G	G	F	E	D	C	C	C	C	C	D	D	E	F	F	F	F	F	F
18	3	15	E	F	G	G	G	G	G	F	D	D	C	C	B	B	B	C	D	D	E	E	D	D	E	E
18	3	16	D	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	17	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D
18	3	18	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	19	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D
18	3	20	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	21	D	D	E	E	E	E	E	D	D	D	C	D	D	D	C	D	D	E	F	F	F	E	E	E
18	3	22	E	E	E	E	E	E	E	D	D	D	C	B	C	B	C	C	D	D	E	E	E	E	D	D
18	3	23	D	D	D	D	D	D	D	D	D	D	C	C	D	D	C	D	D	D	D	D	D	D	D	D
18	3	24	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	25	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	26	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	27	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18	3	28	F	F	F	G	F	G	G	F	E	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F
18	3	29	D	D	D	D	D	D	D	D	D	D	C	B	A	C	C	D	D	D	D	E	E	E	D	D
18	3	30	D	E	E	E	F	F	F	F	D	D	D	D	D	D	D	D	D	D	E	F	E	E	E	E
18	3	31	E	E	E	E	E	E	E	D	D	D	C	B	B	A	A	B	B	C	D	D	D	D	D	D

B151

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES

YR	MN	DY	HOURS																								
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
18	4	1	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F	
18	4	2	F	G	G	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	3	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	D	D	D	D	D	D	D	
18	4	4	D	D	D	D	D	D	D	D	D	D	C	C	C	C	C	D	D	E	E	E	E	E	F	E	
18	4	5	E	E	F	E	F	F	E	E	D	D	D	D	D	D	C	C	D	E	E	E	E	E	E	E	
18	4	6	E	D	D	D	F	D	D	D	D	D	B	C	C	C	C	D	C	D	D	D	F	D	D	D	
18	4	7	D	D	E	E	E	E	E	D	C	C	C	C	C	C	C	D	D	D	E	F	F	G	F		
18	4	8	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	4	9	D	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	
18	4	10	E	F	F	G	G	G	F	F	D	C	C	B	B	B	C	D	D	D	D	E	E	F	E	E	
18	4	11	E	E	E	E	F	F	G	F	D	D	C	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	4	12	E	E	E	E	E	F	E	D	C	C	B	B	A	B	B	C	D	D	E	E	E	E	E	E	
18	4	13	E	E	E	E	E	F	E	E	D	D	B	A	A	C	D	E	E	E	E	E	E	E	E	E	
18	4	14	D	D	D	D	D	D	D	D	D	D	D	C	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	15	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	16	D	D	D	D	E	D	D	D	D	C	C	C	C	C	C	D	F	D	F	F	G	G	G		
18	4	17	E	E	E	E	E	E	D	D	C	B	C	A	B	B	B	C	D	D	E	E	E	E	E	E	
18	4	18	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	19	D	D	E	E	E	F	E	D	B	B	C	B	B	C	B	B	C	D	D	E	E	F	F	E	
18	4	20	F	E	F	F	E	E	E	D	D	C	B	A	A	A	A	B	D	D	E	E	E	E	E	E	
18	4	21	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	4	22	E	E	E	E	E	E	E	D	D	C	C	B	C	B	A	C	D	D	E	E	F	F	F	G	
18	4	23	G	G	G	G	F	E	D	D	B	A	A	A	B	C	B	D	D	D	F	F	F	F	G	G	
18	4	24	G	G	G	G	G	G	E	D	D	C	D	C	B	D	D	D	D	D	D	D	D	D	E	D	
18	4	25	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	F	
18	4	26	F	F	G	G	G	G	F	E	D	D	D	D	D	D	D	C	D	D	E	E	E	E	E	F	
18	4	27	F	G	F	F	F	F	F	E	D	D	C	B	B	B	C	B	D	D	E	E	E	E	E	E	
18	4	28	E	E	E	E	E	E	D	D	D	C	C	B	A	B	B	C	C	D	D	E	E	E	E	E	
18	4	29	E	E	E	E	E	E	D	C	A	A	A	A	A	B	D	B	D	D	E	E	E	E	D	D	
18	4	30	E	E	E	E	D	D	D	C	C	A	A	A	A	A	A	D	D	E	E	E	E	E	E	E	
18	5	1	E	E	D	E	E	E	D	D	D	C	C	D	B	D	D	D	D	D	E	E	E	E	E	E	
18	5	2	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	
18	5	3	E	E	D	E	E	E	E	D	D	D	D	D	D	D	E	E	E	E	E	E	E	E	D	D	
18	5	4	D	D	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	G	G	
18	5	5	G	G	G	G	G	G	G	G	E	D	D	D	D	D	D	D	D	D	E	E	E	F	E	E	F
18	5	6	F	F	F	F	F	G	G	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	5	7	E	E	E	E	E	F	E	D	D	D	C	D	C	C	D	D	D	D	E	E	E	E	E	E	
18	5	8	E	E	E	E	E	E	D	D	D	C	B	A	A	A	B	D	D	D	E	E	F	G	F	F	
18	5	9	F	E	F	E	E	E	D	D	D	C	B	B	B	A	A	C	D	D	E	F	G	G	G	G	
18	5	10	G	G	G	G	F	F	E	D	D	C	C	B	B	B	C	C	C	D	E	E	E	D	E	E	
18	5	11	E	E	E	E	E	E	D	D	F	D	D	C	D	D	C	D	D	D	D	D	D	D	D	D	
18	5	12	D	E	D	D	D	D	D	D	D	C	B	C	C	D	D	D	B	D	D	D	D	D	D	D	
18	5	13	D	D	D	D	D	D	D	D	D	C	C	C	B	C	C	D	D	D	E	E	E	D	D	D	
18	5	14	D	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	E	
18	5	15	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	G	G	

B152

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
18	5	16	G	G	G	F	G	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	F		
18	5	17	E	G	F	F	G	G	F	D	D	D	C	C	C	C	D	C	D	D	D	D	D	D	E	E	E	
18	5	18	E	F	E	F	F	F	E	D	D	D	C	C	C	C	C	D	D	E	E	E	E	F	F	F		
18	5	19	G	G	F	F	E	E	E	D	D	D	D	C	B	A	A	C	C	D	D	D	D	E	E	D		
18	5	20	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	5	21	D	D	D	D	D	D	D	D	D	D	D	C	C	D	C	D	D	D	D	D	F	G	G	G	F	
18	5	22	F	E	E	E	E	E	E	D	D	D	D	C	B	B	C	B	C	D	E	E	E	F	E	E		
18	5	23	E	E	E	E	E	E	D	D	D	C	B	A	A	A	B	C	D	D	B	E	E	E	E	E		
18	5	24	E	E	E	E	E	D	D	D	D	D	C	B	A	A	A	C	C	D	C	D	D	D	D	E		
18	5	25	E	E	E	E	E	D	D	D	D	D	D	C	D	C	C	D	D	D	F	F	E	E	E	E		
18	5	26	E	E	E	E	E	F	E	D	D	C	D	C	C	C	C	B	D	D	F	G	G	G	G	F		
18	5	27	E	E	E	E	E	E	D	D	D	D	C	C	C	C	D	D	D	D	E	F	F	F	E	E		
18	5	28	F	F	G	G	G	F	E	D	D	D	C	C	C	B	B	C	D	E	E	E	E	F	E	F		
18	5	29	F	F	D	E	E	E	E	D	D	D	D	C	D	D	D	E	E	E	D	E	E	E	D	D		
18	5	30	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	-	-		
18	5	31	-	-	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	E	E	G	G	G	G		
18	6	1	F	F	G	G	G	G	E	D	D	D	C	D	B	C	B	C	C	D	D	D	E	E	E	E		
18	6	2	D	D	D	D	E	D	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F		
18	6	3	G	G	G	G	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	G	G	G	G	G		
18	6	4	G	G	G	G	G	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	
18	6	5	F	E	F	F	F	F	F	E	D	D	D	C	C	C	D	D	D	D	D	E	F	E	E	E		
18	6	6	E	E	F	F	F	F	F	E	D	D	D	B	A	A	A	A	C	D	E	F	G	F	D	E		
18	6	7	E	E	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	E	E	E	F	G	G	G	F	
18	6	8	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	E	F	F	E	E		
18	6	9	E	E	E	E	E	D	E	E	E	D	D	C	A	C	D	D	D	D	E	E	E	E	E	E	E	
18	6	10	E	E	E	E	E	E	E	E	D	D	D	C	C	C	C	D	D	D	D	E	E	E	E	E	E	
18	6	11	E	E	E	E	D	D	D	D	D	D	D	B	B	B	B	B	C	D	D	E	D	E	E	E	E	
18	6	12	E	E	F	E	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	6	13	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	6	14	D	E	E	E	E	E	E	D	D	C	C	C	C	C	C	D	D	D	D	E	E	E	E	E	E	
18	6	15	E	E	E	E	E	E	E	D	D	C	B	A	A	A	A	A	C	D	D	D	E	E	E	E	E	
18	6	16	E	E	E	E	E	E	D	D	D	B	A	A	A	A	A	B	C	D	D	E	E	E	E	E	E	
18	6	17	E	E	E	E	E	E	D	D	D	C	B	B	A	A	A	A	B	C	D	E	E	E	E	E	E	
18	6	18	E	E	E	E	E	E	D	D	D	D	C	A	A	A	B	D	D	D	D	E	E	E	E	E	E	
18	6	19	F	F	E	E	E	E	E	D	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	
18	6	20	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D	
18	6	21	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	6	22	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	E	E
18	6	23	E	E	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	6	24	E	E	E	E	F	E	E	D	D	D	D	D	D	D	D	D	E	E	D	D	E	D	D	E	E	E
18	6	25	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	F	F
18	6	26	E	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	F	G	G	G	G	G
18	6	27	G	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	6	28	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	6	29	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	F

B153

PROGRAM: JFD VERSION: PC-1.2
NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-JUN 2018
SITE IDENTIFIER: NPPD
DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

		HOURLY STABILITIES																								
		HOURS																								
YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	6	30	E	E	E	E	E	E	E	E	D	D	D	D	C	D	D	D	D	E	D	E	E	E	E	D

B154

JFDs of 10-Meter Wind vs. Delta T

July-September 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	2
12.51-18.50	0	0	0	0	0	0	0	0	12	0	0	0	0	0	0	0	12
18.51-24.00	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	2
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	12	4	0	0	0	0	0	0	16

B156

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	4	4	1	0	0	0	0	0	0	1	0	0	0	0	10
3.51- 7.50	4	4	1	1	0	0	0	0	0	0	0	0	0	0	0	0	10
7.51-12.50	3	1	0	1	0	3	1	2	4	8	2	0	0	0	0	0	25
12.51-18.50	0	0	0	0	0	0	0	1	8	1	0	0	0	0	0	1	11
18.51-24.00	0	0	0	0	0	0	0	0	2	2	0	0	0	0	0	0	4
>24.00	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1
TOTAL	7	5	5	6	1	3	1	3	14	12	2	1	0	0	0	1	61

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	7	9	20	14	19	6	9	8	5	6	4	3	5	4	2	7	128
3.51- 7.50	89	131	62	40	25	39	46	42	32	16	19	9	5	13	17	24	609
7.51-12.50	57	29	5	9	5	12	56	56	39	17	10	9	1	6	17	23	351
12.51-18.50	5	2	2	0	0	0	11	11	30	3	0	0	0	5	1	21	91
18.51-24.00	1	0	0	0	0	0	0	0	3	4	0	0	0	2	4	1	15
>24.00	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2
TOTAL	159	171	89	63	49	57	122	117	111	46	33	21	11	30	41	76	1197

B157

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	2
1.01- 3.50	20	8	5	6	5	6	12	21	33	9	5	3	10	11	18	17	189
3.51- 7.50	26	5	3	4	11	5	21	35	74	18	7	5	2	6	7	19	248
7.51-12.50	2	0	0	0	0	0	8	14	31	11	4	2	0	0	1	5	78
12.51-18.50	1	0	0	0	0	0	0	0	20	7	0	0	0	0	0	7	35
18.51-24.00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	49	13	8	10	16	11	41	70	159	45	16	10	12	17	26	48	553

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	23
1.01- 3.50	7	1	0	1	0	0	3	8	18	23	12	11	11	17	22	23	157
3.51- 7.50	2	0	0	0	1	0	0	1	40	15	1	2	0	3	8	4	77
7.51-12.50	0	0	0	0	0	0	0	0	3	0	2	0	0	0	0	1	6
12.51-18.50	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	9	1	0	1	1	0	3	9	62	38	15	13	11	20	30	28	264

B158

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	13
1.01- 3.50	6	2	0	0	0	0	0	0	13	16	8	8	4	11	15	9	92
3.51- 7.50	1	0	0	0	0	0	0	0	0	0	0	0	0	4	1	1	7
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	7	2	0	0	0	0	0	0	13	16	8	8	4	15	19	10	115

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	39
1.01- 3.50	40	20	29	25	25	12	24	37	69	54	29	26	30	43	57	56	576
3.51- 7.50	122	140	66	45	37	44	67	78	146	49	27	16	7	26	33	48	951
7.51-12.50	62	30	5	10	5	15	65	72	77	38	18	11	1	6	21	29	465
12.51-18.50	6	2	2	0	0	0	11	12	73	11	0	0	0	5	1	29	152
18.51-24.00	1	0	0	0	0	0	0	0	6	8	0	0	0	2	4	1	22
>24.00	0	0	0	0	0	0	0	0	2	1	0	0	0	0	0	0	3
TOTAL	231	192	102	80	67	71	167	199	373	161	74	53	38	82	116	163	2208

B159

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2208

TOTAL NUMBER OF VALID OBSERVATIONS: 2208

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 6.3 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.09	.72	2.76	54.21	25.05	11.96	5.21

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	12	4	0	0	0	0	0	0	0
C	7	5	5	6	1	3	1	3	14	12	2	1	0	0	0	1	0
D	159	171	89	63	49	57	122	117	111	46	33	21	11	30	41	76	1
E	49	13	8	10	16	11	41	70	159	45	16	10	12	17	26	48	2
F	9	1	0	1	1	0	3	9	62	38	15	13	11	20	30	28	23
G	7	2	0	0	0	0	0	0	13	16	8	8	4	15	19	10	13
TOTAL	231	192	102	80	67	71	167	199	373	161	74	53	38	82	116	163	39

B160

JFDs of 10-Meter Wind vs. Delta T

October-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	2
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	2

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	2	1	0	0	0	0	0	2	0	0	0	0	0	0	0	5
12.51-18.50	0	0	0	0	0	0	0	2	10	1	0	0	0	0	0	1	14
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	3
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	2	1	0	0	0	0	2	12	1	0	0	0	0	1	3	22

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	10	11	13	3	6	11	3	7	4	4	8	4	7	3	9	2	105
3.51- 7.50	33	53	22	16	12	17	39	15	34	17	26	19	17	18	18	17	373
7.51-12.50	47	11	8	11	8	8	28	13	38	25	7	15	12	33	57	68	389
12.51-18.50	58	4	0	4	1	2	6	6	13	14	3	3	2	18	53	61	248
18.51-24.00	20	7	0	1	1	0	0	0	0	6	2	0	0	0	2	14	53
>24.00	1	3	0	0	0	0	0	0	0	0	0	0	0	0	0	3	7
TOTAL	169	89	43	35	28	38	76	41	89	66	46	41	38	72	139	165	1176

B163

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	5
1.01- 3.50	8	9	8	11	10	8	6	12	24	17	5	7	5	6	11	13	160
3.51- 7.50	16	13	1	4	3	6	7	17	50	18	14	18	6	17	19	20	229
7.51-12.50	11	1	0	2	2	1	3	9	47	29	6	0	5	9	25	12	162
12.51-18.50	0	0	0	0	0	0	1	6	8	8	2	0	0	0	2	8	35
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	35	23	9	17	15	15	17	44	129	72	27	25	16	32	57	54	592

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	14
1.01- 3.50	11	9	2	5	1	0	2	13	24	24	3	8	5	8	10	14	139
3.51- 7.50	2	0	0	1	0	0	1	6	27	10	5	4	8	11	8	1	84
7.51-12.50	0	0	0	0	0	0	0	0	7	2	0	3	1	7	4	0	24
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	13	9	2	6	1	0	3	19	58	36	8	15	15	26	22	15	262

B164

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	24
1.01- 3.50	8	3	1	2	3	2	4	16	20	14	1	4	5	4	11	9	107
3.51- 7.50	0	0	0	0	0	0	0	0	2	1	2	2	0	2	0	1	10
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	2	6	0	0	8
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	8	3	1	2	3	2	4	16	22	15	3	6	7	12	11	10	149

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	44
1.01- 3.50	37	32	24	21	20	21	15	48	72	59	17	23	22	21	41	38	511
3.51- 7.50	51	66	23	21	15	23	47	38	113	46	47	43	31	48	45	39	696
7.51-12.50	58	14	9	13	10	9	31	22	94	56	13	18	20	55	86	80	588
12.51-18.50	58	4	0	4	1	2	7	14	32	24	5	3	3	18	55	70	300
18.51-24.00	20	7	0	1	1	0	0	0	0	6	2	0	0	0	3	17	57
>24.00	1	3	0	0	0	0	0	0	0	0	0	0	0	0	0	3	7
TOTAL	225	126	56	60	47	55	100	122	311	191	84	87	76	142	230	247	2203

B165

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2208

TOTAL NUMBER OF VALID OBSERVATIONS: 2203

TOTAL NUMBER OF MISSING OBSERVATIONS: 5

PERCENT DATA RECOVERY FOR THIS PERIOD: 99.8 %

MEAN WIND SPEED FOR THIS PERIOD: 7.5 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.00	.09	1.00	53.38	26.87	11.89	6.76

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0
C	0	2	1	0	0	0	0	2	12	1	0	0	0	0	1	3	0
D	169	89	43	35	28	38	76	41	89	66	46	41	38	72	139	165	1
E	35	23	9	17	15	15	17	44	129	72	27	25	16	32	57	54	5
F	13	9	2	6	1	0	3	19	58	36	8	15	15	26	22	15	14
G	8	3	1	2	3	2	4	16	22	15	3	6	7	12	11	10	24
TOTAL	225	126	56	60	47	55	100	122	311	191	84	87	76	142	230	247	44

B166

JFDs of 10-Meter Wind vs. Delta T

July-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	2
12.51-18.50	0	0	0	0	0	0	0	0	13	1	0	0	0	0	0	0	14
18.51-24.00	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	2
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	13	5	0	0	0	0	0	0	18

B168

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	4	4	1	0	0	0	0	0	0	1	0	0	0	0	10
3.51- 7.50	4	4	1	1	0	0	0	0	0	0	0	0	0	0	0	0	10
7.51-12.50	3	3	1	1	0	3	1	2	6	8	2	0	0	0	0	0	30
12.51-18.50	0	0	0	0	0	0	0	3	18	2	0	0	0	0	0	2	25
18.51-24.00	0	0	0	0	0	0	0	0	2	2	0	0	0	0	1	2	7
>24.00	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1
TOTAL	7	7	6	6	1	3	1	5	26	13	2	1	0	0	1	4	83

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	2
1.01- 3.50	17	20	33	17	25	17	12	15	9	10	12	7	12	7	11	9	233
3.51- 7.50	122	184	84	56	37	56	85	57	66	33	45	28	22	31	35	41	982
7.51-12.50	104	40	13	20	13	20	84	69	77	42	17	24	13	39	74	91	740
12.51-18.50	63	6	2	4	1	2	17	17	43	17	3	3	2	23	54	82	339
18.51-24.00	21	7	0	1	1	0	0	0	3	10	2	0	0	2	6	15	68
>24.00	1	3	0	0	0	0	0	0	2	0	0	0	0	0	0	3	9
TOTAL	328	260	132	98	77	95	198	158	200	112	79	62	49	102	180	241	2373

B169

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	7
1.01- 3.50	28	17	13	17	15	14	18	33	57	26	10	10	15	17	29	30	349
3.51- 7.50	42	18	4	8	14	11	28	52	124	36	21	23	8	23	26	39	477
7.51-12.50	13	1	0	2	2	1	11	23	78	40	10	2	5	9	26	17	240
12.51-18.50	1	0	0	0	0	0	1	6	28	15	2	0	0	0	2	15	70
18.51-24.00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1	2
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	84	36	17	27	31	26	58	114	288	117	43	35	28	49	83	102	1145

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	37
1.01- 3.50	18	10	2	6	1	0	5	21	42	47	15	19	16	25	32	37	296
3.51- 7.50	4	0	0	1	1	0	1	7	67	25	6	6	8	14	16	5	161
7.51-12.50	0	0	0	0	0	0	0	0	10	2	2	3	1	7	4	1	30
12.51-18.50	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	0	2
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	22	10	2	7	2	0	6	28	120	74	23	28	26	46	52	43	526

B170

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	37
1.01- 3.50	14	5	1	2	3	2	4	16	33	30	9	12	9	15	26	18	199
3.51- 7.50	1	0	0	0	0	0	0	0	2	1	2	2	0	6	1	2	17
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	2	6	3	0	11
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	15	5	1	2	3	2	4	16	35	31	11	14	11	27	30	20	264

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	83
1.01- 3.50	77	52	53	46	45	33	39	85	141	113	46	49	52	64	98	94	1087
3.51- 7.50	173	206	89	66	52	67	114	116	259	95	74	59	38	74	78	87	1647
7.51-12.50	120	44	14	23	15	24	96	94	171	94	31	29	21	61	107	109	1053
12.51-18.50	64	6	2	4	1	2	18	26	105	35	5	3	3	23	56	99	452
18.51-24.00	21	7	0	1	1	0	0	0	6	14	2	0	0	2	7	18	79
>24.00	1	3	0	0	0	0	0	0	2	1	0	0	0	0	0	3	10
TOTAL	456	318	158	140	114	126	267	321	684	352	158	140	114	224	346	410	4411

B171

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 4416

TOTAL NUMBER OF VALID OBSERVATIONS: 4411

TOTAL NUMBER OF MISSING OBSERVATIONS: 5

PERCENT DATA RECOVERY FOR THIS PERIOD: 99.9 %

MEAN WIND SPEED FOR THIS PERIOD: 6.9 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.05	.41	1.88	53.80	25.96	11.92	5.99

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	13	5	0	0	0	0	0	0	0
C	7	7	6	6	1	3	1	5	26	13	2	1	0	0	1	4	0
D	328	260	132	98	77	95	198	158	200	112	79	62	49	102	180	241	2
E	84	36	17	27	31	26	58	114	288	117	43	35	28	49	83	102	7
F	22	10	2	7	2	0	6	28	120	74	23	28	26	46	52	43	37
G	15	5	1	2	3	2	4	16	35	31	11	14	11	27	30	20	37
TOTAL	456	318	158	140	114	126	267	321	684	352	158	140	114	224	346	410	83

B172

Stability Classes by Hour of Day

10-Meter Wind vs. Delta T

July-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24			
18	7	1	E	E	E	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	F	G	G	G	G			
18	7	2	G	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E		
18	7	3	E	E	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E		
18	7	4	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	E	D		
18	7	5	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	7	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	D	
18	7	7	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	F	G	F	E	F		
18	7	8	F	E	E	E	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	F	F	F	F	F	
18	7	9	E	E	E	F	E	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	G	G	
18	7	10	G	G	G	G	G	G	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	
18	7	11	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	
18	7	12	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	
18	7	13	E	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	D	E	
18	7	14	E	E	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	C	F	G	G	G	G	
18	7	15	G	F	F	F	F	F	E	D	D	C	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	G	
18	7	16	G	F	F	F	F	E	G	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	
18	7	17	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	
18	7	18	E	E	E	E	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	D	E	E	D	
18	7	19	D	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	F	F	F	G	G	
18	7	20	G	F	F	F	E	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	F	F	F	G	G	
18	7	21	F	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	C	E	F	F	E	D	
18	7	22	D	E	E	E	E	E	D	D	D	D	D	D	D	D	C	D	D	D	D	D	C	D	E	E	E	E	
18	7	23	D	D	E	F	E	E	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	G	G	G	F
18	7	24	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	C	E	F	G	G	G
18	7	25	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	E
18	7	26	E	D	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	D
18	7	27	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	28	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	E	D	D	E	
18	7	29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	D	D	D	D	D	D	E	E	E	F	
18	7	30	F	E	E	E	E	E	E	D	D	D	D	D	D	D	E	D	E	D	D	D	D	E	E	E	E	E	
18	7	31	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	F	G	G	G	G
18	8	1	G	G	G	G	G	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	E	F
18	8	2	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	F	F
18	8	3	E	E	F	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	F
18	8	4	F	E	E	F	F	F	E	E	E	D	E	D	E	E	E	D	D	D	D	D	D	E	F	F	F	F	E
18	8	5	E	E	E	E	E	F	F	E	E	D	D	D	D	E	E	E	E	F	F	F	F	F	F	F	F	F	E
18	8	6	E	E	E	E	E	E	E	E	D	D	D	D	C	C	D	D	D	D	D	D	D	D	E	E	E	F	
18	8	7	F	E	E	D	E	E	E	D	D	D	D	D	C	D	D	D	D	D	D	D	D	E	F	G	G	G	G
18	8	8	G	F	F	F	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	G	F	F	F
18	8	9	G	G	F	G	G	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	G	F
18	8	10	E	E	E	E	E	E	D	D	D	D	C	D	C	C	C	D	D	D	D	D	D	F	G	G	G	G	
18	8	11	G	G	G	G	G	F	F	D	D	D	D	D	C	C	D	D	D	D	D	D	D	E	F	G	G	G	G
18	8	12	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	G	G	F	E	E
18	8	13	E	E	F	F	F	F	E	D	D	D	D	C	C	C	D	D	D	D	D	D	E	E	E	E	E	E	E

B174

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

			HOURLY STABILITIES																										
			HOURS																										
YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24			
18	8	14	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D			
18	8	15	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	E	F	E	F	F		
18	8	16	F	F	F	E	E	E	D	D	D	D	D	C	D	D	D	D	D	D	D	E	F	F	F	F	G		
18	8	17	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	F	F	G	G	F			
18	8	18	F	G	F	F	F	F	F	E	E	D	C	D	C	D	D	D	D	D	D	E	E	E	E	E	E		
18	8	19	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D	D	D		
18	8	20	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E		
18	8	21	E	E	E	E	D	D	D	D	D	D	D	D	C	D	D	D	D	D	D	F	E	E	E	E	E		
18	8	22	D	D	D	E	D	E	D	D	D	D	D	C	D	D	D	D	D	D	D	E	G	G	F	F	F		
18	8	23	F	E	E	E	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	8	24	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	G	G	G		
18	8	25	G	G	G	G	G	G	G	E	D	D	D	D	D	D	D	D	D	D	E	F	G	F	E	E	E		
18	8	26	E	E	E	E	E	E	E	E	E	E	D	D	D	E	D	E	E	E	E	E	E	E	E	E	E		
18	8	27	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E		
18	8	28	E	E	E	E	E	E	E	E	E	D	E	D	D	E	E	D	D	D	D	D	D	D	D	D	D		
18	8	29	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	E	F	E		
18	8	30	E	E	E	D	D	D	D	D	D	D	D	D	C	D	D	D	D	C	D	E	D	D	D	D	D		
18	8	31	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E		
18	9	1	E	E	E	E	E	E	F	E	E	D	D	D	D	D	E	D	D	D	E	F	E	D	D	D	D		
18	9	2	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	D
18	9	3	D	D	D	D	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	9	4	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	5	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	7	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	8	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	9	9	E	F	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	F	F	E	F	F	E	E	
18	9	10	E	F	E	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F	
18	9	11	E	E	E	F	F	E	E	E	D	D	B	B	B	A	B	B	D	D	E	F	F	E	E	E	E	E	
18	9	12	E	E	E	F	E	E	E	D	D	C	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	13	E	E	E	E	E	E	E	D	D	D	D	D	D	C	C	D	D	D	E	E	E	E	E	E	E	E	
18	9	14	E	E	E	E	E	E	E	D	D	C	C	C	B	B	B	C	C	D	E	F	F	F	F	F	G	G	
18	9	15	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	F	F	F	G	F	F	G	
18	9	16	F	F	F	F	F	F	F	F	E	D	D	D	D	C	C	D	D	D	E	F	F	F	F	F	F	E	
18	9	17	F	E	E	F	F	F	F	F	E	D	D	D	D	B	C	C	C	D	D	E	E	E	E	E	E	E	
18	9	18	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	19	E	E	E	E	E	E	E	E	E	D	D	D	C	B	B	C	D	D	E	E	E	E	E	E	E	E	
18	9	20	E	E	E	E	E	E	E	D	D	C	C	B	C	B	C	C	D	D	E	E	E	D	D	D	D	D	
18	9	21	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	D	D	D	D	E	E	E	E	D	D	D	
18	9	22	D	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	F	F	G	G	F	F	F	
18	9	23	F	F	F	F	F	F	F	E	D	D	C	D	D	D	D	D	D	D	D	F	F	F	F	F	F	F	
18	9	24	F	E	E	E	E	F	E	E	D	C	B	B	A	B	C	C	D	E	F	F	F	F	F	E	E	E	
18	9	25	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	G	G	
18	9	26	G	G	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	G	G	G	F	F	F	
18	9	27	F	F	F	F	F	F	E	E	D	D	D	C	C	C	C	D	D	D	E	F	F	F	E	D	D	D	

B175

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	9	28	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	9	29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	9	30	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	1	D	D	D	D	D	D	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	2	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	E	E	E	E
18	10	3	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	D	D	D	D	D
18	10	4	D	D	D	D	D	D	D	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	5	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	7	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E
18	10	8	E	E	E	E	D	D	E	E	E	E	E	D	D	D	E	D	E	E	E	E	E	E	E	D
18	10	9	D	D	D	D	E	E	E	E	E	E	E	E	E	E	E	E	D	E	E	E	E	D	D	D
18	10	10	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	11	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E	D
18	10	12	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	13	D	D	D	D	D	D	D	D	C	C	C	C	B	C	C	C	D	E	F	E	E	E	E	E
18	10	14	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	15	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E
18	10	16	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	G	F	G	F	G	G
18	10	17	G	G	F	F	F	G	G	F	D	E	E	D	D	D	D	D	D	F	G	G	G	G	G	G
18	10	18	G	G	G	G	F	F	F	F	D	D	D	D	D	D	D	D	D	E	F	F	E	E	E	E
18	10	19	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	E	E
18	10	20	F	G	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F
18	10	21	F	F	F	E	E	E	E	E	D	C	C	C	B	C	D	D	D	E	F	F	F	F	E	E
18	10	22	E	E	F	G	G	G	G	F	E	D	D	D	D	D	D	D	D	F	G	G	G	G	G	F
18	10	23	F	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	G	G	F	F	E	E
18	10	24	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	D	D	D
18	10	25	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	10	26	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	F	E	F
18	10	27	F	E	F	F	F	F	F	F	G	E	D	D	D	D	D	D	D	E	F	F	F	F	E	E
18	10	28	D	D	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	F	G	G	G	G	G	F
18	10	29	F	G	G	G	G	G	F	E	D	D	C	C	C	C	D	E	F	F	F	F	E	F	F	F
18	10	30	F	F	G	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18	10	31	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	F	G	G	G	G	G
18	11	1	G	G	G	G	G	F	F	F	F	E	D	D	D	D	D	D	D	F	G	G	F	F	E	E
18	11	2	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F
18	11	3	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	11	4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E
18	11	5	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	11	6	D	D	D	D	D	D	E	D	D	D	D	D	D	D	D	D	D	E	F	F	F	G	G	F
18	11	7	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D	D	D	D
18	11	8	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	11	9	D	D	E	E	E	D	D	D	D	D	D	C	C	C	C	D	D	D	D	D	D	D	E	E
18	11	10	E	D	E	E	E	E	E	D	D	D	C	C	D	D	D	D	D	E	E	E	E	E	E	E
18	11	11	F	F	G	F	E	F	E	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D

B176

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR MN DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
18 11 12	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	D	E	E	
18 11 13	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	F	F	E	E	F
18 11 14	F	E	F	E	F	F	F	E	E	D	D	D	D	D	D	D	D	E	F	E	E	E	E	E	
18 11 15	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	G	G	G	E	E	E	
18 11 16	E	E	F	F	E	E	G	F	E	D	D	D	D	D	D	D	E	F	F	F	G	G	G	G	
18 11 17	F	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 11 18	D	D	D	D	D	D	D	E	D	D	D	D	D	D	D	D	E	E	F	G	F	G	F	F	
18 11 19	G	F	G	G	E	D	E	E	E	D	D	D	D	D	D	D	D	E	E	E	D	E	D	D	
18 11 20	E	E	E	E	E	E	F	F	E	D	D	D	D	D	D	D	E	E	F	F	F	G	F	E	
18 11 21	E	E	E	F	G	G	G	G	G	E	D	D	D	D	D	D	E	E	F	G	G	G	G	G	
18 11 22	F	F	F	F	F	F	F	E	E	D	D	D	D	D	D	D	E	E	E	E	E	E	E	E	
18 11 23	E	E	E	E	E	E	E	E	E	E	E	E	E	D	D	D	D	E	E	E	F	G	G	G	
18 11 24	G	G	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	D	
18 11 25	D	D	D	D	D	D	D	D	D	-	-	-	-	-	D	D	D	D	D	D	D	D	D	D	
18 11 26	D	D	D	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 11 27	E	E	D	E	F	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D	D	
18 11 28	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	E	E	E	E	
18 11 29	F	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	D	E	E	F	F	F	
18 11 30	F	F	F	G	F	F	F	F	E	E	D	D	D	D	D	D	E	E	E	E	E	D	D	D	
18 12 1	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D	
18 12 2	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 3	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 5	E	F	F	E	E	E	E	E	E	E	D	D	D	D	D	D	E	E	F	G	G	G	G	F	
18 12 6	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	
18 12 7	F	E	E	E	E	D	E	E	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F	E	
18 12 8	F	F	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	E	F	F	E	E	E	E	
18 12 9	E	F	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	F	E	F	F	F	
18 12 10	F	F	F	F	F	F	F	F	F	D	D	D	D	D	D	D	E	E	F	F	F	E	E	E	
18 12 11	E	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	E	F	E	E	E	E	E	E	
18 12 12	E	E	E	F	F	E	E	E	E	D	D	D	D	D	D	D	E	F	F	F	F	G	G	G	
18 12 13	G	G	G	G	F	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 14	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	G	G	G	
18 12 15	G	G	G	G	G	G	G	G	F	F	D	D	D	D	D	D	D	E	G	G	G	G	F	G	
18 12 16	G	G	G	G	G	G	F	F	F	E	E	E	D	D	D	D	E	F	G	G	G	G	G	G	
18 12 17	G	G	G	G	G	G	G	G	G	F	E	D	D	D	D	D	E	F	F	G	F	F	F	E	
18 12 18	E	E	F	F	F	F	G	F	E	F	D	D	D	D	D	D	E	E	E	E	E	E	E	E	
18 12 19	E	E	E	E	E	F	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18 12 20	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18 12 21	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	F	G	F	
18 12 22	F	E	E	F	E	E	E	E	D	F	D	D	D	D	D	D	E	E	E	F	F	F	F	F	
18 12 23	F	E	F	F	F	G	F	F	E	D	D	D	D	D	D	D	E	E	E	E	F	F	F	F	
18 12 24	F	G	F	G	F	F	F	F	E	D	D	D	D	D	D	D	E	F	E	E	E	E	E	D	
18 12 25	D	D	D	D	E	E	E	E	E	D	D	D	D	D	D	D	E	E	F	F	E	E	E	E	
18 12 26	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	

B177

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS

YR MN DY	HOURLY STABILITIES																							
	HOURS																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18 12 27	D	D	D	D	E	E	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 12 28	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 12 29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18 12 30	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	E
18 12 31	E	E	E	E	E	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D

B178

JFDs of 10-Meter Wind vs. Delta T

January-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
7.51-12.50	4	0	3	1	2	1	1	0	0	0	0	0	0	0	1	0	13
12.51-18.50	6	0	0	0	0	0	3	1	15	1	0	0	0	0	1	0	27
18.51-24.00	1	0	0	0	0	0	0	5	15	0	0	0	0	0	0	1	22
>24.00	0	0	0	0	0	0	0	1	6	3	0	0	0	0	0	0	10
TOTAL	11	0	3	1	3	1	4	7	36	4	0	0	0	0	2	1	73

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	2	1	3	4	5	1	0	0	0	0	0	0	0	0	0	1	17
7.51-12.50	5	3	1	1	7	2	4	1	1	2	0	0	0	0	0	3	30
12.51-18.50	4	0	0	0	3	2	6	8	20	6	0	0	2	3	2	4	60
18.51-24.00	1	0	0	0	0	0	1	7	2	2	0	0	0	0	0	1	14
>24.00	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	2	3
TOTAL	12	4	4	5	15	5	11	16	23	11	0	0	2	3	2	11	124

B180

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	1	4	4	1	0	0	0	0	0	0	1	0	0	0	0	11
3.51- 7.50	11	10	6	8	5	10	3	0	2	2	0	1	4	1	3	6	72
7.51-12.50	9	9	2	8	3	9	10	9	12	10	3	3	1	0	1	6	95
12.51-18.50	9	4	0	0	1	8	8	10	24	9	1	5	1	1	3	8	92
18.51-24.00	5	0	0	0	0	1	3	6	10	2	0	0	0	0	1	3	31
>24.00	0	0	0	0	0	0	0	0	3	1	0	0	0	0	0	0	4
TOTAL	34	24	12	20	10	28	24	25	51	24	4	10	6	2	8	23	305

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	3
1.01- 3.50	27	27	44	27	32	31	19	24	15	15	15	10	18	11	14	11	340
3.51- 7.50	185	246	124	88	69	106	113	82	87	58	71	49	43	66	69	73	1529
7.51-12.50	252	90	47	40	52	68	151	120	116	92	54	51	39	67	156	230	1625
12.51-18.50	139	24	4	4	17	22	52	57	73	52	22	9	8	36	121	201	841
18.51-24.00	30	7	0	1	5	6	2	5	17	18	2	0	1	13	23	83	213
>24.00	2	3	0	0	0	0	0	0	16	2	0	0	1	0	3	11	38
TOTAL	635	397	219	160	175	233	337	288	324	237	164	119	110	193	386	609	4589

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	17
1.01- 3.50	43	38	23	30	21	27	30	51	80	40	16	15	23	26	32	37	532
3.51- 7.50	82	41	19	27	32	36	53	96	194	71	39	38	17	45	59	74	923
7.51-12.50	48	9	2	4	8	17	56	66	141	85	21	21	14	19	55	32	598
12.51-18.50	9	1	4	0	8	5	11	23	61	30	3	4	1	2	4	26	192
18.51-24.00	1	0	0	1	0	0	0	2	10	4	0	0	0	3	1	3	25
>24.00	0	0	1	0	0	0	0	3	0	0	0	0	0	0	0	0	4
TOTAL	183	89	49	62	69	85	150	241	486	230	79	78	55	95	151	172	2291

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	48
1.01- 3.50	37	24	2	10	1	4	10	38	65	71	28	30	21	34	49	52	476
3.51- 7.50	15	2	2	1	1	1	6	23	107	42	11	10	14	17	25	8	285
7.51-12.50	2	0	0	0	1	4	1	0	26	4	2	4	1	12	6	1	64
12.51-18.50	0	0	0	0	0	0	0	1	2	0	0	0	1	0	0	0	4
18.51-24.00	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	3
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	55	26	4	11	3	9	17	62	200	117	41	44	37	64	80	62	880

B182

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	58
1.01- 3.50	34	13	3	3	7	3	9	35	59	47	20	17	16	21	38	51	376
3.51- 7.50	2	2	1	0	0	0	0	4	9	4	3	3	2	7	1	2	40
7.51-12.50	0	0	0	0	0	0	0	0	2	0	0	0	2	8	3	0	15
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	36	15	4	3	7	3	9	39	70	51	23	20	20	36	42	53	489

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 10.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	126
1.01- 3.50	141	103	76	74	62	65	68	148	219	173	79	73	78	92	133	151	1735
3.51- 7.50	297	302	155	128	113	154	175	205	399	177	124	101	80	136	157	164	2867
7.51-12.50	320	111	55	54	73	101	223	196	298	193	80	79	57	106	222	272	2440
12.51-18.50	167	29	8	4	29	37	80	100	195	98	26	18	13	42	131	239	1216
18.51-24.00	39	7	0	2	5	7	6	25	54	26	2	0	1	17	25	92	308
>24.00	2	3	1	0	0	0	0	4	25	7	0	0	1	0	3	13	59
TOTAL	966	555	295	262	282	364	552	678	1190	674	311	271	230	393	671	931	8751

B183

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:10M WIND VS 10M DELTA T - JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 60.0 AND 10.0 METERS
 WIND MEASURED AT: 10.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 8760

TOTAL NUMBER OF VALID OBSERVATIONS: 8751

TOTAL NUMBER OF MISSING OBSERVATIONS: 9

PERCENT DATA RECOVERY FOR THIS PERIOD: 99.9 %

MEAN WIND SPEED FOR THIS PERIOD: 8.0 MPH

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 0

PERCENTAGE OCCURENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.83	1.42	3.49	52.44	26.18	10.06	5.59

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	11	0	3	1	3	1	4	7	36	4	0	0	0	0	2	1	0
B	12	4	4	5	15	5	11	16	23	11	0	0	2	3	2	11	0
C	34	24	12	20	10	28	24	25	51	24	4	10	6	2	8	23	0
D	635	397	219	160	175	233	337	288	324	237	164	119	110	193	386	609	3
E	183	89	49	62	69	85	150	241	486	230	79	78	55	95	151	172	17
F	55	26	4	11	3	9	17	62	200	117	41	44	37	64	80	62	48
G	36	15	4	3	7	3	9	39	70	51	23	20	20	36	42	53	58
TOTAL	966	555	295	262	282	364	552	678	1190	674	311	271	230	393	671	931	126

B184

JFDs of 100-Meter Wind vs. Delta T

January-March 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

B186

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	2	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	5
12.51-18.50	5	0	0	0	1	2	0	0	0	0	0	0	0	0	0	0	8
18.51-24.00	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1
>24.00	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	1	3
TOTAL	7	0	0	0	4	2	0	3	0	0	0	0	0	0	0	1	17

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	4	1	3	3	1	3	1	3	0	1	3	1	2	1	27
3.51- 7.50	13	9	8	9	9	14	13	3	3	4	8	18	10	9	12	13	155
7.51-12.50	34	16	25	12	16	18	23	10	7	12	12	7	7	11	37	53	300
12.51-18.50	87	21	12	10	17	23	22	16	29	11	23	9	6	4	45	115	450
18.51-24.00	37	10	3	0	8	13	10	13	14	12	10	6	1	2	32	63	234
>24.00	13	1	0	0	8	18	7	9	19	7	0	1	3	15	13	49	163
TOTAL	184	57	52	32	61	89	76	54	73	49	53	42	30	42	141	294	1329

B187

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	2	0	2	0	0	1	2	1	0	1	0	2	0	2	1	0	14
3.51- 7.50	2	2	1	3	2	6	6	2	1	3	0	1	3	4	1	1	38
7.51-12.50	6	4	1	11	11	22	9	16	8	9	4	3	4	5	7	17	137
12.51-18.50	16	6	4	4	4	5	11	17	41	32	19	5	8	9	17	28	226
18.51-24.00	2	0	0	0	2	3	4	20	21	10	13	5	4	6	16	5	111
>24.00	0	0	0	0	2	2	1	3	10	3	0	0	3	1	2	0	27
TOTAL	28	12	8	18	21	39	33	59	81	58	36	16	22	27	44	51	553

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	2
1.01- 3.50	0	0	1	0	0	1	0	1	0	2	0	0	1	1	2	1	10
3.51- 7.50	3	3	2	4	0	1	1	2	2	2	0	2	2	2	0	1	27
7.51-12.50	7	1	3	4	3	2	0	7	9	6	9	3	6	3	3	0	66
12.51-18.50	0	0	1	0	0	1	2	6	17	16	7	2	0	4	1	1	58
18.51-24.00	0	0	0	0	0	0	0	4	6	1	1	1	0	2	2	0	17
>24.00	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	2
TOTAL	10	4	7	8	3	5	3	20	36	27	17	8	9	12	8	3	182

B188

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	1	0	0	0	0	1	0	0	2	1	0	0	1	6
3.51- 7.50	1	0	2	5	1	2	0	2	1	1	2	2	1	0	0	0	20
7.51-12.50	0	2	4	0	3	3	1	0	2	9	8	0	1	4	2	0	39
12.51-18.50	0	0	0	0	0	0	0	0	1	7	2	1	0	1	0	0	12
18.51-24.00	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	2
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	1	2	6	6	4	5	1	2	5	17	13	6	3	5	2	1	79

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	2
1.01- 3.50	2	0	7	2	3	5	3	5	2	6	0	5	5	4	5	3	57
3.51- 7.50	19	14	13	21	12	23	20	9	7	10	10	23	16	15	13	15	240
7.51-12.50	49	23	33	27	36	45	33	33	26	36	33	13	18	23	49	70	547
12.51-18.50	108	27	17	14	22	31	35	39	88	66	51	17	14	18	63	144	754
18.51-24.00	39	10	3	0	10	16	14	38	41	23	25	13	5	10	50	68	365
>24.00	13	1	0	0	10	20	8	14	31	10	0	1	6	16	15	50	195
TOTAL	230	75	73	64	93	140	113	138	195	151	119	72	64	86	195	350	2160

B189

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-MAR 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 3/31/18

*** JAN-MAR 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2160

TOTAL NUMBER OF VALID OBSERVATIONS: 2160

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 14.7 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 1

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 0

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 1

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.00	.00	.79	61.53	25.60	8.43	3.66

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C	7	0	0	0	4	2	0	3	0	0	0	0	0	0	0	1	0
D	184	57	52	32	61	89	76	54	73	49	53	42	30	42	141	294	0
E	28	12	8	18	21	39	33	59	81	58	36	16	22	27	44	51	0
F	10	4	7	8	3	5	3	20	36	27	17	8	9	12	8	3	2
G	1	2	6	6	4	5	1	2	5	17	13	6	3	5	2	1	0
TOTAL	230	75	73	64	93	140	113	138	195	151	119	72	64	86	195	350	2

B190

JFDs of 100-Meter Wind vs. Delta T

April-June 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	5
TOTAL	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	5

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	1	0	3	0	0	0	0	0	0	0	4
18.51-24.00	0	0	0	0	0	0	0	0	7	1	0	0	0	0	0	0	8
>24.00	0	0	0	0	0	0	0	2	5	0	0	0	0	0	0	0	7
TOTAL	0	0	0	0	1	0	1	2	15	1	0	0	0	0	0	0	20

B192

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	2	0	0	4	4	0	0	0	0	0	0	0	0	0	0	0	10
7.51-12.50	0	0	4	1	4	0	0	0	0	0	0	0	0	0	0	0	5
12.51-18.50	0	0	1	0	5	0	3	1	7	1	0	0	0	0	2	0	20
18.51-24.00	0	0	0	0	0	0	0	3	8	2	0	0	0	0	0	0	13
>24.00	0	0	0	0	0	0	0	1	4	2	0	0	0	0	0	0	7
TOTAL	2	0	5	5	9	0	3	5	19	5	0	0	0	0	2	0	55

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	3	3	4	2	6	0	3	3	3	4	0	0	1	1	2	3	38
3.51- 7.50	20	17	10	12	6	18	17	7	8	15	7	6	11	12	8	13	187
7.51-12.50	44	25	11	17	13	24	42	21	30	29	13	18	15	19	13	28	362
12.51-18.50	38	14	10	16	17	14	28	35	19	31	6	8	11	12	31	49	339
18.51-24.00	17	7	1	0	3	8	15	19	12	12	0	1	4	11	19	30	159
>24.00	9	0	0	0	1	2	0	7	26	5	0	1	1	0	9	24	85
TOTAL	131	66	36	47	46	66	105	92	98	96	26	34	43	55	82	147	1170

B193

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	2	1	2	1	0	1	3	3	1	1	2	0	0	1	0	18
3.51- 7.50	6	5	5	4	3	2	5	9	8	2	3	2	3	1	2	4	64
7.51-12.50	10	2	11	7	12	22	20	24	35	13	3	5	8	4	2	15	193
12.51-18.50	25	5	10	7	17	15	15	38	43	24	14	14	3	3	8	10	251
18.51-24.00	8	3	1	1	2	6	23	10	19	14	0	5	4	0	1	1	98
>24.00	7	1	2	1	3	2	11	5	18	4	1	1	1	0	0	3	60
TOTAL	56	18	30	22	38	47	75	89	126	58	22	29	19	8	14	33	684

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	1	2	0	1	0	2	1	1	0	1	0	1	0	1	0	11
3.51- 7.50	1	1	6	5	3	4	6	4	6	1	1	1	1	0	1	1	42
7.51-12.50	2	1	2	7	1	7	9	5	9	10	3	6	4	5	2	2	75
12.51-18.50	0	1	1	2	2	1	0	1	3	5	5	8	4	2	4	4	43
18.51-24.00	0	0	0	0	0	1	0	0	0	1	3	1	1	1	7	3	18
>24.00	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1
TOTAL	3	4	11	14	7	13	17	12	19	17	13	16	11	8	15	10	190

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	2
3.51- 7.50	1	2	3	3	2	3	2	3	1	3	0	1	0	1	0	1	26
7.51-12.50	2	1	4	2	0	0	0	1	3	2	1	3	0	4	0	2	25
12.51-18.50	0	0	0	0	0	0	0	0	0	0	1	2	0	0	0	0	3
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	1	3	0	4
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	3	3	7	5	2	4	2	5	4	5	2	6	0	6	3	3	60

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	3	6	7	4	8	1	6	8	7	5	2	2	2	1	4	3	69
3.51- 7.50	30	25	24	28	19	27	30	23	23	21	11	10	15	14	11	19	330
7.51-12.50	58	29	32	34	26	53	71	51	77	54	20	32	27	32	17	47	660
12.51-18.50	63	20	22	25	41	30	47	75	75	61	26	32	18	17	45	63	660
18.51-24.00	25	10	2	1	5	15	38	32	46	30	3	7	9	13	30	34	300
>24.00	16	1	2	1	4	4	11	17	55	13	1	2	2	0	9	27	165
TOTAL	195	91	89	93	103	130	203	206	283	184	63	85	73	77	116	193	2184

B195

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T APR-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 4/ 1/18 - 6/30/18

*** APR-JUN 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2184

TOTAL NUMBER OF VALID OBSERVATIONS: 2184

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 13.7 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 2

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 0

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 2

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.23	.92	2.52	53.57	31.32	8.70	2.75

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	0
B	0	0	0	0	1	0	1	2	15	1	0	0	0	0	0	0	0
C	2	0	5	5	9	0	3	5	19	5	0	0	0	0	2	0	0
D	131	66	36	47	46	66	105	92	98	96	26	34	43	55	82	147	0
E	56	18	30	22	38	47	75	89	126	58	22	29	19	8	14	33	0
F	3	4	11	14	7	13	17	12	19	17	13	16	11	8	15	10	0
G	3	3	7	5	2	4	2	5	4	5	2	6	0	6	3	3	0
TOTAL	195	91	89	93	103	130	203	206	283	184	63	85	73	77	116	193	0

B196

JFDs of 100-Meter Wind vs. Delta T

January-June 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	5
TOTAL	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	5

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	1	0	3	0	0	0	0	0	0	0	4
18.51-24.00	0	0	0	0	0	0	0	0	7	1	0	0	0	0	0	0	8
>24.00	0	0	0	0	0	0	0	2	5	0	0	0	0	0	0	0	7
TOTAL	0	0	0	0	1	0	1	2	15	1	0	0	0	0	0	0	20

B198

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	2	0	0	4	4	0	0	0	0	0	0	0	0	0	0	0	10
7.51-12.50	2	0	4	1	3	0	0	0	0	0	0	0	0	0	0	0	10
12.51-18.50	5	0	1	0	6	2	3	1	7	1	0	0	0	0	2	0	28
18.51-24.00	0	0	0	0	0	0	0	4	8	2	0	0	0	0	0	0	14
>24.00	0	0	0	0	0	0	0	3	4	2	0	0	0	0	0	1	10
TOTAL	9	0	5	5	13	2	3	8	19	5	0	0	0	0	2	1	72

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	3	3	8	3	9	3	4	6	4	7	0	1	4	2	4	4	65
3.51- 7.50	33	26	18	21	15	32	30	10	11	19	15	24	21	21	20	26	342
7.51-12.50	78	41	36	29	29	42	65	31	37	41	25	25	22	30	50	81	662
12.51-18.50	125	35	22	26	34	37	50	51	48	42	29	17	17	16	76	164	789
18.51-24.00	54	17	4	0	11	21	25	32	26	24	10	7	5	13	51	93	393
>24.00	22	1	0	0	9	20	7	16	45	12	0	2	4	15	22	73	248
TOTAL	315	123	88	79	107	155	181	146	171	145	79	76	73	97	223	441	2499

B199

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	2	2	3	2	1	1	3	4	3	2	1	4	0	2	2	0	32
3.51- 7.50	8	7	6	7	5	8	11	11	9	5	3	3	6	5	3	5	102
7.51-12.50	16	6	12	18	23	44	29	40	43	22	7	8	12	9	9	32	330
12.51-18.50	41	11	14	11	21	20	26	55	84	56	33	19	11	12	25	38	477
18.51-24.00	10	3	1	1	4	9	27	30	40	24	13	10	8	6	17	6	209
>24.00	7	1	2	1	5	4	12	8	28	7	1	1	4	1	2	3	87
TOTAL	84	30	38	40	59	86	108	148	207	116	58	45	41	35	58	84	1237

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	2
1.01- 3.50	0	1	3	0	1	1	2	2	1	2	1	0	2	1	3	1	21
3.51- 7.50	4	4	8	9	3	5	7	6	8	3	1	3	3	2	1	2	69
7.51-12.50	9	2	5	11	4	9	9	12	18	16	12	9	10	8	5	2	141
12.51-18.50	0	1	2	2	2	2	2	7	20	21	12	10	4	6	5	5	101
18.51-24.00	0	0	0	0	0	1	0	4	6	2	4	2	1	3	9	3	35
>24.00	0	0	0	0	0	0	0	1	2	0	0	0	0	0	0	0	3
TOTAL	13	8	18	22	10	18	20	32	55	44	30	24	20	20	23	13	372

B200

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	1	0	1	0	1	1	0	0	2	1	0	0	1	8
3.51- 7.50	2	2	5	8	3	5	2	5	2	4	2	3	1	1	0	1	46
7.51-12.50	2	3	8	2	3	3	1	1	5	11	9	3	1	8	2	2	64
12.51-18.50	0	0	0	0	0	0	0	0	1	7	3	3	0	1	0	0	15
18.51-24.00	0	0	0	0	0	0	0	0	0	0	1	1	0	1	3	0	6
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	4	5	13	11	6	9	3	7	9	22	15	12	3	11	5	4	139

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	2
1.01- 3.50	5	6	14	6	11	6	9	13	9	11	2	7	7	5	9	6	126
3.51- 7.50	49	39	37	49	31	50	50	32	30	31	21	33	31	29	24	34	570
7.51-12.50	107	52	65	61	62	98	104	84	103	90	53	45	45	55	66	117	1207
12.51-18.50	171	47	39	39	63	61	82	114	163	127	77	49	32	35	108	207	1414
18.51-24.00	64	20	5	1	15	31	52	70	87	53	28	20	14	23	80	102	665
>24.00	29	2	2	1	14	24	19	31	86	23	1	3	8	16	24	77	360
TOTAL	425	166	162	157	196	270	316	344	478	335	182	157	137	163	311	543	4344

B201

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18

*** JAN-JUN 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 4344

TOTAL NUMBER OF VALID OBSERVATIONS: 4344

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 14.2 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 3

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 0

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 3

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.12	.46	1.66	57.53	28.48	8.56	3.20

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	0
B	0	0	0	0	1	0	1	2	15	1	0	0	0	0	0	0	0
C	9	0	5	5	13	2	3	8	19	5	0	0	0	0	2	1	0
D	315	123	88	79	107	155	181	146	171	145	79	76	73	97	223	441	0
E	84	30	38	40	59	86	108	148	207	116	58	45	41	35	58	84	0
F	13	8	18	22	10	18	20	32	55	44	30	24	20	20	23	13	2
G	4	5	13	11	6	9	3	7	9	22	15	12	3	11	5	4	0
TOTAL	425	166	162	157	196	270	316	344	478	335	182	157	137	163	311	543	2

B202

Stability Classes by Hour of Day

100-Meter Wind vs. Delta T

January-June 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
18	1	1	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	F	F	F	F	G		
18	1	2	G	G	G	G	G	G	G	F	F	E	E	D	D	D	D	D	D	E	E	E	E	E	E	E		
18	1	3	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F		
18	1	4	F	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E		
18	1	5	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D		
18	1	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	E	E	E		
18	1	7	E	E	F	F	F	F	F	F	E	E	E	E	E	E	D	D	D	E	E	F	F	E	E	E		
18	1	8	E	E	E	E	E	E	F	F	G	F	E	D	D	D	D	D	D	E	F	F	F	F	E	E		
18	1	9	F	F	F	F	F	E	E	E	E	E	E	D	D	D	D	D	E	E	E	E	E	E	E	D		
18	1	10	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F		
18	1	11	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	1	12	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	1	13	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	1	14	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	1	15	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	1	16	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	G	G		
18	1	17	G	G	F	F	E	F	F	F	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E		
18	1	18	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	F	F	F	E		
18	1	19	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	E	E	E	F	G	G	G	G		
18	1	20	G	G	G	G	G	G	F	F	G	F	E	E	D	D	D	D	E	E	E	E	E	F	E	E	F	
18	1	21	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	F	E	E	E	E		
18	1	22	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	1	23	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	
18	1	24	F	G	F	F	E	E	E	E	F	E	D	D	D	D	D	D	D	D	E	E	F	F	F	F		
18	1	25	F	F	F	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	E	F	F	F	E	E	E	
18	1	26	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E		
18	1	27	E	E	E	F	F	E	F	F	E	D	D	D	D	D	D	D	D	D	E	E	F	G	G	G	G	
18	1	28	G	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	1	29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	1	30	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	1	31	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F		
18	2	1	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	2	2	E	E	E	F	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	2	3	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	D	D	D	D	
18	2	4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	F	
18	2	5	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	2	6	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	2	7	D	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	2	8	F	F	F	F	F	F	F	F	E	E	E	E	D	D	D	D	D	D	D	E	E	E	E	E	E	
18	2	9	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	2	10	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	2	11	D	D	D	D	D	D	E	E	E	E	D	D	D	D	D	D	D	D	E	E	F	G	G	G	G	
18	2	12	G	G	G	G	G	F	G	G	F	E	E	D	D	D	D	D	D	D	D	E	E	E	D	D	D	D
18	2	13	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	E	E	E	E
18	2	14	E	F	F	F	E	F	E	E	E	D	D	D	D	D	D	D	D	E	E	F	F	F	F	G	G	

B204

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	2	15	G	F	G	F	G	G	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	16	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	2	17	E	E	E	E	E	D	E	E	E	D	D	D	D	D	D	D	D	D	E	F	F	F	F	E
18	2	18	E	F	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	2	19	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	20	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	21	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	22	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	23	D	D	D	D	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	2	24	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18	2	25	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	F	F	G	F
18	2	26	G	G	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F
18	2	27	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	E	E	E	E	E
18	2	28	E	E	E	D	D	E	E	D	D	D	D	D	D	D	D	D	D	E	D	D	D	E	D	D
18	3	1	D	D	D	E	E	E	E	E	E	D	D	D	D	C	D	D	D	D	E	F	F	F	G	G
18	3	2	G	G	G	G	F	E	E	E	D	D	D	D	C	D	D	D	D	D	E	F	E	E	E	F
18	3	3	F	F	F	E	E	E	E	E	E	D	D	D	C	C	D	D	D	D	E	E	E	E	E	E
18	3	4	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	5	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D
18	3	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	7	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	8	E	E	E	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E
18	3	9	E	E	E	E	E	E	E	E	E	D	D	D	C	C	C	C	D	D	D	E	E	E	E	E
18	3	10	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E
18	3	11	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	12	D	D	D	D	D	D	D	D	D	D	D	D	D	C	D	D	D	D	E	E	E	E	E	E
18	3	13	E	E	E	E	E	E	E	E	D	D	D	D	C	C	C	D	D	D	E	E	E	F	G	G
18	3	14	G	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	D	E	F	F	F	F	E
18	3	15	E	E	F	G	G	G	G	G	E	D	D	D	C	C	D	D	D	D	E	E	D	D	D	D
18	3	16	D	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D
18	3	17	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	18	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	19	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D
18	3	20	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	21	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E
18	3	22	E	E	E	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D
18	3	23	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	24	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	25	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	26	D	D	D	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	3	27	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18	3	28	F	F	F	F	F	G	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F
18	3	29	D	D	D	D	D	D	D	D	D	D	D	C	D	D	D	D	D	D	D	E	E	E	E	D
18	3	30	D	E	E	E	E	F	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	3	31	D	E	E	D	D	E	E	D	D	D	D	D	D	C	D	D	D	D	D	D	D	D	D	D

B205

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
18	4	1	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	
18	4	2	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	3	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	4	5	E	E	E	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	4	6	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	7	D	D	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	
18	4	8	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	9	D	D	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	
18	4	10	E	E	F	F	G	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	4	11	E	E	E	E	E	F	G	F	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	4	12	E	E	F	E	E	F	E	D	D	D	C	C	C	D	D	D	D	D	D	E	E	E	E	E	
18	4	13	E	E	E	E	E	E	E	E	D	D	D	C	B	D	D	E	E	E	D	E	E	E	E	E	
18	4	14	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	15	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	16	D	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	
18	4	17	E	E	E	E	E	E	D	D	D	D	C	D	C	C	D	D	D	D	D	E	E	E	E	E	
18	4	18	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	4	19	D	D	E	E	E	F	E	D	D	D	D	C	D	C	C	D	D	D	D	E	E	F	E	E	
18	4	20	F	F	F	F	F	F	E	E	D	D	D	C	B	C	C	D	D	D	D	E	E	E	E	E	
18	4	21	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18	4	22	E	E	E	E	E	E	E	E	D	D	D	D	C	C	D	D	D	D	D	E	E	F	F	F	
18	4	23	F	F	G	F	F	G	F	E	D	D	D	C	C	C	C	D	D	D	D	E	F	F	F	F	
18	4	24	G	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	D	E	D
18	4	25	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	
18	4	26	F	F	G	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	4	27	F	F	F	F	F	F	G	F	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	4	28	E	E	E	E	E	E	D	D	D	C	C	C	B	C	C	C	D	D	D	D	E	E	E	E	E
18	4	29	E	E	E	E	E	E	E	D	D	C	C	B	B	A	C	D	D	D	D	D	E	E	E	D	D
18	4	30	E	E	E	E	D	D	D	D	D	C	A	A	A	A	B	C	D	D	D	E	E	E	E	E	
18	5	1	E	D	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	5	2	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	5	3	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	D	D	D
18	5	4	D	D	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	G	G	G
18	5	5	G	G	G	G	G	G	G	F	E	D	D	D	D	D	D	E	D	D	D	E	E	E	E	E	F
18	5	6	F	F	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18	5	7	E	E	E	E	E	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	5	8	E	E	E	E	E	E	D	D	D	D	D	D	B	B	C	C	D	D	D	E	E	E	F	F	F
18	5	9	F	F	F	F	F	F	E	D	D	D	D	D	C	C	C	D	D	D	D	E	F	G	G	G	G
18	5	10	G	G	G	G	F	F	F	E	D	D	D	C	D	D	D	D	D	D	D	D	E	E	D	E	E
18	5	11	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	5	12	D	E	D	D	D	D	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D
18	5	13	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	5	14	E	E	E	E	E	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	E
18	5	15	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F

B206

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES

YR	MN	DY	HOURS																							
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	5	16	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	
18	5	17	E	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	
18	5	18	E	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F		
18	5	19	F	F	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E		
18	5	20	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	5	21	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G		
18	5	22	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	5	23	E	E	E	E	E	E	E	D	D	D	D	C	C	B	D	D	D	D	E	E	E	E		
18	5	24	E	E	E	E	E	E	D	D	D	D	C	C	C	D	D	D	D	D	D	D	D	E		
18	5	25	E	E	E	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	E	E		
18	5	26	E	E	E	E	E	F	E	D	D	D	D	D	D	D	D	D	D	E	G	G	G	F		
18	5	27	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F		
18	5	28	F	E	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F		
18	5	29	F	F	E	E	E	E	E	D	D	D	D	D	D	D	E	F	E	E	E	E	E	D		
18	5	30	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F		
18	5	31	F	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	E	G	F	G		
18	6	1	F	F	G	G	G	G	F	E	D	D	D	D	D	C	D	D	D	D	D	E	E	E		
18	6	2	D	D	D	D	E	D	E	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F		
18	6	3	G	G	G	F	F	F	F	D	D	D	D	D	D	D	D	D	D	E	F	G	G	G		
18	6	4	G	G	G	G	G	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E		
18	6	5	E	E	E	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	6	E	E	F	F	F	F	F	E	D	D	D	C	C	B	C	C	D	D	E	F	F	D		
18	6	7	E	E	F	F	E	E	F	E	D	D	D	D	D	D	D	D	D	E	E	F	F	F		
18	6	8	E	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E		
18	6	9	E	E	E	E	D	E	E	E	E	D	D	C	D	D	D	D	D	E	E	E	F	E		
18	6	10	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E		
18	6	11	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E		
18	6	12	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	13	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	14	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	15	E	E	E	E	E	E	E	D	D	D	D	C	B	B	C	C	D	D	D	D	E	E		
18	6	16	E	E	E	E	E	E	E	D	D	D	B	B	B	B	C	D	D	D	D	E	E	E		
18	6	17	E	E	E	E	E	E	E	D	D	D	C	C	B	C	B	C	D	D	D	E	E	E		
18	6	18	E	E	E	E	E	E	D	D	D	D	B	B	C	D	D	D	D	E	E	E	E	E		
18	6	19	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	20	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	6	21	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	6	22	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E		
18	6	23	E	E	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	24	E	E	E	E	F	E	E	D	D	D	D	D	D	D	E	E	D	D	E	D	E	E		
18	6	25	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	26	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G		
18	6	27	G	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E		
18	6	28	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E		
18	6	29	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E		

B207

PROGRAM: JFD VERSION: PC-1.2
NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-JUN 2018
SITE IDENTIFIER: NPPD
DATA PERIOD EXAMINED: 1/ 1/18 - 6/30/18
STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

		HOURLY STABILITIES																								
		HOURS																								
YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	6	30	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	D	E	E	E	E	E

B208

JFDs of 100-Meter Wind vs. Delta T

July-September 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

B210

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
18.51-24.00	0	0	0	0	0	0	0	0	3	1	0	0	0	0	0	0	4
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	4	1	0	0	0	0	0	0	5

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	2	9	15	6	4	10	2	4	3	3	4	4	4	2	0	2	74
3.51- 7.50	36	40	29	19	14	26	16	20	23	12	14	6	6	8	17	15	301
7.51-12.50	68	62	51	37	16	19	46	55	32	21	14	18	0	1	16	23	479
12.51-18.50	30	20	26	10	1	6	24	34	42	17	7	1	0	7	3	17	245
18.51-24.00	5	2	4	0	0	0	10	2	28	4	0	0	1	3	5	12	76
>24.00	1	0	0	0	0	0	0	0	8	12	0	0	0	3	4	6	34
TOTAL	142	133	125	72	35	61	98	115	136	69	39	29	11	24	45	75	1209

B211

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	1	4	2	7	5	0	4	6	0	0	2	2	0	0	1	2	36
3.51- 7.50	6	3	11	9	9	10	11	9	9	2	5	8	3	3	3	8	109
7.51-12.50	24	17	11	11	11	20	33	35	37	19	6	4	1	1	2	17	249
12.51-18.50	13	2	0	2	4	3	12	39	74	22	6	4	1	3	5	12	202
18.51-24.00	0	0	0	0	0	0	3	5	23	12	0	1	0	0	0	4	48
>24.00	0	0	0	0	0	0	0	0	10	6	0	1	0	0	0	1	18
TOTAL	44	26	24	29	29	33	63	94	153	61	19	20	5	7	11	44	662

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	2	3	3	1	3	3	3	2	2	0	0	1	0	2	2	0	27
3.51- 7.50	6	12	6	4	2	5	8	9	9	3	1	1	2	2	0	5	75
7.51-12.50	3	2	2	0	1	7	4	21	27	10	5	1	0	1	3	4	91
12.51-18.50	0	0	1	0	1	1	4	9	16	10	3	5	0	0	7	6	63
18.51-24.00	0	0	0	0	0	0	0	0	5	3	2	0	0	0	2	2	14
>24.00	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1
TOTAL	11	17	12	5	7	16	19	41	59	26	12	8	2	5	14	17	272

B212

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	1	0	0	0	0	0	1	1	0	2	2	7
3.51- 7.50	0	3	4	4	0	0	2	1	0	3	3	5	2	0	0	0	27
7.51-12.50	0	2	2	0	0	0	0	2	3	3	4	4	0	0	0	0	20
12.51-18.50	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1	0	3
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	3
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	5	6	4	0	1	2	4	4	6	7	10	3	0	4	4	60

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	5	16	20	14	12	14	9	12	5	3	6	8	5	4	5	6	144
3.51- 7.50	48	58	50	36	25	41	37	39	41	20	23	20	13	13	20	28	512
7.51-12.50	95	83	66	48	28	46	83	113	99	53	29	27	1	3	21	44	839
12.51-18.50	43	22	27	12	6	10	40	83	134	49	16	10	1	10	16	35	514
18.51-24.00	5	2	4	0	0	0	13	7	59	20	2	1	1	3	8	20	145
>24.00	1	0	0	0	0	0	0	0	18	18	1	1	0	3	4	7	53
TOTAL	197	181	167	110	71	111	182	254	356	163	77	67	21	36	74	140	2208

B213

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-SEP 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 9/30/18

*** JUL-SEP 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2208

TOTAL NUMBER OF VALID OBSERVATIONS: 2208

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 10.9 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 3

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 0

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 3

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.00	.00	.23	54.76	29.98	12.32	2.72

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C	0	0	0	0	0	0	0	0	4	1	0	0	0	0	0	0	0
D	142	133	125	72	35	61	98	115	136	69	39	29	11	24	45	75	0
E	44	26	24	29	29	33	63	94	153	61	19	20	5	7	11	44	0
F	11	17	12	5	7	16	19	41	59	26	12	8	2	5	14	17	1
G	0	5	6	4	0	1	2	4	4	6	7	10	3	0	4	4	0
TOTAL	197	181	167	110	71	111	182	254	356	163	77	67	21	36	74	140	1

B214

JFDs of 100-Meter Wind vs. Delta T

October-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

B216

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	2	3	4	2	3	2	4	3	2	2	1	1	2	2	3	3	39
3.51- 7.50	28	10	7	17	3	12	23	10	15	14	13	15	13	9	8	12	209
7.51-12.50	27	20	20	12	5	6	24	16	35	22	15	22	11	20	34	25	314
12.51-18.50	49	5	6	4	5	7	11	9	28	20	7	6	6	24	62	78	327
18.51-24.00	35	1	1	5	5	5	9	5	12	10	2	0	1	13	38	50	192
>24.00	34	9	0	0	2	0	1	0	0	5	4	0	0	0	7	18	80
TOTAL	175	48	38	40	23	32	72	43	92	73	42	44	33	68	152	186	1161

B217

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	2	3	1	1	0	1	4	2	2	1	0	0	0	1	0	3	21
3.51- 7.50	8	8	5	6	4	7	8	6	13	6	5	1	3	2	3	10	95
7.51-12.50	9	4	8	8	6	11	20	26	36	20	7	6	7	9	6	20	203
12.51-18.50	7	2	1	1	6	11	11	11	54	22	12	13	14	12	16	34	227
18.51-24.00	2	0	2	1	3	0	1	4	31	14	17	5	3	9	11	12	115
>24.00	0	0	0	2	1	0	0	0	2	0	1	0	1	0	1	1	9
TOTAL	28	17	17	19	20	30	44	49	138	63	42	25	28	33	37	80	670

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	1	1	0	0	2	1	0	0	0	2	0	2	0	0	0	1	10
3.51- 7.50	4	4	6	2	3	2	5	6	6	1	4	2	5	5	3	2	60
7.51-12.50	9	3	0	1	3	2	3	7	28	9	5	3	3	6	7	5	94
12.51-18.50	1	1	0	0	2	0	0	8	16	13	5	7	11	13	8	5	90
18.51-24.00	0	0	0	0	0	0	0	1	1	1	1	2	1	5	2	3	17
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	1	0	3	0	4
TOTAL	15	9	6	3	10	5	8	22	51	26	15	16	21	29	23	16	275

B218

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	1	1	1	1	0	0	0	0	2	0	1	1	0	2	10
3.51- 7.50	4	5	2	0	1	0	1	0	2	3	3	0	2	2	2	3	30
7.51-12.50	2	1	3	0	0	0	1	3	2	0	2	2	2	5	4	5	32
12.51-18.50	0	1	0	0	0	0	0	1	3	9	5	2	1	3	0	1	26
18.51-24.00	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	0	3
TOTAL	6	7	6	1	2	1	2	4	7	12	13	4	6	12	8	11	102

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	5	7	6	4	6	5	8	5	4	5	3	3	3	4	3	9	80
3.51- 7.50	44	27	20	25	11	21	37	22	36	24	25	18	23	18	16	27	394
7.51-12.50	47	28	31	21	14	19	48	52	101	51	29	33	23	40	51	55	643
12.51-18.50	57	9	7	5	13	18	22	29	101	64	29	28	32	52	86	118	670
18.51-24.00	37	1	3	6	8	5	10	10	44	25	21	7	5	27	51	65	325
>24.00	34	9	0	2	3	0	1	0	2	5	5	0	2	1	13	19	96
TOTAL	224	81	67	63	55	68	126	118	288	174	112	89	88	142	220	293	2208

B219

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T OCT-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 10/ 1/18 - 12/31/18

*** OCT-DEC 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 2208

TOTAL NUMBER OF VALID OBSERVATIONS: 2208

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 13.0 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 1

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 1

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 1

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.00	.00	.00	52.58	30.34	12.45	4.62

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
D	175	48	38	40	23	32	72	43	92	73	42	44	33	68	152	186	0
E	28	17	17	19	20	30	44	49	138	63	42	25	28	33	37	80	0
F	15	9	6	3	10	5	8	22	51	26	15	16	21	29	23	16	0
G	6	7	6	1	2	1	2	4	7	12	13	4	6	12	8	11	0
TOTAL	224	81	67	63	55	68	126	118	288	174	112	89	88	142	220	293	0

B220

JFDs of 100-Meter Wind vs. Delta T

July-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

B222

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
18.51-24.00	0	0	0	0	0	0	0	0	3	1	0	0	0	0	0	0	4
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL	0	0	0	0	0	0	0	0	4	1	0	0	0	0	0	0	5

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	4	12	19	8	7	12	6	7	5	5	5	5	6	4	3	5	113
3.51- 7.50	64	50	36	36	17	38	39	30	38	26	27	21	19	17	25	27	510
7.51-12.50	95	82	71	49	21	25	70	71	67	43	29	40	11	21	50	48	793
12.51-18.50	79	25	32	14	6	13	35	43	70	37	14	7	6	31	65	95	572
18.51-24.00	40	3	5	5	5	5	19	7	40	14	2	0	2	16	43	62	268
>24.00	35	9	0	0	2	0	1	0	8	17	4	0	0	3	11	24	114
TOTAL	317	181	163	112	58	93	170	158	228	142	81	73	44	92	197	261	2370

B223

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	3	7	3	8	5	1	8	8	2	1	2	2	0	1	1	5	57
3.51- 7.50	14	11	16	15	13	17	19	15	22	8	10	9	6	5	6	18	204
7.51-12.50	33	21	19	19	17	31	53	61	73	39	13	10	8	10	8	37	452
12.51-18.50	20	4	1	3	10	14	23	50	128	44	18	17	15	15	21	46	429
18.51-24.00	2	0	2	1	3	0	4	9	54	26	17	6	3	9	11	16	163
>24.00	0	0	0	2	1	0	0	0	12	6	1	1	1	0	1	2	27
TOTAL	72	43	41	48	49	63	107	143	291	124	61	45	33	40	48	124	1332

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	3	4	3	1	5	4	3	2	2	2	0	3	0	2	2	1	37
3.51- 7.50	10	16	12	6	5	7	13	15	15	4	5	3	7	7	3	7	135
7.51-12.50	12	5	2	1	4	9	7	28	55	19	10	4	3	7	10	9	185
12.51-18.50	1	1	1	0	3	1	4	17	32	23	8	12	11	13	15	11	153
18.51-24.00	0	0	0	0	0	0	0	1	6	4	3	2	1	5	4	5	31
>24.00	0	0	0	0	0	0	0	0	0	0	1	0	1	0	3	0	5
TOTAL	26	26	18	8	17	21	27	63	110	52	27	24	23	34	37	33	547

B224

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	1	1	1	2	0	0	0	0	2	1	2	1	2	4	17
3.51- 7.50	4	8	6	4	1	0	3	1	2	6	6	5	4	2	2	3	57
7.51-12.50	2	3	5	0	0	0	1	5	5	3	6	6	2	5	4	5	52
12.51-18.50	0	1	0	0	0	0	0	2	4	9	5	2	1	3	1	1	29
18.51-24.00	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	2	4
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	0	3
TOTAL	6	12	12	5	2	2	4	8	11	18	20	14	9	12	12	15	162

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	1
1.01- 3.50	10	23	26	18	18	19	17	17	9	8	9	11	8	8	8	15	224
3.51- 7.50	92	85	70	61	36	62	74	61	77	44	48	38	36	31	36	55	906
7.51-12.50	142	111	97	69	42	65	131	165	200	104	58	60	24	43	72	99	1482
12.51-18.50	100	31	34	17	19	28	62	112	235	113	45	38	33	62	102	153	1184
18.51-24.00	42	3	7	6	8	5	23	17	103	45	23	8	6	30	59	85	470
>24.00	35	9	0	2	3	0	1	0	20	23	6	1	2	4	17	26	149
TOTAL	421	262	234	173	126	179	308	372	644	337	189	156	109	178	294	433	4416

B225

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18

*** JUL-DEC 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 4416

TOTAL NUMBER OF VALID OBSERVATIONS: 4416

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 11.9 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 4

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 1

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 4

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.00	.00	.11	53.67	30.16	12.39	3.67

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C	0	0	0	0	0	0	0	0	4	1	0	0	0	0	0	0	0
D	317	181	163	112	58	93	170	158	228	142	81	73	44	92	197	261	0
E	72	43	41	48	49	63	107	143	291	124	61	45	33	40	48	124	0
F	26	26	18	8	17	21	27	63	110	52	27	24	23	34	37	33	1
G	6	12	12	5	2	2	4	8	11	18	20	14	9	12	12	15	0
TOTAL	421	262	234	173	126	179	308	372	644	337	189	156	109	178	294	433	1

B226

Stability Classes by Hour of Day

100-Meter Wind vs. Delta T

July-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18	7	1	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	7	2	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	3	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	4	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D
18	7	5	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18	7	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	7	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	E	F
18	7	8	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	E	E
18	7	9	E	E	E	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	G	G
18	7	10	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F
18	7	11	E	E	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	12	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	E	E
18	7	13	E	E	F	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	14	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	G
18	7	15	G	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	7	16	F	G	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18	7	17	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	E
18	7	18	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18	7	19	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	7	20	G	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	7	21	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	22	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	23	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E
18	7	24	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	G
18	7	25	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F
18	7	26	E	D	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	E
18	7	27	E	E	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	28	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	E
18	7	29	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18	7	30	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18	7	31	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	G
18	8	1	G	G	G	G	G	G	F	F	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F
18	8	2	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	8	3	F	E	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	E
18	8	4	E	E	E	F	F	F	E	E	E	E	D	D	D	D	D	D	D	D	D	E	F	F	F	E
18	8	5	E	E	E	E	E	F	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	F	E	E
18	8	6	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F
18	8	7	F	E	E	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	8	8	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F
18	8	9	F	G	F	F	G	F	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	F
18	8	10	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	G
18	8	11	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	F
18	8	12	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E
18	8	13	E	E	E	E	F	F	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E

B228

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR	MN	DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24					
18	8	14	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D					
18	8	15	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F				
18	8	16	F	F	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F				
18	8	17	F	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	G	F			
18	8	18	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F				
18	8	19	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D	D			
18	8	20	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	E	E	E		
18	8	21	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E		
18	8	22	D	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F		
18	8	23	F	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
18	8	24	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	G	G	G	G	G		
18	8	25	G	G	F	F	G	G	G	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E	E		
18	8	26	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
18	8	27	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E		
18	8	28	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D		
18	8	29	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	E	E		
18	8	30	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D		
18	8	31	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E		
18	9	1	E	E	E	E	E	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D	D		
18	9	2	D	E	E	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D	D	
18	9	3	E	E	D	D	D	E	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	4	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	5	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	7	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	8	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	9	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	E	E	E	E	E	
18	9	10	E	F	E	E	E	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F	
18	9	11	E	E	E	F	F	E	E	E	D	D	D	C	C	C	D	D	D	D	D	D	D	E	F	E	E	E	E	E	
18	9	12	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	13	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18	9	14	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F	
18	9	15	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F	
18	9	16	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F	
18	9	17	F	E	E	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	18	E	F	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18	9	19	E	E	E	E	E	E	E	E	D	D	D	D	D	C	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18	9	20	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	D	D	E	E
18	9	21	E	E	D	D	D	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	D	D	D
18	9	22	D	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	G	F	F	F
18	9	23	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F
18	9	24	F	E	E	E	E	F	E	E	D	D	D	D	C	D	D	D	D	D	D	D	D	D	E	E	E	F	E	E	E
18	9	25	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	G
18	9	26	G	G	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	G	G	F	F	F
18	9	27	F	F	F	F	F	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	E	D	D	D	D

B229

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES

YR MN DY	HOURS																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18 9 28	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 9 29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 9 30	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 10 1	D	D	D	D	D	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D
18 10 2	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	E	E	E	E
18 10 3	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	D	D	D	D	D
18 10 4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 10 5	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	D	D	D	D	D	D
18 10 6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 10 7	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E
18 10 8	E	E	E	E	E	D	E	E	E	E	E	E	D	D	D	D	E	E	E	E	E	E	E	E
18 10 9	D	D	D	D	E	E	E	E	E	E	E	E	E	E	E	E	D	E	E	E	E	D	D	D
18 10 10	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 10 11	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	E	E	E
18 10 12	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 10 13	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	E
18 10 14	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 10 15	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	F
18 10 16	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	F	F	F	F	F	G
18 10 17	G	G	G	F	F	F	F	F	E	E	E	E	D	D	D	D	D	E	G	G	G	G	G	G
18 10 18	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18 10 19	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	E
18 10 20	F	G	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	F	F
18 10 21	E	F	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18 10 22	E	E	F	F	G	G	G	G	E	E	D	D	D	D	D	D	D	E	G	G	G	G	G	F
18 10 23	F	F	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	F	F	F	F	E	E
18 10 24	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18 10 25	E	D	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E
18 10 26	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F
18 10 27	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	E	F	F	F	F	E	E
18 10 28	D	D	D	D	E	E	E	D	D	D	D	D	D	D	D	D	D	E	G	G	G	G	G	F
18 10 29	F	F	G	G	G	G	G	G	F	E	D	D	D	D	D	D	D	E	E	F	F	E	E	F
18 10 30	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E
18 10 31	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F	G
18 11 1	G	G	G	G	G	F	F	F	F	E	E	D	D	D	D	D	D	F	F	F	F	F	E	E
18 11 2	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F
18 11 3	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 11 4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	F	F	F	E	E
18 11 5	F	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	E	E	D	D	E	E	D
18 11 6	D	D	D	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	F	F	F	G	F
18 11 7	F	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 11 8	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 11 9	D	D	E	E	E	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E
18 11 10	E	E	E	F	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18 11 11	F	F	F	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D

B230

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

HOURLY STABILITIES
 HOURS

YR MN DY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
18 11 12	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	
18 11 13	E	E	E	E	F	E	E	E	D	D	D	D	D	D	D	D	D	E	E	F	F	E	E	E	
18 11 14	E	E	E	E	F	F	F	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18 11 15	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	F	G	G	G	E	E	E	
18 11 16	E	E	F	F	F	F	G	F	E	D	D	D	D	D	D	D	E	E	F	E	F	F	F	F	
18 11 17	F	E	F	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 11 18	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	F	F	G	
18 11 19	G	F	F	F	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	D	D	D	E	
18 11 20	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	F	F	F	G	F	E	E	
18 11 21	E	E	E	F	G	G	G	F	F	E	D	D	D	D	D	D	E	F	G	G	G	G	G	G	
18 11 22	F	F	F	F	F	F	E	E	E	D	D	D	D	D	D	D	E	E	E	E	E	E	E	E	
18 11 23	E	E	E	E	D	E	E	E	E	D	D	D	D	D	D	D	E	E	E	F	G	G	G	G	
18 11 24	G	G	F	F	F	F	F	F	F	D	D	D	D	D	D	D	E	E	E	E	E	E	E	D	
18 11 25	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 11 26	D	D	D	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 11 27	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	D	
18 11 28	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	F	
18 11 29	F	F	E	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	
18 11 30	F	F	F	F	F	F	F	F	E	E	D	D	D	D	D	D	E	E	E	E	D	D	D	D	
18 12 1	D	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	D	D	
18 12 2	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 3	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 4	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	
18 12 5	E	F	F	E	E	E	E	E	E	F	D	D	D	D	D	D	E	F	F	F	F	F	F	E	
18 12 6	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	
18 12 7	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	E	
18 12 8	F	F	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18 12 9	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	F	F	
18 12 10	F	F	F	F	F	F	F	F	F	E	D	D	D	D	D	D	D	E	E	F	F	E	E	E	
18 12 11	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18 12 12	E	E	E	F	F	E	E	E	E	D	D	D	D	D	D	D	E	F	F	F	F	F	F	F	
18 12 13	G	G	F	F	F	F	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
18 12 14	D	D	D	E	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	F	F	F	G	G	
18 12 15	G	G	G	G	G	G	G	G	G	F	F	E	D	D	D	D	E	F	G	G	G	F	G	F	
18 12 16	G	G	G	G	G	G	F	F	E	E	E	D	D	D	D	D	E	F	F	F	G	G	G	G	
18 12 17	G	G	G	G	G	G	G	G	G	F	D	D	D	D	D	D	D	E	E	F	G	F	F	E	E
18 12 18	E	E	F	F	E	F	F	F	F	E	D	D	D	D	D	D	D	E	E	E	E	E	E	E	
18 12 19	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	
18 12 20	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E
18 12 21	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F
18 12 22	F	E	F	F	E	E	E	E	D	D	D	D	D	D	D	D	D	D	E	E	E	F	F	F	F
18 12 23	F	E	F	F	F	F	F	F	E	D	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F
18 12 24	F	G	F	F	F	F	F	E	E	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E	D
18 12 25	D	D	D	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	E	E	F	E	E	E	E
18 12 26	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D

B231

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JUL-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 7/ 1/18 - 12/31/18
 STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS

YR MN DY	HOURLY STABILITIES																							
	HOURS																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
18 12 27	D	D	D	E	E	D	D	E	E	E	D	D	E	D	D	D	D	D	D	D	D	D	D	D
18 12 28	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
18 12 29	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	E	E	E	E	E	E	E
18 12 30	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	E	E	E	E	E	E	E	E
18 12 31	E	E	E	E	E	E	E	E	E	E	E	D	D	D	D	D	D	D	D	D	D	D	D	D

JFDs of 100-Meter Wind vs. Delta T

January-December 2018

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS A

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18.51-24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
>24.00	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	5
TOTAL	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	5

STABILITY CLASS B

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
7.51-12.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12.51-18.50	0	0	0	0	0	0	1	0	3	0	0	0	0	0	0	0	4
18.51-24.00	0	0	0	0	0	0	0	0	7	1	0	0	0	0	0	0	8
>24.00	0	0	0	0	0	0	0	2	5	0	0	0	0	0	0	0	7
TOTAL	0	0	0	0	1	0	1	2	15	1	0	0	0	0	0	0	20

B234

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS C

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3.51- 7.50	2	0	0	4	4	0	0	0	0	0	0	0	0	0	0	0	10
7.51-12.50	2	0	4	1	3	0	0	0	0	0	0	0	0	0	0	0	10
12.51-18.50	5	0	1	0	6	2	3	1	8	1	0	0	0	0	2	0	29
18.51-24.00	0	0	0	0	0	0	0	4	11	3	0	0	0	0	0	0	18
>24.00	0	0	0	0	0	0	0	3	4	2	0	0	0	0	0	1	10
TOTAL	9	0	5	5	13	2	3	8	23	6	0	0	0	0	2	1	77

STABILITY CLASS D

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	7	15	27	11	16	15	10	13	9	12	5	6	10	6	7	9	178
3.51- 7.50	97	76	54	57	32	70	69	40	49	45	42	45	40	38	45	53	852
7.51-12.50	173	123	107	78	50	67	135	102	104	84	54	65	33	51	100	129	1455
12.51-18.50	204	60	54	40	40	50	85	94	118	79	43	24	23	47	141	259	1361
18.51-24.00	94	20	9	5	16	26	44	39	66	38	12	7	7	29	94	155	661
>24.00	57	10	0	0	11	20	8	16	53	29	4	2	4	18	33	97	362
TOTAL	632	304	251	191	165	248	351	304	399	287	160	149	117	189	420	702	4869

B235

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS E

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	5	9	6	10	6	2	11	12	5	3	3	6	0	3	3	5	89
3.51- 7.50	22	18	22	22	18	25	30	26	31	13	13	12	12	10	9	23	306
7.51-12.50	49	27	31	37	40	75	82	101	116	61	20	18	20	19	17	69	782
12.51-18.50	61	15	15	14	31	34	49	105	212	100	51	36	26	27	46	84	906
18.51-24.00	12	3	3	2	7	9	31	39	94	50	30	16	11	15	28	22	372
>24.00	7	1	2	3	6	4	12	8	40	13	2	2	5	1	3	5	114
TOTAL	156	73	79	88	108	149	215	291	498	240	119	90	74	75	106	208	2569

STABILITY CLASS F

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	3
1.01- 3.50	3	5	6	1	6	5	5	4	3	4	1	3	2	3	5	2	58
3.51- 7.50	14	20	20	15	8	12	20	21	23	7	6	6	10	9	4	9	204
7.51-12.50	21	7	7	12	8	18	16	40	73	35	22	13	13	15	15	11	326
12.51-18.50	1	2	3	2	5	3	6	24	52	44	20	22	15	19	20	16	254
18.51-24.00	0	0	0	0	0	1	0	5	12	6	7	4	2	8	13	8	66
>24.00	0	0	0	0	0	0	0	1	2	0	1	0	1	0	3	0	8
TOTAL	39	34	36	30	27	39	47	95	165	96	57	48	43	54	60	46	919

B236

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY CLASS G

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	0
1.01- 3.50	0	0	1	2	1	3	0	1	1	0	2	3	3	1	2	5	25
3.51- 7.50	6	10	11	12	4	5	5	6	4	10	8	8	5	3	2	4	103
7.51-12.50	4	6	13	2	3	3	2	6	10	14	15	9	3	13	6	7	116
12.51-18.50	0	1	0	0	0	0	0	2	5	16	8	5	1	4	1	1	44
18.51-24.00	0	0	0	0	0	0	0	0	0	0	2	1	0	1	4	2	10
>24.00	0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	0	3
TOTAL	10	17	25	16	8	11	7	15	20	40	35	26	12	23	17	19	301

STABILITY CLASS ALL

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH
 JOINT FREQUENCY DISTRIBUTION OF WIND SPEED AND DIRECTION IN HOURS AT 100.00 METERS

SPEED (MPH)	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
CALM																	3
1.01- 3.50	15	29	40	24	29	25	26	30	18	19	11	18	15	13	17	21	350
3.51- 7.50	141	124	107	110	67	112	124	93	107	75	69	71	67	60	60	89	1476
7.51-12.50	249	163	162	130	104	163	235	249	303	194	111	105	69	98	138	216	2689
12.51-18.50	271	78	73	56	82	89	144	226	398	240	122	87	65	97	210	360	2598
18.51-24.00	106	23	12	7	23	36	75	87	190	98	51	28	20	53	139	187	1135
>24.00	64	11	2	3	17	24	20	31	106	46	7	4	10	20	41	103	509
TOTAL	846	428	396	330	322	449	624	716	1122	672	371	313	246	341	605	976	8760

B237

PROGRAM: JFD VERSION: PC-1.2
 NPPD-COOPER NUCLEAR STATION JFD:100M WIND VS 10M DELTA T JAN-DEC 2018
 SITE IDENTIFIER: NPPD
 DATA PERIOD EXAMINED: 1/ 1/18 - 12/31/18

*** JAN-DEC 2018 ***

STABILITY BASED ON: DELTA T BETWEEN 100.0 AND 10.0 METERS
 WIND MEASURED AT: 100.0 METERS
 WIND THRESHOLD AT: 1.00 MPH

TOTAL NUMBER OF OBSERVATIONS: 8760

TOTAL NUMBER OF VALID OBSERVATIONS: 8760

TOTAL NUMBER OF MISSING OBSERVATIONS: 0

PERCENT DATA RECOVERY FOR THIS PERIOD: 100.0 %

MEAN WIND SPEED FOR THIS PERIOD: 13.1 MPH

NUMBER OF OBSERVATIONS WITH BACKUP WIND SPEED: 7

NUMBER OF OBSERVATIONS WITH BACKUP WIND DIRECTION: 1

TOTAL NUMBER OF OBSERVATIONS WITH BACKUP DATA: 7

PERCENTAGE OCCURRENCE OF STABILITY CLASSES

A	B	C	D	E	F	G
.06	.23	.88	55.58	29.33	10.49	3.44

DISTRIBUTION OF WIND DIRECTION VS STABILITY

	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	CALM
A	0	0	0	0	0	0	0	1	2	2	0	0	0	0	0	0	0
B	0	0	0	0	1	0	1	2	15	1	0	0	0	0	0	0	0
C	9	0	5	5	13	2	3	8	23	6	0	0	0	0	2	1	0
D	632	304	251	191	165	248	351	304	399	287	160	149	117	189	420	702	0
E	156	73	79	88	108	149	215	291	498	240	119	90	74	75	106	208	0
F	39	34	36	30	27	39	47	95	165	96	57	48	43	54	60	46	3
G	10	17	25	16	8	11	7	15	20	40	35	26	12	23	17	19	0
TOTAL	846	428	396	330	322	449	624	716	1122	672	371	313	246	341	605	976	3

B238

ATMOSPHERIC DIFFUSION ESTIMATES

The tables of atmospheric diffusion estimates in this section were generated using the latest version of the computer code XOQDOQ included as part of NRC Dose 2.3.20 (ORNL 2015). Data are given for 22 distances and 16 compass points (directions from site) centered on the Cooper Nuclear Station (CNS). Tables are presented for the ground-level (vent) and elevated (stack) release options separately, and for the following time periods in 2018: January-March, April-June, January-June, July-September, October-December, July-December, and January-December.

The most recent 5-year average X/Q , depleted X/Q , and D/Q values for CNS have been calculated and compared to the 2017 annual values provided herein. The differences in both peak directions and magnitudes were small and were likely the result of minor year-to-year climatological fluctuations. The most recent 5-year average X/Q , depleted X/Q , and D/Q values are representative of conditions around CNS and are available for use in dose calculations as necessary.

Atmospheric Diffusion Estimates

Ground Level Releases

January-March 2018

VENTS GROUND LEVEL RELEASES - JAN-MAR 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	0.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.511E-05	1.819E-05	9.595E-06	4.782E-06	1.929E-06	1.047E-06	6.649E-07	4.648E-07	3.466E-07	2.707E-07	2.188E-07
SSW	2.830E-05	9.602E-06	5.169E-06	2.593E-06	1.038E-06	5.605E-07	3.544E-07	2.469E-07	1.836E-07	1.430E-07	1.153E-07
SW	1.363E-05	4.847E-06	2.582E-06	1.279E-06	5.013E-07	2.666E-07	1.665E-07	1.149E-07	8.469E-08	6.547E-08	5.245E-08
WSW	1.170E-05	4.173E-06	2.237E-06	1.111E-06	4.363E-07	2.323E-07	1.454E-07	1.004E-07	7.408E-08	5.732E-08	4.596E-08
W	1.783E-05	5.947E-06	3.071E-06	1.509E-06	6.052E-07	3.274E-07	2.074E-07	1.447E-07	1.078E-07	8.406E-08	6.787E-08
WNW	1.801E-05	6.367E-06	3.430E-06	1.710E-06	6.705E-07	3.567E-07	2.229E-07	1.538E-07	1.134E-07	8.773E-08	7.030E-08
NW	2.701E-05	8.881E-06	4.705E-06	2.352E-06	9.562E-07	5.219E-07	3.328E-07	2.335E-07	1.746E-07	1.366E-07	1.107E-07
NNW	5.334E-05	1.681E-05	8.823E-06	4.422E-06	1.832E-06	1.013E-06	6.523E-07	4.611E-07	3.470E-07	2.731E-07	2.222E-07
N	8.141E-05	2.507E-05	1.310E-05	6.580E-06	2.758E-06	1.536E-06	9.948E-07	7.063E-07	5.335E-07	4.211E-07	3.436E-07
NNE	4.786E-05	1.526E-05	8.142E-06	4.111E-06	1.694E-06	9.331E-07	5.990E-07	4.224E-07	3.172E-07	2.492E-07	2.025E-07
NE	2.833E-05	9.075E-06	4.775E-06	2.391E-06	9.811E-07	5.389E-07	3.452E-07	2.430E-07	1.823E-07	1.431E-07	1.161E-07
ENE	2.273E-05	7.259E-06	3.859E-06	1.944E-06	7.967E-07	4.372E-07	2.799E-07	1.969E-07	1.476E-07	1.158E-07	9.395E-08
E	1.837E-05	6.053E-06	3.229E-06	1.621E-06	6.583E-07	3.591E-07	2.289E-07	1.605E-07	1.200E-07	9.386E-08	7.600E-08
ESE	2.086E-05	6.938E-06	3.668E-06	1.829E-06	7.414E-07	4.039E-07	2.572E-07	1.802E-07	1.346E-07	1.053E-07	8.524E-08
SE	3.382E-05	1.136E-05	6.132E-06	3.088E-06	1.238E-06	6.685E-07	4.222E-07	2.946E-07	2.190E-07	1.706E-07	1.375E-07
SSE	4.927E-05	1.629E-05	8.518E-06	4.223E-06	1.705E-06	9.266E-07	5.888E-07	4.119E-07	3.073E-07	2.401E-07	1.941E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.816E-07	9.442E-08	6.171E-08	3.583E-08	2.448E-08	1.826E-08	1.439E-08	1.178E-08	9.906E-09	8.510E-09	7.431E-09
SSW	9.552E-08	4.923E-08	3.197E-08	1.839E-08	1.248E-08	9.254E-09	7.259E-09	5.917E-09	4.960E-09	4.248E-09	3.699E-09
SW	4.319E-08	2.175E-08	1.390E-08	7.808E-09	5.207E-09	3.811E-09	2.958E-09	2.389E-09	1.988E-09	1.691E-09	1.463E-09
WSW	3.787E-08	1.913E-08	1.225E-08	6.904E-09	4.616E-09	3.386E-09	2.631E-09	2.128E-09	1.772E-09	1.509E-09	1.307E-09
W	5.630E-08	2.919E-08	1.905E-08	1.105E-08	7.548E-09	5.630E-09	4.438E-09	3.634E-09	3.058E-09	2.628E-09	2.296E-09
WNW	5.791E-08	2.920E-08	1.867E-08	1.050E-08	7.013E-09	5.138E-09	3.990E-09	3.225E-09	2.683E-09	2.283E-09	1.976E-09
NW	9.204E-08	4.816E-08	3.161E-08	1.846E-08	1.266E-08	9.467E-09	7.476E-09	6.129E-09	5.163E-09	4.441E-09	3.882E-09
NNW	1.856E-07	9.866E-08	6.547E-08	3.880E-08	2.687E-08	2.024E-08	1.608E-08	1.325E-08	1.121E-08	9.678E-09	8.488E-09
N	2.876E-07	1.542E-07	1.029E-07	6.144E-08	4.276E-08	3.234E-08	2.577E-08	2.128E-08	1.804E-08	1.560E-08	1.370E-08
NNE	1.688E-07	8.924E-08	5.897E-08	3.474E-08	2.395E-08	1.799E-08	1.425E-08	1.171E-08	9.887E-09	8.519E-09	7.459E-09
NE	9.675E-08	5.099E-08	3.364E-08	1.978E-08	1.362E-08	1.022E-08	8.094E-09	6.651E-09	5.614E-09	4.837E-09	4.235E-09
ENE	7.825E-08	4.118E-08	2.714E-08	1.593E-08	1.096E-08	8.220E-09	6.505E-09	5.342E-09	4.507E-09	3.881E-09	3.396E-09
E	6.319E-08	3.302E-08	2.165E-08	1.263E-08	8.647E-09	6.460E-09	5.097E-09	4.175E-09	3.515E-09	3.022E-09	2.640E-09
ESE	7.084E-08	3.697E-08	2.423E-08	1.412E-08	9.660E-09	7.213E-09	5.690E-09	4.660E-09	3.923E-09	3.372E-09	2.946E-09
SE	1.139E-07	5.869E-08	3.810E-08	2.190E-08	1.484E-08	1.100E-08	8.621E-09	7.023E-09	5.884E-09	5.037E-09	4.384E-09
SSE	1.612E-07	8.393E-08	5.492E-08	3.194E-08	2.184E-08	1.631E-08	1.286E-08	1.053E-08	8.866E-09	7.620E-09	6.658E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	9.365E-06	2.171E-06	6.868E-07	3.515E-07	2.204E-07	9.926E-08	3.654E-08	1.837E-08	1.181E-08	8.524E-09	
SSW	5.009E-06	1.171E-06	3.664E-07	1.862E-07	1.162E-07	5.185E-08	1.878E-08	9.316E-09	5.936E-09	4.256E-09	
SW	2.506E-06	5.699E-07	1.725E-07	8.599E-08	5.288E-08	2.303E-08	8.005E-09	3.842E-09	2.399E-09	1.694E-09	
WSW	2.167E-06	4.957E-07	1.506E-07	7.521E-08	4.633E-08	2.024E-08	7.075E-09	3.412E-09	2.136E-09	1.512E-09	
W	3.016E-06	6.826E-07	2.144E-07	1.093E-07	6.838E-08	3.071E-08	1.127E-08	5.665E-09	3.644E-09	2.633E-09	
WNW	3.319E-06	7.621E-07	2.310E-07	1.152E-07	7.088E-08	3.090E-08	1.077E-08	5.179E-09	3.237E-09	2.288E-09	
NW	4.587E-06	1.073E-06	3.435E-07	1.769E-07	1.115E-07	5.056E-08	1.881E-08	9.522E-09	6.146E-09	4.448E-09	
NNW	8.642E-06	2.044E-06	6.720E-07	3.514E-07	2.237E-07	1.032E-07	3.942E-08	2.035E-08	1.328E-08	9.691E-09	
N	1.286E-05	3.064E-06	1.024E-06	5.401E-07	3.459E-07	1.610E-07	6.235E-08	3.249E-08	2.133E-08	1.562E-08	
NNE	7.932E-06	1.893E-06	6.175E-07	3.213E-07	2.039E-07	9.348E-08	3.533E-08	1.808E-08	1.174E-08	8.532E-09	
NE	4.671E-06	1.098E-06	3.560E-07	1.847E-07	1.169E-07	5.345E-08	2.012E-08	1.028E-08	6.668E-09	4.844E-09	
ENE	3.763E-06	8.918E-07	2.886E-07	1.496E-07	9.461E-08	4.318E-08	1.621E-08	8.265E-09	5.356E-09	3.887E-09	
E	3.142E-06	7.391E-07	2.362E-07	1.216E-07	7.655E-08	3.467E-08	1.286E-08	6.498E-09	4.187E-09	3.027E-09	
ESE	3.577E-06	8.330E-07	2.656E-07	1.365E-07	8.585E-08	3.884E-08	1.438E-08	7.256E-09	4.673E-09	3.377E-09	
SE	5.941E-06	1.396E-06	4.371E-07	2.222E-07	1.386E-07	6.181E-08	2.236E-08	1.107E-08	7.046E-09	5.046E-09	
SSE	8.337E-06	1.919E-06	6.081E-07	3.116E-07	1.956E-07	8.821E-08	3.256E-08	1.640E-08	1.056E-08	7.633E-09	

B241

VENTS GROUND LEVEL RELEASES - JAN-MAR 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE										
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.502E-05	1.813E-05	9.549E-06	4.752E-06	1.910E-06	1.033E-06	6.537E-07	4.554E-07	3.383E-07	2.632E-07	2.120E-07
SSW	2.824E-05	9.568E-06	5.141E-06	2.575E-06	1.027E-06	5.523E-07	3.479E-07	2.415E-07	1.788E-07	1.387E-07	1.115E-07
SW	1.361E-05	4.834E-06	2.572E-06	1.273E-06	4.974E-07	2.637E-07	1.643E-07	1.130E-07	8.310E-08	6.406E-08	5.118E-08
WSW	1.169E-05	4.160E-06	2.227E-06	1.105E-06	4.322E-07	2.294E-07	1.430E-07	9.845E-08	7.241E-08	5.584E-08	4.462E-08
W	1.780E-05	5.929E-06	3.058E-06	1.500E-06	5.996E-07	3.233E-07	2.041E-07	1.419E-07	1.053E-07	8.181E-08	6.582E-08
WNW	1.799E-05	6.350E-06	3.417E-06	1.701E-06	6.650E-07	3.528E-07	2.199E-07	1.513E-07	1.112E-07	8.576E-08	6.852E-08
NW	2.696E-05	8.851E-06	4.681E-06	2.337E-06	9.465E-07	5.147E-07	3.270E-07	2.285E-07	1.703E-07	1.328E-07	1.071E-07
NNW	5.323E-05	1.675E-05	8.772E-06	4.388E-06	1.811E-06	9.970E-07	6.394E-07	4.501E-07	3.373E-07	2.644E-07	2.143E-07
N	8.125E-05	2.498E-05	1.303E-05	6.531E-06	2.727E-06	1.513E-06	9.760E-07	6.903E-07	5.193E-07	4.084E-07	3.319E-07
NNE	4.777E-05	1.520E-05	8.095E-06	4.079E-06	1.674E-06	9.184E-07	5.872E-07	4.123E-07	3.084E-07	2.413E-07	1.952E-07
NE	2.827E-05	9.041E-06	4.748E-06	2.373E-06	9.701E-07	5.307E-07	3.386E-07	2.374E-07	1.773E-07	1.386E-07	1.120E-07
ENE	2.269E-05	7.231E-06	3.837E-06	1.929E-06	7.873E-07	4.303E-07	2.743E-07	1.922E-07	1.435E-07	1.121E-07	9.055E-08
E	1.833E-05	6.029E-06	3.210E-06	1.608E-06	6.505E-07	3.534E-07	2.244E-07	1.567E-07	1.166E-07	9.088E-08	7.328E-08
ESE	2.082E-05	6.915E-06	3.650E-06	1.817E-06	7.341E-07	3.985E-07	2.529E-07	1.765E-07	1.314E-07	1.024E-07	8.258E-08
SE	3.377E-05	1.133E-05	6.110E-06	3.074E-06	1.229E-06	6.619E-07	4.175E-07	2.901E-07	2.151E-07	1.670E-07	1.343E-07
SSE	4.919E-05	1.625E-05	8.482E-06	4.200E-06	1.699E-06	9.154E-07	5.798E-07	4.042E-07	3.005E-07	2.339E-07	1.885E-07

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE										
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.753E-07	8.947E-08	5.740E-08	3.213E-08	2.118E-08	1.525E-08	1.162E-08	9.198E-09	7.493E-09	6.238E-09	5.284E-09
SSW	9.196E-08	4.648E-08	2.960E-08	1.639E-08	1.071E-08	7.657E-09	5.796E-09	4.564E-09	3.699E-09	3.065E-09	2.585E-09
SW	4.202E-08	2.087E-08	1.314E-08	7.177E-09	4.655E-09	3.315E-09	2.505E-09	1.972E-09	1.599E-09	1.327E-09	1.121E-09
WSW	3.665E-08	1.820E-08	1.146E-08	6.245E-09	4.041E-09	2.870E-09	2.162E-09	1.696E-09	1.371E-09	1.133E-09	9.541E-10
W	5.439E-08	2.769E-08	1.774E-08	9.910E-09	6.526E-09	4.697E-09	3.575E-09	2.829E-09	2.304E-09	1.917E-09	1.623E-09
WNW	5.628E-08	2.796E-08	1.761E-08	9.622E-09	6.244E-09	4.448E-09	3.361E-09	2.645E-09	2.145E-09	1.779E-09	1.503E-09
NW	8.876E-08	4.557E-08	2.936E-08	1.652E-08	1.092E-08	7.886E-09	6.018E-09	4.772E-09	3.891E-09	3.243E-09	2.749E-09
NNW	1.782E-07	9.281E-08	6.035E-08	3.437E-08	2.290E-08	1.662E-08	1.274E-08	1.013E-08	8.283E-09	6.918E-09	5.875E-09
N	2.767E-07	1.455E-07	9.524E-08	5.477E-08	3.676E-08	2.684E-08	2.067E-08	1.652E-08	1.356E-08	1.137E-08	9.693E-09
NNE	1.621E-07	8.397E-08	5.439E-08	3.081E-08	2.044E-08	1.479E-08	1.130E-08	8.972E-09	7.323E-09	6.106E-09	5.178E-09
NE	9.295E-08	4.798E-08	3.101E-08	1.750E-08	1.159E-08	8.364E-09	6.379E-09	5.053E-09	4.116E-09	3.426E-09	2.900E-09
ENE	7.510E-08	3.870E-08	2.498E-08	1.407E-08	9.303E-09	6.709E-09	5.111E-09	4.046E-09	3.293E-09	2.738E-09	2.316E-09
E	6.067E-08	3.106E-08	1.996E-08	1.118E-08	7.362E-09	5.295E-09	4.027E-09	3.182E-09	2.587E-09	2.150E-09	1.817E-09
ESE	6.838E-08	3.504E-08	2.254E-08	1.266E-08	8.360E-09	6.029E-09	4.597E-09	3.643E-09	2.969E-09	2.473E-09	2.096E-09
SE	1.109E-07	5.635E-08	3.606E-08	2.015E-08	1.328E-08	9.578E-09	7.311E-09	5.804E-09	4.741E-09	3.959E-09	3.364E-09
SSE	1.560E-07	7.978E-08	5.127E-08	2.877E-08	1.900E-08	1.370E-08	1.045E-08	8.286E-09	6.757E-09	5.631E-09	4.774E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	9.323E-06	2.152E-06	6.755E-07	3.432E-07	2.136E-07	9.429E-08	3.288E-08	1.538E-08	9.240E-09	6.257E-09	
SSW	4.984E-06	1.160E-06	3.599E-07	1.815E-07	1.123E-07	4.908E-08	1.680E-08	7.726E-09	4.586E-09	3.075E-09	
SW	2.497E-06	5.658E-07	1.703E-07	8.440E-08	5.160E-08	2.213E-08	7.381E-09	3.348E-09	1.982E-09	1.331E-09	
WSW	2.158E-06	4.915E-07	1.482E-07	7.354E-08	4.499E-08	1.930E-08	6.423E-09	2.899E-09	1.705E-09	1.137E-09	
W	3.003E-06	6.769E-07	2.110E-07	1.068E-07	6.633E-08	2.920E-08	1.015E-08	4.736E-09	2.842E-09	1.923E-09	
WNW	3.306E-06	7.565E-07	2.279E-07	1.130E-07	6.910E-08	2.965E-08	9.896E-09	4.492E-09	2.659E-09	1.785E-09	
NW	4.566E-06	1.064E-06	3.377E-07	1.726E-07	1.079E-07	4.797E-08	1.689E-08	7.949E-09	4.792E-09	3.252E-09	
NNW	8.595E-06	2.022E-06	6.590E-07	3.418E-07	2.158E-07	9.736E-08	3.505E-08	1.674E-08	1.017E-08	6.936E-09	
N	1.280E-05	3.033E-06	1.005E-06	5.259E-07	3.341E-07	1.523E-07	5.576E-08	2.702E-08	1.658E-08	1.140E-08	
NNE	7.889E-06	1.873E-06	6.056E-07	3.125E-07	1.966E-07	8.820E-08	3.144E-08	1.490E-08	9.010E-09	6.123E-09	
NE	4.647E-06	1.087E-06	3.493E-07	1.797E-07	1.128E-07	5.043E-08	1.787E-08	8.429E-09	5.075E-09	3.436E-09	
ENE	3.743E-06	8.823E-07	2.830E-07	1.454E-07	9.120E-08	4.069E-08	1.438E-08	6.762E-09	4.063E-09	2.746E-09	
E	3.125E-06	7.313E-07	2.317E-07	1.183E-07	7.382E-08	3.270E-08	1.143E-08	5.339E-09	3.197E-09	2.156E-09	
ESE	3.561E-06	8.256E-07	2.612E-07	1.333E-07	8.320E-08	3.689E-08	1.295E-08	6.078E-09	3.659E-09	2.481E-09	
SE	5.921E-06	1.387E-06	4.317E-07	2.182E-07	1.354E-07	5.946E-08	2.063E-08	9.659E-09	5.829E-09	3.970E-09	
SSE	8.304E-06	1.904E-06	5.990E-07	3.048E-07	1.899E-07	8.405E-08	2.943E-08	1.382E-08	8.323E-09	5.647E-09	

B242

VENTS GROUND LEVEL RELEASES - JAN-MAR 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.213E-05	1.659E-05	8.538E-06	4.179E-06	1.633E-06	8.637E-07	5.360E-07	3.671E-07	2.686E-07	2.061E-07	1.639E-07
SSW	2.677E-05	8.760E-06	4.599E-06	2.266E-06	8.789E-07	4.622E-07	2.856E-07	1.949E-07	1.422E-07	1.088E-07	8.634E-08
SW	1.289E-05	4.423E-06	2.298E-06	1.118E-06	4.248E-07	2.201E-07	1.344E-07	9.083E-08	6.573E-08	4.995E-08	3.938E-08
WSW	1.107E-05	3.807E-06	1.991E-06	9.712E-07	3.695E-07	1.917E-07	1.172E-07	7.929E-08	5.743E-08	4.367E-08	3.446E-08
W	1.687E-05	5.426E-06	2.734E-06	1.319E-06	5.126E-07	2.701E-07	1.672E-07	1.143E-07	8.354E-08	6.403E-08	5.087E-08
WNW	1.704E-05	5.810E-06	3.053E-06	1.495E-06	5.681E-07	2.944E-07	1.799E-07	1.216E-07	8.803E-08	6.691E-08	5.277E-08
NW	2.555E-05	8.102E-06	4.187E-06	2.055E-06	8.097E-07	4.305E-07	2.682E-07	1.843E-07	1.352E-07	1.040E-07	8.290E-08
NNW	5.045E-05	1.534E-05	7.849E-06	3.862E-06	1.551E-06	8.350E-07	5.254E-07	3.637E-07	2.686E-07	2.077E-07	1.663E-07
N	7.701E-05	2.287E-05	1.166E-05	5.747E-06	2.335E-06	1.267E-06	8.015E-07	5.574E-07	4.131E-07	3.205E-07	2.572E-07
NNE	4.527E-05	1.392E-05	7.244E-06	3.591E-06	1.434E-06	7.692E-07	4.825E-07	3.332E-07	2.455E-07	1.895E-07	1.515E-07
NE	2.679E-05	8.279E-06	4.248E-06	2.088E-06	8.306E-07	4.443E-07	2.781E-07	1.918E-07	1.411E-07	1.088E-07	8.690E-08
ENE	2.150E-05	6.622E-06	3.433E-06	1.698E-06	6.743E-07	3.604E-07	2.254E-07	1.553E-07	1.143E-07	8.806E-08	7.029E-08
E	1.738E-05	5.521E-06	2.873E-06	1.415E-06	5.572E-07	2.960E-07	1.844E-07	1.266E-07	9.285E-08	7.139E-08	5.687E-08
ESE	1.973E-05	6.329E-06	3.264E-06	1.598E-06	6.279E-07	3.332E-07	2.074E-07	1.423E-07	1.043E-07	8.020E-08	6.386E-08
SE	3.199E-05	1.037E-05	5.459E-06	2.700E-06	1.049E-06	5.520E-07	3.413E-07	2.330E-07	1.700E-07	1.302E-07	1.033E-07
SSE	4.661E-05	1.487E-05	7.581E-06	3.691E-06	1.445E-06	7.646E-07	4.749E-07	3.254E-07	2.383E-07	1.829E-07	1.455E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.340E-07	6.553E-08	4.059E-08	2.157E-08	1.369E-08	9.565E-09	7.105E-09	5.504E-09	4.398E-09	3.598E-09	2.999E-09
SSW	7.043E-08	3.413E-08	2.100E-08	1.105E-08	6.961E-09	4.835E-09	3.573E-09	2.756E-09	2.194E-09	1.788E-09	1.486E-09
SW	3.194E-08	1.515E-08	9.185E-09	4.736E-09	2.941E-09	2.022E-09	1.483E-09	1.137E-09	9.003E-10	7.311E-10	6.054E-10
WSW	2.797E-08	1.330E-08	8.070E-09	4.168E-09	2.591E-09	1.782E-09	1.307E-09	1.002E-09	7.929E-10	6.435E-10	5.325E-10
W	4.155E-08	2.027E-08	1.254E-08	6.654E-09	4.220E-09	2.948E-09	2.189E-09	1.696E-09	1.355E-09	1.109E-09	9.244E-10
WNW	4.281E-08	2.033E-08	1.233E-08	6.363E-09	3.956E-09	2.721E-09	1.996E-09	1.531E-09	1.213E-09	9.847E-10	8.155E-10
NW	6.790E-08	3.341E-08	2.079E-08	1.111E-08	7.073E-09	4.955E-09	3.688E-09	2.862E-09	2.290E-09	1.875E-09	1.565E-09
NNW	1.367E-07	6.833E-08	4.295E-08	2.328E-08	1.496E-08	1.055E-08	7.896E-09	6.155E-09	4.943E-09	4.061E-09	3.396E-09
N	2.120E-07	1.069E-07	6.758E-08	3.693E-08	2.387E-08	1.691E-08	1.270E-08	9.928E-09	7.994E-09	6.585E-09	5.521E-09
NNE	1.244E-07	6.181E-08	3.870E-08	2.085E-08	1.334E-08	9.380E-09	7.000E-09	5.443E-09	4.363E-09	3.579E-09	2.990E-09
NE	7.130E-08	3.532E-08	2.207E-08	1.186E-08	7.579E-09	5.322E-09	3.968E-09	3.083E-09	2.469E-09	2.024E-09	1.690E-09
ENE	5.765E-08	2.852E-08	1.780E-08	9.552E-09	6.096E-09	4.278E-09	3.187E-09	2.475E-09	1.981E-09	1.623E-09	1.354E-09
E	4.655E-08	2.287E-08	1.421E-08	7.575E-09	4.813E-09	3.366E-09	2.501E-09	1.938E-09	1.549E-09	1.267E-09	1.056E-09
ESE	5.227E-08	2.566E-08	1.594E-08	8.500E-09	5.402E-09	3.780E-09	2.810E-09	2.179E-09	1.742E-09	1.426E-09	1.189E-09
SE	8.428E-08	4.089E-08	2.519E-08	1.328E-08	8.382E-09	5.835E-09	4.321E-09	3.341E-09	2.665E-09	2.178E-09	1.814E-09
SSE	1.190E-07	5.831E-08	3.616E-08	1.926E-08	1.223E-08	8.556E-09	6.361E-09	4.932E-09	3.943E-09	3.228E-09	2.692E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	8.390E-06	1.857E-06	5.558E-07	2.729E-07	1.654E-07	6.967E-08	2.230E-08	9.680E-09	5.540E-09	3.613E-09	
SSW	4.487E-06	1.002E-06	2.964E-07	1.445E-07	8.711E-08	3.636E-08	1.145E-08	4.897E-09	2.775E-09	1.797E-09	
SW	2.246E-06	4.879E-07	1.398E-07	6.689E-08	3.976E-08	1.623E-08	4.927E-09	2.051E-09	1.145E-09	7.347E-10	
WSW	1.941E-06	4.242E-07	1.219E-07	5.844E-08	3.478E-08	1.423E-08	4.334E-09	1.808E-09	1.009E-09	6.467E-10	
W	2.703E-06	5.840E-07	1.735E-07	8.490E-08	5.132E-08	2.156E-08	6.879E-09	2.984E-09	1.707E-09	1.114E-09	
WNW	2.973E-06	6.524E-07	1.871E-07	8.958E-08	5.327E-08	2.177E-08	6.619E-09	2.760E-09	1.543E-09	9.895E-10	
NW	4.109E-06	9.179E-07	2.779E-07	1.374E-07	8.361E-08	3.546E-08	1.147E-08	5.013E-09	2.880E-09	1.883E-09	
NNW	7.741E-06	1.746E-06	5.433E-07	2.726E-07	1.676E-07	7.226E-08	2.395E-08	1.067E-08	6.191E-09	4.077E-09	
N	1.152E-05	2.618E-06	8.279E-07	4.190E-07	2.592E-07	1.128E-07	3.793E-08	1.708E-08	9.983E-09	6.609E-09	
NNE	7.104E-06	1.618E-06	4.992E-07	2.493E-07	1.527E-07	6.545E-08	2.148E-08	9.484E-09	5.476E-09	3.593E-09	
NE	4.184E-06	9.384E-07	2.879E-07	1.433E-07	8.761E-08	3.743E-08	1.223E-08	5.382E-09	3.102E-09	2.032E-09	
ENE	3.370E-06	7.622E-07	2.334E-07	1.160E-07	7.087E-08	3.023E-08	9.849E-09	4.326E-09	2.490E-09	1.629E-09	
E	2.814E-06	6.318E-07	1.910E-07	9.432E-08	5.735E-08	2.428E-08	7.821E-09	3.406E-09	1.951E-09	1.272E-09	
ESE	3.205E-06	7.124E-07	2.149E-07	1.060E-07	6.441E-08	2.725E-08	8.776E-09	3.825E-09	2.193E-09	1.432E-09	
SE	5.323E-06	1.195E-06	3.542E-07	1.728E-07	1.042E-07	4.355E-08	1.375E-08	5.909E-09	3.364E-09	2.187E-09	
SSE	7.472E-06	1.642E-06	4.924E-07	2.421E-07	1.468E-07	6.196E-08	1.989E-08	8.658E-09	4.964E-09	3.242E-09	

B243

VENTS GROUND LEVEL RELEASES - JAN-MAR 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.992E-07	1.012E-07	5.196E-08	2.470E-08	8.873E-09	4.400E-09	2.591E-09	1.696E-09	1.194E-09	8.847E-10	6.817E-10
SSW	1.173E-07	3.967E-08	2.037E-08	9.683E-09	3.478E-09	1.725E-09	1.016E-09	6.650E-10	4.679E-10	3.468E-10	2.672E-10
SW	7.230E-08	2.445E-08	1.255E-08	5.968E-09	2.144E-09	1.063E-09	6.259E-10	4.099E-10	2.884E-10	2.137E-10	1.647E-10
WSW	5.093E-08	1.722E-08	8.843E-09	4.204E-09	1.510E-09	7.489E-10	4.410E-10	2.887E-10	2.032E-10	1.506E-10	1.160E-10
W	1.014E-07	3.429E-08	1.761E-08	8.371E-09	3.007E-09	1.491E-09	8.780E-10	5.749E-10	4.045E-10	2.998E-10	2.310E-10
WNW	1.101E-07	3.722E-08	1.911E-08	9.084E-09	3.263E-09	1.618E-09	9.528E-10	6.239E-10	4.390E-10	3.254E-10	2.507E-10
NW	1.245E-07	4.209E-08	2.161E-08	1.027E-08	3.690E-09	1.830E-09	1.078E-09	7.056E-10	4.965E-10	3.679E-10	2.835E-10
NNW	1.656E-07	5.599E-08	2.875E-08	1.367E-08	4.909E-09	2.434E-09	1.433E-09	9.386E-10	6.605E-10	4.895E-10	3.772E-10
N	2.491E-07	8.423E-08	4.325E-08	2.056E-08	7.385E-09	3.663E-09	2.157E-09	1.412E-09	9.936E-10	7.364E-10	5.675E-10
NNE	1.537E-07	5.197E-08	2.668E-08	1.269E-08	4.557E-09	2.260E-09	1.331E-09	8.713E-10	6.131E-10	4.543E-10	3.501E-10
NE	1.032E-07	3.488E-08	1.791E-08	8.515E-09	3.059E-09	1.517E-09	8.932E-10	5.848E-10	4.115E-10	3.050E-10	2.350E-10
ENE	6.972E-08	2.358E-08	1.211E-08	5.755E-09	2.067E-09	1.025E-09	6.036E-10	3.953E-10	2.781E-10	2.061E-10	1.588E-10
E	5.568E-08	1.883E-08	9.668E-09	4.596E-09	1.651E-09	8.188E-10	4.821E-10	3.157E-10	2.221E-10	1.646E-10	1.269E-10
ESE	8.875E-08	3.001E-08	1.541E-08	7.326E-09	2.632E-09	1.305E-09	7.684E-10	5.032E-10	3.541E-10	2.624E-10	2.022E-10
SE	2.164E-07	7.317E-08	3.757E-08	1.786E-08	6.416E-09	3.182E-09	1.874E-09	1.227E-09	8.632E-10	6.397E-10	4.930E-10
SSE	3.383E-07	1.144E-07	5.874E-08	2.793E-08	1.003E-08	4.974E-09	2.929E-09	1.918E-09	1.350E-09	1.000E-09	7.707E-10

DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	5.416E-10	2.406E-10	1.457E-10	7.367E-11	4.459E-11	2.989E-11	2.142E-11	1.608E-11	1.251E-11	9.990E-12	8.154E-12
SSW	2.123E-10	9.431E-11	5.713E-11	2.888E-11	1.748E-11	1.172E-11	8.397E-12	6.305E-12	4.902E-12	3.916E-12	3.196E-12
SW	1.308E-10	5.813E-11	3.521E-11	1.780E-11	1.077E-11	7.222E-12	5.175E-12	3.886E-12	3.021E-12	2.414E-12	1.970E-12
WSW	9.218E-11	4.095E-11	2.481E-11	1.254E-11	7.589E-12	5.088E-12	3.646E-12	2.738E-12	2.129E-12	1.700E-12	1.388E-12
W	1.835E-10	8.153E-11	4.939E-11	2.496E-11	1.511E-11	1.013E-11	7.259E-12	5.451E-12	4.238E-12	3.385E-12	2.763E-12
WNW	1.992E-10	8.849E-11	5.360E-11	2.709E-11	1.640E-11	1.099E-11	7.878E-12	5.915E-12	4.599E-12	3.674E-12	2.999E-12
NW	2.252E-10	1.001E-10	6.061E-11	3.064E-11	1.854E-11	1.243E-11	8.909E-12	6.690E-12	5.201E-12	4.155E-12	3.391E-12
NNW	2.997E-10	1.331E-10	8.064E-11	4.076E-11	2.467E-11	1.654E-11	1.185E-11	8.899E-12	6.919E-12	5.527E-12	4.511E-12
N	4.508E-10	2.003E-10	1.213E-10	6.132E-11	3.711E-11	2.488E-11	1.783E-11	1.339E-11	1.041E-11	8.315E-12	6.787E-12
NNE	2.781E-10	1.236E-10	7.485E-11	3.783E-11	2.290E-11	1.535E-11	1.100E-11	8.261E-12	6.423E-12	5.131E-12	4.188E-12
NE	1.867E-10	8.294E-11	5.024E-11	2.540E-11	1.537E-11	1.031E-11	7.384E-12	5.545E-12	4.311E-12	3.444E-12	2.811E-12
ENE	1.262E-10	5.606E-11	3.396E-11	1.716E-11	1.039E-11	6.965E-12	4.991E-12	3.747E-12	2.914E-12	2.328E-12	1.900E-12
E	1.008E-10	4.477E-11	2.712E-11	1.371E-11	8.297E-12	5.563E-12	3.986E-12	2.993E-12	2.327E-12	1.859E-12	1.517E-12
ESE	1.606E-10	7.136E-11	4.323E-11	2.185E-11	1.322E-11	8.866E-12	6.353E-12	4.771E-12	3.709E-12	2.963E-12	2.418E-12
SE	3.916E-10	1.740E-10	1.054E-10	5.327E-11	3.224E-11	2.162E-11	1.549E-11	1.163E-11	9.043E-12	7.224E-12	5.896E-12
SSE	6.123E-10	2.720E-10	1.648E-10	8.328E-11	5.041E-11	3.380E-11	2.422E-11	1.818E-11	1.414E-11	1.129E-11	9.218E-12

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	5.078E-08	1.040E-08	2.716E-09	1.220E-09	6.900E-10	2.653E-10	7.676E-11	3.042E-11	1.625E-11	1.006E-11
SSW	1.991E-08	4.078E-09	1.065E-09	4.781E-10	2.705E-10	1.040E-10	3.009E-11	1.193E-11	6.368E-12	3.942E-12
SW	1.227E-08	2.513E-09	6.561E-10	2.947E-10	1.667E-10	6.410E-11	1.854E-11	7.350E-12	3.925E-12	2.429E-12
WSW	8.644E-09	1.771E-09	4.622E-10	2.076E-10	1.174E-10	4.516E-11	1.306E-11	5.178E-12	2.765E-12	1.712E-12
W	1.721E-08	3.525E-09	9.203E-10	4.133E-10	2.338E-10	8.992E-11	2.601E-11	1.031E-11	5.505E-12	3.408E-12
WNW	1.868E-08	3.826E-09	9.987E-10	4.485E-10	2.537E-10	9.758E-11	2.823E-11	1.119E-11	5.975E-12	3.698E-12
NW	2.112E-08	4.326E-09	1.129E-09	5.072E-10	2.870E-10	1.103E-10	3.192E-11	1.265E-11	6.757E-12	4.182E-12
NNW	2.810E-08	5.755E-09	1.502E-09	6.748E-10	3.817E-10	1.468E-10	4.247E-11	1.683E-11	8.989E-12	5.564E-12
N	4.227E-08	8.659E-09	2.260E-09	1.015E-09	5.743E-10	2.209E-10	6.389E-11	2.532E-11	1.352E-11	8.370E-12
NNE	2.608E-08	5.342E-09	1.395E-09	6.264E-10	3.543E-10	1.363E-10	3.942E-11	1.562E-11	8.343E-12	5.164E-12
NE	1.751E-08	3.586E-09	9.362E-10	4.205E-10	2.379E-10	9.147E-11	2.646E-11	1.049E-11	5.601E-12	3.467E-12
ENE	1.183E-08	2.424E-09	6.327E-10	2.842E-10	1.608E-10	6.182E-11	1.788E-11	7.088E-12	3.785E-12	2.343E-12
E	9.450E-09	1.936E-09	5.053E-10	2.270E-10	1.284E-10	4.937E-11	1.428E-11	5.661E-12	3.023E-12	1.871E-12
ESE	1.506E-08	3.085E-09	8.054E-10	3.617E-10	2.046E-10	7.870E-11	2.277E-11	9.023E-12	4.818E-12	2.982E-12
SE	3.672E-08	7.522E-09	1.964E-09	8.819E-10	4.989E-10	1.919E-10	5.551E-11	2.200E-11	1.175E-11	7.271E-12
SSE	5.741E-08	1.176E-08	3.070E-09	1.379E-09	7.800E-10	3.000E-10	8.678E-11	3.439E-11	1.837E-11	1.137E-11

B244

VENTS GROUND LEVEL RELEASES - JAN-MAR 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION	DIRECTION FROM SITE	DIST. (MI)	X/Q (SEC/M3) NO DECADEY UNDEPLETED	X/Q (SEC/M3) 2.26 DAY DECADEY UNDEPLETED	X/Q (SEC/M3) 8.0 DAY DECADEY DEPLETED	D/Q (PER SQ.METER)
A	Site Boundary	S	.80	8.2E-06	8.2E-06	7.3E-06	4.4E-08
A	Site Boundary	SSW	.82	4.1E-06	4.1E-06	3.7E-06	1.6E-08
A	Site Boundary	SW	.97	1.4E-06	1.4E-06	1.2E-06	6.4E-09
A	Site Boundary	WSW	.93	1.3E-06	1.3E-06	1.2E-06	5.1E-09
A	Site Boundary	W	.91	1.9E-06	1.9E-06	1.7E-06	1.1E-08
A	Site Boundary	WNW	.94	2.0E-06	2.0E-06	1.8E-06	1.1E-08
A	Site Boundary	NW	.81	3.9E-06	3.9E-06	3.4E-06	1.8E-08
A	Site Boundary	NNW	.69	1.0E-05	1.0E-05	9.0E-06	3.3E-08
A	Site Boundary	N	.67	1.5E-05	1.5E-05	1.4E-05	5.2E-08
A	Site Boundary	NNE	.60	1.1E-05	1.1E-05	1.0E-05	3.9E-08
A	Site Boundary	NE	.62	6.3E-06	6.3E-06	5.7E-06	2.4E-08
A	Site Boundary	ENE	.59	5.6E-06	5.6E-06	5.1E-06	1.8E-08
A	Site Boundary	E	.53	5.6E-06	5.6E-06	5.1E-06	1.7E-08
A	Site Boundary	ESE	.54	6.2E-06	6.2E-06	5.6E-06	2.7E-08
A	Site Boundary	SE	.65	7.6E-06	7.6E-06	6.8E-06	4.8E-08
A	Site Boundary	SSE	.81	7.0E-06	7.0E-06	6.2E-06	4.8E-08
A	Nearest Res	SSW	3.00	2.5E-07	2.4E-07	1.9E-07	6.7E-10
A	Nearest Res	SW	1.00	1.3E-06	1.3E-06	1.1E-06	6.0E-09
A	Nearest Res	WSW	1.90	2.6E-07	2.6E-07	2.2E-07	8.5E-10
A	Nearest Res	W	1.00	1.5E-06	1.5E-06	1.3E-06	8.4E-09
A	Nearest Res	WNW	1.70	5.1E-07	5.0E-07	4.3E-07	2.4E-09
A	Nearest Res	NW	.90	3.0E-06	3.0E-06	2.7E-06	1.4E-08
A	Nearest Res	NNW	1.90	1.1E-06	1.1E-06	9.3E-07	2.8E-09
A	Nearest Res	N	2.90	7.5E-07	7.4E-07	6.0E-07	1.5E-09
A	Nearest Res	NNE	1.70	1.3E-06	1.3E-06	1.1E-06	3.3E-09
A	Nearest Res	ENE	1.70	6.1E-07	6.0E-07	5.1E-07	1.5E-09
A	Nearest Res	E	2.20	3.0E-07	2.9E-07	2.4E-07	6.5E-10
A	Nearest Res	SE	2.80	3.4E-07	3.3E-07	2.7E-07	1.4E-09
A	Nearest Cow	NNW	3.50	3.5E-07	3.4E-07	2.7E-07	6.6E-10
A	Nearest Garde	SSW	3.00	2.5E-07	2.4E-07	1.9E-07	6.7E-10
A	Nearest Garde	SW	2.20	2.2E-07	2.1E-07	1.8E-07	8.5E-10
A	Nearest Garde	WNW	1.70	5.1E-07	5.0E-07	4.3E-07	2.4E-09
A	Nearest Garde	NW	.90	3.0E-06	3.0E-06	2.7E-06	1.4E-08
A	Nearest Garde	NNW	2.80	5.3E-07	5.1E-07	4.2E-07	1.1E-09
A	Nearest Garde	E	2.20	3.0E-07	2.9E-07	2.4E-07	6.5E-10
A	Nearest Garde	ESE	2.20	3.3E-07	3.3E-07	2.7E-07	1.0E-09
A	Nearest Garde	SE	2.80	3.4E-07	3.3E-07	2.7E-07	1.4E-09

B245

Atmospheric Diffusion Estimates

Ground Level Releases

April-June 2018

VENTS GROUND LEVEL RELEASES - APR-JUN 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	6.199E-05	1.998E-05	1.051E-05	5.253E-06	2.145E-06	1.175E-06	7.510E-07	5.278E-07	3.953E-07	3.099E-07	2.513E-07
SSW	4.064E-05	1.331E-05	7.078E-06	3.545E-06	1.434E-06	7.800E-07	4.962E-07	3.474E-07	2.593E-07	2.027E-07	1.640E-07
SW	1.573E-05	5.505E-06	2.951E-06	1.466E-06	5.750E-07	3.062E-07	1.916E-07	1.324E-07	9.772E-08	7.565E-08	6.069E-08
WSW	1.837E-05	6.366E-06	3.481E-06	1.750E-06	6.863E-07	3.653E-07	2.286E-07	1.579E-07	1.165E-07	9.019E-08	7.233E-08
W	1.194E-05	4.287E-06	2.321E-06	1.153E-06	4.449E-07	2.342E-07	1.452E-07	9.960E-08	7.308E-08	5.627E-08	4.492E-08
WNW	2.496E-05	8.830E-06	4.805E-06	2.404E-06	9.354E-07	4.951E-07	3.083E-07	2.121E-07	1.560E-07	1.204E-07	9.630E-08
NW	2.325E-05	8.318E-06	4.537E-06	2.268E-06	8.823E-07	4.669E-07	2.908E-07	2.000E-07	1.471E-07	1.136E-07	9.082E-08
NNW	4.767E-05	1.568E-05	8.346E-06	4.180E-06	1.699E-06	9.273E-07	5.914E-07	4.149E-07	3.103E-07	2.429E-07	1.968E-07
N	5.933E-05	1.965E-05	1.062E-05	5.356E-06	2.170E-06	1.182E-06	7.524E-07	5.271E-07	3.937E-07	3.078E-07	2.491E-07
NNE	5.079E-05	1.615E-05	8.541E-06	4.291E-06	1.766E-06	9.720E-07	6.237E-07	4.397E-07	3.302E-07	2.593E-07	2.107E-07
NE	2.555E-05	8.003E-06	4.208E-06	2.114E-06	8.777E-07	4.858E-07	3.130E-07	2.214E-07	1.667E-07	1.312E-07	1.068E-07
ENE	1.531E-05	5.053E-06	2.743E-06	1.388E-06	5.611E-07	3.050E-07	1.938E-07	1.356E-07	1.011E-07	7.899E-08	6.386E-08
E	1.979E-05	6.311E-06	3.264E-06	1.618E-06	6.643E-07	3.652E-07	2.341E-07	1.650E-07	1.238E-07	9.723E-08	7.898E-08
ESE	2.426E-05	7.906E-06	4.262E-06	2.155E-06	8.748E-07	4.769E-07	3.038E-07	2.129E-07	1.590E-07	1.244E-07	1.007E-07
SE	4.034E-05	1.256E-05	6.533E-06	3.267E-06	1.356E-06	7.504E-07	4.835E-07	3.420E-07	2.575E-07	2.027E-07	1.651E-07
SSE	7.397E-05	2.266E-05	1.147E-05	5.659E-06	2.379E-06	1.329E-06	8.618E-07	6.128E-07	4.635E-07	3.663E-07	2.992E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	2.093E-07	1.100E-07	7.244E-08	4.251E-08	2.925E-08	2.194E-08	1.736E-08	1.426E-08	1.203E-08	1.037E-08	9.073E-09
SSW	1.363E-07	7.105E-08	4.653E-08	2.710E-08	1.856E-08	1.387E-08	1.094E-08	8.967E-09	7.550E-09	6.491E-09	5.672E-09
SW	5.005E-08	2.538E-08	1.629E-08	9.232E-09	6.204E-09	4.568E-09	3.562E-09	2.889E-09	2.412E-09	2.058E-09	1.786E-09
WSW	5.964E-08	3.022E-08	1.938E-08	1.097E-08	7.369E-09	5.423E-09	4.226E-09	3.425E-09	2.857E-09	2.436E-09	2.112E-09
W	3.690E-08	1.844E-08	1.172E-08	6.536E-09	4.341E-09	3.167E-09	2.450E-09	1.974E-09	1.638E-09	1.390E-09	1.200E-09
WNW	7.920E-08	3.969E-08	2.526E-08	1.414E-08	9.424E-09	6.893E-09	5.344E-09	4.314E-09	3.585E-09	3.046E-09	2.634E-09
NW	7.470E-08	3.746E-08	2.385E-08	1.335E-08	8.891E-09	6.498E-09	5.035E-09	4.062E-09	3.374E-09	2.866E-09	2.477E-09
NNW	1.637E-07	8.573E-08	5.631E-08	3.292E-08	2.259E-08	1.690E-08	1.335E-08	1.094E-08	9.222E-09	7.933E-09	6.935E-09
N	2.070E-07	1.080E-07	7.073E-08	4.117E-08	2.815E-08	2.101E-08	1.656E-08	1.355E-08	1.140E-08	9.789E-09	8.547E-09
NNE	1.757E-07	9.290E-08	6.142E-08	3.622E-08	2.500E-08	1.879E-08	1.490E-08	1.226E-08	1.035E-08	8.928E-09	7.822E-09
NE	8.922E-08	4.745E-08	3.150E-08	1.867E-08	1.293E-08	9.743E-09	7.741E-09	6.378E-09	5.396E-09	4.658E-09	4.085E-09
ENE	5.302E-08	2.756E-08	1.800E-08	1.044E-08	7.124E-09	5.307E-09	4.177E-09	3.415E-09	2.869E-09	2.462E-09	2.148E-09
E	6.585E-08	3.481E-08	2.302E-08	1.359E-08	9.393E-09	7.069E-09	5.612E-09	4.621E-09	3.908E-09	3.373E-09	2.957E-09
ESE	8.367E-08	4.366E-08	2.860E-08	1.665E-08	1.139E-08	8.496E-09	6.697E-09	5.482E-09	4.611E-09	3.961E-09	3.459E-09
SE	1.379E-07	7.338E-08	4.874E-08	2.893E-08	2.006E-08	1.513E-08	1.203E-08	9.921E-09	8.399E-09	7.255E-09	6.367E-09
SSE	2.507E-07	1.349E-07	9.032E-08	5.419E-08	3.786E-08	2.872E-08	2.295E-08	1.899E-08	1.613E-08	1.398E-08	1.230E-08

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.028E-05	2.405E-06	7.747E-07	4.006E-07	2.531E-07	1.154E-07	4.327E-08	2.206E-08	1.430E-08	1.038E-08
SSW	6.893E-06	1.612E-06	5.123E-07	2.629E-07	1.652E-07	7.465E-08	2.763E-08	1.395E-08	8.992E-09	6.501E-09
SW	2.859E-06	6.536E-07	1.985E-07	9.921E-08	6.118E-08	2.682E-08	9.456E-09	4.602E-09	2.900E-09	2.062E-09
WSW	3.353E-06	7.800E-07	2.368E-07	1.183E-07	7.292E-08	3.194E-08	1.124E-08	5.463E-09	3.438E-09	2.441E-09
W	2.239E-06	5.085E-07	1.507E-07	7.425E-08	4.531E-08	1.956E-08	6.712E-09	3.193E-09	1.982E-09	1.393E-09
WNW	4.632E-06	1.066E-06	3.197E-07	1.585E-07	9.711E-08	4.206E-08	1.452E-08	6.948E-09	4.331E-09	3.053E-09
NW	4.369E-06	1.006E-06	3.015E-07	1.495E-07	9.159E-08	3.969E-08	1.370E-08	6.551E-09	4.078E-09	2.872E-09
NNW	8.125E-06	1.907E-06	6.104E-07	3.145E-07	1.982E-07	8.998E-08	3.352E-08	1.699E-08	1.098E-08	7.945E-09
N	1.029E-05	2.439E-06	7.768E-07	3.991E-07	2.509E-07	1.134E-07	4.195E-08	2.113E-08	1.359E-08	9.806E-09
NNE	8.342E-06	1.974E-06	6.430E-07	3.345E-07	2.122E-07	9.731E-08	3.683E-08	1.889E-08	1.229E-08	8.941E-09
NE	4.121E-06	9.783E-07	3.224E-07	1.688E-07	1.075E-07	4.964E-08	1.897E-08	9.792E-09	6.393E-09	4.664E-09
ENE	2.654E-06	6.311E-07	2.002E-07	1.025E-07	6.433E-08	2.897E-08	1.065E-08	5.340E-09	3.425E-09	2.466E-09
E	3.210E-06	7.433E-07	2.414E-07	1.254E-07	7.953E-08	3.647E-08	1.382E-08	7.106E-09	4.633E-09	3.377E-09
ESE	4.135E-06	9.824E-07	3.136E-07	1.612E-07	1.014E-07	4.586E-08	1.697E-08	8.547E-09	5.498E-09	3.968E-09
SE	6.420E-06	1.511E-06	4.981E-07	2.608E-07	1.662E-07	7.677E-08	2.939E-08	1.521E-08	9.945E-09	7.265E-09
SSE	1.137E-05	2.641E-06	8.867E-07	4.692E-07	3.011E-07	1.408E-07	5.496E-08	2.885E-08	1.903E-08	1.399E-08

B247

VENTS GROUND LEVEL RELEASES - APR-JUN 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	6.186E-05	1.991E-05	1.046E-05	5.216E-06	2.122E-06	1.157E-06	7.366E-07	5.156E-07	3.846E-07	3.002E-07	2.424E-07
SSW	4.056E-05	1.327E-05	7.039E-06	3.519E-06	1.418E-06	7.682E-07	4.867E-07	3.393E-07	2.523E-07	1.964E-07	1.582E-07
SW	1.570E-05	5.490E-06	2.939E-06	1.458E-06	5.702E-07	3.027E-07	1.888E-07	1.301E-07	9.573E-08	7.388E-08	5.908E-08
WSW	1.834E-05	6.347E-06	3.465E-06	1.739E-06	6.800E-07	3.608E-07	2.250E-07	1.549E-07	1.140E-07	8.794E-08	7.030E-08
W	1.193E-05	4.279E-06	2.314E-06	1.148E-06	4.422E-07	2.323E-07	1.438E-07	9.841E-08	7.206E-08	5.537E-08	4.411E-08
WNW	2.493E-05	8.810E-06	4.789E-06	2.393E-06	9.289E-07	4.905E-07	3.047E-07	2.091E-07	1.534E-07	1.181E-07	9.422E-08
NW	2.323E-05	8.303E-06	4.524E-06	2.259E-06	8.772E-07	4.634E-07	2.880E-07	1.977E-07	1.452E-07	1.118E-07	8.924E-08
NNW	4.758E-05	1.563E-05	8.303E-06	4.152E-06	1.681E-06	9.141E-07	5.808E-07	4.059E-07	3.024E-07	2.358E-07	1.903E-07
N	5.923E-05	1.959E-05	1.057E-05	5.323E-06	2.149E-06	1.167E-06	7.401E-07	5.167E-07	3.846E-07	2.997E-07	2.417E-07
NNE	5.068E-05	1.608E-05	8.493E-06	4.260E-06	1.746E-06	9.570E-07	6.116E-07	4.294E-07	3.210E-07	2.511E-07	2.032E-07
NE	2.549E-05	7.968E-06	4.181E-06	2.097E-06	8.663E-07	4.773E-07	3.061E-07	2.155E-07	1.615E-07	1.265E-07	1.025E-07
ENE	1.529E-05	5.038E-06	2.731E-06	1.380E-06	5.561E-07	3.013E-07	1.909E-07	1.331E-07	9.896E-08	7.705E-08	6.209E-08
E	1.975E-05	6.287E-06	3.246E-06	1.606E-06	6.567E-07	3.594E-07	2.295E-07	1.610E-07	1.203E-07	9.409E-08	7.610E-08
ESE	2.421E-05	7.879E-06	4.240E-06	2.140E-06	8.658E-07	4.703E-07	2.985E-07	2.084E-07	1.551E-07	1.209E-07	9.746E-08
SE	4.025E-05	1.250E-05	6.491E-06	3.239E-06	1.338E-06	7.371E-07	4.727E-07	3.328E-07	2.494E-07	1.954E-07	1.583E-07
SSE	7.378E-05	2.255E-05	1.138E-05	5.605E-06	2.344E-06	1.302E-06	8.402E-07	5.943E-07	4.471E-07	3.515E-07	2.855E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	2.010E-07	1.035E-07	6.671E-08	3.755E-08	2.481E-08	1.789E-08	1.363E-08	1.078E-08	8.776E-09	7.299E-09	6.176E-09
SSW	1.309E-07	6.687E-08	4.290E-08	2.399E-08	1.579E-08	1.135E-08	8.628E-09	6.815E-09	5.538E-09	4.599E-09	3.886E-09
SW	4.858E-08	2.425E-08	1.533E-08	8.422E-09	5.491E-09	3.925E-09	2.974E-09	2.345E-09	1.904E-09	1.581E-09	1.337E-09
WSW	5.778E-08	2.880E-08	1.818E-08	9.971E-09	6.495E-09	4.638E-09	3.510E-09	2.765E-09	2.242E-09	1.860E-09	1.570E-09
W	3.616E-08	1.790E-08	1.126E-08	6.158E-09	4.014E-09	2.874E-09	2.183E-09	1.727E-09	1.408E-09	1.174E-09	9.972E-10
WNW	7.730E-08	3.826E-08	2.406E-08	1.314E-08	8.552E-09	6.111E-09	4.632E-09	3.656E-09	2.973E-09	2.473E-09	2.094E-09
NW	7.325E-08	3.638E-08	2.294E-08	1.259E-08	8.230E-09	5.905E-09	4.494E-09	3.562E-09	2.908E-09	2.429E-09	2.065E-09
NNW	1.576E-07	8.095E-08	5.214E-08	2.932E-08	1.937E-08	1.397E-08	1.065E-08	8.437E-09	6.874E-09	5.724E-09	4.849E-09
N	2.001E-07	1.026E-07	6.605E-08	3.715E-08	2.457E-08	1.775E-08	1.356E-08	1.076E-08	8.789E-09	7.335E-09	6.227E-09
NNE	1.687E-07	8.735E-08	5.655E-08	3.200E-08	2.122E-08	1.534E-08	1.172E-08	9.290E-09	7.575E-09	6.311E-09	5.347E-09
NE	8.524E-08	4.429E-08	2.873E-08	1.628E-08	1.079E-08	7.787E-09	5.935E-09	4.697E-09	3.821E-09	3.176E-09	2.685E-09
ENE	5.138E-08	2.628E-08	1.689E-08	9.489E-09	6.278E-09	4.538E-09	3.469E-09	2.756E-09	2.253E-09	1.882E-09	1.600E-09
E	6.318E-08	3.268E-08	2.115E-08	1.197E-08	7.938E-09	5.740E-09	4.384E-09	3.477E-09	2.835E-09	2.362E-09	2.002E-09
ESE	8.070E-08	4.134E-08	2.659E-08	1.493E-08	9.858E-09	7.109E-09	5.422E-09	4.297E-09	3.504E-09	2.920E-09	2.475E-09
SE	1.316E-07	6.838E-08	4.434E-08	2.511E-08	1.663E-08	1.200E-08	9.139E-09	7.227E-09	5.876E-09	4.880E-09	4.123E-09
SSE	2.380E-07	1.247E-07	8.128E-08	4.629E-08	3.074E-08	2.220E-08	1.692E-08	1.337E-08	1.087E-08	9.017E-09	7.609E-09

DIRECTION FROM SITE	CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.023E-05	2.381E-06	7.603E-07	3.899E-07	2.442E-07	1.088E-07	3.837E-08	1.803E-08	1.083E-08	7.321E-09
SSW	6.858E-06	1.596E-06	5.028E-07	2.559E-07	1.594E-07	7.045E-08	2.455E-08	1.145E-08	6.847E-09	4.613E-09
SW	2.848E-06	6.486E-07	1.957E-07	9.722E-08	5.958E-08	2.569E-08	8.655E-09	3.962E-09	2.357E-09	1.586E-09
WSW	3.339E-06	7.736E-07	2.332E-07	1.158E-07	7.089E-08	3.052E-08	1.025E-08	4.682E-09	2.778E-09	1.866E-09
W	2.233E-06	5.058E-07	1.492E-07	7.323E-08	4.450E-08	1.901E-08	6.338E-09	2.901E-09	1.736E-09	1.178E-09
WNW	4.617E-06	1.059E-06	3.160E-07	1.559E-07	9.503E-08	4.062E-08	1.353E-08	6.170E-09	3.675E-09	2.481E-09
NW	4.357E-06	1.000E-06	2.986E-07	1.475E-07	9.000E-08	3.860E-08	1.295E-08	5.961E-09	3.579E-09	2.436E-09
NNW	8.086E-06	1.889E-06	5.997E-07	3.066E-07	1.917E-07	8.519E-08	2.997E-08	1.408E-08	8.474E-09	5.741E-09
N	1.024E-05	2.418E-06	7.645E-07	3.900E-07	2.435E-07	1.080E-07	3.798E-08	1.789E-08	1.081E-08	7.355E-09
NNE	8.299E-06	1.954E-06	6.308E-07	3.254E-07	2.046E-07	9.174E-08	3.267E-08	1.546E-08	9.330E-09	6.329E-09
NE	4.096E-06	9.668E-07	3.155E-07	1.636E-07	1.032E-07	4.648E-08	1.660E-08	7.846E-09	4.717E-09	3.185E-09
ENE	2.643E-06	6.260E-07	1.972E-07	1.004E-07	6.256E-08	2.768E-08	9.706E-09	4.574E-09	2.768E-09	1.887E-09
E	3.193E-06	7.356E-07	2.368E-07	1.220E-07	7.664E-08	3.433E-08	1.222E-08	5.784E-09	3.491E-09	2.369E-09
ESE	4.116E-06	9.732E-07	3.083E-07	1.573E-07	9.819E-08	4.353E-08	1.527E-08	7.167E-09	4.316E-09	2.928E-09
SE	6.382E-06	1.493E-06	4.873E-07	2.526E-07	1.594E-07	7.174E-08	2.561E-08	1.209E-08	7.259E-09	4.895E-09
SSE	1.130E-05	2.606E-06	8.650E-07	4.527E-07	2.875E-07	1.306E-07	4.715E-08	2.237E-08	1.343E-08	9.043E-09

B248

VENTS GROUND LEVEL RELEASES - APR-JUN 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.863E-05	1.823E-05	9.355E-06	4.589E-06	1.816E-06	9.686E-07	6.050E-07	4.165E-07	3.061E-07	2.357E-07	1.881E-07
SSW	3.844E-05	1.215E-05	6.297E-06	3.096E-06	1.214E-06	6.431E-07	3.997E-07	2.741E-07	2.008E-07	1.542E-07	1.227E-07
SW	1.488E-05	5.023E-06	2.627E-06	1.281E-06	4.872E-07	2.527E-07	1.546E-07	1.046E-07	7.581E-08	5.769E-08	4.553E-08
WSW	1.738E-05	5.809E-06	3.098E-06	1.529E-06	5.813E-07	3.015E-07	1.843E-07	1.247E-07	9.035E-08	6.874E-08	5.424E-08
W	1.130E-05	3.913E-06	2.067E-06	1.008E-06	3.772E-07	1.935E-07	1.173E-07	7.885E-08	5.679E-08	4.300E-08	3.379E-08
WNW	2.361E-05	8.058E-06	4.278E-06	2.101E-06	7.929E-07	4.089E-07	2.489E-07	1.678E-07	1.212E-07	9.192E-08	7.236E-08
NW	2.200E-05	7.592E-06	4.040E-06	1.983E-06	7.481E-07	3.858E-07	2.349E-07	1.584E-07	1.144E-07	8.678E-08	6.833E-08
NNW	4.509E-05	1.431E-05	7.427E-06	3.652E-06	1.438E-06	7.647E-07	4.766E-07	3.275E-07	2.404E-07	1.849E-07	1.474E-07
N	5.612E-05	1.793E-05	9.450E-06	4.680E-06	1.838E-06	9.750E-07	6.066E-07	4.163E-07	3.051E-07	2.345E-07	1.867E-07
NNE	4.804E-05	1.473E-05	7.599E-06	3.749E-06	1.495E-06	8.013E-07	5.024E-07	3.469E-07	2.556E-07	1.973E-07	1.577E-07
NE	2.416E-05	7.299E-06	3.743E-06	1.846E-06	7.426E-07	4.003E-07	2.520E-07	1.745E-07	1.289E-07	9.969E-08	7.982E-08
ENE	1.449E-05	4.610E-06	2.441E-06	1.213E-06	4.753E-07	2.517E-07	1.563E-07	1.071E-07	7.843E-08	6.021E-08	4.790E-08
E	1.872E-05	5.757E-06	2.904E-06	1.413E-06	5.623E-07	3.010E-07	1.886E-07	1.301E-07	9.583E-08	7.394E-08	5.908E-08
ESE	2.294E-05	7.213E-06	3.792E-06	1.883E-06	7.408E-07	3.933E-07	2.448E-07	1.681E-07	1.232E-07	9.471E-08	7.541E-08
SE	3.815E-05	1.145E-05	5.811E-06	2.853E-06	1.147E-06	6.182E-07	3.892E-07	2.695E-07	1.991E-07	1.540E-07	1.233E-07
SSE	6.996E-05	2.066E-05	1.020E-05	4.941E-06	2.012E-06	1.094E-06	6.931E-07	4.825E-07	3.580E-07	2.779E-07	2.232E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.542E-07	7.618E-08	4.751E-08	2.548E-08	1.626E-08	1.141E-08	8.496E-09	6.596E-09	5.279E-09	4.324E-09	3.607E-09
SSW	1.004E-07	4.922E-08	3.053E-08	1.626E-08	1.033E-08	7.223E-09	5.366E-09	4.158E-09	3.322E-09	2.717E-09	2.264E-09
SW	3.699E-08	1.766E-08	1.075E-08	5.588E-09	3.494E-09	2.415E-09	1.778E-09	1.368E-09	1.087E-09	8.845E-10	7.340E-10
WSW	4.406E-08	2.101E-08	1.278E-08	6.634E-09	4.146E-09	2.864E-09	2.108E-09	1.620E-09	1.286E-09	1.046E-09	8.679E-10
W	2.735E-08	1.289E-08	7.782E-09	3.995E-09	2.478E-09	1.703E-09	1.249E-09	9.579E-10	7.591E-10	6.169E-10	5.114E-10
WNW	5.863E-08	2.769E-08	1.673E-08	8.606E-09	5.348E-09	3.680E-09	2.700E-09	2.071E-09	1.642E-09	1.334E-09	1.105E-09
NW	5.537E-08	2.619E-08	1.585E-08	8.161E-09	5.076E-09	3.495E-09	2.567E-09	1.971E-09	1.564E-09	1.272E-09	1.055E-09
NNW	1.207E-07	5.944E-08	3.699E-08	1.978E-08	1.260E-08	8.824E-09	6.566E-09	5.094E-09	4.074E-09	3.336E-09	2.782E-09
N	1.528E-07	7.502E-08	4.658E-08	2.483E-08	1.578E-08	1.104E-08	8.211E-09	6.367E-09	5.091E-09	4.168E-09	3.476E-09
NNE	1.295E-07	6.433E-08	4.028E-08	2.171E-08	1.390E-08	9.776E-09	7.296E-09	5.674E-09	4.547E-09	3.729E-09	3.114E-09
NE	6.564E-08	3.279E-08	2.060E-08	1.115E-08	7.153E-09	5.037E-09	3.763E-09	2.928E-09	2.347E-09	1.925E-09	1.608E-09
ENE	3.917E-08	1.916E-08	1.187E-08	6.311E-09	4.006E-09	2.800E-09	2.081E-09	1.613E-09	1.289E-09	1.055E-09	8.801E-10
E	4.851E-08	2.410E-08	1.509E-08	8.138E-09	5.215E-09	3.671E-09	2.742E-09	2.134E-09	1.712E-09	1.405E-09	1.174E-09
ESE	6.172E-08	3.030E-08	1.881E-08	1.003E-08	6.369E-09	4.454E-09	3.310E-09	2.566E-09	2.051E-09	1.678E-09	1.399E-09
SE	1.014E-07	5.069E-08	3.186E-08	1.725E-08	1.108E-08	7.803E-09	5.831E-09	4.538E-09	3.638E-09	2.985E-09	2.493E-09
SSE	1.841E-07	9.298E-08	5.885E-08	3.217E-08	2.078E-08	1.470E-08	1.102E-08	8.597E-09	6.907E-09	5.674E-09	4.745E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	9.209E-06	2.056E-06	6.265E-07	3.108E-07	1.896E-07	8.077E-08	2.628E-08	1.154E-08	6.637E-09	4.342E-09
SSW	6.174E-06	1.378E-06	4.144E-07	2.040E-07	1.238E-07	5.229E-08	1.680E-08	7.309E-09	4.185E-09	2.728E-09
SW	2.561E-06	5.595E-07	1.608E-07	7.713E-08	4.597E-08	1.889E-08	5.806E-09	2.448E-09	1.378E-09	8.887E-10
WSW	3.003E-06	6.676E-07	1.917E-07	9.194E-08	5.476E-08	2.248E-08	6.895E-09	2.903E-09	1.632E-09	1.051E-09
W	2.006E-06	4.357E-07	1.222E-07	5.784E-08	3.413E-08	1.383E-08	4.162E-09	1.728E-09	9.653E-10	6.200E-10
WNW	4.151E-06	9.130E-07	2.591E-07	1.233E-07	7.307E-08	2.970E-08	8.964E-09	3.733E-09	2.087E-09	1.341E-09
NW	3.915E-06	8.615E-07	2.445E-07	1.164E-07	6.900E-08	2.808E-08	8.498E-09	3.545E-09	1.986E-09	1.278E-09
NNW	7.278E-06	1.631E-06	4.938E-07	2.441E-07	1.486E-07	6.308E-08	2.041E-08	8.926E-09	5.126E-09	3.349E-09
N	9.214E-06	2.086E-06	6.287E-07	3.100E-07	1.883E-07	7.967E-08	2.564E-08	1.117E-08	6.408E-09	4.185E-09
NNE	7.472E-06	1.687E-06	5.199E-07	2.594E-07	1.589E-07	6.812E-08	2.237E-08	9.884E-09	5.708E-09	3.744E-09
NE	3.690E-06	8.358E-07	2.605E-07	1.308E-07	8.045E-08	3.467E-08	1.147E-08	5.092E-09	2.945E-09	1.933E-09
ENE	2.378E-06	5.399E-07	1.621E-07	7.968E-08	4.831E-08	2.037E-08	6.522E-09	2.834E-09	1.623E-09	1.060E-09
E	2.876E-06	6.353E-07	1.952E-07	9.729E-08	5.957E-08	2.552E-08	8.383E-09	3.711E-09	2.147E-09	1.410E-09
ESE	3.704E-06	8.401E-07	2.537E-07	1.252E-07	7.606E-08	3.218E-08	1.035E-08	4.507E-09	2.582E-09	1.686E-09
SE	5.750E-06	1.291E-06	4.024E-07	2.020E-07	1.243E-07	5.359E-08	1.775E-08	7.887E-09	4.565E-09	2.996E-09
SSE	1.019E-05	2.255E-06	7.157E-07	3.631E-07	2.249E-07	9.806E-08	3.303E-08	1.485E-08	8.645E-09	5.695E-09

VENTS GROUND LEVEL RELEASES - APR-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****
DIRECTION DISTANCES IN MILES

DIRECTION FROM SITE	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.502E-07	8.462E-08	4.345E-08	2.065E-08	7.419E-09	3.679E-09	2.166E-09	1.419E-09	9.982E-10	7.398E-10	5.701E-10
SSW	1.388E-07	4.695E-08	2.411E-08	1.146E-08	4.117E-09	2.042E-09	1.202E-09	7.872E-10	5.539E-10	4.105E-10	3.163E-10
SW	7.481E-08	2.530E-08	1.299E-08	6.175E-09	2.218E-09	1.100E-09	6.477E-10	4.241E-10	2.984E-10	2.211E-10	1.704E-10
WSW	8.030E-08	2.716E-08	1.394E-08	6.629E-09	2.381E-09	1.181E-09	6.953E-10	4.553E-10	3.203E-10	2.374E-10	1.829E-10
W	7.878E-08	2.664E-08	1.368E-08	6.503E-09	2.336E-09	1.158E-09	6.821E-10	4.466E-10	3.143E-10	2.329E-10	1.795E-10
WNW	1.450E-07	4.903E-08	2.518E-08	1.197E-08	4.299E-09	2.132E-09	1.255E-09	8.221E-10	5.784E-10	4.287E-10	3.304E-10
NW	1.810E-07	6.121E-08	3.143E-08	1.494E-08	5.367E-09	2.661E-09	1.567E-09	1.026E-09	7.220E-10	5.351E-10	4.123E-10
NNW	2.198E-07	7.432E-08	3.816E-08	1.814E-08	6.517E-09	3.232E-09	1.903E-09	1.246E-09	8.768E-10	6.498E-10	5.007E-10
N	2.965E-07	1.003E-07	5.149E-08	2.448E-08	8.792E-09	4.360E-09	2.567E-09	1.681E-09	1.183E-09	8.766E-10	6.756E-10
NNE	1.946E-07	6.580E-08	3.379E-08	1.606E-08	5.770E-09	2.861E-09	1.685E-09	1.103E-09	7.763E-10	5.753E-10	4.433E-10
NE	6.296E-08	2.129E-08	1.093E-08	5.197E-09	1.867E-09	9.258E-10	5.451E-10	3.570E-10	2.512E-10	1.861E-10	1.434E-10
ENE	7.172E-08	2.425E-08	1.245E-08	5.920E-09	2.126E-09	1.055E-09	6.209E-10	4.066E-10	2.861E-10	2.120E-10	1.634E-10
E	6.992E-08	2.364E-08	1.214E-08	5.772E-09	2.073E-09	1.028E-09	6.054E-10	3.964E-10	2.789E-10	2.067E-10	1.593E-10
ESE	9.343E-08	3.160E-08	1.622E-08	7.712E-09	2.770E-09	1.374E-09	8.090E-10	5.297E-10	3.727E-10	2.762E-10	2.129E-10
SE	1.339E-07	4.526E-08	2.324E-08	1.105E-08	3.969E-09	1.968E-09	1.159E-09	7.588E-10	5.340E-10	3.957E-10	3.049E-10
SSE	2.243E-07	7.584E-08	3.894E-08	1.851E-08	6.649E-09	3.298E-09	1.942E-09	1.271E-09	8.946E-10	6.630E-10	5.109E-10

DIRECTION FROM SITE DISTANCES IN MILES

DIRECTION FROM SITE	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	4.529E-10	2.012E-10	1.219E-10	6.160E-11	3.728E-11	2.500E-11	1.791E-11	1.345E-11	1.046E-11	8.354E-12	6.818E-12
SSW	2.513E-10	1.116E-10	6.762E-11	3.418E-11	2.069E-11	1.387E-11	9.939E-12	7.463E-12	5.803E-12	4.635E-12	3.783E-12
SW	1.354E-10	6.014E-11	3.643E-11	1.841E-11	1.115E-11	7.473E-12	5.355E-12	4.021E-12	3.126E-12	2.497E-12	2.038E-12
WSW	1.453E-10	6.457E-11	3.911E-11	1.977E-11	1.197E-11	8.022E-12	5.748E-12	4.316E-12	3.356E-12	2.681E-12	2.188E-12
W	1.426E-10	6.334E-11	3.837E-11	1.939E-11	1.174E-11	7.870E-12	5.639E-12	4.234E-12	3.292E-12	2.630E-12	2.147E-12
WNW	2.624E-10	1.166E-10	7.062E-11	3.570E-11	2.161E-11	1.449E-11	1.038E-11	7.794E-12	6.060E-12	4.841E-12	3.951E-12
NW	3.276E-10	1.455E-10	8.815E-11	4.456E-11	2.697E-11	1.808E-11	1.296E-11	9.729E-12	7.564E-12	6.042E-12	4.932E-12
NNW	3.978E-10	1.767E-10	1.070E-10	5.411E-11	3.275E-11	2.196E-11	1.573E-11	1.181E-11	9.186E-12	7.338E-12	5.989E-12
N	5.367E-10	2.384E-10	1.444E-10	7.300E-11	4.418E-11	2.962E-11	2.123E-11	1.594E-11	1.239E-11	9.899E-12	8.080E-12
NNE	3.522E-10	1.565E-10	9.478E-11	4.790E-11	2.899E-11	1.944E-11	1.393E-11	1.046E-11	8.133E-12	6.496E-12	5.303E-12
NE	1.140E-10	5.062E-11	3.067E-11	1.550E-11	9.381E-12	6.290E-12	4.507E-12	3.384E-12	2.631E-12	2.102E-12	1.716E-12
ENE	1.298E-10	5.766E-11	3.493E-11	1.765E-11	1.069E-11	7.164E-12	5.134E-12	3.855E-12	2.997E-12	2.394E-12	1.954E-12
E	1.266E-10	5.622E-11	3.405E-11	1.721E-11	1.042E-11	6.985E-12	5.005E-12	3.758E-12	2.922E-12	2.334E-12	1.905E-12
ESE	1.691E-10	7.512E-11	4.551E-11	2.300E-11	1.392E-11	9.334E-12	6.688E-12	5.022E-12	3.905E-12	3.119E-12	2.546E-12
SE	2.423E-10	1.076E-10	6.519E-11	3.295E-11	1.994E-11	1.337E-11	9.581E-12	7.195E-12	5.594E-12	4.469E-12	3.647E-12
SSE	4.059E-10	1.803E-10	1.092E-10	5.521E-11	3.341E-11	2.240E-11	1.605E-11	1.205E-11	9.372E-12	7.487E-12	6.111E-12

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****
DIRECTION FROM SITE SEGMENT BOUNDARIES IN MILES

DIRECTION FROM SITE	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.247E-08	8.698E-09	2.271E-09	1.020E-09	5.769E-10	2.219E-10	6.419E-11	2.544E-11	1.358E-11	8.408E-12
SSW	2.356E-08	4.827E-09	1.260E-09	5.659E-10	3.201E-10	1.231E-10	3.562E-11	1.412E-11	7.538E-12	4.666E-12
SW	1.269E-08	2.600E-09	6.788E-10	3.049E-10	1.725E-10	6.633E-11	1.919E-11	7.605E-12	4.061E-12	2.514E-12
WSW	1.363E-08	2.792E-09	7.287E-10	3.273E-10	1.852E-10	7.120E-11	2.060E-11	8.164E-12	4.360E-12	2.698E-12
W	1.337E-08	2.739E-09	7.149E-10	3.211E-10	1.816E-10	6.985E-11	2.021E-11	8.009E-12	4.277E-12	2.647E-12
WNW	2.461E-08	5.041E-09	1.316E-09	5.910E-10	3.343E-10	1.286E-10	3.720E-11	1.474E-11	7.872E-12	4.873E-12
NW	3.072E-08	6.292E-09	1.643E-09	7.377E-10	4.173E-10	1.605E-10	4.643E-11	1.840E-11	9.826E-12	6.082E-12
NNW	3.730E-08	7.640E-09	1.995E-09	8.958E-10	5.068E-10	1.949E-10	5.638E-11	2.235E-11	1.193E-11	7.386E-12
N	5.032E-08	1.031E-08	2.691E-09	1.209E-09	6.837E-10	2.629E-10	7.606E-11	3.015E-11	1.610E-11	9.964E-12
NNE	3.302E-08	6.764E-09	1.766E-09	7.931E-10	4.487E-10	1.725E-10	4.992E-11	1.978E-11	1.056E-11	6.539E-12
NE	1.069E-08	2.189E-09	5.714E-10	2.566E-10	1.452E-10	5.583E-11	1.615E-11	6.401E-12	3.418E-12	2.116E-12
ENE	1.217E-08	2.493E-09	6.508E-10	2.923E-10	1.654E-10	6.359E-11	1.840E-11	7.291E-12	3.893E-12	2.410E-12
E	1.187E-08	2.431E-09	6.345E-10	2.850E-10	1.612E-10	6.200E-11	1.794E-11	7.109E-12	3.796E-12	2.350E-12
ESE	1.586E-08	3.248E-09	8.479E-10	3.808E-10	2.154E-10	8.284E-11	2.397E-11	9.499E-12	5.073E-12	3.140E-12
SE	2.272E-08	4.653E-09	1.215E-09	5.455E-10	3.086E-10	1.187E-10	3.433E-11	1.361E-11	7.267E-12	4.498E-12
SSE	3.806E-08	7.796E-09	2.035E-09	9.140E-10	5.171E-10	1.988E-10	5.753E-11	2.280E-11	1.218E-11	7.536E-12

B250

VENTS GROUND LEVEL RELEASES - APR-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION	DIRECTION FROM SITE (MI)	DIST. (MI)	X/Q (SEC/M3) NO	X/Q (SEC/M3) 2.26 DAY DECAY	X/Q (SEC/M3) 8.0 DAY DECAY	D/Q (PER SQ. METER) DEPLETED
A	Site Boundary	S	.80	9.0E-06	9.0E-06	8.0E-06	3.7E-08
A	Site Boundary	SSW	.82	5.6E-06	5.6E-06	5.0E-06	1.9E-08
A	Site Boundary	SW	.97	1.6E-06	1.5E-06	1.4E-06	6.6E-09
A	Site Boundary	WSW	.93	2.1E-06	2.1E-06	1.9E-06	8.1E-09
A	Site Boundary	W	.91	1.4E-06	1.4E-06	1.3E-06	8.2E-09
A	Site Boundary	WNW	.94	2.8E-06	2.8E-06	2.5E-06	1.4E-08
A	Site Boundary	NW	.81	3.8E-06	3.7E-06	3.3E-06	2.6E-08
A	Site Boundary	NNW	.69	9.5E-06	9.5E-06	8.5E-06	4.4E-08
A	Site Boundary	N	.67	1.2E-05	1.2E-05	1.1E-05	6.2E-08
A	Site Boundary	NNE	.60	1.2E-05	1.2E-05	1.1E-05	4.9E-08
A	Site Boundary	NE	.62	5.6E-06	5.6E-06	5.0E-06	1.5E-08
A	Site Boundary	ENE	.59	3.9E-06	3.9E-06	3.6E-06	1.9E-08
A	Site Boundary	E	.53	5.8E-06	5.8E-06	5.3E-06	2.2E-08
A	Site Boundary	ESE	.54	7.0E-06	7.0E-06	6.4E-06	2.8E-08
A	Site Boundary	SE	.65	8.2E-06	8.1E-06	7.3E-06	3.0E-08
A	Site Boundary	SSE	.81	9.4E-06	9.4E-06	8.4E-06	3.2E-08
A	Nearest Res	SSW	3.00	3.5E-07	3.4E-07	2.7E-07	7.9E-10
A	Nearest Res	SW	1.00	1.5E-06	1.5E-06	1.3E-06	6.2E-09
A	Nearest Res	WSW	1.90	4.1E-07	4.0E-07	3.4E-07	1.3E-09
A	Nearest Res	W	1.00	1.2E-06	1.1E-06	1.0E-06	6.5E-09
A	Nearest Res	WNW	1.70	7.1E-07	7.0E-07	5.9E-07	3.2E-09
A	Nearest Res	NW	.90	2.9E-06	2.9E-06	2.6E-06	2.0E-08
A	Nearest Res	NNW	1.90	1.0E-06	1.0E-06	8.5E-07	3.7E-09
A	Nearest Res	N	2.90	5.6E-07	5.5E-07	4.5E-07	1.8E-09
A	Nearest Res	NNE	1.70	1.4E-06	1.3E-06	1.1E-06	4.2E-09
A	Nearest Res	ENE	1.70	4.3E-07	4.2E-07	3.6E-07	1.6E-09
A	Nearest Res	E	2.20	3.0E-07	3.0E-07	2.5E-07	8.2E-10
A	Nearest Res	SE	2.80	3.9E-07	3.8E-07	3.1E-07	8.9E-10
A	Nearest Cow	NNW	3.50	3.1E-07	3.0E-07	2.4E-07	8.8E-10
A	Nearest Garde	SSW	3.00	3.5E-07	3.4E-07	2.7E-07	7.9E-10
A	Nearest Garde	SW	2.20	2.5E-07	2.5E-07	2.0E-07	8.8E-10
A	Nearest Garde	WNW	1.70	7.1E-07	7.0E-07	5.9E-07	3.2E-09
A	Nearest Garde	NW	.90	2.9E-06	2.9E-06	2.6E-06	2.0E-08
A	Nearest Garde	NNW	2.80	4.7E-07	4.6E-07	3.8E-07	1.5E-09
A	Nearest Garde	E	2.20	3.0E-07	3.0E-07	2.5E-07	8.2E-10
A	Nearest Garde	ESE	2.20	3.9E-07	3.9E-07	3.2E-07	1.1E-09
A	Nearest Garde	SE	2.80	3.9E-07	3.8E-07	3.1E-07	8.9E-10

B251

Atmospheric Diffusion Estimates

Ground Level Releases

January-June 2018

VENTS GROUND LEVEL RELEASES - JAN-JUN 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.826E-05	1.899E-05	1.001E-05	4.995E-06	2.028E-06	1.106E-06	7.045E-07	4.939E-07	3.691E-07	2.888E-07	2.339E-07
SSW	3.431E-05	1.141E-05	6.100E-06	3.057E-06	1.231E-06	6.674E-07	4.234E-07	2.958E-07	2.204E-07	1.720E-07	1.390E-07
SW	1.473E-05	5.197E-06	2.778E-06	1.379E-06	5.405E-07	2.876E-07	1.798E-07	1.242E-07	9.160E-08	7.087E-08	5.681E-08
WSW	1.518E-05	5.315E-06	2.883E-06	1.443E-06	5.662E-07	3.016E-07	1.887E-07	1.304E-07	9.623E-08	7.449E-08	5.974E-08
W	1.517E-05	5.203E-06	2.739E-06	1.352E-06	5.339E-07	2.858E-07	1.796E-07	1.245E-07	9.221E-08	7.158E-08	5.756E-08
WNW	2.162E-05	7.642E-06	4.140E-06	2.068E-06	8.074E-07	4.284E-07	2.672E-07	1.841E-07	1.356E-07	1.047E-07	8.382E-08
NW	2.551E-05	8.715E-06	4.678E-06	2.338E-06	9.311E-07	5.011E-07	3.162E-07	2.199E-07	1.632E-07	1.270E-07	1.023E-07
NNW	5.072E-05	1.631E-05	8.614E-06	4.315E-06	1.772E-06	9.737E-07	6.242E-07	4.397E-07	3.300E-07	2.591E-07	2.104E-07
N	7.125E-05	2.262E-05	1.199E-05	6.030E-06	2.491E-06	1.374E-06	8.836E-07	6.239E-07	4.691E-07	3.689E-07	3.000E-07
NNE	4.904E-05	1.561E-05	8.291E-06	4.176E-06	1.720E-06	9.469E-07	6.077E-07	4.285E-07	3.218E-07	2.528E-07	2.054E-07
NE	2.692E-05	8.532E-06	4.487E-06	2.250E-06	9.287E-07	5.120E-07	3.289E-07	2.321E-07	1.744E-07	1.371E-07	1.114E-07
ENE	1.917E-05	6.195E-06	3.319E-06	1.675E-06	6.250E-07	3.734E-07	2.384E-07	1.674E-07	1.253E-07	9.812E-07	7.951E-08
E	1.890E-05	6.122E-06	3.216E-06	1.604E-06	6.549E-07	3.566E-07	2.293E-07	1.611E-07	1.207E-07	9.461E-08	7.673E-08
ESE	2.271E-05	7.468E-06	3.988E-06	2.003E-06	8.130E-07	4.432E-07	2.823E-07	1.978E-07	1.478E-07	1.156E-07	9.359E-08
SE	3.666E-05	1.184E-05	6.275E-06	3.150E-06	1.284E-06	7.024E-07	4.485E-07	3.149E-07	2.357E-07	1.846E-07	1.496E-07
SSE	6.066E-05	1.920E-05	9.859E-06	4.877E-06	2.014E-06	1.111E-06	7.146E-07	5.046E-07	3.795E-07	2.985E-07	2.428E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.944E-07	1.017E-07	6.671E-08	3.895E-08	2.671E-08	1.998E-08	1.578E-08	1.294E-08	1.091E-08	9.381E-09	8.203E-09
SSW	1.153E-07	5.981E-08	3.903E-08	2.261E-08	1.542E-08	1.149E-08	9.042E-09	7.392E-09	6.213E-09	5.332E-09	4.653E-09
SW	4.682E-08	2.367E-08	1.516E-08	8.556E-09	5.729E-09	4.207E-09	3.273E-09	2.650E-09	2.209E-09	1.882E-09	1.631E-09
WSW	4.926E-08	2.494E-08	1.599E-08	9.041E-09	6.064E-09	4.458E-09	3.471E-09	2.812E-09	2.344E-09	1.998E-09	1.732E-09
W	4.758E-08	2.436E-08	1.575E-08	9.013E-09	6.100E-09	4.517E-09	3.539E-09	2.883E-09	2.415E-09	2.067E-09	1.800E-09
WNW	6.899E-08	3.467E-08	2.212E-08	1.241E-08	8.279E-09	6.061E-09	4.703E-09	3.799E-09	3.159E-09	2.686E-09	2.324E-09
NW	8.466E-08	4.351E-08	2.821E-08	1.619E-08	1.098E-08	8.136E-09	6.379E-09	5.197E-09	4.355E-09	3.729E-09	3.246E-09
NNW	1.754E-07	9.262E-08	6.118E-08	3.604E-08	2.485E-08	1.867E-08	1.479E-08	1.216E-08	1.027E-08	8.855E-09	7.756E-09
N	2.503E-07	1.327E-07	8.794E-08	5.199E-08	3.594E-08	2.704E-08	2.146E-08	1.766E-08	1.493E-08	1.288E-08	1.129E-08
NNE	1.713E-07	9.053E-08	5.984E-08	3.527E-08	2.433E-08	1.828E-08	1.449E-08	1.191E-08	1.006E-08	8.672E-09	7.595E-09
NE	9.294E-08	4.920E-08	3.256E-08	1.922E-08	1.328E-08	9.982E-09	7.917E-09	6.514E-09	5.505E-09	4.748E-09	4.161E-09
ENE	6.615E-08	3.466E-08	2.277E-08	1.331E-08	9.133E-09	6.833E-09	5.397E-09	4.425E-09	3.728E-09	3.207E-09	2.803E-09
E	6.389E-08	3.358E-08	2.211E-08	1.298E-08	8.930E-09	6.696E-09	5.300E-09	4.354E-09	3.674E-09	3.165E-09	2.770E-09
ESE	7.779E-08	4.061E-08	2.661E-08	1.550E-08	1.061E-08	7.917E-09	6.244E-09	5.112E-09	4.302E-09	3.697E-09	3.229E-09
SE	1.245E-07	6.523E-08	4.287E-08	2.508E-08	1.721E-08	1.288E-08	1.018E-08	8.348E-09	7.036E-09	6.054E-09	5.294E-09
SSE	2.027E-07	1.076E-07	7.137E-08	4.230E-08	2.931E-08	2.210E-08	1.757E-08	1.448E-08	1.226E-08	1.059E-08	9.293E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	9.777E-06	2.277E-06	7.272E-07	3.742E-07	2.355E-07	1.067E-07	3.968E-08	2.010E-08	1.298E-08	9.396E-09
SSW	5.928E-06	1.386E-06	4.374E-07	2.235E-07	1.400E-07	6.291E-08	2.307E-08	1.156E-08	7.414E-09	5.341E-09
SW	2.694E-06	6.144E-07	1.863E-07	9.300E-08	5.728E-08	2.503E-08	8.767E-09	4.240E-09	2.660E-09	1.886E-09
WSW	2.784E-06	6.434E-07	1.955E-07	9.770E-08	6.023E-08	2.637E-08	9.262E-09	4.492E-09	2.822E-09	2.002E-09
W	2.670E-06	6.053E-07	1.859E-07	9.359E-08	5.802E-08	2.569E-08	9.215E-09	4.548E-09	2.892E-09	2.071E-09
WNW	3.997E-06	9.191E-07	2.769E-07	1.377E-07	8.452E-08	3.672E-08	1.273E-08	6.109E-09	3.813E-09	2.692E-09
NW	4.535E-06	1.053E-06	3.270E-07	1.656E-07	1.031E-07	4.586E-08	1.654E-08	8.190E-09	5.214E-09	3.736E-09
NNW	8.413E-06	1.982E-06	6.436E-07	3.343E-07	2.119E-07	9.704E-08	3.665E-08	1.877E-08	1.220E-08	8.868E-09
N	1.170E-05	2.781E-06	9.106E-07	4.751E-07	3.020E-07	1.390E-07	5.284E-08	2.718E-08	1.771E-08	1.290E-08
NNE	8.088E-06	1.922E-06	6.265E-07	3.260E-07	2.068E-07	9.483E-08	3.587E-08	1.838E-08	1.194E-08	8.685E-09
NE	4.392E-06	1.037E-06	3.390E-07	1.767E-07	1.122E-07	5.153E-08	1.954E-08	1.003E-08	6.531E-09	4.755E-09
ENE	3.228E-06	7.658E-07	2.460E-07	1.270E-07	8.008E-08	3.637E-08	1.356E-08	6.872E-09	4.437E-09	3.212E-09
E	3.145E-06	7.341E-07	2.365E-07	1.223E-07	7.727E-08	3.522E-08	1.321E-08	6.734E-09	4.365E-09	3.169E-09
ESE	3.879E-06	9.131E-07	2.914E-07	1.498E-07	9.426E-08	4.265E-08	1.579E-08	7.965E-09	5.127E-09	3.703E-09
SE	6.122E-06	1.440E-06	4.628E-07	2.389E-07	1.507E-07	6.846E-08	2.553E-08	1.295E-08	8.371E-09	6.063E-09
SSE	9.720E-06	2.249E-06	7.364E-07	3.844E-07	2.444E-07	1.126E-07	4.299E-08	2.221E-08	1.452E-08	1.060E-08

B253

VENTS GROUND LEVEL RELEASES - JAN-JUN 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE
	SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	
S	5.815E-05	1.893E-05	9.958E-06	4.962E-06	2.007E-06	1.090E-06	6.919E-07	4.832E-07	3.598E-07	2.804E-07	2.261E-07
SSW	3.424E-05	1.137E-05	6.067E-06	3.036E-06	1.217E-06	6.575E-07	4.155E-07	2.891E-07	2.146E-07	1.668E-07	1.342E-07
SW	1.471E-05	5.182E-06	2.767E-06	1.371E-06	5.360E-07	2.844E-07	1.773E-07	1.220E-07	8.977E-08	6.925E-08	5.535E-08
WSW	1.515E-05	5.299E-06	2.870E-06	1.434E-06	5.609E-07	2.977E-07	1.857E-07	1.278E-07	9.406E-08	7.256E-08	5.800E-08
W	1.515E-05	5.189E-06	2.728E-06	1.344E-06	5.294E-07	2.826E-07	1.770E-07	1.223E-07	9.030E-08	6.987E-08	5.600E-08
WNW	2.159E-05	7.623E-06	4.124E-06	2.058E-06	8.013E-07	4.240E-07	2.637E-07	1.812E-07	1.331E-07	1.025E-07	8.184E-08
NW	2.547E-05	8.691E-06	4.659E-06	2.325E-06	9.233E-07	4.954E-07	3.116E-07	2.160E-07	1.599E-07	1.240E-07	9.956E-08
NNW	5.062E-05	1.625E-05	8.566E-06	4.283E-06	1.752E-06	9.590E-07	6.123E-07	4.296E-07	3.211E-07	2.511E-07	2.031E-07
N	7.111E-05	2.254E-05	1.192E-05	5.987E-06	2.464E-06	1.354E-06	8.675E-07	6.101E-07	4.570E-07	3.580E-07	2.900E-07
NNE	4.894E-05	1.555E-05	8.245E-06	4.145E-06	1.700E-06	9.324E-07	5.960E-07	4.185E-07	3.130E-07	2.449E-07	1.981E-07
NE	2.687E-05	8.498E-06	4.460E-06	2.233E-06	9.174E-07	5.036E-07	3.222E-07	2.263E-07	1.693E-07	1.325E-07	1.072E-07
ENE	1.913E-05	6.173E-06	3.302E-06	1.663E-06	6.756E-07	3.680E-07	2.341E-07	1.637E-07	1.220E-07	9.521E-08	7.685E-08
E	1.886E-05	6.099E-06	3.198E-06	1.592E-06	6.475E-07	3.531E-07	2.248E-07	1.574E-07	1.174E-07	9.164E-08	7.401E-08
ESE	2.267E-05	7.443E-06	3.968E-06	1.990E-06	8.047E-07	4.370E-07	2.774E-07	1.937E-07	1.442E-07	1.123E-07	9.059E-08
SE	3.659E-05	1.180E-05	6.244E-06	3.129E-06	1.272E-06	6.928E-07	4.407E-07	3.083E-07	2.298E-07	1.793E-07	1.448E-07
SSE	6.053E-05	1.912E-05	9.802E-06	4.840E-06	1.990E-06	1.093E-06	7.000E-07	4.921E-07	3.684E-07	2.884E-07	2.336E-07

ANNUAL AVERAGE	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE
	SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	
S	1.873E-07	9.602E-08	6.178E-08	3.469E-08	2.291E-08	1.651E-08	1.258E-08	9.961E-09	8.113E-09	6.752E-09	5.717E-09
SSW	1.109E-07	5.641E-08	3.608E-08	2.010E-08	1.320E-08	9.468E-09	7.187E-09	5.672E-09	4.605E-09	3.822E-09	3.228E-09
SW	4.548E-08	2.264E-08	1.429E-08	7.824E-09	5.088E-09	3.630E-09	2.746E-09	2.163E-09	1.755E-09	1.457E-09	1.231E-09
WSW	4.766E-08	2.372E-08	1.496E-08	8.181E-09	5.313E-09	3.784E-09	2.857E-09	2.246E-09	1.818E-09	1.506E-09	1.269E-09
W	4.614E-08	2.323E-08	1.478E-08	8.183E-09	5.361E-09	3.846E-09	2.922E-09	2.310E-09	1.879E-09	1.563E-09	1.324E-09
WNW	6.717E-08	3.330E-08	2.095E-08	1.144E-08	7.436E-09	5.305E-09	4.015E-09	3.164E-09	2.569E-09	2.134E-09	1.805E-09
NW	8.215E-08	4.156E-08	2.651E-08	1.475E-08	9.697E-09	6.976E-09	5.312E-09	4.208E-09	3.430E-09	2.859E-09	2.425E-09
NNW	1.686E-07	8.722E-08	5.647E-08	3.197E-08	2.121E-08	1.535E-08	1.173E-08	9.309E-09	7.598E-09	6.335E-09	5.373E-09
N	2.411E-07	1.254E-07	8.150E-08	4.642E-08	3.095E-08	2.248E-08	1.725E-08	1.374E-08	1.125E-08	9.406E-09	8.000E-09
NNE	1.645E-07	8.522E-08	5.519E-08	3.126E-08	2.075E-08	1.501E-08	1.147E-08	9.102E-09	7.428E-09	6.192E-09	5.250E-09
NE	8.906E-08	4.612E-08	2.986E-08	1.689E-08	1.118E-08	8.074E-09	6.156E-09	4.874E-09	3.968E-09	3.301E-09	2.792E-09
ENE	6.369E-08	3.273E-08	2.109E-08	1.186E-08	7.843E-09	5.658E-09	4.315E-09	3.419E-09	2.786E-09	2.320E-09	1.966E-09
E	6.137E-08	3.159E-08	2.038E-08	1.148E-08	7.596E-09	5.482E-09	4.180E-09	3.312E-09	2.698E-09	2.246E-09	1.902E-09
ESE	7.501E-08	3.843E-08	2.472E-08	1.388E-08	9.159E-09	6.603E-09	5.033E-09	3.988E-09	3.250E-09	2.707E-09	2.294E-09
SE	1.200E-07	6.170E-08	3.978E-08	2.240E-08	1.481E-08	1.069E-08	8.156E-09	6.465E-09	5.271E-09	4.391E-09	3.721E-09
SSE	1.941E-07	1.007E-07	6.532E-08	3.701E-08	2.455E-08	1.774E-08	1.353E-08	1.072E-08	8.729E-09	7.261E-09	6.143E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
FROM SITE	S	9.731E-06	2.256E-06	7.146E-07	3.648E-07	2.278E-07	1.011E-07	3.547E-08	1.664E-08	1.001E-08	6.772E-09
SSW	5.898E-06	1.373E-06	4.295E-07	2.177E-07	1.353E-07	5.949E-08	2.058E-08	9.550E-09	5.698E-09	3.834E-09	
SW	2.683E-06	6.098E-07	1.838E-07	9.117E-08	5.581E-08	2.400E-08	8.044E-09	3.665E-09	2.174E-09	1.461E-09	
WSW	2.771E-06	6.379E-07	1.924E-07	9.552E-08	5.848E-08	2.515E-08	8.412E-09	3.821E-09	2.258E-09	1.511E-09	
W	2.660E-06	6.008E-07	1.833E-07	9.167E-08	5.646E-08	2.456E-08	8.394E-09	3.881E-09	2.321E-09	1.568E-09	
WNW	3.983E-06	9.128E-07	2.734E-07	1.352E-07	8.254E-08	3.534E-08	1.178E-08	5.357E-09	3.180E-09	2.141E-09	
NW	4.518E-06	1.045E-06	3.224E-07	1.622E-07	1.003E-07	4.389E-08	1.512E-08	7.036E-09	4.227E-09	2.867E-09	
NNW	8.370E-06	1.962E-06	6.317E-07	3.254E-07	2.045E-07	9.163E-08	3.263E-08	1.546E-08	9.348E-09	6.353E-09	
N	1.164E-05	2.754E-06	8.944E-07	4.630E-07	2.920E-07	1.316E-07	4.734E-08	2.265E-08	1.379E-08	9.431E-09	
NNE	8.045E-06	1.902E-06	6.147E-07	3.172E-07	1.995E-07	8.950E-08	3.191E-08	1.512E-08	9.141E-09	6.209E-09	
NE	4.368E-06	1.026E-06	3.322E-07	1.716E-07	1.080E-07	4.844E-08	1.724E-08	8.136E-09	4.895E-09	3.310E-09	
ENE	3.212E-06	7.584E-07	2.417E-07	1.237E-07	7.742E-08	3.443E-08	1.213E-08	5.704E-09	3.434E-09	2.327E-09	
E	3.129E-06	7.266E-07	2.321E-07	1.190E-07	7.455E-08	3.323E-08	1.173E-08	5.525E-09	3.326E-09	2.252E-09	
ESE	3.861E-06	9.047E-07	2.865E-07	1.462E-07	9.126E-08	4.046E-08	1.419E-08	6.657E-09	4.005E-09	2.715E-09	
SE	6.094E-06	1.427E-06	4.550E-07	2.330E-07	1.458E-07	6.491E-08	2.289E-08	1.078E-08	6.493E-09	4.403E-09	
SSE	9.668E-06	2.225E-06	7.217E-07	3.733E-07	2.352E-07	1.057E-07	3.776E-08	1.787E-08	1.076E-08	7.282E-09	

B254

VENTS GROUND LEVEL RELEASES - JAN-JUN 2018
8.000 DAY DECAY, DEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	DISTANCE IN MILES FROM THE SITE										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.511E-05	1.733E-05	8.906E-06	4.364E-06	1.717E-06	9.118E-07	5.678E-07	3.899E-07	2.859E-07	2.198E-07	1.751E-07
SSW	3.245E-05	1.041E-05	5.427E-06	2.671E-06	1.042E-06	5.503E-07	3.411E-07	2.334E-07	1.707E-07	1.309E-07	1.040E-07
SW	1.394E-05	4.742E-06	2.473E-06	1.205E-06	4.579E-07	2.374E-07	1.451E-07	9.813E-08	7.106E-08	5.404E-08	4.263E-08
WSW	1.436E-05	4.849E-06	2.566E-06	1.261E-06	4.796E-07	2.488E-07	1.522E-07	1.030E-07	7.460E-08	5.675E-08	4.479E-08
W	1.435E-05	4.748E-06	2.438E-06	1.181E-06	4.523E-07	2.359E-07	1.449E-07	9.841E-08	7.152E-08	5.457E-08	4.318E-08
WNW	2.045E-05	6.973E-06	3.685E-06	1.808E-06	6.842E-07	3.537E-07	2.156E-07	1.456E-07	1.052E-07	7.990E-08	6.295E-08
NW	2.413E-05	7.953E-06	4.164E-06	2.044E-06	7.889E-07	4.136E-07	2.550E-07	1.738E-07	1.266E-07	9.681E-08	7.674E-08
NNW	4.798E-05	1.488E-05	7.664E-06	3.769E-06	1.500E-06	8.028E-07	5.029E-07	3.470E-07	2.555E-07	1.971E-07	1.575E-07
N	6.739E-05	2.064E-05	1.067E-05	5.268E-06	2.109E-06	1.133E-06	7.120E-07	4.924E-07	3.633E-07	2.807E-07	2.246E-07
NNE	4.638E-05	1.424E-05	7.377E-06	3.648E-06	1.456E-06	7.806E-07	4.896E-07	3.381E-07	2.491E-07	1.923E-07	1.537E-07
NE	2.546E-05	7.783E-06	3.992E-06	1.966E-06	7.860E-07	4.220E-07	2.649E-07	1.830E-07	1.349E-07	1.042E-07	8.332E-08
ENE	1.813E-05	5.652E-06	2.953E-06	1.463E-06	5.782E-07	3.079E-07	1.921E-07	1.321E-07	9.702E-08	7.467E-08	5.953E-08
E	1.788E-05	5.585E-06	2.861E-06	1.401E-06	5.544E-07	2.957E-07	1.847E-07	1.271E-07	9.344E-08	7.197E-08	5.742E-08
ESE	2.148E-05	6.813E-06	3.549E-06	1.750E-06	6.884E-07	3.655E-07	2.275E-07	1.562E-07	1.145E-07	8.803E-08	7.010E-08
SE	3.468E-05	1.080E-05	5.584E-06	2.752E-06	1.088E-06	5.794E-07	3.615E-07	2.486E-07	1.826E-07	1.405E-07	1.120E-07
SSE	5.738E-05	1.751E-05	8.771E-06	4.260E-06	1.705E-06	9.160E-07	5.755E-07	3.980E-07	2.936E-07	2.269E-07	1.815E-07

SECTOR	DISTANCE IN MILES FROM THE SITE										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.434E-07	7.049E-08	4.382E-08	2.341E-08	1.490E-08	1.043E-08	7.761E-09	6.021E-09	4.815E-09	3.942E-09	3.288E-09
SSW	8.500E-08	4.146E-08	2.563E-08	1.358E-08	8.597E-09	5.995E-09	4.445E-09	3.438E-09	2.743E-09	2.241E-09	1.865E-09
SW	3.461E-08	1.647E-08	1.001E-08	5.182E-09	3.230E-09	2.227E-09	1.636E-09	1.257E-09	9.968E-10	8.104E-10	6.719E-10
WSW	3.637E-08	1.733E-08	1.054E-08	5.459E-09	3.405E-09	2.348E-09	1.726E-09	1.325E-09	1.051E-09	8.538E-10	7.075E-10
W	3.515E-08	1.694E-08	1.038E-08	5.446E-09	3.427E-09	2.380E-09	1.759E-09	1.358E-09	1.082E-09	8.825E-10	7.339E-10
WNW	5.103E-08	2.416E-08	1.463E-08	7.534E-09	4.683E-09	3.222E-09	2.364E-09	1.813E-09	1.436E-09	1.167E-09	9.666E-10
NW	6.257E-08	3.027E-08	1.861E-08	9.795E-09	6.176E-09	4.296E-09	3.179E-09	2.456E-09	1.958E-09	1.599E-09	1.331E-09
NNW	1.293E-07	6.417E-08	4.015E-08	2.163E-08	1.384E-08	9.733E-09	7.264E-09	5.650E-09	4.529E-09	3.715E-09	3.103E-09
N	1.846E-07	9.205E-08	5.778E-08	3.126E-08	2.007E-08	1.415E-08	1.058E-08	8.243E-09	6.618E-09	5.437E-09	4.549E-09
NNE	1.262E-07	6.271E-08	3.927E-08	2.116E-08	1.355E-08	9.528E-09	7.111E-09	5.531E-09	4.433E-09	3.637E-09	3.038E-09
NE	6.844E-08	3.404E-08	2.133E-08	1.150E-08	7.365E-09	5.179E-09	3.865E-09	3.005E-09	2.408E-09	1.975E-09	1.649E-09
ENE	4.878E-08	2.403E-08	1.496E-08	8.001E-09	5.096E-09	3.571E-09	2.657E-09	2.062E-09	1.650E-09	1.351E-09	1.127E-09
E	4.708E-08	2.326E-08	1.451E-08	7.783E-09	4.968E-09	3.487E-09	2.599E-09	2.019E-09	1.616E-09	1.325E-09	1.106E-09
ESE	5.738E-08	2.817E-08	1.750E-08	9.328E-09	5.927E-09	4.146E-09	3.082E-09	2.389E-09	1.910E-09	1.563E-09	1.303E-09
SE	9.181E-08	4.525E-08	2.818E-08	1.508E-08	9.608E-09	6.734E-09	5.013E-09	3.891E-09	3.113E-09	2.550E-09	2.128E-09
SSE	1.492E-07	7.443E-08	4.673E-08	2.528E-08	1.623E-08	1.144E-08	8.548E-09	6.655E-09	5.339E-09	4.381E-09	3.661E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	8.759E-06	1.947E-06	5.883E-07	2.904E-07	1.766E-07	7.484E-08	2.416E-08	1.055E-08	6.059E-09	3.959E-09
SSW	5.309E-06	1.185E-06	3.538E-07	1.734E-07	1.049E-07	4.410E-08	1.404E-08	6.069E-09	3.461E-09	2.250E-09
SW	2.414E-06	5.259E-07	1.509E-07	7.231E-08	4.304E-08	1.763E-08	5.387E-09	2.258E-09	1.266E-09	8.143E-10
WSW	2.493E-06	5.506E-07	1.583E-07	7.591E-08	4.522E-08	1.854E-08	5.675E-09	2.381E-09	1.335E-09	8.579E-10
W	2.393E-06	5.181E-07	1.506E-07	7.275E-08	4.358E-08	1.807E-08	5.646E-09	2.411E-09	1.367E-09	8.864E-10
WNW	3.581E-06	7.870E-07	2.244E-07	1.071E-07	6.356E-08	2.590E-08	7.843E-09	3.268E-09	1.827E-09	1.173E-09
NW	4.063E-06	9.009E-07	2.648E-07	1.287E-07	7.744E-08	3.227E-08	1.015E-08	4.351E-09	2.473E-09	1.606E-09
NNW	7.536E-06	1.694E-06	5.205E-07	2.594E-07	1.588E-07	6.796E-08	2.228E-08	9.841E-09	5.684E-09	3.730E-09
N	1.048E-05	2.377E-06	7.365E-07	3.687E-07	2.264E-07	9.739E-08	3.218E-08	1.430E-08	8.292E-09	5.458E-09
NNE	7.244E-06	1.643E-06	5.066E-07	2.529E-07	1.549E-07	6.640E-08	2.180E-08	9.633E-09	5.564E-09	3.651E-09
NE	3.934E-06	8.863E-07	2.740E-07	1.370E-07	8.399E-08	3.604E-08	1.185E-08	5.237E-09	3.024E-09	1.983E-09
ENE	2.891E-06	6.548E-07	1.990E-07	9.854E-08	6.004E-08	2.550E-08	8.256E-09	3.612E-09	2.075E-09	1.356E-09
E	2.817E-06	6.276E-07	1.913E-07	9.489E-08	5.790E-08	2.466E-08	8.027E-09	3.527E-09	2.031E-09	1.330E-09
ESE	3.475E-06	7.809E-07	2.358E-07	1.163E-07	7.070E-08	2.992E-08	9.632E-09	4.195E-09	2.404E-09	1.569E-09
SE	5.484E-06	1.232E-06	3.744E-07	1.854E-07	1.130E-07	4.801E-08	1.556E-08	6.812E-09	3.915E-09	2.560E-09
SSE	8.709E-06	1.922E-06	5.953E-07	2.980E-07	1.830E-07	7.873E-08	2.603E-08	1.156E-08	6.694E-09	4.398E-09

B255

VENTS GROUND LEVEL RELEASES - JAN-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****											
DIRECTION FROM SITE	DISTANCES IN MILES										*****
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	
S	2.745E-07	9.284E-08	4.767E-08	2.266E-08	8.140E-09	4.037E-09	2.377E-09	1.556E-09	1.095E-09	8.116E-10	6.254E-10
SSW	1.281E-07	4.331E-08	2.224E-08	1.057E-08	3.798E-09	1.883E-09	1.109E-09	7.261E-10	5.109E-10	3.787E-10	2.918E-10
SW	7.358E-08	2.488E-08	1.278E-08	6.074E-09	2.182E-09	1.082E-09	6.371E-10	4.172E-10	2.935E-10	2.175E-10	1.676E-10
WSW	6.573E-08	2.223E-08	1.141E-08	5.425E-09	1.949E-09	9.665E-10	5.691E-10	3.726E-10	2.622E-10	1.943E-10	1.497E-10
W	9.012E-08	3.047E-08	1.565E-08	7.439E-09	2.672E-09	1.325E-09	7.802E-10	5.109E-10	3.595E-10	2.664E-10	2.053E-10
WNW	1.277E-07	4.317E-08	2.216E-08	1.054E-08	3.785E-09	1.877E-09	1.105E-09	7.237E-10	5.092E-10	3.774E-10	2.908E-10
NW	1.530E-07	5.172E-08	2.656E-08	1.263E-08	4.535E-09	2.249E-09	1.324E-09	8.671E-10	6.102E-10	4.522E-10	3.485E-10
NNW	1.928E-07	6.521E-08	3.348E-08	1.592E-08	5.718E-09	2.836E-09	1.670E-09	1.093E-09	7.693E-10	5.701E-10	4.393E-10
N	2.731E-07	9.236E-08	4.742E-08	2.254E-08	8.098E-09	4.016E-09	2.365E-09	1.548E-09	1.090E-09	8.074E-10	6.222E-10
NNE	1.741E-07	5.888E-08	3.023E-08	1.437E-08	5.163E-09	2.560E-09	1.508E-09	9.872E-10	6.946E-10	5.148E-10	3.967E-10
NE	8.296E-08	2.805E-08	1.440E-08	6.848E-09	2.460E-09	1.220E-09	7.183E-10	4.703E-10	3.309E-10	2.453E-10	1.890E-10
ENE	7.074E-08	2.392E-08	1.228E-08	5.840E-09	2.098E-09	1.040E-09	6.125E-10	4.011E-10	2.822E-10	2.091E-10	1.612E-10
E	6.277E-08	2.123E-08	1.090E-08	5.182E-09	1.861E-09	9.230E-10	5.435E-10	3.559E-10	2.504E-10	1.856E-10	1.430E-10
ESE	9.114E-08	3.082E-08	1.582E-08	7.523E-09	2.702E-09	1.340E-09	7.891E-10	5.167E-10	3.636E-10	2.694E-10	2.076E-10
SE	1.749E-07	5.913E-08	3.036E-08	1.443E-08	5.184E-09	2.571E-09	1.514E-09	9.913E-10	6.975E-10	5.169E-10	3.983E-10
SSE	2.808E-07	9.496E-08	4.876E-08	2.318E-08	8.326E-09	4.129E-09	2.431E-09	1.592E-09	1.120E-09	8.302E-10	6.398E-10
DIRECTION FROM SITE	DISTANCES IN MILES										*****
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	
S	4.969E-10	2.207E-10	1.337E-10	6.758E-11	4.090E-11	2.743E-11	1.965E-11	1.476E-11	1.147E-11	9.165E-12	7.481E-12
SSW	2.318E-10	1.030E-10	6.238E-11	3.153E-11	1.908E-11	1.280E-11	9.169E-12	6.885E-12	5.353E-12	4.276E-12	3.490E-12
SW	1.332E-10	5.916E-11	3.584E-11	1.811E-11	1.096E-11	7.351E-12	5.267E-12	3.955E-12	3.075E-12	2.457E-12	2.005E-12
WSW	1.190E-10	5.285E-11	3.201E-11	1.618E-11	9.793E-12	6.566E-12	4.705E-12	3.533E-12	2.747E-12	2.194E-12	1.791E-12
W	1.631E-10	7.246E-11	4.389E-11	2.218E-11	1.343E-11	9.002E-12	6.451E-12	4.844E-12	3.766E-12	3.008E-12	2.456E-12
WNW	2.310E-10	1.026E-10	6.217E-11	3.142E-11	1.902E-11	1.275E-11	9.138E-12	6.861E-12	5.335E-12	4.262E-12	3.478E-12
NW	2.768E-10	1.230E-10	7.449E-11	3.765E-11	2.279E-11	1.528E-11	1.095E-11	8.221E-12	6.392E-12	5.106E-12	4.168E-12
NNW	3.490E-10	1.550E-10	9.392E-11	4.747E-11	2.873E-11	1.926E-11	1.380E-11	1.037E-11	8.059E-12	6.438E-12	5.255E-12
N	4.943E-10	2.196E-10	1.330E-10	6.724E-11	4.069E-11	2.728E-11	1.955E-11	1.468E-11	1.141E-11	9.118E-12	7.442E-12
NNE	3.152E-10	1.400E-10	8.481E-11	4.287E-11	2.594E-11	1.740E-11	1.246E-11	9.359E-12	7.277E-12	5.813E-12	4.745E-12
NE	1.501E-10	6.670E-11	4.040E-11	2.042E-11	1.236E-11	8.287E-12	5.938E-12	4.459E-12	3.467E-12	2.770E-12	2.261E-12
ENE	1.280E-10	5.688E-11	3.446E-11	1.742E-11	1.054E-11	7.067E-12	5.064E-12	3.803E-12	2.957E-12	2.362E-12	1.928E-12
E	1.136E-10	5.047E-11	3.057E-11	1.545E-11	9.353E-12	6.271E-12	4.493E-12	3.374E-12	2.623E-12	2.096E-12	1.710E-12
ESE	1.650E-10	7.328E-11	4.439E-11	2.244E-11	1.358E-11	9.105E-12	6.524E-12	4.899E-12	3.809E-12	3.043E-12	2.484E-12
SE	3.165E-10	1.406E-10	8.516E-11	4.304E-11	2.605E-11	1.747E-11	1.252E-11	9.398E-12	7.308E-12	5.837E-12	4.765E-12
SSE	5.083E-10	2.258E-10	1.368E-10	6.913E-11	4.184E-11	2.805E-11	2.010E-11	1.509E-11	1.174E-11	9.375E-12	7.652E-12

B256

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****										
DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.659E-08	9.543E-09	2.491E-09	1.119E-09	6.330E-10	2.434E-10	7.042E-11	2.791E-11	1.490E-11	9.225E-12
SSW	2.174E-08	4.452E-09	1.162E-09	5.220E-10	2.953E-10	1.136E-10	3.286E-11	1.302E-11	6.954E-12	4.304E-12
SW	1.249E-08	2.558E-09	6.678E-10	2.999E-10	1.697E-10	6.524E-11	1.887E-11	7.481E-12	3.995E-12	2.473E-12
WSW	1.115E-08	2.285E-09	5.965E-10	2.679E-10	1.515E-10	5.828E-11	1.686E-11	6.682E-12	3.568E-12	2.209E-12
W	1.529E-08	3.133E-09	8.178E-10	3.673E-10	2.078E-10	7.990E-11	2.312E-11	9.162E-12	4.892E-12	3.028E-12
WNW	2.166E-08	4.437E-09	1.158E-09	5.203E-10	2.943E-10	1.132E-10	3.274E-11	1.298E-11	6.930E-12	4.289E-12
NW	2.596E-08	5.317E-09	1.388E-09	6.234E-10	3.527E-10	1.356E-10	3.923E-11	1.555E-11	8.304E-12	5.140E-12
NNW	3.273E-08	6.703E-09	1.750E-09	7.860E-10	4.446E-10	1.710E-10	4.947E-11	1.961E-11	1.047E-11	6.480E-12
N	4.635E-08	9.494E-09	2.479E-09	1.113E-09	6.297E-10	2.422E-10	7.006E-11	2.777E-11	1.483E-11	9.178E-12
NNE	2.955E-08	6.053E-09	1.580E-09	7.097E-10	4.015E-10	1.544E-10	4.467E-11	1.770E-11	9.453E-12	5.851E-12
NE	1.408E-08	2.884E-09	7.528E-10	3.381E-10	1.913E-10	7.356E-11	2.128E-11	8.434E-12	4.504E-12	2.788E-12
ENE	1.201E-08	2.459E-09	6.420E-10	2.883E-10	1.631E-10	6.273E-11	1.815E-11	7.192E-12	3.841E-12	2.377E-12
E	1.065E-08	2.182E-09	5.696E-10	2.558E-10	1.447E-10	5.566E-11	1.610E-11	6.382E-12	3.408E-12	2.109E-12
ESE	1.547E-08	3.168E-09	8.271E-10	3.715E-10	2.101E-10	8.081E-11	2.338E-11	9.266E-12	4.948E-12	3.063E-12
SE	2.967E-08	6.078E-09	1.587E-09	7.126E-10	4.032E-10	1.550E-10	4.485E-11	1.778E-11	9.493E-12	5.876E-12
SSE	4.766E-08	9.762E-09	2.548E-09	1.145E-09	6.475E-10	2.490E-10	7.203E-11	2.855E-11	1.525E-11	9.437E-12

VENTS GROUND LEVEL RELEASES - JAN-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

ID	RELEASE TYPE OF LOCATION	DIRECTION FROM SITE (MI)	DIST. (MI)	X/Q (SEC/M3)			D/Q (PER SQ.METER)
				NO DECAY	2.26 DAY DECAY	8.0 DAY DECAY	
				UNDEPLETED	UNDEPLETED	DEPLETED	
A	Site Boundary	S	.80	8.6E-06	8.6E-06	7.6E-06	4.1E-08
A	Site Boundary	SSW	.82	4.9E-06	4.8E-06	4.3E-06	1.7E-08
A	Site Boundary	SW	.97	1.5E-06	1.5E-06	1.3E-06	6.5E-09
A	Site Boundary	WSW	.93	1.7E-06	1.7E-06	1.5E-06	6.6E-09
A	Site Boundary	W	.91	1.7E-06	1.7E-06	1.5E-06	9.4E-09
A	Site Boundary	WNW	.94	2.4E-06	2.4E-06	2.1E-06	1.2E-08
A	Site Boundary	NW	.81	3.9E-06	3.9E-06	3.4E-06	2.2E-08
A	Site Boundary	NNW	.69	9.9E-06	9.8E-06	8.8E-06	3.9E-08
A	Site Boundary	N	.67	1.4E-05	1.4E-05	1.3E-05	5.7E-08
A	Site Boundary	NNE	.60	1.2E-05	1.2E-05	1.1E-05	4.4E-08
A	Site Boundary	NE	.62	6.0E-06	5.9E-06	5.4E-06	2.0E-08
A	Site Boundary	ENE	.59	4.8E-06	4.8E-06	4.3E-06	1.8E-08
A	Site Boundary	E	.53	5.7E-06	5.6E-06	5.1E-06	2.0E-08
A	Site Boundary	ESE	.54	6.7E-06	6.6E-06	6.0E-06	2.7E-08
A	Site Boundary	SE	.65	7.8E-06	7.8E-06	7.0E-06	3.9E-08
A	Site Boundary	SSE	.81	8.1E-06	8.1E-06	7.2E-06	4.0E-08
A	Nearest Res	SSW	3.00	3.0E-07	2.9E-07	2.3E-07	7.3E-10
A	Nearest Res	SW	1.00	1.4E-06	1.4E-06	1.2E-06	6.1E-09
A	Nearest Res	WSW	1.90	3.4E-07	3.3E-07	2.8E-07	1.1E-09
A	Nearest Res	W	1.00	1.4E-06	1.3E-06	1.2E-06	7.4E-09
A	Nearest Res	WNW	1.70	6.1E-07	6.1E-07	5.1E-07	2.8E-09
A	Nearest Res	NW	.90	3.0E-06	3.0E-06	2.7E-06	1.7E-08
A	Nearest Res	NNW	1.90	1.1E-06	1.1E-06	9.0E-07	3.2E-09
A	Nearest Res	N	2.90	6.7E-07	6.5E-07	5.3E-07	1.7E-09
A	Nearest Res	NNE	1.70	1.3E-06	1.3E-06	1.1E-06	3.8E-09
A	Nearest Res	ENE	1.70	5.2E-07	5.2E-07	4.4E-07	1.5E-09
A	Nearest Res	E	2.20	3.0E-07	2.9E-07	2.4E-07	7.3E-10
A	Nearest Res	SE	2.80	3.6E-07	3.5E-07	2.9E-07	1.2E-09
A	Nearest Cow	NNW	3.50	3.3E-07	3.2E-07	2.6E-07	7.7E-10
A	Nearest Garde	SSW	3.00	3.0E-07	2.9E-07	2.3E-07	7.3E-10
A	Nearest Garde	SW	2.20	2.3E-07	2.3E-07	1.9E-07	8.6E-10
A	Nearest Garde	WNW	1.70	6.1E-07	6.1E-07	5.1E-07	2.8E-09
A	Nearest Garde	NW	.90	3.0E-06	3.0E-06	2.7E-06	1.7E-08
A	Nearest Garde	NNW	2.80	5.0E-07	4.9E-07	4.0E-07	1.3E-09
A	Nearest Garde	E	2.20	3.0E-07	2.9E-07	2.4E-07	7.4E-10
A	Nearest Garde	ESE	2.20	3.6E-07	3.6E-07	3.0E-07	1.1E-09
A	Nearest Garde	SE	2.80	3.6E-07	3.5E-07	2.9E-07	1.2E-09

B257

Atmospheric Diffusion Estimates

Ground Level Releases

July-September 2018

VENTS GROUND LEVEL RELEASES - JUL-SEP 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.976E-05	2.031E-05	1.087E-05	5.433E-06	2.170E-06	1.170E-06	7.388E-07	5.142E-07	3.819E-07	2.973E-07	2.396E-07
SSW	3.747E-05	1.337E-05	7.113E-06	3.520E-06	1.365E-06	7.205E-07	4.474E-07	3.070E-07	2.253E-07	1.735E-07	1.385E-07
SW	2.256E-05	8.237E-06	4.398E-06	2.170E-06	8.267E-07	4.305E-07	2.645E-07	1.799E-07	1.310E-07	1.001E-07	7.944E-08
WSW	1.897E-05	6.818E-06	3.661E-06	1.815E-06	6.968E-07	3.650E-07	2.254E-07	1.539E-07	1.125E-07	8.632E-08	6.869E-08
W	1.715E-05	6.288E-06	3.397E-06	1.688E-06	6.499E-07	3.410E-07	2.108E-07	1.441E-07	1.054E-07	8.093E-08	6.443E-08
WNW	1.371E-05	5.049E-06	2.729E-06	1.355E-06	5.216E-07	2.736E-07	1.691E-07	1.155E-07	8.450E-08	6.486E-08	5.162E-08
NW	3.104E-05	1.118E-05	6.108E-06	3.063E-06	1.195E-06	6.333E-07	3.946E-07	2.715E-07	1.998E-07	1.541E-07	1.233E-07
NNW	4.460E-05	1.569E-05	8.658E-06	4.379E-06	1.730E-06	9.249E-07	5.804E-07	4.018E-07	2.971E-07	2.302E-07	1.849E-07
N	1.103E-04	3.588E-05	1.941E-05	9.830E-06	4.013E-06	2.197E-06	1.404E-06	9.861E-07	7.383E-07	5.785E-07	4.689E-07
NNE	8.228E-05	2.521E-05	1.333E-05	6.744E-06	2.814E-06	1.563E-06	1.009E-06	7.152E-07	5.392E-07	4.251E-07	3.464E-07
NE	4.138E-05	1.279E-05	6.753E-06	3.410E-06	1.418E-06	7.856E-07	5.065E-07	3.584E-07	2.699E-07	2.125E-07	1.730E-07
ENE	3.659E-05	1.111E-05	5.824E-06	2.939E-06	1.232E-06	6.859E-07	4.356E-07	3.150E-07	2.378E-07	1.877E-07	1.531E-07
E	2.997E-05	9.382E-06	5.059E-06	2.578E-06	1.066E-06	5.882E-07	3.781E-07	2.668E-07	2.005E-07	1.576E-07	1.281E-07
ESE	5.716E-05	1.749E-05	9.218E-06	4.659E-06	1.950E-06	1.085E-06	7.021E-07	4.980E-07	3.759E-07	2.965E-07	2.418E-07
SE	7.666E-05	2.352E-05	1.243E-05	6.287E-06	2.630E-06	1.463E-06	9.461E-07	6.710E-07	5.063E-07	3.993E-07	3.256E-07
SSE	7.160E-05	2.266E-05	1.221E-05	6.204E-06	2.553E-06	1.404E-06	9.005E-07	6.344E-07	4.760E-07	3.737E-07	3.034E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.983E-07	1.020E-07	6.613E-08	3.797E-08	2.572E-08	1.906E-08	1.494E-08	1.217E-08	1.020E-08	8.732E-09	7.602E-09
SSW	1.137E-07	5.652E-08	3.576E-08	1.982E-08	1.310E-08	9.517E-09	7.341E-09	5.900E-09	4.885E-09	4.139E-09	3.570E-09
SW	6.484E-08	3.150E-08	1.959E-08	1.059E-08	6.878E-09	4.928E-09	3.756E-09	2.988E-09	2.451E-09	2.059E-09	1.762E-09
WSW	5.622E-08	2.764E-08	1.734E-08	9.509E-09	6.247E-09	4.518E-09	3.470E-09	2.779E-09	2.293E-09	1.937E-09	1.666E-09
W	5.276E-08	2.597E-08	1.630E-08	8.925E-09	5.840E-09	4.209E-09	3.224E-09	2.575E-09	2.120E-09	1.787E-09	1.534E-09
WNW	4.226E-08	2.079E-08	1.304E-08	7.133E-09	4.664E-09	3.359E-09	2.571E-09	2.052E-09	1.689E-09	1.423E-09	1.220E-09
NW	1.013E-07	5.070E-08	3.221E-08	1.794E-08	1.188E-08	8.648E-09	6.677E-09	5.369E-09	4.447E-09	3.768E-09	3.250E-09
NNW	1.525E-07	7.738E-08	4.967E-08	2.808E-08	1.880E-08	1.380E-08	1.073E-08	8.675E-09	7.223E-09	6.147E-09	5.323E-09
N	3.903E-07	2.048E-07	1.346E-07	7.876E-08	5.404E-08	4.042E-08	3.192E-08	2.617E-08	2.204E-08	1.895E-08	1.657E-08
NNE	2.896E-07	1.545E-07	1.028E-07	6.114E-08	4.243E-08	3.202E-08	2.547E-08	2.100E-08	1.778E-08	1.536E-08	1.348E-08
NE	1.446E-07	7.693E-08	5.108E-08	3.029E-08	2.098E-08	1.581E-08	1.256E-08	1.035E-08	8.758E-09	7.560E-09	6.631E-09
ENE	1.281E-07	6.858E-08	4.572E-08	2.727E-08	1.896E-08	1.433E-08	1.141E-08	9.424E-09	7.986E-09	6.904E-09	6.063E-09
E	1.069E-07	5.657E-08	3.741E-08	2.206E-08	1.521E-08	1.143E-08	9.053E-09	7.441E-09	6.282E-09	5.413E-09	4.739E-09
ESE	2.023E-07	1.082E-07	7.205E-08	4.292E-08	2.981E-08	2.251E-08	1.791E-08	1.478E-08	1.252E-08	1.082E-08	9.494E-09
SE	2.723E-07	1.456E-07	9.694E-08	5.771E-08	4.007E-08	3.025E-08	2.407E-08	1.985E-08	1.681E-08	1.452E-08	1.275E-08
SSE	2.529E-07	1.333E-07	8.797E-08	5.170E-08	3.558E-08	2.668E-08	2.111E-08	1.733E-08	1.462E-08	1.259E-08	1.101E-08

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.055E-05	2.450E-06	7.639E-07	3.875E-07	2.414E-07	1.075E-07	3.878E-08	1.919E-08	1.221E-08	8.749E-09
SSW	6.907E-06	1.558E-06	4.641E-07	2.289E-07	1.397E-07	5.999E-08	2.038E-08	9.601E-09	5.925E-09	4.149E-09
SW	4.261E-06	9.491E-07	2.749E-07	1.332E-07	8.017E-08	3.361E-08	1.094E-08	4.979E-09	3.003E-09	2.065E-09
WSW	3.542E-06	7.979E-07	2.340E-07	1.144E-07	6.930E-08	2.942E-08	9.801E-09	4.560E-09	2.791E-09	1.942E-09
W	3.280E-06	7.433E-07	2.189E-07	1.071E-07	6.500E-08	2.762E-08	9.193E-09	4.250E-09	2.587E-09	1.792E-09
WNW	2.634E-06	5.967E-07	1.755E-07	8.589E-08	5.208E-08	2.212E-08	7.348E-09	3.392E-09	2.062E-09	1.427E-09
NW	5.881E-06	1.360E-06	4.090E-07	2.029E-07	1.243E-07	5.374E-08	1.842E-08	8.723E-09	5.392E-09	3.778E-09
NNW	8.319E-06	1.961E-06	6.008E-07	3.015E-07	1.863E-07	8.177E-08	2.875E-08	1.390E-08	8.707E-09	6.161E-09
N	1.881E-05	4.498E-06	1.448E-06	7.482E-07	4.723E-07	2.148E-07	8.019E-08	4.065E-08	2.624E-08	1.899E-08
NNE	1.304E-05	3.131E-06	1.039E-06	5.460E-07	3.486E-07	1.616E-07	6.208E-08	3.217E-08	2.105E-08	1.538E-08
NE	6.609E-06	1.579E-06	5.217E-07	2.733E-07	1.742E-07	8.047E-08	3.077E-08	1.589E-08	1.038E-08	7.571E-09
ENE	5.716E-06	1.368E-06	4.569E-07	2.408E-07	1.541E-07	7.165E-08	2.768E-08	1.440E-08	9.445E-09	6.913E-09
E	4.917E-06	1.190E-06	3.896E-07	2.031E-07	1.290E-07	5.924E-08	2.243E-08	1.149E-08	7.460E-09	5.421E-09
ESE	9.030E-06	2.168E-06	7.227E-07	3.805E-07	2.434E-07	1.130E-07	4.357E-08	2.262E-08	1.481E-08	1.083E-08
SE	1.216E-05	2.924E-06	9.739E-07	5.126E-07	3.277E-07	1.521E-07	5.859E-08	3.039E-08	1.990E-08	1.454E-08
SSE	1.186E-05	2.854E-06	9.284E-07	4.823E-07	3.055E-07	1.397E-07	5.260E-08	2.683E-08	1.738E-08	1.261E-08

B259

VENTS GROUND LEVEL RELEASES - JUL-SEP 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)				DISTANCE IN MILES FROM THE SITE							
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	
S	5.965E-05	2.025E-05	1.081E-05	5.398E-06	2.148E-06	1.154E-06	7.262E-07	5.035E-07	3.727E-07	2.890E-07	2.320E-07	
SSW	3.742E-05	1.334E-05	7.091E-06	3.505E-06	1.356E-06	7.140E-07	4.422E-07	3.027E-07	2.216E-07	1.702E-07	1.355E-07	
SW	2.254E-05	8.219E-06	4.384E-06	2.160E-06	8.214E-07	4.268E-07	2.616E-07	1.775E-07	1.290E-07	9.842E-08	7.790E-08	
WSW	1.895E-05	6.801E-06	3.648E-06	1.806E-06	6.916E-07	3.613E-07	2.225E-07	1.515E-07	1.105E-07	8.455E-08	6.710E-08	
W	1.713E-05	6.273E-06	3.385E-06	1.680E-06	6.453E-07	3.378E-07	2.083E-07	1.421E-07	1.037E-07	7.943E-08	6.309E-08	
WNW	1.370E-05	5.040E-06	2.721E-06	1.350E-06	5.185E-07	2.714E-07	1.674E-07	1.142E-07	8.333E-08	6.363E-08	5.071E-08	
NW	3.101E-05	1.115E-05	6.087E-06	3.049E-06	1.187E-06	6.273E-07	3.899E-07	2.676E-07	1.964E-07	1.511E-07	1.206E-07	
NNW	4.453E-05	1.565E-05	8.622E-06	4.354E-06	1.715E-06	9.140E-07	5.718E-07	3.945E-07	2.908E-07	2.247E-07	1.798E-07	
N	1.101E-04	3.575E-05	1.930E-05	9.760E-06	3.969E-06	2.164E-06	1.377E-06	9.639E-07	7.189E-07	5.610E-07	4.530E-07	
NNE	8.205E-05	2.508E-05	1.323E-05	6.674E-06	2.770E-06	1.530E-06	9.830E-07	6.927E-07	5.195E-07	4.072E-07	3.301E-07	
NE	4.127E-05	1.273E-05	6.700E-06	3.374E-06	1.395E-06	7.689E-07	4.930E-07	3.469E-07	2.598E-07	2.034E-07	1.647E-07	
ENE	3.648E-05	1.105E-05	5.775E-06	2.906E-06	1.211E-06	6.704E-07	4.313E-07	3.043E-07	2.284E-07	1.792E-07	1.453E-07	
E	2.989E-05	9.330E-06	5.018E-06	2.550E-06	1.048E-06	5.752E-07	3.676E-07	2.580E-07	1.928E-07	1.507E-07	1.218E-07	
ESE	5.700E-05	1.740E-05	9.144E-06	4.609E-06	1.919E-06	1.062E-06	6.830E-07	4.817E-07	3.615E-07	2.836E-07	2.300E-07	
SE	7.645E-05	2.339E-05	1.233E-05	6.220E-06	2.588E-06	1.432E-06	9.206E-07	6.492E-07	4.872E-07	3.821E-07	3.098E-07	
SSE	7.142E-05	2.255E-05	1.212E-05	6.144E-06	2.515E-06	1.377E-06	8.783E-07	6.155E-07	4.595E-07	3.589E-07	2.899E-07	

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)				DISTANCE IN MILES FROM THE SITE							
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
S	1.913E-07	9.653E-08	6.141E-08	3.395E-08	2.216E-08	1.583E-08	1.198E-08	9.425E-09	7.635E-09	6.324E-09	5.332E-09	
SSW	1.109E-07	5.443E-08	3.398E-08	1.833E-08	1.179E-08	8.337E-09	6.262E-09	4.902E-09	3.956E-09	3.267E-09	2.749E-09	
SW	6.344E-08	3.049E-08	1.875E-08	9.920E-09	6.307E-09	4.424E-09	3.301E-09	2.571E-09	2.065E-09	1.699E-09	1.425E-09	
WSW	5.478E-08	2.657E-08	1.645E-08	8.783E-09	5.620E-09	3.959E-09	2.964E-09	2.313E-09	1.862E-09	1.534E-09	1.287E-09	
W	5.153E-08	2.507E-08	1.556E-08	8.329E-09	5.330E-09	3.757E-09	2.815E-09	2.200E-09	1.773E-09	1.463E-09	1.229E-09	
WNW	4.143E-08	2.017E-08	1.253E-08	6.714E-09	4.303E-09	3.037E-09	2.279E-09	1.784E-09	1.439E-09	1.189E-09	1.001E-09	
NW	9.887E-08	4.883E-08	3.063E-08	1.663E-08	1.074E-08	7.626E-09	5.747E-09	4.512E-09	3.651E-09	3.023E-09	2.549E-09	
NNW	1.479E-07	7.387E-08	4.667E-08	2.557E-08	1.660E-08	1.183E-08	8.929E-09	7.019E-09	5.684E-09	4.708E-09	3.970E-09	
N	3.755E-07	1.932E-07	1.246E-07	7.011E-08	4.634E-08	3.343E-08	2.549E-08	2.020E-08	1.646E-08	1.371E-08	1.162E-08	
NNE	2.745E-07	1.426E-07	9.238E-08	5.215E-08	3.442E-08	2.474E-08	1.878E-08	1.480E-08	1.200E-08	9.934E-09	8.369E-09	
NE	1.368E-07	7.082E-08	4.575E-08	2.572E-08	1.691E-08	1.212E-08	9.169E-09	7.206E-09	5.825E-09	4.812E-09	4.044E-09	
ENE	1.209E-07	6.287E-08	4.073E-08	2.297E-08	1.514E-08	1.086E-08	8.220E-09	6.463E-09	5.224E-09	4.315E-09	3.625E-09	
E	1.010E-07	5.197E-08	3.343E-08	1.866E-08	1.220E-08	8.706E-09	6.562E-09	5.139E-09	4.140E-09	3.408E-09	2.855E-09	
ESE	1.913E-07	9.952E-08	6.451E-08	3.643E-08	2.403E-08	1.727E-08	1.310E-08	1.031E-08	8.352E-09	6.910E-09	5.816E-09	
SE	2.577E-07	1.340E-07	8.686E-08	4.904E-08	3.235E-08	2.324E-08	1.762E-08	1.388E-08	1.124E-08	9.297E-09	7.824E-09	
SSE	2.404E-07	1.235E-07	7.944E-08	4.442E-08	2.912E-08	2.084E-08	1.576E-08	1.238E-08	1.001E-08	8.270E-09	6.953E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.050E-05	2.429E-06	7.512E-07	3.782E-07	2.338E-07	1.020E-07	3.481E-08	1.598E-08	9.472E-09	6.345E-09
SSW	6.886E-06	1.548E-06	4.589E-07	2.252E-07	1.367E-07	5.790E-08	1.890E-08	8.427E-09	4.930E-09	3.279E-09
SW	4.248E-06	9.435E-07	2.720E-07	1.312E-07	7.862E-08	3.260E-08	1.028E-08	4.477E-09	2.587E-09	1.706E-09
WSW	3.530E-06	7.924E-07	2.311E-07	1.123E-07	6.771E-08	2.834E-08	9.082E-09	4.004E-09	2.327E-09	1.540E-09
W	3.269E-06	7.386E-07	2.164E-07	1.054E-07	6.365E-08	2.673E-08	8.603E-09	3.800E-09	2.213E-09	1.468E-09
WNW	2.627E-06	5.935E-07	1.739E-07	8.471E-08	5.116E-08	2.150E-08	6.934E-09	3.071E-09	1.794E-09	1.193E-09
NW	5.862E-06	1.352E-06	4.043E-07	1.995E-07	1.216E-07	5.186E-08	1.713E-08	7.705E-09	4.537E-09	3.034E-09
NNW	8.286E-06	1.945E-06	5.921E-07	2.953E-07	1.813E-07	7.823E-08	2.628E-08	1.194E-08	7.056E-09	4.724E-09
N	1.872E-05	4.454E-06	1.422E-06	7.288E-07	4.563E-07	2.032E-07	7.164E-08	3.370E-08	2.029E-08	1.375E-08
NNE	1.295E-05	3.087E-06	1.013E-06	5.262E-07	3.323E-07	1.496E-07	5.321E-08	2.494E-08	1.487E-08	9.966E-09
NE	6.561E-06	1.557E-06	5.081E-07	2.632E-07	1.659E-07	7.435E-08	2.625E-08	1.222E-08	7.241E-09	4.827E-09
ENE	5.672E-06	1.347E-06	4.443E-07	2.313E-07	1.463E-07	6.592E-08	2.344E-08	1.094E-08	6.493E-09	4.329E-09
E	4.879E-06	1.172E-06	3.791E-07	1.954E-07	1.227E-07	5.463E-08	1.907E-08	8.781E-09	5.165E-09	3.420E-09
ESE	8.962E-06	2.136E-06	7.035E-07	3.662E-07	2.315E-07	1.044E-07	3.716E-08	1.740E-08	1.036E-08	6.932E-09
SE	1.207E-05	2.881E-06	9.483E-07	4.935E-07	3.119E-07	1.406E-07	5.003E-08	2.342E-08	1.394E-08	9.327E-09
SSE	1.178E-05	2.816E-06	9.061E-07	4.657E-07	2.920E-07	1.299E-07	4.540E-08	2.101E-08	1.244E-08	8.298E-09

B260

VENTS GROUND LEVEL RELEASES - JUL-SEP 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.653E-05	1.853E-05	9.669E-06	4.747E-06	1.838E-06	9.649E-07	5.955E-07	4.060E-07	2.959E-07	2.263E-07	1.795E-07
SSW	3.545E-05	1.220E-05	6.333E-06	3.077E-06	1.157E-06	5.951E-07	3.612E-07	2.429E-07	1.750E-07	1.324E-07	1.041E-07
SW	2.134E-05	7.518E-06	3.916E-06	1.897E-06	7.008E-07	3.556E-07	2.136E-07	1.423E-07	1.017E-07	7.650E-08	5.973E-08
WSW	1.795E-05	6.222E-06	3.259E-06	1.587E-06	5.905E-07	3.014E-07	1.819E-07	1.217E-07	8.733E-08	6.588E-08	5.159E-08
W	1.622E-05	5.738E-06	3.025E-06	1.476E-06	5.508E-07	2.816E-07	1.702E-07	1.140E-07	8.187E-08	6.180E-08	4.842E-08
WNW	1.297E-05	4.608E-06	2.430E-06	1.185E-06	4.422E-07	2.260E-07	1.366E-07	9.147E-08	6.567E-08	4.956E-08	3.883E-08
NW	2.937E-05	1.020E-05	5.438E-06	2.678E-06	1.013E-06	5.230E-07	3.186E-07	2.148E-07	1.551E-07	1.177E-07	9.261E-08
NNW	4.219E-05	1.432E-05	7.707E-06	3.827E-06	1.465E-06	7.633E-07	4.681E-07	3.175E-07	2.304E-07	1.755E-07	1.387E-07
N	1.043E-04	3.273E-05	1.727E-05	8.587E-06	3.398E-06	1.811E-06	1.131E-06	7.782E-07	5.717E-07	4.402E-07	3.511E-07
NNE	7.781E-05	2.299E-05	1.185E-05	5.886E-06	2.379E-06	1.286E-06	8.115E-07	5.629E-07	4.163E-07	3.223E-07	2.583E-07
NE	3.913E-05	1.167E-05	6.004E-06	2.976E-06	1.199E-06	6.466E-07	4.071E-07	2.820E-07	2.083E-07	1.611E-07	1.290E-07
ENE	3.460E-05	1.013E-05	5.178E-06	2.564E-06	1.041E-06	5.643E-07	3.567E-07	2.478E-07	1.835E-07	1.422E-07	1.140E-07
E	2.834E-05	8.554E-06	4.498E-06	2.250E-06	9.010E-07	4.840E-07	3.038E-07	2.099E-07	1.547E-07	1.195E-07	9.548E-08
ESE	5.405E-05	1.595E-05	8.196E-06	4.066E-06	1.649E-06	8.932E-07	5.643E-07	3.919E-07	2.901E-07	2.247E-07	1.802E-07
SE	7.250E-05	2.144E-05	1.105E-05	5.486E-06	2.223E-06	1.204E-06	7.605E-07	5.280E-07	3.907E-07	3.027E-07	2.427E-07
SSE	6.772E-05	2.067E-05	1.086E-05	5.416E-06	2.159E-06	1.156E-06	7.243E-07	4.996E-07	3.677E-07	2.836E-07	2.264E-07

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.463E-07	7.076E-08	4.348E-08	2.284E-08	1.437E-08	9.969E-09	7.362E-09	5.675E-09	4.514E-09	3.678E-09	3.055E-09
SSW	8.414E-08	3.941E-08	2.367E-08	1.205E-08	7.413E-09	5.060E-09	3.689E-09	2.813E-09	2.218E-09	1.794E-09	1.480E-09
SW	4.803E-08	2.200E-08	1.300E-08	6.462E-09	3.918E-09	2.643E-09	1.909E-09	1.444E-09	1.131E-09	9.092E-10	7.463E-10
WSW	4.160E-08	1.927E-08	1.148E-08	5.779E-09	3.538E-09	2.405E-09	1.747E-09	1.328E-09	1.045E-09	8.428E-10	6.940E-10
W	3.906E-08	1.812E-08	1.081E-08	5.441E-09	3.322E-09	2.254E-09	1.635E-09	1.242E-09	9.760E-10	7.870E-10	6.477E-10
WNW	3.133E-08	1.453E-08	8.661E-09	4.359E-09	2.661E-09	1.805E-09	1.309E-09	9.947E-10	7.816E-10	6.303E-10	5.188E-10
NW	7.501E-08	3.536E-08	2.133E-08	1.091E-08	6.736E-09	4.609E-09	3.365E-09	2.571E-09	2.029E-09	1.643E-09	1.357E-09
NNW	1.127E-07	5.383E-08	3.277E-08	1.699E-08	1.058E-08	7.287E-09	5.349E-09	4.103E-09	3.250E-09	2.639E-09	2.185E-09
N	2.877E-07	1.419E-07	8.842E-08	4.732E-08	3.013E-08	2.111E-08	1.570E-08	1.218E-08	9.743E-09	7.976E-09	6.651E-09
NNE	2.126E-07	1.064E-07	6.696E-08	3.627E-08	2.327E-08	1.638E-08	1.223E-08	9.508E-09	7.615E-09	6.239E-09	5.205E-09
NE	1.061E-07	5.295E-08	3.324E-08	1.795E-08	1.149E-08	8.072E-09	6.016E-09	4.670E-09	3.736E-09	3.057E-09	2.548E-09
ENE	9.391E-08	4.715E-08	2.970E-08	1.612E-08	1.035E-08	7.292E-09	5.445E-09	4.233E-09	3.390E-09	2.777E-09	2.316E-09
E	7.840E-08	3.892E-08	2.433E-08	1.306E-08	8.322E-09	5.826E-09	4.329E-09	3.352E-09	2.675E-09	2.184E-09	1.817E-09
ESE	1.484E-07	7.444E-08	4.688E-08	2.543E-08	1.632E-08	1.150E-08	8.583E-09	6.673E-09	5.345E-09	4.380E-09	3.654E-09
SE	1.998E-07	1.002E-07	6.308E-08	3.420E-08	2.195E-08	1.545E-08	1.154E-08	8.968E-09	7.182E-09	5.885E-09	4.909E-09
SSE	1.858E-07	9.195E-08	5.738E-08	3.074E-08	1.957E-08	1.370E-08	1.018E-08	7.881E-09	6.292E-09	5.141E-09	4.278E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	9.451E-06	2.096E-06	6.182E-07	3.009E-07	1.811E-07	7.543E-08	2.366E-08	1.010E-08	5.715E-09	3.695E-09	
SSW	6.190E-06	1.334E-06	3.762E-07	1.782E-07	1.051E-07	4.236E-08	1.257E-08	5.139E-09	2.837E-09	1.804E-09	
SW	3.819E-06	8.132E-07	2.229E-07	1.037E-07	6.037E-08	2.378E-08	6.784E-09	2.689E-09	1.457E-09	9.145E-10	
WSW	3.174E-06	6.834E-07	1.897E-07	8.898E-08	5.212E-08	2.077E-08	6.049E-09	2.444E-09	1.340E-09	8.475E-10	
W	2.939E-06	6.367E-07	1.774E-07	8.341E-08	4.892E-08	1.953E-08	5.692E-09	2.291E-09	1.253E-09	7.914E-10	
WNW	2.361E-06	5.112E-07	1.424E-07	6.691E-08	3.923E-08	1.565E-08	4.561E-09	1.835E-09	1.003E-09	6.338E-10	
NW	5.270E-06	1.165E-06	3.316E-07	1.579E-07	9.352E-08	3.793E-08	1.137E-08	4.679E-09	2.592E-09	1.652E-09	
NNW	7.451E-06	1.678E-06	4.866E-07	2.344E-07	1.400E-07	5.755E-08	1.765E-08	7.390E-09	4.134E-09	2.652E-09	
N	1.685E-05	3.846E-06	1.171E-06	5.806E-07	3.540E-07	1.506E-07	4.881E-08	2.135E-08	1.226E-08	8.009E-09	
NNE	1.168E-05	2.673E-06	8.387E-07	4.224E-07	2.603E-07	1.125E-07	3.732E-08	1.656E-08	9.564E-09	6.264E-09	
NE	5.916E-06	1.348E-06	4.209E-07	2.114E-07	1.300E-07	5.600E-08	1.848E-08	8.161E-09	4.699E-09	3.069E-09	
ENE	5.117E-06	1.168E-06	3.685E-07	1.861E-07	1.149E-07	4.979E-08	1.658E-08	7.370E-09	4.258E-09	2.788E-09	
E	4.400E-06	1.015E-06	3.143E-07	1.571E-07	9.626E-08	4.121E-08	1.346E-08	5.893E-09	3.373E-09	2.194E-09	
ESE	8.083E-06	1.850E-06	5.830E-07	2.943E-07	1.816E-07	7.862E-08	2.615E-08	1.162E-08	6.713E-09	4.397E-09	
SE	1.089E-05	2.495E-06	7.858E-07	3.964E-07	2.446E-07	1.058E-07	3.518E-08	1.562E-08	9.022E-09	5.908E-09	
SSE	1.062E-05	2.437E-06	7.496E-07	3.733E-07	2.283E-07	9.743E-08	3.170E-08	1.386E-08	7.932E-09	5.163E-09	

VENTS GROUND LEVEL RELEASES - JUL-SEP 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****												
DIRECTION FROM SITE	DISTANCES IN MILES											
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	
S	2.445E-07	8.270E-08	4.246E-08	2.019E-08	7.251E-09	3.596E-09	2.117E-09	1.386E-09	9.755E-10	7.230E-10	5.571E-10	
SSW	2.020E-07	6.831E-08	3.507E-08	1.667E-08	5.990E-09	2.970E-09	1.749E-09	1.145E-09	8.058E-10	5.972E-10	4.602E-10	
SW	1.072E-07	3.625E-08	1.861E-08	8.850E-09	3.179E-09	1.576E-09	9.282E-10	6.078E-10	4.277E-10	3.169E-10	2.442E-10	
WSW	8.425E-08	2.849E-08	1.463E-08	6.954E-09	2.498E-09	1.239E-09	7.294E-10	4.776E-10	3.361E-10	2.491E-10	1.919E-10	
W	7.049E-08	2.384E-08	1.224E-08	5.818E-09	2.090E-09	1.036E-09	6.103E-10	3.996E-10	2.812E-10	2.084E-10	1.606E-10	
WNW	7.459E-08	2.522E-08	1.295E-08	6.157E-09	2.212E-09	1.097E-09	6.458E-10	4.229E-10	2.975E-10	2.205E-10	1.699E-10	
NW	1.758E-07	5.946E-08	3.053E-08	1.451E-08	5.214E-09	2.586E-09	1.522E-09	9.969E-10	7.014E-10	5.198E-10	4.006E-10	
NNW	2.103E-07	7.110E-08	3.651E-08	1.736E-08	6.234E-09	3.092E-09	1.820E-09	1.192E-09	8.388E-10	6.216E-10	4.790E-10	
N	3.964E-07	1.340E-07	6.882E-08	3.272E-08	1.175E-08	5.828E-09	3.432E-09	2.247E-09	1.581E-09	1.172E-09	9.030E-10	
NNE	1.749E-07	5.915E-08	3.037E-08	1.444E-08	5.187E-09	2.572E-09	1.515E-09	9.917E-10	6.978E-10	5.172E-10	3.985E-10	
NE	8.074E-08	2.730E-08	1.402E-08	6.665E-09	2.394E-09	1.187E-09	6.990E-10	4.577E-10	3.221E-10	2.387E-10	1.839E-10	
ENE	5.853E-08	1.979E-08	1.016E-08	4.831E-09	1.735E-09	8.606E-10	5.067E-10	3.318E-10	2.335E-10	1.730E-10	1.333E-10	
E	4.229E-08	1.430E-08	7.343E-09	3.491E-09	1.254E-09	6.219E-10	3.662E-10	2.398E-10	1.687E-10	1.250E-10	9.636E-11	
ESE	9.041E-08	3.057E-08	1.570E-08	7.463E-09	2.681E-09	1.329E-09	7.828E-10	5.126E-10	3.607E-10	2.673E-10	2.060E-10	
SE	1.275E-07	4.311E-08	2.214E-08	1.052E-08	3.780E-09	1.875E-09	1.104E-09	7.228E-10	5.086E-10	3.769E-10	2.905E-10	
SSE	1.761E-07	5.955E-08	3.057E-08	1.454E-08	5.221E-09	2.589E-09	1.525E-09	9.983E-10	7.024E-10	5.206E-10	4.012E-10	
DIRECTION FROM SITE	DISTANCES IN MILES											
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	
S	4.426E-10	1.966E-10	1.191E-10	6.020E-11	3.644E-11	2.443E-11	1.751E-11	1.314E-11	1.022E-11	8.164E-12	6.664E-12	
SSW	3.656E-10	1.624E-10	9.839E-11	4.973E-11	3.010E-11	2.018E-11	1.446E-11	1.086E-11	8.442E-12	6.744E-12	5.504E-12	
SW	1.940E-10	8.620E-11	5.222E-11	2.639E-11	1.597E-11	1.071E-11	7.674E-12	5.763E-12	4.481E-12	3.579E-12	2.921E-12	
WSW	1.525E-10	6.774E-11	4.103E-11	2.074E-11	1.255E-11	8.416E-12	6.031E-12	4.528E-12	3.521E-12	2.813E-12	2.296E-12	
W	1.276E-10	5.667E-11	3.433E-11	1.735E-11	1.050E-11	7.042E-12	5.046E-12	3.789E-12	2.946E-12	2.353E-12	1.921E-12	
WNW	1.350E-10	5.997E-11	3.633E-11	1.836E-11	1.111E-11	7.451E-12	5.339E-12	4.009E-12	3.117E-12	2.490E-12	2.032E-12	
NW	3.182E-10	1.414E-10	8.564E-11	4.329E-11	2.620E-11	1.757E-11	1.259E-11	9.451E-12	7.349E-12	5.870E-12	4.791E-12	
NNW	3.806E-10	1.691E-10	1.024E-10	5.176E-11	3.133E-11	2.101E-11	1.505E-11	1.130E-11	8.787E-12	7.020E-12	5.729E-12	
N	7.174E-10	3.187E-10	1.930E-10	9.757E-11	5.905E-11	3.959E-11	2.837E-11	2.130E-11	1.656E-11	1.323E-11	1.080E-11	
NNE	3.166E-10	1.406E-10	8.520E-11	4.306E-11	2.606E-11	1.748E-11	1.252E-11	9.403E-12	7.311E-12	5.840E-12	4.767E-12	
NE	1.461E-10	6.492E-11	3.932E-11	1.988E-11	1.203E-11	8.066E-12	5.779E-12	4.340E-12	3.374E-12	2.695E-12	2.200E-12	
ENE	1.059E-10	4.706E-11	2.850E-11	1.441E-11	8.720E-12	5.847E-12	4.190E-12	3.146E-12	2.446E-12	1.954E-12	1.595E-12	
E	7.655E-11	3.401E-11	2.060E-11	1.041E-11	6.302E-12	4.225E-12	3.028E-12	2.273E-12	1.768E-12	1.412E-12	1.152E-12	
ESE	1.636E-10	7.269E-11	4.403E-11	2.226E-11	1.347E-11	9.032E-12	6.472E-12	4.860E-12	3.778E-12	3.018E-12	2.464E-12	
SE	2.308E-10	1.025E-10	6.210E-11	3.139E-11	1.900E-11	1.274E-11	9.126E-12	6.853E-12	5.328E-12	4.256E-12	3.474E-12	
SSE	3.187E-10	1.416E-10	8.576E-11	4.335E-11	2.624E-11	1.759E-11	1.260E-11	9.465E-12	7.359E-12	5.879E-12	4.798E-12	

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****										
DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.150E-08	8.501E-09	2.219E-09	9.967E-10	5.638E-10	2.168E-10	6.273E-11	2.486E-11	1.328E-11	8.218E-12
SSW	3.428E-08	7.022E-09	1.833E-09	8.233E-10	4.658E-10	1.791E-10	5.182E-11	2.054E-11	1.097E-11	6.788E-12
SW	1.819E-08	3.727E-09	9.729E-10	4.370E-10	2.472E-10	9.506E-11	2.750E-11	1.090E-11	5.820E-12	3.603E-12
WSW	1.430E-08	2.929E-09	7.645E-10	3.434E-10	1.943E-10	7.470E-11	2.161E-11	8.565E-12	4.574E-12	2.831E-12
W	1.196E-08	2.450E-09	6.397E-10	2.873E-10	1.625E-10	6.250E-11	1.808E-11	7.166E-12	3.827E-12	2.369E-12
WNW	1.266E-08	2.593E-09	6.769E-10	3.040E-10	1.720E-10	6.614E-11	1.913E-11	7.583E-12	4.049E-12	2.506E-12
NW	2.984E-08	6.112E-09	1.596E-09	7.167E-10	4.054E-10	1.559E-10	4.510E-11	1.788E-11	9.546E-12	5.909E-12
NNW	3.568E-08	7.309E-09	1.908E-09	8.570E-10	4.848E-10	1.864E-10	5.393E-11	2.138E-11	1.142E-11	7.066E-12
N	6.726E-08	1.378E-08	3.597E-09	1.615E-09	9.139E-10	3.514E-10	1.017E-10	4.029E-11	2.152E-11	1.332E-11
NNE	2.969E-08	6.081E-09	1.587E-09	7.130E-10	4.033E-10	1.551E-10	4.487E-11	1.778E-11	9.497E-12	5.878E-12
NE	1.370E-08	2.807E-09	7.327E-10	3.291E-10	1.862E-10	7.159E-11	2.071E-11	8.208E-12	4.383E-12	2.713E-12
ENE	9.933E-09	2.035E-09	5.311E-10	2.385E-10	1.349E-10	5.189E-11	1.501E-11	5.950E-12	3.177E-12	1.967E-12
E	7.178E-09	1.470E-09	3.838E-10	1.724E-10	9.752E-11	3.750E-11	1.085E-11	4.300E-12	2.296E-12	1.421E-12
ESE	1.534E-08	3.143E-09	8.204E-10	3.685E-10	2.085E-10	8.016E-11	2.319E-11	9.192E-12	4.908E-12	3.038E-12
SE	2.164E-08	4.432E-09	1.157E-09	5.196E-10	2.940E-10	1.130E-10	3.270E-11	1.296E-11	6.922E-12	4.284E-12
SSE	2.988E-08	6.121E-09	1.598E-09	7.177E-10	4.060E-10	1.561E-10	4.517E-11	1.790E-11	9.560E-12	5.917E-12

VENTS GROUND LEVEL RELEASES - JUL-SEP 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION	DIRECTION FROM SITE	DIST. (MI)	X/Q (SEC/M3) NO	X/Q (SEC/M3) 2.26 DAY DECAY	X/Q (SEC/M3) 8.0 DAY DECAY	D/Q (PER SQ. METER) DEPLETED
A	Site Boundary	S	.80	9.3E-06	9.3E-06	8.3E-06	3.6E-08
A	Site Boundary	SSW	.82	5.7E-06	5.6E-06	5.0E-06	2.8E-08
A	Site Boundary	SW	.97	2.3E-06	2.3E-06	2.0E-06	9.4E-09
A	Site Boundary	WSW	.93	2.2E-06	2.2E-06	1.9E-06	8.5E-09
A	Site Boundary	W	.91	2.1E-06	2.1E-06	1.9E-06	7.4E-09
A	Site Boundary	WNW	.94	1.6E-06	1.6E-06	1.4E-06	7.3E-09
A	Site Boundary	NW	.81	5.1E-06	5.0E-06	4.5E-06	2.5E-08
A	Site Boundary	NNW	.69	9.8E-06	9.8E-06	8.8E-06	4.2E-08
A	Site Boundary	N	.67	2.3E-05	2.3E-05	2.0E-05	8.2E-08
A	Site Boundary	NNE	.60	1.9E-05	1.9E-05	1.7E-05	4.4E-08
A	Site Boundary	NE	.62	8.9E-06	8.9E-06	8.0E-06	1.9E-08
A	Site Boundary	ENE	.59	8.5E-06	8.5E-06	7.7E-06	1.5E-08
A	Site Boundary	E	.53	8.6E-06	8.6E-06	7.9E-06	1.3E-08
A	Site Boundary	ESE	.54	1.5E-05	1.5E-05	1.4E-05	2.7E-08
A	Site Boundary	SE	.65	1.5E-05	1.5E-05	1.4E-05	2.8E-08
A	Site Boundary	SSE	.81	1.0E-05	1.0E-05	9.0E-06	2.5E-08
A	Nearest Res	SSW	3.00	3.1E-07	3.0E-07	2.4E-07	1.1E-09
A	Nearest Res	SW	1.00	2.2E-06	2.2E-06	1.9E-06	8.9E-09
A	Nearest Res	WSW	1.90	4.1E-07	4.1E-07	3.4E-07	1.4E-09
A	Nearest Res	W	1.00	1.7E-06	1.7E-06	1.5E-06	5.8E-09
A	Nearest Res	WNW	1.70	3.9E-07	3.9E-07	3.3E-07	1.6E-09
A	Nearest Res	NW	.90	3.9E-06	3.9E-06	3.5E-06	1.9E-08
A	Nearest Res	NNW	1.90	1.0E-06	1.0E-06	8.6E-07	3.5E-09
A	Nearest Res	N	2.90	1.1E-06	1.0E-06	8.3E-07	2.4E-09
A	Nearest Res	NNE	1.70	2.2E-06	2.1E-06	1.8E-06	3.8E-09
A	Nearest Res	ENE	1.70	9.5E-07	9.3E-07	8.0E-07	1.3E-09
A	Nearest Res	E	2.20	4.9E-07	4.7E-07	4.0E-07	5.0E-10
A	Nearest Res	SE	2.80	7.6E-07	7.4E-07	6.1E-07	8.5E-10
A	Nearest Cow	NNW	3.50	3.0E-07	2.9E-07	2.3E-07	8.4E-10
A	Nearest Garde	SSW	3.00	3.1E-07	3.0E-07	2.4E-07	1.1E-09
A	Nearest Garde	SW	2.20	3.5E-07	3.5E-07	2.9E-07	1.3E-09
A	Nearest Garde	WNW	1.70	3.9E-07	3.9E-07	3.3E-07	1.6E-09
A	Nearest Garde	NW	.90	3.9E-06	3.9E-06	3.5E-06	1.9E-08
A	Nearest Garde	NNW	2.80	4.6E-07	4.5E-07	3.7E-07	1.4E-09
A	Nearest Garde	E	2.20	4.9E-07	4.7E-07	4.0E-07	5.0E-10
A	Nearest Garde	ESE	2.20	9.0E-07	8.8E-07	7.3E-07	1.1E-09
A	Nearest Garde	SE	2.80	7.6E-07	7.4E-07	6.1E-07	8.5E-10

B263

Atmospheric Diffusion Estimates

Ground Level Releases

October-December 2018

VENTS GROUND LEVEL RELEASES - OCT-DEC 2018
 NO DECAY, UNDELETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.823E-05	1.895E-05	9.995E-06	4.999E-06	2.035E-06	1.112E-06	7.092E-07	4.976E-07	3.722E-07	2.913E-07	2.360E-07
SSW	3.922E-05	1.313E-05	7.049E-06	3.543E-06	1.421E-06	7.682E-07	4.861E-07	3.388E-07	2.520E-07	1.963E-07	1.584E-07
SW	1.863E-05	6.510E-06	3.498E-06	1.746E-06	6.883E-07	3.676E-07	2.304E-07	1.594E-07	1.178E-07	9.122E-08	7.321E-08
WSW	2.262E-05	7.523E-06	4.061E-06	2.048E-06	8.290E-07	4.510E-07	2.869E-07	2.008E-07	1.498E-07	1.171E-07	9.470E-08
W	1.973E-05	6.613E-06	3.485E-06	1.732E-06	7.018E-07	3.824E-07	2.435E-07	1.706E-07	1.275E-07	9.972E-08	8.072E-08
WNW	1.839E-05	6.399E-06	3.392E-06	1.681E-06	6.683E-07	3.592E-07	2.263E-07	1.572E-07	1.166E-07	9.062E-08	7.295E-08
NW	2.736E-05	9.122E-06	4.781E-06	2.372E-06	9.578E-07	5.203E-07	3.306E-07	2.312E-07	1.725E-07	1.347E-07	1.089E-07
NNW	7.302E-05	2.258E-05	1.167E-05	5.827E-06	2.443E-06	1.362E-06	8.819E-07	6.263E-07	4.731E-07	3.736E-07	3.049E-07
N	1.257E-04	3.962E-05	2.095E-05	1.054E-05	4.371E-06	2.418E-06	1.557E-06	1.101E-06	8.286E-07	6.522E-07	5.308E-07
NNE	8.844E-05	2.759E-05	1.460E-05	7.369E-06	3.065E-06	1.699E-06	1.096E-06	7.755E-07	5.842E-07	4.601E-07	3.747E-07
NE	2.269E-05	7.735E-06	4.179E-06	2.101E-06	8.389E-07	4.521E-07	2.854E-07	1.985E-07	1.474E-07	1.147E-07	9.239E-08
ENE	3.469E-05	1.114E-05	5.942E-06	2.996E-06	1.229E-06	6.748E-07	4.321E-07	3.041E-07	2.280E-07	1.789E-07	1.452E-07
E	3.204E-05	1.017E-05	5.340E-06	2.676E-06	1.103E-06	6.075E-07	3.900E-07	2.751E-07	2.066E-07	1.623E-07	1.319E-07
ESE	4.124E-05	1.321E-05	7.047E-06	3.556E-06	1.458E-06	8.003E-07	5.124E-07	3.605E-07	2.703E-07	2.120E-07	1.720E-07
SE	6.791E-05	2.183E-05	1.147E-05	5.734E-06	2.355E-06	1.294E-06	8.295E-07	5.842E-07	4.384E-07	3.441E-07	2.794E-07
SSE	6.455E-05	2.082E-05	1.102E-05	5.528E-06	2.264E-06	1.242E-06	7.952E-07	5.594E-07	4.193E-07	3.289E-07	2.668E-07

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.963E-07	1.027E-07	6.743E-08	3.939E-08	2.700E-08	2.019E-08	1.594E-08	1.307E-08	1.101E-08	9.472E-09	8.281E-09
SSW	1.312E-07	6.767E-08	4.396E-08	2.530E-08	1.717E-08	1.273E-08	9.988E-09	8.143E-09	6.827E-09	5.847E-09	5.092E-09
SW	6.038E-08	3.060E-08	1.963E-08	1.110E-08	7.434E-09	5.460E-09	4.248E-09	3.440E-09	2.867E-09	2.443E-09	2.117E-09
WSW	7.864E-08	4.092E-08	2.675E-08	1.553E-08	1.093E-08	7.891E-09	6.211E-09	5.078E-09	4.267E-09	3.623E-09	3.195E-09
W	6.709E-08	3.503E-08	2.297E-08	1.339E-08	9.165E-09	6.847E-09	5.402E-09	4.426E-09	3.726E-09	3.204E-09	2.799E-09
WNW	6.033E-08	3.090E-08	1.999E-08	1.143E-08	7.722E-09	5.710E-09	4.468E-09	3.635E-09	3.043E-09	2.602E-09	2.263E-09
NW	9.042E-08	4.702E-08	3.073E-08	1.785E-08	1.219E-08	9.088E-09	7.161E-09	5.861E-09	4.930E-09	4.235E-09	3.699E-09
NNW	2.552E-07	1.369E-07	9.139E-08	5.461E-08	3.802E-08	2.877E-08	2.293E-08	1.895E-08	1.607E-08	1.390E-08	1.221E-08
N	4.433E-07	2.356E-07	1.563E-07	9.260E-08	6.409E-08	4.827E-08	3.833E-08	3.157E-08	2.670E-08	2.304E-08	2.020E-08
NNE	3.131E-07	1.667E-07	1.107E-07	6.570E-08	4.552E-08	3.430E-08	2.725E-08	2.246E-08	1.900E-08	1.640E-08	1.438E-08
NE	7.647E-08	3.926E-08	2.543E-08	1.456E-08	9.845E-09	7.281E-09	5.698E-09	4.636E-09	3.880E-09	3.317E-09	2.885E-09
ENE	1.209E-07	6.367E-08	4.197E-08	2.464E-08	1.695E-08	1.270E-08	1.005E-08	8.249E-09	6.957E-09	5.990E-09	5.241E-09
E	1.100E-07	5.818E-08	3.847E-08	2.269E-08	1.566E-08	1.177E-08	9.333E-09	7.677E-09	6.486E-09	5.593E-09	4.900E-09
ESE	1.433E-07	7.538E-08	4.967E-08	2.914E-08	2.004E-08	1.501E-08	1.188E-08	9.747E-09	8.220E-09	7.076E-09	6.191E-09
SE	2.329E-07	1.229E-07	8.110E-08	4.773E-08	3.289E-08	2.469E-08	1.956E-08	1.608E-08	1.358E-08	1.170E-08	1.025E-08
SSE	2.222E-07	1.169E-07	7.706E-08	4.524E-08	3.112E-08	2.333E-08	1.846E-08	1.516E-08	1.279E-08	1.101E-08	9.635E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	9.765E-06	2.283E-06	7.319E-07	3.772E-07	2.377E-07	1.078E-07	4.011E-08	2.031E-08	1.311E-08	9.488E-09	
SSW	6.842E-06	1.602E-06	5.024E-07	2.556E-07	1.596E-07	7.125E-08	2.583E-08	1.282E-08	8.169E-09	5.858E-09	
SW	3.389E-06	7.808E-07	2.386E-07	1.195E-07	7.380E-08	3.234E-08	1.137E-08	5.502E-09	3.453E-09	2.448E-09	
WSW	3.936E-06	9.319E-07	2.962E-07	1.519E-07	9.539E-08	4.301E-08	1.583E-08	7.940E-09	5.093E-09	3.668E-09	
W	3.401E-06	7.887E-07	2.514E-07	1.292E-07	8.130E-08	3.680E-08	1.364E-08	6.887E-09	4.438E-09	3.209E-09	
WNW	3.300E-06	7.561E-07	2.341E-07	1.183E-07	7.351E-08	3.259E-08	1.168E-08	5.750E-09	3.647E-09	2.607E-09	
NW	4.675E-06	1.078E-06	3.415E-07	1.749E-07	1.097E-07	4.943E-08	1.820E-08	9.144E-09	5.878E-09	4.242E-09	
NNW	1.150E-05	2.714E-06	9.076E-07	4.790E-07	3.068E-07	1.430E-07	5.541E-08	2.890E-08	1.899E-08	1.392E-08	
N	2.047E-05	4.875E-06	1.604E-06	8.392E-07	5.343E-07	2.465E-07	9.409E-08	4.851E-08	3.165E-08	2.308E-08	
NNE	1.427E-05	3.414E-06	1.128E-06	5.916E-07	3.772E-07	1.744E-07	6.674E-08	3.447E-08	2.251E-08	1.642E-08	
NE	4.046E-06	9.474E-07	2.951E-07	1.496E-07	9.310E-08	4.138E-08	1.488E-08	7.332E-09	4.651E-09	3.324E-09	
ENE	5.788E-06	1.375E-06	4.456E-07	2.310E-07	1.462E-07	6.675E-08	2.507E-08	1.277E-08	8.271E-09	5.999E-09	
E	5.230E-06	1.232E-06	4.020E-07	2.093E-07	1.328E-07	6.094E-08	2.307E-08	1.183E-08	7.696E-09	5.601E-09	
ESE	6.865E-06	1.632E-06	5.284E-07	2.738E-07	1.732E-07	7.904E-08	2.966E-08	1.510E-08	9.773E-09	7.087E-09	
SE	1.122E-05	2.634E-06	8.553E-07	4.441E-07	2.813E-07	1.287E-07	4.855E-08	2.483E-08	1.612E-08	1.172E-08	
SSE	1.076E-05	2.535E-06	8.201E-07	4.249E-07	2.687E-07	1.225E-07	4.603E-08	2.346E-08	1.520E-08	1.103E-08	

B265

VENTS GROUND LEVEL RELEASES - OCT-DEC 2018
2.260 DAY DECAY, UNDEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)		DISTANCE IN MILES FROM THE SITE									
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.809E-05	1.887E-05	9.933E-06	4.957E-06	2.009E-06	1.092E-06	6.934E-07	4.842E-07	3.603E-07	2.807E-07	2.263E-07
SSW	3.914E-05	1.308E-05	7.009E-06	3.516E-06	1.404E-06	7.558E-07	4.762E-07	3.305E-07	2.447E-07	1.898E-07	1.524E-07
SW	1.859E-05	6.486E-06	3.479E-06	1.733E-06	6.807E-07	3.621E-07	2.261E-07	1.557E-07	1.146E-07	8.842E-08	7.067E-08
WSW	2.257E-05	7.490E-06	4.035E-06	2.031E-06	8.181E-07	4.430E-07	2.805E-07	1.954E-07	1.451E-07	1.129E-07	9.085E-08
W	1.968E-05	6.583E-06	3.461E-06	1.716E-06	6.922E-07	3.753E-07	2.378E-07	1.658E-07	1.232E-07	9.591E-08	7.724E-08
WNW	1.835E-05	6.374E-06	3.373E-06	1.669E-06	6.607E-07	3.536E-07	2.219E-07	1.535E-07	1.133E-07	8.772E-08	7.030E-08
NW	2.730E-05	9.086E-06	4.754E-06	2.354E-06	9.465E-07	5.120E-07	3.238E-07	2.255E-07	1.674E-07	1.302E-07	1.047E-07
NNW	7.281E-05	2.245E-05	1.158E-05	5.763E-06	2.402E-06	1.331E-06	8.569E-07	6.049E-07	4.543E-07	3.565E-07	2.892E-07
N	1.253E-04	3.943E-05	2.080E-05	1.045E-05	4.310E-06	2.372E-06	1.520E-06	1.069E-06	8.009E-07	6.272E-07	5.078E-07
NNE	8.820E-05	2.745E-05	1.449E-05	7.295E-06	3.018E-06	1.664E-06	1.067E-06	7.513E-07	5.629E-07	4.409E-07	3.571E-07
NE	2.265E-05	7.712E-06	4.161E-06	2.088E-06	8.313E-07	4.465E-07	2.810E-07	1.948E-07	1.442E-07	1.118E-07	8.979E-08
ENE	3.461E-05	1.109E-05	5.904E-06	2.971E-06	1.213E-06	6.429E-07	4.235E-07	2.960E-07	2.209E-07	1.725E-07	1.393E-07
E	3.197E-05	1.012E-05	5.304E-06	2.652E-06	1.088E-06	5.962E-07	3.809E-07	2.673E-07	1.998E-07	1.562E-07	1.263E-07
ESE	4.116E-05	1.316E-05	7.009E-06	3.530E-06	1.442E-06	7.883E-07	5.027E-07	3.523E-07	2.630E-07	2.055E-07	1.661E-07
SE	6.775E-05	2.173E-05	1.139E-05	5.684E-06	2.323E-06	1.271E-06	8.105E-07	5.681E-07	4.241E-07	3.313E-07	2.676E-07
SSE	6.440E-05	2.073E-05	1.095E-05	5.480E-06	2.234E-06	1.220E-06	7.769E-07	5.439E-07	4.056E-07	3.166E-07	2.556E-07

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)		DISTANCE IN MILES FROM THE SITE									
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.873E-07	9.560E-08	6.123E-08	3.405E-08	2.225E-08	1.588E-08	1.199E-08	9.404E-09	7.593E-09	6.268E-09	5.266E-09
SSW	1.257E-07	6.340E-08	4.028E-08	2.217E-08	1.440E-08	1.024E-08	7.703E-09	6.031E-09	4.862E-09	4.008E-09	3.363E-09
SW	5.805E-08	2.881E-08	1.811E-08	9.823E-09	6.318E-09	4.458E-09	3.336E-09	2.600E-09	2.087E-09	1.714E-09	1.433E-09
WSW	7.509E-08	3.815E-08	2.436E-08	1.349E-08	8.792E-09	6.263E-09	4.720E-09	3.699E-09	2.984E-09	2.460E-09	2.065E-09
W	6.387E-08	3.251E-08	2.077E-08	1.151E-08	7.494E-09	5.332E-09	4.012E-09	3.139E-09	2.527E-09	2.080E-09	1.742E-09
WNW	5.789E-08	2.901E-08	1.836E-08	1.005E-08	6.502E-09	4.608E-09	3.460E-09	2.704E-09	2.175E-09	1.790E-09	1.500E-09
NW	8.655E-08	4.396E-08	2.807E-08	1.555E-08	1.014E-08	7.228E-09	5.451E-09	4.275E-09	3.451E-09	2.848E-09	2.393E-09
NNW	2.407E-07	1.253E-07	8.123E-08	4.581E-08	3.015E-08	2.161E-08	1.634E-08	1.283E-08	1.036E-08	8.546E-09	7.172E-09
N	4.220E-07	2.187E-07	1.415E-07	7.982E-08	5.269E-08	3.790E-08	2.879E-08	2.272E-08	1.843E-08	1.529E-08	1.290E-08
NNE	2.968E-07	1.538E-07	9.944E-08	5.597E-08	3.684E-08	2.642E-08	2.001E-08	1.574E-08	1.273E-08	1.053E-08	8.856E-09
NE	7.407E-08	3.741E-08	2.383E-08	1.322E-08	8.658E-09	6.210E-09	4.717E-09	3.728E-09	3.033E-09	2.523E-09	2.137E-09
ENE	1.155E-07	5.939E-08	3.824E-08	2.144E-08	1.410E-08	1.012E-08	7.678E-09	6.053E-09	4.909E-09	4.069E-09	3.432E-09
E	1.048E-07	5.405E-08	3.486E-08	1.958E-08	1.289E-08	9.250E-09	7.015E-09	5.527E-09	4.480E-09	3.711E-09	3.128E-09
ESE	1.378E-07	7.104E-08	4.588E-08	2.589E-08	1.714E-08	1.238E-08	9.453E-09	7.500E-09	6.121E-09	5.106E-09	4.333E-09
SE	2.219E-07	1.142E-07	7.352E-08	4.118E-08	2.705E-08	1.938E-08	1.467E-08	1.155E-08	9.346E-09	7.732E-09	6.509E-09
SSE	2.118E-07	1.087E-07	6.985E-08	3.903E-08	2.558E-08	1.830E-08	1.384E-08	1.088E-08	8.796E-09	7.270E-09	6.114E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	9.707E-06	2.257E-06	7.160E-07	3.654E-07	2.280E-07	1.007E-07	3.485E-08	1.602E-08	9.452E-09	6.289E-09
SSW	6.805E-06	1.585E-06	4.925E-07	2.483E-07	1.536E-07	6.697E-08	2.274E-08	1.033E-08	6.064E-09	4.022E-09
SW	3.371E-06	7.730E-07	2.342E-07	1.164E-07	7.125E-08	3.055E-08	1.011E-08	4.505E-09	2.615E-09	1.721E-09
WSW	3.912E-06	9.209E-07	2.898E-07	1.472E-07	9.154E-08	4.023E-08	1.382E-08	6.320E-09	3.718E-09	2.469E-09
W	3.379E-06	7.789E-07	2.456E-07	1.250E-07	7.782E-08	3.426E-08	1.178E-08	5.381E-09	3.155E-09	2.087E-09
WNW	3.283E-06	7.483E-07	2.296E-07	1.150E-07	7.087E-08	3.069E-08	1.032E-08	4.654E-09	2.718E-09	1.797E-09
NW	4.650E-06	1.066E-06	3.346E-07	1.698E-07	1.055E-07	4.636E-08	1.593E-08	7.294E-09	4.297E-09	2.858E-09
NNW	1.141E-05	2.673E-06	8.825E-07	4.601E-07	2.912E-07	1.314E-07	4.672E-08	2.178E-08	1.289E-08	8.574E-09
N	2.034E-05	4.813E-06	1.567E-06	8.114E-07	5.114E-07	2.296E-07	8.147E-08	3.820E-08	2.282E-08	1.533E-08
NNE	1.417E-05	3.367E-06	1.100E-06	5.703E-07	3.596E-07	1.614E-07	5.713E-08	2.663E-08	1.582E-08	1.056E-08
NE	4.029E-06	9.397E-07	2.907E-07	1.463E-07	9.050E-08	3.952E-08	1.355E-08	6.265E-09	3.746E-09	2.531E-09
ENE	5.753E-06	1.359E-06	4.360E-07	2.239E-07	1.403E-07	6.246E-08	2.191E-08	1.021E-08	6.082E-09	4.082E-09
E	5.196E-06	1.217E-06	3.929E-07	2.025E-07	1.272E-07	5.680E-08	2.000E-08	9.326E-09	5.554E-09	3.723E-09
ESE	6.830E-06	1.615E-06	5.187E-07	2.666E-07	1.673E-07	7.469E-08	2.644E-08	1.248E-08	7.533E-09	5.121E-09
SE	1.115E-05	2.602E-06	8.363E-07	4.299E-07	2.696E-07	1.201E-07	4.209E-08	1.954E-08	1.160E-08	7.757E-09
SSE	1.069E-05	2.505E-06	8.018E-07	4.112E-07	2.574E-07	1.143E-07	3.990E-08	1.846E-08	1.093E-08	7.294E-09

B266

VENTS GROUND LEVEL RELEASES - OCT-DEC 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.507E-05	1.728E-05	8.891E-06	4.365E-06	1.722E-06	9.159E-07	5.708E-07	3.922E-07	2.877E-07	2.213E-07	1.763E-07
SSW	3.710E-05	1.198E-05	6.272E-06	3.094E-06	1.203E-06	6.332E-07	3.915E-07	2.672E-07	1.950E-07	1.493E-07	1.184E-07
SW	1.762E-05	5.939E-06	3.112E-06	1.525E-06	5.827E-07	3.031E-07	1.856E-07	1.258E-07	9.118E-08	6.941E-08	5.480E-08
WSW	2.140E-05	6.862E-06	3.612E-06	1.789E-06	7.014E-07	3.716E-07	2.309E-07	1.582E-07	1.159E-07	8.895E-08	7.075E-08
W	1.866E-05	6.031E-06	3.099E-06	1.512E-06	5.937E-07	3.149E-07	1.959E-07	1.344E-07	9.852E-08	7.570E-08	6.027E-08
WNW	1.740E-05	5.837E-06	3.018E-06	1.469E-06	5.658E-07	2.961E-07	1.823E-07	1.240E-07	9.025E-08	6.892E-08	5.457E-08
NW	2.588E-05	8.321E-06	4.254E-06	2.072E-06	8.107E-07	4.289E-07	2.662E-07	1.823E-07	1.334E-07	1.024E-07	8.143E-08
NNW	6.905E-05	2.058E-05	1.038E-05	5.085E-06	2.065E-06	1.120E-06	7.086E-07	4.926E-07	3.649E-07	2.830E-07	2.271E-07
N	1.188E-04	3.613E-05	1.863E-05	9.205E-06	3.698E-06	1.991E-06	1.253E-06	8.673E-07	6.403E-07	4.951E-07	3.963E-07
NNE	8.364E-05	2.516E-05	1.298E-05	6.432E-06	2.592E-06	1.399E-06	8.810E-07	6.104E-07	4.510E-07	3.489E-07	2.794E-07
NE	2.146E-05	7.058E-06	3.720E-06	1.836E-06	7.106E-07	3.730E-07	2.302E-07	1.569E-07	1.143E-07	8.741E-08	6.929E-08
ENE	3.281E-05	1.016E-05	5.286E-06	2.616E-06	1.040E-06	5.559E-07	3.478E-07	2.397E-07	1.763E-07	1.359E-07	1.085E-07
E	3.031E-05	9.276E-06	4.750E-06	2.336E-06	9.329E-07	5.004E-07	3.138E-07	2.167E-07	1.597E-07	1.232E-07	9.849E-08
ESE	3.901E-05	1.205E-05	6.271E-06	3.106E-06	1.234E-06	6.598E-07	4.128E-07	2.845E-07	2.093E-07	1.613E-07	1.287E-07
SE	6.423E-05	1.991E-05	1.020E-05	5.007E-06	1.992E-06	1.066E-06	6.675E-07	4.604E-07	3.388E-07	2.613E-07	2.087E-07
SSE	6.105E-05	1.899E-05	9.802E-06	4.827E-06	1.916E-06	1.023E-06	6.399E-07	4.408E-07	3.241E-07	2.497E-07	1.993E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.443E-07	7.092E-08	4.405E-08	2.346E-08	1.488E-08	1.038E-08	7.698E-09	5.951E-09	4.744E-09	3.871E-09	3.218E-09
SSW	9.662E-08	4.681E-08	2.879E-08	1.513E-08	9.511E-09	6.593E-09	4.863E-09	3.744E-09	2.974E-09	2.420E-09	2.006E-09
SW	4.451E-08	2.120E-08	1.288E-08	6.658E-09	4.137E-09	2.842E-09	2.082E-09	1.593E-09	1.259E-09	1.020E-09	8.429E-10
WSW	5.785E-08	2.827E-08	1.749E-08	9.263E-09	5.852E-09	4.071E-09	3.011E-09	2.323E-09	1.849E-09	1.507E-09	1.251E-09
W	4.931E-08	2.417E-08	1.499E-08	7.961E-09	5.040E-09	3.512E-09	2.601E-09	2.008E-09	1.599E-09	1.304E-09	1.083E-09
WNW	4.444E-08	2.139E-08	1.310E-08	6.843E-09	4.284E-09	2.961E-09	2.179E-09	1.674E-09	1.328E-09	1.079E-09	8.934E-10
NW	6.656E-08	3.251E-08	2.011E-08	1.065E-08	6.734E-09	4.689E-09	3.470E-09	2.679E-09	2.133E-09	1.739E-09	1.445E-09
NNW	1.871E-07	9.407E-08	5.933E-08	3.224E-08	2.072E-08	1.460E-08	1.090E-08	8.473E-09	6.784E-09	5.556E-09	4.633E-09
N	3.258E-07	1.625E-07	1.020E-07	5.510E-08	3.529E-08	2.481E-08	1.850E-08	1.437E-08	1.151E-08	9.423E-09	7.859E-09
NNE	2.298E-07	1.148E-07	7.210E-08	3.896E-08	2.495E-08	1.753E-08	1.307E-08	1.015E-08	8.117E-09	6.643E-09	5.537E-09
NE	5.648E-08	2.729E-08	1.676E-08	8.800E-09	5.532E-09	3.839E-09	2.836E-09	2.187E-09	1.741E-09	1.419E-09	1.180E-09
ENE	8.897E-08	4.399E-08	2.744E-08	1.470E-08	9.365E-09	6.558E-09	4.876E-09	3.780E-09	3.020E-09	2.470E-09	2.057E-09
E	8.086E-08	4.015E-08	2.511E-08	1.351E-08	8.625E-09	6.051E-09	4.506E-09	3.496E-09	2.796E-09	2.288E-09	1.907E-09
ESE	1.056E-07	5.224E-08	3.260E-08	1.749E-08	1.116E-08	7.830E-09	5.833E-09	4.529E-09	3.626E-09	2.971E-09	2.479E-09
SE	1.712E-07	8.479E-08	5.295E-08	2.841E-08	1.811E-08	1.269E-08	9.436E-09	7.314E-09	5.843E-09	4.778E-09	3.978E-09
SSE	1.634E-07	8.071E-08	5.031E-08	2.693E-08	1.713E-08	1.199E-08	8.904E-09	6.895E-09	5.503E-09	4.496E-09	3.741E-09

DIRECTION FROM SITE	CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT										
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	8.745E-06	1.951E-06	5.914E-07	2.923E-07	1.778E-07	7.529E-08	2.422E-08	1.051E-08	5.990E-09	3.888E-09	
SSW	6.127E-06	1.370E-06	4.062E-07	1.982E-07	1.195E-07	4.987E-08	1.567E-08	6.679E-09	3.770E-09	2.431E-09	
SW	3.035E-06	6.679E-07	1.930E-07	9.277E-08	5.531E-08	2.268E-08	6.921E-09	2.883E-09	1.606E-09	1.025E-09	
WSW	3.524E-06	7.964E-07	2.393E-07	1.177E-07	7.137E-08	3.005E-08	9.575E-09	4.122E-09	2.339E-09	1.513E-09	
W	3.045E-06	6.739E-07	2.031E-07	1.001E-07	6.078E-08	2.567E-08	8.224E-09	3.555E-09	2.022E-09	1.310E-09	
WNW	2.956E-06	6.466E-07	1.893E-07	9.177E-08	5.507E-08	2.283E-08	7.096E-09	3.001E-09	1.686E-09	1.084E-09	
NW	4.188E-06	9.214E-07	2.761E-07	1.356E-07	8.214E-08	3.456E-08	1.101E-08	4.747E-09	2.697E-09	1.747E-09	
NNW	1.029E-05	2.316E-06	7.320E-07	3.702E-07	2.288E-07	9.930E-08	3.314E-08	1.475E-08	8.523E-09	5.578E-09	
N	1.833E-05	4.163E-06	1.296E-06	6.498E-07	3.994E-07	1.719E-07	5.672E-08	2.508E-08	1.446E-08	9.461E-09	
NNE	1.278E-05	2.915E-06	9.108E-07	4.577E-07	2.816E-07	1.214E-07	4.010E-08	1.772E-08	1.021E-08	6.670E-09	
NE	3.624E-06	8.107E-07	2.389E-07	1.162E-07	6.991E-08	2.910E-08	9.117E-09	3.889E-09	2.202E-09	1.426E-09	
ENE	5.183E-06	1.175E-06	3.601E-07	1.790E-07	1.094E-07	4.663E-08	1.516E-08	6.634E-09	3.804E-09	2.480E-09	
E	4.683E-06	1.052E-06	3.247E-07	1.621E-07	9.929E-08	4.251E-08	1.392E-08	6.120E-09	3.518E-09	2.297E-09	
ESE	6.149E-06	1.395E-06	4.273E-07	2.125E-07	1.298E-07	5.537E-08	1.804E-08	7.920E-09	4.557E-09	2.983E-09	
SE	1.005E-05	2.250E-06	6.909E-07	3.440E-07	2.104E-07	8.984E-08	2.928E-08	1.283E-08	7.360E-09	4.797E-09	
SSE	9.633E-06	2.166E-06	6.625E-07	3.291E-07	2.009E-07	8.558E-08	2.777E-08	1.213E-08	6.939E-09	4.515E-09	

VENTS GROUND LEVEL RELEASES - OCT-DEC 1988
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**2) AT FIXED POINTS BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.400E-07	8.114E-08	4.166E-08	1.981E-08	7.115E-09	3.528E-09	2.078E-09	1.360E-09	9.572E-10	7.094E-10	5.467E-10
SSW	1.345E-07	4.549E-08	2.336E-08	1.110E-08	3.989E-09	1.978E-09	1.165E-09	7.627E-10	5.367E-10	3.977E-10	3.065E-10
SW	5.971E-08	2.019E-08	1.037E-08	4.929E-09	1.771E-09	8.780E-10	5.170E-10	3.385E-10	2.382E-10	1.765E-10	1.360E-10
WSW	6.447E-08	2.180E-08	1.119E-08	5.322E-09	1.912E-09	9.480E-10	5.582E-10	3.655E-10	2.572E-10	1.906E-10	1.469E-10
W	5.061E-08	1.712E-08	8.788E-09	4.178E-09	1.501E-09	7.442E-10	4.382E-10	2.869E-10	2.019E-10	1.496E-10	1.153E-10
WNW	5.867E-08	1.984E-08	1.019E-08	4.843E-09	1.739E-09	8.626E-10	5.079E-10	3.326E-10	2.340E-10	1.734E-10	1.337E-10
NW	1.065E-07	3.602E-08	1.849E-08	8.792E-09	3.158E-09	1.566E-09	9.222E-10	6.038E-10	4.249E-10	3.149E-10	2.427E-10
NNW	1.339E-07	4.527E-08	2.324E-08	1.105E-08	3.969E-09	1.968E-09	1.159E-09	7.590E-10	5.340E-10	3.958E-10	3.050E-10
N	3.350E-07	1.133E-07	5.817E-08	2.766E-08	9.934E-09	4.927E-09	2.901E-09	1.899E-09	1.337E-09	9.905E-10	7.633E-10
NNE	2.072E-07	7.008E-08	3.598E-08	1.711E-08	6.145E-09	3.047E-09	1.794E-09	1.175E-09	8.267E-10	6.127E-10	4.721E-10
NE	8.911E-08	3.013E-08	1.547E-08	7.355E-09	2.642E-09	1.310E-09	7.715E-10	5.052E-10	3.555E-10	2.634E-10	2.030E-10
ENE	9.352E-08	3.163E-08	1.624E-08	7.720E-09	2.773E-09	1.375E-09	8.097E-10	5.302E-10	3.731E-10	2.765E-10	2.131E-10
E	8.184E-08	2.768E-08	1.421E-08	6.756E-09	2.427E-09	1.203E-09	7.086E-10	4.640E-10	3.265E-10	2.420E-10	1.865E-10
ESE	1.513E-07	5.116E-08	2.627E-08	1.249E-08	4.486E-09	2.225E-09	1.310E-09	8.578E-10	6.036E-10	4.473E-10	3.447E-10
SE	2.459E-07	8.315E-08	4.270E-08	2.030E-08	7.291E-09	3.616E-09	2.129E-09	1.394E-09	9.809E-10	7.270E-10	5.602E-10
SSE	2.637E-07	8.918E-08	4.579E-08	2.177E-08	7.819E-09	3.878E-09	2.283E-09	1.495E-09	1.052E-09	7.797E-10	6.008E-10

DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	4.343E-10	1.929E-10	1.169E-10	5.970E-11	3.575E-11	2.397E-11	1.718E-11	1.290E-11	1.003E-11	8.011E-12	6.539E-12
SSW	2.435E-10	1.082E-10	6.552E-11	3.312E-11	2.004E-11	1.344E-11	9.630E-12	7.231E-12	5.622E-12	4.491E-12	3.666E-12
SW	1.081E-10	4.801E-11	2.908E-11	1.470E-11	8.897E-12	5.965E-12	4.274E-12	3.210E-12	2.496E-12	1.993E-12	1.627E-12
WSW	1.167E-10	5.184E-11	3.140E-11	1.587E-11	9.606E-12	6.441E-12	4.615E-12	3.465E-12	2.694E-12	2.152E-12	1.757E-12
W	9.160E-11	4.069E-11	2.465E-11	1.246E-11	7.541E-12	5.056E-12	3.623E-12	2.721E-12	2.115E-12	1.690E-12	1.379E-12
WNW	1.062E-10	4.717E-11	2.857E-11	1.444E-11	8.741E-12	5.861E-12	4.199E-12	3.153E-12	2.452E-12	1.959E-12	1.599E-12
NW	1.928E-10	8.564E-11	5.188E-11	2.622E-11	1.587E-11	1.064E-11	7.624E-12	5.725E-12	4.451E-12	3.556E-12	2.902E-12
NNW	2.423E-10	1.076E-10	6.520E-11	3.296E-11	1.995E-11	1.337E-11	9.583E-12	7.196E-12	5.595E-12	4.469E-12	3.648E-12
N	6.064E-10	2.694E-10	1.632E-10	8.248E-11	4.992E-11	3.347E-11	2.398E-11	1.801E-11	1.400E-11	1.119E-11	9.130E-12
NNE	3.751E-10	1.666E-10	1.009E-10	5.102E-11	3.088E-11	2.070E-11	1.483E-11	1.114E-11	8.661E-12	6.919E-12	5.647E-12
NE	1.613E-10	7.164E-11	4.340E-11	2.194E-11	1.328E-11	8.902E-12	6.379E-12	4.790E-12	3.724E-12	2.975E-12	2.428E-12
ENE	1.693E-10	7.520E-11	4.555E-11	2.302E-11	1.393E-11	9.343E-12	6.695E-12	5.027E-12	3.909E-12	3.122E-12	2.548E-12
E	1.481E-10	6.580E-11	3.986E-11	2.015E-11	1.219E-11	8.176E-12	5.858E-12	4.399E-12	3.420E-12	2.732E-12	2.230E-12
ESE	2.738E-10	1.217E-10	7.369E-11	3.725E-11	2.254E-11	1.512E-11	1.083E-11	8.133E-12	6.323E-12	5.051E-12	4.123E-12
SE	4.451E-10	1.977E-10	1.198E-10	6.054E-11	3.664E-11	2.457E-11	1.760E-11	1.322E-11	1.028E-11	8.209E-12	6.701E-12
SSE	4.773E-10	2.120E-10	1.284E-10	6.492E-11	3.929E-11	2.635E-11	1.888E-11	1.418E-11	1.102E-11	8.804E-12	7.186E-12

B268

***** RELATIVE DEPOSITION PER UNIT AREA (M**2) BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.072E-08	8.341E-09	2.178E-09	9.780E-10	5.533E-10	2.128E-10	6.155E-11	2.440E-11	1.303E-11	8.063E-12
SSW	2.283E-08	4.677E-09	1.221E-09	5.483E-10	3.102E-10	1.193E-10	3.451E-11	1.368E-11	7.304E-12	4.521E-12
SW	1.013E-08	2.076E-09	5.419E-10	2.434E-10	1.377E-10	5.295E-11	1.532E-11	6.071E-12	3.242E-12	2.007E-12
WSW	1.094E-08	2.241E-09	5.851E-10	2.628E-10	1.486E-10	5.716E-11	1.654E-11	6.554E-12	3.500E-12	2.166E-12
W	5.889E-09	1.759E-09	4.593E-10	2.063E-10	1.167E-10	4.488E-11	1.298E-11	5.146E-12	2.748E-12	1.701E-12
WNW	9.956E-09	2.039E-09	5.324E-10	2.391E-10	1.353E-10	5.202E-11	1.505E-11	5.964E-12	3.185E-12	1.971E-12
NW	1.808E-08	3.703E-09	9.666E-10	4.341E-10	2.456E-10	9.444E-11	2.732E-11	1.083E-11	5.783E-12	3.579E-12
NNW	2.272E-08	4.654E-09	1.215E-09	5.456E-10	3.087E-10	1.187E-10	3.434E-11	1.361E-11	7.268E-12	4.499E-12
N	5.686E-08	1.165E-08	3.040E-09	1.366E-09	7.725E-10	2.971E-10	8.594E-11	3.406E-11	1.819E-11	1.126E-11
NNE	3.517E-08	7.204E-09	1.881E-09	8.447E-10	4.778E-10	1.838E-10	5.316E-11	2.107E-11	1.125E-11	6.964E-12
NE	1.512E-08	3.098E-09	8.086E-10	3.632E-10	2.055E-10	7.901E-11	2.286E-11	9.059E-12	4.838E-12	2.994E-12
ENE	1.587E-08	3.251E-09	8.487E-10	3.812E-10	2.156E-10	8.292E-11	2.399E-11	9.508E-12	5.077E-12	3.143E-12
E	1.389E-08	2.845E-09	7.427E-10	3.336E-10	1.887E-10	7.257E-11	2.099E-11	8.320E-12	4.443E-12	2.750E-12
ESE	2.568E-08	5.260E-09	1.373E-09	6.167E-10	3.489E-10	1.342E-10	3.881E-11	1.538E-11	8.214E-12	5.084E-12
SE	4.173E-08	8.548E-09	2.232E-09	1.002E-09	5.670E-10	2.180E-10	6.308E-11	2.500E-11	1.335E-11	8.263E-12
SSE	4.476E-08	9.168E-09	2.393E-09	1.075E-09	6.081E-10	2.338E-10	6.765E-11	2.681E-11	1.432E-11	8.862E-12

VENTS GROUND LEVEL RELEASES - OCT-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

ID	RELEASE TYPE OF LOCATION	DIRECTION FROM SITE (MI)	DIST. (MI)	X/Q	X/Q	X/Q	D/Q
				(SEC/M3) NO DECAY	(SEC/M3) 2.26 DAY DECAY	(SEC/M3) 8.0 DAY DECAY	(PER SQ.METER)
				UNDEPLETED	UNDEPLETED	DEPLETED	
A	Site Boundary	S	.80	8.6E-06	8.5E-06	7.6E-06	3.5E-08
A	Site Boundary	SSW	.82	5.6E-06	5.6E-06	5.0E-06	1.8E-08
A	Site Boundary	SW	.97	1.9E-06	1.8E-06	1.6E-06	5.3E-09
A	Site Boundary	WSW	.93	2.5E-06	2.4E-06	2.2E-06	6.5E-09
A	Site Boundary	W	.91	2.2E-06	2.1E-06	1.9E-06	5.3E-09
A	Site Boundary	WNW	.94	2.0E-06	2.0E-06	1.7E-06	5.7E-09
A	Site Boundary	NW	.81	3.9E-06	3.9E-06	3.5E-06	1.5E-08
A	Site Boundary	NNW	.69	1.3E-05	1.3E-05	1.2E-05	2.7E-08
A	Site Boundary	N	.67	2.5E-05	2.4E-05	2.2E-05	6.9E-08
A	Site Boundary	NNE	.60	2.1E-05	2.1E-05	1.9E-05	5.2E-08
A	Site Boundary	NE	.62	5.5E-06	5.5E-06	5.0E-06	2.1E-08
A	Site Boundary	ENE	.59	8.6E-06	8.6E-06	7.8E-06	2.4E-08
A	Site Boundary	E	.53	9.4E-06	9.3E-06	8.5E-06	2.6E-08
A	Site Boundary	ESE	.54	1.2E-05	1.2E-05	1.1E-05	4.5E-08
A	Site Boundary	SE	.65	1.4E-05	1.4E-05	1.3E-05	5.4E-08
A	Site Boundary	SSE	.81	9.1E-06	9.1E-06	8.1E-06	3.7E-08
A	Nearest Res	SSW	3.00	3.4E-07	3.3E-07	2.7E-07	7.6E-10
A	Nearest Res	SW	1.00	1.7E-06	1.7E-06	1.5E-06	4.9E-09
A	Nearest Res	WSW	1.90	5.0E-07	4.9E-07	4.2E-07	1.1E-09
A	Nearest Res	W	1.00	1.7E-06	1.7E-06	1.5E-06	4.2E-09
A	Nearest Res	WNW	1.70	5.1E-07	5.0E-07	4.3E-07	1.3E-09
A	Nearest Res	NW	.90	3.1E-06	3.0E-06	2.7E-06	1.2E-08
A	Nearest Res	NNW	1.90	1.5E-06	1.5E-06	1.2E-06	2.2E-09
A	Nearest Res	N	2.90	1.2E-06	1.1E-06	9.3E-07	2.1E-09
A	Nearest Res	NNE	1.70	2.4E-06	2.3E-06	2.0E-06	4.5E-09
A	Nearest Res	ENE	1.70	9.4E-07	9.3E-07	7.9E-07	2.0E-09
A	Nearest Res	E	2.20	5.0E-07	4.9E-07	4.1E-07	9.6E-10
A	Nearest Res	SE	2.80	6.7E-07	6.5E-07	5.3E-07	1.6E-09
A	Nearest Cow	NNW	3.50	4.7E-07	4.5E-07	3.7E-07	5.3E-10
A	Nearest Garde	SSW	3.00	3.4E-07	3.3E-07	2.7E-07	7.6E-10
A	Nearest Garde	SW	2.20	3.0E-07	3.0E-07	2.5E-07	7.0E-10
A	Nearest Garde	WNW	1.70	5.1E-07	5.0E-07	4.3E-07	1.3E-09
A	Nearest Garde	NW	.90	3.1E-06	3.0E-06	2.7E-06	1.2E-08
A	Nearest Garde	NNW	2.80	7.1E-07	6.9E-07	5.6E-07	8.9E-10
A	Nearest Garde	E	2.20	5.0E-07	4.9E-07	4.1E-07	9.6E-10
A	Nearest Garde	ESE	2.20	6.6E-07	6.5E-07	5.4E-07	1.8E-09
A	Nearest Garde	SE	2.80	6.7E-07	6.5E-07	5.3E-07	1.6E-09

B269

Atmospheric Diffusion Estimates

Ground Level Releases

July-December 2018

VENTS GROUND LEVEL RELEASES - JUL-DEC 2018
NO DECAY, UNDEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE										
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.919E-05	1.970E-05	1.047E-05	5.237E-06	2.111E-06	1.145E-06	7.269E-07	5.079E-07	3.785E-07	2.955E-07	2.387E-07
SSW	3.858E-05	1.332E-05	7.121E-06	3.553E-06	1.402E-06	7.493E-07	4.699E-07	3.252E-07	2.403E-07	1.862E-07	1.495E-07
SW	2.053E-05	7.353E-06	3.939E-06	1.954E-06	7.558E-07	3.980E-07	2.468E-07	1.691E-07	1.240E-07	9.538E-08	7.608E-08
WSW	2.069E-05	7.136E-06	3.847E-06	1.926E-06	7.603E-07	4.064E-07	2.550E-07	1.766E-07	1.306E-07	1.012E-07	8.129E-08
W	1.810E-05	6.350E-06	3.392E-06	1.686E-06	6.656E-07	3.558E-07	2.233E-07	1.546E-07	1.143E-07	8.864E-08	7.119E-08
WNW	1.580E-05	5.649E-06	3.024E-06	1.500E-06	5.871E-07	3.119E-07	1.948E-07	1.343E-07	9.896E-08	7.648E-08	6.125E-08
NW	2.881E-05	1.004E-05	5.395E-06	2.694E-06	1.066E-06	5.705E-07	3.584E-07	2.483E-07	1.837E-07	1.425E-07	1.145E-07
NNW	5.744E-05	1.875E-05	9.991E-06	5.021E-06	2.049E-06	1.122E-06	7.166E-07	5.034E-07	3.769E-07	2.953E-07	2.394E-07
N	1.178E-04	3.772E-05	2.017E-05	1.019E-05	4.191E-06	2.306E-06	1.480E-06	1.043E-06	7.829E-07	6.149E-07	4.995E-07
NNE	8.587E-05	2.654E-05	1.403E-05	7.089E-06	2.954E-06	1.639E-06	1.058E-06	7.495E-07	5.649E-07	4.451E-07	3.626E-07
NE	3.258E-05	1.042E-05	5.531E-06	2.784E-06	1.142E-06	6.269E-07	4.014E-07	2.825E-07	2.118E-07	1.662E-07	1.348E-07
ENE	3.607E-05	1.124E-05	5.935E-06	2.992E-06	1.242E-06	6.869E-07	4.425E-07	3.128E-07	2.355E-07	1.853E-07	1.508E-07
E	3.081E-05	9.723E-06	5.170E-06	2.611E-06	1.078E-06	5.941E-07	3.816E-07	2.692E-07	2.023E-07	1.589E-07	1.292E-07
ESE	4.987E-05	1.555E-05	8.220E-06	4.148E-06	1.722E-06	9.534E-07	6.143E-07	4.344E-07	3.270E-07	2.575E-07	2.095E-07
SE	7.261E-05	2.277E-05	1.198E-05	6.025E-06	2.500E-06	1.383E-06	8.909E-07	6.299E-07	4.741E-07	3.732E-07	3.037E-07
SSE	6.799E-05	2.172E-05	1.160E-05	5.855E-06	2.404E-06	1.321E-06	8.464E-07	5.959E-07	4.470E-07	3.507E-07	2.847E-07

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE										
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.981E-07	1.027E-07	6.703E-08	3.882E-08	2.646E-08	1.969E-08	1.550E-08	1.267E-08	1.064E-08	9.132E-09	7.967E-09
SSW	1.233E-07	6.256E-08	4.017E-08	2.274E-08	1.525E-08	1.122E-08	8.737E-09	7.080E-09	5.906E-09	5.035E-09	4.368E-09
SW	6.240E-08	3.093E-08	1.953E-08	1.079E-08	7.119E-09	5.166E-09	3.980E-09	3.195E-09	2.643E-09	2.237E-09	1.927E-09
WSW	6.709E-08	3.409E-08	2.191E-08	1.243E-08	8.358E-09	6.156E-09	4.801E-09	3.895E-09	3.251E-09	2.774E-09	2.408E-09
W	5.876E-08	2.986E-08	1.920E-08	1.089E-08	7.314E-09	5.384E-09	4.197E-09	3.404E-09	2.841E-09	2.423E-09	2.103E-09
WNW	5.042E-08	2.537E-08	1.619E-08	9.085E-09	6.054E-09	4.428E-09	3.435E-09	2.773E-09	2.305E-09	1.960E-09	1.696E-09
NW	9.455E-08	4.811E-08	3.096E-08	1.758E-08	1.181E-08	8.692E-09	6.777E-09	5.496E-09	4.587E-09	3.913E-09	3.395E-09
NNW	1.992E-07	1.045E-07	6.874E-08	4.023E-08	2.761E-08	2.066E-08	1.633E-08	1.339E-08	1.128E-08	9.709E-09	8.489E-09
N	4.164E-07	2.199E-07	1.453E-07	8.555E-08	5.897E-08	4.427E-08	3.506E-08	2.881E-08	2.432E-08	2.096E-08	1.835E-08
NNE	3.031E-07	1.616E-07	1.075E-07	6.384E-08	4.427E-08	3.339E-08	2.655E-08	2.188E-08	1.852E-08	1.600E-08	1.403E-08
NE	1.123E-07	5.912E-08	3.897E-08	2.288E-08	1.574E-08	1.180E-08	9.338E-09	7.668E-09	6.469E-09	5.570E-09	4.875E-09
ENE	1.260E-07	6.694E-08	4.441E-08	2.630E-08	1.821E-08	1.371E-08	1.089E-08	8.970E-09	7.586E-09	6.547E-09	5.741E-09
E	1.077E-07	5.699E-08	3.769E-08	2.222E-08	1.533E-08	1.152E-08	9.129E-09	7.506E-09	6.339E-09	5.464E-09	4.786E-09
ESE	1.750E-07	9.304E-08	6.174E-08	3.658E-08	2.532E-08	1.906E-08	1.514E-08	1.247E-08	1.055E-08	9.101E-09	7.980E-09
SE	2.537E-07	1.348E-07	8.945E-08	5.300E-08	3.668E-08	2.763E-08	2.194E-08	1.807E-08	1.529E-08	1.319E-08	1.157E-08
SSE	2.372E-07	1.250E-07	8.240E-08	4.841E-08	3.331E-08	2.497E-08	1.976E-08	1.623E-08	1.369E-08	1.179E-08	1.031E-08

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.020E-05	2.377E-06	7.509E-07	3.838E-07	2.405E-07	1.081E-07	3.959E-08	1.982E-08	1.270E-08	9.148E-09
SSW	6.912E-06	1.590E-06	4.865E-07	2.440E-07	1.507E-07	6.611E-08	2.329E-08	1.130E-08	7.106E-09	5.046E-09
SW	3.816E-06	8.631E-07	2.561E-07	1.260E-07	7.673E-08	3.286E-08	1.110E-08	5.212E-09	3.209E-09	2.242E-09
WSW	3.724E-06	8.620E-07	2.640E-07	1.325E-07	8.194E-08	3.601E-08	1.273E-08	6.201E-09	3.909E-09	2.780E-09
W	3.291E-06	7.547E-07	2.312E-07	1.161E-07	7.175E-08	3.154E-08	1.115E-08	5.424E-09	3.416E-09	2.428E-09
WNW	2.930E-06	6.677E-07	2.018E-07	1.005E-07	6.175E-08	2.686E-08	9.317E-09	4.464E-09	2.784E-09	1.965E-09
NW	5.227E-06	1.207E-06	3.709E-07	1.865E-07	1.154E-07	5.081E-08	1.799E-08	8.757E-09	5.516E-09	3.921E-09
NNW	9.728E-06	2.297E-06	7.393E-07	3.820E-07	2.411E-07	1.097E-07	4.096E-08	2.078E-08	1.343E-08	9.724E-09
N	1.963E-05	4.686E-06	1.525E-06	7.932E-07	5.029E-07	2.304E-07	8.701E-08	4.451E-08	2.889E-08	2.099E-08
NNE	1.373E-05	3.289E-06	1.090E-06	5.720E-07	3.650E-07	1.690E-07	6.484E-08	3.355E-08	2.194E-08	1.602E-08
NE	5.396E-06	1.278E-06	4.140E-07	2.146E-07	1.358E-07	6.199E-08	2.328E-08	1.187E-08	7.688E-09	5.579E-09
ENE	5.807E-06	1.384E-06	4.558E-07	2.385E-07	1.518E-07	7.004E-08	2.673E-08	1.378E-08	8.991E-09	6.557E-09
E	5.045E-06	1.204E-06	3.933E-07	2.049E-07	1.301E-07	5.969E-08	2.260E-08	1.158E-08	7.525E-09	5.472E-09
ESE	8.038E-06	1.920E-06	6.328E-07	3.312E-07	2.110E-07	9.735E-08	3.716E-08	1.916E-08	1.250E-08	9.114E-09
SE	1.173E-05	2.787E-06	9.178E-07	4.802E-07	3.058E-07	1.411E-07	5.385E-08	2.777E-08	1.812E-08	1.321E-08
SSE	1.129E-05	2.690E-06	8.728E-07	4.529E-07	2.867E-07	1.310E-07	4.925E-08	2.511E-08	1.627E-08	1.180E-08

B271

VENTS GROUND LEVEL RELEASES - JUL-DEC 2018
2.260 DAY DECAY, UNDEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)			DISTANCE IN MILES FROM THE SITE								
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.907E-05	1.962E-05	1.041E-05	5.199E-06	2.087E-06	1.127E-06	7.125E-07	4.957E-07	3.679E-07	2.859E-07	2.300E-07
SSW	3.852E-05	1.328E-05	7.089E-06	3.531E-06	1.389E-06	7.396E-07	4.622E-07	3.187E-07	2.347E-07	1.812E-07	1.449E-07
SW	2.050E-05	7.333E-06	3.923E-06	1.943E-06	7.494E-07	3.935E-07	2.432E-07	1.662E-07	1.215E-07	9.315E-08	7.406E-08
WSW	2.066E-05	7.112E-06	3.827E-06	1.913E-06	7.523E-07	4.007E-07	2.505E-07	1.727E-07	1.273E-07	9.827E-08	7.862E-08
W	1.807E-05	6.328E-06	3.375E-06	1.675E-06	6.589E-07	3.510E-07	2.195E-07	1.514E-07	1.115E-07	8.615E-08	6.893E-08
WNW	1.578E-05	5.632E-06	3.011E-06	1.492E-06	5.821E-07	3.083E-07	1.919E-07	1.319E-07	9.688E-08	7.463E-08	5.958E-08
NW	2.877E-05	1.001E-05	5.372E-06	2.678E-06	1.056E-06	5.636E-07	3.529E-07	2.437E-07	1.797E-07	1.389E-07	1.113E-07
NNW	5.731E-05	1.867E-05	9.928E-06	4.978E-06	2.023E-06	1.102E-06	7.007E-07	4.899E-07	3.650E-07	2.847E-07	2.297E-07
N	1.176E-04	3.756E-05	2.005E-05	1.010E-05	4.139E-06	2.268E-06	1.448E-06	1.016E-06	7.594E-07	5.937E-07	4.801E-07
NNE	8.564E-05	2.640E-05	1.392E-05	7.017E-06	2.908E-06	1.605E-06	1.030E-06	7.258E-07	5.441E-07	4.264E-07	3.455E-07
NE	3.250E-05	1.037E-05	5.494E-06	2.760E-06	1.126E-06	6.154E-07	3.921E-07	2.746E-07	2.049E-07	1.599E-07	1.291E-07
ENE	3.597E-05	1.119E-05	5.891E-06	2.962E-06	1.223E-06	6.729E-07	4.311E-07	3.032E-07	2.270E-07	1.777E-07	1.438E-07
E	3.073E-05	9.674E-06	5.132E-06	2.586E-06	1.062E-06	5.822E-07	3.720E-07	2.610E-07	1.951E-07	1.525E-07	1.233E-07
ESE	4.975E-05	1.547E-05	8.161E-06	4.109E-06	1.698E-06	9.351E-07	5.995E-07	4.218E-07	3.159E-07	2.474E-07	2.004E-07
SE	7.242E-05	2.265E-05	1.190E-05	5.967E-06	2.463E-06	1.355E-06	8.684E-07	6.108E-07	4.573E-07	3.580E-07	2.898E-07
SSE	6.782E-05	2.162E-05	1.152E-05	5.802E-06	2.371E-06	1.296E-06	8.263E-07	5.788E-07	4.319E-07	3.372E-07	2.723E-07

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)			DISTANCE IN MILES FROM THE SITE								
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.900E-07	9.639E-08	6.151E-08	3.410E-08	2.226E-08	1.589E-08	1.201E-08	9.432E-09	7.627E-09	6.306E-09	5.306E-09
SSW	1.191E-07	5.930E-08	3.737E-08	2.037E-08	1.317E-08	9.335E-09	7.016E-09	5.491E-09	4.427E-09	3.651E-09	3.066E-09
SW	6.056E-08	2.955E-08	1.837E-08	9.837E-09	6.291E-09	4.729E-09	3.308E-09	2.578E-09	2.070E-09	1.777E-09	1.438E-09
WSW	6.463E-08	3.220E-08	2.030E-08	1.108E-08	7.168E-09	5.085E-09	3.823E-09	2.992E-09	2.412E-09	1.989E-09	1.670E-09
W	5.667E-08	2.826E-08	1.783E-08	9.735E-09	6.298E-09	4.468E-09	3.360E-09	2.630E-09	2.120E-09	1.749E-09	1.468E-09
WNW	4.889E-08	2.420E-08	1.519E-08	8.247E-09	5.319E-09	3.767E-09	2.830E-09	2.215E-09	1.786E-09	1.473E-09	1.237E-09
NW	9.154E-08	4.578E-08	2.895E-08	1.587E-08	1.031E-08	7.335E-09	5.533E-09	4.345E-09	3.515E-09	2.908E-09	2.449E-09
NNW	1.902E-07	9.744E-08	6.256E-08	3.493E-08	2.290E-08	1.639E-08	1.240E-08	9.753E-09	7.891E-09	6.526E-09	5.493E-09
N	3.984E-07	2.057E-07	1.329E-07	7.488E-08	4.945E-08	3.562E-08	2.711E-08	2.143E-08	1.743E-08	1.449E-08	1.225E-08
NNE	2.872E-07	1.490E-07	9.644E-08	5.434E-08	3.581E-08	2.570E-08	1.948E-08	1.533E-08	1.241E-08	1.027E-08	8.641E-09
NE	1.070E-07	5.497E-08	3.535E-08	1.978E-08	1.298E-08	9.298E-09	7.040E-09	5.539E-09	4.484E-09	3.710E-09	3.123E-09
ENE	1.195E-07	6.180E-08	3.992E-08	2.245E-08	1.477E-08	1.059E-08	8.023E-09	6.313E-09	5.108E-09	4.224E-09	3.554E-09
E	1.023E-07	5.270E-08	3.395E-08	1.902E-08	1.248E-08	8.935E-09	6.758E-09	5.311E-09	4.294E-09	3.547E-09	2.982E-09
ESE	1.665E-07	8.633E-08	5.588E-08	3.153E-08	2.082E-08	1.498E-08	1.139E-08	8.992E-09	7.301E-09	6.057E-09	5.113E-09
SE	2.408E-07	1.246E-07	8.052E-08	4.530E-08	2.982E-08	2.139E-08	1.621E-08	1.276E-08	1.033E-08	8.541E-09	7.188E-09
SSE	2.258E-07	1.160E-07	7.456E-08	4.168E-08	2.733E-08	1.955E-08	1.479E-08	1.162E-08	9.398E-09	7.766E-09	6.531E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.014E-05	2.352E-06	7.364E-07	3.732E-07	2.317E-07	1.017E-07	3.493E-08	1.604E-08	9.480E-09	6.327E-09
SSW	6.883E-06	1.576E-06	4.788E-07	2.383E-07	1.461E-07	6.284E-08	2.095E-08	9.429E-09	5.521E-09	3.664E-09
SW	3.801E-06	8.565E-07	2.525E-07	1.234E-07	7.472E-08	3.147E-08	1.016E-08	4.476E-09	2.593E-09	1.709E-09
WSW	3.706E-06	8.539E-07	2.594E-07	1.292E-07	7.926E-08	3.412E-08	1.139E-08	5.136E-09	3.009E-09	1.996E-09
W	3.276E-06	7.478E-07	2.273E-07	1.132E-07	6.949E-08	2.994E-08	1.001E-08	4.513E-09	2.644E-09	1.755E-09
WNW	2.918E-06	6.626E-07	1.989E-07	9.841E-08	6.008E-08	2.568E-08	8.489E-09	3.806E-09	2.227E-09	1.478E-09
NW	5.206E-06	1.198E-06	3.654E-07	1.825E-07	1.122E-07	4.847E-08	1.630E-08	7.406E-09	4.368E-09	2.918E-09
NNW	9.670E-06	2.270E-06	7.233E-07	3.701E-07	2.314E-07	1.026E-07	3.572E-08	1.653E-08	9.800E-09	6.548E-09
N	1.952E-05	4.633E-06	1.494E-06	7.696E-07	4.835E-07	2.162E-07	7.647E-08	3.591E-08	2.153E-08	1.453E-08
NNE	1.363E-05	3.242E-06	1.062E-06	5.512E-07	3.478E-07	1.563E-07	5.546E-08	2.591E-08	1.541E-08	1.030E-08
NE	5.363E-06	1.262E-06	4.046E-07	2.077E-07	1.301E-07	5.782E-08	2.022E-08	9.377E-09	5.566E-09	3.722E-09
ENE	5.766E-06	1.365E-06	4.444E-07	2.300E-07	1.448E-07	6.489E-08	2.292E-08	1.068E-08	6.342E-09	4.238E-09
E	5.010E-06	1.187E-06	3.837E-07	1.977E-07	1.242E-07	5.538E-08	1.943E-08	9.010E-09	5.337E-09	3.559E-09
ESE	7.985E-06	1.894E-06	6.179E-07	3.201E-07	2.018E-07	9.061E-08	3.218E-08	1.510E-08	9.032E-09	6.076E-09
SE	1.165E-05	2.749E-06	8.952E-07	4.633E-07	2.919E-07	1.308E-07	4.625E-08	2.157E-08	1.282E-08	8.569E-09
SSE	1.122E-05	2.656E-06	8.526E-07	4.378E-07	2.743E-07	1.220E-07	4.261E-08	1.972E-08	1.168E-08	7.792E-09

B272

VENTS GROUND LEVEL RELEASES - JUL-DEC 2018
8.000 DAY DECAY, DEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.599E-05	1.797E-05	9.316E-06	4.575E-06	1.787E-06	9.441E-07	5.855E-07	4.006E-07	2.930E-07	2.247E-07	1.786E-07
SSW	3.650E-05	1.215E-05	6.338E-06	3.105E-06	1.188E-06	6.181E-07	3.789E-07	2.568E-07	1.863E-07	1.418E-07	1.120E-07
SW	1.943E-05	6.710E-06	3.506E-06	1.708E-06	6.403E-07	3.285E-07	1.991E-07	1.337E-07	9.618E-08	7.273E-08	5.708E-08
WSW	1.957E-05	6.511E-06	3.423E-06	1.682E-06	6.437E-07	3.352E-07	2.055E-07	1.394E-07	1.011E-07	7.705E-08	6.088E-08
W	1.712E-05	5.793E-06	3.019E-06	1.473E-06	5.636E-07	2.935E-07	1.800E-07	1.221E-07	8.859E-08	6.749E-08	5.333E-08
WNW	1.495E-05	5.154E-06	2.691E-06	1.311E-06	4.974E-07	2.574E-07	1.571E-07	1.061E-07	7.675E-08	5.830E-08	4.594E-08
NW	2.726E-05	9.164E-06	4.802E-06	2.354E-06	9.027E-07	4.708E-07	2.890E-07	1.962E-07	1.425E-07	1.086E-07	8.587E-08
NNW	5.433E-05	1.710E-05	8.888E-06	4.384E-06	1.734E-06	9.240E-07	5.768E-07	3.968E-07	2.914E-07	2.243E-07	1.789E-07
N	1.114E-04	3.440E-05	1.795E-05	8.896E-06	3.547E-06	1.901E-06	1.191E-06	8.223E-07	6.056E-07	4.673E-07	3.734E-07
NNE	8.121E-05	2.420E-05	1.248E-05	6.187E-06	2.498E-06	1.349E-06	8.508E-07	5.899E-07	4.361E-07	3.375E-07	2.704E-07
NE	3.081E-05	9.502E-06	4.920E-06	2.431E-06	9.661E-07	5.164E-07	3.230E-07	2.226E-07	1.637E-07	1.262E-07	1.007E-07
ENE	3.411E-05	1.025E-05	5.278E-06	2.612E-06	1.050E-06	5.655E-07	3.558E-07	2.463E-07	1.818E-07	1.406E-07	1.125E-07
E	2.914E-05	8.866E-06	4.598E-06	2.279E-06	9.114E-07	4.891E-07	3.069E-07	2.120E-07	1.562E-07	1.206E-07	9.637E-08
ESE	4.717E-05	1.418E-05	7.310E-06	3.621E-06	1.457E-06	7.851E-07	4.942E-07	3.422E-07	2.527E-07	1.954E-07	1.564E-07
SE	6.867E-05	2.076E-05	1.066E-05	5.260E-06	2.114E-06	1.139E-06	7.164E-07	4.960E-07	3.662E-07	2.831E-07	2.266E-07
SSE	6.430E-05	1.981E-05	1.031E-05	5.112E-06	2.034E-06	1.088E-06	6.809E-07	4.694E-07	3.454E-07	2.662E-07	2.125E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.459E-07	7.110E-08	4.392E-08	2.323E-08	1.467E-08	1.021E-08	7.552E-09	5.830E-09	4.642E-09	3.785E-09	3.144E-09
SSW	9.102E-08	4.342E-08	2.642E-08	1.369E-08	8.524E-09	5.869E-09	4.307E-09	3.302E-09	2.614E-09	2.121E-09	1.755E-09
SW	4.612E-08	2.152E-08	1.289E-08	6.532E-09	4.009E-09	2.730E-09	1.986E-09	1.511E-09	1.189E-09	9.600E-10	7.906E-10
WSW	4.948E-08	2.364E-08	1.440E-08	7.473E-09	4.663E-09	3.162E-09	2.362E-09	1.813E-09	1.436E-09	1.166E-09	9.654E-10
W	4.335E-08	2.072E-08	1.262E-08	6.552E-09	4.086E-09	2.817E-09	2.069E-09	1.587E-09	1.258E-09	1.021E-09	8.453E-10
WNW	3.726E-08	1.764E-08	1.068E-08	5.491E-09	3.402E-09	2.334E-09	1.708E-09	1.307E-09	1.033E-09	8.368E-10	6.916E-10
NW	6.983E-08	3.343E-08	2.040E-08	1.061E-08	6.620E-09	4.568E-09	3.357E-09	2.578E-09	2.044E-09	1.661E-09	1.376E-09
NNW	1.466E-07	7.221E-08	4.493E-08	2.399E-08	1.525E-08	1.066E-08	7.911E-09	6.123E-09	4.886E-09	3.991E-09	3.321E-09
N	3.065E-07	1.521E-07	9.510E-08	5.114E-08	3.266E-08	2.292E-08	1.708E-08	1.326E-08	1.061E-08	8.685E-09	7.243E-09
NNE	2.225E-07	1.113E-07	6.996E-08	3.785E-08	2.426E-08	1.706E-08	1.273E-08	9.888E-09	7.914E-09	6.480E-09	5.403E-09
NE	8.257E-08	4.081E-08	2.545E-08	1.363E-08	8.676E-09	6.073E-09	4.514E-09	3.497E-09	2.793E-09	2.283E-09	1.901E-09
ENE	9.247E-08	4.611E-08	2.892E-08	1.561E-08	9.987E-09	7.016E-09	5.228E-09	4.058E-09	3.246E-09	2.657E-09	2.214E-09
E	7.912E-08	3.928E-08	2.456E-08	1.320E-08	8.420E-09	5.901E-09	4.390E-09	3.403E-09	2.719E-09	2.223E-09	1.851E-09
ESE	1.286E-07	6.419E-08	4.029E-08	2.177E-08	1.394E-08	9.803E-09	7.313E-09	5.682E-09	4.550E-09	3.728E-09	3.110E-09
SE	1.863E-07	9.290E-08	5.828E-08	3.146E-08	2.013E-08	1.414E-08	1.054E-08	8.184E-09	6.547E-09	5.359E-09	4.467E-09
SSE	1.743E-07	8.621E-08	5.377E-08	2.880E-08	1.833E-08	1.283E-08	9.531E-09	7.381E-09	5.892E-09	4.814E-09	4.007E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	9.132E-06	2.032E-06	6.072E-07	2.977E-07	1.801E-07	7.564E-08	2.402E-08	1.034E-08	5.869E-09	3.801E-09
SSW	6.193E-06	1.361E-06	3.938E-07	1.895E-07	1.131E-07	4.644E-08	1.422E-08	5.952E-09	3.327E-09	2.132E-09
SW	3.419E-06	7.389E-07	2.074E-07	9.796E-08	5.766E-08	2.315E-08	6.823E-09	2.773E-09	1.524E-09	9.652E-10
WSW	3.336E-06	7.374E-07	2.137E-07	1.029E-07	6.145E-08	2.527E-08	7.763E-09	3.260E-09	1.826E-09	1.172E-09
W	2.948E-06	6.457E-07	1.871E-07	9.012E-08	5.383E-08	2.215E-08	6.805E-09	2.856E-09	1.599E-09	1.026E-09
WNW	2.625E-06	5.716E-07	1.635E-07	7.811E-08	4.639E-08	1.890E-08	5.716E-09	2.369E-09	1.317E-09	8.411E-10
NW	4.683E-06	1.033E-06	3.004E-07	1.449E-07	8.667E-08	3.573E-08	1.101E-08	4.631E-09	2.597E-09	1.669E-09
NNW	8.711E-06	1.963E-06	5.974E-07	2.960E-07	1.804E-07	7.661E-08	2.476E-08	1.078E-08	6.163E-09	4.008E-09
N	1.758E-05	4.004E-06	1.233E-06	6.148E-07	3.764E-07	1.611E-07	5.270E-08	2.318E-08	1.334E-08	8.720E-09
NNE	1.229E-05	2.807E-06	8.794E-07	4.425E-07	2.725E-07	1.176E-07	3.895E-08	1.725E-08	9.948E-09	6.506E-09
NE	4.832E-06	1.092E-06	3.344E-07	1.662E-07	1.015E-07	4.326E-08	1.405E-08	6.144E-09	3.519E-09	2.292E-09
ENE	5.198E-06	1.182E-06	3.679E-07	1.845E-07	1.134E-07	4.878E-08	1.607E-08	7.093E-09	4.083E-09	2.668E-09
E	4.516E-06	1.028E-06	3.175E-07	1.586E-07	9.715E-08	4.159E-08	1.360E-08	5.968E-09	3.424E-09	2.232E-09
ESE	7.196E-06	1.639E-06	5.110E-07	2.564E-07	1.577E-07	6.788E-08	2.241E-08	9.910E-09	5.717E-09	3.743E-09
SE	1.050E-05	2.380E-06	7.409E-07	3.716E-07	2.284E-07	9.826E-08	3.239E-08	1.430E-08	8.234E-09	5.381E-09
SSE	1.011E-05	2.298E-06	7.049E-07	3.507E-07	2.143E-07	9.137E-08	2.970E-08	1.298E-08	7.428E-09	4.835E-09

B273

VENTS GROUND LEVEL RELEASES - JUL-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**⁻²) AT FIXED POINTS BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.423E-07	8.195E-08	4.208E-08	2.000E-08	7.186E-09	3.563E-09	2.098E-09	1.374E-09	9.668E-10	7.165E-10	5.521E-10
SSW	1.684E-07	5.694E-08	2.924E-08	1.390E-08	4.993E-09	2.476E-09	1.458E-09	9.546E-10	6.717E-10	4.978E-10	3.836E-10
SW	8.347E-08	2.823E-08	1.449E-08	6.890E-09	2.475E-09	1.227E-09	7.227E-10	4.732E-10	3.330E-10	2.468E-10	1.902E-10
WSW	7.435E-08	2.514E-08	1.291E-08	6.137E-09	2.205E-09	1.093E-09	6.438E-10	4.215E-10	2.966E-10	2.198E-10	1.694E-10
W	6.049E-08	2.045E-08	1.050E-08	4.993E-09	1.793E-09	8.894E-10	5.237E-10	3.429E-10	2.413E-10	1.788E-10	1.378E-10
WNW	6.658E-08	2.251E-08	1.156E-08	5.496E-09	1.974E-09	9.790E-10	5.764E-10	3.774E-10	2.656E-10	1.968E-10	1.517E-10
NW	1.412E-07	4.773E-08	2.451E-08	1.165E-08	4.185E-09	2.076E-09	1.222E-09	8.002E-10	5.631E-10	4.173E-10	3.216E-10
NNW	1.719E-07	5.813E-08	2.985E-08	1.419E-08	5.097E-09	2.528E-09	1.488E-09	9.745E-10	6.857E-10	5.082E-10	3.916E-10
N	3.658E-07	1.237E-07	6.351E-08	3.019E-08	1.084E-08	5.378E-09	3.167E-09	2.074E-09	1.459E-09	1.081E-09	8.333E-10
NNE	1.912E-07	6.464E-08	3.319E-08	1.578E-08	5.668E-09	2.811E-09	1.655E-09	1.084E-09	7.625E-10	5.651E-10	4.355E-10
NE	8.498E-08	2.874E-08	1.476E-08	7.015E-09	2.520E-09	1.250E-09	7.358E-10	4.818E-10	3.390E-10	2.512E-10	1.936E-10
ENE	7.606E-08	2.572E-08	1.321E-08	6.279E-09	2.255E-09	1.118E-09	6.586E-10	4.312E-10	3.034E-10	2.249E-10	1.733E-10
E	6.200E-08	2.096E-08	1.076E-08	5.118E-09	1.838E-09	9.116E-10	5.368E-10	3.515E-10	2.473E-10	1.833E-10	1.412E-10
ESE	1.209E-07	4.089E-08	2.100E-08	9.982E-09	3.586E-09	1.778E-09	1.047E-09	6.856E-10	4.824E-10	3.575E-10	2.755E-10
SE	1.867E-07	6.312E-08	3.241E-08	1.541E-08	5.535E-09	2.745E-09	1.616E-09	1.058E-09	7.446E-10	5.518E-10	4.253E-10
SSE	2.198E-07	7.433E-08	3.817E-08	1.814E-08	6.518E-09	3.232E-09	1.903E-09	1.246E-09	8.769E-10	6.498E-10	5.008E-10

DIRECTION FROM SITE	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	4.386E-10	1.949E-10	1.180E-10	5.966E-11	3.611E-11	2.421E-11	1.735E-11	1.303E-11	1.013E-11	8.091E-12	6.604E-12
SSW	3.048E-10	1.354E-10	8.201E-11	4.145E-11	2.509E-11	1.682E-11	1.205E-11	9.051E-12	7.037E-12	5.621E-12	4.588E-12
SW	1.511E-10	6.711E-11	4.065E-11	2.055E-11	1.244E-11	8.339E-12	5.975E-12	4.487E-12	3.489E-12	2.787E-12	2.275E-12
WSW	1.346E-10	5.978E-11	3.621E-11	1.830E-11	1.108E-11	7.428E-12	5.322E-12	3.997E-12	3.107E-12	2.482E-12	2.026E-12
W	1.095E-10	4.863E-11	2.946E-11	1.489E-11	9.012E-12	6.042E-12	4.330E-12	3.251E-12	2.528E-12	2.019E-12	1.648E-12
WNW	1.205E-10	5.353E-11	3.243E-11	1.639E-11	9.920E-12	6.651E-12	4.766E-12	3.579E-12	2.782E-12	2.223E-12	1.814E-12
NW	2.555E-10	1.135E-10	6.875E-11	3.475E-11	2.103E-11	1.410E-11	1.010E-11	7.587E-12	5.899E-12	4.712E-12	3.846E-12
NNW	3.111E-10	1.382E-10	8.372E-11	4.232E-11	2.561E-11	1.717E-11	1.230E-11	9.240E-12	7.184E-12	5.739E-12	4.684E-12
N	6.620E-10	2.941E-10	1.781E-10	9.004E-11	5.450E-11	3.654E-11	2.618E-11	1.966E-11	1.529E-11	1.221E-11	9.967E-12
NNE	3.460E-10	1.537E-10	9.310E-11	4.706E-11	2.848E-11	1.910E-11	1.368E-11	1.027E-11	7.989E-12	6.381E-12	5.209E-12
NE	1.538E-10	6.833E-11	4.139E-11	2.092E-11	1.266E-11	8.490E-12	6.083E-12	4.568E-12	3.552E-12	2.837E-12	2.316E-12
ENE	1.377E-10	6.116E-11	3.705E-11	1.872E-11	1.133E-11	7.599E-12	5.445E-12	4.088E-12	3.179E-12	2.539E-12	2.073E-12
E	1.122E-10	4.985E-11	3.020E-11	1.526E-11	9.237E-12	6.193E-12	4.438E-12	3.332E-12	2.591E-12	2.070E-12	1.689E-12
ESE	2.189E-10	9.723E-11	5.890E-11	2.977E-11	1.802E-11	1.208E-11	8.656E-12	6.500E-12	5.054E-12	4.037E-12	3.295E-12
SE	3.378E-10	1.501E-10	9.091E-11	4.595E-11	2.781E-11	1.865E-11	1.336E-11	1.003E-11	7.801E-12	6.232E-12	5.086E-12
SSE	3.978E-10	1.767E-10	1.071E-10	5.411E-11	3.275E-11	2.196E-11	1.573E-11	1.182E-11	9.187E-12	7.338E-12	5.990E-12

***** RELATIVE DEPOSITION PER UNIT AREA (M**⁻²) BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.113E-08	8.424E-09	2.199E-09	9.877E-10	5.588E-10	2.149E-10	6.216E-11	2.464E-11	1.316E-11	8.144E-12
SSW	2.858E-08	5.853E-09	1.528E-09	6.863E-10	3.882E-10	1.493E-10	4.319E-11	1.712E-11	9.141E-12	5.658E-12
SW	1.417E-08	2.902E-09	7.575E-10	3.402E-10	1.925E-10	7.401E-11	2.141E-11	8.486E-12	4.532E-12	2.805E-12
WSW	1.262E-08	2.585E-09	6.747E-10	3.030E-10	1.714E-10	6.593E-11	1.907E-11	7.559E-12	4.037E-12	2.499E-12
W	1.026E-08	2.103E-09	5.489E-10	2.465E-10	1.395E-10	5.363E-11	1.552E-11	6.149E-12	3.284E-12	2.033E-12
WNW	1.130E-08	2.314E-09	6.042E-10	2.713E-10	1.535E-10	5.903E-11	1.708E-11	6.769E-12	3.614E-12	2.237E-12
NW	2.395E-08	4.907E-09	1.281E-09	5.753E-10	3.255E-10	1.252E-10	3.621E-11	1.435E-11	7.663E-12	4.743E-12
NNW	2.917E-08	5.976E-09	1.560E-09	7.006E-10	3.963E-10	1.524E-10	4.409E-11	1.748E-11	9.332E-12	5.776E-12
N	6.207E-08	1.271E-08	3.319E-09	1.491E-09	8.433E-10	3.243E-10	9.382E-11	3.718E-11	1.986E-11	1.229E-11
NNE	3.244E-08	6.645E-09	1.735E-09	7.791E-10	4.407E-10	1.695E-10	4.903E-11	1.943E-11	1.038E-11	6.423E-12
NE	1.442E-08	2.954E-09	7.712E-10	3.464E-10	1.959E-10	7.535E-11	2.180E-11	8.640E-12	4.614E-12	2.856E-12
ENE	1.291E-08	2.644E-09	6.903E-10	3.100E-10	1.754E-10	6.744E-11	1.951E-11	7.733E-12	4.129E-12	2.556E-12
E	1.052E-08	2.155E-09	5.626E-10	2.527E-10	1.429E-10	5.497E-11	1.590E-11	6.303E-12	3.366E-12	2.083E-12
ESE	2.052E-08	4.204E-09	1.097E-09	4.929E-10	2.788E-10	1.072E-10	3.102E-11	1.229E-11	6.565E-12	4.064E-12
SE	3.168E-08	6.489E-09	1.694E-09	7.608E-10	4.304E-10	1.655E-10	4.788E-11	1.898E-11	1.013E-11	6.273E-12
SSE	3.730E-08	7.641E-09	1.995E-09	8.959E-10	5.068E-10	1.949E-10	5.638E-11	2.235E-11	1.193E-11	7.387E-12

B274

VENTS GROUND LEVEL RELEASES - JUL-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS
SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION FROM SITE	DIRECTION (MI)	DIST. (MI)	X/Q	X/Q	X/Q	D/Q
				(SEC/M3)	(SEC/M3)	(SEC/M3)	(PER SQ.METER)
				NO	2.26 DAY	8.0 DAY	
				DECAY	DECAY	DECAY	
				UNDEPLETED	UNDEPLETED	DEPLETED	
A	Site Boundary	S	.80	9.0E-06	8.9E-06	8.0E-06	3.6E-08
A	Site Boundary	SSW	.82	5.7E-06	5.6E-06	5.0E-06	2.3E-08
A	Site Boundary	SW	.97	2.1E-06	2.1E-06	1.8E-06	7.4E-09
A	Site Boundary	WSW	.93	2.3E-06	2.3E-06	2.0E-06	7.5E-09
A	Site Boundary	W	.91	2.1E-06	2.1E-06	1.8E-06	6.3E-09
A	Site Boundary	WNW	.94	1.8E-06	1.7E-06	1.5E-06	6.5E-09
A	Site Boundary	NW	.81	4.5E-06	4.4E-06	4.0E-06	2.0E-08
A	Site Boundary	NNW	.69	1.1E-05	1.1E-05	1.0E-05	3.5E-08
A	Site Boundary	N	.67	2.4E-05	2.4E-05	2.1E-05	7.6E-08
A	Site Boundary	NNE	.60	2.0E-05	2.0E-05	1.8E-05	4.8E-08
A	Site Boundary	NE	.62	7.3E-06	7.3E-06	6.6E-06	2.0E-08
A	Site Boundary	ENE	.59	8.7E-06	8.6E-06	7.8E-06	2.0E-08
A	Site Boundary	E	.53	9.0E-06	8.9E-06	8.2E-06	1.9E-08
A	Site Boundary	ESE	.54	1.4E-05	1.4E-05	1.3E-05	3.6E-08
A	Site Boundary	SE	.65	1.5E-05	1.5E-05	1.3E-05	4.1E-08
A	Site Boundary	SSE	.81	9.6E-06	9.5E-06	8.5E-06	3.1E-08
A	Nearest Res	SSW	3.00	3.3E-07	3.2E-07	2.6E-07	9.5E-10
A	Nearest Res	SW	1.00	2.0E-06	1.9E-06	1.7E-06	6.9E-09
A	Nearest Res	WSW	1.90	4.5E-07	4.5E-07	3.8E-07	1.2E-09
A	Nearest Res	W	1.00	1.7E-06	1.7E-06	1.5E-06	5.0E-09
A	Nearest Res	WNW	1.70	4.4E-07	4.4E-07	3.7E-07	1.5E-09
A	Nearest Res	NW	.90	3.5E-06	3.5E-06	3.1E-06	1.5E-08
A	Nearest Res	NNW	1.90	1.2E-06	1.2E-06	1.0E-06	2.9E-09
A	Nearest Res	N	2.90	1.1E-06	1.1E-06	8.8E-07	2.2E-09
A	Nearest Res	NNE	1.70	2.3E-06	2.2E-06	1.9E-06	4.2E-09
A	Nearest Res	ENE	1.70	9.6E-07	9.4E-07	8.0E-07	1.7E-09
A	Nearest Res	E	2.20	4.9E-07	4.8E-07	4.0E-07	7.3E-10
A	Nearest Res	SE	2.80	7.2E-07	7.0E-07	5.7E-07	1.2E-09
A	Nearest Cow	NNW	3.50	3.8E-07	3.7E-07	2.9E-07	6.9E-10
A	Nearest Garde	SSW	3.00	3.3E-07	3.2E-07	2.6E-07	9.5E-10
A	Nearest Garde	SW	2.20	3.2E-07	3.2E-07	2.6E-07	9.8E-10
A	Nearest Garde	WNW	1.70	4.4E-07	4.4E-07	3.7E-07	1.5E-09
A	Nearest Garde	NW	.90	3.5E-06	3.5E-06	3.1E-06	1.5E-08
A	Nearest Garde	NNW	2.80	5.7E-07	5.6E-07	4.6E-07	1.1E-09
A	Nearest Garde	E	2.20	4.9E-07	4.8E-07	4.0E-07	7.3E-10
A	Nearest Garde	ESE	2.20	7.9E-07	7.7E-07	6.4E-07	1.4E-09
A	Nearest Garde	SE	2.80	7.2E-07	7.0E-07	5.7E-07	1.2E-09

B275

Atmospheric Diffusion Estimates

Ground Level Releases

January-December 2018

VENTS GROUND LEVEL RELEASES - JAN-DEC 2018
NO DECAY, UNDELETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	
S	5.937E-05	1.953E-05	1.034E-05	5.165E-06	2.090E-06	1.137E-06	7.234E-07	5.064E-07	3.780E-07	2.955E-07	2.390E-07	
SSW	3.676E-05	1.245E-05	6.652E-06	3.327E-06	1.326E-06	7.137E-07	4.502E-07	3.130E-07	2.323E-07	1.807E-07	1.455E-07	
SW	1.763E-05	6.273E-06	3.356E-06	1.665E-06	6.475E-07	3.425E-07	2.131E-07	1.465E-07	1.077E-07	8.305E-08	6.638E-08	
WSW	1.788E-05	6.207E-06	3.355E-06	1.679E-06	6.612E-07	3.529E-07	2.212E-07	1.530E-07	1.130E-07	8.756E-08	7.027E-08	
W	1.672E-05	5.803E-06	3.078E-06	1.525E-06	6.024E-07	3.223E-07	2.024E-07	1.402E-07	1.038E-07	8.052E-08	6.471E-08	
WNW	1.871E-05	6.640E-06	3.580E-06	1.784E-06	6.973E-07	3.702E-07	2.311E-07	1.592E-07	1.173E-07	9.064E-08	7.258E-08	
NW	2.728E-05	9.413E-06	5.053E-06	2.525E-06	1.002E-06	5.379E-07	3.387E-07	2.351E-07	1.742E-07	1.354E-07	1.089E-07	
NNW	5.448E-05	1.764E-05	9.362E-06	4.698E-06	1.923E-06	1.055E-06	6.751E-07	4.749E-07	3.560E-07	2.792E-07	2.266E-07	
N	9.456E-05	3.019E-05	1.609E-05	8.116E-06	3.344E-06	1.842E-06	1.182E-06	8.338E-07	6.263E-07	4.921E-07	3.998E-07	
NNE	6.697E-05	2.093E-05	1.109E-05	5.599E-06	2.322E-06	1.285E-06	8.275E-07	5.850E-07	4.403E-07	3.465E-07	2.820E-07	
NE	3.005E-05	9.561E-06	5.054E-06	2.540E-06	1.045E-06	5.749E-07	3.687E-07	2.598E-07	1.950E-07	1.531E-07	1.244E-07	
ENE	2.739E-05	8.656E-06	4.597E-06	2.319E-06	9.558E-07	5.265E-07	3.380E-07	2.383E-07	1.790E-07	1.406E-07	1.143E-07	
E	2.469E-05	7.875E-06	4.167E-06	2.094E-06	8.606E-07	4.732E-07	3.034E-07	2.137E-07	1.604E-07	1.259E-07	1.022E-07	
ESE	3.583E-05	1.137E-05	6.037E-06	3.042E-06	1.253E-06	6.900E-07	4.429E-07	3.122E-07	2.345E-07	1.842E-07	1.496E-07	
SE	5.431E-05	1.722E-05	9.096E-06	4.572E-06	1.884E-06	1.038E-06	6.665E-07	4.700E-07	3.530E-07	2.774E-07	2.254E-07	
SSE	6.503E-05	2.067E-05	1.083E-05	5.414E-06	2.230E-06	1.228E-06	7.885E-07	5.560E-07	4.176E-07	3.281E-07	2.666E-07	

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
S	1.985E-07	1.034E-07	6.771E-08	3.939E-08	2.694E-08	2.011E-08	1.585E-08	1.298E-08	1.092E-08	9.388E-09	8.201E-09	
SSW	1.204E-07	6.178E-08	4.000E-08	2.292E-08	1.551E-08	1.148E-08	8.995E-09	7.324E-09	6.134E-09	5.249E-09	4.568E-09	
SW	5.456E-08	2.728E-08	1.733E-08	9.667E-09	6.421E-09	4.684E-09	3.625E-09	2.921E-09	2.425E-09	2.059E-09	1.779E-09	
WSW	5.797E-08	2.940E-08	1.888E-08	1.069E-08	7.182E-09	5.285E-09	4.114E-09	3.339E-09	2.785E-09	2.375E-09	2.061E-09	
W	5.345E-08	2.726E-08	1.757E-08	1.001E-08	6.749E-09	4.982E-09	3.893E-09	3.164E-09	2.646E-09	2.261E-09	1.965E-09	
WNW	5.974E-08	3.004E-08	1.917E-08	1.076E-08	7.175E-09	5.252E-09	4.074E-09	3.291E-09	2.736E-09	2.327E-09	2.013E-09	
NW	9.002E-08	4.604E-08	2.973E-08	1.698E-08	1.146E-08	8.463E-09	6.617E-09	5.379E-09	4.499E-09	3.845E-09	3.342E-09	
NNW	1.887E-07	9.933E-08	6.547E-08	3.844E-08	2.645E-08	1.983E-08	1.569E-08	1.289E-08	1.087E-08	9.362E-09	8.193E-09	
N	3.335E-07	1.764E-07	1.166E-07	6.877E-08	4.745E-08	3.565E-08	2.825E-08	2.323E-08	1.962E-08	1.691E-08	1.481E-08	
NNE	2.355E-07	1.251E-07	8.302E-08	4.917E-08	3.403E-08	2.563E-08	2.035E-08	1.676E-08	1.417E-08	1.223E-08	1.072E-08	
NE	1.037E-07	5.473E-08	3.614E-08	2.128E-08	1.467E-08	1.101E-08	8.725E-09	7.171E-09	6.055E-09	5.218E-09	4.570E-09	
ENE	9.528E-08	5.037E-08	3.329E-08	1.963E-08	1.354E-08	1.017E-08	8.063E-09	6.630E-09	5.600E-09	4.827E-09	4.228E-09	
E	8.522E-08	4.496E-08	2.969E-08	1.747E-08	1.204E-08	9.040E-09	7.161E-09	5.886E-09	4.969E-09	4.282E-09	3.750E-09	
ESE	1.248E-07	6.593E-08	4.357E-08	2.567E-08	1.770E-08	1.329E-08	1.053E-08	8.660E-09	7.312E-09	6.302E-09	5.519E-09	
SE	1.890E-07	9.939E-08	6.572E-08	3.875E-08	2.674E-08	2.009E-08	1.593E-08	1.310E-08	1.107E-08	9.541E-09	8.358E-09	
SSE	2.224E-07	1.176E-07	7.781E-08	4.592E-08	3.171E-08	2.384E-08	1.891E-08	1.556E-08	1.315E-08	1.134E-08	9.941E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE											
	0-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50		
S	1.008E-05	2.350E-06	7.470E-07	3.833E-07	2.407E-07	1.087E-07	4.015E-08	2.023E-08	1.302E-08	9.403E-09		
SSW	6.462E-06	1.498E-06	4.656E-07	2.357E-07	1.466E-07	6.513E-08	2.342E-08	1.156E-08	7.348E-09	5.259E-09		
SW	3.252E-06	7.379E-07	2.210E-07	1.094E-07	6.694E-08	2.892E-08	9.927E-09	4.724E-09	2.933E-09	2.064E-09		
WSW	3.244E-06	7.505E-07	2.290E-07	1.147E-07	7.084E-08	3.107E-08	1.095E-08	5.324E-09	3.351E-09	2.380E-09		
W	2.994E-06	6.830E-07	2.095E-07	1.053E-07	6.522E-08	2.877E-08	1.024E-08	5.018E-09	3.175E-09	2.265E-09		
WNW	3.462E-06	7.934E-07	2.394E-07	1.191E-07	7.318E-08	3.181E-08	1.104E-08	5.294E-09	3.303E-09	2.332E-09		
NW	4.898E-06	1.134E-06	3.504E-07	1.768E-07	1.097E-07	4.857E-08	1.736E-08	8.523E-09	5.397E-09	3.852E-09		
NNW	9.129E-06	2.154E-06	6.963E-07	3.607E-07	2.282E-07	1.041E-07	3.912E-08	1.994E-08	1.292E-08	9.377E-09		
N	1.568E-05	3.736E-06	1.219E-06	6.344E-07	4.026E-07	1.847E-07	6.993E-08	3.584E-08	2.329E-08	1.694E-08		
NNE	1.084E-05	2.589E-06	8.524E-07	4.459E-07	2.839E-07	1.309E-07	4.996E-08	2.576E-08	1.680E-08	1.225E-08		
NE	4.938E-06	1.168E-06	3.801E-07	1.976E-07	1.252E-07	5.734E-08	2.164E-08	1.107E-08	7.190E-09	5.226E-09		
ENE	4.487E-06	1.068E-06	3.484E-07	1.813E-07	1.150E-07	5.276E-08	1.996E-08	1.023E-08	6.647E-09	4.834E-09		
E	4.070E-06	9.626E-07	3.128E-07	1.625E-07	1.029E-07	4.712E-08	1.777E-08	9.089E-09	5.901E-09	4.289E-09		
ESE	5.892E-06	1.400E-06	4.565E-07	2.375E-07	1.507E-07	6.907E-08	2.611E-08	1.337E-08	8.682E-09	6.311E-09		
SE	8.891E-06	2.105E-06	6.870E-07	3.576E-07	2.269E-07	1.041E-07	3.941E-08	2.020E-08	1.313E-08	9.555E-09		
SSE	1.061E-05	2.492E-06	8.128E-07	4.231E-07	2.685E-07	1.232E-07	4.669E-08	2.397E-08	1.560E-08	1.136E-08		

B277

VENTS GROUND LEVEL RELEASES - JAN-DEC 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.925E-05	1.946E-05	1.028E-05	5.128E-06	2.067E-06	1.120E-06	7.095E-07	4.946E-07	3.677E-07	2.861E-07	2.305E-07
SSW	3.669E-05	1.240E-05	6.619E-06	3.304E-06	1.312E-06	7.037E-07	4.422E-07	3.063E-07	2.264E-07	1.754E-07	1.407E-07
SW	1.760E-05	6.256E-06	3.342E-06	1.655E-06	6.421E-07	3.386E-07	2.101E-07	1.440E-07	1.055E-07	8.114E-08	6.466E-08
WSW	1.785E-05	6.187E-06	3.339E-06	1.669E-06	6.547E-07	3.482E-07	2.174E-07	1.498E-07	1.103E-07	8.515E-08	6.810E-08
W	1.669E-05	5.784E-06	3.064E-06	1.516E-06	5.967E-07	3.182E-07	1.991E-07	1.375E-07	1.014E-07	7.838E-08	6.276E-08
WNW	1.869E-05	6.622E-06	3.566E-06	1.774E-06	6.917E-07	3.662E-07	2.279E-07	1.566E-07	1.150E-07	8.861E-08	7.074E-08
NW	2.724E-05	9.386E-06	5.032E-06	2.510E-06	9.934E-07	5.315E-07	3.336E-07	2.308E-07	1.705E-07	1.320E-07	1.058E-07
NNW	5.436E-05	1.757E-05	9.305E-06	4.660E-06	1.899E-06	1.037E-06	6.609E-07	4.629E-07	3.454E-07	2.697E-07	2.178E-07
N	9.436E-05	3.007E-05	1.600E-05	8.053E-06	3.304E-06	1.812E-06	1.159E-06	8.136E-07	6.085E-07	4.761E-07	3.852E-07
NNE	6.681E-05	2.084E-05	1.102E-05	5.548E-06	2.290E-06	1.261E-06	8.081E-07	5.685E-07	4.258E-07	3.335E-07	2.700E-07
NE	2.998E-05	9.519E-06	5.021E-06	2.518E-06	1.031E-06	5.647E-07	3.605E-07	2.528E-07	1.888E-07	1.476E-07	1.193E-07
ENE	2.733E-05	8.617E-06	4.567E-06	2.299E-06	9.430E-07	5.170E-07	3.303E-07	2.318E-07	1.733E-07	1.355E-07	1.095E-07
E	2.463E-05	7.840E-06	4.139E-06	2.076E-06	8.491E-07	4.647E-07	2.965E-07	2.079E-07	1.552E-07	1.213E-07	9.802E-08
ESE	3.575E-05	1.133E-05	5.999E-06	3.017E-06	1.237E-06	6.782E-07	4.334E-07	3.042E-07	2.274E-07	1.778E-07	1.438E-07
SE	5.418E-05	1.715E-05	9.037E-06	4.533E-06	1.860E-06	1.020E-06	6.516E-07	4.573E-07	3.419E-07	2.673E-07	2.162E-07
SSE	6.488E-05	2.058E-05	1.076E-05	5.368E-06	2.201E-06	1.206E-06	7.706E-07	5.408E-07	4.042E-07	3.160E-07	2.555E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.906E-07	9.723E-08	6.229E-08	3.474E-08	2.279E-08	1.634E-08	1.239E-08	9.768E-09	7.923E-09	6.569E-09	5.542E-09
SSW	1.160E-07	5.835E-08	3.704E-08	2.040E-08	1.328E-08	9.471E-09	7.150E-09	5.617E-09	4.543E-09	3.757E-09	3.163E-09
SW	5.298E-08	2.608E-08	1.632E-08	8.828E-09	5.689E-09	4.028E-09	3.027E-09	2.371E-09	1.913E-09	1.580E-09	1.329E-09
WSW	5.597E-08	2.788E-08	1.758E-08	9.602E-09	6.224E-09	4.424E-09	3.333E-09	2.614E-09	2.112E-09	1.745E-09	1.468E-09
W	5.166E-08	2.587E-08	1.638E-08	9.001E-09	5.856E-09	4.175E-09	3.153E-09	2.479E-09	2.007E-09	1.661E-09	1.400E-09
WNW	5.806E-08	2.876E-08	1.808E-08	9.849E-09	6.380E-09	4.537E-09	3.423E-09	2.689E-09	2.177E-09	1.803E-09	1.520E-09
NW	8.721E-08	4.386E-08	2.785E-08	1.538E-08	1.004E-08	7.181E-09	5.441E-09	4.290E-09	3.482E-09	2.891E-09	2.443E-09
NNW	1.806E-07	9.296E-08	5.991E-08	3.366E-08	2.218E-08	1.595E-08	1.213E-08	9.575E-09	7.777E-09	6.456E-09	5.452E-09
N	3.199E-07	1.656E-07	1.072E-07	6.067E-08	4.022E-08	2.907E-08	2.219E-08	1.759E-08	1.435E-08	1.195E-08	1.013E-08
NNE	2.244E-07	1.164E-07	7.534E-08	4.255E-08	2.812E-08	2.026E-08	1.541E-08	1.217E-08	9.885E-09	8.204E-09	6.926E-09
NE	9.897E-08	5.101E-08	3.290E-08	1.849E-08	1.218E-08	8.751E-09	6.644E-09	5.240E-09	4.251E-09	3.524E-09	2.973E-09
ENE	9.091E-08	4.692E-08	3.029E-08	1.704E-08	1.123E-08	8.078E-09	6.136E-09	4.842E-09	3.930E-09	3.260E-09	2.750E-09
E	8.131E-08	4.189E-08	2.700E-08	1.517E-08	9.990E-09	7.177E-09	5.448E-09	4.296E-09	3.485E-09	2.889E-09	2.436E-09
ESE	1.194E-07	6.166E-08	3.985E-08	2.247E-08	1.485E-08	1.070E-08	8.147E-09	6.444E-09	5.243E-09	4.358E-09	3.686E-09
SE	1.794E-07	9.265E-08	5.983E-08	3.367E-08	2.221E-08	1.597E-08	1.213E-08	9.576E-09	7.773E-09	6.447E-09	5.441E-09
SSE	2.121E-07	1.095E-07	7.066E-08	3.974E-08	2.618E-08	1.881E-08	1.428E-08	1.126E-08	9.128E-09	7.563E-09	6.376E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	1.003E-05	2.326E-06	7.330E-07	3.729E-07	2.322E-07	1.025E-07	3.555E-08	1.648E-08	9.814E-09	6.590E-09
SSW	6.431E-06	1.484E-06	4.576E-07	2.298E-07	1.418E-07	6.168E-08	2.094E-08	9.560E-09	5.646E-09	3.770E-09
SW	3.240E-06	7.324E-07	2.179E-07	1.072E-07	6.522E-08	2.772E-08	9.098E-09	4.071E-09	2.384E-09	1.586E-09
WSW	3.229E-06	7.438E-07	2.253E-07	1.120E-07	6.866E-08	2.954E-08	9.873E-09	4.468E-09	2.628E-09	1.751E-09
W	2.981E-06	6.772E-07	2.062E-07	1.029E-07	6.328E-08	2.738E-08	9.243E-09	4.215E-09	2.492E-09	1.667E-09
WNW	3.449E-06	7.876E-07	2.362E-07	1.168E-07	7.134E-08	3.053E-08	1.014E-08	4.583E-09	2.703E-09	1.809E-09
NW	4.879E-06	1.125E-06	3.452E-07	1.731E-07	1.067E-07	4.638E-08	1.578E-08	7.247E-09	4.311E-09	2.900E-09
NNW	9.078E-06	2.130E-06	6.821E-07	3.501E-07	2.194E-07	9.776E-08	3.439E-08	1.608E-08	9.619E-09	6.476E-09
N	1.559E-05	3.696E-06	1.195E-06	6.166E-07	3.879E-07	1.740E-07	6.193E-08	2.929E-08	1.767E-08	1.199E-08
NNE	1.077E-05	2.557E-06	8.330E-07	4.314E-07	2.719E-07	1.221E-07	4.343E-08	2.041E-08	1.222E-08	8.229E-09
NE	4.908E-06	1.154E-06	3.718E-07	1.914E-07	1.201E-07	5.362E-08	1.889E-08	8.822E-09	5.265E-09	3.535E-09
ENE	4.459E-06	1.055E-06	3.407E-07	1.756E-07	1.103E-07	4.930E-08	1.740E-08	8.143E-09	4.865E-09	3.270E-09
E	4.044E-06	9.508E-07	3.059E-07	1.573E-07	9.872E-08	4.403E-08	1.550E-08	7.235E-09	4.316E-09	2.898E-09
ESE	5.857E-06	1.384E-06	4.470E-07	2.304E-07	1.448E-07	6.479E-08	2.294E-08	1.078E-08	6.473E-09	4.371E-09
SE	8.837E-06	2.080E-06	6.721E-07	3.465E-07	2.177E-07	9.735E-08	3.439E-08	1.610E-08	9.619E-09	6.467E-09
SSE	1.054E-05	2.462E-06	7.948E-07	4.096E-07	2.574E-07	1.150E-07	4.058E-08	1.896E-08	1.131E-08	7.587E-09

B278

VENTS GROUND LEVEL RELEASES - JAN-DEC 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	5.615E-05	1.782E-05	9.197E-06	4.512E-06	1.770E-06	9.376E-07	5.828E-07	3.995E-07	2.926E-07	2.247E-07	1.788E-07
SSW	3.477E-05	1.135E-05	5.920E-06	2.907E-06	1.123E-06	5.886E-07	3.628E-07	2.471E-07	1.800E-07	1.375E-07	1.090E-07
SW	1.668E-05	5.724E-06	2.987E-06	1.455E-06	5.486E-07	2.827E-07	1.719E-07	1.158E-07	8.355E-08	6.333E-08	4.982E-08
WSW	1.691E-05	5.663E-06	2.986E-06	1.467E-06	5.600E-07	2.911E-07	1.783E-07	1.208E-07	8.758E-08	6.668E-08	5.266E-08
W	1.581E-05	5.294E-06	2.740E-06	1.333E-06	5.102E-07	2.659E-07	1.632E-07	1.108E-07	8.045E-08	6.134E-08	4.850E-08
WNW	1.770E-05	6.059E-06	3.187E-06	1.559E-06	5.908E-07	3.056E-07	1.864E-07	1.259E-07	9.103E-08	6.913E-08	5.447E-08
NW	2.581E-05	8.589E-06	4.498E-06	2.206E-06	8.489E-07	4.439E-07	2.731E-07	1.857E-07	1.351E-07	1.032E-07	8.167E-08
NNW	5.153E-05	1.609E-05	8.328E-06	4.103E-06	1.628E-06	8.693E-07	5.436E-07	3.745E-07	2.754E-07	2.122E-07	1.694E-07
N	8.944E-05	2.754E-05	1.432E-05	7.089E-06	2.830E-06	1.518E-06	9.522E-07	6.577E-07	4.847E-07	3.742E-07	2.991E-07
NNE	6.334E-05	1.909E-05	9.866E-06	4.889E-06	1.965E-06	1.058E-06	6.658E-07	4.609E-07	3.403E-07	2.631E-07	2.106E-07
NE	2.842E-05	8.720E-06	4.495E-06	2.218E-06	8.841E-07	4.736E-07	2.967E-07	2.048E-07	1.508E-07	1.163E-07	9.291E-08
ENE	2.591E-05	7.894E-06	4.089E-06	2.025E-06	8.087E-07	4.337E-07	2.720E-07	1.878E-07	1.384E-07	1.068E-07	8.535E-08
E	2.335E-05	7.182E-06	3.706E-06	1.829E-06	7.281E-07	3.898E-07	2.441E-07	1.684E-07	1.240E-07	9.562E-08	7.637E-08
ESE	3.389E-05	1.037E-05	5.370E-06	2.656E-06	1.060E-06	5.686E-07	3.565E-07	2.462E-07	1.814E-07	1.400E-07	1.118E-07
SE	5.136E-05	1.571E-05	8.091E-06	3.992E-06	1.594E-06	8.552E-07	5.364E-07	3.704E-07	2.729E-07	2.107E-07	1.684E-07
SSE	6.151E-05	1.885E-05	9.631E-06	4.728E-06	1.887E-06	1.012E-06	6.345E-07	4.382E-07	3.228E-07	2.492E-07	1.992E-07

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	1.463E-07	7.163E-08	4.439E-08	2.360E-08	1.496E-08	1.044E-08	7.748E-09	5.995E-09	4.783E-09	3.908E-09	3.252E-09
SSW	8.879E-08	4.284E-08	2.628E-08	1.377E-08	8.648E-09	5.993E-09	4.421E-09	3.404E-09	2.706E-09	2.203E-09	1.828E-09
SW	4.033E-08	1.898E-08	1.144E-08	5.854E-09	3.618E-09	2.478E-09	1.810E-09	1.384E-09	1.093E-09	8.852E-10	7.313E-10
WSW	4.278E-08	2.041E-08	1.242E-08	6.442E-09	4.019E-09	2.772E-09	2.037E-09	1.563E-09	1.239E-09	1.007E-09	8.337E-10
W	3.945E-08	1.893E-08	1.157E-08	6.033E-09	3.778E-09	2.613E-09	1.925E-09	1.481E-09	1.176E-09	9.571E-10	7.939E-10
WNW	4.417E-08	2.092E-08	1.266E-08	6.519E-09	4.047E-09	2.781E-09	2.038E-09	1.561E-09	1.236E-09	1.003E-09	8.298E-10
NW	6.649E-08	3.200E-08	1.960E-08	1.025E-08	6.431E-09	4.454E-09	3.285E-09	2.530E-09	2.011E-09	1.638E-09	1.360E-09
NNW	1.389E-07	6.870E-08	4.286E-08	2.298E-08	1.465E-08	1.027E-08	7.644E-09	5.929E-09	4.741E-09	3.880E-09	3.234E-09
N	2.456E-07	1.221E-07	7.645E-08	4.120E-08	2.637E-08	1.853E-08	1.383E-08	1.075E-08	8.612E-09	7.061E-09	5.896E-09
NNE	1.731E-07	8.639E-08	5.422E-08	2.930E-08	1.877E-08	1.320E-08	9.850E-09	7.656E-09	6.132E-09	5.025E-09	4.193E-09
NE	7.625E-08	3.781E-08	2.363E-08	1.269E-08	8.102E-09	5.682E-09	4.231E-09	3.283E-09	2.625E-09	2.149E-09	1.791E-09
ENE	7.007E-08	3.479E-08	2.176E-08	1.170E-08	7.477E-09	5.248E-09	3.909E-09	3.035E-09	2.428E-09	1.988E-09	1.657E-09
E	6.267E-08	3.106E-08	1.940E-08	1.042E-08	6.650E-09	4.664E-09	3.472E-09	2.694E-09	2.155E-09	1.763E-09	1.470E-09
ESE	9.183E-08	4.559E-08	2.852E-08	1.535E-08	9.807E-09	6.886E-09	5.132E-09	3.986E-09	3.191E-09	2.614E-09	2.181E-09
SE	1.383E-07	6.866E-08	4.296E-08	2.312E-08	1.477E-08	1.037E-08	7.724E-09	5.996E-09	4.798E-09	3.928E-09	3.276E-09
SSE	1.635E-07	8.122E-08	5.083E-08	2.736E-08	1.749E-08	1.228E-08	9.146E-09	7.100E-09	5.680E-09	4.651E-09	3.877E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	9.031E-06	2.009E-06	6.041E-07	2.973E-07	1.804E-07	7.611E-08	2.438E-08	1.057E-08	6.034E-09	3.924E-09
SSW	5.788E-06	1.282E-06	3.768E-07	1.830E-07	1.100E-07	4.569E-08	1.427E-08	6.072E-09	3.428E-09	2.213E-09
SW	2.914E-06	6.318E-07	1.790E-07	8.506E-08	5.031E-08	2.038E-08	6.102E-09	2.515E-09	1.395E-09	8.897E-10
WSW	2.906E-06	6.421E-07	1.854E-07	8.911E-08	5.315E-08	2.183E-08	6.695E-09	2.810E-09	1.575E-09	1.011E-09
W	2.682E-06	5.844E-07	1.696E-07	8.183E-08	4.895E-08	2.022E-08	6.261E-09	2.648E-09	1.492E-09	9.616E-10
WNW	3.102E-06	6.792E-07	1.940E-07	9.264E-08	5.500E-08	2.242E-08	6.785E-09	2.821E-09	1.573E-09	1.008E-09
NW	4.388E-06	9.706E-07	2.837E-07	1.374E-07	8.242E-08	3.415E-08	1.063E-08	4.514E-09	2.548E-09	1.646E-09
NNW	8.176E-06	1.841E-06	5.628E-07	2.797E-07	1.708E-07	7.282E-08	2.370E-08	1.039E-08	5.966E-09	3.896E-09
N	1.404E-05	3.193E-06	9.853E-07	4.920E-07	3.015E-07	1.293E-07	4.244E-08	1.874E-08	1.081E-08	7.089E-09
NNE	9.704E-06	2.212E-06	6.885E-07	3.453E-07	2.123E-07	9.137E-08	3.016E-08	1.335E-08	7.702E-09	5.045E-09
NE	4.422E-06	9.980E-07	3.071E-07	1.531E-07	9.368E-08	4.005E-08	1.308E-08	5.747E-09	3.303E-09	2.158E-09
ENE	4.017E-06	9.123E-07	2.815E-07	1.405E-07	8.605E-08	3.684E-08	1.206E-08	5.307E-09	3.053E-09	1.996E-09
E	3.644E-06	8.223E-07	2.527E-07	1.259E-07	7.700E-08	3.290E-08	1.074E-08	4.717E-09	2.711E-09	1.771E-09
ESE	5.276E-06	1.196E-06	3.689E-07	1.841E-07	1.128E-07	4.828E-08	1.581E-08	6.963E-09	4.010E-09	2.624E-09
SE	7.962E-06	1.799E-06	5.550E-07	2.771E-07	1.698E-07	7.270E-08	2.382E-08	1.048E-08	6.033E-09	3.944E-09
SSE	9.501E-06	2.129E-06	6.566E-07	3.277E-07	2.008E-07	8.600E-08	2.819E-08	1.241E-08	7.144E-09	4.669E-09

B279

VENTS GROUND LEVEL RELEASES - JAN-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M** ⁻²) AT FIXED POINTS BY DOWNWIND SECTORS *****											

DIRECTION	DISTANCES IN MILES										
FROM SITE	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.585E-07	8.740E-08	4.488E-08	2.133E-08	7.663E-09	3.800E-09	2.238E-09	1.465E-09	1.031E-09	7.641E-10	5.888E-10
SSW	1.484E-07	5.020E-08	2.577E-08	1.225E-08	4.401E-09	2.183E-09	1.285E-09	8.415E-10	5.922E-10	4.388E-10	3.382E-10
SW	7.855E-08	2.656E-08	1.364E-08	6.484E-09	2.329E-09	1.155E-09	6.801E-10	4.453E-10	3.133E-10	2.322E-10	1.789E-10
WSW	7.005E-08	2.369E-08	1.216E-08	5.782E-09	2.077E-09	1.030E-09	6.065E-10	3.971E-10	2.794E-10	2.071E-10	1.596E-10
W	7.520E-08	2.543E-08	1.306E-08	6.207E-09	2.230E-09	1.106E-09	6.511E-10	4.263E-10	3.000E-10	2.223E-10	1.713E-10
WNW	9.687E-08	3.276E-08	1.682E-08	7.996E-09	2.872E-09	1.424E-09	8.387E-10	5.492E-10	3.864E-10	2.864E-10	2.207E-10
NW	1.470E-07	4.972E-08	2.553E-08	1.214E-08	4.359E-09	2.162E-09	1.273E-09	8.335E-10	5.865E-10	4.347E-10	3.350E-10
NNW	1.824E-07	6.167E-08	3.166E-08	1.505E-08	5.407E-09	2.682E-09	1.579E-09	1.034E-09	7.275E-10	5.391E-10	4.155E-10
N	3.198E-07	1.081E-07	5.553E-08	2.640E-08	9.482E-09	4.702E-09	2.769E-09	1.813E-09	1.276E-09	9.454E-10	7.286E-10
NNE	1.826E-07	6.174E-08	3.170E-08	1.507E-08	5.413E-09	2.684E-09	1.581E-09	1.035E-09	7.283E-10	5.397E-10	4.159E-10
NE	8.404E-08	2.842E-08	1.459E-08	6.937E-09	2.492E-09	1.236E-09	7.276E-10	4.765E-10	3.353E-10	2.485E-10	1.915E-10
ENE	7.337E-08	2.481E-08	1.274E-08	6.056E-09	2.175E-09	1.079E-09	6.352E-10	4.159E-10	2.927E-10	2.169E-10	1.671E-10
E	6.232E-08	2.107E-08	1.082E-08	5.144E-09	1.848E-09	9.164E-10	5.396E-10	3.533E-10	2.486E-10	1.842E-10	1.420E-10
ESE	1.060E-07	3.585E-08	1.841E-08	8.751E-09	3.144E-09	1.559E-09	9.179E-10	6.011E-10	4.229E-10	3.134E-10	2.415E-10
SE	1.807E-07	6.112E-08	3.138E-08	1.492E-08	5.359E-09	2.658E-09	1.565E-09	1.025E-09	7.210E-10	5.344E-10	4.118E-10
SSE	2.502E-07	8.461E-08	4.344E-08	2.065E-08	7.419E-09	3.679E-09	2.166E-09	1.418E-09	9.981E-10	7.397E-10	5.700E-10
DIRECTION	DISTANCES IN MILES										
FROM SITE	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	4.678E-10	2.078E-10	1.259E-10	6.363E-11	3.851E-11	2.582E-11	1.850E-11	1.389E-11	1.080E-11	8.629E-12	7.043E-12
SSW	2.687E-10	1.194E-10	7.230E-11	3.654E-11	2.212E-11	1.483E-11	1.063E-11	7.979E-12	6.204E-12	4.956E-12	4.045E-12
SW	1.422E-10	6.315E-11	3.826E-11	1.934E-11	1.170E-11	7.847E-12	5.623E-12	4.222E-12	3.283E-12	2.622E-12	2.140E-12
WSW	1.268E-10	5.632E-11	3.412E-11	1.724E-11	1.044E-11	6.998E-12	5.014E-12	3.765E-12	2.927E-12	2.338E-12	1.909E-12
W	1.361E-10	6.046E-11	3.662E-11	1.851E-11	1.120E-11	7.512E-12	5.383E-12	4.042E-12	3.143E-12	2.510E-12	2.049E-12
WNW	1.753E-10	7.788E-11	4.718E-11	2.385E-11	1.443E-11	9.677E-12	6.934E-12	5.207E-12	4.048E-12	3.234E-12	2.639E-12
NW	2.661E-10	1.182E-10	7.161E-11	3.619E-11	2.191E-11	1.469E-11	1.052E-11	7.903E-12	6.145E-12	4.908E-12	4.006E-12
NNW	3.301E-10	1.466E-10	8.892E-11	4.489E-11	2.717E-11	1.822E-11	1.305E-11	9.802E-12	7.622E-12	6.088E-12	4.969E-12
N	5.788E-10	2.571E-10	1.558E-10	7.873E-11	4.765E-11	3.195E-11	2.289E-11	1.719E-11	1.337E-11	1.068E-11	8.714E-12
NNE	3.304E-10	1.468E-10	8.892E-11	4.494E-11	2.720E-11	1.824E-11	1.307E-11	9.813E-12	7.630E-12	6.095E-12	4.975E-12
NE	1.521E-10	6.757E-11	4.093E-11	2.069E-11	1.252E-11	8.396E-12	6.016E-12	4.517E-12	3.512E-12	2.806E-12	2.290E-12
ENE	1.328E-10	5.899E-11	3.573E-11	1.806E-11	1.093E-11	7.329E-12	5.252E-12	3.944E-12	3.066E-12	2.449E-12	1.999E-12
E	1.128E-10	5.011E-11	3.035E-11	1.534E-11	9.286E-12	6.226E-12	4.461E-12	3.350E-12	2.605E-12	2.081E-12	1.699E-12
ESE	1.919E-10	8.524E-11	5.164E-11	2.610E-11	1.580E-11	1.059E-11	7.589E-12	5.699E-12	4.431E-12	3.539E-12	2.889E-12
SE	3.271E-10	1.453E-10	8.803E-11	4.450E-11	2.693E-11	1.806E-11	1.294E-11	9.715E-12	7.554E-12	6.034E-12	4.925E-12
SSE	4.528E-10	2.012E-10	1.219E-10	6.159E-11	3.728E-11	2.500E-11	1.791E-11	1.345E-11	1.046E-11	8.353E-12	6.818E-12

B280

***** RELATIVE DEPOSITION PER UNIT AREA (M** ⁻²) BY DOWNWIND SECTORS *****										

DIRECTION	SEGMENT BOUNDARIES IN MILES									
FROM SITE	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.386E-08	8.985E-09	2.346E-09	1.053E-09	5.959E-10	2.292E-10	6.630E-11	2.628E-11	1.403E-11	8.685E-12
SSW	2.519E-08	5.160E-09	1.347E-09	6.050E-10	3.423E-10	1.316E-10	3.808E-11	1.509E-11	8.059E-12	4.988E-12
SW	1.333E-08	2.730E-09	7.128E-10	3.201E-10	1.811E-10	6.965E-11	2.015E-11	7.986E-12	4.264E-12	2.639E-12
WSW	1.189E-08	2.435E-09	6.357E-10	2.855E-10	1.615E-10	6.211E-11	1.797E-11	7.121E-12	3.803E-12	2.354E-12
W	1.276E-08	2.614E-09	6.824E-10	3.065E-10	1.734E-10	6.668E-11	1.929E-11	7.645E-12	4.083E-12	2.527E-12
WNW	1.644E-08	3.367E-09	8.790E-10	3.948E-10	2.233E-10	8.589E-11	2.485E-11	9.848E-12	5.259E-12	3.255E-12
NW	2.495E-08	5.111E-09	1.334E-09	5.992E-10	3.390E-10	1.304E-10	3.771E-11	1.495E-11	7.982E-12	4.940E-12
NNW	3.095E-08	6.339E-09	1.655E-09	7.433E-10	4.205E-10	1.617E-10	4.678E-11	1.854E-11	9.901E-12	6.128E-12
N	5.427E-08	1.112E-08	2.902E-09	1.303E-09	7.374E-10	2.836E-10	8.203E-11	3.251E-11	1.736E-11	1.075E-11
NNE	3.098E-08	6.346E-09	1.657E-09	7.441E-10	4.209E-10	1.619E-10	4.683E-11	1.856E-11	9.912E-12	6.135E-12
NE	1.426E-08	2.921E-09	7.627E-10	3.425E-10	1.938E-10	7.452E-11	2.156E-11	8.544E-12	4.563E-12	2.824E-12
ENE	1.245E-08	2.550E-09	6.658E-10	2.990E-10	1.692E-10	6.505E-11	1.882E-11	7.459E-12	3.983E-12	2.465E-12
E	1.058E-08	2.166E-09	5.656E-10	2.540E-10	1.437E-10	5.526E-11	1.599E-11	6.336E-12	3.383E-12	2.094E-12
ESE	1.799E-08	3.685E-09	9.621E-10	4.321E-10	2.445E-10	9.401E-11	2.720E-11	1.078E-11	5.756E-12	3.563E-12
SE	3.067E-08	6.283E-09	1.640E-09	7.367E-10	4.167E-10	1.603E-10	4.636E-11	1.838E-11	9.813E-12	6.074E-12
SSE	4.246E-08	8.698E-09	2.271E-09	1.020E-09	5.769E-10	2.218E-10	6.418E-11	2.544E-11	1.358E-11	8.408E-12

VENTS GROUND LEVEL RELEASES - JAN-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION	DIRECTION FROM SITE	DIST. (MI)	X/Q	X/Q	X/Q	D/Q
				(SEC/M3) NO DECAY	(SEC/M3) 2.26 DAY DECAY	(SEC/M3) 8.0 DAY DECAY	(PER SQ.METER) DECAY
				UNDEPLETED	UNDEPLETED	DEPLETED	
A	Site Boundary	S	.80	8.9E-06	8.8E-06	7.9E-06	3.8E-08
A	Site Boundary	SSW	.82	5.3E-06	5.3E-06	4.7E-06	2.0E-08
A	Site Boundary	SW	.97	1.8E-06	1.8E-06	1.5E-06	6.9E-09
A	Site Boundary	WSW	.93	2.0E-06	2.0E-06	1.8E-06	7.1E-09
A	Site Boundary	W	.91	1.9E-06	1.9E-06	1.7E-06	7.9E-09
A	Site Boundary	WNW	.94	2.1E-06	2.1E-06	1.8E-06	9.4E-09
A	Site Boundary	NW	.81	4.2E-06	4.2E-06	3.7E-06	2.1E-08
A	Site Boundary	NNW	.69	1.1E-05	1.1E-05	9.6E-06	3.7E-08
A	Site Boundary	N	.67	1.9E-05	1.9E-05	1.7E-05	6.6E-08
A	Site Boundary	NNE	.60	1.6E-05	1.6E-05	1.4E-05	4.6E-08
A	Site Boundary	NE	.62	6.7E-06	6.7E-06	6.0E-06	2.0E-08
A	Site Boundary	ENE	.59	6.7E-06	6.7E-06	6.0E-06	1.9E-08
A	Site Boundary	E	.53	7.3E-06	7.2E-06	6.6E-06	1.9E-08
A	Site Boundary	ESE	.54	1.0E-05	1.0E-05	9.2E-06	3.2E-08
A	Site Boundary	SE	.65	1.1E-05	1.1E-05	1.0E-05	4.0E-08
A	Site Boundary	SSE	.81	9.0E-06	8.9E-06	7.9E-06	3.5E-08
A	Nearest Res	SSW	3.00	3.1E-07	3.1E-07	2.5E-07	8.4E-10
A	Nearest Res	SW	1.00	1.7E-06	1.7E-06	1.5E-06	6.5E-09
A	Nearest Res	WSW	1.90	3.9E-07	3.9E-07	3.3E-07	1.2E-09
A	Nearest Res	W	1.00	1.5E-06	1.5E-06	1.3E-06	6.2E-09
A	Nearest Res	WNW	1.70	5.3E-07	5.2E-07	4.4E-07	2.1E-09
A	Nearest Res	NW	.90	3.3E-06	3.2E-06	2.9E-06	1.6E-08
A	Nearest Res	NNW	1.90	1.2E-06	1.2E-06	9.7E-07	3.0E-09
A	Nearest Res	N	2.90	8.9E-07	8.7E-07	7.0E-07	2.0E-09
A	Nearest Res	NNE	1.70	1.8E-06	1.8E-06	1.5E-06	4.0E-09
A	Nearest Res	ENE	1.70	7.3E-07	7.2E-07	6.1E-07	1.6E-09
A	Nearest Res	E	2.20	3.9E-07	3.8E-07	3.2E-07	7.3E-10
A	Nearest Res	SE	2.80	5.4E-07	5.2E-07	4.3E-07	1.2E-09
A	Nearest Cow	NNW	3.50	3.6E-07	3.5E-07	2.8E-07	7.3E-10
A	Nearest Garde	SSW	3.00	3.1E-07	3.1E-07	2.5E-07	8.4E-10
A	Nearest Garde	SW	2.20	2.8E-07	2.8E-07	2.3E-07	9.2E-10
A	Nearest Garde	WNW	1.70	5.3E-07	5.2E-07	4.4E-07	2.1E-09
A	Nearest Garde	NW	.90	3.3E-06	3.2E-06	2.9E-06	1.6E-08
A	Nearest Garde	NNW	2.80	5.4E-07	5.3E-07	4.3E-07	1.2E-09
A	Nearest Garde	E	2.20	3.9E-07	3.8E-07	3.2E-07	7.3E-10
A	Nearest Garde	ESE	2.20	5.7E-07	5.6E-07	4.7E-07	1.2E-09
A	Nearest Garde	SE	2.80	5.4E-07	5.2E-07	4.3E-07	1.2E-09

B281

Atmospheric Diffusion Estimates

Elevated Releases

January-March 2018

ERP ELEVATED STACK RELEASES - JAN-MAR 2018
NO DECAY, UNDEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)		DISTANCE IN MILES FROM THE SITE										
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	
S	2.170E-10	1.559E-08	5.889E-08	8.823E-08	9.670E-08	8.217E-08	6.684E-08	5.455E-08	4.518E-08	4.933E-08	5.099E-08	
SSW	9.747E-16	8.741E-10	1.402E-08	2.687E-08	3.310E-08	2.914E-08	2.412E-08	2.518E-08	2.472E-08	2.115E-08	1.839E-08	
SW	7.205E-16	8.132E-10	3.222E-08	8.444E-08	1.299E-07	8.701E-08	6.236E-08	4.719E-08	3.722E-08	3.031E-08	2.532E-08	
WSW	4.220E-16	5.213E-10	2.623E-08	7.570E-08	1.340E-07	8.590E-08	6.032E-08	4.519E-08	3.548E-08	2.884E-08	2.409E-08	
W	1.043E-09	6.468E-08	2.095E-07	2.411E-07	1.955E-07	1.174E-07	7.864E-08	5.673E-08	4.316E-08	3.416E-08	2.786E-08	
WNN	1.582E-10	1.431E-08	1.409E-07	2.624E-07	3.229E-07	1.960E-07	1.325E-07	1.005E-07	7.973E-08	6.314E-08	5.156E-08	
NW	1.253E-15	1.179E-09	6.690E-08	1.945E-07	3.088E-07	1.786E-07	1.169E-07	8.419E-08	6.397E-08	5.001E-08	4.039E-08	
NNW	6.782E-11	4.065E-09	2.651E-08	5.891E-08	1.030E-07	1.074E-07	1.025E-07	9.260E-08	8.279E-08	6.537E-08	5.328E-08	
N	1.509E-15	9.877E-10	1.468E-08	2.845E-08	3.815E-08	3.743E-08	3.363E-08	2.897E-08	2.507E-08	2.189E-08	1.932E-08	
NNE	8.705E-16	6.759E-10	1.104E-08	2.267E-08	3.230E-08	3.166E-08	2.835E-08	2.485E-08	2.178E-08	1.922E-08	1.711E-08	
NE	9.326E-16	8.070E-10	1.288E-08	2.499E-08	3.193E-08	2.902E-08	2.463E-08	2.074E-08	1.761E-08	1.514E-08	1.319E-08	
ENE	5.251E-16	6.396E-10	1.174E-08	2.406E-08	3.196E-08	2.937E-08	2.501E-08	2.106E-08	1.785E-08	1.530E-08	1.328E-08	
E	3.608E-16	4.317E-10	8.200E-09	1.754E-08	2.472E-08	2.349E-08	2.043E-08	1.747E-08	1.499E-08	1.298E-08	1.137E-08	
ESE	6.760E-16	5.903E-10	9.939E-09	2.002E-08	2.709E-08	2.564E-08	2.242E-08	1.931E-08	1.669E-08	1.456E-08	1.283E-08	
SE	2.603E-15	2.059E-09	3.205E-08	6.117E-08	7.592E-08	6.740E-08	5.614E-08	4.654E-08	3.898E-08	3.310E-08	2.851E-08	
SSE	2.157E-11	5.204E-09	6.319E-08	1.154E-07	1.372E-07	1.187E-07	9.717E-08	7.943E-08	6.576E-08	5.530E-08	4.722E-08	

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)		DISTANCE IN MILES FROM THE SITE										
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
S	4.451E-08	2.676E-08	1.706E-08	9.525E-09	6.438E-09	4.739E-09	3.651E-09	2.931E-09	2.434E-09	2.065E-09	1.779E-09	
SSW	1.662E-08	1.145E-08	7.337E-09	4.132E-09	2.850E-09	2.101E-09	1.625E-09	1.309E-09	1.086E-09	9.219E-10	7.965E-10	
SW	2.318E-08	1.785E-08	1.176E-08	6.855E-09	4.929E-09	3.788E-09	3.047E-09	2.475E-09	2.068E-09	1.766E-09	1.534E-09	
WSW	2.176E-08	1.603E-08	1.213E-08	7.987E-09	5.442E-09	4.060E-09	3.196E-09	2.613E-09	2.196E-09	1.885E-09	1.645E-09	
W	2.328E-08	1.226E-08	8.427E-09	5.247E-09	3.768E-09	2.762E-09	2.141E-09	1.728E-09	1.437E-09	1.221E-09	1.057E-09	
WNN	4.359E-08	2.403E-08	1.617E-08	9.691E-09	6.598E-09	4.900E-09	3.855E-09	3.138E-09	2.619E-09	2.230E-09	1.932E-09	
NW	3.368E-08	1.758E-08	1.143E-08	6.500E-09	4.293E-09	3.118E-09	2.416E-09	1.942E-09	1.606E-09	1.359E-09	1.171E-09	
NNW	4.534E-08	2.539E-08	1.649E-08	9.466E-09	6.404E-09	4.738E-09	3.733E-09	3.051E-09	2.580E-09	2.213E-09	1.921E-09	
N	1.726E-08	1.129E-08	9.728E-09	6.185E-09	4.042E-09	5.886E-09	4.646E-09	3.793E-09	3.176E-09	2.717E-09	2.364E-09	
NNE	1.991E-08	3.673E-08	2.405E-08	1.398E-08	9.553E-09	7.123E-09	5.611E-09	4.590E-09	3.860E-09	3.314E-09	2.893E-09	
NE	1.424E-08	2.270E-08	1.481E-08	8.580E-09	5.850E-09	4.357E-09	3.472E-09	2.861E-09	2.418E-09	2.074E-09	1.809E-09	
ENE	1.361E-08	1.776E-08	1.179E-08	6.957E-09	4.792E-09	3.593E-09	3.014E-09	2.569E-09	2.158E-09	1.851E-09	1.615E-09	
E	1.205E-08	1.682E-08	1.113E-08	6.541E-09	4.489E-09	3.355E-09	2.647E-09	2.167E-09	1.886E-09	1.659E-09	1.446E-09	
ESE	1.356E-08	1.694E-08	1.127E-08	6.641E-09	4.562E-09	3.409E-09	2.688E-09	2.199E-09	1.848E-09	1.586E-09	1.383E-09	
SE	2.486E-08	1.488E-08	1.120E-08	7.766E-09	5.579E-09	4.313E-09	3.494E-09	2.921E-09	2.436E-09	2.076E-09	1.799E-09	
SSE	4.702E-08	3.898E-08	2.462E-08	1.360E-08	8.957E-09	6.490E-09	4.994E-09	4.004E-09	3.309E-09	2.798E-09	2.409E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	6.231E-08	8.836E-08	6.601E-08	4.944E-08	4.810E-08	2.639E-08	9.827E-09	4.757E-09	2.947E-09	2.068E-09	
SSW	1.681E-08	2.996E-08	2.588E-08	2.349E-08	1.855E-08	1.077E-08	4.274E-09	2.110E-09	1.314E-09	9.242E-10	
SW	4.845E-08	1.007E-07	6.287E-08	3.744E-08	2.601E-08	1.633E-08	7.088E-09	3.796E-09	2.484E-09	1.770E-09	
WSW	4.250E-08	9.965E-08	6.109E-08	3.573E-08	2.464E-08	1.557E-08	7.780E-09	4.085E-09	2.621E-09	1.888E-09	
W	1.914E-07	1.709E-07	8.022E-08	4.361E-08	2.803E-08	1.301E-08	5.296E-09	2.782E-09	1.735E-09	1.224E-09	
WNN	1.668E-07	2.531E-07	1.367E-07	7.936E-08	5.204E-08	2.488E-08	9.757E-09	4.935E-09	3.145E-09	2.235E-09	
NW	1.090E-07	2.256E-07	1.203E-07	6.443E-08	4.075E-08	1.842E-08	6.614E-09	3.150E-09	1.950E-09	1.363E-09	
NNW	3.592E-08	9.516E-08	9.983E-08	7.896E-08	5.392E-08	2.587E-08	9.665E-09	4.780E-09	3.066E-09	2.214E-09	
N	1.776E-08	3.568E-08	3.278E-08	2.497E-08	1.932E-08	1.192E-08	8.020E-09	5.698E-09	3.801E-09	2.722E-09	
NNE	1.390E-08	2.988E-08	2.783E-08	2.168E-08	1.877E-08	2.735E-08	1.425E-08	7.166E-09	4.604E-09	3.320E-09	
NE	1.558E-08	2.910E-08	2.424E-08	1.756E-08	1.416E-08	1.731E-08	8.751E-09	4.401E-09	2.867E-09	2.078E-09	
ENE	1.475E-08	2.905E-08	2.459E-08	1.779E-08	1.400E-08	1.418E-08	7.069E-09	3.681E-09	2.539E-09	1.854E-09	
E	1.063E-08	2.258E-08	2.006E-08	1.493E-08	1.210E-08	1.323E-08	6.649E-09	3.374E-09	2.197E-09	1.647E-09	
ESE	1.234E-08	2.488E-08	2.204E-08	1.663E-08	1.362E-08	1.367E-08	6.745E-09	3.428E-09	2.205E-09	1.589E-09	
SE	3.833E-08	6.885E-08	5.530E-08	3.890E-08	2.852E-08	1.547E-08	7.558E-09	4.323E-09	2.900E-09	2.080E-09	
SSE	7.352E-08	1.242E-07	9.583E-08	6.568E-08	4.954E-08	3.438E-08	1.399E-08	6.549E-09	4.022E-09	2.805E-09	

B283

ERP ELEVATED STACK RELEASES - JAN-MAR 2018
2.260 DAY DECAY, UNDEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE												
	SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000
S	2.170E-10	1.558E-08	5.884E-08	8.814E-08	9.654E-08	8.198E-08	6.664E-08	5.435E-08	4.498E-08	4.907E-08	5.066E-08	SSW	9.744E-16	8.736E-10	1.401E-08	2.683E-08	3.304E-08	2.906E-08	2.404E-08	2.507E-08	2.459E-08	2.102E-08	1.827E-08
SSW	7.203E-16	8.126E-10	3.218E-08	8.427E-08	1.294E-07	8.654E-08	6.191E-08	4.676E-08	3.681E-08	2.992E-08	2.495E-08	SW	4.219E-16	5.209E-10	2.620E-08	7.556E-08	1.336E-07	8.558E-08	6.004E-08	4.493E-08	3.524E-08	2.862E-08	2.388E-08
SW	1.042E-09	6.464E-08	2.093E-07	2.406E-07	1.949E-07	1.170E-07	7.827E-08	5.640E-08	4.287E-08	3.389E-08	2.762E-08	WSW	1.582E-10	1.431E-08	1.408E-07	2.620E-07	3.219E-07	1.951E-07	1.317E-07	9.978E-08	7.899E-08	6.246E-08	5.092E-08
WSW	1.582E-10	1.431E-08	1.408E-07	2.620E-07	3.219E-07	1.951E-07	1.317E-07	9.978E-08	7.899E-08	6.246E-08	5.092E-08	W	1.252E-15	1.178E-09	6.683E-08	1.942E-07	3.080E-07	1.779E-07	1.163E-07	8.370E-08	6.353E-08	4.961E-08	4.003E-08
W	6.781E-11	4.064E-09	2.648E-08	5.882E-08	1.028E-07	1.070E-07	1.019E-07	9.193E-08	8.202E-08	6.467E-08	5.262E-08	NNW	1.508E-15	9.873E-10	1.467E-08	2.842E-08	3.809E-08	3.735E-08	3.354E-08	2.887E-08	2.497E-08	2.179E-08	1.922E-08
NNW	6.781E-11	4.064E-09	2.648E-08	5.882E-08	1.028E-07	1.070E-07	1.019E-07	9.193E-08	8.202E-08	6.467E-08	5.262E-08	N	8.704E-16	6.755E-10	1.103E-08	2.263E-08	3.221E-08	3.154E-08	2.821E-08	2.470E-08	2.163E-08	1.906E-08	1.695E-08
N	8.704E-16	6.755E-10	1.103E-08	2.263E-08	3.221E-08	3.154E-08	2.821E-08	2.470E-08	2.163E-08	1.906E-08	1.695E-08	NE	9.324E-16	8.065E-10	1.287E-08	2.496E-08	3.187E-08	2.894E-08	2.455E-08	2.066E-08	1.754E-08	1.507E-08	1.311E-08
NE	9.324E-16	8.065E-10	1.287E-08	2.496E-08	3.187E-08	2.894E-08	2.455E-08	2.066E-08	1.754E-08	1.507E-08	1.311E-08	ENE	5.250E-16	6.390E-10	1.172E-08	2.402E-08	3.186E-08	2.924E-08	2.487E-08	2.092E-08	1.771E-08	1.516E-08	1.314E-08
ENE	5.250E-16	6.390E-10	1.172E-08	2.402E-08	3.186E-08	2.924E-08	2.487E-08	2.092E-08	1.771E-08	1.516E-08	1.314E-08	E	3.607E-16	4.314E-10	8.188E-09	1.750E-08	2.463E-08	2.338E-08	2.031E-08	1.734E-08	1.486E-08	1.285E-08	1.124E-08
E	3.607E-16	4.314E-10	8.188E-09	1.750E-08	2.463E-08	2.338E-08	2.031E-08	1.734E-08	1.486E-08	1.285E-08	1.124E-08	ESE	6.759E-16	5.899E-10	9.927E-09	1.999E-08	2.702E-08	2.554E-08	2.231E-08	1.919E-08	1.657E-08	1.443E-08	1.271E-08
ESE	6.759E-16	5.899E-10	9.927E-09	1.999E-08	2.702E-08	2.554E-08	2.231E-08	1.919E-08	1.657E-08	1.443E-08	1.271E-08	SE	2.603E-15	2.058E-09	3.202E-08	6.109E-08	7.576E-08	6.721E-08	5.594E-08	4.633E-08	3.877E-08	3.289E-08	2.830E-08
SE	2.603E-15	2.058E-09	3.202E-08	6.109E-08	7.576E-08	6.721E-08	5.594E-08	4.633E-08	3.877E-08	3.289E-08	2.830E-08	SSE	2.157E-11	5.201E-09	6.315E-08	1.153E-07	1.370E-07	1.185E-07	9.690E-08	7.916E-08	6.550E-08	5.505E-08	4.697E-08
SSE	2.157E-11	5.201E-09	6.315E-08	1.153E-07	1.370E-07	1.185E-07	9.690E-08	7.916E-08	6.550E-08	5.505E-08	4.697E-08												

ANNUAL AVERAGE	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE												
	SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000
S	4.418E-08	2.645E-08	1.679E-08	9.300E-09	6.234E-09	4.550E-09	3.477E-09	2.768E-09	2.279E-09	1.917E-09	1.638E-09	SSW	1.650E-08	1.132E-08	7.224E-09	4.036E-09	2.762E-09	2.020E-09	1.550E-09	1.239E-09	1.020E-09	8.589E-10	7.362E-10
SSW	1.650E-08	1.132E-08	7.224E-09	4.036E-09	2.762E-09	2.020E-09	1.550E-09	1.239E-09	1.020E-09	8.589E-10	7.362E-10	SW	2.278E-08	1.732E-08	1.129E-08	6.452E-09	4.549E-09	3.431E-09	2.709E-09	2.161E-09	1.775E-09	1.491E-09	1.314E-09
SW	2.278E-08	1.732E-08	1.129E-08	6.452E-09	4.549E-09	3.431E-09	2.709E-09	2.161E-09	1.775E-09	1.491E-09	1.314E-09	WSW	2.155E-08	1.576E-08	1.184E-08	7.692E-09	5.181E-09	3.811E-09	2.962E-09	2.390E-09	1.983E-09	1.680E-09	1.447E-09
WSW	2.155E-08	1.576E-08	1.184E-08	7.692E-09	5.181E-09	3.811E-09	2.962E-09	2.390E-09	1.983E-09	1.680E-09	1.447E-09	W	2.306E-08	1.208E-08	8.270E-09	5.104E-09	3.634E-09	2.640E-09	2.029E-09	1.624E-09	1.338E-09	1.128E-09	9.681E-10
W	2.306E-08	1.208E-08	8.270E-09	5.104E-09	3.634E-09	2.640E-09	2.029E-09	1.624E-09	1.338E-09	1.128E-09	9.681E-10	NNW	4.297E-08	2.349E-08	1.568E-08	9.242E-09	6.193E-09	4.529E-09	3.510E-09	2.815E-09	2.315E-09	1.945E-09	1.663E-09
NNW	4.297E-08	2.349E-08	1.568E-08	9.242E-09	6.193E-09	4.529E-09	3.510E-09	2.815E-09	2.315E-09	1.945E-09	1.663E-09	NW	3.334E-08	1.732E-08	1.120E-08	6.305E-09	4.123E-09	2.964E-09	2.274E-09	1.810E-09	1.482E-09	1.242E-09	1.059E-09
NW	3.334E-08	1.732E-08	1.120E-08	6.305E-09	4.123E-09	2.964E-09	2.274E-09	1.810E-09	1.482E-09	1.242E-09	1.059E-09	N	4.471E-08	2.483E-08	1.600E-08	9.049E-09	6.034E-09	4.401E-09	3.420E-09	2.758E-09	2.301E-09	1.948E-09	1.671E-09
N	4.471E-08	2.483E-08	1.600E-08	9.049E-09	6.034E-09	4.401E-09	3.420E-09	2.758E-09	2.301E-09	1.948E-09	1.671E-09	NNE	1.716E-08	1.120E-08	9.621E-09	8.039E-09	6.847E-09	5.662E-09	4.432E-09	3.589E-09	2.981E-09	2.530E-09	2.184E-09
NNE	1.716E-08	1.120E-08	9.621E-09	8.039E-09	6.847E-09	5.662E-09	4.432E-09	3.589E-09	2.981E-09	2.530E-09	2.184E-09	NE	1.968E-08	3.580E-08	2.324E-08	1.330E-08	8.944E-09	6.571E-09	5.103E-09	4.118E-09	3.418E-09	2.898E-09	2.500E-09
NE	1.968E-08	3.580E-08	2.324E-08	1.330E-08	8.944E-09	6.571E-09	5.103E-09	4.118E-09	3.418E-09	2.898E-09	2.500E-09	ENE	1.416E-08	2.249E-08	1.463E-08	8.421E-09	5.705E-09	4.222E-09	3.343E-09	2.737E-09	2.299E-09	1.959E-09	1.698E-09
ENE	1.416E-08	2.249E-08	1.463E-08	8.421E-09	5.705E-09	4.222E-09	3.343E-09	2.737E-09	2.299E-09	1.959E-09	1.698E-09	E	1.345E-08	1.738E-08	1.145E-08	6.652E-09	4.511E-09	3.329E-09	2.743E-09	2.298E-09	1.899E-09	1.603E-09	1.376E-09
E	1.345E-08	1.738E-08	1.145E-08	6.652E-09	4.511E-09	3.329E-09	2.743E-09	2.298E-09	1.899E-09	1.603E-09	1.376E-09	ESE	1.189E-08	1.631E-08	1.068E-08	6.144E-09	4.131E-09	3.026E-09	2.341E-09	1.880E-09	1.604E-09	1.384E-09	1.184E-09
ESE	1.189E-08	1.631E-08	1.068E-08	6.144E-09	4.131E-09	3.026E-09	2.341E-09	1.880E-09	1.604E-09	1.384E-09	1.184E-09	SE	1.340E-08	1.651E-08	1.088E-08	6.298E-09	4.251E-09	3.123E-09	2.423E-09	1.951E-09	1.615E-09	1.366E-09	1.174E-09
SE	1.340E-08	1.651E-08	1.088E-08	6.298E-09	4.251E-09	3.123E-09	2.423E-09	1.951E-09	1.615E-09	1.366E-09	1.174E-09	SSE	2.466E-08	1.468E-08	1.096E-08	7.434E-09	5.231E-09	3.960E-09	3.141E-09	2.573E-09	2.109E-09	1.768E-09	1.508E-09
SSE	2.466E-08	1.468E-08	1.096E-08	7.434E-09	5.231E-09	3.960E-09	3.141E-09	2.573E-09	2.109E-09	1.768E-09	1.508E-09												

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	6.225E-08	8.820E-08	6.581E-08	4.921E-08	4.779E-08	2.610E-08	9.603E-09	4.570E-09	2.784E-09	1.921E-09
SSW	1.679E-08	2.989E-08	2.579E-08	2.337E-08	1.843E-08	1.065E-08	4.178E-09	2.030E-09	1.244E-09	8.612E-10
SW	4.836E-08	1.003E-07	6.241E-08	3.703E-08	2.562E-08	1.585E-08	6.682E-09	3.440E-09	2.171E-09	1.495E-09
WSW	4.243E-08	9.936E-08	6.081E-08	3.549E-08	2.442E-08	1.531E-08	7.499E-09	3.836E-09	2.398E-09	1.684E-09
W	1.911E-07	1.705E-07	7.985E-08	4.332E-08	2.779E-08	1.283E-08	5.154E-09	2.661E-09	1.631E-09	1.131E-09
NNW	1.665E-07	2.522E-07	1.359E-07	7.863E-08	5.140E-08	2.435E-08	9.317E-09	4.565E-09	2.823E-09	1.950E-09
NW	1.089E-07	2.249E-07	1.197E-07	6.399E-08	4.039E-08	1.816E-08	6.422E-09	2.997E-09	1.818E-09	1.245E-09
NNW	3.587E-08	9.487E-08	9.928E-08	7.824E-08	5.326E-08	2.532E-08	9.253E-09	4.444E-09	2.773E-09	1.950E-09
N	1.774E-08	3.561E-08	3.269E-08	2.487E-08	1.922E-08	1.182E-08	7.861E-09	5.486E-09	3.598E-09	2.535E-09
NNE	1.388E-08	2.979E-08	2.770E-08	2.153E-08	1.859E-08	2.664E-08	1.357E-08	6.616E-09	4.133E-09	2.905E-09
NE	1.556E-08	2.903E-08	2.417E-08	1.749E-08	1.408E-08	1.714E-08	8.593E-09	4.266E-09	2.744E-09	1.963E-09
ENE	1.472E-08	2.895E-08	2.446E-08	1.765E-08	1.385E-08	1.387E-08	6.766E-09	3.410E-09	2.273E-09	1.607E-09
E	1.060E-08	2.249E-08	1.994E-08	1.480E-08	1.196E-08	1.283E-08	6.258E-09	3.046E-09	1.906E-09	1.375E-09
ESE	1.232E-08	2.480E-08	2.193E-08	1.651E-08	1.348E-08	1.331E-08	6.405E-09	3.144E-09	1.958E-09	1.369E-09
SE	3.828E-08	6.870E-08	5.510E-08	3.869E-08	2.831E-08	1.524E-08	7.238E-09	3.971E-09	2.559E-09	1.773E-09
SSE	7.346E-08	1.239E-07	9.556E-08	6.542E-08	4.928E-08	3.384E-08	1.350E-08	6.161E-09	3.689E-09	2.512E-09

B284

ERP ELEVATED STACK RELEASES - JAN-MAR 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)			DISTANCE IN MILES FROM THE SITE										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500			
S	2.170E-10	1.547E-08	5.843E-08	8.775E-08	9.551E-08	8.046E-08	6.489E-08	5.253E-08	4.318E-08	4.699E-08	4.846E-08			
SSW	9.746E-16	8.739E-10	1.402E-08	2.686E-08	3.279E-08	2.859E-08	2.346E-08	2.432E-08	2.375E-08	2.020E-08	1.748E-08			
SW	7.204E-16	8.131E-10	3.221E-08	8.439E-08	1.282E-07	8.492E-08	6.031E-08	4.529E-08	3.549E-08	2.874E-08	2.389E-08			
WSW	4.220E-16	5.212E-10	2.622E-08	7.557E-08	1.324E-07	8.420E-08	5.877E-08	4.381E-08	3.426E-08	2.776E-08	2.312E-08			
W	1.043E-09	6.409E-08	2.076E-07	2.375E-07	1.906E-07	1.133E-07	7.522E-08	5.386E-08	4.071E-08	3.204E-08	2.600E-08			
WNW	1.582E-10	1.426E-08	1.405E-07	2.600E-07	3.172E-07	1.908E-07	1.280E-07	9.662E-08	7.630E-08	6.008E-08	4.878E-08			
NW	1.253E-15	1.178E-09	6.688E-08	1.937E-07	3.043E-07	1.741E-07	1.130E-07	8.083E-08	6.106E-08	4.743E-08	3.805E-08			
NNW	6.782E-11	4.035E-09	2.637E-08	5.875E-08	1.021E-07	1.059E-07	1.008E-07	9.086E-08	8.111E-08	6.376E-08	5.169E-08			
N	1.509E-15	9.876E-10	1.468E-08	2.844E-08	3.784E-08	3.688E-08	3.296E-08	2.826E-08	2.436E-08	2.120E-08	1.865E-08			
NNE	8.705E-16	6.758E-10	1.103E-08	2.266E-08	3.202E-08	3.118E-08	2.775E-08	2.420E-08	2.112E-08	1.857E-08	1.648E-08			
NE	9.325E-16	8.069E-10	1.288E-08	2.499E-08	3.165E-08	2.852E-08	2.403E-08	2.010E-08	1.697E-08	1.451E-08	1.258E-08			
ENE	5.251E-16	6.394E-10	1.173E-08	2.405E-08	3.165E-08	2.882E-08	2.434E-08	2.034E-08	1.712E-08	1.458E-08	1.259E-08			
E	3.607E-16	4.316E-10	8.197E-09	1.753E-08	2.449E-08	2.307E-08	1.990E-08	1.690E-08	1.440E-08	1.241E-08	1.081E-08			
ESE	6.760E-16	5.902E-10	9.935E-09	2.001E-08	2.684E-08	2.521E-08	2.190E-08	1.875E-08	1.612E-08	1.400E-08	1.229E-08			
SE	2.603E-15	2.058E-09	3.204E-08	6.115E-08	7.520E-08	6.615E-08	5.463E-08	4.493E-08	3.736E-08	3.152E-08	2.698E-08			
SSE	2.157E-11	5.194E-09	6.315E-08	1.154E-07	1.359E-07	1.165E-07	9.447E-08	7.658E-08	6.291E-08	5.252E-08	4.454E-08			

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.212E-08	2.473E-08	1.527E-08	8.031E-09	5.101E-09	3.561E-09	2.628E-09	2.028E-09	1.628E-09	1.340E-09	1.122E-09
SSW	1.574E-08	1.065E-08	6.609E-09	3.498E-09	2.266E-09	1.603E-09	1.196E-09	9.325E-10	7.510E-10	6.198E-10	5.216E-10
SW	2.182E-08	1.662E-08	1.058E-08	5.766E-09	3.845E-09	2.770E-09	2.133E-09	1.668E-09	1.346E-09	1.113E-09	9.372E-10
WSW	2.086E-08	1.510E-08	1.108E-08	6.894E-09	4.489E-09	3.214E-09	2.442E-09	1.932E-09	1.576E-09	1.316E-09	1.119E-09
W	2.162E-08	1.115E-08	7.521E-09	4.440E-09	3.024E-09	2.131E-09	1.595E-09	1.248E-09	1.007E-09	8.336E-10	7.033E-10
WNW	4.100E-08	2.191E-08	1.426E-08	7.978E-09	5.024E-09	3.512E-09	2.643E-09	2.071E-09	1.669E-09	1.376E-09	1.157E-09
NW	3.152E-08	1.590E-08	9.997E-09	5.340E-09	3.322E-09	2.293E-09	1.706E-09	1.325E-09	1.062E-09	8.723E-10	7.309E-10
NNW	4.374E-08	2.369E-08	1.483E-08	7.899E-09	4.904E-09	3.373E-09	2.499E-09	1.945E-09	1.581E-09	1.311E-09	1.103E-09
N	1.662E-08	1.078E-08	9.283E-09	7.827E-09	6.561E-09	5.219E-09	3.996E-09	3.173E-09	2.590E-09	2.164E-09	1.842E-09
NNE	1.921E-08	3.544E-08	2.238E-08	1.221E-08	7.860E-09	5.574E-09	4.202E-09	3.304E-09	2.680E-09	2.225E-09	1.883E-09
NE	1.360E-08	2.180E-08	1.375E-08	7.530E-09	4.892E-09	3.497E-09	2.693E-09	2.152E-09	1.769E-09	1.478E-09	1.258E-09
ENE	1.287E-08	1.689E-08	1.084E-08	5.977E-09	3.809E-09	2.673E-09	2.111E-09	1.710E-09	1.378E-09	1.138E-09	9.569E-10
E	1.145E-08	1.603E-08	1.025E-08	5.602E-09	3.544E-09	2.471E-09	1.832E-09	1.419E-09	1.171E-09	9.825E-10	8.219E-10
ESE	1.299E-08	1.626E-08	1.046E-08	5.770E-09	3.675E-09	2.576E-09	1.919E-09	1.492E-09	1.196E-09	9.815E-10	8.210E-10
SE	2.340E-08	1.370E-08	1.018E-08	6.936E-09	4.904E-09	3.741E-09	2.995E-09	2.471E-09	2.008E-09	1.670E-09	1.415E-09
SSE	4.417E-08	3.596E-08	2.190E-08	1.137E-08	7.079E-09	4.887E-09	3.602E-09	2.778E-09	2.214E-09	1.811E-09	1.510E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	6.192E-08	8.710E-08	6.410E-08	4.730E-08	4.567E-08	2.439E-08	8.338E-09	3.598E-09	2.047E-09	1.345E-09	
SSW	1.680E-08	2.961E-08	2.517E-08	2.256E-08	1.764E-08	9.986E-09	3.642E-09	1.617E-09	9.387E-10	6.223E-10	
SW	4.843E-08	9.923E-08	6.087E-08	3.572E-08	2.456E-08	1.509E-08	5.983E-09	2.802E-09	1.678E-09	1.117E-09	
WSW	4.245E-08	9.834E-08	5.957E-08	3.451E-08	2.366E-08	1.459E-08	6.755E-09	3.245E-09	1.942E-09	1.320E-09	
W	1.890E-07	1.667E-07	7.683E-08	4.116E-08	2.616E-08	1.186E-08	4.495E-09	2.155E-09	1.255E-09	8.368E-10	
WNW	1.656E-07	2.483E-07	1.322E-07	7.593E-08	4.925E-08	2.275E-08	8.062E-09	3.568E-09	2.081E-09	1.382E-09	
NW	1.086E-07	2.218E-07	1.164E-07	6.151E-08	3.841E-08	1.675E-08	5.478E-09	2.332E-09	1.334E-09	8.761E-10	
NNW	3.580E-08	9.415E-08	9.817E-08	7.729E-08	5.233E-08	2.421E-08	8.109E-09	3.432E-09	1.965E-09	1.314E-09	
N	1.775E-08	3.533E-08	3.213E-08	2.427E-08	1.866E-08	1.141E-08	7.588E-09	5.088E-09	3.186E-09	2.171E-09	
NNE	1.390E-08	2.957E-08	2.725E-08	2.103E-08	1.811E-08	2.603E-08	1.254E-08	5.635E-09	3.323E-09	2.233E-09	
NE	1.558E-08	2.878E-08	2.366E-08	1.693E-08	1.353E-08	1.640E-08	7.740E-09	3.547E-09	2.161E-09	1.483E-09	
ENE	1.474E-08	2.870E-08	2.394E-08	1.707E-08	1.328E-08	1.331E-08	6.095E-09	2.751E-09	1.698E-09	1.142E-09	
E	1.062E-08	2.231E-08	1.954E-08	1.435E-08	1.152E-08	1.244E-08	5.720E-09	2.502E-09	1.443E-09	9.789E-10	
ESE	1.234E-08	2.460E-08	2.152E-08	1.606E-08	1.305E-08	1.296E-08	5.882E-09	2.606E-09	1.501E-09	9.855E-10	
SE	3.831E-08	6.805E-08	5.382E-08	3.730E-08	2.700E-08	1.429E-08	6.753E-09	3.753E-09	2.444E-09	1.676E-09	
SSE	7.348E-08	1.227E-07	9.319E-08	6.286E-08	4.677E-08	3.154E-08	1.180E-08	4.958E-09	2.799E-09	1.819E-09	

B285

ERP ELEVATED STACK RELEASES - JAN-MAR 2018
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**⁻²) AT FIXED POINTS BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.064E-09	2.780E-09	3.991E-09	3.692E-09	2.186E-09	1.441E-09	1.010E-09	7.391E-10	5.587E-10	4.600E-10	4.168E-10
SSW	7.633E-11	4.579E-10	9.750E-10	1.010E-09	6.308E-10	4.230E-10	2.988E-10	2.195E-10	2.106E-10	1.591E-10	1.245E-10
SW	6.963E-11	4.177E-10	8.895E-10	9.214E-10	1.101E-09	6.043E-10	3.764E-10	2.564E-10	1.857E-10	1.405E-10	1.100E-10
WSW	4.285E-11	2.571E-10	5.474E-10	1.204E-09	7.021E-10	3.820E-10	2.363E-10	1.602E-10	1.157E-10	8.740E-11	6.838E-11
W	1.121E-09	5.343E-09	4.720E-09	3.058E-09	1.553E-09	8.182E-10	4.972E-10	3.329E-10	2.384E-10	1.793E-10	1.401E-10
WNW	6.386E-10	1.087E-09	5.722E-09	4.156E-09	2.630E-09	1.323E-09	7.837E-10	5.180E-10	3.793E-10	2.879E-10	2.303E-10
NW	1.018E-10	6.106E-10	1.300E-09	3.509E-09	2.341E-09	1.162E-09	6.823E-10	4.475E-10	3.179E-10	2.402E-10	1.912E-10
NNW	8.514E-10	9.916E-10	1.285E-09	1.142E-09	1.227E-09	6.696E-10	4.224E-10	3.546E-10	2.649E-10	2.128E-10	1.813E-10
N	9.775E-11	5.865E-10	1.249E-09	1.293E-09	8.079E-10	5.417E-10	3.826E-10	2.811E-10	2.129E-10	1.652E-10	1.309E-10
NNE	6.561E-11	3.936E-10	8.382E-10	8.682E-10	5.423E-10	3.636E-10	2.568E-10	1.887E-10	1.429E-10	1.109E-10	8.783E-11
NE	7.097E-11	4.258E-10	9.066E-10	9.391E-10	5.866E-10	3.933E-10	2.778E-10	2.041E-10	1.546E-10	1.200E-10	9.500E-11
ENE	5.624E-11	3.374E-10	7.184E-10	7.442E-10	4.648E-10	3.117E-10	2.201E-10	1.617E-10	1.225E-10	9.507E-11	7.529E-11
E	4.017E-11	2.410E-10	5.132E-10	5.315E-10	3.320E-10	2.226E-10	1.572E-10	1.155E-10	8.749E-11	6.790E-11	5.378E-11
ESE	5.624E-11	3.374E-10	7.184E-10	7.442E-10	4.648E-10	3.117E-10	2.201E-10	1.617E-10	1.225E-10	9.507E-11	7.529E-11
SE	1.888E-10	1.133E-09	2.412E-09	2.498E-09	1.560E-09	1.046E-09	7.391E-10	5.429E-10	4.112E-10	3.191E-10	2.527E-10
SSE	6.534E-10	2.548E-09	5.150E-09	5.271E-09	3.275E-09	2.193E-09	1.548E-09	1.136E-09	8.605E-10	6.679E-10	5.289E-10

DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	3.351E-10	1.823E-10	1.147E-10	6.152E-11	3.810E-11	3.303E-11	2.364E-11	1.772E-11	1.397E-11	1.113E-11	9.082E-12
SSW	1.001E-10	5.955E-11	3.861E-11	2.128E-11	1.533E-11	1.076E-11	7.709E-12	5.789E-12	4.501E-12	3.595E-12	2.935E-12
SW	8.973E-11	5.758E-11	3.819E-11	2.150E-11	1.347E-11	1.034E-11	7.522E-12	5.648E-12	4.392E-12	3.508E-12	2.863E-12
WSW	5.496E-11	5.056E-11	3.655E-11	2.240E-11	1.356E-11	9.091E-12	6.554E-12	4.922E-12	3.827E-12	3.057E-12	2.495E-12
W	1.131E-10	5.217E-11	4.866E-11	2.781E-11	1.930E-11	1.310E-11	9.389E-12	7.050E-12	5.482E-12	4.379E-12	3.574E-12
WNW	1.942E-10	1.072E-10	7.325E-11	4.235E-11	2.973E-11	1.914E-11	1.378E-11	1.034E-11	8.115E-12	6.482E-12	5.291E-12
NW	1.599E-10	8.659E-11	5.843E-11	3.775E-11	2.303E-11	1.541E-11	1.115E-11	8.376E-12	6.537E-12	5.222E-12	4.262E-12
NNW	1.621E-10	1.085E-10	8.103E-11	5.041E-11	3.233E-11	2.142E-11	1.449E-11	1.044E-11	8.019E-12	6.404E-12	5.228E-12
N	1.054E-10	4.990E-11	3.041E-11	1.597E-11	5.568E-11	3.186E-11	2.283E-11	1.715E-11	1.333E-11	1.065E-11	8.693E-12
NNE	7.074E-11	1.710E-10	1.054E-10	5.438E-11	3.312E-11	2.217E-11	1.585E-11	1.186E-11	9.202E-12	7.336E-12	5.978E-12
NE	7.651E-11	1.340E-10	8.145E-11	4.135E-11	2.507E-11	1.680E-11	1.228E-11	9.223E-12	7.171E-12	5.728E-12	4.676E-12
ENE	6.063E-11	5.794E-11	4.048E-11	2.386E-11	1.509E-11	1.001E-11	7.061E-12	5.187E-12	4.033E-12	3.224E-12	2.634E-12
E	4.331E-11	5.190E-11	3.793E-11	2.318E-11	1.479E-11	9.793E-12	6.872E-12	5.035E-12	3.839E-12	2.978E-12	2.424E-12
ESE	6.063E-11	5.794E-11	4.048E-11	2.386E-11	1.509E-11	1.001E-11	7.061E-12	5.187E-12	4.033E-12	3.224E-12	2.634E-12
SE	2.036E-10	9.638E-11	5.873E-11	3.085E-11	1.873E-11	1.280E-11	9.466E-12	1.497E-11	1.153E-11	9.150E-12	7.440E-12
SSE	4.260E-10	3.819E-10	2.319E-10	1.176E-10	7.128E-11	4.778E-11	3.422E-11	2.569E-11	1.997E-11	1.595E-11	1.302E-11

***** RELATIVE DEPOSITION PER UNIT AREA (M**⁻²) BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	3.589E-09	2.190E-09	1.017E-09	5.727E-10	3.994E-10	1.862E-10	6.294E-11	3.063E-11	1.798E-11	1.121E-11
SSW	8.756E-10	6.227E-10	3.002E-10	1.935E-10	1.257E-10	5.925E-11	2.249E-11	1.076E-11	5.847E-12	3.619E-12
SW	7.988E-10	8.402E-10	3.892E-10	1.887E-10	1.116E-10	5.611E-11	2.164E-11	1.005E-11	5.705E-12	3.531E-12
WSW	7.749E-10	6.715E-10	2.447E-10	1.176E-10	6.905E-11	4.531E-11	2.162E-11	9.268E-12	4.971E-12	3.077E-12
W	4.120E-09	1.561E-09	5.171E-10	2.429E-10	1.417E-10	6.415E-11	2.866E-11	1.327E-11	7.121E-12	4.408E-12
WNW	3.996E-09	2.389E-09	8.213E-10	3.841E-10	2.340E-10	1.115E-10	4.361E-11	1.982E-11	1.048E-11	6.525E-12
NW	2.129E-09	2.077E-09	7.164E-10	3.254E-10	1.941E-10	9.036E-11	3.580E-11	1.574E-11	8.469E-12	5.256E-12
NNW	1.156E-09	9.605E-10	4.612E-10	2.707E-10	1.835E-10	1.082E-10	4.918E-11	2.156E-11	1.067E-11	6.447E-12
N	1.121E-09	7.975E-10	3.844E-10	2.142E-10	1.316E-10	5.357E-11	3.683E-11	3.460E-11	1.732E-11	1.072E-11
NNE	7.527E-10	5.353E-10	2.580E-10	1.438E-10	8.834E-11	1.196E-10	5.626E-11	2.256E-11	1.199E-11	7.386E-12
NE	8.142E-10	5.790E-10	2.791E-10	1.555E-10	9.555E-11	9.788E-11	4.302E-11	1.720E-11	9.316E-12	5.766E-12
ENE	6.452E-10	4.588E-10	2.212E-10	1.232E-10	7.572E-11	5.078E-11	2.365E-11	1.019E-11	5.283E-12	3.245E-12
E	4.609E-10	3.277E-10	1.580E-10	8.803E-11	5.409E-11	4.378E-11	2.273E-11	9.957E-12	5.105E-12	3.028E-12
ESE	6.452E-10	4.588E-10	2.212E-10	1.232E-10	7.572E-11	5.914E-11	3.015E-11	1.317E-11	6.760E-12	4.034E-12
SE	2.166E-09	1.540E-09	7.425E-10	4.138E-10	2.542E-10	1.035E-10	3.166E-11	1.305E-11	1.209E-11	9.222E-12
SSE	4.625E-09	3.237E-09	1.555E-09	8.660E-10	5.320E-10	3.250E-10	1.224E-10	4.862E-11	2.595E-11	1.606E-11

B286

ERP ELEVATED STACK RELEASES - JAN-MAR 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST							
RELEASE TYPE	DIRECTION	DIST.	X/Q	X/Q	X/Q	D/Q	
ID	LOCATION	FROM SITE (MI)	(SEC/M3)	(SEC/M3)	(SEC/M3)	(PER SQ.METER)	
			NO	2.26 DAY	8.0 DAY		
			DECAY	DECAY	DECAY		
			UNDEPLETED	UNDEPLETED	DEPLETED		
A	Site Boundary	S	.80	6.7E-08	6.7E-08	6.6E-08	4.0E-09
A	Site Boundary	SSW	.82	1.9E-08	1.9E-08	1.9E-08	1.0E-09
A	Site Boundary	SW	.97	8.0E-08	8.0E-08	8.0E-08	9.5E-10
A	Site Boundary	WSW	.93	6.1E-08	6.1E-08	6.1E-08	9.5E-10
A	Site Boundary	W	.91	2.4E-07	2.4E-07	2.4E-07	3.5E-09
A	Site Boundary	WNW	.94	2.4E-07	2.4E-07	2.4E-07	4.6E-09
A	Site Boundary	NW	.81	9.8E-08	9.8E-08	9.8E-08	1.4E-09
A	Site Boundary	NNW	.69	1.8E-08	1.8E-08	1.8E-08	1.2E-09
A	Site Boundary	N	.67	8.9E-09	8.9E-09	8.9E-09	1.0E-09
A	Site Boundary	NNE	.60	3.2E-09	3.2E-09	3.2E-09	5.7E-10
A	Site Boundary	NE	.62	5.0E-09	5.0E-09	5.0E-09	6.6E-10
A	Site Boundary	ENE	.59	2.7E-09	2.7E-09	2.7E-09	4.7E-10
A	Site Boundary	E	.53	7.1E-10	7.0E-10	7.1E-10	2.7E-10
A	Site Boundary	ESE	.54	1.2E-09	1.2E-09	1.2E-09	3.9E-10
A	Site Boundary	SE	.65	1.6E-08	1.6E-08	1.6E-08	1.9E-09
A	Site Boundary	SSE	.81	7.9E-08	7.9E-08	7.9E-08	5.4E-09
A	Nearest Res	SSW	3.00	2.5E-08	2.5E-08	2.4E-08	2.2E-10
A	Nearest Res	SW	1.00	8.4E-08	8.4E-08	8.4E-08	9.2E-10
A	Nearest Res	WSW	1.90	9.3E-08	9.3E-08	9.1E-08	4.3E-10
A	Nearest Res	W	1.00	2.4E-07	2.4E-07	2.4E-07	3.1E-09
A	Nearest Res	WNW	1.70	2.6E-07	2.6E-07	2.5E-07	1.9E-09
A	Nearest Res	NW	.90	1.4E-07	1.4E-07	1.4E-07	3.7E-09
A	Nearest Res	NNW	1.90	1.1E-07	1.1E-07	1.1E-07	7.5E-10
A	Nearest Res	N	2.90	3.0E-08	3.0E-08	2.9E-08	3.0E-10
A	Nearest Res	NNE	1.70	3.3E-08	3.3E-08	3.2E-08	4.6E-10
A	Nearest Res	ENE	1.70	3.1E-08	3.1E-08	3.1E-08	3.9E-10
A	Nearest Res	E	2.20	2.2E-08	2.2E-08	2.2E-08	1.9E-10
A	Nearest Res	SE	2.80	5.0E-08	5.0E-08	4.9E-08	6.1E-10
A	Nearest Cow	NNW	3.50	8.3E-08	8.2E-08	8.1E-08	2.6E-10
A	Nearest Garde	SSW	3.00	2.5E-08	2.5E-08	2.4E-08	2.2E-10
A	Nearest Garde	SW	2.20	7.6E-08	7.5E-08	7.3E-08	4.9E-10
A	Nearest Garde	WNW	1.70	2.6E-07	2.6E-07	2.5E-07	1.9E-09
A	Nearest Garde	NW	.90	1.4E-07	1.4E-07	1.4E-07	3.7E-09
A	Nearest Garde	NNW	2.80	9.7E-08	9.6E-08	9.5E-08	4.0E-10
A	Nearest Garde	E	2.20	2.2E-08	2.2E-08	2.2E-08	1.9E-10
A	Nearest Garde	ESE	2.20	2.4E-08	2.4E-08	2.4E-08	2.7E-10
A	Nearest Garde	SE	2.80	5.0E-08	5.0E-08	4.9E-08	6.1E-10
A	MAXIMUM CHI/Q	S	1.50	9.7E-08	9.7E-08	9.6E-08	2.2E-09
A	MAXIMUM CHI/Q	SSW	1.50	3.3E-08	3.3E-08	3.3E-08	6.3E-10
A	MAXIMUM CHI/Q	SW	1.50	1.3E-07	1.3E-07	1.3E-07	1.1E-09
A	MAXIMUM CHI/Q	WSW	1.50	1.3E-07	1.3E-07	1.3E-07	7.0E-10
A	MAXIMUM CHI/Q	W	1.00	2.4E-07	2.4E-07	2.4E-07	3.1E-09
A	MAXIMUM CHI/Q	WNW	1.50	3.2E-07	3.2E-07	3.2E-07	2.6E-09
A	MAXIMUM CHI/Q	NW	1.50	3.1E-07	3.1E-07	3.0E-07	2.3E-09
A	MAXIMUM CHI/Q	NNW	2.00	1.1E-07	1.1E-07	1.1E-07	6.7E-10
A	MAXIMUM CHI/Q	N	1.50	3.8E-08	3.8E-08	3.8E-08	8.1E-10
A	MAXIMUM CHI/Q	NNE	7.50	3.7E-08	3.6E-08	3.5E-08	1.7E-10
A	MAXIMUM CHI/Q	NE	1.50	3.2E-08	3.2E-08	3.2E-08	5.9E-10
A	MAXIMUM CHI/Q	ENE	1.50	3.2E-08	3.2E-08	3.2E-08	4.6E-10
A	MAXIMUM CHI/Q	E	1.50	2.5E-08	2.5E-08	2.4E-08	3.3E-10
A	MAXIMUM CHI/Q	ESE	1.50	2.7E-08	2.7E-08	2.7E-08	4.6E-10
A	MAXIMUM CHI/Q	SE	1.50	7.6E-08	7.6E-08	7.5E-08	1.6E-09
A	MAXIMUM CHI/Q	SSE	1.50	1.4E-07	1.4E-07	1.4E-07	3.3E-09

B287

Atmospheric Diffusion Estimates

Elevated Releases

April-June 2018

ERP ELEVATED STACK RELEASES - APR-JUN 2018
NO DECAY, UNDEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED) DISTANCE IN MILES FROM THE SITE. Table with 11 columns for distances from 0.250 to 4.500 miles and rows for directions S, SSW, SW, WSW, W, WNW, NW, NNW, N, NNE, NE, ENE, E, ESE, SE, SSE.

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED) DISTANCE IN MILES FROM THE SITE. Table with 11 columns for distances from 5.000 to 50.000 miles and rows for directions S, SSW, SW, WSW, W, WNW, NW, NNW, N, NNE, NE, ENE, E, ESE, SE, SSE.

B289

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

SEGMENT BOUNDARIES IN MILES FROM THE SITE. Table with 10 columns for segment boundaries from 0.5-1 to 40-50 miles and rows for directions S, SSW, SW, WSW, W, WNW, NW, NNW, N, NNE, NE, ENE, E, ESE, SE, SSE.

ERP ELEVATED STACK RELEASES - APR-JUN 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)				DISTANCE IN MILES FROM THE SITE									
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500			
S	6.401E-11	8.944E-09	4.332E-08	7.113E-08	8.472E-08	7.514E-08	6.272E-08	5.206E-08	4.363E-08	4.876E-08	5.037E-08			
SSW	8.803E-16	1.009E-09	1.782E-08	3.605E-08	4.732E-08	4.317E-08	3.656E-08	3.928E-08	3.927E-08	3.379E-08	2.948E-08			
SW	1.662E-10	1.149E-08	4.245E-08	8.188E-08	1.362E-07	9.452E-08	6.937E-08	5.340E-08	4.266E-08	3.509E-08	2.955E-08			
WSW	1.623E-10	1.715E-08	7.072E-08	1.315E-07	2.028E-07	1.286E-07	8.938E-08	6.629E-08	5.153E-08	4.150E-08	3.436E-08			
W	8.694E-09	1.107E-07	2.357E-07	2.680E-07	2.373E-07	1.469E-07	1.003E-07	7.330E-08	5.631E-08	4.490E-08	3.684E-08			
WNW	1.798E-14	7.277E-09	1.174E-07	2.289E-07	2.922E-07	1.780E-07	1.207E-07	9.233E-08	7.380E-08	5.860E-08	4.796E-08			
NW	1.460E-09	1.037E-08	1.088E-07	3.005E-07	5.202E-07	3.082E-07	2.052E-07	1.507E-07	1.163E-07	9.167E-08	7.456E-08			
NNW	6.480E-09	1.357E-08	5.142E-08	1.050E-07	1.764E-07	1.776E-07	1.620E-07	1.414E-07	1.242E-07	9.777E-08	7.945E-08			
N	2.563E-08	7.180E-08	8.459E-08	8.097E-08	7.777E-08	7.129E-08	6.276E-08	5.360E-08	4.611E-08	4.008E-08	3.521E-08			
NNE	1.033E-08	1.287E-08	3.458E-08	5.413E-08	6.563E-08	5.942E-08	5.041E-08	4.240E-08	3.592E-08	3.078E-08	2.671E-08			
NE	3.394E-16	4.255E-10	7.412E-09	1.495E-08	2.007E-08	1.888E-08	1.644E-08	1.413E-08	1.219E-08	1.062E-08	9.351E-09			
ENE	4.963E-16	5.481E-10	9.197E-09	1.830E-08	2.440E-08	2.297E-08	2.005E-08	1.725E-08	1.490E-08	1.298E-08	1.144E-08			
E	6.048E-16	6.619E-10	1.146E-08	2.296E-08	2.996E-08	2.734E-08	2.320E-08	1.949E-08	1.651E-08	1.415E-08	1.229E-08			
ESE	8.264E-16	8.370E-10	1.411E-08	2.769E-08	3.470E-08	3.064E-08	2.533E-08	2.083E-08	1.732E-08	1.461E-08	1.251E-08			
SE	5.844E-11	4.388E-09	2.234E-08	3.715E-08	4.373E-08	3.829E-08	3.170E-08	2.620E-08	2.190E-08	1.858E-08	1.599E-08			
SSE	2.741E-15	2.052E-09	3.177E-08	6.064E-08	7.52E-08	6.678E-08	5.555E-08	4.594E-08	3.838E-08	3.250E-08	2.791E-08			

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)				DISTANCE IN MILES FROM THE SITE							
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
S	4.386E-08	2.619E-08	1.664E-08	9.227E-09	6.202E-09	4.538E-09	3.470E-09	2.765E-09	2.280E-09	1.920E-09	1.641E-09	
SSW	2.671E-08	1.870E-08	1.195E-08	6.671E-09	4.585E-09	3.356E-09	2.564E-09	2.041E-09	1.673E-09	1.403E-09	1.197E-09	
SW	2.756E-08	2.210E-08	1.455E-08	8.448E-09	6.036E-09	4.599E-09	3.662E-09	2.944E-09	2.435E-09	2.058E-09	1.769E-09	
WSW	3.040E-08	1.985E-08	1.400E-08	8.516E-09	5.682E-09	4.151E-09	3.211E-09	2.582E-09	2.136E-09	1.807E-09	1.554E-09	
W	3.093E-08	1.651E-08	1.142E-08	7.053E-09	4.993E-09	3.632E-09	2.789E-09	2.229E-09	1.834E-09	1.544E-09	1.322E-09	
WNW	4.070E-08	2.280E-08	1.551E-08	9.418E-09	6.417E-09	4.756E-09	3.731E-09	3.023E-09	2.505E-09	2.116E-09	1.819E-09	
NW	6.273E-08	3.385E-08	2.248E-08	1.310E-08	8.674E-09	6.297E-09	4.895E-09	3.929E-09	3.235E-09	2.723E-09	2.333E-09	
NNW	6.743E-08	3.752E-08	2.419E-08	1.371E-08	9.157E-09	6.691E-09	5.213E-09	4.215E-09	3.531E-09	2.995E-09	2.570E-09	
N	3.134E-08	2.011E-08	1.661E-08	1.264E-08	9.874E-09	7.741E-09	6.000E-09	4.823E-09	3.985E-09	3.366E-09	2.893E-09	
NNE	2.815E-08	3.058E-08	1.952E-08	1.093E-08	7.260E-09	5.286E-09	4.078E-09	3.273E-09	2.705E-09	2.285E-09	1.964E-09	
NE	1.047E-08	1.369E-08	8.785E-09	4.953E-09	3.301E-09	2.409E-09	1.871E-09	1.509E-09	1.251E-09	1.056E-09	9.070E-10	
ENE	1.237E-08	1.643E-08	1.075E-08	6.208E-09	4.201E-09	3.102E-09	2.506E-09	2.072E-09	1.721E-09	1.460E-09	1.260E-09	
E	1.271E-08	1.318E-08	8.453E-09	4.742E-09	3.142E-09	2.281E-09	1.754E-09	1.403E-09	1.168E-09	9.898E-10	8.470E-10	
ESE	1.217E-08	1.181E-08	7.711E-09	4.434E-09	2.991E-09	2.203E-09	1.714E-09	1.386E-09	1.153E-09	9.792E-10	8.459E-10	
SE	1.394E-08	8.326E-09	6.281E-09	4.371E-09	3.125E-09	2.401E-09	1.931E-09	1.602E-09	1.323E-09	1.117E-09	9.586E-10	
SSE	2.831E-08	2.522E-08	1.592E-08	8.773E-09	5.756E-09	4.152E-09	3.179E-09	2.536E-09	2.084E-09	1.752E-09	1.500E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.804E-08	7.744E-08	6.177E-08	4.799E-08	4.748E-08	2.587E-08	9.530E-09	4.555E-09	2.782E-09	1.923E-09
SSW	2.219E-08	4.297E-08	3.941E-08	3.719E-08	2.973E-08	1.748E-08	6.917E-09	3.367E-09	2.050E-09	1.407E-09
SW	5.309E-08	1.056E-07	6.969E-08	4.284E-08	3.046E-08	1.996E-08	8.732E-09	4.607E-09	2.955E-09	2.063E-09
WSW	8.584E-08	1.540E-07	9.060E-08	5.193E-08	3.501E-08	1.959E-08	8.475E-09	4.183E-09	2.592E-09	1.811E-09
W	2.223E-07	2.039E-07	1.019E-07	5.682E-08	3.704E-08	1.745E-08	7.109E-09	3.658E-09	2.239E-09	1.548E-09
WNW	1.425E-07	2.274E-07	1.246E-07	7.330E-08	4.842E-08	2.354E-08	9.438E-09	4.789E-09	3.028E-09	2.121E-09
NW	1.721E-07	3.771E-07	2.108E-07	1.167E-07	7.525E-08	3.521E-08	1.322E-08	6.370E-09	3.941E-09	2.731E-09
NNW	6.683E-08	1.611E-07	1.579E-07	1.191E-07	8.043E-08	3.825E-08	1.401E-08	6.757E-09	4.240E-09	2.997E-09
N	8.014E-08	7.560E-08	6.137E-08	4.595E-08	3.522E-08	2.105E-08	1.229E-08	7.614E-09	4.840E-09	3.374E-09
NNE	3.844E-08	6.031E-08	4.961E-08	3.581E-08	2.845E-08	2.513E-08	1.121E-08	5.329E-09	3.287E-09	2.291E-09
NE	9.208E-09	1.840E-08	1.617E-08	1.214E-08	1.014E-08	1.079E-08	5.070E-09	2.432E-09	1.514E-09	1.059E-09
ENE	1.132E-08	2.241E-08	1.971E-08	1.484E-08	1.224E-08	1.301E-08	6.326E-09	3.157E-09	2.062E-09	1.463E-09
E	1.417E-08	2.724E-08	2.282E-08	1.646E-08	1.300E-08	1.098E-08	4.856E-09	2.300E-09	1.413E-09	9.896E-10
ESE	1.720E-08	3.134E-08	2.495E-08	1.729E-08	1.301E-08	1.007E-08	4.521E-09	2.218E-09	1.391E-09	9.813E-10
SE	2.493E-08	3.985E-08	3.126E-08	2.186E-08	1.600E-08	8.664E-09	4.242E-09	2.406E-09	1.589E-09	1.119E-09
SSE	3.800E-08	6.825E-08	5.470E-08	3.830E-08	2.942E-08	2.177E-08	9.020E-09	4.191E-09	2.548E-09	1.757E-09

B290

ERP ELEVATED STACK RELEASES - APR-JUN 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE											
	250	500	750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	250	500	750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	6.404E-11	8.887E-09	4.309E-08	7.092E-08	8.395E-08	7.390E-08	6.125E-08	5.051E-08	4.207E-08	4.692E-08	4.840E-08	8.804E-16	1.010E-09	1.784E-08	3.610E-08	4.700E-08	4.254E-08	3.575E-08	3.823E-08	3.809E-08	3.264E-08	2.838E-08
SSW	1.662E-10	1.140E-08	4.202E-08	8.151E-08	1.351E-07	9.317E-08	6.808E-08	5.223E-08	4.161E-08	3.416E-08	2.872E-08	1.623E-10	1.701E-08	6.998E-08	1.307E-07	2.006E-07	1.263E-07	8.735E-08	6.453E-08	5.001E-08	4.017E-08	3.318E-08
WSW	8.698E-09	1.089E-07	2.327E-07	2.645E-07	2.332E-07	1.435E-07	9.748E-08	7.099E-08	5.436E-08	4.322E-08	3.538E-08	1.798E-14	7.281E-09	1.173E-07	2.274E-07	2.880E-07	1.742E-07	1.175E-07	8.955E-08	7.142E-08	5.647E-08	4.600E-08
W	1.460E-09	1.029E-08	1.086E-07	2.994E-07	5.147E-07	3.025E-07	2.003E-07	1.464E-07	1.127E-07	8.844E-08	7.159E-08	6.481E-09	1.346E-08	5.112E-08	1.048E-07	1.752E-07	1.756E-07	1.598E-07	1.394E-07	1.224E-07	9.601E-08	7.770E-08
WNW	2.563E-08	7.118E-08	8.310E-08	7.968E-08	7.656E-08	7.003E-08	6.149E-08	5.237E-08	4.495E-08	3.899E-08	3.419E-08	N	1.033E-08	1.277E-08	3.433E-08	5.394E-08	6.504E-08	5.849E-08	4.931E-08	4.123E-08	3.474E-08	2.963E-08
NW	3.394E-16	4.258E-10	7.418E-09	1.496E-08	1.994E-08	1.863E-08	1.613E-08	1.380E-08	1.186E-08	1.029E-08	9.039E-09	NNE	4.964E-16	5.484E-10	9.204E-09	1.831E-08	2.425E-08	2.267E-08	1.968E-08	1.686E-08	1.450E-08	1.260E-08
NNW	6.049E-16	6.623E-10	1.147E-08	2.298E-08	2.975E-08	2.694E-08	2.269E-08	1.895E-08	1.596E-08	1.361E-08	1.176E-08	N	8.266E-16	8.374E-10	1.413E-08	2.772E-08	3.444E-08	3.015E-08	2.471E-08	2.016E-08	1.664E-08	1.395E-08
N	5.845E-11	4.360E-09	2.224E-08	3.708E-08	4.334E-08	3.764E-08	3.093E-08	2.538E-08	2.108E-08	1.778E-08	1.522E-08	ENE	2.742E-15	2.053E-09	3.179E-08	6.069E-08	7.472E-08	6.573E-08	5.424E-08	4.454E-08	3.696E-08	3.111E-08
NNW												E										
N												ESE										
NNE												SE										
NE												SSE										
ENE																						
E																						
ESE																						
SE																						
SSE																						

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE											
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.200E-08	2.457E-08	1.518E-08	7.982E-09	5.074E-09	3.552E-09	2.629E-09	2.035E-09	1.638E-09	1.350E-09	1.132E-09	SSW	2.566E-08	1.777E-08	1.106E-08	5.869E-09	3.824E-09	2.717E-09	2.027E-09	1.580E-09	1.272E-09	1.049E-09
SSW	2.681E-08	2.141E-08	1.371E-08	7.517E-09	5.019E-09	3.622E-09	2.803E-09	2.204E-09	1.786E-09	1.483E-09	1.254E-09	SW	2.935E-08	1.888E-08	1.298E-08	7.543E-09	4.858E-09	3.449E-09	2.603E-09	2.049E-09	1.664E-09	1.383E-09
WSW	2.964E-08	1.570E-08	1.075E-08	6.338E-09	4.278E-09	3.028E-09	2.271E-09	1.779E-09	1.438E-09	1.191E-09	1.006E-09	W	3.886E-08	2.121E-08	1.404E-08	8.042E-09	5.117E-09	3.614E-09	2.751E-09	2.173E-09	1.762E-09	1.459E-09
W	5.994E-08	3.148E-08	2.033E-08	1.123E-08	7.054E-09	4.905E-09	3.699E-09	2.898E-09	2.336E-09	1.929E-09	1.624E-09	WNW	6.565E-08	3.559E-08	2.227E-08	1.186E-08	7.376E-09	5.081E-09	3.770E-09	2.933E-09	2.393E-09	1.988E-09
WNW	3.038E-08	1.941E-08	1.607E-08	1.232E-08	9.477E-09	7.130E-09	5.406E-09	4.264E-09	3.464E-09	2.882E-09	2.443E-09	NW	2.699E-08	2.932E-08	1.817E-08	9.681E-09	6.149E-09	4.317E-09	3.228E-09	2.521E-09	2.033E-09	1.680E-09
NNW	1.015E-08	1.333E-08	8.306E-09	4.448E-09	2.824E-09	1.981E-09	1.491E-09	1.174E-09	9.544E-10	7.917E-10	6.693E-10	N	1.199E-08	1.604E-08	1.019E-08	5.533E-09	3.485E-09	2.425E-09	1.861E-09	1.484E-09	1.201E-09	9.959E-10
N	1.217E-08	1.266E-08	7.893E-09	4.191E-09	2.612E-09	1.803E-09	1.328E-09	1.023E-09	8.226E-10	6.772E-10	5.665E-10	NNE	1.150E-08	1.117E-08	7.105E-09	3.879E-09	2.471E-09	1.734E-09	1.294E-09	1.008E-09	8.103E-10	6.672E-10
NNW	1.320E-08	7.753E-09	5.811E-09	4.041E-09	2.886E-09	2.222E-09	1.794E-09	1.489E-09	1.214E-09	1.014E-09	8.619E-10	NE	2.688E-08	2.375E-08	1.454E-08	7.621E-09	4.789E-09	3.334E-09	2.476E-09	1.923E-09	1.543E-09	1.269E-09
N												ENE										
NNE												E										
NE												ESE										
ENE												SE										
E												SSE										
ESE																						
SE																						
SSE																						

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.786E-08	7.658E-08	6.032E-08	4.633E-08	4.559E-08	2.427E-08	8.288E-09	3.588E-09	2.053E-09	1.355E-09
SSW	2.221E-08	4.259E-08	3.855E-08	3.605E-08	2.863E-08	1.654E-08	6.114E-09	2.736E-09	1.590E-09	1.053E-09
SW	5.277E-08	1.045E-07	6.843E-08	4.181E-08	2.962E-08	1.919E-08	7.784E-09	3.667E-09	2.216E-09	1.488E-09
WSW	8.519E-08	1.520E-07	8.861E-08	5.041E-08	3.383E-08	1.859E-08	7.558E-09	3.486E-09	2.060E-09	1.388E-09
W	2.193E-07	2.003E-07	9.915E-08	5.487E-08	3.558E-08	1.660E-08	6.402E-09	3.058E-09	1.790E-09	1.196E-09
WNW	1.418E-07	2.240E-07	1.214E-07	7.091E-08	4.646E-08	2.195E-08	8.075E-09	3.670E-09	2.182E-09	1.464E-09
NW	1.716E-07	3.726E-07	2.060E-07	1.131E-07	7.226E-08	3.285E-08	1.140E-08	4.995E-09	2.913E-09	1.937E-09
NNW	6.661E-08	1.597E-07	1.559E-07	1.172E-07	7.866E-08	3.635E-08	1.218E-08	5.169E-09	2.966E-09	1.992E-09
N	7.893E-08	7.435E-08	6.012E-08	4.480E-08	3.420E-08	2.036E-08	1.189E-08	7.066E-09	4.285E-09	2.892E-09
NNE	3.826E-08	5.966E-08	4.852E-08	3.465E-08	2.731E-08	2.384E-08	9.997E-09	4.370E-09	2.537E-09	1.686E-09
NE	9.218E-09	1.825E-08	1.586E-08	1.181E-08	9.821E-09	1.039E-08	4.583E-09	2.010E-09	1.181E-09	7.946E-10
ENE	1.133E-08	2.223E-08	1.935E-08	1.445E-08	1.187E-08	1.254E-08	5.657E-09	2.482E-09	1.484E-09	9.995E-10
E	4.18E-08	2.700E-08	2.233E-08	1.592E-08	1.246E-08	1.043E-08	4.312E-09	1.829E-09	1.034E-09	6.793E-10
ESE	1.721E-08	3.104E-08	2.434E-08	1.662E-08	1.235E-08	9.439E-09	3.970E-09	1.755E-09	1.014E-09	6.698E-10
SE	2.486E-08	3.942E-08	3.050E-08	2.105E-08	1.523E-08	8.101E-09	3.921E-09	2.228E-09	1.471E-09	1.017E-09
SSE	3.803E-08	6.761E-08	5.342E-08	3.690E-08	2.803E-08	2.035E-08	7.900E-09	3.379E-09	1.936E-09	1.275E-09

B291

ERP ELEVATED STACK RELEASES - APR-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	6.872E-10	1.409E-09	2.455E-09	2.418E-09	1.476E-09	9.829E-10	6.920E-10	5.075E-10	3.841E-10	3.118E-10	2.876E-10
SSW	8.741E-11	5.244E-10	1.117E-09	1.157E-09	7.224E-10	4.844E-10	3.421E-10	2.513E-10	2.389E-10	1.807E-10	1.414E-10
SW	1.332E-09	1.205E-09	1.205E-09	9.358E-10	8.532E-10	4.660E-10	2.900E-10	1.975E-10	1.431E-10	1.084E-10	8.488E-11
WSW	1.347E-09	1.293E-09	1.391E-09	2.075E-09	1.133E-09	6.124E-10	3.780E-10	2.560E-10	1.848E-10	1.396E-10	1.093E-10
W	2.629E-09	5.516E-09	4.222E-09	2.709E-09	1.244E-09	6.638E-10	4.075E-10	2.755E-10	1.992E-10	1.512E-10	1.192E-10
WNN	8.741E-11	5.244E-10	3.713E-09	3.023E-09	1.849E-09	9.388E-10	5.623E-10	3.796E-10	2.876E-10	2.244E-10	1.855E-10
NW	1.166E-09	1.570E-09	2.253E-09	4.997E-09	3.280E-09	1.635E-09	9.675E-10	6.432E-10	4.667E-10	3.625E-10	2.978E-10
NNW	2.177E-09	2.202E-09	2.510E-09	2.100E-09	2.157E-09	1.171E-09	7.319E-10	6.014E-10	4.420E-10	3.478E-10	2.898E-10
N	9.377E-09	7.398E-09	5.949E-09	3.913E-09	1.832E-09	1.105E-09	7.403E-10	5.292E-10	3.953E-10	3.051E-10	2.415E-10
NNE	2.182E-09	2.234E-09	2.578E-09	2.170E-09	1.220E-09	7.903E-10	5.493E-10	4.002E-10	3.019E-10	2.340E-10	1.853E-10
NE	3.443E-11	2.066E-10	4.399E-10	4.556E-10	2.846E-10	1.908E-10	1.348E-10	9.901E-11	7.499E-11	5.820E-11	4.609E-11
ENE	4.503E-11	2.701E-10	5.752E-10	5.958E-10	3.721E-10	2.495E-10	1.763E-10	1.295E-10	9.806E-11	7.611E-11	6.028E-11
E	5.695E-11	3.416E-10	7.275E-10	7.535E-10	4.707E-10	3.156E-10	2.229E-10	1.638E-10	1.240E-10	9.626E-11	7.623E-11
ESE	7.284E-11	4.370E-10	9.305E-10	9.638E-10	6.020E-10	4.037E-10	2.851E-10	2.094E-10	1.586E-10	1.231E-10	9.750E-11
SE	6.223E-10	1.019E-09	1.626E-09	1.559E-09	9.397E-10	6.232E-10	4.380E-10	3.209E-10	2.428E-10	1.883E-10	1.491E-10
SSE	1.947E-10	1.168E-09	2.487E-09	2.576E-09	1.609E-09	1.079E-09	7.621E-10	5.598E-10	4.240E-10	3.291E-10	2.606E-10

DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	2.312E-10	1.536E-10	1.030E-10	5.864E-11	3.682E-11	2.716E-11	1.946E-11	1.461E-11	1.165E-11	9.309E-12	7.600E-12
SSW	1.146E-10	7.157E-11	4.712E-11	2.635E-11	1.801E-11	1.279E-11	9.164E-12	6.883E-12	5.425E-12	4.334E-12	3.537E-12
SW	6.954E-11	7.012E-11	5.161E-11	3.179E-11	2.042E-11	1.286E-11	9.018E-12	6.772E-12	5.265E-12	4.206E-12	3.433E-12
WSW	8.939E-11	7.237E-11	5.128E-11	3.185E-11	1.928E-11	1.293E-11	9.342E-12	7.015E-12	5.454E-12	4.357E-12	3.556E-12
W	9.688E-11	4.580E-11	5.659E-11	3.514E-11	2.133E-11	1.462E-11	1.049E-11	7.866E-12	6.116E-12	4.885E-12	3.988E-12
WNN	1.612E-10	9.944E-11	7.172E-11	4.339E-11	2.715E-11	1.761E-11	1.288E-11	9.673E-12	7.521E-12	6.008E-12	4.904E-12
NW	2.571E-10	1.551E-10	1.107E-10	6.872E-11	4.192E-11	2.805E-11	2.006E-11	1.507E-11	1.179E-11	9.416E-12	7.685E-12
NNW	2.535E-10	1.594E-10	1.160E-10	7.077E-11	4.525E-11	3.008E-11	2.128E-11	1.562E-11	1.186E-11	9.477E-12	7.737E-12
N	1.952E-10	9.323E-11	5.738E-11	3.087E-11	7.506E-11	4.464E-11	3.183E-11	2.390E-11	1.858E-11	1.485E-11	1.212E-11
NNE	1.493E-10	1.986E-10	1.214E-10	6.205E-11	3.769E-11	2.525E-11	1.807E-11	1.356E-11	1.053E-11	8.409E-12	6.862E-12
NE	3.712E-11	6.774E-11	4.212E-11	2.197E-11	1.343E-11	8.983E-12	6.534E-12	4.843E-12	3.766E-12	3.008E-12	2.455E-12
ENE	4.855E-11	6.814E-11	5.109E-11	3.184E-11	2.039E-11	1.348E-11	9.440E-12	6.408E-12	4.980E-12	3.977E-12	3.246E-12
E	6.140E-11	5.807E-11	4.048E-11	2.381E-11	1.505E-11	9.992E-12	7.045E-12	5.193E-12	3.980E-12	3.396E-12	2.770E-12
ESE	7.853E-11	6.105E-11	4.040E-11	2.270E-11	1.419E-11	9.452E-12	6.704E-12	4.978E-12	3.842E-12	3.054E-12	2.486E-12
SE	1.201E-10	5.693E-11	3.473E-11	1.828E-11	1.114E-11	7.633E-12	5.660E-12	4.475E-12	3.551E-12	2.820E-12	2.260E-12
SSE	2.099E-10	2.061E-10	1.258E-10	6.418E-11	3.896E-11	2.611E-11	1.869E-11	1.402E-11	1.089E-11	8.698E-12	7.098E-12

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	2.206E-09	1.466E-09	6.958E-10	3.918E-10	2.739E-10	1.484E-10	5.881E-11	2.666E-11	1.487E-11	9.370E-12
SSW	1.003E-09	7.131E-10	3.438E-10	2.203E-10	1.431E-10	7.027E-11	2.725E-11	1.273E-11	6.979E-12	4.362E-12
SW	1.085E-09	6.995E-10	2.999E-10	1.454E-10	8.616E-11	6.176E-11	3.114E-11	1.334E-11	6.840E-12	4.233E-12
WSW	1.673E-09	1.111E-09	3.917E-10	1.879E-10	1.109E-10	6.678E-11	3.058E-11	1.319E-11	7.085E-12	4.385E-12
W	3.837E-09	1.312E-09	4.231E-10	2.027E-10	1.204E-10	6.195E-11	3.377E-11	1.475E-11	7.945E-12	4.917E-12
WNN	2.698E-09	1.705E-09	5.896E-10	2.898E-10	1.880E-10	1.008E-10	4.247E-11	1.826E-11	9.770E-12	6.047E-12
NW	3.321E-09	2.930E-09	1.016E-09	4.774E-10	3.019E-10	1.581E-10	6.615E-11	2.856E-11	1.524E-11	9.477E-12
NNW	2.259E-09	1.706E-09	7.969E-10	4.517E-10	2.935E-10	1.610E-10	6.947E-11	3.061E-11	1.581E-11	9.540E-12
N	5.366E-09	1.971E-09	7.531E-10	3.992E-10	2.432E-10	9.995E-11	5.640E-11	4.763E-11	2.414E-11	1.494E-11
NNE	2.320E-09	1.240E-09	5.539E-10	3.041E-10	1.864E-10	1.533E-10	6.440E-11	2.570E-11	1.369E-11	8.465E-12
NE	3.950E-10	2.809E-10	1.354E-10	7.546E-11	4.636E-11	4.955E-11	2.265E-11	9.189E-12	4.916E-12	3.028E-12
ENE	5.166E-10	3.674E-10	1.771E-10	9.868E-11	6.062E-11	5.620E-11	3.103E-11	1.371E-11	6.730E-12	4.004E-12
E	6.533E-10	4.646E-10	2.240E-10	1.248E-10	7.667E-11	5.099E-11	2.362E-11	1.016E-11	5.260E-12	3.338E-12
ESE	8.356E-10	5.942E-10	2.865E-10	1.596E-10	9.807E-11	5.576E-11	2.285E-11	9.617E-12	5.039E-12	3.077E-12
SE	1.461E-09	9.367E-10	4.406E-10	2.444E-10	1.500E-10	6.111E-11	1.876E-11	7.779E-12	6.938E-12	5.259E-12
SSE	2.233E-09	1.588E-09	7.656E-10	4.266E-10	2.621E-10	1.712E-10	6.666E-11	2.657E-11	1.416E-11	8.756E-12

B292

ERP ELEVATED STACK RELEASES - APR-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE TYPE	DIRECTION	DIST.	X/Q	X/Q	X/Q	D/Q	
ID	LOCATION	FROM SITE (MI)	(SEC/M3)	(SEC/M3)	(SEC/M3)	(PER SQ.METER)	
			NO	2.26 DAY	8.0 DAY		
			DECAY	DECAY	DECAY		
			UNDEPLETED	UNDEPLETED	DEPLETED		
A	Site Boundary	S	.80	5.0E-08	5.0E-08	5.0E-08	2.5E-09
A	Site Boundary	SSW	.82	2.4E-08	2.4E-08	2.4E-08	1.2E-09
A	Site Boundary	SW	.97	7.8E-08	7.8E-08	7.8E-08	9.7E-10
A	Site Boundary	WSW	.93	1.1E-07	1.1E-07	1.1E-07	1.8E-09
A	Site Boundary	W	.91	2.6E-07	2.6E-07	2.6E-07	3.0E-09
A	Site Boundary	WNW	.94	2.1E-07	2.1E-07	2.1E-07	3.4E-09
A	Site Boundary	NW	.81	1.5E-07	1.5E-07	1.5E-07	2.3E-09
A	Site Boundary	NNW	.69	3.7E-08	3.7E-08	3.6E-08	2.4E-09
A	Site Boundary	N	.67	8.0E-08	8.0E-08	7.9E-08	6.3E-09
A	Site Boundary	NNE	.60	1.8E-08	1.8E-08	1.8E-08	2.3E-09
A	Site Boundary	NE	.62	2.8E-09	2.8E-09	2.8E-09	3.2E-10
A	Site Boundary	ENE	.59	2.3E-09	2.3E-09	2.3E-09	3.7E-10
A	Site Boundary	E	.53	1.1E-09	1.1E-09	1.1E-09	3.8E-10
A	Site Boundary	ESE	.54	1.7E-09	1.7E-09	1.7E-09	5.1E-10
A	Site Boundary	SE	.65	1.3E-08	1.3E-08	1.3E-08	1.4E-09
A	Site Boundary	SSE	.81	4.0E-08	4.0E-08	4.0E-08	2.6E-09
A	Nearest Res	SSW	3.00	4.0E-08	3.9E-08	3.8E-08	2.5E-10
A	Nearest Res	SW	1.00	8.2E-08	8.2E-08	8.1E-08	9.4E-10
A	Nearest Res	WSW	1.90	1.4E-07	1.4E-07	1.4E-07	6.9E-10
A	Nearest Res	W	1.00	2.7E-07	2.7E-07	2.6E-07	2.7E-09
A	Nearest Res	WNW	1.70	2.4E-07	2.4E-07	2.3E-07	1.4E-09
A	Nearest Res	NW	.90	2.2E-07	2.2E-07	2.2E-07	5.4E-09
A	Nearest Res	NNW	1.90	1.8E-07	1.8E-07	1.8E-07	1.3E-09
A	Nearest Res	N	2.90	5.6E-08	5.5E-08	5.4E-08	5.6E-10
A	Nearest Res	NNE	1.70	6.4E-08	6.4E-08	6.3E-08	1.0E-09
A	Nearest Res	ENE	1.70	2.4E-08	2.4E-08	2.4E-08	3.1E-10
A	Nearest Res	E	2.20	2.6E-08	2.6E-08	2.5E-08	2.7E-10
A	Nearest Res	SE	2.80	2.8E-08	2.8E-08	2.7E-08	3.6E-10
A	Nearest Cow	NNW	3.50	1.3E-07	1.2E-07	1.2E-07	4.4E-10
A	Nearest Garde	SSW	3.00	4.0E-08	3.9E-08	3.8E-08	2.5E-10
A	Nearest Garde	SW	2.20	8.3E-08	8.3E-08	8.2E-08	3.8E-10
A	Nearest Garde	WNW	1.70	2.4E-07	2.4E-07	2.3E-07	1.4E-09
A	Nearest Garde	NW	.90	2.2E-07	2.2E-07	2.2E-07	5.4E-09
A	Nearest Garde	NNW	2.80	1.5E-07	1.5E-07	1.5E-07	6.9E-10
A	Nearest Garde	E	2.20	2.6E-08	2.6E-08	2.5E-08	2.7E-10
A	Nearest Garde	ESE	2.20	2.9E-08	2.8E-08	2.8E-08	3.5E-10
A	Nearest Garde	SE	2.80	2.8E-08	2.8E-08	2.7E-08	3.6E-10
A	MAXIMUM CHI/Q	S	1.50	8.5E-08	8.5E-08	8.4E-08	1.5E-09
A	MAXIMUM CHI/Q	SSW	1.50	4.7E-08	4.7E-08	4.7E-08	7.2E-10
A	MAXIMUM CHI/Q	SW	1.50	1.4E-07	1.4E-07	1.4E-07	8.5E-10
A	MAXIMUM CHI/Q	WSW	1.50	2.0E-07	2.0E-07	2.0E-07	1.1E-09
A	MAXIMUM CHI/Q	W	1.00	2.7E-07	2.7E-07	2.6E-07	2.7E-09
A	MAXIMUM CHI/Q	WNW	1.50	2.9E-07	2.9E-07	2.9E-07	1.8E-09
A	MAXIMUM CHI/Q	NW	1.50	5.2E-07	5.2E-07	5.1E-07	3.3E-09
A	MAXIMUM CHI/Q	NNW	2.00	1.8E-07	1.8E-07	1.8E-07	1.2E-09
A	MAXIMUM CHI/Q	N	.75	8.5E-08	8.4E-08	8.3E-08	5.9E-09
A	MAXIMUM CHI/Q	NNE	1.50	6.6E-08	6.6E-08	6.5E-08	1.2E-09
A	MAXIMUM CHI/Q	NE	1.50	2.0E-08	2.0E-08	2.0E-08	2.8E-10
A	MAXIMUM CHI/Q	ENE	1.50	2.4E-08	2.4E-08	2.4E-08	3.7E-10
A	MAXIMUM CHI/Q	E	1.50	3.0E-08	3.0E-08	3.0E-08	4.7E-10
A	MAXIMUM CHI/Q	ESE	1.50	3.5E-08	3.5E-08	3.4E-08	6.0E-10
A	MAXIMUM CHI/Q	SE	1.50	4.4E-08	4.4E-08	4.3E-08	9.4E-10
A	MAXIMUM CHI/Q	SSE	1.50	7.5E-08	7.5E-08	7.5E-08	1.6E-09

B293

Atmospheric Diffusion Estimates

Elevated Releases

January-June 2018

ERP ELEVATED STACK RELEASES - JAN-JUN 2018
 NO DECAY, UNDELETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	1.401E-10	1.225E-08	5.109E-08	7.969E-08	9.078E-08	7.876E-08	6.490E-08	5.343E-08	4.453E-08	4.921E-08	5.086E-08
SSW	9.273E-16	9.424E-10	1.594E-08	3.152E-08	4.032E-08	3.629E-08	3.048E-08	3.243E-08	3.228E-08	2.778E-08	2.426E-08
SW	8.356E-11	6.185E-09	3.739E-08	8.324E-08	1.334E-07	9.114E-08	6.624E-08	5.066E-08	4.029E-08	3.304E-08	2.776E-08
WSW	8.162E-11	8.890E-09	4.865E-08	1.039E-07	1.689E-07	1.077E-07	7.519E-08	5.603E-08	4.376E-08	3.540E-08	2.943E-08
W	4.892E-09	8.786E-08	2.229E-07	2.549E-07	2.173E-07	1.330E-07	9.024E-08	6.571E-08	5.036E-08	4.009E-08	3.286E-08
WNW	7.866E-11	1.078E-08	1.291E-07	2.457E-07	3.072E-07	1.867E-07	1.263E-07	9.608E-08	7.643E-08	6.059E-08	4.953E-08
NW	7.341E-10	5.800E-09	8.805E-08	2.480E-07	4.175E-07	2.459E-07	1.631E-07	1.193E-07	9.175E-08	7.224E-08	5.870E-08
NNW	3.292E-09	8.846E-09	3.905E-08	8.216E-08	1.401E-07	1.430E-07	1.327E-07	1.175E-07	1.040E-07	8.203E-08	6.678E-08
N	1.289E-08	3.660E-08	4.986E-08	5.490E-08	5.815E-08	5.456E-08	4.841E-08	4.149E-08	3.579E-08	3.119E-08	2.746E-08
NNE	5.193E-09	6.811E-09	2.289E-08	3.853E-08	4.914E-08	4.572E-08	3.955E-08	3.378E-08	2.899E-08	2.512E-08	2.202E-08
NE	6.344E-16	6.154E-10	1.014E-08	1.995E-08	2.599E-08	2.395E-08	2.055E-08	1.746E-08	1.493E-08	1.292E-08	1.131E-08
ENE	5.107E-16	5.938E-10	1.046E-08	2.118E-08	2.819E-08	2.619E-08	2.256E-08	1.919E-08	1.641E-08	1.418E-08	1.240E-08
E	4.835E-16	5.477E-10	9.844E-09	2.028E-08	2.739E-08	2.548E-08	2.187E-08	1.854E-08	1.580E-08	1.362E-08	1.188E-08
ESE	7.517E-16	7.146E-10	1.205E-08	2.390E-08	3.096E-08	2.821E-08	2.394E-08	2.013E-08	1.705E-08	1.463E-08	1.271E-08
SE	2.939E-11	3.231E-09	2.717E-08	4.912E-08	5.978E-08	5.282E-08	4.392E-08	3.637E-08	3.045E-08	2.585E-08	2.226E-08
SSE	1.073E-11	3.620E-09	4.741E-08	8.792E-08	1.061E-07	9.272E-08	7.635E-08	6.270E-08	5.209E-08	4.393E-08	3.760E-08

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.436E-08	2.664E-08	1.699E-08	9.491E-09	6.423E-09	4.733E-09	3.647E-09	2.929E-09	2.433E-09	2.065E-09	1.779E-09
SSW	2.203E-08	1.555E-08	1.000E-08	5.659E-09	3.936E-09	2.917E-09	2.259E-09	1.822E-09	1.514E-09	1.286E-09	1.112E-09
SW	2.573E-08	2.043E-08	1.351E-08	7.923E-09	5.722E-09	4.410E-09	3.554E-09	2.891E-09	2.419E-09	2.069E-09	1.799E-09
WSW	2.628E-08	1.812E-08	1.323E-08	8.397E-09	5.695E-09	4.224E-09	3.313E-09	2.700E-09	2.263E-09	1.939E-09	1.688E-09
W	2.757E-08	1.472E-08	1.023E-08	6.404E-09	4.605E-09	3.389E-09	2.633E-09	2.129E-09	1.773E-09	1.509E-09	1.307E-09
WNW	4.194E-08	2.331E-08	1.580E-08	9.567E-09	6.547E-09	4.882E-09	3.856E-09	3.147E-09	2.631E-09	2.243E-09	1.946E-09
NW	4.932E-08	2.650E-08	1.758E-08	1.027E-08	6.853E-09	5.016E-09	3.929E-09	3.181E-09	2.644E-09	2.246E-09	1.942E-09
NNW	5.677E-08	3.178E-08	2.062E-08	1.183E-08	7.999E-09	5.915E-09	4.663E-09	3.814E-09	3.231E-09	2.773E-09	2.408E-09
N	2.449E-08	1.588E-08	1.338E-08	1.067E-08	8.727E-09	7.071E-09	5.554E-09	4.519E-09	3.775E-09	3.223E-09	2.799E-09
NNE	2.410E-08	3.319E-08	2.151E-08	1.233E-08	8.346E-09	6.179E-09	4.839E-09	3.940E-09	3.299E-09	2.823E-09	2.456E-09
NE	1.243E-08	1.858E-08	1.208E-08	6.959E-09	4.725E-09	3.507E-09	2.780E-09	2.282E-09	1.924E-09	1.647E-09	1.434E-09
ENE	1.304E-08	1.721E-08	1.136E-08	6.664E-09	4.570E-09	3.415E-09	2.826E-09	2.384E-09	1.999E-09	1.713E-09	1.492E-09
E	1.244E-08	1.507E-08	9.857E-09	5.701E-09	3.872E-09	2.871E-09	2.250E-09	1.833E-09	1.573E-09	1.369E-09	1.189E-09
ESE	1.289E-08	1.420E-08	9.374E-09	5.478E-09	3.743E-09	2.787E-09	2.192E-09	1.789E-09	1.502E-09	1.287E-09	1.121E-09
SE	1.942E-08	1.162E-08	8.752E-09	6.068E-09	4.356E-09	3.366E-09	2.725E-09	2.277E-09	1.899E-09	1.617E-09	1.402E-09
SSE	3.769E-08	3.188E-08	2.015E-08	1.115E-08	7.347E-09	5.328E-09	4.102E-09	3.291E-09	2.721E-09	2.302E-09	1.983E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	5.517E-08	8.297E-08	6.401E-08	4.885E-08	4.797E-08	2.629E-08	9.793E-09	4.749E-09	2.945E-09	2.068E-09
SSW	1.953E-08	3.657E-08	3.281E-08	3.061E-08	2.448E-08	1.452E-08	5.858E-09	2.925E-09	1.829E-09	1.289E-09
SW	5.083E-08	1.035E-07	6.665E-08	4.049E-08	2.857E-08	1.853E-08	8.186E-09	4.417E-09	2.901E-09	2.073E-09
WSW	6.437E-08	1.272E-07	7.618E-08	4.408E-08	3.003E-08	1.776E-08	8.270E-09	4.252E-09	2.709E-09	1.942E-09
W	2.071E-07	1.882E-07	9.184E-08	5.083E-08	3.304E-08	1.558E-08	6.454E-09	3.411E-09	2.137E-09	1.512E-09
WNW	1.547E-07	2.400E-07	1.303E-07	7.601E-08	5.000E-08	2.411E-08	9.609E-09	4.916E-09	3.153E-09	2.248E-09
NW	1.409E-07	3.036E-07	1.677E-07	9.218E-08	5.924E-08	2.761E-08	1.038E-08	5.071E-09	3.190E-09	2.252E-09
NNW	5.150E-08	1.285E-07	1.294E-07	9.950E-08	6.759E-08	3.238E-08	1.208E-08	5.970E-09	3.835E-09	2.773E-09
N	4.915E-08	5.583E-08	4.728E-08	3.567E-08	2.746E-08	1.668E-08	1.041E-08	6.906E-09	4.531E-09	3.229E-09
NNE	2.627E-08	4.526E-08	3.889E-08	2.888E-08	2.371E-08	2.598E-08	1.260E-08	6.221E-09	3.953E-09	2.828E-09
NE	1.238E-08	2.374E-08	2.022E-08	1.489E-08	1.220E-08	1.432E-08	7.103E-09	3.541E-09	2.288E-09	1.650E-09
ENE	1.303E-08	2.574E-08	2.218E-08	1.636E-08	1.317E-08	1.368E-08	6.778E-09	3.487E-09	2.364E-09	1.716E-09
E	1.242E-08	2.496E-08	2.150E-08	1.575E-08	1.260E-08	1.217E-08	5.812E-09	2.889E-09	1.853E-09	1.363E-09
ESE	1.480E-08	2.817E-08	2.355E-08	1.701E-08	1.334E-08	1.176E-08	5.573E-09	2.804E-09	1.795E-09	1.289E-09
SE	3.161E-08	5.432E-08	4.328E-08	3.039E-08	2.227E-08	1.208E-08	5.904E-09	3.374E-09	2.261E-09	1.621E-09
SSE	5.569E-08	9.613E-08	7.525E-08	5.201E-08	3.951E-08	2.796E-08	1.146E-08	5.376E-09	3.306E-09	2.308E-09

B295

ERP ELEVATED STACK RELEASES - JAN-JUN 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	1.401E-10	1.224E-08	5.104E-08	7.959E-08	9.060E-08	7.854E-08	6.467E-08	5.320E-08	4.430E-08	4.891E-08	5.051E-08
SSW	9.271E-16	9.418E-10	1.592E-08	3.147E-08	4.022E-08	3.616E-08	3.034E-08	3.224E-08	3.204E-08	2.754E-08	2.402E-08
SW	8.354E-11	6.181E-09	3.734E-08	8.307E-08	1.329E-07	9.066E-08	6.579E-08	5.023E-08	3.988E-08	3.264E-08	2.738E-08
WSW	8.158E-11	8.881E-09	4.859E-08	1.037E-07	1.684E-07	1.072E-07	7.479E-08	5.567E-08	4.343E-08	3.510E-08	2.915E-08
W	4.889E-09	8.779E-08	2.226E-07	2.544E-07	2.166E-07	1.324E-07	8.971E-08	6.524E-08	4.993E-08	3.970E-08	3.250E-08
WNW	7.865E-11	1.077E-08	1.290E-07	2.453E-07	3.064E-07	1.860E-07	1.257E-07	9.553E-08	7.590E-08	6.010E-08	4.908E-08
NW	7.340E-10	5.797E-09	8.795E-08	2.476E-07	4.163E-07	2.449E-07	1.623E-07	1.185E-07	9.104E-08	7.159E-08	5.810E-08
NNW	3.292E-09	8.843E-09	3.902E-08	8.204E-08	1.398E-07	1.425E-07	1.321E-07	1.168E-07	1.032E-07	8.126E-08	6.607E-08
N	1.289E-08	3.659E-08	4.982E-08	5.484E-08	5.804E-08	5.441E-08	4.824E-08	4.131E-08	3.561E-08	3.100E-08	2.727E-08
NNE	5.192E-09	6.808E-09	2.287E-08	3.847E-08	4.901E-08	4.556E-08	3.937E-08	3.359E-08	2.879E-08	2.493E-08	2.183E-08
NE	6.342E-16	6.150E-10	1.013E-08	1.993E-08	2.594E-08	2.388E-08	2.048E-08	1.738E-08	1.486E-08	1.284E-08	1.123E-08
ENE	5.106E-16	5.933E-10	1.045E-08	2.114E-08	2.811E-08	2.609E-08	2.245E-08	1.907E-08	1.629E-08	1.407E-08	1.228E-08
E	4.834E-16	5.473E-10	9.831E-09	2.025E-08	2.731E-08	2.537E-08	2.176E-08	1.842E-08	1.569E-08	1.350E-08	1.177E-08
ESE	7.516E-16	7.142E-10	1.203E-08	2.386E-08	3.088E-08	2.810E-08	2.382E-08	2.001E-08	1.694E-08	1.451E-08	1.260E-08
SE	2.938E-11	3.229E-09	2.715E-08	4.906E-08	5.966E-08	5.267E-08	4.375E-08	3.620E-08	3.028E-08	2.569E-08	2.210E-08
SSE	1.073E-11	3.618E-09	4.737E-08	8.782E-08	1.060E-07	9.249E-08	7.611E-08	6.246E-08	5.186E-08	4.370E-08	3.738E-08

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.402E-08	2.632E-08	1.672E-08	9.263E-09	6.218E-09	4.544E-09	3.473E-09	2.766E-09	2.279E-09	1.919E-09	1.640E-09
SSW	2.177E-08	1.525E-08	9.741E-09	5.437E-09	3.730E-09	2.727E-09	2.085E-09	1.660E-09	1.362E-09	1.142E-09	9.756E-10
SW	2.532E-08	1.990E-08	1.305E-08	7.520E-09	5.340E-09	4.049E-09	3.210E-09	2.571E-09	2.119E-09	1.785E-09	1.530E-09
WSW	2.600E-08	1.782E-08	1.293E-08	8.106E-09	5.433E-09	3.982E-09	3.087E-09	2.486E-09	2.060E-09	1.744E-09	1.501E-09
W	2.723E-08	1.445E-08	9.965E-09	6.158E-09	4.370E-09	3.175E-09	2.436E-09	1.946E-09	1.601E-09	1.347E-09	1.154E-09
WNW	4.151E-08	2.294E-08	1.545E-08	9.243E-09	6.251E-09	4.606E-09	3.595E-09	2.900E-09	2.396E-09	2.020E-09	1.733E-09
NW	4.875E-08	2.602E-08	1.715E-08	9.888E-09	6.512E-09	4.707E-09	3.640E-09	2.911E-09	2.390E-09	2.007E-09	1.715E-09
NNW	5.610E-08	3.119E-08	2.010E-08	1.138E-08	7.599E-09	5.549E-09	4.319E-09	3.489E-09	2.918E-09	2.473E-09	2.122E-09
N	2.430E-08	1.570E-08	1.317E-08	1.040E-08	8.412E-09	6.742E-09	5.245E-09	4.227E-09	3.499E-09	2.960E-09	2.548E-09
NNE	2.387E-08	3.263E-08	2.103E-08	1.193E-08	7.986E-09	5.851E-09	4.536E-09	3.656E-09	3.032E-09	2.569E-09	2.214E-09
NE	1.234E-08	1.831E-08	1.185E-08	6.760E-09	4.547E-09	3.344E-09	2.627E-09	2.137E-09	1.785E-09	1.515E-09	1.308E-09
ENE	1.291E-08	1.691E-08	1.110E-08	6.429E-09	4.355E-09	3.215E-09	2.624E-09	2.184E-09	1.809E-09	1.531E-09	1.318E-09
E	1.230E-08	1.472E-08	9.548E-09	5.432E-09	3.629E-09	2.648E-09	2.043E-09	1.639E-09	1.383E-09	1.185E-09	1.014E-09
ESE	1.275E-08	1.395E-08	9.155E-09	5.287E-09	3.571E-09	2.629E-09	2.044E-09	1.651E-09	1.370E-09	1.162E-09	1.002E-09
SE	1.925E-08	1.146E-08	8.577E-09	5.853E-09	4.139E-09	3.150E-09	2.512E-09	2.068E-09	1.701E-09	1.431E-09	1.224E-09
SSE	3.744E-08	3.145E-08	1.979E-08	1.084E-08	7.078E-09	5.084E-09	3.877E-09	3.082E-09	2.524E-09	2.115E-09	1.805E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	5.510E-08	8.279E-08	6.378E-08	4.860E-08	4.763E-08	2.599E-08	9.566E-09	4.562E-09	2.783E-09	1.922E-09
SSW	1.950E-08	3.647E-08	3.265E-08	3.038E-08	2.423E-08	1.425E-08	5.635E-09	2.737E-09	1.668E-09	1.146E-09
SW	5.074E-08	1.031E-07	6.619E-08	4.008E-08	2.818E-08	1.806E-08	7.779E-09	4.057E-09	2.581E-09	1.790E-09
WSW	6.426E-08	1.268E-07	7.579E-08	4.375E-08	2.974E-08	1.746E-08	7.990E-09	4.011E-09	2.495E-09	1.748E-09
W	2.068E-07	1.876E-07	9.131E-08	5.041E-08	3.268E-08	1.530E-08	6.209E-09	3.198E-09	1.955E-09	1.351E-09
WNW	1.544E-07	2.393E-07	1.297E-07	7.549E-08	4.954E-08	2.374E-08	9.292E-09	4.640E-09	2.906E-09	2.025E-09
NW	1.407E-07	3.027E-07	1.668E-07	9.147E-08	5.863E-08	2.713E-08	1.000E-08	4.762E-09	2.921E-09	2.012E-09
NNW	5.143E-08	1.281E-07	1.287E-07	9.871E-08	6.688E-08	3.180E-08	1.164E-08	5.604E-09	3.509E-09	2.475E-09
N	4.911E-08	5.572E-08	4.711E-08	3.548E-08	2.728E-08	1.649E-08	1.013E-08	6.588E-09	4.241E-09	2.967E-09
NNE	2.623E-08	4.513E-08	3.871E-08	2.869E-08	2.350E-08	2.553E-08	1.220E-08	5.894E-09	3.670E-09	2.575E-09
NE	1.237E-08	2.369E-08	2.015E-08	1.481E-08	1.212E-08	1.411E-08	6.907E-09	3.378E-09	2.143E-09	1.518E-09
ENE	1.301E-08	2.566E-08	2.207E-08	1.624E-08	1.304E-08	1.344E-08	6.545E-09	3.283E-09	2.167E-09	1.535E-09
E	1.240E-08	2.488E-08	2.139E-08	1.564E-08	1.248E-08	1.188E-08	5.545E-09	2.668E-09	1.657E-09	1.180E-09
ESE	1.477E-08	2.809E-08	2.344E-08	1.689E-08	1.322E-08	1.155E-08	5.384E-09	2.646E-09	1.656E-09	1.164E-09
SE	3.157E-08	5.419E-08	4.311E-08	3.022E-08	2.211E-08	1.191E-08	5.697E-09	3.158E-09	2.055E-09	1.434E-09
SSE	5.563E-08	9.594E-08	7.502E-08	5.178E-08	3.927E-08	2.760E-08	1.116E-08	5.133E-09	3.097E-09	2.122E-09

B296

ERP ELEVATED STACK RELEASES - JAN-JUN 2018
8.000 DAY DECAY, DEPLETED
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	
S	1.401E-10	1.216E-08	5.072E-08	7.929E-08	8.970E-08	7.716E-08	6.306E-08	5.151E-08	4.262E-08	4.695E-08	4.843E-08	
SSW	9.273E-16	9.422E-10	1.594E-08	3.150E-08	3.993E-08	3.560E-08	2.964E-08	3.134E-08	3.104E-08	2.656E-08	2.308E-08	
SW	8.356E-11	6.134E-09	3.714E-08	8.295E-08	1.317E-07	8.918E-08	6.435E-08	4.892E-08	3.871E-08	3.160E-08	2.644E-08	
WSW	8.161E-11	8.813E-09	4.823E-08	1.033E-07	1.666E-07	1.054E-07	7.314E-08	5.423E-08	4.218E-08	3.400E-08	2.818E-08	
W	4.891E-09	8.662E-08	2.202E-07	2.511E-07	2.124E-07	1.289E-07	8.681E-08	6.283E-08	4.790E-08	3.795E-08	3.098E-08	
WNW	7.866E-11	1.075E-08	1.289E-07	2.436E-07	3.020E-07	1.819E-07	1.222E-07	9.253E-08	7.333E-08	5.782E-08	4.700E-08	
NW	7.341E-10	5.760E-09	8.787E-08	2.468E-07	4.118E-07	2.402E-07	1.582E-07	1.150E-07	8.806E-08	6.894E-08	5.568E-08	
NNW	3.292E-09	8.775E-09	3.882E-08	8.191E-08	1.388E-07	1.409E-07	1.304E-07	1.152E-07	1.018E-07	7.992E-08	6.472E-08	
N	1.289E-08	3.628E-08	4.908E-08	5.420E-08	5.731E-08	5.355E-08	4.731E-08	4.039E-08	3.472E-08	3.016E-08	2.648E-08	
NNE	5.193E-09	6.758E-09	2.275E-08	3.838E-08	4.862E-08	4.491E-08	3.858E-08	3.275E-08	2.795E-08	2.411E-08	2.104E-08	
NE	6.344E-16	6.153E-10	1.013E-08	1.995E-08	2.576E-08	2.355E-08	2.006E-08	1.694E-08	1.441E-08	1.240E-08	1.081E-08	
ENE	5.107E-16	5.937E-10	1.046E-08	2.117E-08	2.793E-08	2.573E-08	2.200E-08	1.859E-08	1.580E-08	1.359E-08	1.182E-08	
E	4.835E-16	5.476E-10	9.840E-09	2.117E-08	2.713E-08	2.501E-08	2.130E-08	1.793E-08	1.518E-08	1.301E-08	1.129E-08	
ESE	7.517E-16	7.145E-10	1.204E-08	2.389E-08	3.066E-08	2.769E-08	2.331E-08	1.945E-08	1.638E-08	1.396E-08	1.206E-08	
SE	2.939E-11	3.216E-09	2.711E-08	4.904E-08	5.918E-08	5.182E-08	4.271E-08	3.509E-08	2.917E-08	2.460E-08	2.105E-08	
SSE	1.073E-11	3.615E-09	4.738E-08	8.788E-08	1.051E-07	9.097E-08	7.424E-08	6.047E-08	4.986E-08	4.174E-08	3.549E-08	

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
S	4.206E-08	2.465E-08	1.522E-08	8.006E-09	5.087E-09	3.557E-09	2.628E-09	2.032E-09	1.633E-09	1.345E-09	1.127E-09	
SSW	2.088E-08	1.448E-08	9.010E-09	4.779E-09	3.109E-09	2.206E-09	1.645E-09	1.282E-09	1.032E-09	8.510E-10	7.155E-10	
SW	2.448E-08	1.923E-08	1.229E-08	6.722E-09	4.486E-09	3.234E-09	2.498E-09	1.959E-09	1.584E-09	1.312E-09	1.108E-09	
WSW	2.513E-08	1.700E-08	1.203E-08	7.220E-09	4.675E-09	3.332E-09	2.523E-09	1.991E-09	1.620E-09	1.350E-09	1.146E-09	
W	2.589E-08	1.359E-08	9.275E-09	5.488E-09	3.722E-09	2.630E-09	1.971E-09	1.542E-09	1.246E-09	1.031E-09	8.698E-10	
WNW	3.957E-08	2.132E-08	1.398E-08	7.908E-09	5.006E-09	3.519E-09	2.664E-09	2.097E-09	1.695E-09	1.401E-09	1.181E-09	
NW	4.650E-08	2.418E-08	1.551E-08	8.491E-09	5.315E-09	3.685E-09	2.766E-09	2.161E-09	1.738E-09	1.433E-09	1.204E-09	
NNW	5.472E-08	2.965E-08	1.856E-08	9.884E-09	6.142E-09	4.228E-09	3.135E-09	2.440E-09	1.988E-09	1.650E-09	1.389E-09	
N	2.356E-08	1.514E-08	1.273E-08	1.014E-08	8.089E-09	6.231E-09	4.743E-09	3.751E-09	3.053E-09	2.544E-09	2.160E-09	
NNE	2.304E-08	3.174E-08	1.986E-08	1.073E-08	6.870E-09	4.854E-09	3.649E-09	2.863E-09	2.318E-09	1.922E-09	1.624E-09	
NE	1.190E-08	1.783E-08	1.119E-08	6.077E-09	3.911E-09	2.775E-09	2.118E-09	1.682E-09	1.377E-09	1.147E-09	9.738E-10	
ENE	1.243E-08	1.646E-08	1.052E-08	5.753E-09	3.646E-09	2.548E-09	1.985E-09	1.596E-09	1.289E-09	1.066E-09	8.988E-10	
E	1.181E-08	1.431E-08	9.047E-09	4.884E-09	3.070E-09	2.131E-09	1.576E-09	1.217E-09	9.943E-10	8.277E-10	6.924E-10	
ESE	1.221E-08	1.348E-08	8.618E-09	4.723E-09	3.003E-09	2.103E-09	1.566E-09	1.217E-09	9.763E-10	8.021E-10	6.717E-10	
SE	1.826E-08	1.069E-08	7.945E-09	5.427E-09	3.842E-09	2.936E-09	2.355E-09	1.945E-09	1.583E-09	1.318E-09	1.118E-09	
SSE	3.544E-08	2.951E-08	1.800E-08	9.380E-09	5.863E-09	4.062E-09	3.004E-09	2.324E-09	1.858E-09	1.524E-09	1.275E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	5.485E-08	8.181E-08	6.220E-08	4.681E-08	4.563E-08	2.433E-08	8.313E-09	3.593E-09	2.050E-09	1.350E-09
SSW	1.952E-08	3.614E-08	3.191E-08	2.942E-08	2.330E-08	1.347E-08	4.977E-09	2.222E-09	1.291E-09	8.545E-10
SW	5.061E-08	1.020E-07	6.480E-08	3.892E-08	2.724E-08	1.731E-08	6.966E-09	3.273E-09	1.970E-09	1.317E-09
WSW	6.394E-08	1.253E-07	7.417E-08	4.250E-08	2.877E-08	1.660E-08	7.159E-09	3.366E-09	2.002E-09	1.354E-09
W	2.043E-07	1.839E-07	8.844E-08	4.838E-08	3.116E-08	1.441E-08	5.544E-09	2.657E-09	1.552E-09	1.035E-09
WNW	1.536E-07	2.356E-07	1.262E-07	7.291E-08	4.745E-08	2.212E-08	7.967E-09	3.573E-09	2.106E-09	1.407E-09
NW	1.403E-07	2.989E-07	1.628E-07	8.847E-08	5.621E-08	2.529E-08	8.639E-09	3.752E-09	2.173E-09	1.439E-09
NNW	5.129E-08	1.271E-07	1.271E-07	9.730E-08	6.552E-08	3.029E-08	1.015E-08	4.301E-09	2.466E-09	1.653E-09
N	4.851E-08	5.495E-08	4.620E-08	3.460E-08	2.649E-08	1.594E-08	9.806E-09	6.131E-09	3.768E-09	2.553E-09
NNE	2.614E-08	4.470E-08	3.794E-08	2.786E-08	2.269E-08	1.453E-08	1.104E-08	4.909E-09	2.880E-09	1.929E-09
NE	1.238E-08	2.348E-08	1.974E-08	1.437E-08	1.169E-08	1.356E-08	6.251E-09	2.815E-09	1.691E-09	1.151E-09
ENE	1.303E-08	2.545E-08	2.163E-08	1.576E-08	1.257E-08	1.292E-08	5.875E-09	2.616E-09	1.590E-09	1.070E-09
E	1.241E-08	2.467E-08	2.094E-08	1.514E-08	1.199E-08	1.141E-08	5.003E-09	2.159E-09	1.235E-09	8.269E-10
ESE	1.479E-08	2.784E-08	2.293E-08	1.634E-08	1.268E-08	1.104E-08	4.824E-09	2.128E-09	1.225E-09	8.054E-10
SE	3.155E-08	5.366E-08	4.209E-08	2.912E-08	2.107E-08	1.115E-08	5.282E-09	2.945E-09	1.924E-09	1.323E-09
SSE	5.565E-08	9.500E-08	7.319E-08	4.980E-08	3.732E-08	2.571E-08	9.733E-09	4.119E-09	2.341E-09	1.531E-09

B297

ERP ELEVATED STACK RELEASES - JAN-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****												
DIRECTION FROM SITE	DISTANCES IN MILES											
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	
S	1.372E-09	2.090E-09	3.219E-09	3.051E-09	1.829E-09	1.211E-09	8.502E-10	6.227E-10	4.709E-10	3.855E-10	3.519E-10	
SSW	8.190E-11	4.913E-10	1.046E-09	1.084E-09	6.769E-10	4.539E-10	3.206E-10	2.355E-10	2.248E-10	1.700E-10	1.330E-10	
SW	7.043E-10	8.137E-10	1.048E-09	9.286E-10	9.762E-10	5.347E-10	3.329E-10	2.268E-10	1.642E-10	1.244E-10	9.739E-11	
WSW	6.983E-10	7.778E-10	9.716E-10	1.642E-09	9.186E-10	4.978E-10	3.075E-10	2.084E-10	1.504E-10	1.137E-10	8.893E-11	
W	1.879E-09	5.430E-09	4.469E-09	2.882E-09	1.398E-09	7.406E-10	4.521E-10	3.041E-10	2.187E-10	1.652E-10	1.296E-10	
WNN	3.615E-10	8.041E-10	4.712E-09	3.587E-09	2.238E-09	1.130E-09	6.724E-10	4.484E-10	3.332E-10	2.560E-10	2.078E-10	
NW	6.371E-10	1.093E-09	1.779E-09	4.257E-09	2.813E-09	1.400E-09	8.257E-10	5.459E-10	3.927E-10	3.017E-10	2.448E-10	
NNW	1.518E-09	1.600E-09	1.901E-09	1.624E-09	1.695E-09	9.219E-10	5.780E-10	4.787E-10	3.539E-10	2.807E-10	2.358E-10	
N	4.763E-09	4.011E-09	3.612E-09	2.610E-09	1.323E-09	8.249E-10	5.625E-10	4.058E-10	3.046E-10	2.356E-10	1.865E-10	
NNE	1.130E-09	1.319E-09	1.713E-09	1.523E-09	8.828E-10	5.781E-10	4.039E-10	2.950E-10	2.228E-10	1.728E-10	1.368E-10	
NE	5.260E-11	3.156E-10	6.719E-10	6.960E-10	4.347E-10	2.915E-10	2.059E-10	1.513E-10	1.146E-10	8.891E-11	7.041E-11	
ENE	5.060E-11	3.036E-10	6.464E-10	6.696E-10	4.182E-10	2.804E-10	1.981E-10	1.455E-10	1.102E-10	8.554E-11	6.774E-11	
E	4.861E-11	2.916E-10	6.209E-10	6.431E-10	4.017E-10	2.694E-10	1.903E-10	1.398E-10	1.059E-10	8.216E-11	6.507E-11	
ESE	6.459E-11	3.875E-10	8.250E-10	8.546E-10	5.338E-10	3.579E-10	2.528E-10	1.857E-10	1.407E-10	1.092E-10	8.646E-11	
SE	4.068E-10	1.076E-09	2.017E-09	2.026E-09	1.248E-09	8.336E-10	5.877E-10	4.313E-10	3.265E-10	2.534E-10	2.007E-10	
SSE	4.228E-10	1.854E-09	3.811E-09	3.916E-09	2.437E-09	1.633E-09	1.153E-09	8.465E-10	6.411E-10	4.975E-10	3.940E-10	
DIRECTION FROM SITE	DISTANCES IN MILES											
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	
S	2.829E-10	1.679E-10	1.089E-10	6.007E-11	3.746E-11	3.008E-11	2.154E-11	1.616E-11	1.280E-11	1.021E-11	8.337E-12	
SSW	1.074E-10	6.563E-11	4.292E-11	2.385E-11	1.669E-11	1.178E-11	8.445E-12	6.343E-12	4.968E-12	3.969E-12	3.239E-12	
SW	7.958E-11	6.392E-11	4.497E-11	2.670E-11	1.698E-11	1.161E-11	8.279E-12	6.216E-12	4.833E-12	3.861E-12	3.151E-12	
WSW	7.227E-11	6.153E-11	4.396E-11	2.716E-11	1.643E-11	1.102E-11	7.956E-12	5.974E-12	4.645E-12	3.710E-12	3.028E-12	
W	1.050E-10	4.897E-11	5.265E-11	3.152E-11	2.034E-11	1.387E-11	9.941E-12	7.464E-12	5.804E-12	4.636E-12	3.784E-12	
WNN	1.776E-10	1.033E-10	7.244E-11	4.285E-11	2.842E-11	1.836E-11	1.332E-11	1.000E-11	7.813E-12	6.241E-12	5.094E-12	
NW	2.088E-10	1.211E-10	8.480E-11	5.336E-11	3.256E-11	2.179E-11	1.565E-11	1.175E-11	9.182E-12	7.335E-12	5.987E-12	
NNW	2.080E-10	1.341E-10	9.859E-11	6.064E-11	3.882E-11	2.577E-11	1.790E-11	1.304E-11	9.951E-12	7.949E-12	6.489E-12	
N	1.505E-10	7.168E-11	4.397E-11	2.346E-11	6.543E-11	3.830E-11	2.736E-11	2.055E-11	1.598E-11	1.276E-11	1.042E-11	
NNE	1.103E-10	1.848E-10	1.133E-10	5.818E-11	3.539E-11	2.370E-11	1.695E-11	1.270E-11	9.862E-12	7.869E-12	6.417E-12	
NE	5.671E-11	1.007E-10	6.171E-11	3.163E-11	1.923E-11	1.288E-11	9.399E-12	7.026E-12	5.462E-12	4.363E-12	3.561E-12	
ENE	5.456E-11	6.307E-11	4.581E-11	2.787E-11	1.776E-11	1.176E-11	8.257E-12	5.801E-12	4.509E-12	3.603E-12	2.942E-12	
E	5.240E-11	5.500E-11	3.921E-11	2.350E-11	1.492E-11	9.892E-12	6.959E-12	5.114E-12	3.910E-12	3.188E-12	2.598E-12	
ESE	6.963E-11	6.532E-11	4.543E-11	2.668E-11	1.686E-11	1.119E-11	7.893E-12	5.819E-12	4.461E-12	3.524E-12	2.851E-12	
SE	1.616E-10	7.655E-11	4.666E-11	2.453E-11	1.492E-11	1.020E-11	7.552E-12	1.170E-11	9.026E-12	7.173E-12	5.841E-12	
SSE	3.173E-10	2.935E-10	1.785E-10	9.073E-11	5.501E-11	3.687E-11	2.641E-11	1.982E-11	1.540E-11	1.230E-11	1.004E-11	

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****										
DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	2.893E-09	1.826E-09	8.554E-10	4.817E-10	3.363E-10	1.672E-10	6.086E-11	2.863E-11	1.642E-11	1.029E-11
SSW	9.395E-10	6.681E-10	3.221E-10	2.070E-10	1.345E-10	6.482E-11	2.491E-11	1.176E-11	6.420E-12	3.995E-12
SW	9.429E-10	7.694E-10	3.443E-10	1.669E-10	9.878E-11	5.898E-11	2.644E-11	1.171E-11	6.279E-12	3.886E-12
WSW	1.227E-09	8.924E-10	3.186E-10	1.530E-10	9.009E-11	5.611E-11	2.612E-11	1.124E-11	6.034E-12	3.735E-12
W	3.978E-09	1.436E-09	4.698E-10	2.227E-10	1.310E-10	6.305E-11	3.124E-11	1.402E-11	7.539E-12	4.666E-12
WNN	3.343E-09	2.045E-09	7.048E-10	3.367E-10	2.109E-10	1.061E-10	4.301E-11	1.903E-11	1.012E-11	6.282E-12
NW	2.728E-09	2.506E-09	8.670E-10	4.018E-10	2.483E-10	1.245E-10	5.110E-11	2.220E-11	1.188E-11	7.383E-12
NNW	1.711E-09	1.335E-09	6.300E-10	3.617E-10	2.388E-10	1.347E-10	5.938E-11	2.611E-11	1.325E-11	8.002E-12
N	3.255E-09	1.388E-09	5.698E-10	3.072E-10	1.877E-10	7.689E-11	4.667E-11	4.116E-11	2.075E-11	1.285E-11
NNE	1.541E-09	8.896E-10	4.068E-10	2.244E-10	1.376E-10	1.365E-10	6.031E-11	2.412E-11	1.283E-11	7.922E-12
NE	6.034E-10	4.291E-10	2.069E-10	1.153E-10	7.082E-11	7.361E-11	3.280E-11	1.318E-11	7.108E-12	4.392E-12
ENE	5.805E-10	4.128E-10	1.990E-10	1.109E-10	6.813E-11	5.351E-11	2.736E-11	1.196E-11	6.011E-12	3.627E-12
E	5.576E-10	3.965E-10	1.912E-10	1.065E-10	6.544E-11	4.740E-11	2.318E-11	1.006E-11	5.182E-12	3.183E-12
ESE	7.409E-10	5.269E-10	2.540E-10	1.415E-10	8.696E-11	5.744E-11	2.648E-11	1.138E-11	5.894E-12	3.552E-12
SE	1.812E-09	1.237E-09	5.907E-10	3.286E-10	2.018E-10	8.217E-11	2.517E-11	1.040E-11	9.497E-12	7.229E-12
SSE	3.423E-09	2.408E-09	1.158E-09	6.451E-10	3.963E-10	2.477E-10	9.436E-11	3.752E-11	2.002E-11	1.238E-11

B298

ERP ELEVATED STACK RELEASES - JAN-JUN 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST							
RELEASE ID	TYPE OF LOCATION	DIRECTION FROM SITE (MI)	DIST. (MI)	X/Q (SEC/M3) NO DEPLETION	X/Q (SEC/M3) 2.26 DAY DEPLETION	X/Q (SEC/M3) 8.0 DAY DEPLETION	D/Q (PER SQ. METER)
			UNDEPLETED	UNDEPLETED	DEPLETED		
A	Site Boundary	S	.80	5.8E-08	5.8E-08	5.8E-08	3.3E-09
A	Site Boundary	SSW	.82	2.1E-08	2.1E-08	2.1E-08	1.1E-09
A	Site Boundary	SW	.97	7.9E-08	7.9E-08	7.9E-08	9.6E-10
A	Site Boundary	WSW	.93	8.8E-08	8.8E-08	8.7E-08	1.4E-09
A	Site Boundary	W	.91	2.5E-07	2.5E-07	2.5E-07	3.2E-09
A	Site Boundary	WNW	.94	2.2E-07	2.2E-07	2.2E-07	4.0E-09
A	Site Boundary	NW	.81	1.3E-07	1.3E-07	1.3E-07	1.8E-09
A	Site Boundary	NNW	.69	2.7E-08	2.7E-08	2.7E-08	1.8E-09
A	Site Boundary	N	.67	4.5E-08	4.5E-08	4.4E-08	3.7E-09
A	Site Boundary	NNE	.60	1.1E-08	1.1E-08	1.1E-08	1.5E-09
A	Site Boundary	NE	.62	3.9E-09	3.9E-09	3.9E-09	4.9E-10
A	Site Boundary	ENE	.59	2.5E-09	2.5E-09	2.5E-09	4.2E-10
A	Site Boundary	E	.53	8.9E-10	8.9E-10	8.9E-10	3.2E-10
A	Site Boundary	ESE	.54	1.4E-09	1.4E-09	1.4E-09	4.5E-10
A	Site Boundary	SE	.65	1.4E-08	1.4E-08	1.4E-08	1.6E-09
A	Site Boundary	SSE	.81	6.0E-08	6.0E-08	6.0E-08	4.0E-09
A	Nearest Res	SSW	3.00	3.2E-08	3.2E-08	3.1E-08	2.4E-10
A	Nearest Res	SW	1.00	8.3E-08	8.3E-08	8.3E-08	9.3E-10
A	Nearest Res	WSW	1.90	1.2E-07	1.2E-07	1.1E-07	5.6E-10
A	Nearest Res	W	1.00	2.5E-07	2.5E-07	2.5E-07	2.9E-09
A	Nearest Res	WNW	1.70	2.5E-07	2.5E-07	2.4E-07	1.7E-09
A	Nearest Res	NW	.90	1.8E-07	1.8E-07	1.8E-07	4.5E-09
A	Nearest Res	NNW	1.90	1.4E-07	1.4E-07	1.4E-07	1.0E-09
A	Nearest Res	N	2.90	4.3E-08	4.3E-08	4.2E-08	4.3E-10
A	Nearest Res	NNE	1.70	4.9E-08	4.8E-08	4.8E-08	7.3E-10
A	Nearest Res	ENE	1.70	2.8E-08	2.8E-08	2.8E-08	3.5E-10
A	Nearest Res	E	2.20	2.4E-08	2.4E-08	2.4E-08	2.3E-10
A	Nearest Res	SE	2.80	3.9E-08	3.9E-08	3.8E-08	4.9E-10
A	Nearest Cow	NNW	3.50	1.0E-07	1.0E-07	1.0E-07	3.5E-10
A	Nearest Garde	SSW	3.00	3.2E-08	3.2E-08	3.1E-08	2.4E-10
A	Nearest Garde	SW	2.20	8.0E-08	7.9E-08	7.8E-08	4.4E-10
A	Nearest Garde	WNW	1.70	2.5E-07	2.5E-07	2.4E-07	1.7E-09
A	Nearest Garde	NW	.90	1.8E-07	1.8E-07	1.8E-07	4.5E-09
A	Nearest Garde	NNW	2.80	1.2E-07	1.2E-07	1.2E-07	5.5E-10
A	Nearest Garde	E	2.20	2.4E-08	2.4E-08	2.4E-08	2.3E-10
A	Nearest Garde	ESE	2.20	2.7E-08	2.6E-08	2.6E-08	3.1E-10
A	Nearest Garde	SE	2.80	3.9E-08	3.9E-08	3.8E-08	4.9E-10
A	MAXIMUM CHI/Q	S	1.50	9.1E-08	9.1E-08	9.0E-08	1.8E-09
A	MAXIMUM CHI/Q	SSW	1.50	4.0E-08	4.0E-08	4.0E-08	6.8E-10
A	MAXIMUM CHI/Q	SW	1.50	1.3E-07	1.3E-07	1.3E-07	9.8E-10
A	MAXIMUM CHI/Q	WSW	1.50	1.7E-07	1.7E-07	1.7E-07	9.2E-10
A	MAXIMUM CHI/Q	W	1.00	2.5E-07	2.5E-07	2.5E-07	2.9E-09
A	MAXIMUM CHI/Q	WNW	1.50	3.1E-07	3.1E-07	3.0E-07	2.2E-09
A	MAXIMUM CHI/Q	NW	1.50	4.2E-07	4.2E-07	4.1E-07	2.8E-09
A	MAXIMUM CHI/Q	NNW	2.00	1.4E-07	1.4E-07	1.4E-07	9.2E-10
A	MAXIMUM CHI/Q	N	1.50	5.8E-08	5.8E-08	5.7E-08	1.3E-09
A	MAXIMUM CHI/Q	NNE	1.50	4.9E-08	4.9E-08	4.9E-08	8.8E-10
A	MAXIMUM CHI/Q	NE	1.50	2.6E-08	2.6E-08	2.6E-08	4.3E-10
A	MAXIMUM CHI/Q	ENE	1.50	2.8E-08	2.8E-08	2.8E-08	4.2E-10
A	MAXIMUM CHI/Q	E	1.50	2.7E-08	2.7E-08	2.7E-08	4.0E-10
A	MAXIMUM CHI/Q	ESE	1.50	3.1E-08	3.1E-08	3.1E-08	5.3E-10
A	MAXIMUM CHI/Q	SE	1.50	6.0E-08	6.0E-08	5.9E-08	1.2E-09
A	MAXIMUM CHI/Q	SSE	1.50	1.1E-07	1.1E-07	1.1E-07	2.4E-09

B299

Atmospheric Diffusion Estimates

Elevated Releases

July-September 2018

ERP ELEVATED STACK RELEASES - JUL-SEP 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	1.863E-15	2.252E-09	3.912E-08	7.785E-08	9.998E-07	9.008E-08	7.567E-08	6.305E-08	5.302E-08	6.030E-08	6.476E-08
SSW	1.490E-15	2.048E-09	3.778E-08	7.786E-08	1.034E-07	9.454E-08	8.007E-08	8.593E-08	8.698E-08	7.572E-08	6.692E-08
SW	1.467E-15	1.853E-09	7.911E-08	2.172E-07	3.473E-07	2.331E-07	1.665E-07	1.254E-07	9.833E-08	7.963E-08	6.615E-08
WSW	8.036E-16	1.130E-09	5.995E-08	1.794E-07	3.262E-07	2.078E-07	1.442E-07	1.065E-07	8.249E-08	6.617E-08	5.458E-08
W	1.440E-13	2.661E-08	1.580E-07	2.310E-07	2.460E-07	1.590E-07	1.114E-07	8.295E-08	6.459E-08	5.204E-08	4.307E-08
WNW	9.757E-15	6.403E-09	1.275E-07	2.723E-07	3.780E-07	2.366E-07	1.628E-07	1.254E-07	1.005E-07	7.993E-08	6.548E-08
NW	1.445E-15	1.564E-09	9.209E-08	2.854E-07	5.583E-07	3.368E-07	2.269E-07	1.683E-07	1.310E-07	1.038E-07	8.478E-08
NNW	1.613E-15	1.817E-09	5.661E-08	1.446E-07	2.512E-07	2.574E-07	2.424E-07	2.161E-07	1.902E-07	1.497E-07	1.217E-07
N	1.014E-10	7.212E-09	3.956E-08	7.021E-08	9.231E-08	9.018E-08	8.078E-08	6.943E-08	5.995E-08	5.227E-08	4.605E-08
NNE	2.415E-11	2.201E-09	1.836E-08	3.511E-08	4.691E-08	4.412E-08	3.834E-08	3.282E-08	2.820E-08	2.446E-08	2.146E-08
NE	3.961E-16	5.800E-10	1.122E-08	2.399E-08	3.375E-08	3.213E-08	2.799E-08	2.394E-08	2.053E-08	1.775E-08	1.552E-08
ENE	2.980E-16	4.331E-10	8.288E-09	1.793E-08	2.610E-08	2.553E-08	2.269E-08	1.970E-08	1.710E-08	1.493E-08	1.316E-08
E	4.448E-17	1.234E-10	3.229E-09	7.976E-09	1.262E-08	1.250E-08	1.105E-08	9.506E-09	8.161E-09	7.052E-09	6.153E-09
ESE	3.275E-16	3.229E-10	5.923E-09	1.239E-08	1.690E-08	1.572E-08	1.348E-08	1.142E-08	9.734E-09	8.393E-09	7.330E-09
SE	5.573E-16	6.918E-10	1.237E-08	2.480E-08	3.190E-08	2.876E-08	2.402E-08	2.024E-08	1.709E-08	1.463E-08	1.269E-08
SSE	1.150E-15	1.097E-09	1.851E-08	3.714E-08	4.977E-08	4.669E-08	4.051E-08	3.465E-08	2.975E-08	2.579E-08	2.260E-08

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	5.718E-08	3.539E-08	2.268E-08	1.275E-08	8.630E-09	6.356E-09	4.903E-09	3.940E-09	3.272E-09	2.777E-09	2.394E-09
SSW	6.163E-08	4.541E-08	2.932E-08	1.667E-08	1.164E-08	8.648E-09	6.706E-09	5.415E-09	4.505E-09	3.830E-09	3.314E-09
SW	5.947E-08	4.088E-08	2.652E-08	1.514E-08	1.055E-08	7.941E-09	6.291E-09	5.078E-09	4.220E-09	3.587E-09	3.102E-09
WSW	4.765E-08	2.935E-08	2.022E-08	1.211E-08	8.088E-09	5.926E-09	4.603E-09	3.719E-09	3.094E-09	2.633E-09	2.279E-09
W	3.641E-08	1.990E-08	1.394E-08	8.635E-09	6.087E-09	4.480E-09	3.477E-09	2.809E-09	2.337E-09	1.988E-09	1.720E-09
WNW	5.551E-08	3.080E-08	2.074E-08	1.240E-08	8.436E-09	6.258E-09	4.919E-09	4.003E-09	3.342E-09	2.845E-09	2.464E-09
NW	7.167E-08	3.934E-08	2.645E-08	1.571E-08	1.055E-08	7.757E-09	6.111E-09	4.967E-09	4.140E-09	3.526E-09	3.055E-09
NNW	1.031E-07	5.673E-08	3.666E-08	2.090E-08	1.407E-08	1.037E-08	8.129E-09	6.620E-09	5.569E-09	4.760E-09	4.126E-09
N	4.109E-08	2.674E-08	2.281E-08	1.843E-08	1.480E-08	1.173E-08	9.177E-09	7.446E-09	6.211E-09	5.295E-09	4.592E-09
NNE	2.353E-08	3.052E-08	1.972E-08	1.126E-08	7.597E-09	5.611E-09	4.386E-09	3.565E-09	2.981E-09	2.547E-09	2.214E-09
NE	1.660E-08	2.152E-08	1.392E-08	7.962E-09	5.378E-09	3.975E-09	3.143E-09	2.574E-09	2.167E-09	1.852E-09	1.609E-09
ENE	1.404E-08	2.133E-08	1.426E-08	8.487E-09	5.878E-09	4.425E-09	3.725E-09	3.180E-09	2.675E-09	2.298E-09	2.007E-09
E	6.297E-09	8.674E-09	5.790E-09	3.440E-09	2.380E-09	1.790E-09	1.419E-09	1.167E-09	1.037E-09	9.266E-10	8.093E-10
ESE	7.566E-09	9.002E-09	5.946E-09	3.469E-09	2.364E-09	1.756E-09	1.377E-09	1.122E-09	9.394E-10	8.034E-10	6.986E-10
SE	1.115E-08	6.885E-09	5.445E-09	4.223E-09	3.251E-09	2.685E-09	2.317E-09	2.053E-09	1.738E-09	1.501E-09	1.316E-09
SSE	2.456E-08	3.071E-08	1.985E-08	1.134E-08	7.652E-09	5.651E-09	4.417E-09	3.589E-09	3.001E-09	2.564E-09	2.228E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.814E-08	9.066E-08	7.447E-08	5.866E-08	6.063E-08	3.458E-08	1.312E-08	6.381E-09	3.961E-09	2.782E-09
SSW	4.765E-08	9.379E-08	8.627E-08	8.239E-08	6.757E-08	4.187E-08	1.724E-08	8.668E-09	5.437E-09	3.839E-09
SW	1.233E-07	2.676E-07	1.678E-07	9.893E-08	6.767E-08	3.863E-08	1.563E-08	7.978E-09	5.098E-09	3.595E-09
WSW	9.997E-08	2.410E-07	1.461E-07	8.315E-08	5.545E-08	2.936E-08	1.212E-08	5.973E-09	3.734E-09	2.638E-09
W	1.613E-07	2.040E-07	1.127E-07	6.505E-08	4.326E-08	2.092E-08	8.681E-09	4.507E-09	2.820E-09	1.992E-09
WNW	1.649E-07	2.917E-07	1.675E-07	9.979E-08	6.607E-08	3.182E-08	1.249E-08	6.303E-09	4.013E-09	2.851E-09
NW	1.579E-07	3.992E-07	2.327E-07	1.313E-07	8.555E-08	4.080E-08	1.580E-08	7.843E-09	4.979E-09	3.533E-09
NNW	8.354E-08	2.303E-07	2.359E-07	1.822E-07	1.231E-07	5.812E-08	2.137E-08	1.046E-08	6.651E-09	4.765E-09
N	4.600E-08	8.645E-08	7.875E-08	5.973E-08	4.606E-08	2.818E-08	1.779E-08	1.153E-08	7.470E-09	5.306E-09
NNE	2.221E-08	4.305E-08	3.767E-08	2.809E-08	2.311E-08	2.416E-08	1.151E-08	5.651E-09	3.577E-09	2.552E-09
NE	1.453E-08	3.086E-08	2.747E-08	2.045E-08	1.658E-08	1.705E-08	8.138E-09	4.016E-09	2.582E-09	1.855E-09
ENE	1.083E-08	2.403E-08	2.225E-08	1.702E-08	1.401E-08	1.657E-08	8.610E-09	4.532E-09	3.143E-09	2.302E-09
E	4.649E-09	1.153E-08	1.082E-08	8.123E-09	6.473E-09	6.864E-09	3.491E-09	1.799E-09	1.189E-09	9.158E-10
ESE	7.553E-09	1.537E-08	1.325E-08	9.705E-09	7.732E-09	7.325E-09	3.528E-09	1.767E-09	1.125E-09	8.049E-10
SE	1.530E-08	2.893E-08	2.383E-08	1.705E-08	1.270E-08	7.193E-09	4.062E-09	2.689E-09	2.008E-09	1.503E-09
SSE	2.292E-08	4.560E-08	3.981E-08	2.964E-08	2.427E-08	2.452E-08	1.159E-08	5.691E-09	3.602E-09	2.569E-09

B301

ERP ELEVATED STACK RELEASES - JUL-SEP 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	1.862E-15	2.250E-09	3.907E-08	7.772E-08	9.972E-08	8.977E-08	7.533E-08	6.271E-08	5.268E-08	5.985E-08	6.417E-08
SSW	1.489E-15	2.046E-09	3.773E-08	7.770E-08	1.031E-07	9.410E-08	7.959E-08	8.528E-08	8.617E-08	7.490E-08	6.608E-08
SW	1.466E-15	1.851E-09	7.898E-08	2.167E-07	3.459E-07	2.318E-07	1.653E-07	1.242E-07	9.729E-08	7.866E-08	6.524E-08
WSW	8.033E-16	1.129E-09	5.987E-08	1.790E-07	3.248E-07	2.066E-07	1.431E-07	1.055E-07	8.158E-08	6.533E-08	5.379E-08
W	1.439E-13	2.658E-08	1.578E-07	2.304E-07	2.449E-07	1.579E-07	1.105E-07	8.207E-08	6.378E-08	5.128E-08	4.235E-08
WNW	9.754E-15	6.396E-09	1.272E-07	2.715E-07	3.764E-07	2.352E-07	1.615E-07	1.243E-07	9.938E-08	7.890E-08	6.453E-08
NW	1.444E-15	1.563E-09	9.199E-08	2.850E-07	5.565E-07	3.352E-07	2.255E-07	1.671E-07	1.298E-07	1.027E-07	8.379E-08
NNW	1.613E-15	1.816E-09	5.654E-08	1.444E-07	2.504E-07	2.563E-07	2.411E-07	2.146E-07	1.886E-07	1.483E-07	1.204E-07
N	1.014E-10	7.209E-09	3.952E-08	7.011E-08	9.210E-08	8.990E-08	8.047E-08	6.911E-08	5.963E-08	5.195E-08	4.573E-08
NNE	2.415E-11	2.200E-09	1.834E-08	3.505E-08	4.678E-08	4.397E-08	3.816E-08	3.264E-08	2.802E-08	2.429E-08	2.129E-08
NE	3.960E-16	5.795E-10	1.120E-08	2.393E-08	3.363E-08	3.196E-08	2.780E-08	2.375E-08	2.033E-08	1.756E-08	1.533E-08
ENE	2.980E-16	4.328E-10	8.275E-09	1.789E-08	2.600E-08	2.539E-08	2.253E-08	1.953E-08	1.692E-08	1.476E-08	1.299E-08
E	4.446E-17	1.233E-10	3.221E-09	7.948E-09	1.255E-08	1.240E-08	1.095E-08	9.396E-09	8.051E-09	6.945E-09	6.048E-09
ESE	3.275E-16	3.227E-10	5.914E-09	1.236E-08	1.684E-08	1.564E-08	1.340E-08	1.133E-08	9.644E-09	8.304E-09	7.241E-09
SE	5.572E-16	6.912E-10	1.235E-08	2.476E-08	3.182E-08	2.865E-08	2.409E-08	2.013E-08	1.698E-08	1.451E-08	1.258E-08
SSE	1.150E-15	1.097E-09	1.848E-08	3.708E-08	4.962E-08	4.652E-08	4.032E-08	3.445E-08	2.955E-08	2.558E-08	2.240E-08

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	5.658E-08	3.477E-08	2.214E-08	1.229E-08	8.212E-09	5.970E-09	4.548E-09	3.610E-09	2.961E-09	2.482E-09	2.113E-09
SSW	6.075E-08	4.435E-08	2.841E-08	1.589E-08	1.092E-08	7.985E-09	6.097E-09	4.848E-09	3.971E-09	3.326E-09	2.835E-09
SW	5.854E-08	3.987E-08	2.564E-08	1.440E-08	9.870E-09	7.306E-09	5.693E-09	4.523E-09	3.700E-09	3.096E-09	2.637E-09
WSW	4.689E-08	2.863E-08	1.956E-08	1.152E-08	7.568E-09	5.455E-09	4.168E-09	3.315E-09	2.714E-09	2.273E-09	1.937E-09
W	3.574E-08	1.933E-08	1.339E-08	8.114E-09	5.593E-09	4.029E-09	3.063E-09	2.425E-09	1.977E-09	1.648E-09	1.399E-09
WNW	5.461E-08	3.002E-08	2.003E-08	1.176E-08	7.853E-09	5.721E-09	4.417E-09	3.531E-09	2.896E-09	2.423E-09	2.064E-09
NW	7.072E-08	3.854E-08	2.572E-08	1.505E-08	9.956E-09	7.219E-09	5.605E-09	4.492E-09	3.691E-09	3.101E-09	2.651E-09
NNW	1.019E-07	5.572E-08	3.579E-08	2.016E-08	1.341E-08	9.767E-09	7.570E-09	6.094E-09	5.068E-09	4.282E-09	3.671E-09
N	4.077E-08	2.643E-08	2.245E-08	1.796E-08	1.429E-08	1.122E-08	8.702E-09	7.001E-09	5.790E-09	4.895E-09	4.210E-09
NNE	2.333E-08	3.015E-08	1.940E-08	1.099E-08	7.360E-09	5.394E-09	4.184E-09	3.374E-09	2.800E-09	2.374E-09	2.048E-09
NE	1.637E-08	2.113E-08	1.359E-08	7.685E-09	5.132E-09	3.752E-09	2.934E-09	2.377E-09	1.980E-09	1.673E-09	1.439E-09
ENE	1.383E-08	2.083E-08	1.381E-08	8.094E-09	5.519E-09	4.091E-09	3.392E-09	2.852E-09	2.364E-09	2.001E-09	1.722E-09
E	6.179E-09	8.442E-09	5.585E-09	3.259E-09	2.214E-09	1.635E-09	1.273E-09	1.029E-09	8.969E-10	7.871E-10	6.753E-10
ESE	7.459E-09	8.735E-09	5.707E-09	3.258E-09	2.174E-09	1.580E-09	1.214E-09	9.687E-10	7.948E-10	6.662E-10	5.680E-10
SE	1.104E-08	6.772E-09	5.314E-09	4.044E-09	3.056E-09	2.475E-09	2.092E-09	1.815E-09	1.509E-09	1.280E-09	1.103E-09
SSE	2.431E-08	3.014E-08	1.936E-08	1.091E-08	7.264E-09	5.293E-09	4.082E-09	3.273E-09	2.700E-09	2.276E-09	1.952E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.807E-08	9.041E-08	7.413E-08	5.828E-08	6.008E-08	3.400E-08	1.267E-08	5.999E-09	3.631E-09	2.487E-09
SSW	4.756E-08	9.344E-08	8.573E-08	8.162E-08	6.672E-08	4.091E-08	1.646E-08	8.012E-09	4.871E-09	3.335E-09
SW	1.230E-07	2.664E-07	1.666E-07	9.790E-08	6.673E-08	3.769E-08	1.488E-08	7.345E-09	4.544E-09	3.105E-09
WSW	9.976E-08	2.399E-07	1.450E-07	8.224E-08	5.465E-08	2.865E-08	1.155E-08	5.504E-09	3.330E-09	2.279E-09
W	1.609E-07	2.030E-07	1.118E-07	6.425E-08	4.255E-08	2.034E-08	8.166E-09	4.060E-09	2.437E-09	1.653E-09
WNW	1.645E-07	2.903E-07	1.663E-07	9.869E-08	6.511E-08	3.105E-08	1.186E-08	5.768E-09	3.542E-09	2.430E-09
NW	1.577E-07	3.978E-07	2.314E-07	1.301E-07	8.455E-08	3.999E-08	1.516E-08	7.304E-09	4.505E-09	3.109E-09
NNW	8.341E-08	2.295E-07	2.346E-07	1.807E-07	1.218E-07	5.713E-08	2.063E-08	9.860E-09	6.125E-09	4.289E-09
N	4.594E-08	8.624E-08	7.844E-08	5.941E-08	4.574E-08	2.865E-08	1.733E-08	1.103E-08	7.026E-09	4.907E-09
NNE	2.218E-08	4.292E-08	3.750E-08	2.792E-08	2.293E-08	2.386E-08	1.125E-08	5.434E-09	3.387E-09	2.379E-09
NE	1.450E-08	3.073E-08	2.729E-08	2.025E-08	1.638E-08	1.632E-08	7.863E-09	3.793E-09	2.385E-09	1.677E-09
ENE	1.081E-08	2.392E-08	2.209E-08	1.684E-08	1.382E-08	1.616E-08	8.221E-09	4.192E-09	2.820E-09	2.005E-09
E	4.633E-09	1.146E-08	1.071E-08	8.014E-09	6.362E-09	6.669E-09	3.311E-09	1.645E-09	1.048E-09	7.782E-10
ESE	7.538E-09	1.531E-08	1.317E-08	9.616E-09	7.637E-09	7.105E-09	3.320E-09	1.592E-09	9.725E-10	6.679E-10
SE	1.528E-08	2.884E-08	2.372E-08	1.694E-08	1.258E-08	7.072E-09	3.887E-09	2.476E-09	1.778E-09	1.282E-09
SSE	2.289E-08	4.546E-08	3.962E-08	2.944E-08	2.405E-08	2.405E-08	1.117E-08	5.335E-09	3.286E-09	2.282E-09

B302

ERP ELEVATED STACK RELEASES - JUL-SEP 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	1.863E-15	2.252E-09	3.910E-08	7.782E-08	9.902E-08	8.840E-08	7.362E-08	6.087E-08	5.081E-08	5.764E-08	6.184E-08
SSW	1.490E-15	2.047E-09	3.777E-08	7.781E-08	1.024E-07	9.270E-08	7.780E-08	8.293E-08	8.355E-08	7.233E-08	6.363E-08
SW	1.466E-15	1.852E-09	7.907E-08	2.170E-07	3.429E-07	2.276E-07	1.611E-07	1.203E-07	9.374E-08	7.544E-08	6.232E-08
WSW	8.035E-16	1.130E-09	5.993E-08	1.791E-07	3.223E-07	2.035E-07	1.402E-07	1.030E-07	7.931E-08	6.333E-08	5.202E-08
W	1.439E-13	2.660E-08	1.572E-07	2.287E-07	2.420E-07	1.554E-07	1.084E-07	8.036E-08	6.234E-08	5.007E-08	4.131E-08
WNW	9.756E-15	6.401E-09	1.274E-07	2.706E-07	3.721E-07	2.308E-07	1.576E-07	1.209E-07	9.643E-08	7.626E-08	6.209E-08
NW	1.445E-15	1.563E-09	9.206E-08	2.843E-07	5.518E-07	3.304E-07	2.213E-07	1.635E-07	1.268E-07	9.996E-08	8.122E-08
NNW	1.613E-15	1.817E-09	5.659E-08	1.445E-07	2.490E-07	2.535E-07	2.379E-07	2.116E-07	1.859E-07	1.457E-07	1.178E-07
N	1.014E-10	7.164E-09	3.937E-08	7.001E-08	9.141E-08	8.872E-08	7.903E-08	6.759E-08	5.811E-08	5.048E-08	4.433E-08
NNE	2.415E-11	2.190E-09	1.831E-08	3.505E-08	4.646E-08	4.337E-08	3.742E-08	3.184E-08	2.721E-08	2.349E-08	2.052E-08
NE	3.961E-16	5.799E-10	1.121E-08	2.397E-08	3.343E-08	3.154E-08	2.726E-08	2.315E-08	1.972E-08	1.696E-08	1.474E-08
ENE	2.980E-16	4.330E-10	8.284E-09	1.792E-08	2.585E-08	2.508E-08	2.213E-08	1.910E-08	1.648E-08	1.432E-08	1.257E-08
E	4.447E-17	1.234E-10	3.227E-09	7.968E-09	1.249E-08	1.225E-08	1.073E-08	9.157E-09	7.801E-09	6.694E-09	5.802E-09
ESE	3.275E-16	3.228E-10	5.920E-09	1.238E-08	1.673E-08	1.542E-08	1.311E-08	1.102E-08	9.324E-09	7.988E-09	6.936E-09
SE	5.573E-16	6.916E-10	1.237E-08	2.479E-08	3.159E-08	2.821E-08	2.354E-08	1.954E-08	1.638E-08	1.393E-08	1.202E-08
SSE	1.150E-15	1.097E-09	1.850E-08	3.713E-08	4.932E-08	4.589E-08	3.954E-08	3.361E-08	2.870E-08	2.475E-08	2.160E-08

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	5.439E-08	3.290E-08	2.040E-08	1.076E-08	6.813E-09	4.741E-09	3.492E-09	2.691E-09	2.154E-09	1.771E-09	1.482E-09
SSW	5.844E-08	4.236E-08	2.645E-08	1.408E-08	9.169E-09	6.518E-09	4.865E-09	3.795E-09	3.056E-09	2.520E-09	2.119E-09
SW	5.583E-08	3.776E-08	2.370E-08	1.269E-08	8.255E-09	5.849E-09	4.446E-09	3.460E-09	2.780E-09	2.289E-09	1.922E-09
WSW	4.529E-08	2.729E-08	1.821E-08	1.030E-08	6.561E-09	4.615E-09	3.455E-09	2.700E-09	2.177E-09	1.799E-09	1.516E-09
W	3.483E-08	1.882E-08	1.303E-08	7.588E-09	4.990E-09	3.519E-09	2.630E-09	2.052E-09	1.653E-09	1.364E-09	1.147E-09
WNW	5.233E-08	2.810E-08	1.830E-08	1.021E-08	6.420E-09	4.473E-09	3.357E-09	2.630E-09	2.119E-09	1.745E-09	1.465E-09
NW	6.827E-08	3.628E-08	2.356E-08	1.304E-08	8.150E-09	5.640E-09	4.244E-09	3.326E-09	2.680E-09	2.212E-09	1.861E-09
NNW	9.920E-08	5.281E-08	3.293E-08	1.746E-08	1.082E-08	7.432E-09	5.485E-09	4.253E-09	3.444E-09	2.849E-09	2.395E-09
N	3.943E-08	2.540E-08	2.164E-08	1.747E-08	1.368E-08	1.032E-08	7.826E-09	6.175E-09	5.020E-09	4.179E-09	3.544E-09
NNE	2.252E-08	2.919E-08	1.822E-08	9.815E-09	6.279E-09	4.433E-09	3.330E-09	2.611E-09	2.113E-09	1.751E-09	1.479E-09
NE	1.576E-08	2.045E-08	1.279E-08	6.875E-09	4.370E-09	3.069E-09	2.329E-09	1.844E-09	1.507E-09	1.251E-09	1.059E-09
ENE	1.339E-08	2.049E-08	1.323E-08	7.331E-09	4.676E-09	3.282E-09	2.596E-09	2.104E-09	1.702E-09	1.410E-09	1.191E-09
E	5.918E-09	8.215E-09	5.306E-09	2.945E-09	1.886E-09	1.327E-09	9.916E-10	7.727E-10	6.522E-10	5.559E-10	4.650E-10
ESE	7.148E-09	8.532E-09	5.455E-09	2.980E-09	1.889E-09	1.318E-09	9.783E-10	7.578E-10	6.055E-10	4.957E-10	4.135E-10
SE	1.050E-08	6.359E-09	4.987E-09	3.849E-09	2.943E-09	2.420E-09	2.079E-09	1.831E-09	1.519E-09	1.288E-09	1.109E-09
SSE	2.348E-08	2.929E-08	1.828E-08	9.784E-09	6.181E-09	4.316E-09	3.212E-09	2.496E-09	2.004E-09	1.648E-09	1.382E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.812E-08	8.959E-08	7.246E-08	5.628E-08	5.784E-08	3.212E-08	1.115E-08	4.794E-09	2.715E-09	1.777E-09
SSW	4.763E-08	9.262E-08	8.383E-08	7.910E-08	6.429E-08	3.886E-08	1.464E-08	6.564E-09	3.819E-09	2.530E-09
SW	1.232E-07	2.637E-07	1.625E-07	9.437E-08	6.380E-08	3.552E-08	1.317E-08	5.930E-09	3.482E-09	2.299E-09
WSW	9.984E-08	2.377E-07	1.422E-07	7.999E-08	5.288E-08	2.725E-08	1.040E-08	4.670E-09	2.716E-09	1.806E-09
W	1.599E-07	2.005E-07	1.097E-07	6.281E-08	4.151E-08	1.981E-08	7.643E-09	3.556E-09	2.065E-09	1.369E-09
WNW	1.641E-07	2.867E-07	1.625E-07	9.574E-08	6.267E-08	2.913E-08	1.032E-08	4.546E-09	2.643E-09	1.752E-09
NW	1.574E-07	3.939E-07	2.272E-07	1.270E-07	8.198E-08	3.773E-08	1.321E-08	5.751E-09	3.343E-09	2.221E-09
NNW	8.350E-08	2.278E-07	2.315E-07	1.779E-07	1.192E-07	5.429E-08	1.794E-08	7.556E-09	4.297E-09	2.857E-09
N	4.583E-08	8.546E-08	7.704E-08	5.791E-08	4.434E-08	2.685E-08	1.672E-08	1.022E-08	6.207E-09	4.193E-09
NNE	2.217E-08	4.255E-08	3.677E-08	2.712E-08	2.214E-08	2.283E-08	1.011E-08	4.484E-09	2.627E-09	1.757E-09
NE	1.452E-08	3.049E-08	2.675E-08	1.965E-08	1.578E-08	1.600E-08	7.076E-09	3.120E-09	1.854E-09	1.256E-09
ENE	1.082E-08	2.375E-08	2.170E-08	1.640E-08	1.339E-08	1.569E-08	7.462E-09	3.379E-09	2.092E-09	1.415E-09
E	4.644E-09	1.138E-08	1.051E-08	7.767E-09	6.109E-09	6.412E-09	2.999E-09	1.342E-09	7.894E-10	5.508E-10
ESE	7.549E-09	1.518E-08	1.289E-08	9.299E-09	7.326E-09	6.857E-09	3.045E-09	1.334E-09	7.628E-10	4.978E-10
SE	1.529E-08	2.858E-08	2.319E-08	1.635E-08	1.202E-08	6.670E-09	3.699E-09	2.423E-09	1.783E-09	1.290E-09
SSE	2.291E-08	4.509E-08	3.886E-08	2.860E-08	2.323E-08	2.310E-08	1.007E-08	4.372E-09	2.513E-09	1.655E-09

B303

ERP ELEVATED STACK RELEASES - JUL-SEP 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****											
DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	1.860E-10	1.116E-09	2.376E-09	2.461E-09	1.537E-09	1.031E-09	7.281E-10	5.349E-10	4.051E-10	3.176E-10	3.041E-10
SSW	1.742E-10	1.045E-09	2.226E-09	2.305E-09	1.440E-09	9.655E-10	6.820E-10	5.010E-10	4.739E-10	3.587E-10	2.808E-10
SW	1.637E-10	9.824E-10	2.092E-09	2.167E-09	2.531E-09	1.397E-09	8.739E-10	5.969E-10	4.330E-10	3.281E-10	2.570E-10
WSW	9.432E-11	5.658E-10	1.205E-09	2.581E-09	1.546E-09	8.412E-10	5.203E-10	3.528E-10	2.547E-10	1.925E-10	1.506E-10
W	4.585E-11	2.275E-09	2.235E-09	1.579E-09	7.411E-10	4.032E-10	2.494E-10	1.691E-10	1.221E-10	9.226E-11	7.218E-11
WNW	7.991E-11	4.794E-10	2.360E-09	2.488E-09	1.523E-09	7.945E-10	4.823E-10	3.272E-10	2.565E-10	1.993E-10	1.636E-10
NW	1.284E-10	7.702E-10	1.640E-09	4.408E-09	2.949E-09	1.468E-09	8.674E-10	5.762E-10	4.173E-10	3.235E-10	2.653E-10
NNW	1.506E-10	9.038E-10	1.924E-09	1.993E-09	2.443E-09	1.334E-09	8.367E-10	6.998E-10	5.172E-10	4.093E-10	3.434E-10
N	1.194E-09	1.796E-09	2.747E-09	2.599E-09	1.556E-09	1.030E-09	7.229E-10	5.294E-10	4.004E-10	3.106E-10	2.459E-10
NNE	3.444E-10	7.241E-10	1.273E-09	1.256E-09	7.679E-10	5.115E-10	3.602E-10	2.642E-10	1.999E-10	1.551E-10	1.229E-10
NE	5.109E-11	3.065E-10	6.526E-10	6.760E-10	4.222E-10	2.831E-10	2.000E-10	1.469E-10	1.113E-10	8.636E-11	6.839E-11
ENE	3.799E-11	2.279E-10	4.853E-10	5.027E-10	3.140E-10	2.105E-10	1.487E-10	1.092E-10	8.273E-11	6.421E-11	5.085E-11
E	1.441E-11	8.645E-11	1.841E-10	1.907E-10	1.191E-10	7.985E-11	5.640E-11	4.143E-11	3.138E-11	2.436E-11	1.929E-11
ESE	3.144E-11	1.886E-10	4.016E-10	4.160E-10	2.598E-10	1.742E-10	1.231E-10	9.040E-11	6.847E-11	5.314E-11	4.209E-11
SE	5.895E-11	3.537E-10	7.530E-10	7.800E-10	4.872E-10	3.267E-10	2.307E-10	1.695E-10	1.284E-10	9.964E-11	7.891E-11
SSE	9.825E-11	5.894E-10	1.255E-09	1.300E-09	8.120E-10	5.445E-10	3.846E-10	2.825E-10	2.140E-10	1.661E-10	1.315E-10
DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	2.444E-10	1.535E-10	1.013E-10	5.671E-11	3.543E-11	2.682E-11	1.917E-11	1.436E-11	1.179E-11	9.369E-12	7.648E-12
SSW	2.285E-10	1.409E-10	9.240E-11	5.148E-11	3.484E-11	2.502E-11	1.793E-11	1.347E-11	1.069E-11	8.541E-12	6.971E-12
SW	2.113E-10	1.284E-10	8.379E-11	4.644E-11	2.902E-11	2.266E-11	1.683E-11	1.264E-11	9.828E-12	7.851E-12	6.408E-12
WSW	1.210E-10	8.449E-11	5.744E-11	3.668E-11	2.220E-11	1.489E-11	1.090E-11	8.186E-12	6.365E-12	5.084E-12	4.150E-12
W	5.802E-11	2.595E-11	3.495E-11	2.502E-11	1.489E-11	1.019E-11	7.301E-12	5.482E-12	4.263E-12	3.405E-12	2.779E-12
WNW	1.409E-10	8.414E-11	5.968E-11	3.567E-11	2.271E-11	1.447E-11	1.056E-11	7.931E-12	6.405E-12	5.116E-12	4.176E-12
NW	2.287E-10	1.377E-10	9.811E-11	6.228E-11	3.829E-11	2.557E-11	1.773E-11	1.331E-11	1.039E-11	8.303E-12	6.777E-12
NNW	3.028E-10	1.949E-10	1.432E-10	8.794E-11	5.614E-11	3.716E-11	2.533E-11	1.882E-11	1.453E-11	1.161E-11	9.479E-12
N	1.981E-10	9.390E-11	5.729E-11	3.017E-11	9.826E-11	5.673E-11	4.065E-11	3.052E-11	2.373E-11	1.896E-11	1.548E-11
NNE	9.897E-11	1.767E-10	1.084E-10	5.563E-11	3.383E-11	2.266E-11	1.621E-11	1.215E-11	9.432E-12	7.527E-12	6.139E-12
NE	5.508E-11	7.696E-11	4.849E-11	2.571E-11	1.579E-11	1.055E-11	7.722E-12	5.738E-12	4.464E-12	3.644E-12	2.974E-12
ENE	4.096E-11	5.311E-11	3.932E-11	2.428E-11	1.552E-11	1.027E-11	7.207E-12	4.917E-12	3.818E-12	3.047E-12	2.486E-12
E	1.554E-11	1.658E-11	1.184E-11	7.105E-12	4.519E-12	2.997E-12	2.108E-12	1.549E-12	1.187E-12	9.254E-13	7.486E-13
ESE	3.389E-11	2.831E-11	1.911E-11	1.093E-11	6.869E-12	4.569E-12	3.234E-12	2.394E-12	1.843E-12	1.462E-12	1.187E-12
SE	6.355E-11	3.009E-11	1.834E-11	9.637E-12	5.861E-12	4.026E-12	3.009E-12	5.475E-12	4.224E-12	3.361E-12	2.744E-12
SSE	1.059E-10	1.452E-10	9.105E-11	4.795E-11	2.939E-11	1.964E-11	1.401E-11	1.046E-11	8.095E-12	6.442E-12	5.242E-12

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****											
DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	2.134E-09	1.518E-09	7.316E-10	4.088E-10	2.860E-10	1.505E-10	5.715E-11	2.606E-11	1.476E-11	9.448E-12	
SSW	1.999E-09	1.421E-09	6.852E-10	4.378E-10	2.845E-10	1.388E-10	5.318E-11	2.480E-11	1.369E-11	8.597E-12	
SW	1.878E-09	1.946E-09	9.027E-10	4.398E-10	2.611E-10	1.270E-10	4.700E-11	2.203E-11	1.277E-11	7.902E-12	
WSW	1.674E-09	1.463E-09	5.389E-10	2.590E-10	1.521E-10	8.059E-11	3.486E-11	1.524E-11	8.268E-12	5.118E-12	
W	1.952E-09	7.772E-10	2.583E-10	1.242E-10	7.288E-11	3.708E-11	2.273E-11	1.029E-11	5.537E-12	3.427E-12	
WNW	1.999E-09	1.414E-09	5.035E-10	2.549E-10	1.658E-10	8.587E-11	3.524E-11	1.510E-11	8.100E-12	5.150E-12	
NW	2.677E-09	2.615E-09	9.112E-10	4.270E-10	2.690E-10	1.403E-10	5.958E-11	2.583E-11	1.346E-11	8.358E-12	
NNW	1.728E-09	1.850E-09	9.146E-10	5.283E-10	3.479E-10	1.959E-10	8.610E-11	3.749E-11	1.905E-11	1.169E-11	
N	2.470E-09	1.554E-09	7.273E-10	4.030E-10	2.474E-10	1.008E-10	6.646E-11	6.137E-11	3.083E-11	1.909E-11	
NNE	1.143E-09	7.625E-10	3.621E-10	2.012E-10	1.236E-10	1.291E-10	5.766E-11	2.306E-11	1.227E-11	7.577E-12	
NE	5.861E-10	4.168E-10	2.009E-10	1.120E-10	6.878E-11	5.945E-11	2.636E-11	1.082E-11	5.819E-12	3.639E-12	
ENE	4.358E-10	3.099E-10	1.494E-10	8.325E-11	5.115E-11	4.428E-11	2.373E-11	1.045E-11	5.152E-12	3.067E-12	
E	1.653E-10	1.176E-10	5.667E-11	3.158E-11	1.940E-11	1.424E-11	7.008E-12	3.047E-12	1.571E-12	9.374E-13	
ESE	3.607E-10	2.565E-10	1.236E-10	6.890E-11	4.233E-11	2.546E-11	1.094E-11	4.648E-12	2.424E-12	1.473E-12	
SE	6.763E-10	4.809E-10	2.318E-10	1.292E-10	7.936E-11	3.230E-11	9.892E-12	4.108E-12	4.294E-12	3.388E-12	
SSE	1.127E-09	8.015E-10	3.864E-10	2.153E-10	1.323E-10	1.124E-10	4.928E-11	1.999E-11	1.057E-11	6.487E-12	

B304

ERP ELEVATED STACK RELEASES - JUL-SEP 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE TYPE	DIRECTION	DIST.	X/Q	X/Q	X/Q	D/Q	
ID	LOCATION	FROM SITE (MI)	(SEC/M3)	(SEC/M3)	(SEC/M3)	(PER SQ.METER)	
			NO	2.26 DAY	8.0 DAY		
			DECAY	DECAY	DECAY		
			UNDEPLETED	UNDEPLETED	DEPLETED		
A	Site Boundary	S	.80	4.8E-08	4.8E-08	4.8E-08	2.5E-09
A	Site Boundary	SSW	.82	5.1E-08	5.1E-08	5.1E-08	2.4E-09
A	Site Boundary	SW	.97	2.0E-07	2.0E-07	2.0E-07	2.2E-09
A	Site Boundary	WSW	.93	1.4E-07	1.4E-07	1.4E-07	1.7E-09
A	Site Boundary	W	.91	2.1E-07	2.1E-07	2.1E-07	1.7E-09
A	Site Boundary	WNW	.94	2.4E-07	2.4E-07	2.4E-07	2.8E-09
A	Site Boundary	NW	.81	1.4E-07	1.4E-07	1.4E-07	1.7E-09
A	Site Boundary	NNW	.69	3.4E-08	3.4E-08	3.4E-08	1.7E-09
A	Site Boundary	N	.67	2.6E-08	2.6E-08	2.6E-08	2.4E-09
A	Site Boundary	NNE	.60	6.3E-09	6.3E-09	6.3E-09	9.3E-10
A	Site Boundary	NE	.62	4.0E-09	4.0E-09	4.0E-09	4.8E-10
A	Site Boundary	ENE	.59	1.9E-09	1.9E-09	1.9E-09	3.2E-10
A	Site Boundary	E	.53	2.1E-10	2.1E-10	2.1E-10	9.6E-11
A	Site Boundary	ESE	.54	6.5E-10	6.5E-10	6.5E-10	2.2E-10
A	Site Boundary	SE	.65	5.9E-09	5.9E-09	5.9E-09	5.9E-10
A	Site Boundary	SSE	.81	2.4E-08	2.4E-08	2.4E-08	1.3E-09
A	Nearest Res	SSW	3.00	8.6E-08	8.5E-08	8.3E-08	5.0E-10
A	Nearest Res	SW	1.00	2.2E-07	2.2E-07	2.2E-07	2.2E-09
A	Nearest Res	WSW	1.90	2.3E-07	2.2E-07	2.2E-07	9.4E-10
A	Nearest Res	W	1.00	2.3E-07	2.3E-07	2.3E-07	1.6E-09
A	Nearest Res	WNW	1.70	3.1E-07	3.1E-07	3.0E-07	1.1E-09
A	Nearest Res	NW	.90	2.1E-07	2.0E-07	2.0E-07	4.7E-09
A	Nearest Res	NNW	1.90	2.6E-07	2.6E-07	2.6E-07	1.5E-09
A	Nearest Res	N	2.90	7.2E-08	7.1E-08	7.0E-08	5.6E-10
A	Nearest Res	NNE	1.70	4.7E-08	4.6E-08	4.6E-08	6.5E-10
A	Nearest Res	ENE	1.70	2.6E-08	2.6E-08	2.6E-08	2.7E-10
A	Nearest Res	E	2.20	1.2E-08	1.2E-08	1.2E-08	6.9E-11
A	Nearest Res	SE	2.80	2.2E-08	2.2E-08	2.1E-08	1.9E-10
A	Nearest Cow	NNW	3.50	1.9E-07	1.9E-07	1.9E-07	5.2E-10
A	Nearest Garde	SSW	3.00	8.6E-08	8.5E-08	8.3E-08	5.0E-10
A	Nearest Garde	SW	2.20	2.0E-07	2.0E-07	2.0E-07	1.1E-09
A	Nearest Garde	WNW	1.70	3.1E-07	3.1E-07	3.0E-07	1.1E-09
A	Nearest Garde	NW	.90	2.1E-07	2.0E-07	2.0E-07	4.7E-09
A	Nearest Garde	NNW	2.80	2.3E-07	2.3E-07	2.2E-07	7.9E-10
A	Nearest Garde	E	2.20	1.2E-08	1.2E-08	1.2E-08	6.9E-11
A	Nearest Garde	ESE	2.20	1.5E-08	1.5E-08	1.5E-08	1.5E-10
A	Nearest Garde	SE	2.80	2.2E-08	2.2E-08	2.1E-08	1.9E-10
A	MAXIMUM CHI/Q	S	1.50	1.0E-07	1.0E-07	9.9E-08	1.5E-09
A	MAXIMUM CHI/Q	SSW	1.50	1.0E-07	1.0E-07	1.0E-07	1.4E-09
A	MAXIMUM CHI/Q	SW	1.50	3.5E-07	3.5E-07	3.4E-07	2.5E-09
A	MAXIMUM CHI/Q	WSW	1.50	3.3E-07	3.2E-07	3.2E-07	1.5E-09
A	MAXIMUM CHI/Q	W	1.50	2.5E-07	2.4E-07	2.4E-07	7.4E-10
A	MAXIMUM CHI/Q	WNW	1.50	3.8E-07	3.8E-07	3.7E-07	1.5E-09
A	MAXIMUM CHI/Q	NW	1.50	5.6E-07	5.6E-07	5.5E-07	2.9E-09
A	MAXIMUM CHI/Q	NNW	2.00	2.6E-07	2.6E-07	2.5E-07	1.3E-09
A	MAXIMUM CHI/Q	N	1.50	9.2E-08	9.2E-08	9.1E-08	1.6E-09
A	MAXIMUM CHI/Q	NNE	1.50	4.7E-08	4.7E-08	4.6E-08	7.7E-10
A	MAXIMUM CHI/Q	NE	1.50	3.4E-08	3.4E-08	3.3E-08	4.2E-10
A	MAXIMUM CHI/Q	ENE	1.50	2.6E-08	2.6E-08	2.6E-08	3.1E-10
A	MAXIMUM CHI/Q	E	1.50	1.3E-08	1.3E-08	1.2E-08	1.2E-10
A	MAXIMUM CHI/Q	ESE	1.50	1.7E-08	1.7E-08	1.7E-08	2.6E-10
A	MAXIMUM CHI/Q	SE	1.50	3.2E-08	3.2E-08	3.2E-08	4.9E-10
A	MAXIMUM CHI/Q	SSE	1.50	5.0E-08	5.0E-08	4.9E-08	8.1E-10

B305

Atmospheric Diffusion Estimates

Elevated Releases

October-December 2018

ERP ELEVATED STACK RELEASES - OCT-DEC 2018
 NO DECAY, UNDELETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE												
	250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	
S	3.095E-15	2.417E-09	3.836E-08	7.370E-08	9.164E-08	8.133E-08	6.773E-08	5.613E-08	4.702E-08	5.307E-08	5.733E-08	6.536E-16	6.934E-10	1.223E-08	2.508E-08	3.422E-08	3.233E-08	2.818E-08	3.223E-08	3.450E-08	3.074E-08	2.773E-08	
SSW	4.581E-16	5.787E-10	2.423E-08	6.765E-08	1.169E-07	8.002E-08	5.800E-08	4.417E-08	3.499E-08	2.859E-08	2.394E-08	4.301E-16	6.177E-10	3.354E-08	9.900E-08	1.685E-07	1.054E-07	7.219E-08	5.287E-08	4.066E-08	3.245E-08	2.665E-08	
WSW	1.436E-13	1.396E-08	7.810E-08	1.117E-07	1.217E-07	8.031E-08	5.736E-08	4.341E-08	3.429E-08	2.798E-08	2.342E-08	7.465E-15	3.342E-09	6.073E-08	1.332E-07	1.941E-07	1.208E-07	8.279E-08	6.367E-08	5.096E-08	4.053E-08	3.322E-08	
W	8.839E-16	1.104E-09	7.199E-08	2.314E-07	4.267E-07	2.530E-07	1.682E-07	1.230E-07	9.460E-08	7.447E-08	6.049E-08	5.670E-16	6.449E-10	2.126E-08	5.778E-08	1.102E-07	1.177E-07	1.130E-07	1.019E-07	9.047E-08	7.132E-08	5.804E-08	
WNW	1.415E-15	1.399E-09	2.354E-08	4.833E-08	6.910E-08	7.037E-08	6.472E-08	5.656E-08	4.944E-08	4.350E-08	3.860E-08	1.127E-15	1.073E-09	1.809E-08	3.656E-08	4.978E-08	4.722E-08	4.131E-08	3.557E-08	3.071E-08	2.676E-08	2.356E-08	
NW	5.441E-16	6.366E-10	1.136E-08	2.338E-08	3.202E-08	3.027E-08	2.635E-08	2.259E-08	1.943E-08	1.686E-08	1.480E-08	4.922E-16	7.065E-10	1.286E-08	2.623E-08	3.460E-08	3.165E-08	2.688E-08	2.261E-08	1.917E-08	1.645E-08	1.431E-08	
N	3.518E-16	5.028E-10	9.538E-09	2.016E-08	2.807E-08	2.659E-08	2.315E-08	1.983E-08	1.705E-08	1.481E-08	1.300E-08	1.119E-15	1.001E-09	1.633E-08	3.217E-08	4.179E-08	3.832E-08	3.271E-08	2.771E-08	2.363E-08	2.039E-08	1.782E-08	
NNE	2.848E-15	2.160E-09	3.303E-08	6.254E-08	7.691E-08	6.787E-08	5.631E-08	4.654E-08	3.889E-08	3.297E-08	2.836E-08	SE	2.848E-15	2.160E-09	3.303E-08	6.254E-08	7.691E-08	6.787E-08	5.631E-08	4.654E-08	3.889E-08	3.297E-08	2.836E-08
NE	3.598E-15	2.566E-09	3.887E-08	7.412E-08	9.422E-08	8.596E-08	7.326E-08	6.185E-08	5.257E-08	4.518E-08	3.931E-08	SSE	3.598E-15	2.566E-09	3.887E-08	7.412E-08	9.422E-08	8.596E-08	7.326E-08	6.185E-08	5.257E-08	4.518E-08	3.931E-08

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE												
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
S	5.099E-08	3.397E-08	2.202E-08	1.258E-08	8.791E-09	6.627E-09	5.149E-09	4.163E-09	3.493E-09	2.989E-09	2.587E-09	SSW	2.623E-08	2.262E-08	1.486E-08	8.652E-09	6.294E-09	4.768E-09	3.731E-09	3.036E-09	2.542E-09	2.174E-09	1.891E-09
SSW	2.201E-08	1.759E-08	1.166E-08	6.866E-09	5.019E-09	3.906E-09	3.178E-09	2.588E-09	2.167E-09	1.855E-09	1.614E-09	SW	2.313E-08	1.406E-08	9.695E-09	5.847E-09	3.905E-09	2.861E-09	2.222E-09	1.795E-09	1.494E-09	1.270E-09	1.100E-09
SW	2.001E-08	1.138E-08	8.510E-09	5.865E-09	4.504E-09	3.371E-09	2.645E-09	2.156E-09	1.808E-09	1.549E-09	1.349E-09	WSW	2.819E-08	1.574E-08	1.067E-08	6.464E-09	4.426E-09	3.302E-09	2.609E-09	2.132E-09	1.784E-09	1.521E-09	1.320E-09
W	2.819E-08	1.574E-08	1.067E-08	6.464E-09	4.426E-09	3.302E-09	2.609E-09	2.132E-09	1.784E-09	1.521E-09	1.320E-09	W	5.078E-08	2.718E-08	1.798E-08	1.046E-08	6.965E-09	5.090E-09	3.980E-09	3.218E-09	2.671E-09	2.268E-09	1.960E-09
WNW	4.927E-08	2.729E-08	1.767E-08	1.011E-08	6.818E-09	5.033E-09	3.954E-09	3.225E-09	2.718E-09	2.324E-09	2.016E-09	NW	3.463E-08	2.291E-08	1.974E-08	1.609E-08	1.312E-08	1.054E-08	8.264E-09	6.715E-09	5.608E-09	4.786E-09	4.155E-09
NW	2.618E-08	3.644E-08	2.361E-08	1.354E-08	9.159E-09	6.779E-09	5.308E-09	4.321E-09	3.617E-09	3.094E-09	2.692E-09	NNW	1.627E-08	2.849E-08	1.870E-08	1.092E-08	7.479E-09	5.590E-09	4.482E-09	3.711E-09	3.161E-09	2.715E-09	2.370E-09
N	1.494E-08	1.809E-08	1.179E-08	6.794E-09	4.602E-09	3.406E-09	2.740E-09	2.264E-09	1.890E-09	1.612E-09	1.399E-09	N	1.494E-08	1.809E-08	1.179E-08	6.794E-09	4.602E-09	3.406E-09	2.740E-09	2.264E-09	1.890E-09	1.612E-09	1.399E-09
NNE	1.393E-08	2.027E-08	1.343E-08	7.905E-09	5.435E-09	4.068E-09	3.214E-09	2.634E-09	2.298E-09	2.026E-09	1.766E-09	ENE	1.849E-08	2.444E-08	1.639E-08	9.788E-09	6.786E-09	5.109E-09	4.053E-09	3.333E-09	2.815E-09	2.425E-09	2.123E-09
NE	1.849E-08	2.444E-08	1.639E-08	9.788E-09	6.786E-09	5.109E-09	4.053E-09	3.333E-09	2.815E-09	2.425E-09	2.123E-09	E	2.470E-08	1.472E-08	1.105E-08	7.703E-09	5.592E-09	4.390E-09	3.619E-09	3.082E-09	2.580E-09	2.206E-09	1.918E-09
ENE	2.470E-08	1.472E-08	1.105E-08	7.703E-09	5.592E-09	4.390E-09	3.619E-09	3.082E-09	2.580E-09	2.206E-09	1.918E-09	SE	4.168E-08	4.950E-08	3.196E-08	1.823E-08	1.229E-08	9.071E-09	7.087E-09	5.758E-09	4.814E-09	4.112E-09	3.573E-09
E	4.168E-08	4.950E-08	3.196E-08	1.823E-08	1.229E-08	9.071E-09	7.087E-09	5.758E-09	4.814E-09	4.112E-09	3.573E-09	SSE	4.168E-08	4.950E-08	3.196E-08	1.823E-08	1.229E-08	9.071E-09	7.087E-09	5.758E-09	4.814E-09	4.112E-09	3.573E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.608E-08	8.307E-08	6.672E-08	5.193E-08	5.372E-08	3.244E-08	1.299E-08	6.613E-09	4.190E-09	2.990E-09
SSW	1.538E-08	3.135E-08	3.090E-08	3.242E-08	2.807E-08	1.998E-08	8.984E-09	4.760E-09	3.046E-09	2.178E-09
SW	3.827E-08	8.956E-08	5.834E-08	3.517E-08	2.460E-08	1.594E-08	7.111E-09	3.911E-09	2.596E-09	1.858E-09
WSW	5.532E-08	1.250E-07	7.331E-08	4.102E-08	2.706E-08	1.413E-08	5.839E-09	2.884E-09	1.802E-09	1.273E-09
W	7.876E-08	1.011E-07	5.790E-08	3.449E-08	2.351E-08	1.202E-08	5.848E-09	3.383E-09	2.163E-09	1.552E-09
WNW	8.020E-08	1.480E-07	8.527E-08	5.062E-08	3.352E-08	1.625E-08	6.493E-09	3.324E-09	2.135E-09	1.524E-09
NW	1.271E-07	3.061E-07	1.727E-07	9.505E-08	6.104E-08	2.834E-08	1.058E-08	5.146E-09	3.227E-09	2.273E-09
NNW	3.291E-08	1.019E-07	1.098E-07	8.643E-08	5.873E-08	2.790E-08	1.033E-08	5.078E-09	3.240E-09	2.327E-09
N	2.963E-08	6.505E-08	6.296E-08	4.921E-08	3.858E-08	2.411E-08	1.558E-08	1.032E-08	6.736E-09	4.796E-09
NNE	2.252E-08	4.570E-08	4.059E-08	3.059E-08	2.548E-08	2.846E-08	1.383E-08	6.825E-09	4.335E-09	3.100E-09
NE	1.432E-08	2.932E-08	2.589E-08	1.935E-08	1.596E-08	2.142E-08	1.112E-08	5.651E-09	3.722E-09	2.720E-09
ENE	1.610E-08	3.143E-08	2.644E-08	1.912E-08	1.518E-08	1.459E-08	6.930E-09	3.458E-09	2.258E-09	1.616E-09
E	1.225E-08	2.566E-08	2.274E-08	1.699E-08	1.388E-08	1.582E-08	8.035E-09	4.091E-09	2.672E-09	2.010E-09
ESE	1.996E-08	3.811E-08	3.222E-08	2.356E-08	1.883E-08	1.954E-08	9.921E-09	5.134E-09	3.341E-09	2.429E-09
SE	3.929E-08	6.970E-08	5.548E-08	3.882E-08	2.837E-08	1.531E-08	7.508E-09	4.402E-09	3.044E-09	2.210E-09
SSE	4.647E-08	8.608E-08	7.208E-08	5.241E-08	4.193E-08	3.997E-08	1.864E-08	9.136E-09	5.778E-09	4.120E-09

B307

ERP ELEVATED STACK RELEASES - OCT-DEC 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
	250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	
SECTOR												
S	3.094E-15	2.415E-09	3.832E-08	7.359E-08	9.143E-08	8.107E-08	6.745E-08	5.585E-08	4.674E-08	5.269E-08	5.684E-08	
SSW	6.534E-16	6.929E-10	1.221E-08	2.503E-08	3.410E-08	3.218E-08	2.800E-08	3.197E-08	3.417E-08	3.040E-08	2.738E-08	
SW	4.580E-16	5.782E-10	2.419E-08	6.750E-08	1.164E-07	7.961E-08	5.762E-08	4.383E-08	3.467E-08	2.829E-08	2.365E-08	
WSW	4.300E-16	6.172E-10	3.349E-08	9.879E-08	1.680E-07	1.049E-07	7.176E-08	5.249E-08	4.032E-08	3.213E-08	2.636E-08	
W	1.436E-13	1.395E-08	7.798E-08	1.114E-07	1.212E-07	7.989E-08	5.698E-08	4.306E-08	3.396E-08	2.767E-08	2.313E-08	
WNW	7.463E-15	3.339E-09	6.064E-08	1.330E-07	1.935E-07	1.202E-07	8.229E-08	6.319E-08	5.051E-08	4.012E-08	3.283E-08	
NW	8.837E-16	1.103E-09	7.189E-08	2.309E-07	4.252E-07	2.517E-07	1.672E-07	1.221E-07	9.378E-08	7.372E-08	5.982E-08	
NNW	5.669E-16	6.444E-10	2.123E-08	5.767E-08	1.098E-07	1.172E-07	1.124E-07	1.012E-07	8.981E-08	7.073E-08	5.750E-08	
N	1.415E-15	1.398E-09	2.351E-08	4.825E-08	6.893E-08	7.014E-08	6.446E-08	5.628E-08	4.916E-08	4.321E-08	3.831E-08	
NNE	1.127E-15	1.073E-09	1.807E-08	3.650E-08	4.965E-08	4.706E-08	4.113E-08	3.538E-08	3.052E-08	2.656E-08	2.337E-08	
NE	5.439E-16	6.361E-10	1.135E-08	2.334E-08	3.194E-08	3.016E-08	2.624E-08	2.247E-08	1.931E-08	1.674E-08	1.468E-08	
ENE	4.920E-16	7.059E-10	1.284E-08	2.618E-08	3.451E-08	3.153E-08	2.675E-08	2.248E-08	1.904E-08	1.633E-08	1.419E-08	
E	3.517E-16	5.024E-10	9.524E-09	2.012E-08	2.798E-08	2.648E-08	2.302E-08	1.970E-08	1.693E-08	1.468E-08	1.288E-08	
ESE	1.119E-15	1.000E-09	1.632E-08	3.212E-08	4.169E-08	3.819E-08	3.259E-08	2.756E-08	2.348E-08	2.024E-08	1.767E-08	
SE	2.847E-15	2.158E-09	3.300E-08	6.247E-08	7.675E-08	6.768E-08	5.611E-08	4.634E-08	3.870E-08	3.278E-08	2.817E-08	
SSE	3.597E-15	2.565E-09	3.883E-08	7.404E-08	9.403E-08	8.571E-08	7.299E-08	6.157E-08	5.228E-08	4.490E-08	3.903E-08	

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	
SECTOR												
S	5.049E-08	3.345E-08	2.157E-08	1.220E-08	8.430E-09	6.287E-09	4.833E-09	3.867E-09	3.211E-09	2.718E-09	2.328E-09	
SSW	2.586E-08	2.215E-08	1.445E-08	8.299E-09	5.957E-09	4.452E-09	3.437E-09	2.760E-09	2.280E-09	1.925E-09	1.652E-09	
SW	2.172E-08	1.723E-08	1.135E-08	6.587E-09	4.746E-09	3.640E-09	2.918E-09	2.343E-09	1.935E-09	1.633E-09	1.402E-09	
WSW	2.284E-08	1.378E-08	9.423E-09	5.590E-09	3.676E-09	2.652E-09	2.028E-09	1.613E-09	1.321E-09	1.106E-09	9.429E-10	
W	1.973E-08	1.113E-08	8.256E-09	5.590E-09	4.214E-09	3.100E-09	2.392E-09	1.918E-09	1.581E-09	1.332E-09	1.141E-09	
WNW	2.782E-08	1.541E-08	1.037E-08	6.182E-09	4.166E-09	3.059E-09	2.378E-09	1.912E-09	1.574E-09	1.322E-09	1.129E-09	
NW	5.015E-08	2.668E-08	1.753E-08	1.008E-08	6.628E-09	4.785E-09	3.696E-09	2.952E-09	2.422E-09	2.032E-09	1.735E-09	
NNW	4.877E-08	2.688E-08	1.732E-08	9.810E-09	6.555E-09	4.793E-09	3.730E-09	3.014E-09	2.517E-09	2.133E-09	1.833E-09	
N	3.435E-08	2.263E-08	1.943E-08	1.571E-08	1.272E-08	1.013E-08	7.885E-09	6.359E-09	5.270E-09	4.463E-09	3.845E-09	
NNE	2.594E-08	3.591E-08	2.316E-08	1.315E-08	8.813E-09	6.461E-09	5.012E-09	4.041E-09	3.352E-09	2.841E-09	2.449E-09	
NE	1.613E-08	2.801E-08	1.828E-08	1.054E-08	7.139E-09	5.273E-09	4.175E-09	3.415E-09	2.871E-09	2.436E-09	2.102E-09	
ENE	1.480E-08	1.780E-08	1.154E-08	6.576E-09	4.406E-09	3.226E-09	2.567E-09	2.099E-09	1.733E-09	1.463E-09	1.256E-09	
E	1.379E-08	1.996E-08	1.315E-08	7.657E-09	5.207E-09	3.856E-09	3.013E-09	2.443E-09	2.106E-09	1.834E-09	1.582E-09	
ESE	1.832E-08	2.410E-08	1.609E-08	9.516E-09	6.534E-09	4.872E-09	3.828E-09	3.118E-09	2.608E-09	2.226E-09	1.930E-09	
SE	2.452E-08	1.456E-08	1.088E-08	7.537E-09	5.433E-09	4.234E-09	3.466E-09	2.931E-09	2.435E-09	2.068E-09	1.785E-09	
SSE	4.133E-08	4.869E-08	3.126E-08	1.762E-08	1.174E-08	8.565E-09	6.614E-09	5.311E-09	4.387E-09	3.704E-09	3.181E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	4.602E-08	8.286E-08	6.645E-08	5.161E-08	5.326E-08	3.196E-08	1.261E-08	6.277E-09	3.893E-09	2.720E-09	
SSW	1.535E-08	3.123E-08	3.070E-08	3.211E-08	2.771E-08	1.955E-08	8.625E-09	4.447E-09	2.771E-09	1.929E-09	
SW	3.819E-08	8.920E-08	5.797E-08	3.485E-08	2.431E-08	1.561E-08	6.826E-09	3.646E-09	2.352E-09	1.637E-09	
WSW	5.521E-08	1.245E-07	7.288E-08	4.068E-08	2.677E-08	1.386E-08	5.591E-09	2.675E-09	1.620E-09	1.109E-09	
W	7.860E-08	1.007E-07	5.752E-08	3.416E-08	2.321E-08	1.176E-08	5.571E-09	3.114E-09	1.925E-09	1.335E-09	
WNW	8.005E-08	1.475E-07	8.476E-08	5.017E-08	3.313E-08	1.593E-08	6.217E-09	3.082E-09	1.916E-09	1.325E-09	
NW	1.268E-07	3.049E-07	1.717E-07	9.423E-08	6.036E-08	2.783E-08	1.020E-08	4.841E-09	2.963E-09	2.037E-09	
NNW	3.285E-08	1.015E-07	1.092E-07	8.581E-08	5.819E-08	2.750E-08	1.003E-08	4.838E-09	3.029E-09	2.136E-09	
N	2.959E-08	6.487E-08	6.270E-08	4.893E-08	3.830E-08	2.381E-08	1.521E-08	9.923E-09	6.380E-09	4.473E-09	
NNE	2.249E-08	4.558E-08	4.041E-08	3.040E-08	2.527E-08	2.803E-08	1.345E-08	6.509E-09	4.056E-09	2.847E-09	
NE	1.430E-08	2.924E-08	2.578E-08	1.923E-08	1.583E-08	2.105E-08	1.075E-08	5.331E-09	3.425E-09	2.441E-09	
ENE	1.607E-08	3.134E-08	2.632E-08	1.899E-08	1.505E-08	1.435E-08	6.715E-09	3.277E-09	2.093E-09	1.466E-09	
E	1.223E-08	2.557E-08	2.261E-08	1.686E-08	1.375E-08	1.556E-08	7.789E-09	3.879E-09	2.477E-09	1.821E-09	
ESE	1.994E-08	3.801E-08	3.207E-08	2.341E-08	1.868E-08	1.926E-08	9.651E-09	4.898E-09	3.127E-09	2.230E-09	
SE	3.924E-08	6.955E-08	5.529E-08	3.863E-08	2.819E-08	1.514E-08	7.346E-09	4.246E-09	2.895E-09	2.072E-09	
SSE	4.642E-08	8.589E-08	7.181E-08	5.212E-08	4.162E-08	3.931E-08	1.804E-08	8.632E-09	5.331E-09	3.713E-09	

B308

ERP ELEVATED STACK RELEASES - OCT-DEC 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	3.095E-15	2.416E-09	3.835E-08	7.367E-08	9.075E-08	7.979E-08	6.587E-08	5.415E-08	4.503E-08	5.067E-08	5.470E-08
SSW	6.535E-16	6.932E-10	1.222E-08	2.507E-08	3.389E-08	3.175E-08	2.746E-08	3.128E-08	3.341E-08	2.966E-08	2.668E-08
SW	4.581E-16	5.786E-10	2.422E-08	6.761E-08	1.155E-07	7.839E-08	5.640E-08	4.269E-08	3.363E-08	2.735E-08	2.280E-08
WSW	4.301E-16	6.175E-10	3.353E-08	9.887E-08	1.664E-07	1.030E-07	7.005E-08	5.096E-08	3.897E-08	3.094E-08	2.529E-08
W	1.436E-13	1.395E-08	7.773E-08	1.107E-07	1.198E-07	7.863E-08	5.591E-08	4.216E-08	3.321E-08	2.703E-08	2.257E-08
WNW	7.465E-15	3.341E-09	6.066E-08	1.324E-07	1.915E-07	1.183E-07	8.068E-08	6.181E-08	4.932E-08	3.904E-08	3.183E-08
NW	8.838E-16	1.104E-09	7.196E-08	2.305E-07	4.214E-07	2.475E-07	1.634E-07	1.189E-07	9.097E-08	7.120E-08	5.749E-08
NNW	5.670E-16	6.447E-10	2.125E-08	5.775E-08	1.093E-07	1.161E-07	1.112E-07	1.000E-07	8.870E-08	6.962E-08	5.636E-08
N	1.415E-15	1.399E-09	2.353E-08	4.831E-08	6.853E-08	6.936E-08	6.348E-08	5.524E-08	4.811E-08	4.220E-08	3.734E-08
NNE	1.127E-15	1.073E-09	1.808E-08	3.655E-08	4.933E-08	4.645E-08	4.037E-08	3.455E-08	2.969E-08	2.575E-08	2.259E-08
NE	5.440E-16	6.364E-10	1.136E-08	2.337E-08	3.173E-08	2.976E-08	2.574E-08	2.192E-08	1.876E-08	1.620E-08	1.416E-08
ENE	4.921E-16	7.064E-10	1.285E-08	2.621E-08	3.427E-08	3.107E-08	2.617E-08	2.185E-08	1.840E-08	1.570E-08	1.358E-08
E	3.518E-16	5.027E-10	9.534E-09	2.015E-08	2.780E-08	2.613E-08	2.257E-08	1.921E-08	1.642E-08	1.419E-08	1.240E-08
ESE	1.119E-15	1.001E-09	1.633E-08	3.216E-08	4.140E-08	3.764E-08	3.191E-08	2.682E-08	2.273E-08	1.951E-08	1.697E-08
SE	2.848E-15	2.159E-09	3.302E-08	6.252E-08	7.617E-08	6.660E-08	5.477E-08	4.490E-08	3.724E-08	3.136E-08	2.680E-08
SSE	3.598E-15	2.566E-09	3.886E-08	7.410E-08	9.336E-08	8.448E-08	7.147E-08	5.994E-08	5.065E-08	4.330E-08	3.750E-08

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.848E-08	3.170E-08	1.990E-08	1.067E-08	6.959E-09	4.944E-09	3.661E-09	2.834E-09	2.292E-09	1.901E-09	1.599E-09
SSW	2.521E-08	2.149E-08	1.364E-08	7.399E-09	4.985E-09	3.616E-09	2.725E-09	2.143E-09	1.739E-09	1.444E-09	1.221E-09
SW	2.094E-08	1.657E-08	1.063E-08	5.843E-09	3.953E-09	2.879E-09	2.247E-09	1.765E-09	1.431E-09	1.187E-09	1.003E-09
WSW	2.188E-08	1.299E-08	8.685E-09	4.964E-09	3.162E-09	2.224E-09	1.666E-09	1.302E-09	1.050E-09	8.680E-10	7.312E-10
W	1.923E-08	1.083E-08	8.016E-09	5.190E-09	3.727E-09	2.679E-09	2.026E-09	1.598E-09	1.299E-09	1.081E-09	9.169E-10
WNW	2.685E-08	1.451E-08	9.510E-09	5.359E-09	3.379E-09	2.363E-09	1.781E-09	1.402E-09	1.133E-09	9.353E-10	7.869E-10
NW	4.796E-08	2.484E-08	1.588E-08	8.642E-09	5.391E-09	3.727E-09	2.793E-09	2.180E-09	1.752E-09	1.443E-09	1.212E-09
NNW	4.758E-08	2.552E-08	1.595E-08	8.474E-09	5.257E-09	3.616E-09	2.673E-09	2.078E-09	1.689E-09	1.400E-09	1.179E-09
N	3.343E-08	2.193E-08	1.888E-08	1.539E-08	1.224E-08	9.346E-09	7.108E-09	5.619E-09	4.575E-09	3.814E-09	3.239E-09
NNE	2.513E-08	3.497E-08	2.188E-08	1.180E-08	7.540E-09	5.316E-09	3.988E-09	3.124E-09	2.525E-09	2.091E-09	1.765E-09
NE	1.559E-08	2.743E-08	1.738E-08	9.511E-09	6.103E-09	4.315E-09	3.306E-09	2.645E-09	2.182E-09	1.820E-09	1.546E-09
ENE	1.417E-08	1.719E-08	1.084E-08	5.842E-09	3.671E-09	2.549E-09	1.938E-09	1.532E-09	1.234E-09	1.019E-09	8.572E-10
E	1.329E-08	1.946E-08	1.247E-08	6.844E-09	4.343E-09	3.038E-09	2.261E-09	1.756E-09	1.457E-09	1.228E-09	1.033E-09
ESE	1.760E-08	2.345E-08	1.522E-08	8.495E-09	5.449E-09	3.840E-09	2.874E-09	2.243E-09	1.805E-09	1.487E-09	1.248E-09
SE	2.321E-08	1.352E-08	1.002E-08	6.907E-09	4.965E-09	3.874E-09	3.182E-09	2.694E-09	2.202E-09	1.842E-09	1.569E-09
SSE	3.973E-08	4.707E-08	2.934E-08	1.570E-08	9.943E-09	6.959E-09	5.188E-09	4.041E-09	3.249E-09	2.678E-09	2.249E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.606E-08	8.208E-08	6.489E-08	4.978E-08	5.120E-08	3.018E-08	1.107E-08	4.968E-09	2.864E-09	1.905E-09
SSW	1.537E-08	3.098E-08	3.013E-08	3.137E-08	2.702E-08	1.883E-08	7.712E-09	3.625E-09	2.155E-09	1.449E-09
SW	3.825E-08	8.838E-08	5.678E-08	3.383E-08	2.346E-08	1.490E-08	6.066E-09	2.913E-09	1.776E-09	1.191E-09
WSW	5.525E-08	1.232E-07	7.121E-08	3.934E-08	2.570E-08	1.305E-08	4.990E-09	2.251E-09	1.310E-09	8.713E-10
W	7.819E-08	9.948E-08	5.647E-08	3.341E-08	2.265E-08	1.145E-08	5.168E-09	2.697E-09	1.606E-09	1.085E-09
WNW	7.979E-08	1.458E-07	8.317E-08	4.897E-08	3.212E-08	1.503E-08	5.401E-09	2.401E-09	1.408E-09	9.389E-10
NW	1.267E-07	3.017E-07	1.680E-07	9.141E-08	5.803E-08	2.599E-08	8.805E-09	3.797E-09	2.192E-09	1.449E-09
NNW	3.289E-08	1.009E-07	1.080E-07	8.467E-08	5.704E-08	2.617E-08	8.705E-09	3.676E-09	2.100E-09	1.404E-09
N	2.962E-08	6.441E-08	6.175E-08	4.790E-08	3.733E-08	2.313E-08	1.477E-08	9.223E-09	5.647E-09	3.827E-09
NNE	2.251E-08	4.521E-08	3.966E-08	2.958E-08	2.446E-08	2.697E-08	1.215E-08	5.378E-09	3.143E-09	2.099E-09
NE	1.432E-08	2.900E-08	2.529E-08	1.869E-08	1.530E-08	2.033E-08	9.746E-09	4.388E-09	2.657E-09	1.826E-09
ENE	1.609E-08	3.106E-08	2.575E-08	1.836E-08	1.443E-08	1.370E-08	5.989E-09	2.604E-09	1.535E-09	1.023E-09
E	1.225E-08	2.536E-08	2.217E-08	1.637E-08	1.326E-08	1.498E-08	6.982E-09	3.075E-09	1.786E-09	1.224E-09
ESE	1.996E-08	3.768E-08	3.140E-08	2.267E-08	1.795E-08	1.849E-08	8.636E-09	3.883E-09	2.256E-09	1.493E-09
SE	3.927E-08	6.888E-08	5.397E-08	3.719E-08	2.682E-08	1.412E-08	6.736E-09	3.888E-09	2.646E-09	1.848E-09
SSE	4.646E-08	8.513E-08	7.032E-08	5.050E-08	4.004E-08	3.756E-08	1.617E-08	7.046E-09	4.067E-09	2.688E-09

B309

ERP ELEVATED STACK RELEASES - OCT-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****												
DIRECTION FROM SITE		DISTANCES IN MILES										
		.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S		2.292E-10	1.375E-09	2.928E-09	3.033E-09	1.895E-09	1.270E-09	8.973E-10	6.592E-10	4.992E-10	4.236E-10	3.747E-10
SSW		6.288E-11	3.772E-10	8.032E-10	8.320E-10	5.197E-10	3.485E-10	2.461E-10	1.808E-10	1.712E-10	1.296E-10	1.014E-10
SW		4.978E-11	2.986E-10	6.359E-10	6.587E-10	7.753E-10	4.272E-10	2.668E-10	1.821E-10	1.320E-10	9.998E-11	7.830E-11
WSW		5.240E-11	3.144E-10	6.694E-10	1.288E-09	8.591E-10	4.674E-10	2.891E-10	1.960E-10	1.415E-10	1.069E-10	8.366E-11
W		3.013E-11	1.471E-09	1.449E-09	1.038E-09	5.489E-10	2.886E-10	1.753E-10	1.176E-10	8.455E-11	6.402E-11	5.051E-11
WNW		4.192E-11	2.515E-10	1.498E-09	1.394E-09	8.409E-10	4.329E-10	2.615E-10	1.772E-10	1.393E-10	1.098E-10	9.161E-11
NW		9.432E-11	5.658E-10	1.205E-09	3.169E-09	2.146E-09	1.070E-09	6.321E-10	4.193E-10	3.025E-10	2.331E-10	1.898E-10
NNW		5.633E-11	3.379E-10	7.196E-10	7.453E-10	8.971E-10	4.922E-10	3.130E-10	2.685E-10	2.032E-10	1.657E-10	1.435E-10
N		1.205E-10	7.230E-10	1.540E-09	1.595E-09	9.960E-10	6.679E-10	4.717E-10	3.465E-10	2.625E-10	2.037E-10	1.613E-10
NNE		9.563E-11	5.737E-10	1.222E-09	1.265E-09	7.903E-10	5.299E-10	3.743E-10	2.750E-10	2.083E-10	1.616E-10	1.280E-10
NE		5.502E-11	3.301E-10	7.028E-10	7.280E-10	4.547E-10	3.049E-10	2.154E-10	1.582E-10	1.198E-10	9.300E-11	7.365E-11
ENE		5.764E-11	3.458E-10	7.363E-10	7.627E-10	4.764E-10	3.194E-10	2.256E-10	1.657E-10	1.255E-10	9.743E-11	7.716E-11
E		4.323E-11	2.593E-10	5.522E-10	5.720E-10	3.573E-10	2.396E-10	1.692E-10	1.243E-10	9.414E-11	7.307E-11	5.787E-11
ESE		8.908E-11	5.344E-10	1.138E-09	1.179E-09	7.362E-10	4.936E-10	3.487E-10	2.561E-10	1.940E-10	1.506E-10	1.192E-10
SE		1.991E-10	1.195E-09	2.544E-09	2.635E-09	1.646E-09	1.103E-09	7.794E-10	5.725E-10	4.336E-10	3.366E-10	2.665E-10
SSE		2.436E-10	1.462E-09	3.112E-09	3.224E-09	2.014E-09	1.350E-09	9.537E-10	7.006E-10	5.306E-10	4.119E-10	3.262E-10
DIRECTION FROM SITE		DISTANCES IN MILES										
		5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S		3.012E-10	1.742E-10	1.119E-10	6.108E-11	3.791E-11	3.127E-11	2.234E-11	1.671E-11	1.333E-11	1.060E-11	8.656E-12
SSW		8.247E-11	6.335E-11	4.408E-11	2.589E-11	1.641E-11	1.128E-11	8.083E-12	6.071E-12	4.793E-12	3.829E-12	3.125E-12
SW		6.420E-11	5.199E-11	3.659E-11	2.170E-11	1.377E-11	9.722E-12	6.743E-12	5.063E-12	3.937E-12	3.145E-12	2.567E-12
WSW		6.978E-11	4.839E-11	3.314E-11	2.119E-11	1.283E-11	8.600E-12	6.241E-12	4.686E-12	3.644E-12	2.910E-12	2.376E-12
W		4.128E-11	2.009E-11	3.027E-11	2.022E-11	1.149E-11	7.860E-12	5.632E-12	4.229E-12	3.288E-12	2.627E-12	2.144E-12
WNW		8.109E-11	5.165E-11	3.777E-11	2.311E-11	1.464E-11	9.283E-12	6.596E-12	4.954E-12	3.900E-12	3.115E-12	2.543E-12
NW		1.624E-10	9.514E-11	6.691E-11	4.117E-11	2.528E-11	1.689E-11	1.221E-11	9.169E-12	7.224E-12	5.771E-12	4.710E-12
NNW		1.303E-10	9.085E-11	6.898E-11	4.339E-11	2.785E-11	1.840E-11	1.243E-11	8.669E-12	6.683E-12	5.340E-12	4.360E-12
N		1.299E-10	6.152E-11	3.749E-11	1.970E-11	8.437E-11	4.664E-11	3.332E-11	2.502E-11	1.945E-11	1.554E-11	1.269E-11
NNE		1.031E-10	1.872E-10	1.157E-10	5.995E-11	3.656E-11	2.447E-11	1.748E-11	1.308E-11	1.015E-11	8.089E-12	6.591E-12
NE		5.932E-11	1.179E-10	7.396E-11	3.898E-11	2.389E-11	1.597E-11	1.143E-11	8.520E-12	6.625E-12	5.312E-12	4.336E-12
ENE		6.214E-11	7.030E-11	5.086E-11	3.084E-11	1.964E-11	1.301E-11	9.138E-12	6.385E-12	4.969E-12	3.973E-12	3.247E-12
E		4.661E-11	6.985E-11	5.284E-11	3.315E-11	2.127E-11	1.406E-11	9.834E-12	7.177E-12	5.449E-12	3.994E-12	3.251E-12
ESE		9.604E-11	1.125E-10	8.191E-11	4.992E-11	3.182E-11	2.107E-11	1.479E-11	1.084E-11	8.264E-12	6.494E-12	5.227E-12
SE		2.147E-10	1.016E-10	6.194E-11	3.253E-11	1.977E-11	1.352E-11	1.003E-11	1.675E-11	1.289E-11	1.022E-11	8.312E-12
SSE		2.627E-10	3.120E-10	1.929E-10	9.995E-11	6.095E-11	4.079E-11	2.914E-11	2.180E-11	1.690E-11	1.347E-11	1.097E-11

B310

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****											
DIRECTION FROM SITE		SEGMENT BOUNDARIES IN MILES									
		.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S		2.630E-09	1.870E-09	9.016E-10	5.161E-10	3.620E-10	1.747E-10	6.207E-11	2.947E-11	1.703E-11	1.069E-11
SSW		7.213E-10	5.130E-10	2.473E-10	1.581E-10	1.027E-10	5.903E-11	2.572E-11	1.137E-11	6.159E-12	3.854E-12
SW		5.711E-10	5.947E-10	2.757E-10	1.341E-10	7.950E-11	4.786E-11	2.148E-11	9.609E-12	5.114E-12	3.166E-12
WSW		8.656E-10	7.804E-10	2.994E-10	1.439E-10	8.542E-11	4.637E-11	2.013E-11	8.783E-12	4.733E-12	2.930E-12
W		1.271E-09	5.419E-10	1.824E-10	8.617E-11	5.110E-11	2.932E-11	1.857E-11	7.936E-12	4.272E-12	2.644E-12
WNW		1.175E-09	7.826E-10	2.735E-10	1.389E-10	9.309E-11	5.202E-11	2.260E-11	9.637E-12	5.021E-12	3.135E-12
NW		1.936E-09	1.895E-09	6.638E-10	3.094E-10	1.925E-10	9.753E-11	3.983E-11	1.726E-11	9.296E-12	5.809E-12
NNW		4.462E-10	6.834E-10	3.429E-10	2.076E-10	1.452E-10	8.989E-11	4.217E-11	1.853E-11	8.986E-12	5.375E-12
N		1.383E-09	9.832E-10	4.740E-10	2.641E-10	1.623E-10	6.604E-11	5.240E-11	5.137E-11	2.527E-11	1.564E-11
NNE		1.097E-09	7.802E-10	3.761E-10	2.096E-10	1.287E-10	1.368E-10	6.195E-11	2.490E-11	1.322E-11	8.144E-12
NE		6.312E-10	4.489E-10	2.164E-10	1.206E-10	7.407E-11	8.534E-11	4.005E-11	1.626E-11	8.629E-12	5.339E-12
ENE		6.612E-10	4.702E-10	2.267E-10	1.263E-10	7.760E-11	5.985E-11	3.031E-11	1.323E-11	6.632E-12	3.999E-12
E		4.959E-10	3.527E-10	1.700E-10	9.473E-11	5.820E-11	5.713E-11	3.225E-11	1.429E-11	7.278E-12	4.150E-12
ESE		1.022E-09	7.267E-10	3.503E-10	1.952E-10	1.199E-10	9.525E-11	4.898E-11	2.142E-11	1.099E-11	6.549E-12
SE		2.284E-09	1.624E-09	7.831E-10	4.363E-10	2.681E-10	1.091E-10	3.339E-11	1.379E-11	1.336E-11	1.031E-11
SSE		2.795E-09	1.988E-09	9.582E-10	5.339E-10	3.280E-10	2.481E-10	1.033E-10	4.151E-11	2.203E-11	1.356E-11

ERP ELEVATED STACK RELEASES - OCT-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION	DIRECTION FROM SITE	DIST. (MI)	X/Q (SEC/M3)			D/Q (PER SQ. METER)
				NO DECAY	2.26 DAY DECAY	8.0 DAY DECAY	
A	Site Boundary	S	.80	4.7E-08	4.7E-08	4.7E-08	3.1E-09
A	Site Boundary	SSW	.82	1.7E-08	1.7E-08	1.7E-08	8.6E-10
A	Site Boundary	SW	.97	6.3E-08	6.3E-08	6.3E-08	6.8E-10
A	Site Boundary	WSW	.93	8.0E-08	7.9E-08	8.0E-08	1.1E-09
A	Site Boundary	W	.91	1.0E-07	1.0E-07	1.0E-07	1.1E-09
A	Site Boundary	WNW	.94	1.2E-07	1.2E-07	1.2E-07	1.5E-09
A	Site Boundary	NW	.81	1.1E-07	1.1E-07	1.1E-07	1.3E-09
A	Site Boundary	NNW	.69	1.3E-08	1.2E-08	1.3E-08	6.2E-10
A	Site Boundary	N	.67	1.4E-08	1.4E-08	1.4E-08	1.3E-09
A	Site Boundary	NNE	.60	5.2E-09	5.2E-09	5.2E-09	8.3E-10
A	Site Boundary	NE	.62	4.2E-09	4.2E-09	4.2E-09	5.1E-10
A	Site Boundary	ENE	.59	3.0E-09	3.0E-09	3.0E-09	4.8E-10
A	Site Boundary	E	.53	8.2E-10	8.2E-10	8.2E-10	2.9E-10
A	Site Boundary	ESE	.54	2.0E-09	2.0E-09	2.0E-09	6.2E-10
A	Site Boundary	SE	.65	1.6E-08	1.6E-08	1.6E-08	2.0E-09
A	Site Boundary	SSE	.81	4.9E-08	4.9E-08	4.9E-08	3.3E-09
A	Nearest Res	SSW	3.00	3.2E-08	3.2E-08	3.1E-08	1.8E-10
A	Nearest Res	SW	1.00	6.8E-08	6.7E-08	6.8E-08	6.6E-10
A	Nearest Res	WSW	1.90	1.1E-07	1.1E-07	1.1E-07	5.2E-10
A	Nearest Res	W	1.00	1.1E-07	1.1E-07	1.1E-07	1.0E-09
A	Nearest Res	WNW	1.70	1.6E-07	1.6E-07	1.6E-07	6.3E-10
A	Nearest Res	NW	.90	1.6E-07	1.6E-07	1.6E-07	2.9E-09
A	Nearest Res	NNW	1.90	1.2E-07	1.2E-07	1.2E-07	5.5E-10
A	Nearest Res	N	2.90	5.8E-08	5.8E-08	5.7E-08	3.7E-10
A	Nearest Res	NNE	1.70	5.0E-08	5.0E-08	4.9E-08	6.7E-10
A	Nearest Res	ENE	1.70	3.4E-08	3.4E-08	3.4E-08	4.0E-10
A	Nearest Res	E	2.20	2.5E-08	2.5E-08	2.5E-08	2.1E-10
A	Nearest Res	SE	2.80	5.0E-08	5.0E-08	4.9E-08	6.5E-10
A	Nearest Cow	NNW	3.50	9.0E-08	9.0E-08	8.9E-08	2.0E-10
A	Nearest Garde	SSW	3.00	3.2E-08	3.2E-08	3.1E-08	1.8E-10
A	Nearest Garde	SW	2.20	7.0E-08	6.9E-08	6.8E-08	3.5E-10
A	Nearest Garde	WNW	1.70	1.6E-07	1.6E-07	1.6E-07	6.3E-10
A	Nearest Garde	NW	.90	1.6E-07	1.6E-07	1.6E-07	2.9E-09
A	Nearest Garde	NNW	2.80	1.1E-07	1.1E-07	1.0E-07	2.9E-10
A	Nearest Garde	E	2.20	2.5E-08	2.5E-08	2.5E-08	2.1E-10
A	Nearest Garde	ESE	2.20	3.6E-08	3.6E-08	3.5E-08	4.3E-10
A	Nearest Garde	SE	2.80	5.0E-08	5.0E-08	4.9E-08	6.5E-10
A	MAXIMUM CHI/Q	S	1.50	9.2E-08	9.1E-08	9.1E-08	1.9E-09
A	MAXIMUM CHI/Q	SSW	3.50	3.5E-08	3.4E-08	3.3E-08	1.7E-10
A	MAXIMUM CHI/Q	SW	1.50	1.2E-07	1.2E-07	1.2E-07	7.8E-10
A	MAXIMUM CHI/Q	WSW	1.50	1.7E-07	1.7E-07	1.7E-07	8.6E-10
A	MAXIMUM CHI/Q	W	1.50	1.2E-07	1.2E-07	1.2E-07	5.5E-10
A	MAXIMUM CHI/Q	WNW	1.50	1.9E-07	1.9E-07	1.9E-07	8.4E-10
A	MAXIMUM CHI/Q	NW	1.50	4.3E-07	4.3E-07	4.2E-07	2.1E-09
A	MAXIMUM CHI/Q	NNW	2.00	1.2E-07	1.2E-07	1.2E-07	4.9E-10
A	MAXIMUM CHI/Q	N	2.00	7.0E-08	7.0E-08	6.9E-08	6.7E-10
A	MAXIMUM CHI/Q	NNE	1.50	5.0E-08	5.0E-08	4.9E-08	7.9E-10
A	MAXIMUM CHI/Q	NE	1.50	3.2E-08	3.2E-08	3.2E-08	4.5E-10
A	MAXIMUM CHI/Q	ENE	1.50	3.5E-08	3.5E-08	3.4E-08	4.8E-10
A	MAXIMUM CHI/Q	E	1.50	2.8E-08	2.8E-08	2.8E-08	3.6E-10
A	MAXIMUM CHI/Q	ESE	1.50	4.2E-08	4.2E-08	4.1E-08	7.4E-10
A	MAXIMUM CHI/Q	SE	1.50	7.7E-08	7.7E-08	7.6E-08	1.6E-09
A	MAXIMUM CHI/Q	SSE	1.50	9.4E-08	9.4E-08	9.3E-08	2.0E-09

B311

Atmospheric Diffusion Estimates

Elevated Releases

July-December 2018

ERP ELEVATED STACK RELEASES - JUL-DEC 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)			DISTANCE IN MILES FROM THE SITE									
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500		
S	2.479E-15	2.334E-09	3.874E-08	7.577E-08	9.581E-08	8.571E-08	7.170E-08	5.959E-08	5.002E-08	5.669E-08	6.106E-08		
SSW	1.072E-15	1.371E-09	2.500E-08	5.147E-08	6.881E-08	6.344E-08	5.412E-08	5.908E-08	6.074E-08	5.323E-08	4.732E-08		
SW	9.623E-16	1.216E-09	5.167E-08	1.424E-07	2.321E-07	1.565E-07	1.122E-07	8.472E-08	6.661E-08	5.406E-08	4.500E-08		
WSW	6.169E-16	8.739E-10	4.675E-08	1.392E-07	2.474E-07	1.566E-07	1.082E-07	7.968E-08	6.155E-08	4.929E-08	4.059E-08		
W	1.438E-13	2.028E-08	1.181E-07	1.714E-07	1.840E-07	1.198E-07	8.449E-08	6.327E-08	4.952E-08	4.009E-08	3.331E-08		
WNW	8.611E-15	4.872E-09	9.410E-08	2.028E-07	2.861E-07	1.786E-07	1.228E-07	9.454E-08	7.571E-08	6.022E-08	4.934E-08		
NW	1.164E-15	1.334E-09	8.204E-08	2.584E-07	4.923E-07	2.946E-07	1.973E-07	1.455E-07	1.126E-07	8.898E-08	7.252E-08		
NNW	1.090E-15	1.231E-09	3.893E-08	1.012E-07	1.807E-07	1.875E-07	1.776E-07	1.589E-07	1.402E-07	1.104E-07	8.978E-08		
N	5.069E-11	4.306E-09	3.155E-08	5.927E-08	8.070E-08	8.027E-08	7.275E-08	6.299E-08	5.469E-08	4.788E-08	4.232E-08		
NNE	1.208E-11	1.637E-09	1.822E-08	3.583E-08	4.834E-08	4.567E-08	3.983E-08	3.419E-08	2.946E-08	2.561E-08	2.251E-08		
NE	4.701E-16	6.083E-10	1.129E-08	2.369E-08	3.289E-08	3.120E-08	2.717E-08	2.326E-08	1.998E-08	1.731E-08	1.516E-08		
ENE	3.951E-16	5.698E-10	1.057E-08	2.208E-08	3.035E-08	2.859E-08	2.478E-08	2.116E-08	1.814E-08	1.570E-08	1.374E-08		
E	1.982E-16	3.131E-10	6.384E-09	1.407E-08	2.034E-08	1.954E-08	1.710E-08	1.467E-08	1.261E-08	1.093E-08	9.578E-09		
ESE	7.235E-16	6.618E-10	1.113E-08	2.228E-08	2.934E-08	2.702E-08	2.311E-08	1.956E-08	1.668E-08	1.439E-08	1.257E-08		
SE	1.703E-15	1.426E-09	2.270E-08	4.367E-08	5.440E-08	4.831E-08	4.026E-08	3.339E-08	2.799E-08	2.380E-08	2.052E-08		
SSE	2.374E-15	1.832E-09	2.869E-08	5.563E-08	7.200E-08	6.633E-08	5.689E-08	4.825E-08	4.116E-08	3.549E-08	3.096E-08		

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)			DISTANCE IN MILES FROM THE SITE									
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000		
S	5.410E-08	3.470E-08	2.236E-08	1.267E-08	8.716E-09	6.496E-09	5.029E-09	4.055E-09	3.385E-09	2.885E-09	2.492E-09		
SSW	4.393E-08	3.401E-08	2.209E-08	1.266E-08	8.963E-09	6.706E-09	5.217E-09	4.224E-09	3.522E-09	3.001E-09	2.602E-09		
SW	4.068E-08	2.916E-08	1.904E-08	1.097E-08	7.762E-09	5.904E-09	4.718E-09	3.819E-09	3.182E-09	2.711E-09	2.350E-09		
WSW	3.536E-08	2.168E-08	1.494E-08	8.965E-09	5.987E-09	4.387E-09	3.407E-09	2.753E-09	2.290E-09	1.948E-09	1.686E-09		
W	2.827E-08	1.568E-08	1.126E-08	7.277E-09	5.318E-09	3.942E-09	3.074E-09	2.494E-09	2.082E-09	1.776E-09	1.542E-09		
WNW	4.184E-08	2.326E-08	1.570E-08	9.430E-09	6.428E-09	4.778E-09	3.762E-09	3.066E-09	2.562E-09	2.182E-09	1.891E-09		
NW	6.111E-08	3.319E-08	2.216E-08	1.305E-08	8.730E-09	6.404E-09	5.029E-09	4.079E-09	3.394E-09	2.887E-09	2.499E-09		
NNW	7.611E-08	4.195E-08	2.713E-08	1.548E-08	1.043E-08	7.687E-09	6.032E-09	4.914E-09	4.136E-09	3.535E-09	3.065E-09		
N	3.786E-08	2.482E-08	2.127E-08	1.724E-08	1.394E-08	1.112E-08	8.709E-09	7.072E-09	5.902E-09	5.034E-09	4.368E-09		
NNE	2.487E-08	3.365E-08	2.178E-08	1.247E-08	8.425E-09	6.230E-09	4.875E-09	3.966E-09	3.319E-09	2.837E-09	2.467E-09		
NE	1.644E-08	2.500E-08	1.631E-08	9.439E-09	6.429E-09	4.783E-09	3.812E-09	3.143E-09	2.664E-09	2.283E-09	1.990E-09		
ENE	1.450E-08	1.982E-08	1.311E-08	7.690E-09	5.275E-09	3.942E-09	3.255E-09	2.741E-09	2.299E-09	1.969E-09	1.715E-09		
E	1.012E-08	1.447E-08	9.610E-09	5.673E-09	3.907E-09	2.929E-09	2.316E-09	1.901E-09	1.667E-09	1.476E-09	1.288E-09		
ESE	1.302E-08	1.668E-08	1.114E-08	6.608E-09	4.561E-09	3.421E-09	2.706E-09	2.220E-09	1.871E-09	1.609E-09	1.406E-09		
SE	1.792E-08	1.080E-08	8.239E-09	5.953E-09	4.412E-09	3.529E-09	2.960E-09	2.561E-09	2.153E-09	1.848E-09	1.612E-09		
SSE	3.313E-08	4.019E-08	2.596E-08	1.482E-08	9.995E-09	7.379E-09	5.765E-09	4.685E-09	3.917E-09	3.346E-09	2.908E-09		

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	4.711E-08	8.687E-08	7.059E-08	5.530E-08	5.719E-08	3.353E-08	1.307E-08	6.501E-09	4.078E-09	2.888E-09
SSW	3.151E-08	6.257E-08	5.859E-08	5.740E-08	4.781E-08	3.091E-08	1.311E-08	6.712E-09	4.240E-09	3.007E-09
SW	8.079E-08	1.786E-07	1.130E-07	6.700E-08	4.609E-08	2.722E-08	1.134E-08	5.925E-09	3.833E-09	2.717E-09
WSW	7.765E-08	1.830E-07	1.097E-07	6.206E-08	4.123E-08	2.172E-08	8.969E-09	4.422E-09	2.763E-09	1.953E-09
W	1.200E-07	1.526E-07	8.541E-08	4.986E-08	3.345E-08	1.651E-08	7.291E-09	3.962E-09	2.503E-09	1.780E-09
WNW	1.226E-07	2.198E-07	1.264E-07	7.519E-08	4.978E-08	2.403E-08	9.490E-09	4.812E-09	3.073E-09	2.187E-09
NW	1.425E-07	3.525E-07	2.025E-07	1.130E-07	7.317E-08	3.449E-08	1.315E-08	6.474E-09	4.090E-09	2.893E-09
NNW	5.823E-08	1.661E-07	1.728E-07	1.342E-07	9.083E-08	4.295E-08	1.582E-08	7.756E-09	4.937E-09	3.539E-09
N	3.781E-08	7.575E-08	7.085E-08	5.447E-08	4.232E-08	2.614E-08	1.667E-08	1.091E-08	7.094E-09	5.044E-09
NNE	2.236E-08	4.438E-08	3.913E-08	2.935E-08	2.431E-08	2.642E-08	1.274E-08	6.274E-09	3.979E-09	2.843E-09
NE	1.443E-08	3.009E-08	2.668E-08	1.990E-08	1.627E-08	1.924E-08	9.628E-09	4.834E-09	3.152E-09	2.287E-09
ENE	1.346E-08	2.773E-08	2.435E-08	1.807E-08	1.460E-08	1.566E-08	7.820E-09	4.022E-09	2.719E-09	1.973E-09
E	8.450E-09	1.859E-08	1.678E-08	1.256E-08	1.018E-08	1.134E-08	5.763E-09	2.945E-09	1.930E-09	1.463E-09
ESE	1.376E-08	2.674E-08	2.273E-08	1.663E-08	1.328E-08	1.340E-08	6.705E-09	3.439E-09	2.226E-09	1.611E-09
SE	2.729E-08	4.931E-08	3.966E-08	2.794E-08	2.053E-08	1.124E-08	5.776E-09	3.537E-09	2.519E-09	1.851E-09
SSE	3.470E-08	6.584E-08	5.595E-08	4.103E-08	3.310E-08	3.230E-08	1.515E-08	7.431E-09	4.702E-09	3.353E-09

B313

ERP ELEVATED STACK RELEASES - JUL-DEC 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE	CHI/Q (SEC/METER CUBED)											
	SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	2.478E-15	2.333E-09	3.870E-08	7.566E-08	9.558E-08	8.542E-08	7.139E-08	5.928E-08	4.971E-08	5.627E-08	6.051E-08	
SSW	1.071E-15	1.369E-09	2.497E-08	5.137E-08	6.858E-08	6.314E-08	5.379E-08	5.863E-08	6.017E-08	5.264E-08	4.673E-08	
SW	9.621E-16	1.215E-09	5.159E-08	1.421E-07	2.311E-07	1.556E-07	1.114E-07	8.399E-08	6.594E-08	5.343E-08	4.441E-08	
WSW	6.167E-16	8.732E-10	4.668E-08	1.389E-07	2.464E-07	1.557E-07	1.074E-07	7.899E-08	6.092E-08	4.871E-08	4.005E-08	
W	1.438E-13	2.026E-08	1.179E-07	1.709E-07	1.831E-07	1.190E-07	8.382E-08	6.265E-08	4.894E-08	3.955E-08	3.280E-08	
WNW	8.609E-15	4.868E-09	9.393E-08	2.022E-07	2.849E-07	1.777E-07	1.219E-07	9.372E-08	7.493E-08	5.950E-08	4.867E-08	
NW	1.164E-15	1.333E-09	8.194E-08	2.579E-07	4.906E-07	2.932E-07	1.961E-07	1.444E-07	1.116E-07	8.809E-08	7.169E-08	
NNW	1.090E-15	1.230E-09	3.889E-08	1.010E-07	1.801E-07	1.867E-07	1.767E-07	1.578E-07	1.391E-07	1.094E-07	8.889E-08	
N	5.068E-11	4.304E-09	3.152E-08	5.918E-08	8.051E-08	8.002E-08	7.246E-08	6.269E-08	5.439E-08	4.758E-08	4.202E-08	
NNE	1.208E-11	1.636E-09	1.820E-08	3.578E-08	4.822E-08	4.551E-08	3.965E-08	3.401E-08	2.928E-08	2.543E-08	2.233E-08	
NE	4.699E-16	6.078E-10	1.127E-08	2.364E-08	3.278E-08	3.106E-08	2.702E-08	2.311E-08	1.982E-08	1.715E-08	1.501E-08	
ENE	3.950E-16	5.694E-10	1.056E-08	2.203E-08	3.025E-08	2.846E-08	2.464E-08	2.101E-08	1.799E-08	1.555E-08	1.360E-08	
E	1.981E-16	3.128E-10	6.373E-09	1.403E-08	2.026E-08	1.944E-08	1.698E-08	1.455E-08	1.249E-08	1.081E-08	9.464E-09	
ESE	7.233E-16	6.614E-10	1.112E-08	2.224E-08	2.926E-08	2.692E-08	2.300E-08	1.945E-08	1.656E-08	1.427E-08	1.246E-08	
SE	1.702E-15	1.425E-09	2.268E-08	4.361E-08	5.428E-08	4.817E-08	4.010E-08	3.323E-08	2.783E-08	2.365E-08	2.037E-08	
SSE	2.374E-15	1.831E-09	2.866E-08	5.556E-08	7.184E-08	6.612E-08	5.666E-08	4.801E-08	4.092E-08	3.524E-08	3.072E-08	

ANNUAL AVERAGE	CHI/Q (SEC/METER CUBED)											
	SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	5.355E-08	3.412E-08	2.187E-08	1.225E-08	8.325E-09	6.131E-09	4.693E-09	3.740E-09	3.087E-09	2.601E-09	2.221E-09	
SSW	4.330E-08	3.325E-08	2.143E-08	1.209E-08	8.436E-09	6.217E-09	4.766E-09	3.803E-09	3.125E-09	2.625E-09	2.244E-09	
SW	4.008E-08	2.849E-08	1.845E-08	1.047E-08	7.293E-09	5.463E-09	4.298E-09	3.427E-09	2.813E-09	2.361E-09	2.017E-09	
WSW	3.484E-08	2.118E-08	1.448E-08	8.546E-09	5.616E-09	4.050E-09	3.096E-09	2.462E-09	2.016E-09	1.688E-09	1.439E-09	
W	2.778E-08	1.527E-08	1.085E-08	6.870E-09	4.916E-09	3.573E-09	2.734E-09	2.176E-09	1.782E-09	1.493E-09	1.272E-09	
WNW	4.120E-08	2.271E-08	1.520E-08	8.968E-09	6.008E-09	4.389E-09	3.396E-09	2.721E-09	2.235E-09	1.872E-09	1.596E-09	
NW	6.034E-08	3.254E-08	2.158E-08	1.254E-08	8.276E-09	5.992E-09	4.643E-09	3.717E-09	3.053E-09	2.563E-09	2.191E-09	
NNW	7.526E-08	4.125E-08	2.653E-08	1.497E-08	9.973E-09	7.273E-09	5.646E-09	4.551E-09	3.790E-09	3.205E-09	2.751E-09	
N	3.756E-08	2.452E-08	2.093E-08	1.683E-08	1.349E-08	1.067E-08	8.289E-09	6.676E-09	5.527E-09	4.677E-09	4.026E-09	
NNE	2.465E-08	3.317E-08	2.137E-08	1.212E-08	8.115E-09	5.946E-09	4.611E-09	3.717E-09	3.083E-09	2.613E-09	2.252E-09	
NE	1.625E-08	2.457E-08	1.594E-08	9.115E-09	6.136E-09	4.512E-09	3.554E-09	2.896E-09	2.426E-09	2.055E-09	1.770E-09	
ENE	1.433E-08	1.941E-08	1.274E-08	7.369E-09	4.984E-09	3.672E-09	2.990E-09	2.483E-09	2.054E-09	1.736E-09	1.493E-09	
E	9.987E-09	1.420E-08	9.367E-09	5.458E-09	3.711E-09	2.746E-09	2.143E-09	1.736E-09	1.501E-09	1.311E-09	1.129E-09	
ESE	1.289E-08	1.638E-08	1.087E-08	6.373E-09	4.345E-09	3.220E-09	2.517E-09	2.040E-09	1.699E-09	1.444E-09	1.248E-09	
SE	1.778E-08	1.066E-08	8.094E-09	5.784E-09	4.239E-09	3.350E-09	2.775E-09	2.370E-09	1.970E-09	1.672E-09	1.443E-09	
SSE	3.283E-08	3.948E-08	2.535E-08	1.429E-08	9.517E-09	6.939E-09	5.354E-09	4.297E-09	3.547E-09	2.993E-09	2.569E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION	SEGMENT BOUNDARIES IN MILES FROM THE SITE											
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50		
FROM SITE												
S	4.704E-08	8.664E-08	7.029E-08	5.495E-08	5.668E-08	3.299E-08	1.264E-08	6.141E-09	3.763E-09	2.604E-09		
SSW	3.146E-08	6.234E-08	5.822E-08	5.686E-08	4.721E-08	3.023E-08	1.254E-08	6.229E-09	3.820E-09	2.632E-09		
SW	8.061E-08	1.778E-07	1.122E-07	6.633E-08	4.548E-08	2.660E-08	1.083E-08	5.485E-09	3.442E-09	2.368E-09		
WSW	7.748E-08	1.822E-07	1.089E-07	6.143E-08	4.069E-08	2.124E-08	8.562E-09	4.086E-09	2.473E-09	1.693E-09		
W	1.198E-07	1.519E-07	8.474E-08	4.928E-08	3.294E-08	1.608E-08	6.886E-09	3.596E-09	2.185E-09	1.497E-09		
WNW	1.223E-07	2.189E-07	1.255E-07	7.442E-08	4.911E-08	2.348E-08	9.037E-09	4.424E-09	2.729E-09	1.877E-09		
NW	1.422E-07	3.512E-07	2.013E-07	1.120E-07	7.234E-08	3.385E-08	1.265E-08	6.062E-09	3.728E-09	2.570E-09		
NNW	5.813E-08	1.655E-07	1.718E-07	1.331E-07	8.993E-08	4.227E-08	1.532E-08	7.342E-09	4.574E-09	3.210E-09		
N	3.777E-08	7.556E-08	7.057E-08	5.417E-08	4.202E-08	2.582E-08	1.626E-08	1.047E-08	6.699E-09	4.688E-09		
NNE	2.233E-08	4.425E-08	3.896E-08	2.916E-08	2.411E-08	2.603E-08	1.240E-08	5.990E-09	3.731E-09	2.619E-09		
NE	1.440E-08	2.999E-08	2.653E-08	1.974E-08	1.610E-08	1.888E-08	9.306E-09	4.562E-09	2.905E-09	2.059E-09		
ENE	1.344E-08	2.763E-08	2.421E-08	1.792E-08	1.444E-08	1.532E-08	7.502E-09	3.749E-09	2.465E-09	1.740E-09		
E	8.431E-09	1.851E-08	1.666E-08	1.244E-08	1.006E-08	1.112E-08	5.550E-09	2.762E-09	1.763E-09	1.300E-09		
ESE	1.374E-08	2.666E-08	2.262E-08	1.651E-08	1.315E-08	1.316E-08	6.472E-09	3.239E-09	2.047E-09	1.447E-09		
SE	2.726E-08	4.919E-08	3.950E-08	2.778E-08	2.038E-08	1.110E-08	5.610E-09	3.357E-09	2.333E-09	1.675E-09		
SSE	3.465E-08	6.568E-08	5.572E-08	4.078E-08	3.284E-08	3.172E-08	1.463E-08	6.993E-09	4.313E-09	3.000E-09		

B314

ERP ELEVATED STACK RELEASES - JUL-DEC 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
	SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	2.479E-15	2.334E-09	3.873E-08	7.574E-08	9.488E-08	8.409E-08	6.974E-08	5.751E-08	4.792E-08	5.416E-08	5.828E-08	
SSW	1.072E-15	1.370E-09	2.499E-08	5.144E-08	6.813E-08	6.223E-08	5.263E-08	5.710E-08	5.848E-08	5.099E-08	4.515E-08	
SW	9.623E-16	1.215E-09	5.164E-08	1.423E-07	2.292E-07	1.530E-07	1.087E-07	8.147E-08	6.364E-08	5.135E-08	4.252E-08	
WSW	6.168E-16	8.737E-10	4.673E-08	1.390E-07	2.443E-07	1.532E-07	1.051E-07	7.694E-08	5.911E-08	4.711E-08	3.863E-08	
W	1.438E-13	2.028E-08	1.175E-07	1.697E-07	1.810E-07	1.171E-07	8.225E-08	6.135E-08	4.785E-08	3.862E-08	3.200E-08	
WNW	8.611E-15	4.871E-09	9.400E-08	2.015E-07	2.818E-07	1.745E-07	1.191E-07	9.134E-08	7.286E-08	5.763E-08	4.695E-08	
NW	1.164E-15	1.334E-09	8.201E-08	2.574E-07	4.863E-07	2.887E-07	1.921E-07	1.410E-07	1.087E-07	8.544E-08	6.924E-08	
NNW	1.090E-15	1.231E-09	3.892E-08	1.011E-07	1.791E-07	1.848E-07	1.745E-07	1.557E-07	1.372E-07	1.075E-07	8.697E-08	
N	5.068E-11	4.281E-09	3.145E-08	5.916E-08	7.997E-08	7.904E-08	7.125E-08	6.141E-08	5.311E-08	4.634E-08	4.083E-08	
NNE	1.208E-11	1.631E-09	1.820E-08	3.580E-08	4.790E-08	4.491E-08	3.890E-08	3.320E-08	2.846E-08	2.463E-08	2.156E-08	
NE	4.700E-16	6.082E-10	1.128E-08	2.367E-08	3.258E-08	3.065E-08	2.650E-08	2.254E-08	1.924E-08	1.658E-08	1.445E-08	
ENE	3.951E-16	5.697E-10	1.057E-08	2.207E-08	3.006E-08	2.808E-08	2.415E-08	2.047E-08	1.744E-08	1.502E-08	1.308E-08	
E	1.981E-16	3.130E-10	6.381E-09	1.402E-08	2.014E-08	1.919E-08	1.665E-08	1.418E-08	1.211E-08	1.044E-08	9.102E-09	
ESE	7.234E-16	6.617E-10	1.112E-08	2.227E-08	2.906E-08	2.653E-08	2.251E-08	1.892E-08	1.603E-08	1.375E-08	1.195E-08	
SE	1.702E-15	1.425E-09	2.269E-08	4.366E-08	5.388E-08	4.741E-08	3.915E-08	3.222E-08	2.681E-08	2.265E-08	1.941E-08	
SSE	2.374E-15	1.831E-09	2.868E-08	5.561E-08	7.134E-08	6.519E-08	5.550E-08	4.677E-08	3.968E-08	3.403E-08	2.955E-08	

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
	SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	5.145E-08	3.232E-08	2.016E-08	1.072E-08	6.890E-09	4.845E-09	3.578E-09	2.764E-09	2.224E-09	1.837E-09	1.541E-09	
SSW	4.182E-08	3.191E-08	2.004E-08	1.074E-08	7.075E-09	5.065E-09	3.794E-09	2.968E-09	2.397E-09	1.981E-09	1.670E-09	
SW	3.833E-08	2.709E-08	1.712E-08	9.240E-09	6.087E-09	4.352E-09	3.337E-09	2.605E-09	2.099E-09	1.733E-09	1.459E-09	
WSW	3.356E-08	2.012E-08	1.343E-08	7.622E-09	4.855E-09	3.415E-09	2.557E-09	1.998E-09	1.612E-09	1.332E-09	1.122E-09	
W	2.709E-08	1.487E-08	1.056E-08	6.413E-09	4.375E-09	3.111E-09	2.337E-09	1.832E-09	1.482E-09	1.227E-09	1.036E-09	
WNW	3.958E-08	2.130E-08	1.390E-08	7.781E-09	4.898E-09	3.417E-09	2.568E-09	2.015E-09	1.626E-09	1.340E-09	1.126E-09	
NW	5.801E-08	3.049E-08	1.967E-08	1.081E-08	6.752E-09	4.671E-09	3.509E-09	2.746E-09	2.211E-09	1.823E-09	1.533E-09	
NNW	7.331E-08	3.911E-08	2.440E-08	1.295E-08	8.026E-09	5.516E-09	4.073E-09	3.161E-09	2.563E-09	2.121E-09	1.785E-09	
N	3.643E-08	2.366E-08	2.025E-08	1.642E-08	1.295E-08	9.822E-09	7.459E-09	5.891E-09	4.793E-09	3.993E-09	3.389E-09	
NNE	2.384E-08	3.224E-08	2.015E-08	1.086E-08	6.943E-09	4.896E-09	3.675E-09	2.880E-09	2.328E-09	1.929E-09	1.628E-09	
NE	1.567E-08	2.394E-08	1.509E-08	8.193E-09	5.237E-09	3.692E-09	2.818E-09	2.245E-09	1.844E-09	1.536E-09	1.302E-09	
ENE	1.379E-08	1.895E-08	1.211E-08	6.626E-09	4.198E-09	2.932E-09	2.280E-09	1.828E-09	1.476E-09	1.221E-09	1.029E-09	
E	9.606E-09	1.384E-08	8.886E-09	4.894E-09	3.115E-09	2.183E-09	1.626E-09	1.265E-09	1.055E-09	8.922E-10	7.488E-10	
ESE	1.237E-08	1.595E-08	1.031E-08	5.720E-09	3.656E-09	2.570E-09	1.919E-09	1.494E-09	1.200E-09	9.872E-10	8.274E-10	
SE	1.685E-08	9.937E-09	7.497E-09	5.369E-09	3.946E-09	3.140E-09	2.624E-09	2.257E-09	1.856E-09	1.561E-09	1.336E-09	
SSE	3.161E-08	3.826E-08	2.386E-08	1.277E-08	8.078E-09	5.649E-09	4.208E-09	3.275E-09	2.631E-09	2.167E-09	1.819E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	4.709E-08	8.583E-08	6.868E-08	5.303E-08	5.453E-08	3.117E-08	1.112E-08	4.884E-09	2.791E-09	1.842E-09	
SSW	3.150E-08	6.180E-08	5.698E-08	5.523E-08	4.565E-08	2.884E-08	1.118E-08	5.093E-09	2.986E-09	1.989E-09	
SW	8.074E-08	1.760E-07	1.096E-07	6.405E-08	4.358E-08	2.516E-08	9.589E-09	4.408E-09	2.622E-09	1.740E-09	
WSW	7.755E-08	1.804E-07	1.067E-07	5.963E-08	3.927E-08	2.013E-08	7.682E-09	3.456E-09	2.011E-09	1.337E-09	
W	1.191E-07	1.501E-07	8.319E-08	4.819E-08	3.214E-08	1.567E-08	6.428E-09	3.138E-09	1.843E-09	1.232E-09	
WNW	1.220E-07	2.163E-07	1.228E-07	7.234E-08	4.739E-08	2.207E-08	7.859E-09	3.472E-09	2.025E-09	1.345E-09	
NW	1.420E-07	3.476E-07	1.974E-07	1.091E-07	6.988E-08	3.180E-08	1.098E-08	4.761E-09	2.760E-09	1.830E-09	
NNW	5.820E-08	1.643E-07	1.697E-07	1.312E-07	8.800E-08	4.017E-08	1.331E-08	5.608E-09	3.194E-09	2.128E-09	
N	3.773E-08	7.493E-08	6.939E-08	5.290E-08	4.083E-08	2.498E-08	1.573E-08	9.711E-09	5.921E-09	4.006E-09	
NNE	2.234E-08	4.388E-08	3.822E-08	2.835E-08	2.331E-08	2.500E-08	1.119E-08	4.954E-09	2.897E-09	1.936E-09	
NE	1.442E-08	2.974E-08	2.602E-08	1.917E-08	1.554E-08	1.817E-08	8.411E-09	3.754E-09	2.256E-09	1.541E-09	
ENE	1.346E-08	2.740E-08	2.373E-08	1.738E-08	1.392E-08	1.476E-08	6.765E-09	3.009E-09	1.823E-09	1.225E-09	
E	8.445E-09	1.837E-08	1.634E-08	1.207E-08	9.685E-09	1.070E-08	4.990E-09	2.209E-09	1.288E-09	8.872E-10	
ESE	1.375E-08	2.643E-08	2.214E-08	1.598E-08	1.264E-08	1.265E-08	5.823E-09	2.599E-09	1.504E-09	9.912E-10	
SE	2.728E-08	4.873E-08	3.858E-08	2.677E-08	1.942E-08	1.039E-08	5.209E-09	3.148E-09	2.209E-09	1.565E-09	
SSE	3.468E-08	6.511E-08	5.459E-08	3.955E-08	3.164E-08	3.038E-08	1.315E-08	5.720E-09	3.296E-09	2.175E-09	

B315

ERP ELEVATED STACK RELEASES - JUL-DEC 2018
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**2) AT FIXED POINTS BY DOWNWIND SECTORS *****											
DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	2.076E-10	1.246E-09	2.652E-09	2.747E-09	1.716E-09	1.151E-09	8.127E-10	5.970E-10	4.522E-10	3.706E-10	3.394E-10
SSW	1.185E-10	7.112E-10	1.514E-09	1.569E-09	9.798E-10	6.570E-10	4.641E-10	3.409E-10	3.226E-10	2.441E-10	1.911E-10
SW	1.068E-10	6.405E-10	1.364E-09	1.413E-09	1.653E-09	9.123E-10	5.704E-10	3.895E-10	2.825E-10	2.140E-10	1.676E-10
WSW	7.336E-11	4.401E-10	9.371E-10	1.935E-09	1.203E-09	6.543E-10	4.047E-10	2.744E-10	1.981E-10	1.497E-10	1.171E-10
W	3.799E-11	1.873E-09	1.842E-09	1.309E-09	6.450E-10	3.459E-10	2.124E-10	1.433E-10	1.033E-10	7.814E-11	6.134E-11
WNW	6.091E-11	3.654E-10	1.929E-09	1.941E-09	1.182E-09	6.137E-10	3.719E-10	2.522E-10	1.979E-10	1.545E-10	1.276E-10
NW	1.113E-10	6.680E-10	1.422E-09	3.788E-09	2.547E-09	1.269E-09	7.497E-10	4.977E-10	3.599E-10	2.783E-10	2.275E-10
NNW	1.035E-10	6.209E-10	1.322E-09	1.369E-09	1.670E-09	9.132E-10	5.748E-10	4.841E-10	3.602E-10	2.875E-10	2.435E-10
N	6.575E-10	1.260E-09	2.143E-09	2.097E-09	1.276E-09	8.488E-10	5.973E-10	4.380E-10	3.314E-10	2.571E-10	2.036E-10
NNE	2.200E-10	6.489E-10	1.247E-09	1.261E-09	7.791E-10	5.207E-10	3.673E-10	2.696E-10	2.041E-10	1.584E-10	1.254E-10
NE	5.305E-11	3.183E-10	6.777E-10	7.020E-10	4.385E-10	2.940E-10	2.077E-10	1.526E-10	1.155E-10	8.968E-11	7.102E-11
ENE	4.781E-11	2.869E-10	6.108E-10	6.327E-10	3.952E-10	2.650E-10	1.872E-10	1.375E-10	1.041E-10	8.082E-11	6.400E-11
E	2.882E-11	1.729E-10	3.681E-10	3.813E-10	2.382E-10	1.597E-10	1.128E-10	8.287E-11	6.276E-11	4.871E-11	3.858E-11
ESE	6.026E-11	3.615E-10	7.698E-10	7.973E-10	4.980E-10	3.339E-10	2.359E-10	1.733E-10	1.312E-10	1.019E-10	8.066E-11
SE	1.290E-10	7.741E-10	1.648E-09	1.707E-09	1.066E-09	7.151E-10	5.051E-10	3.710E-10	2.810E-10	2.181E-10	1.727E-10
SSE	1.709E-10	1.026E-09	2.184E-09	2.262E-09	1.413E-09	9.474E-10	6.692E-10	4.916E-10	3.723E-10	2.890E-10	2.288E-10
DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	2.728E-10	1.639E-10	1.066E-10	5.890E-11	3.667E-11	2.905E-11	2.076E-11	1.554E-11	1.256E-11	9.987E-12	8.152E-12
SSW	1.555E-10	1.021E-10	6.824E-11	3.869E-11	2.562E-11	1.815E-11	1.301E-11	9.771E-12	7.742E-12	6.185E-12	5.048E-12
SW	1.377E-10	9.021E-11	6.018E-11	3.406E-11	2.139E-11	1.619E-11	1.179E-11	8.851E-12	6.882E-12	5.497E-12	4.487E-12
WSW	9.541E-11	6.644E-11	4.529E-11	2.894E-11	1.751E-11	1.174E-11	8.571E-12	6.436E-12	5.004E-12	3.997E-12	3.263E-12
W	4.965E-11	2.302E-11	3.261E-11	2.263E-11	1.319E-11	9.027E-12	6.468E-12	4.857E-12	3.776E-12	3.017E-12	2.462E-12
WNW	1.110E-10	6.790E-11	4.872E-11	2.939E-11	1.867E-11	1.188E-11	8.576E-12	6.442E-12	5.152E-12	4.116E-12	3.359E-12
NW	1.955E-10	1.164E-10	8.250E-11	5.172E-11	3.178E-11	2.123E-11	1.496E-11	1.124E-11	8.809E-12	7.036E-12	5.743E-12
NNW	2.165E-10	1.429E-10	1.061E-10	6.566E-11	4.199E-11	2.778E-11	1.888E-11	1.374E-11	1.061E-11	8.475E-12	6.919E-12
N	1.640E-10	7.771E-11	4.739E-11	2.494E-11	9.132E-11	5.168E-11	3.698E-11	2.777E-11	2.159E-11	1.725E-11	1.408E-11
NNE	1.010E-10	1.820E-10	1.121E-10	5.780E-11	3.521E-11	2.357E-11	1.685E-11	1.262E-11	9.791E-12	7.809E-12	6.366E-12
NE	5.720E-11	9.742E-11	6.123E-11	3.234E-11	1.984E-11	1.326E-11	9.575E-12	7.129E-12	5.544E-12	4.478E-12	3.655E-12
ENE	5.155E-11	6.172E-11	4.511E-11	2.757E-11	1.759E-11	1.164E-11	8.175E-12	5.653E-12	4.395E-12	3.511E-12	2.867E-12
E	3.107E-11	4.321E-11	3.234E-11	2.013E-11	1.289E-11	8.527E-12	5.971E-12	4.363E-12	3.318E-12	2.460E-12	2.000E-12
ESE	6.496E-11	7.041E-11	5.051E-11	3.043E-11	1.934E-11	1.282E-11	9.012E-12	6.618E-12	5.054E-12	3.978E-12	3.207E-12
SE	1.391E-10	6.586E-11	4.014E-11	2.108E-11	1.281E-11	8.773E-12	6.517E-12	1.111E-11	8.557E-12	6.793E-12	5.528E-12
SSE	1.843E-10	2.286E-10	1.420E-10	7.396E-11	4.518E-11	3.022E-11	2.157E-11	1.613E-11	1.250E-11	9.957E-12	8.108E-12

B316

***** RELATIVE DEPOSITION PER UNIT AREA (M**2) BY DOWNWIND SECTORS *****										
DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	2.382E-09	1.694E-09	8.166E-10	4.625E-10	3.240E-10	1.626E-10	5.961E-11	2.776E-11	1.589E-11	1.007E-11
SSW	1.360E-09	9.672E-10	4.662E-10	2.979E-10	1.936E-10	9.893E-11	3.945E-11	1.808E-11	9.923E-12	6.225E-12
SW	1.225E-09	1.270E-09	5.892E-10	2.870E-10	1.703E-10	8.742E-11	3.423E-11	1.581E-11	8.939E-12	5.533E-12
WSW	1.270E-09	1.122E-09	4.191E-10	2.015E-10	1.187E-10	6.348E-11	2.749E-11	1.201E-11	6.500E-12	4.023E-12
W	1.612E-09	6.596E-10	2.204E-10	1.052E-10	6.199E-11	3.320E-11	2.065E-11	9.115E-12	4.906E-12	3.036E-12
WNW	1.587E-09	1.098E-09	3.885E-10	1.969E-10	1.294E-10	6.895E-11	2.892E-11	1.237E-11	6.561E-12	4.143E-12
NW	2.306E-09	2.255E-09	7.875E-10	3.682E-10	2.307E-10	1.189E-10	4.970E-11	2.154E-11	1.138E-11	7.083E-12
NNW	1.187E-09	1.267E-09	6.288E-10	3.679E-10	2.465E-10	1.429E-10	6.413E-11	2.801E-11	1.402E-11	8.530E-12
N	1.926E-09	1.268E-09	6.006E-10	3.336E-10	2.048E-10	8.342E-11	5.943E-11	5.637E-11	2.805E-11	1.736E-11
NNE	1.120E-09	7.713E-10	3.691E-10	2.054E-10	1.262E-10	1.329E-10	5.982E-11	2.398E-11	1.275E-11	7.862E-12
NE	6.086E-10	4.328E-10	2.086E-10	1.163E-10	7.143E-11	7.240E-11	3.320E-11	1.354E-11	7.224E-12	4.489E-12
ENE	5.485E-10	3.901E-10	1.880E-10	1.048E-10	6.437E-11	5.208E-11	2.703E-11	1.184E-11	5.894E-12	3.535E-12
E	3.306E-10	2.351E-10	1.133E-10	6.316E-11	3.880E-11	3.568E-11	1.963E-11	8.669E-12	4.424E-12	2.544E-12
ESE	6.913E-10	4.916E-10	2.370E-10	1.321E-10	8.113E-11	6.035E-11	2.996E-11	1.304E-11	6.706E-12	4.011E-12
SE	1.480E-09	1.053E-09	5.074E-10	2.828E-10	1.737E-10	7.071E-11	2.164E-11	8.948E-12	8.825E-12	6.847E-12
SSE	1.961E-09	1.395E-09	6.723E-10	3.746E-10	2.302E-10	1.803E-10	7.629E-11	3.075E-11	1.630E-11	1.003E-11

ERP ELEVATED STACK RELEASES - JUL-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

RELEASE ID	TYPE OF LOCATION	DIRECTION	DIST. FROM SITE (MI)	X/Q (SEC/M3) NO DECAY	X/Q (SEC/M3) 2.26 DAY DECAY	X/Q (SEC/M3) 8.0 DAY DECAY	D/Q (PER SQ. METER)
A	Site Boundary	S	.80	4.8E-08	4.8E-08	4.8E-08	2.8E-09
A	Site Boundary	SSW	.82	3.4E-08	3.4E-08	3.4E-08	1.6E-09
A	Site Boundary	SW	.97	1.3E-07	1.3E-07	1.3E-07	1.4E-09
A	Site Boundary	WSW	.93	1.1E-07	1.1E-07	1.1E-07	1.4E-09
A	Site Boundary	W	.91	1.6E-07	1.6E-07	1.6E-07	1.4E-09
A	Site Boundary	WNW	.94	1.8E-07	1.8E-07	1.8E-07	2.2E-09
A	Site Boundary	NW	.81	1.2E-07	1.2E-07	1.2E-07	1.5E-09
A	Site Boundary	NNW	.69	2.3E-08	2.3E-08	2.3E-08	1.1E-09
A	Site Boundary	N	.67	2.0E-08	2.0E-08	2.0E-08	1.9E-09
A	Site Boundary	NNE	.60	5.7E-09	5.7E-09	5.7E-09	8.8E-10
A	Site Boundary	NE	.62	4.1E-09	4.1E-09	4.1E-09	4.9E-10
A	Site Boundary	ENE	.59	2.5E-09	2.5E-09	2.5E-09	4.0E-10
A	Site Boundary	E	.53	5.2E-10	5.2E-10	5.2E-10	1.9E-10
A	Site Boundary	ESE	.54	1.3E-09	1.3E-09	1.3E-09	4.2E-10
A	Site Boundary	SE	.65	1.1E-08	1.1E-08	1.1E-08	1.3E-09
A	Site Boundary	SSE	.81	3.7E-08	3.7E-08	3.7E-08	2.3E-09
A	Nearest Res	SSW	3.00	5.9E-08	5.9E-08	5.7E-08	3.4E-10
A	Nearest Res	SW	1.00	1.4E-07	1.4E-07	1.4E-07	1.4E-09
A	Nearest Res	WSW	1.90	1.7E-07	1.7E-07	1.7E-07	7.3E-10
A	Nearest Res	W	1.00	1.7E-07	1.7E-07	1.7E-07	1.3E-09
A	Nearest Res	WNW	1.70	2.3E-07	2.3E-07	2.3E-07	8.9E-10
A	Nearest Res	NW	.90	1.8E-07	1.8E-07	1.8E-07	3.8E-09
A	Nearest Res	NNW	1.90	1.9E-07	1.9E-07	1.9E-07	1.0E-09
A	Nearest Res	N	2.90	6.5E-08	6.5E-08	6.3E-08	4.6E-10
A	Nearest Res	NNE	1.70	4.8E-08	4.8E-08	4.8E-08	6.6E-10
A	Nearest Res	ENE	1.70	3.0E-08	3.0E-08	3.0E-08	3.3E-10
A	Nearest Res	E	2.20	1.9E-08	1.9E-08	1.8E-08	1.4E-10
A	Nearest Res	SE	2.80	3.6E-08	3.6E-08	3.5E-08	4.2E-10
A	Nearest Cow	NNW	3.50	1.4E-07	1.4E-07	1.4E-07	3.6E-10
A	Nearest Garde	SSW	3.00	5.9E-08	5.9E-08	5.7E-08	3.4E-10
A	Nearest Garde	SW	2.20	1.4E-07	1.4E-07	1.3E-07	7.5E-10
A	Nearest Garde	WNW	1.70	2.3E-07	2.3E-07	2.3E-07	8.9E-10
A	Nearest Garde	NW	.90	1.8E-07	1.8E-07	1.8E-07	3.8E-09
A	Nearest Garde	NNW	2.80	1.7E-07	1.7E-07	1.6E-07	5.4E-10
A	Nearest Garde	E	2.20	1.9E-08	1.9E-08	1.8E-08	1.4E-10
A	Nearest Garde	ESE	2.20	2.5E-08	2.5E-08	2.5E-08	2.9E-10
A	Nearest Garde	SE	2.80	3.6E-08	3.6E-08	3.5E-08	4.2E-10
A	MAXIMUM CHI/Q	S	1.50	9.6E-08	9.6E-08	9.5E-08	1.7E-09
A	MAXIMUM CHI/Q	SSW	1.50	6.9E-08	6.9E-08	6.8E-08	9.8E-10
A	MAXIMUM CHI/Q	SW	1.50	2.3E-07	2.3E-07	2.3E-07	1.7E-09
A	MAXIMUM CHI/Q	WSW	1.50	2.5E-07	2.5E-07	2.4E-07	1.2E-09
A	MAXIMUM CHI/Q	W	1.50	1.8E-07	1.8E-07	1.8E-07	6.5E-10
A	MAXIMUM CHI/Q	WNW	1.50	2.9E-07	2.8E-07	2.8E-07	1.2E-09
A	MAXIMUM CHI/Q	NW	1.50	4.9E-07	4.9E-07	4.9E-07	2.5E-09
A	MAXIMUM CHI/Q	NNW	2.00	1.9E-07	1.9E-07	1.8E-07	9.1E-10
A	MAXIMUM CHI/Q	N	1.50	8.1E-08	8.1E-08	8.0E-08	1.3E-09
A	MAXIMUM CHI/Q	NNE	1.50	4.8E-08	4.8E-08	4.8E-08	7.8E-10
A	MAXIMUM CHI/Q	NE	1.50	3.3E-08	3.3E-08	3.3E-08	4.4E-10
A	MAXIMUM CHI/Q	ENE	1.50	3.0E-08	3.0E-08	3.0E-08	4.0E-10
A	MAXIMUM CHI/Q	E	1.50	2.0E-08	2.0E-08	2.0E-08	2.4E-10
A	MAXIMUM CHI/Q	ESE	1.50	2.9E-08	2.9E-08	2.9E-08	5.0E-10
A	MAXIMUM CHI/Q	SE	1.50	5.4E-08	5.4E-08	5.4E-08	1.1E-09
A	MAXIMUM CHI/Q	SSE	1.50	7.2E-08	7.2E-08	7.1E-08	1.4E-09

B317

Atmospheric Diffusion Estimates

Elevated Releases

January-December 2018

ERP ELEVATED STACK RELEASES - JAN-DEC 2018
 NO DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE											
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	6.948E-11	7.253E-09	4.486E-08	7.772E-08	9.332E-08	8.226E-08	6.833E-08	5.654E-08	4.730E-08	5.300E-08	5.607E-08	1.000E-15	1.158E-09	2.051E-08	4.158E-08	5.469E-08	4.997E-08	4.240E-08	4.587E-08	4.665E-08	4.064E-08	3.592E-08
SSW	4.144E-11	3.680E-09	4.459E-08	1.131E-07	1.831E-07	1.241E-07	8.937E-08	6.778E-08	5.351E-08	4.359E-08	3.641E-08	4.048E-11	4.849E-09	4.769E-08	1.217E-07	2.085E-07	1.324E-07	9.185E-08	6.799E-08	5.276E-08	4.243E-08	3.509E-08
WSW	4.266E-09	5.379E-08	1.700E-07	2.128E-07	2.007E-07	1.265E-07	8.751E-08	6.464E-08	5.007E-08	4.021E-08	3.320E-08	3.901E-11	7.801E-09	1.115E-07	2.241E-07	2.967E-07	1.828E-07	1.247E-07	9.545E-08	7.621E-08	6.052E-08	4.954E-08
W	3.641E-10	3.549E-09	8.502E-08	2.533E-07	4.551E-07	2.704E-07	1.803E-07	1.324E-07	1.022E-07	8.065E-08	6.564E-08	1.633E-09	5.007E-09	3.899E-08	9.175E-08	1.606E-07	1.654E-07	1.553E-07	1.383E-07	1.221E-07	9.623E-08	7.828E-08
WNW	6.417E-09	2.032E-08	4.063E-08	5.710E-08	6.952E-08	6.752E-08	6.068E-08	5.233E-08	4.532E-08	3.960E-08	3.495E-08	N	2.581E-09	4.203E-09	2.054E-08	3.717E-08	4.874E-08	4.570E-08	3.969E-08	3.399E-08	2.922E-08	2.537E-08
N	5.516E-16	6.118E-10	1.072E-08	2.184E-08	2.947E-08	2.761E-08	2.389E-08	2.038E-08	1.747E-08	1.513E-08	1.325E-08	NNE	4.524E-16	5.817E-10	1.052E-08	2.163E-08	2.928E-08	2.740E-08	2.368E-08	2.018E-08	1.728E-08	1.495E-08
WNW	3.397E-16	4.294E-10	8.099E-09	1.715E-08	2.384E-08	2.248E-08	1.947E-08	1.659E-08	1.419E-08	1.226E-08	1.072E-08	NE	7.375E-16	6.880E-10	1.158E-08	2.308E-08	3.014E-08	2.761E-08	2.352E-08	1.984E-08	1.687E-08	1.451E-08
NW	1.458E-11	2.321E-09	2.492E-08	4.637E-08	5.707E-08	5.055E-08	4.207E-08	3.487E-08	2.921E-08	2.481E-08	2.138E-08	ENE	5.321E-12	2.718E-09	3.797E-08	7.165E-08	8.893E-08	7.941E-08	6.654E-08	5.541E-08	4.658E-08	3.967E-08
NNE												E										
NE												ESE										
ENE												SE										
E												SSE										
ESE																						
SE																						
SSE																						

ANNUAL AVERAGE SECTOR	CHI/Q (SEC/METER CUBED)										DISTANCE IN MILES FROM THE SITE											
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.934E-08	3.079E-08	1.976E-08	1.113E-08	7.610E-09	5.646E-09	4.364E-09	3.512E-09	2.927E-09	2.490E-09	2.149E-09	SSW	3.311E-08	2.493E-08	1.615E-08	9.219E-09	6.495E-09	4.846E-09	3.765E-09	3.045E-09	2.537E-09	2.160E-09
SSW	3.322E-08	2.476E-08	1.625E-08	9.429E-09	6.727E-09	5.144E-09	4.125E-09	3.346E-09	2.793E-09	2.383E-09	2.069E-09	SW	3.089E-08	1.995E-08	1.411E-08	8.700E-09	5.854E-09	4.314E-09	3.367E-09	2.732E-09	2.282E-09	1.947E-09
SW	2.802E-08	1.527E-08	1.080E-08	6.889E-09	5.014E-09	3.696E-09	2.878E-09	2.331E-09	1.944E-09	1.657E-09	1.437E-09	WSW	4.198E-08	2.335E-08	1.580E-08	9.531E-09	6.511E-09	4.848E-09	3.823E-09	3.119E-09	2.607E-09	2.221E-09
W	4.198E-08	2.335E-08	1.580E-08	9.531E-09	6.511E-09	4.848E-09	3.823E-09	3.119E-09	2.607E-09	2.221E-09	1.926E-09	W	5.524E-08	2.986E-08	1.988E-08	1.166E-08	7.794E-09	5.711E-09	4.480E-09	3.631E-09	3.020E-09	2.567E-09
WNW	6.644E-08	3.685E-08	2.386E-08	1.365E-08	9.207E-09	6.797E-09	5.343E-09	4.361E-09	3.680E-09	3.151E-09	2.734E-09	WNW	3.123E-08	2.039E-08	1.736E-08	1.399E-08	1.136E-08	9.114E-09	7.146E-09	5.807E-09	4.848E-09	4.137E-09
N	2.448E-08	3.336E-08	2.160E-08	1.238E-08	8.369E-09	6.192E-09	4.848E-09	3.945E-09	3.302E-09	2.824E-09	2.457E-09	N	1.444E-08	2.175E-08	1.417E-08	8.182E-09	5.565E-09	4.136E-09	3.289E-09	2.706E-09	2.289E-09	1.961E-09
WNW	1.444E-08	2.175E-08	1.417E-08	8.182E-09	5.565E-09	4.136E-09	3.289E-09	2.706E-09	2.289E-09	1.961E-09	1.708E-09	NNE	1.379E-08	1.862E-08	1.231E-08	7.223E-09	4.955E-09	3.703E-09	3.061E-09	2.580E-09	2.164E-09	1.854E-09
NW	1.379E-08	1.862E-08	1.231E-08	7.223E-09	4.955E-09	3.703E-09	3.061E-09	2.580E-09	2.164E-09	1.854E-09	1.615E-09	NE	1.125E-08	1.465E-08	9.653E-09	5.633E-09	3.855E-09	2.874E-09	2.262E-09	1.849E-09	1.605E-09	1.409E-09
NNE	1.125E-08	1.465E-08	9.653E-09	5.633E-09	3.855E-09	2.874E-09	2.262E-09	1.849E-09	1.605E-09	1.409E-09	1.227E-09	ENE	1.296E-08	1.545E-08	1.027E-08	6.051E-09	4.157E-09	3.109E-09	2.452E-09	2.008E-09	1.689E-09	1.450E-09
N	1.296E-08	1.545E-08	1.027E-08	6.051E-09	4.157E-09	3.109E-09	2.452E-09	2.008E-09	1.689E-09	1.450E-09	1.265E-09	E	1.866E-08	1.120E-08	8.479E-09	5.989E-09	4.365E-09	3.431E-09	2.828E-09	2.406E-09	2.014E-09	1.723E-09
NNE	1.866E-08	1.120E-08	8.479E-09	5.989E-09	4.365E-09	3.431E-09	2.828E-09	2.406E-09	2.014E-09	1.723E-09	1.498E-09	ESE	3.538E-08	3.604E-08	2.306E-08	1.299E-08	8.673E-09	6.355E-09	4.936E-09	3.990E-09	3.321E-09	2.826E-09
NE												SE										
ENE												SSE										
E																						
ESE																						
SE																						
SSE																						

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	5.111E-08	8.494E-08	6.733E-08	5.211E-08	5.267E-08	3.001E-08	1.149E-08	5.657E-09	3.532E-09	2.493E-09
SSW	2.557E-08	4.968E-08	4.581E-08	4.414E-08	3.628E-08	2.284E-08	9.547E-09	4.853E-09	3.057E-09	2.165E-09
SW	6.593E-08	1.413E-07	8.998E-08	5.381E-08	3.735E-08	2.286E-08	9.743E-09	5.159E-09	3.358E-09	2.388E-09
WSW	7.106E-08	1.554E-07	9.311E-08	5.318E-08	3.571E-08	1.979E-08	6.638E-09	4.346E-09	2.742E-09	1.952E-09
W	1.632E-07	1.704E-07	8.877E-08	5.048E-08	3.336E-08	1.612E-08	6.920E-09	3.717E-09	2.340E-09	1.660E-09
WNW	1.385E-07	2.299E-07	1.285E-07	7.573E-08	4.999E-08	2.414E-08	9.582E-09	4.882E-09	3.125E-09	2.226E-09
NW	1.417E-07	3.282E-07	1.852E-07	1.026E-07	6.623E-08	3.106E-08	1.177E-08	5.774E-09	3.641E-09	2.573E-09
NNW	5.489E-08	1.474E-07	1.512E-07	1.169E-07	7.921E-08	3.766E-08	1.394E-08	6.858E-09	4.382E-09	3.153E-09
N	4.344E-08	6.587E-08	5.917E-08	4.515E-08	3.495E-08	2.145E-08	1.357E-08	8.926E-09	5.825E-09	4.145E-09
NNE	2.430E-08	4.482E-08	3.901E-08	2.912E-08	2.401E-08	2.616E-08	1.265E-08	6.235E-09	3.958E-09	2.830E-09
NE	1.341E-08	2.694E-08	2.348E-08	1.741E-08	1.425E-08	1.676E-08	8.348E-09	4.178E-09	2.714E-09	1.964E-09
ENE	1.325E-08	2.674E-08	2.327E-08	1.722E-08	1.390E-08	1.474E-08	7.345E-09	3.780E-09	2.559E-09	1.857E-09
E	1.042E-08	2.175E-08	1.912E-08	1.414E-08	1.137E-08	1.168E-08	5.738E-09	2.891E-09	1.874E-09	1.400E-09
ESE	1.427E-08	2.745E-08	2.314E-08	1.682E-08	1.331E-08	1.259E-08	6.146E-09	3.126E-09	2.013E-09	1.452E-09
SE	2.943E-08	5.180E-08	4.145E-08	2.915E-08	2.139E-08	1.165E-08	5.821E-09	3.439E-09	2.377E-09	1.726E-09
SSE	4.510E-08	8.086E-08	6.552E-08	4.647E-08	3.628E-08	3.012E-08	1.331E-08	6.406E-09	4.005E-09	2.832E-09

B319

ERP ELEVATED STACK RELEASES - JAN-DEC 2018
 2.260 DAY DECAY, UNDEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
	SECTOR	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	6.946E-11	7.248E-09	4.482E-08	7.761E-08	9.311E-08	8.201E-08	6.806E-08	5.627E-08	4.703E-08	5.264E-08	5.561E-08	
SSW	9.999E-16	1.157E-09	2.048E-08	4.150E-08	5.452E-08	4.976E-08	4.216E-08	4.555E-08	4.624E-08	4.022E-08	3.550E-08	
SW	4.143E-11	3.677E-09	4.452E-08	1.128E-07	1.824E-07	1.234E-07	8.875E-08	6.720E-08	5.297E-08	4.308E-08	3.592E-08	
WSW	4.045E-11	4.844E-09	4.762E-08	1.214E-07	2.077E-07	1.317E-07	9.126E-08	6.746E-08	5.228E-08	4.199E-08	3.467E-08	
W	2.425E-09	5.375E-08	1.698E-07	2.123E-07	1.999E-07	1.258E-07	8.690E-08	6.408E-08	4.956E-08	3.973E-08	3.275E-08	
WNW	3.901E-11	7.796E-09	1.113E-07	2.236E-07	2.957E-07	1.819E-07	1.239E-07	9.475E-08	7.554E-08	5.991E-08	4.897E-08	
NW	3.640E-10	3.547E-09	8.492E-08	2.528E-07	4.537E-07	2.692E-07	1.793E-07	1.315E-07	1.014E-07	7.988E-08	6.493E-08	
NNW	1.632E-09	5.005E-09	3.895E-08	9.160E-08	1.601E-07	1.648E-07	1.545E-07	1.374E-07	1.212E-07	9.537E-08	7.749E-08	
N	6.416E-09	2.031E-08	4.060E-08	5.703E-08	6.937E-08	6.732E-08	6.045E-08	5.209E-08	4.508E-08	3.936E-08	3.471E-08	
NNE	2.581E-09	4.201E-09	2.052E-08	3.711E-08	4.861E-08	4.553E-08	3.951E-08	3.380E-08	2.904E-08	2.518E-08	2.208E-08	
NE	5.514E-16	6.114E-10	1.070E-08	2.180E-08	2.939E-08	2.750E-08	2.377E-08	2.027E-08	1.736E-08	1.501E-08	1.313E-08	
ENE	4.523E-16	5.813E-10	1.051E-08	2.159E-08	2.919E-08	2.729E-08	2.355E-08	2.005E-08	1.715E-08	1.482E-08	1.295E-08	
E	3.396E-16	4.291E-10	8.088E-09	1.711E-08	2.537E-08	2.238E-08	1.935E-08	1.647E-08	1.407E-08	1.214E-08	1.060E-08	
ESE	7.373E-16	6.876E-10	1.157E-08	2.304E-08	3.006E-08	2.751E-08	2.341E-08	1.973E-08	1.675E-08	1.439E-08	1.252E-08	
SE	1.457E-11	2.320E-09	2.489E-08	4.631E-08	5.695E-08	5.040E-08	4.191E-08	3.470E-08	2.904E-08	2.465E-08	2.122E-08	
SSE	5.320E-12	2.717E-09	3.794E-08	7.156E-08	8.875E-08	7.919E-08	6.630E-08	5.517E-08	4.634E-08	3.944E-08	3.402E-08	

ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)	DISTANCE IN MILES FROM THE SITE											
	SECTOR	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.889E-08	3.033E-08	1.936E-08	1.080E-08	7.298E-09	5.357E-09	4.097E-09	3.264E-09	2.691E-09	2.266E-09	1.936E-09	
SSW	3.267E-08	2.438E-08	1.567E-08	8.814E-09	6.117E-09	4.497E-09	3.444E-09	2.745E-09	2.255E-09	1.893E-09	1.617E-09	
SW	3.272E-08	2.417E-08	1.573E-08	8.986E-09	6.311E-09	4.752E-09	3.751E-09	2.997E-09	2.465E-09	2.073E-09	1.773E-09	
WSW	3.048E-08	1.954E-08	1.373E-08	8.339E-09	5.532E-09	4.021E-09	3.094E-09	2.476E-09	2.040E-09	1.717E-09	1.471E-09	
W	2.760E-08	1.492E-08	1.046E-08	6.548E-09	4.667E-09	3.390E-09	2.596E-09	2.069E-09	1.698E-09	1.425E-09	1.216E-09	
WNW	4.144E-08	2.288E-08	1.536E-08	9.127E-09	6.143E-09	4.506E-09	3.502E-09	2.815E-09	2.318E-09	1.948E-09	1.666E-09	
NW	5.457E-08	2.930E-08	1.937E-08	1.122E-08	7.398E-09	5.352E-09	4.144E-09	3.316E-09	2.723E-09	2.287E-09	1.954E-09	
NNW	6.569E-08	3.621E-08	2.331E-08	1.318E-08	8.786E-09	6.412E-09	4.983E-09	4.021E-09	3.355E-09	2.840E-09	2.438E-09	
N	3.099E-08	2.015E-08	1.708E-08	1.364E-08	1.097E-08	8.723E-09	6.780E-09	5.462E-09	4.522E-09	3.826E-09	3.293E-09	
NNE	2.426E-08	3.286E-08	2.117E-08	1.201E-08	8.041E-09	5.892E-09	4.569E-09	3.684E-09	3.055E-09	2.589E-09	2.232E-09	
NE	1.430E-08	2.141E-08	1.387E-08	7.928E-09	5.336E-09	3.925E-09	3.089E-09	2.515E-09	2.105E-09	1.785E-09	1.539E-09	
ENE	1.363E-08	1.825E-08	1.198E-08	6.931E-09	4.690E-09	3.457E-09	2.817E-09	2.342E-09	1.938E-09	1.638E-09	1.409E-09	
E	1.112E-08	1.436E-08	9.395E-09	5.411E-09	3.649E-09	2.683E-09	2.084E-09	1.680E-09	1.437E-09	1.244E-09	1.068E-09	
ESE	1.282E-08	1.518E-08	1.002E-08	5.837E-09	3.962E-09	2.928E-09	2.283E-09	1.848E-09	1.536E-09	1.305E-09	1.126E-09	
SE	1.850E-08	1.105E-08	8.323E-09	5.804E-09	4.178E-09	3.241E-09	2.637E-09	2.214E-09	1.832E-09	1.549E-09	1.332E-09	
SSE	3.511E-08	3.548E-08	2.258E-08	1.257E-08	8.303E-09	6.015E-09	4.620E-09	3.692E-09	3.039E-09	2.557E-09	2.189E-09	

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE										
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50	
S	5.104E-08	8.473E-08	6.706E-08	5.181E-08	5.224E-08	2.958E-08	1.115E-08	5.371E-09	3.284E-09	2.270E-09	
SSW	2.553E-08	4.951E-08	4.554E-08	4.375E-08	3.585E-08	2.235E-08	9.139E-09	4.508E-09	2.758E-09	1.898E-09	
SW	6.580E-08	1.407E-07	8.937E-08	5.327E-08	3.686E-08	2.232E-08	9.297E-09	4.767E-09	3.010E-09	2.078E-09	
WSW	7.092E-08	1.548E-07	9.252E-08	5.270E-08	3.529E-08	1.939E-08	8.289E-09	4.053E-09	2.487E-09	1.721E-09	
W	1.629E-07	1.697E-07	8.816E-08	4.996E-08	3.291E-08	1.575E-08	6.581E-09	3.413E-09	2.079E-09	1.429E-09	
WNW	1.382E-07	2.291E-07	1.277E-07	7.507E-08	4.942E-08	2.366E-08	9.186E-09	4.541E-09	2.822E-09	1.953E-09	
NW	1.415E-07	3.271E-07	1.842E-07	1.018E-07	6.552E-08	3.050E-08	1.133E-08	5.415E-09	3.327E-09	2.293E-09	
NNW	5.481E-08	1.470E-07	1.504E-07	1.160E-07	7.842E-08	3.703E-08	1.348E-08	6.474E-09	4.042E-09	2.844E-09	
N	4.339E-08	6.572E-08	5.894E-08	4.490E-08	3.471E-08	2.119E-08	1.322E-08	8.546E-09	5.480E-09	3.835E-09	
NNE	2.427E-08	4.469E-08	3.883E-08	2.893E-08	2.381E-08	2.575E-08	1.228E-08	5.936E-09	3.697E-09	2.595E-09	
NE	1.339E-08	2.686E-08	2.337E-08	1.729E-08	1.412E-08	1.648E-08	8.097E-09	3.967E-09	2.523E-09	1.789E-09	
ENE	1.323E-08	2.666E-08	2.315E-08	1.709E-08	1.376E-08	1.444E-08	7.056E-09	3.530E-09	2.324E-09	1.642E-09	
E	1.040E-08	2.167E-08	1.900E-08	1.402E-08	1.125E-08	1.143E-08	5.513E-09	2.701E-09	1.703E-09	1.236E-09	
ESE	1.425E-08	2.737E-08	2.303E-08	1.670E-08	1.319E-08	1.237E-08	5.934E-09	2.946E-09	1.853E-09	1.307E-09	
SE	2.940E-08	5.167E-08	4.129E-08	2.899E-08	2.123E-08	1.149E-08	5.641E-09	3.249E-09	2.190E-09	1.552E-09	
SSE	4.505E-08	8.068E-08	6.529E-08	4.623E-08	3.603E-08	2.966E-08	1.290E-08	6.067E-09	3.708E-09	2.564E-09	

B320

ERP ELEVATED STACK RELEASES - JAN-DEC 2018
 8.000 DAY DECAY, DEPLETED
 CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	.250	.500	.750	1.000	1.500	2.000	2.500	3.000	3.500	4.000	4.500
S	6.947E-11	7.207E-09	4.467E-08	7.750E-08	9.231E-08	8.066E-08	6.643E-08	5.454E-08	4.530E-08	5.060E-08	5.346E-08
SSW	1.000E-15	1.158E-09	2.050E-08	4.155E-08	5.415E-08	4.902E-08	4.123E-08	4.433E-08	4.489E-08	3.890E-08	3.425E-08
SW	4.143E-11	3.654E-09	4.445E-08	1.129E-07	1.808E-07	1.213E-07	8.667E-08	6.528E-08	5.123E-08	4.151E-08	3.450E-08
WSW	4.047E-11	4.811E-09	4.747E-08	1.213E-07	2.058E-07	1.295E-07	8.929E-08	6.572E-08	5.075E-08	4.064E-08	3.348E-08
W	2.426E-09	5.318E-08	1.684E-07	2.101E-07	1.967E-07	1.231E-07	8.468E-08	6.224E-08	4.801E-08	3.841E-08	3.160E-08
WNW	3.901E-11	7.787E-09	1.113E-07	2.224E-07	2.920E-07	1.783E-07	1.208E-07	9.207E-08	7.323E-08	5.784E-08	4.707E-08
NW	3.640E-10	3.529E-09	8.492E-08	2.522E-07	4.493E-07	2.646E-07	1.753E-07	1.281E-07	9.843E-08	7.723E-08	6.249E-08
NNW	1.633E-09	4.972E-09	3.887E-08	9.160E-08	1.592E-07	1.630E-07	1.526E-07	1.355E-07	1.195E-07	9.373E-08	7.585E-08
N	6.416E-09	2.015E-08	4.019E-08	5.670E-08	6.873E-08	6.640E-08	5.938E-08	5.099E-08	4.399E-08	3.831E-08	3.371E-08
NNE	2.581E-09	4.174E-09	2.045E-08	3.708E-08	4.826E-08	4.491E-08	3.874E-08	3.298E-08	2.821E-08	2.437E-08	2.130E-08
NE	5.515E-16	6.117E-10	1.071E-08	2.182E-08	2.920E-08	2.713E-08	2.330E-08	1.976E-08	1.684E-08	1.451E-08	1.265E-08
ENE	4.524E-16	5.816E-10	1.052E-08	2.162E-08	2.900E-08	2.691E-08	2.308E-08	1.954E-08	1.663E-08	1.431E-08	1.246E-08
E	3.396E-16	4.293E-10	8.096E-09	1.714E-08	2.361E-08	2.207E-08	1.896E-08	1.604E-08	1.363E-08	1.171E-08	1.018E-08
ESE	7.374E-16	6.879E-10	1.158E-08	2.307E-08	2.986E-08	2.711E-08	2.290E-08	1.918E-08	1.620E-08	1.385E-08	1.201E-08
SE	1.457E-11	2.313E-09	2.488E-08	4.633E-08	5.651E-08	4.959E-08	4.092E-08	3.364E-08	2.798E-08	2.361E-08	2.022E-08
SSE	5.320E-12	2.716E-09	3.795E-08	7.161E-08	8.809E-08	7.797E-08	6.480E-08	5.356E-08	4.472E-08	3.785E-08	3.250E-08

SECTOR	ANNUAL AVERAGE CHI/Q (SEC/METER CUBED)										
	5.000	7.500	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000
S	4.686E-08	2.860E-08	1.777E-08	9.408E-09	6.018E-09	4.222E-09	3.118E-09	2.409E-09	1.938E-09	1.598E-09	1.340E-09
SSW	3.148E-08	2.334E-08	1.462E-08	7.807E-09	5.126E-09	3.660E-09	2.738E-09	2.139E-09	1.725E-09	1.425E-09	1.200E-09
SW	3.141E-08	2.313E-08	1.468E-08	7.967E-09	5.277E-09	3.786E-09	2.912E-09	2.278E-09	1.838E-09	1.520E-09	1.281E-09
WSW	2.941E-08	1.860E-08	1.276E-08	7.436E-09	4.774E-09	3.380E-09	2.544E-09	1.998E-09	1.619E-09	1.343E-09	1.135E-09
W	2.659E-08	1.430E-08	9.976E-09	5.993E-09	4.079E-09	2.893E-09	2.170E-09	1.700E-09	1.374E-09	1.137E-09	9.594E-10
WNW	3.967E-08	2.137E-08	1.398E-08	7.871E-09	4.968E-09	3.479E-09	2.624E-09	2.062E-09	1.665E-09	1.375E-09	1.157E-09
NW	5.228E-08	2.735E-08	1.760E-08	9.655E-09	6.036E-09	4.180E-09	3.139E-09	2.455E-09	1.975E-09	1.629E-09	1.369E-09
NNW	6.401E-08	3.437E-08	2.147E-08	1.141E-08	7.081E-09	4.870E-09	3.603E-09	2.799E-09	2.275E-09	1.885E-09	1.586E-09
N	3.005E-08	1.944E-08	1.653E-08	1.331E-08	1.054E-08	8.043E-09	6.113E-09	4.831E-09	3.931E-09	3.275E-09	2.780E-09
NNE	2.344E-08	3.193E-08	1.998E-08	1.078E-08	6.895E-09	4.867E-09	3.656E-09	2.867E-09	2.320E-09	1.923E-09	1.624E-09
NE	1.379E-08	2.084E-08	1.311E-08	7.122E-09	4.566E-09	3.228E-09	2.464E-09	1.961E-09	1.609E-09	1.340E-09	1.137E-09
ENE	1.313E-08	1.781E-08	1.138E-08	6.227E-09	3.945E-09	2.756E-09	2.145E-09	1.722E-09	1.390E-09	1.149E-09	9.686E-10
E	1.068E-08	1.396E-08	8.895E-09	4.850E-09	3.068E-09	2.140E-09	1.589E-09	1.232E-09	1.017E-09	8.541E-10	7.160E-10
ESE	1.229E-08	1.473E-08	9.475E-09	5.228E-09	3.334E-09	2.340E-09	1.745E-09	1.358E-09	1.090E-09	8.960E-10	7.507E-10
SE	1.754E-08	1.030E-08	7.706E-09	5.379E-09	3.877E-09	3.024E-09	2.478E-09	2.091E-09	1.711E-09	1.433E-09	1.221E-09
SSE	3.351E-08	3.389E-08	2.094E-08	1.108E-08	6.974E-09	4.858E-09	3.608E-09	2.801E-09	2.246E-09	1.847E-09	1.548E-09

CHI/Q (SEC/METER CUBED) FOR EACH SEGMENT

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES FROM THE SITE									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	5.094E-08	8.384E-08	6.547E-08	4.996E-08	5.017E-08	2.785E-08	9.760E-09	4.259E-09	2.432E-09	1.603E-09
SSW	2.556E-08	4.907E-08	4.455E-08	4.245E-08	3.460E-08	2.127E-08	8.128E-09	3.682E-09	2.152E-09	1.431E-09
SW	6.580E-08	1.393E-07	8.735E-08	5.154E-08	3.543E-08	2.121E-08	8.263E-09	3.834E-09	2.291E-09	1.526E-09
WSW	7.080E-08	1.531E-07	9.059E-08	5.118E-08	3.409E-08	1.841E-08	7.436E-09	3.417E-09	2.010E-09	1.348E-09
W	1.613E-07	1.670E-07	8.596E-08	4.842E-08	3.176E-08	1.511E-08	6.027E-09	2.920E-09	1.710E-09	1.141E-09
WNW	1.377E-07	2.260E-07	1.246E-07	7.275E-08	4.752E-08	2.215E-08	7.939E-09	3.534E-09	2.072E-09	1.380E-09
NW	1.412E-07	3.234E-07	1.802E-07	9.882E-08	6.307E-08	2.855E-08	9.811E-09	4.258E-09	2.468E-09	1.635E-09
NNW	5.477E-08	1.459E-07	1.485E-07	1.143E-07	7.676E-08	3.522E-08	1.172E-08	4.953E-09	2.829E-09	1.890E-09
N	4.308E-08	6.502E-08	5.789E-08	4.383E-08	3.372E-08	2.050E-08	1.279E-08	7.937E-09	4.854E-09	3.286E-09
NNE	2.423E-08	4.429E-08	3.808E-08	2.811E-08	2.300E-08	2.473E-08	1.110E-08	4.924E-09	2.884E-09	1.930E-09
NE	1.341E-08	2.664E-08	2.291E-08	1.679E-08	1.362E-08	1.584E-08	7.318E-09	3.279E-09	1.970E-09	1.344E-09
ENE	1.324E-08	2.643E-08	2.269E-08	1.658E-08	1.326E-08	1.391E-08	6.358E-09	2.829E-09	1.716E-09	1.154E-09
E	1.041E-08	2.149E-08	1.862E-08	1.359E-08	1.082E-08	1.098E-08	4.957E-09	2.167E-09	1.252E-09	8.513E-10
ESE	1.427E-08	2.713E-08	2.254E-08	1.616E-08	1.266E-08	1.185E-08	5.330E-09	2.367E-09	1.366E-09	8.996E-10
SE	2.940E-08	5.117E-08	4.032E-08	2.793E-08	2.023E-08	1.076E-08	5.229E-09	3.033E-09	2.057E-09	1.437E-09
SSE	4.508E-08	7.993E-08	6.382E-08	4.463E-08	3.446E-08	2.805E-08	1.145E-08	4.922E-09	2.820E-09	1.854E-09

B321

ERP ELEVATED STACK RELEASES - JAN-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) AT FIXED POINTS BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	DISTANCES IN MILES										
	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
S	7.850E-10	1.664E-09	2.933E-09	2.898E-09	1.772E-09	1.180E-09	8.313E-10	6.098E-10	4.615E-10	3.780E-10	3.456E-10
SSW	1.004E-10	6.022E-10	1.282E-09	1.328E-09	8.296E-10	5.562E-10	3.929E-10	2.886E-10	2.741E-10	2.074E-10	1.623E-10
SW	4.031E-10	7.264E-10	1.207E-09	1.173E-09	1.317E-09	7.251E-10	4.526E-10	3.088E-10	2.238E-10	1.696E-10	1.328E-10
WSW	3.833E-10	6.076E-10	9.542E-10	1.790E-09	1.062E-09	5.767E-10	3.565E-10	2.417E-10	1.745E-10	1.318E-10	1.031E-10
W	9.510E-10	3.637E-09	3.145E-09	2.089E-09	1.018E-09	5.416E-10	3.312E-10	2.230E-10	1.605E-10	1.213E-10	9.519E-11
WNW	2.100E-10	5.829E-10	3.309E-09	2.757E-09	1.705E-09	8.697E-10	5.209E-10	3.495E-10	2.650E-10	2.048E-10	1.673E-10
NW	3.720E-10	8.787E-10	1.599E-09	4.021E-09	2.679E-09	1.334E-09	7.874E-10	5.216E-10	3.762E-10	2.899E-10	2.361E-10
NNW	8.048E-10	1.106E-09	1.609E-09	1.495E-09	1.682E-09	9.175E-10	5.764E-10	4.814E-10	3.571E-10	2.841E-10	2.397E-10
N	2.693E-09	2.624E-09	2.872E-09	2.351E-09	1.299E-09	8.369E-10	5.800E-10	4.220E-10	3.181E-10	2.464E-10	1.951E-10
NNE	6.711E-10	9.811E-10	1.478E-09	1.391E-09	8.305E-10	5.492E-10	3.854E-10	2.822E-10	2.134E-10	1.655E-10	1.311E-10
NE	5.283E-11	3.169E-10	6.749E-10	6.990E-10	4.366E-10	2.928E-10	2.068E-10	1.519E-10	1.151E-10	8.930E-11	7.072E-11
ENE	4.920E-11	2.952E-10	6.285E-10	6.510E-10	4.066E-10	2.726E-10	1.926E-10	1.415E-10	1.071E-10	8.316E-11	6.586E-11
E	3.863E-11	2.318E-10	4.935E-10	5.112E-10	3.193E-10	2.141E-10	1.512E-10	1.111E-10	8.413E-11	6.530E-11	5.171E-11
ESE	6.240E-11	3.744E-10	7.972E-10	8.257E-10	5.158E-10	3.458E-10	2.443E-10	1.794E-10	1.359E-10	1.055E-10	8.354E-11
SE	2.668E-10	9.237E-10	1.831E-09	1.865E-09	1.157E-09	7.738E-10	5.460E-10	4.009E-10	3.036E-10	2.356E-10	1.866E-10
SSE	2.958E-10	1.436E-09	2.991E-09	3.082E-09	1.921E-09	1.287E-09	9.089E-10	6.676E-10	5.056E-10	3.924E-10	3.107E-10

DIRECTION FROM SITE	DISTANCES IN MILES										
	5.00	7.50	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00
S	2.778E-10	1.659E-10	1.077E-10	5.949E-11	3.707E-11	2.956E-11	2.115E-11	1.585E-11	1.268E-11	1.010E-11	8.245E-12
SSW	1.316E-10	8.404E-11	5.569E-11	3.134E-11	2.120E-11	1.499E-11	1.075E-11	8.072E-12	6.368E-12	5.086E-12	4.152E-12
SW	1.089E-10	7.716E-11	5.263E-11	3.040E-11	1.920E-11	1.392E-11	1.005E-11	7.543E-12	5.865E-12	4.685E-12	3.824E-12
WSW	8.394E-11	6.401E-11	4.463E-11	2.806E-11	1.698E-11	1.138E-11	8.266E-12	6.207E-12	4.826E-12	3.855E-12	3.147E-12
W	7.708E-11	3.589E-11	4.255E-11	2.705E-11	1.674E-11	1.143E-11	8.192E-12	6.152E-12	4.783E-12	3.821E-12	3.119E-12
WNW	1.440E-10	8.546E-11	6.050E-11	3.607E-11	2.351E-11	1.509E-11	1.093E-11	8.208E-12	6.473E-12	5.170E-12	4.220E-12
NW	2.021E-10	1.187E-10	8.364E-11	5.253E-11	3.217E-11	2.151E-11	1.530E-11	1.149E-11	8.994E-12	7.184E-12	5.864E-12
NNW	2.123E-10	1.385E-10	1.024E-10	6.317E-11	4.042E-11	2.678E-11	1.839E-11	1.339E-11	1.028E-11	8.214E-12	6.706E-12
N	1.573E-10	7.472E-11	4.569E-11	2.421E-11	7.848E-11	4.505E-11	3.221E-11	2.419E-11	1.881E-11	1.503E-11	1.226E-11
NNE	1.056E-10	1.834E-10	1.127E-10	5.799E-11	3.529E-11	2.363E-11	1.690E-11	1.266E-11	9.826E-12	7.838E-12	6.391E-12
NE	5.696E-11	9.906E-11	6.146E-11	3.198E-11	1.953E-11	1.307E-11	9.486E-12	7.077E-12	5.503E-12	4.420E-12	3.608E-12
ENE	5.304E-11	6.240E-11	4.547E-11	2.773E-11	1.768E-11	1.170E-11	8.218E-12	5.728E-12	4.453E-12	3.558E-12	2.905E-12
E	4.165E-11	4.904E-11	3.573E-11	2.179E-11	1.389E-11	9.199E-12	6.458E-12	4.733E-12	3.610E-12	2.819E-12	2.296E-12
ESE	6.728E-11	6.788E-11	4.799E-11	2.857E-11	1.811E-11	1.201E-11	8.457E-12	6.222E-12	4.760E-12	3.753E-12	3.031E-12
SE	1.503E-10	7.116E-11	4.337E-11	2.279E-11	1.386E-11	9.482E-12	7.030E-12	1.140E-11	8.789E-12	6.981E-12	5.683E-12
SSE	2.503E-10	2.607E-10	1.601E-10	8.227E-11	5.005E-11	3.352E-11	2.397E-11	1.796E-11	1.394E-11	1.112E-11	9.066E-12

***** RELATIVE DEPOSITION PER UNIT AREA (M**-2) BY DOWNWIND SECTORS *****

DIRECTION FROM SITE	SEGMENT BOUNDARIES IN MILES									
	.5-1	1-2	2-3	3-4	4-5	5-10	10-20	20-30	30-40	40-50
S	2.636E-09	1.759E-09	8.358E-10	4.720E-10	3.301E-10	1.649E-10	6.024E-11	2.820E-11	1.616E-11	1.018E-11
SSW	1.152E-09	8.189E-10	3.948E-10	2.528E-10	1.643E-10	8.202E-11	3.224E-11	1.495E-11	8.187E-12	5.120E-12
SW	1.085E-09	1.022E-09	4.678E-10	2.274E-10	1.348E-10	7.331E-11	3.036E-11	1.378E-11	7.619E-12	4.716E-12
WSW	1.248E-09	1.008E-09	3.693E-10	1.774E-10	1.045E-10	5.982E-11	2.682E-11	1.163E-11	6.269E-12	3.881E-12
W	2.785E-09	1.044E-09	3.441E-10	1.634E-10	9.622E-11	4.800E-11	2.591E-11	1.155E-11	6.213E-12	3.846E-12
WNW	2.458E-09	1.568E-09	5.454E-10	2.662E-10	1.698E-10	8.738E-11	3.592E-11	1.567E-11	8.325E-12	5.204E-12
NW	2.515E-09	2.380E-09	8.269E-10	3.849E-10	2.394E-10	1.217E-10	5.039E-11	2.187E-11	1.163E-11	7.231E-12
NNW	1.447E-09	1.301E-09	6.294E-10	3.648E-10	2.427E-10	1.388E-10	6.177E-11	2.706E-11	1.364E-11	8.268E-12
N	2.585E-09	1.328E-09	5.853E-10	3.205E-10	1.963E-10	8.018E-11	5.310E-11	4.883E-11	2.443E-11	1.512E-11
NNE	1.329E-09	8.300E-10	3.878E-10	2.148E-10	1.319E-10	1.347E-10	6.006E-11	2.405E-11	1.279E-11	7.891E-12
NE	6.061E-10	4.310E-10	2.078E-10	1.158E-10	7.113E-11	7.299E-11	3.300E-11	1.336E-11	7.166E-12	4.440E-12
ENE	5.644E-10	4.014E-10	1.935E-10	1.078E-10	6.624E-11	5.280E-11	2.720E-11	1.190E-11	5.954E-12	3.581E-12
E	4.432E-10	3.152E-10	1.519E-10	8.466E-11	5.201E-11	4.148E-11	2.138E-11	9.354E-12	4.798E-12	2.860E-12
ESE	7.159E-10	5.091E-10	2.454E-10	1.368E-10	8.402E-11	5.891E-11	2.824E-11	1.222E-11	6.303E-12	3.784E-12
SE	1.645E-09	1.144E-09	5.487E-10	3.055E-10	1.877E-10	7.639E-11	2.339E-11	9.668E-12	9.158E-12	7.036E-12
SSE	2.686E-09	1.897E-09	9.132E-10	5.087E-10	3.125E-10	2.137E-10	8.525E-11	3.411E-11	1.815E-11	1.119E-11

ERP ELEVATED STACK RELEASES - JAN-DEC 2018
CORRECTED USING STANDARD OPEN TERRAIN FACTORS

SPECIFIC POINTS OF INTEREST

ID	LOCATION	FROM SITE (MI)	DIRECTION	DIST.	X/Q			D/Q
					(SEC/M3)	(SEC/M3)	(SEC/M3)	(PER SQ.METER)
					NO	2.26 DAY	8.0 DAY	
					DECAY	DECAY	DECAY	
					UNDEPLETED	UNDEPLETED	DEPLETED	
A	Site Boundary	S		.80	5.3E-08	5.3E-08	5.3E-08	3.0E-09
A	Site Boundary	SSW		.82	2.8E-08	2.8E-08	2.8E-08	1.4E-09
A	Site Boundary	SW		.97	1.1E-07	1.1E-07	1.1E-07	1.2E-09
A	Site Boundary	WSW		.93	1.0E-07	1.0E-07	9.9E-08	1.4E-09
A	Site Boundary	W		.91	2.0E-07	2.0E-07	2.0E-07	2.3E-09
A	Site Boundary	WNW		.94	2.0E-07	2.0E-07	2.0E-07	3.1E-09
A	Site Boundary	NW		.81	1.2E-07	1.2E-07	1.2E-07	1.7E-09
A	Site Boundary	NNW		.69	2.5E-08	2.5E-08	2.5E-08	1.5E-09
A	Site Boundary	N		.67	3.2E-08	3.2E-08	3.2E-08	2.8E-09
A	Site Boundary	NNE		.60	8.2E-09	8.2E-09	8.2E-09	1.2E-09
A	Site Boundary	NE		.62	4.0E-09	4.0E-09	4.0E-09	4.9E-10
A	Site Boundary	ENE		.59	2.5E-09	2.5E-09	2.5E-09	4.1E-10
A	Site Boundary	E		.53	7.0E-10	7.0E-10	7.0E-10	2.6E-10
A	Site Boundary	ESE		.54	1.4E-09	1.4E-09	1.4E-09	4.4E-10
A	Site Boundary	SE		.65	1.3E-08	1.3E-08	1.3E-08	1.5E-09
A	Site Boundary	SSE		.81	4.8E-08	4.8E-08	4.8E-08	3.2E-09
A	Nearest Res	SSW		3.00	4.6E-08	4.6E-08	4.4E-08	2.9E-10
A	Nearest Res	SW		1.00	1.1E-07	1.1E-07	1.1E-07	1.2E-09
A	Nearest Res	WSW		1.90	1.4E-07	1.4E-07	1.4E-07	6.4E-10
A	Nearest Res	W		1.00	2.1E-07	2.1E-07	2.1E-07	2.1E-09
A	Nearest Res	WNW		1.70	2.4E-07	2.4E-07	2.4E-07	1.3E-09
A	Nearest Res	NW		.90	1.8E-07	1.8E-07	1.8E-07	4.2E-09
A	Nearest Res	NNW		1.90	1.7E-07	1.7E-07	1.6E-07	1.0E-09
A	Nearest Res	N		2.90	5.4E-08	5.4E-08	5.3E-08	4.5E-10
A	Nearest Res	NNE		1.70	4.8E-08	4.8E-08	4.8E-08	7.0E-10
A	Nearest Res	ENE		1.70	2.9E-08	2.9E-08	2.9E-08	3.4E-10
A	Nearest Res	E		2.20	2.1E-08	2.1E-08	2.1E-08	1.9E-10
A	Nearest Res	SE		2.80	3.8E-08	3.7E-08	3.6E-08	4.5E-10
A	Nearest Cow	NNW		3.50	1.2E-07	1.2E-07	1.2E-07	3.6E-10
A	Nearest Garde	SSW		3.00	4.6E-08	4.6E-08	4.4E-08	2.9E-10
A	Nearest Garde	SW		2.20	1.1E-07	1.1E-07	1.1E-07	5.9E-10
A	Nearest Garde	WNW		1.70	2.4E-07	2.4E-07	2.4E-07	1.3E-09
A	Nearest Garde	NW		.90	1.8E-07	1.8E-07	1.8E-07	4.2E-09
A	Nearest Garde	NNW		2.80	1.4E-07	1.4E-07	1.4E-07	5.4E-10
A	Nearest Garde	E		2.20	2.1E-08	2.1E-08	2.1E-08	1.9E-10
A	Nearest Garde	ESE		2.20	2.6E-08	2.6E-08	2.5E-08	3.0E-10
A	Nearest Garde	SE		2.80	3.8E-08	3.7E-08	3.6E-08	4.5E-10
A	MAXIMUM CHI/Q	S		1.50	9.3E-08	9.3E-08	9.2E-08	1.8E-09
A	MAXIMUM CHI/Q	SSW		1.50	5.5E-08	5.5E-08	5.4E-08	8.3E-10
A	MAXIMUM CHI/Q	SW		1.50	1.8E-07	1.8E-07	1.8E-07	1.3E-09
A	MAXIMUM CHI/Q	WSW		1.50	2.1E-07	2.1E-07	2.1E-07	1.1E-09
A	MAXIMUM CHI/Q	W		1.00	2.1E-07	2.1E-07	2.1E-07	2.1E-09
A	MAXIMUM CHI/Q	WNW		1.50	3.0E-07	3.0E-07	2.9E-07	1.7E-09
A	MAXIMUM CHI/Q	NW		1.50	4.6E-07	4.5E-07	4.5E-07	2.7E-09
A	MAXIMUM CHI/Q	NNW		2.00	1.7E-07	1.6E-07	1.6E-07	9.2E-10
A	MAXIMUM CHI/Q	N		1.50	7.0E-08	6.9E-08	6.9E-08	1.3E-09
A	MAXIMUM CHI/Q	NNE		1.50	4.9E-08	4.9E-08	4.8E-08	8.3E-10
A	MAXIMUM CHI/Q	NE		1.50	2.9E-08	2.9E-08	2.9E-08	4.4E-10
A	MAXIMUM CHI/Q	ENE		1.50	2.9E-08	2.9E-08	2.9E-08	4.1E-10
A	MAXIMUM CHI/Q	E		1.50	2.4E-08	2.4E-08	2.4E-08	3.2E-10
A	MAXIMUM CHI/Q	ESE		1.50	3.0E-08	3.0E-08	3.0E-08	5.2E-10
A	MAXIMUM CHI/Q	SE		1.50	5.7E-08	5.7E-08	5.7E-08	1.2E-09
A	MAXIMUM CHI/Q	SSE		1.50	8.9E-08	8.9E-08	8.8E-08	1.9E-09

B323

ATMOSPHERIC DIFFUSION MODEL

Onsite meteorological data from January 1 through December 31, 2018 were used to determine long-term (routine) diffusion estimates for evaluating normal atmospheric releases from Cooper Nuclear Station. Atmospheric dispersion parameters (X/Q values) were determined for the site boundary distances from each release point, the standard population distances, and special locations for nearest residence, cow, and garden using the methodology presented in U.S. NRC Regulatory Guide 1.111 (Rev.1) and the computer code XOQDOQ (NUREG/CR2919). Two release modes were analyzed. Releases from the 99-meter free-standing stack were considered 100 percent elevated, while releases from the reactor building, turbine-generator building, radwaste building and augmented radwaste building vents were considered as a 100 percent ground level release (one combined source term was assumed to apply for these vents).

Winds were obtained from measurements at the 10-meter level (for ground-level releases) and the 100-meter level (for elevated releases), and the stability class was based on the vertical temperature gradient between 60 meters and 10 meters (for ground releases) and 100 meters and 10 meters (for elevated releases). In accordance with Regulatory Guide 1.111, calm periods were distributed directionally in proportion to the directional distribution within a stability class of the lowest wind speed group. For the calculations, calm periods were assigned a speed of one-half the threshold wind speed of the wind vane or anemometer, whichever is higher.

The Gaussian straight-line trajectory model, which assumes that the air flow transports and diffuses effluents along a straight line through the entire region of interest in the airflow direction at the release point, was modified to account for various modes of effluent releases. In the case of an elevated release, plume rise due to momentum effects was incorporated into the calculation. For ground-level releases, building wake effects were considered.

The mathematical equation used in the Gaussian straight-line trajectory model is:

$$(X/Q)_i = 2.032 \sum_{jk} \frac{f_{ijk}}{xu_{jk} \Sigma_{zk}} \exp \left[\frac{-1/2 h_e^2}{\sigma_{zk}^2} \right] \quad (\text{Eq. 1})$$

and

$$\Sigma_{zk} = (\sigma_{zk}^2 + 0.5 D_z^2 / \pi)^{1/2} \leq \sqrt{3} \sigma_{zk} \quad (\text{Eq. 2})$$

where

I	=	index identifying direction sector;
j	=	index identifying wind speed class;
k	=	index identifying atmospheric stability class;
$\frac{X}{Q}$	=	average effluent concentration normalized by source strength at the specific downwind distance;
f	=	joint frequency distribution of wind direction, wind speed class, and atmospheric stability class;
x	=	distance from the release point to a receptor;
u	=	wind speed;
Σ_z	=	vertical plume spread with volumetric building wake correction for a release within the building wake cavity;
σ_z	=	vertical plume spread without volumetric building wake correction;
D_z	=	maximum adjacent building height either upwind or downwind of the release point (44.5 meters for ground-level releases); and
h_e	=	effective plume height;

The term Σ_{zk} given in Equations 1 and 2 is used for ground-level release ($h = 0$) within the building wake cavity. For an elevated release, no volumetric building wake correction needs to be considered, i.e., $\Sigma_{zk} = \sigma_{zk}$. For all building wake determinations, the reactor building was considered to be the dominating structure in the modification of air flows within the building complex.

Since the model does not directly consider the effects of spatial and temporal variation in airflow due to terrain, appropriate adjustments were made to the calculated X/Q values, using the default values of Regulatory Guide 1.111, Rev. 0.

APPENDIX C

DOSE CALCULATIONS

CONTENTS

	<u>Page</u>
LIQUID EFFLUENT DOSE CALCULATIONS	C1
GASEOUS EFFLUENT DOSE CALCULATIONS (EXCEPT CARBON-14)	C8
CARBON-14 GASEOUS EFFLUENT DOSE CALCULATIONS	C51
DOSE CALCULATION MODELS	C66

LIQUID EFFLUENT DOSE CALCULATIONS

Doses to the maximum individual and 0 to 50 - mile population resulting from the release of radioactive material in liquid effluents from Cooper Nuclear Station were calculated using the latest version of the LADTAP II computer program included as part of NRC Dose 2.3.20 (ORNL 2015). The LADTAP II program implements the radiological dose models of Regulatory Guide 1.109 for determining the radiation exposure to man from three principal exposure pathways in the aquatic environment -- potable water, aquatic foods, and recreational water use. Doses to both the maximum individual and 0 to 50 mile population are calculated as a function of age group and pathway for significant body organs, and are presented in Tables 1 - 6.

Assumptions and data sources used for input to the LADTAP II code are described in a separate section of this appendix (see page C66).

TABLE 1. Doses to Maximum Individual at the Site Boundary, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, January-June 2018 Cooper Nuclear Station

Period and Pathway	Dose to Individual, mrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>1st Quarter</u>								
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>2nd Quarter</u>								
Eating Fish		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 1st & 2nd Quarters	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00

Calculated doses are based on the following periods of exposures: Fishing: April - November; Drinking water and shoreline: January - December

TABLE 2. Doses to Maximum Individual at the Site Boundary, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, July-December 2018, Cooper Nuclear Station

Period and Pathway	Dose to Individual, mrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>3rd Quarter</u>								
Eating Fish		6.04 E-02	1.02 E-01	5.85 E-02	4.08 E-05	3.43 E-02	9.28 E-03	6.18 E-02
Drinking Water		1.05 E-03	4.75 E-03	3.20 E-03	1.58 E-03	2.54 E-03	1.74 E-03	9.56 E-03
Shoreline	1.25 E-03	1.07 E-03	1.07 E-03	1.07 E-03	1.07 E-03	1.07 E-03	1.07 E-03	1.07 E-03
Totals	1.25 E-03	6.25 E-02	1.08 E-01	6.27 E-02	2.69 E-03	3.79 E-02	1.21 E-02	7.24 E-02
<u>4th Quarter</u>								
Eating Fish		4.51 E-02	7.47 E-02	4.52 E-02	7.30 E-05	3.13 E-02	6.13 E-03	2.84 E-02
Drinking Water		7.90 E-04	4.59 E-03	4.41 E-03	2.81 E-03	3.39 E-03	2.92 E-03	1.06 E-02
Shoreline	2.05 E-03	1.74 E-03	1.74 E-03	1.74 E-03	1.74 E-03	1.74 E-03	1.74 E-03	1.74 E-03
Totals	2.05 E-03	4.77 E-02	8.11 E-02	5.14 E-02	4.63 E-03	3.65 E-02	1.08 E-02	4.07 E-02
Totals for 3rd & 4th Quarters	3.30 E-03	1.10 E-01	1.89 E-01	1.14 E-01	7.32 E-03	7.44 E-02	2.29 E-02	1.13 E-01

Calculated doses are based on the following periods of exposures: Fishing: April - November; Drinking water and shoreline: January - December

TABLE 3. Summary of Doses to Maximum Individual at the Site Boundary, Resulting from Exposure to Radioactivity Discharged in Liquid Effluents, January-December 2018, Cooper Nuclear Station

Period and Pathway	Dose to Individual, mrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
1st Quarter	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
2nd Quarter	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+001	0.00 E+00	0.00 E+00
3rd Quarter	1.25 E-03	6.25 E-02	1.08 E-01	6.27 E-02	2.69 E-03	3.79 E-02	1.21 E-02	7.24 E-02
4th Quarter	2.05 E-03	4.77 E-02	8.11 E-02	5.14 E-02	4.63 E-03	3.65 E-02	1.08 E-02	4.07 E-02
Totals for 2018	3.30 E-03	1.10 E-01	1.89 E-01	1.14 E-01	7.32 E-03	7.44 E-02	2.29 E-02	1.13 E-01

C4

TABLE 4. Doses to Population Within a 50-Mile Radius, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, January-June 2018, Cooper Nuclear Station

Period and Pathway	Dose to Population, manrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>1st Quarter</u>								
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>2nd Quarter</u>								
Eating Fish		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Drinking Water		0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Shoreline	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Swimming	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Boating	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
Totals for 1st & 2nd Quarters	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00

Calculated doses are based on the following periods of exposures: Fishing and Boating: April - November; Drinking water and shoreline: January - December; Swimming: June - September. Exposure from drinking water is calculated for the city of St. Joseph, Missouri, nearest public water intake from the Missouri River, 84 miles downstream.

5

TABLE 5. Doses to Population Within a 50-Mile Radius, Resulting From Exposure to Radioactivity Discharged in Liquid Effluents, July-December 2018, Cooper Nuclear Station

Period and Pathway	Dose to Population, manrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>3rd Quarter</u>								
Eating Fish		7.36 E-02	1.14 E-01	5.52 E-02	4.24 E-05	3.82 E-02	1.08 E-02	5.64 E-02
Drinking Water		2.68 E-02	1.00 E-01	6.24 E-02	3.12 E-02	5.20 E-02	3.49 E-02	1.63 E-01
Shoreline	3.29 E-02	0.00 E+00	0.00 E+00	2.80 E-02	2.80 E-02	0.00 E+00	0.00 E+00	0.00 E+00
Swimming	0.00 E+00	0.00 E+00	0.00 E+00	2.76 E-04	2.76 E-04	0.00 E+00	0.00 E+00	0.00 E+00
Boating	0.00 E+00	0.00 E+00	0.00 E+00	1.01 E-03	1.01 E-03	0.00 E+00	0.00 E+00	0.00 E+00
Totals	3.29 E-02	1.00 E-01	2.14 E-01	1.47 E-01	6.05 E-02	9.02 E-02	4.57 E+02	2.19 E-01
<u>4th Quarter</u>								
Eating Fish		6.67 E-02	1.02 E-01	5.39 E-02	9.31 E-05	4.20 E-02	8.78 E-03	3.21 E-02
Drinking Water		2.44 E-02	1.16 E-01	1.09 E-01	6.83 E-02	8.37 E-02	7.15 E-02	2.28 E-01
Shoreline	6.58 E-02	0.00 E+00	0.00 E+00	5.60 E-02	5.60 E-02	0.00 E+00	0.00 E+00	0.00 E+00
Boating	0.00 E+00	0.00 E+00	0.00 E+00	1.24 E-03	1.24 E-03	0.00 E+00	0.00 E+00	0.00 E+00
Totals	6.58 E-02	9.11 E-02	2.18 E-01	2.20 E-01	1.26 E-01	1.26 E-01	8.03 E-02	2.60 E-01
Totals for 3rd & 4th Quarters	9.87 E-02	1.92 E-01	4.32 E-01	3.67 E-01	1.86 E-01	2.16 E-01	1.26 E-01	4.80 E-01

Calculated doses are based on the following periods of exposures: Fishing and Boating: April - November; Drinking water and shoreline: January - December; Swimming: June - September. Exposure from drinking water is calculated for the city of St. Joseph, Missouri, nearest public water intake from the Missouri River, 84 miles downstream.

TABLE 6. Summary of Doses to Population Within a 50-Mile Radius, Resulting from Exposure to Radioactivity Discharged in Liquid Effluents, January-December 2018 Cooper Nuclear Station

Period and Pathway	Dose to Population, manrem							
	Skin	Bone	Liver	Total Body	Thyroid	Kidney	Lung	GI-LLI
<u>1st Quarter</u>	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>2nd Quarter</u>	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00	0.00 E+00
<u>3rd Quarter</u>	3.29 E-02	1.00 E-01	2.14 E-01	1.47 E-01	6.05 E-02	9.02 E-02	4.57 E+02	2.19 E-01
<u>4th Quarter</u>	6.58 E-02	9.11 E-02	2.18 E-01	2.20 E-01	1.26 E-01	1.26 E-01	8.03 E-02	2.60 E-01
Totals for 2018	9.87 E-02	1.92 E-01	4.32 E-01	3.67 E-01	1.86 E-01	2.16 E-01	1.26 E-01	4.80 E-01

C7

GASEOUS EFFLUENT DOSE CALCULATIONS (EXCEPT CARBON-14)

Doses to the maximum individual and 0 to 50 mile population resulting from the release of radioactive material in gaseous effluents from the Cooper Nuclear Station were calculated using the latest version of the GASPARG computer code included as part of NRC Dose 2.3.20 (ORNL 2015). Four sites were selected for individual dose calculations: the site boundary, the nearest residence, the nearest garden and the nearest cow. GASPARG implements the radiological dose models of Regulatory Guide 1.109 for determining the radiation exposure to man from four principal atmospheric exposure pathways: plume, ground, inhalation, and ingestion. Doses to the maximum individual and the population are calculated as a function of age group and pathway for significant body organs.

Tables 1 through 7 present maximum individual doses. Population doses are given in Tables 8 through 14.

Assumptions and data used for input to the GASPARG code are described in a separate section of this appendix (see page C66).

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 9.27E-06 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.42E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	9.51E-06	9.51E-06	9.51E-06	9.51E-06	9.51E-06	9.51E-06	9.60E-06	1.91E-05
GROUND	2.74E-04	2.74E-04	2.74E-04	2.74E-04	2.74E-04	2.74E-04	2.74E-04	3.23E-04
VEGET								
ADULT	4.80E-06	3.54E-05	3.10E-06	2.89E-06	9.72E-07	1.46E-04	6.51E-08	0.00E+00
TEEN	7.23E-06	3.78E-05	4.92E-06	4.46E-06	1.48E-06	1.96E-04	1.22E-07	0.00E+00
CHILD	1.41E-05	2.48E-05	1.16E-05	7.12E-06	2.39E-06	3.76E-04	1.86E-07	0.00E+00
MEAT								
ADULT	1.15E-06	9.45E-06	6.73E-08	5.62E-07	3.64E-08	3.90E-06	5.32E-09	0.00E+00
TEEN	8.98E-07	5.09E-06	5.51E-08	4.38E-07	2.96E-08	2.83E-06	5.03E-09	0.00E+00
CHILD	1.38E-06	2.57E-06	1.01E-07	5.27E-07	3.76E-08	4.27E-06	5.91E-09	0.00E+00
COW MILK								
ADULT	7.01E-07	2.19E-06	6.43E-07	8.58E-07	7.36E-07	1.11E-04	4.50E-08	0.00E+00
TEEN	9.94E-07	2.59E-06	1.16E-06	1.51E-06	1.31E-06	1.76E-04	9.30E-08	0.00E+00
CHILD	1.65E-06	1.74E-06	2.80E-06	2.59E-06	2.18E-06	3.49E-04	1.43E-07	0.00E+00
INFANT	2.72E-06	1.54E-06	5.06E-06	5.62E-06	3.74E-06	8.47E-04	2.59E-07	0.00E+00
GOATMILK								
ADULT	1.05E-06	4.26E-07	1.39E-06	1.63E-06	1.13E-06	1.33E-04	1.35E-07	0.00E+00
TEEN	1.19E-06	5.33E-07	2.52E-06	2.88E-06	2.00E-06	2.11E-04	2.79E-07	0.00E+00
CHILD	1.39E-06	3.88E-07	6.06E-06	4.99E-06	3.33E-06	4.18E-04	4.29E-07	0.00E+00
INFANT	2.09E-06	3.63E-07	1.05E-05	1.04E-05	5.64E-06	1.02E-03	7.76E-07	0.00E+00
INHAL								
ADULT	8.07E-08	9.34E-07	4.93E-08	1.12E-07	1.16E-07	1.40E-05	1.89E-05	0.00E+00
TEEN	1.04E-07	8.60E-07	6.92E-08	1.52E-07	1.60E-07	1.79E-05	2.77E-05	0.00E+00
CHILD	1.14E-07	3.46E-07	9.41E-08	1.44E-07	1.50E-07	2.15E-05	2.24E-05	0.00E+00
INFANT	6.72E-08	1.29E-07	7.17E-08	1.18E-07	9.89E-08	1.97E-05	1.43E-05	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 3.33E-06 MILLRADS
ANNUAL GAMMA AIR DOSE = 5.10E-06 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.42E-06	3.42E-06	3.42E-06	3.42E-06	3.42E-06	3.42E-06	3.45E-06	6.85E-06
GROUND	2.06E-04	2.06E-04	2.06E-04	2.06E-04	2.06E-04	2.06E-04	2.06E-04	2.42E-04
VEGET								
ADULT	3.57E-06	2.65E-05	1.88E-06	2.14E-06	6.95E-07	1.04E-04	4.78E-08	0.00E+00
TEEN	5.38E-06	2.83E-05	2.99E-06	3.30E-06	1.06E-06	1.40E-04	8.96E-08	0.00E+00
CHILD	1.05E-05	1.85E-05	7.05E-06	5.27E-06	1.71E-06	2.68E-04	1.36E-07	0.00E+00
MEAT								
ADULT	8.59E-07	7.08E-06	4.52E-08	4.20E-07	2.63E-08	2.78E-06	3.90E-09	0.00E+00
TEEN	6.72E-07	3.81E-06	3.71E-08	3.27E-07	2.14E-08	2.01E-06	3.70E-09	0.00E+00
CHILD	1.04E-06	1.93E-06	6.80E-08	3.93E-07	2.71E-08	3.04E-06	4.34E-09	0.00E+00
COW MILK								
ADULT	5.13E-07	1.63E-06	4.48E-07	6.24E-07	5.26E-07	7.88E-05	3.30E-08	0.00E+00
TEEN	7.28E-07	1.94E-06	8.10E-07	1.10E-06	9.37E-07	1.25E-04	6.83E-08	0.00E+00
CHILD	1.21E-06	1.30E-06	1.95E-06	1.88E-06	1.56E-06	2.48E-04	1.05E-07	0.00E+00
INFANT	1.99E-06	1.15E-06	3.53E-06	4.07E-06	2.67E-06	6.02E-04	1.90E-07	0.00E+00
GOATMILK								
ADULT	7.67E-07	3.09E-07	9.79E-07	1.19E-06	8.10E-07	9.45E-05	9.91E-08	0.00E+00
TEEN	8.61E-07	3.85E-07	1.77E-06	2.10E-06	1.44E-06	1.50E-04	2.05E-07	0.00E+00
CHILD	1.00E-06	2.79E-07	4.26E-06	3.64E-06	2.39E-06	2.97E-04	3.15E-07	0.00E+00
INFANT	1.50E-06	2.61E-07	7.33E-06	7.56E-06	4.05E-06	7.23E-04	5.70E-07	0.00E+00
INHAL								
ADULT	5.76E-08	6.67E-07	3.51E-08	7.99E-08	8.29E-08	1.01E-05	1.35E-05	0.00E+00
TEEN	7.40E-08	6.13E-07	4.93E-08	1.08E-07	1.15E-07	1.29E-05	1.98E-05	0.00E+00
CHILD	8.15E-08	2.39E-07	6.70E-08	1.03E-07	1.08E-07	1.55E-05	1.60E-05	0.00E+00
INFANT	4.79E-08	8.47E-08	5.11E-08	8.46E-08	7.09E-08	1.42E-05	1.02E-05	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.46E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 2.23E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.50E-04	1.50E-04	1.50E-04	1.50E-04	1.50E-04	1.50E-04	1.51E-04	3.00E-04
GROUND	7.64E-05	7.64E-05	7.64E-05	7.64E-05	7.64E-05	7.64E-05	7.64E-05	8.99E-05
VEGET								
ADULT	1.84E-06	1.10E-05	9.29E-06	1.30E-06	9.01E-07	1.48E-04	3.72E-08	0.00E+00
TEEN	2.70E-06	1.19E-05	1.47E-05	2.01E-06	1.37E-06	1.99E-04	6.96E-08	0.00E+00
CHILD	5.26E-06	7.99E-06	3.47E-05	3.28E-06	2.20E-06	3.82E-04	1.06E-07	0.00E+00
MEAT								
ADULT	3.34E-07	2.63E-06	1.19E-07	1.78E-07	2.98E-08	3.96E-06	3.03E-09	0.00E+00
TEEN	2.58E-07	1.42E-06	9.58E-08	1.39E-07	2.43E-08	2.87E-06	2.87E-09	0.00E+00
CHILD	3.93E-07	7.16E-07	1.74E-07	1.70E-07	3.08E-08	4.33E-06	3.37E-09	0.00E+00
COW MILK								
ADULT	4.25E-07	7.38E-07	8.16E-07	6.15E-07	6.91E-07	1.13E-04	2.57E-08	0.00E+00
TEEN	6.06E-07	8.99E-07	1.46E-06	1.09E-06	1.23E-06	1.79E-04	5.30E-08	0.00E+00
CHILD	9.99E-07	6.29E-07	3.51E-06	1.88E-06	2.05E-06	3.55E-04	8.15E-08	0.00E+00
INFANT	1.73E-06	5.74E-07	6.40E-06	4.23E-06	3.53E-06	8.63E-04	1.47E-07	0.00E+00
GOATMILK								
ADULT	7.15E-07	3.21E-07	1.64E-06	1.11E-06	9.68E-07	1.35E-04	7.70E-08	0.00E+00
TEEN	8.70E-07	4.24E-07	2.93E-06	1.97E-06	1.72E-06	2.14E-04	1.59E-07	0.00E+00
CHILD	1.17E-06	3.32E-07	7.03E-06	3.42E-06	2.86E-06	4.26E-04	2.45E-07	0.00E+00
INFANT	1.90E-06	3.26E-07	1.24E-05	7.34E-06	4.89E-06	1.04E-03	4.42E-07	0.00E+00
INHAL								
ADULT	2.83E-08	2.15E-07	3.29E-08	4.85E-08	5.47E-08	4.99E-06	3.73E-06	0.00E+00
TEEN	3.71E-08	2.39E-07	4.55E-08	6.63E-08	7.54E-08	6.42E-06	5.46E-06	0.00E+00
CHILD	4.24E-08	4.28E-07	6.12E-08	6.40E-08	7.06E-08	7.74E-06	4.43E-06	0.00E+00
INFANT	2.75E-08	3.48E-07	4.50E-08	5.63E-08	4.65E-08	7.10E-06	2.86E-06	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 4.39E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 5.85E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.92E-05	3.92E-05	3.92E-05	3.92E-05	3.92E-05	3.92E-05	3.97E-05	8.25E-05
GROUND	3.65E-06	3.65E-06	3.65E-06	3.65E-06	3.65E-06	3.65E-06	3.65E-06	4.30E-06
VEGET								
ADULT	1.01E-07	5.53E-07	6.49E-07	7.44E-08	5.81E-08	9.67E-06	2.24E-09	0.00E+00
TEEN	1.46E-07	6.03E-07	1.03E-06	1.14E-07	8.81E-08	1.30E-05	4.20E-09	0.00E+00
CHILD	2.84E-07	4.09E-07	2.42E-06	1.88E-07	1.42E-07	2.49E-05	6.39E-09	0.00E+00
MEAT								
ADULT	1.63E-08	1.26E-07	8.11E-09	9.05E-09	1.90E-09	2.58E-07	1.83E-10	0.00E+00
TEEN	1.26E-08	6.79E-08	6.53E-09	7.11E-09	1.55E-09	1.87E-07	1.73E-10	0.00E+00
CHILD	1.91E-08	3.44E-08	1.19E-08	8.71E-09	1.97E-09	2.82E-07	2.03E-10	0.00E+00
COW MILK								
ADULT	2.59E-08	3.84E-08	5.44E-08	3.84E-08	4.46E-08	7.34E-06	1.55E-09	0.00E+00
TEEN	3.69E-08	4.72E-08	9.72E-08	6.80E-08	7.95E-08	1.16E-05	3.20E-09	0.00E+00
CHILD	6.07E-08	3.35E-08	2.34E-07	1.18E-07	1.32E-07	2.31E-05	4.92E-09	0.00E+00
INFANT	1.06E-07	3.09E-08	4.26E-07	2.66E-07	2.28E-07	5.62E-05	8.89E-09	0.00E+00
GOATMILK								
ADULT	4.44E-08	2.02E-08	1.09E-07	6.92E-08	6.19E-08	8.81E-06	4.64E-09	0.00E+00
TEEN	5.46E-08	2.69E-08	1.94E-07	1.22E-07	1.10E-07	1.40E-05	9.60E-09	0.00E+00
CHILD	7.47E-08	2.12E-08	4.66E-07	2.13E-07	1.83E-07	2.77E-05	1.47E-08	0.00E+00
INFANT	1.23E-07	2.09E-08	8.24E-07	4.58E-07	3.13E-07	6.74E-05	2.67E-08	0.00E+00
INHAL								
ADULT	5.96E-09	3.65E-08	1.15E-08	1.20E-08	1.64E-08	1.59E-06	4.07E-07	0.00E+00
TEEN	7.82E-09	5.03E-08	1.57E-08	1.64E-08	2.25E-08	2.05E-06	6.01E-07	0.00E+00
CHILD	8.96E-09	1.41E-07	2.10E-08	1.60E-08	2.11E-08	2.48E-06	4.91E-07	0.00E+00
INFANT	6.07E-09	1.18E-07	1.48E-08	1.44E-08	1.38E-08	2.27E-06	3.26E-07	0.00E+00

TABLE 1. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.46E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 2.23E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.50E-04	1.50E-04	1.50E-04	1.50E-04	1.50E-04	1.50E-04	1.51E-04	3.00E-04
GROUND	7.64E-05	7.64E-05	7.64E-05	7.64E-05	7.64E-05	7.64E-05	7.64E-05	8.99E-05
VEGET								
ADULT	1.84E-06	1.10E-05	9.29E-06	1.30E-06	9.01E-07	1.48E-04	3.72E-08	0.00E+00
TEEN	2.70E-06	1.19E-05	1.47E-05	2.01E-06	1.37E-06	1.99E-04	6.96E-08	0.00E+00
CHILD	5.26E-06	7.99E-06	3.47E-05	3.28E-06	2.20E-06	3.82E-04	1.06E-07	0.00E+00
MEAT								
ADULT	3.34E-07	2.63E-06	1.19E-07	1.78E-07	2.98E-08	3.96E-06	3.03E-09	0.00E+00
TEEN	2.58E-07	1.42E-06	9.58E-08	1.39E-07	2.43E-08	2.87E-06	2.87E-09	0.00E+00
CHILD	3.93E-07	7.16E-07	1.74E-07	1.70E-07	3.08E-08	4.33E-06	3.37E-09	0.00E+00
COW MILK								
ADULT	4.25E-07	7.38E-07	8.16E-07	6.15E-07	6.91E-07	1.13E-04	2.57E-08	0.00E+00
TEEN	6.06E-07	8.99E-07	1.46E-06	1.09E-06	1.23E-06	1.79E-04	5.30E-08	0.00E+00
CHILD	9.99E-07	6.29E-07	3.51E-06	1.88E-06	2.05E-06	3.55E-04	8.15E-08	0.00E+00
INFANT	1.73E-06	5.74E-07	6.40E-06	4.23E-06	3.53E-06	8.63E-04	1.47E-07	0.00E+00
GOATMILK								
ADULT	7.15E-07	3.21E-07	1.64E-06	1.11E-06	9.68E-07	1.35E-04	7.70E-08	0.00E+00
TEEN	8.70E-07	4.24E-07	2.93E-06	1.97E-06	1.72E-06	2.14E-04	1.59E-07	0.00E+00
CHILD	1.17E-06	3.32E-07	7.03E-06	3.42E-06	2.86E-06	4.26E-04	2.45E-07	0.00E+00
INFANT	1.90E-06	3.26E-07	1.24E-05	7.34E-06	4.89E-06	1.04E-03	4.42E-07	0.00E+00
INHAL								
ADULT	2.83E-08	2.15E-07	3.29E-08	4.85E-08	5.47E-08	4.99E-06	3.73E-06	0.00E+00
TEEN	3.71E-08	2.39E-07	4.55E-08	6.63E-08	7.54E-08	6.42E-06	5.46E-06	0.00E+00
CHILD	4.24E-08	4.28E-07	6.12E-08	6.40E-08	7.06E-08	7.74E-06	4.43E-06	0.00E+00
INFANT	2.75E-08	3.48E-07	4.50E-08	5.63E-08	4.65E-08	7.10E-06	2.86E-06	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 3.74E-06 MILLRADS
 ANNUAL GAMMA AIR DOSE = 6.72E-06 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.49E-06	4.49E-06	4.49E-06	4.49E-06	4.49E-06	4.49E-06	4.53E-06	8.42E-06
GROUND	4.54E-04	4.54E-04	4.54E-04	4.54E-04	4.54E-04	4.54E-04	4.54E-04	5.34E-04
VEGET								
ADULT	1.00E-05	5.97E-05	1.48E-05	7.75E-06	2.30E-06	1.58E-04	4.62E-07	0.00E+00
TEEN	1.38E-05	6.39E-05	2.36E-05	1.21E-05	3.59E-06	2.13E-04	8.63E-07	0.00E+00
CHILD	2.51E-05	4.21E-05	5.55E-05	1.99E-05	5.83E-06	4.08E-04	1.31E-06	0.00E+00
MEAT								
ADULT	2.09E-06	1.57E-05	4.08E-07	1.28E-06	1.93E-07	4.25E-06	4.58E-08	0.00E+00
TEEN	1.58E-06	8.45E-06	3.30E-07	1.01E-06	1.52E-07	3.08E-06	4.29E-08	0.00E+00
CHILD	2.37E-06	4.27E-06	5.98E-07	1.23E-06	1.86E-07	4.65E-06	5.00E-08	0.00E+00
COW MILK								
ADULT	2.56E-06	3.86E-06	2.89E-06	3.62E-06	1.79E-06	1.18E-04	3.08E-07	0.00E+00
TEEN	3.01E-06	4.56E-06	5.17E-06	6.35E-06	3.13E-06	1.87E-04	6.37E-07	0.00E+00
CHILD	3.88E-06	3.04E-06	1.24E-05	1.08E-05	5.13E-06	3.70E-04	9.79E-07	0.00E+00
INFANT	5.47E-06	3.86E-06	2.05E-05	2.15E-05	8.33E-06	9.00E-04	1.77E-06	0.00E+00
GOATMILK								
ADULT	5.69E-06	8.54E-07	7.40E-06	8.66E-06	3.55E-06	1.42E-04	9.21E-07	0.00E+00
TEEN	5.60E-06	1.07E-06	1.33E-05	1.53E-05	6.28E-06	2.25E-04	1.90E-06	0.00E+00
CHILD	4.81E-06	7.75E-07	3.21E-05	2.65E-05	1.04E-05	4.45E-04	2.93E-06	0.00E+00
INFANT	5.48E-06	8.69E-07	5.25E-05	5.23E-05	1.70E-05	1.08E-03	5.29E-06	0.00E+00
INHAL								
ADULT	8.44E-08	9.51E-07	4.42E-08	9.12E-08	2.66E-08	1.53E-06	1.96E-05	0.00E+00
TEEN	9.29E-08	8.86E-07	6.16E-08	1.23E-07	3.63E-08	1.90E-06	2.86E-05	0.00E+00
CHILD	8.84E-08	4.76E-07	8.30E-08	1.14E-07	3.38E-08	2.15E-06	2.32E-05	0.00E+00
INFANT	4.51E-08	2.41E-07	5.14E-08	8.03E-08	2.12E-08	1.97E-06	1.48E-05	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 8.42E-07 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.51E-06 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.01E-06	1.01E-06	1.01E-06	1.01E-06	1.01E-06	1.01E-06	1.02E-06	1.90E-06
GROUND	3.49E-04	3.49E-04	3.49E-04	3.49E-04	3.49E-04	3.49E-04	3.49E-04	4.11E-04
VEGET								
ADULT	7.43E-06	4.50E-05	6.59E-06	5.68E-06	1.42E-06	6.59E-05	3.48E-07	0.00E+00
TEEN	1.02E-05	4.80E-05	1.05E-05	8.90E-06	2.24E-06	8.89E-05	6.51E-07	0.00E+00
CHILD	1.84E-05	3.15E-05	2.49E-05	1.46E-05	3.65E-06	1.70E-04	9.90E-07	0.00E+00
MEAT								
ADULT	1.58E-06	1.20E-05	2.44E-07	9.32E-07	1.16E-07	1.78E-06	3.14E-08	0.00E+00
TEEN	1.20E-06	6.45E-06	2.00E-07	7.31E-07	9.19E-08	1.29E-06	2.95E-08	0.00E+00
CHILD	1.79E-06	3.26E-06	3.64E-07	8.96E-07	1.14E-07	1.94E-06	3.45E-08	0.00E+00
COW MILK								
ADULT	1.83E-06	2.80E-06	1.87E-06	2.51E-06	1.06E-06	4.94E-05	2.36E-07	0.00E+00
TEEN	2.07E-06	3.30E-06	3.37E-06	4.41E-06	1.86E-06	7.81E-05	4.89E-07	0.00E+00
CHILD	2.51E-06	2.20E-06	8.08E-06	7.56E-06	3.06E-06	1.54E-04	7.51E-07	0.00E+00
INFANT	3.44E-06	2.36E-06	1.32E-05	1.49E-05	4.97E-06	3.75E-04	1.36E-06	0.00E+00
GOATMILK								
ADULT	4.27E-06	5.45E-07	5.13E-06	6.49E-06	2.45E-06	5.92E-05	7.08E-07	0.00E+00
TEEN	4.12E-06	6.73E-07	9.27E-06	1.14E-05	4.34E-06	9.37E-05	1.46E-06	0.00E+00
CHILD	3.35E-06	4.79E-07	2.23E-05	1.98E-05	7.20E-06	1.85E-04	2.25E-06	0.00E+00
INFANT	3.58E-06	4.96E-07	3.61E-05	3.90E-05	1.17E-05	4.50E-04	4.07E-06	0.00E+00
INHAL								
ADULT	8.30E-08	9.36E-07	3.98E-08	8.86E-08	2.29E-08	1.07E-06	1.95E-05	0.00E+00
TEEN	9.11E-08	8.57E-07	5.57E-08	1.19E-07	3.13E-08	1.32E-06	2.85E-05	0.00E+00
CHILD	8.64E-08	3.52E-07	7.53E-08	1.11E-07	2.91E-08	1.48E-06	2.31E-05	0.00E+00
INFANT	4.38E-08	1.36E-07	4.64E-08	7.73E-08	1.81E-08	1.35E-06	1.47E-05	0.00E+00

C15

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.03E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.85E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.25E-05	2.32E-05
GROUND	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.87E-04
VEGET								
ADULT	3.83E-06	2.20E-05	1.12E-05	3.07E-06	1.24E-06	1.25E-04	1.71E-07	0.00E+00
TEEN	5.34E-06	2.37E-05	1.78E-05	4.78E-06	1.91E-06	1.69E-04	3.18E-07	0.00E+00
CHILD	9.84E-06	1.57E-05	4.18E-05	7.82E-06	3.08E-06	3.23E-04	4.82E-07	0.00E+00
MEAT								
ADULT	7.65E-07	5.59E-06	2.30E-07	5.19E-07	1.08E-07	3.37E-06	2.09E-08	0.00E+00
TEEN	5.79E-07	3.01E-06	1.84E-07	4.06E-07	8.39E-08	2.44E-06	1.93E-08	0.00E+00
CHILD	8.69E-07	1.52E-06	3.29E-07	4.95E-07	1.01E-07	3.68E-06	2.24E-08	0.00E+00
COW MILK								
ADULT	1.08E-06	1.56E-06	1.45E-06	1.61E-06	1.02E-06	9.37E-05	1.09E-07	0.00E+00
TEEN	1.36E-06	1.85E-06	2.58E-06	2.81E-06	1.78E-06	1.48E-04	2.24E-07	0.00E+00
CHILD	1.95E-06	1.24E-06	6.12E-06	4.74E-06	2.90E-06	2.93E-04	3.44E-07	0.00E+00
INFANT	2.87E-06	2.11E-06	1.04E-05	9.55E-06	4.72E-06	7.13E-04	6.24E-07	0.00E+00
GOATMILK								
ADULT	2.13E-06	4.38E-07	3.30E-06	3.25E-06	1.59E-06	1.12E-04	3.22E-07	0.00E+00
TEEN	2.18E-06	5.60E-07	5.92E-06	5.73E-06	2.81E-06	1.78E-04	6.66E-07	0.00E+00
CHILD	2.12E-06	4.18E-07	1.42E-05	9.92E-06	4.67E-06	3.52E-04	1.02E-06	0.00E+00
INFANT	2.72E-06	5.20E-07	2.37E-05	1.99E-05	7.72E-06	8.56E-04	1.85E-06	0.00E+00
INHAL								
ADULT	2.45E-08	2.75E-07	2.48E-08	3.01E-08	1.83E-08	1.87E-06	4.89E-06	0.00E+00
TEEN	2.77E-08	3.04E-07	3.39E-08	4.06E-08	2.51E-08	2.35E-06	7.17E-06	0.00E+00
CHILD	2.72E-08	5.22E-07	4.51E-08	3.81E-08	2.33E-08	2.72E-06	5.82E-06	0.00E+00
INFANT	1.49E-08	4.05E-07	2.87E-08	2.87E-08	1.50E-08	2.48E-06	3.75E-06	0.00E+00

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 7.55E-07 MILLRADS
ANNUAL GAMMA AIR DOSE = 8.74E-07 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.82E-07	5.82E-07	5.82E-07	5.82E-07	5.82E-07	5.82E-07	5.90E-07	1.25E-06
GROUND	7.70E-06	7.70E-06	7.70E-06	7.70E-06	7.70E-06	7.70E-06	7.70E-06	9.06E-06
VEGET								
ADULT	2.05E-07	1.14E-06	8.79E-07	1.68E-07	8.30E-08	9.73E-06	8.80E-09	0.00E+00
TEEN	2.87E-07	1.23E-06	1.39E-06	2.62E-07	1.27E-07	1.31E-05	1.63E-08	0.00E+00
CHILD	5.37E-07	8.22E-07	3.26E-06	4.27E-07	2.04E-07	2.51E-05	2.47E-08	0.00E+00
MEAT								
ADULT	3.90E-08	2.78E-07	1.60E-08	2.91E-08	7.51E-09	2.62E-07	1.28E-09	0.00E+00
TEEN	2.96E-08	1.50E-07	1.27E-08	2.27E-08	5.77E-09	1.90E-07	1.18E-09	0.00E+00
CHILD	4.44E-08	7.57E-08	2.26E-08	2.76E-08	6.90E-09	2.87E-07	1.36E-09	0.00E+00
COW MILK								
ADULT	6.21E-08	8.72E-08	9.45E-08	9.68E-08	7.07E-08	7.29E-06	5.32E-09	0.00E+00
TEEN	8.26E-08	1.04E-07	1.67E-07	1.69E-07	1.23E-07	1.15E-05	1.10E-08	0.00E+00
CHILD	1.27E-07	7.03E-08	3.95E-07	2.82E-07	1.99E-07	2.28E-05	1.69E-08	0.00E+00
INFANT	1.90E-07	1.44E-07	6.81E-07	5.72E-07	3.25E-07	5.54E-05	3.06E-08	0.00E+00
GOATMILK								
ADULT	1.11E-07	2.88E-08	1.99E-07	1.69E-07	9.54E-08	8.74E-06	1.57E-08	0.00E+00
TEEN	1.18E-07	3.72E-08	3.56E-07	2.99E-07	1.69E-07	1.38E-05	3.24E-08	0.00E+00
CHILD	1.26E-07	2.81E-08	8.53E-07	5.17E-07	2.80E-07	2.74E-05	4.99E-08	0.00E+00
INFANT	1.74E-07	3.69E-08	1.45E-06	1.05E-06	4.67E-07	6.65E-05	9.02E-08	0.00E+00
INHAL								
ADULT	4.27E-09	4.21E-08	9.25E-09	6.37E-09	6.76E-09	8.96E-07	5.75E-07	0.00E+00
TEEN	5.11E-09	4.43E-08	1.24E-08	8.65E-09	9.25E-09	1.12E-06	8.45E-07	0.00E+00
CHILD	5.26E-09	3.01E-08	1.64E-08	8.22E-09	8.62E-09	1.29E-06	6.88E-07	0.00E+00
INFANT	3.17E-09	1.64E-08	1.05E-08	6.73E-09	5.59E-09	1.18E-06	4.50E-07	0.00E+00

C17

TABLE 2. DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.03E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.85E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.25E-05	2.32E-05
GROUND	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.59E-04	1.87E-04
VEGET								
ADULT	3.83E-06	2.20E-05	1.12E-05	3.07E-06	1.24E-06	1.25E-04	1.71E-07	0.00E+00
TEEN	5.34E-06	2.37E-05	1.78E-05	4.78E-06	1.91E-06	1.69E-04	3.18E-07	0.00E+00
CHILD	9.84E-06	1.57E-05	4.18E-05	7.82E-06	3.08E-06	3.23E-04	4.82E-07	0.00E+00
MEAT								
ADULT	7.65E-07	5.59E-06	2.30E-07	5.19E-07	1.08E-07	3.37E-06	2.09E-08	0.00E+00
TEEN	5.79E-07	3.01E-06	1.84E-07	4.06E-07	8.39E-08	2.44E-06	1.93E-08	0.00E+00
CHILD	8.69E-07	1.52E-06	3.29E-07	4.95E-07	1.01E-07	3.68E-06	2.24E-08	0.00E+00
COW MILK								
ADULT	1.08E-06	1.56E-06	1.45E-06	1.61E-06	1.02E-06	9.37E-05	1.09E-07	0.00E+00
TEEN	1.36E-06	1.85E-06	2.58E-06	2.81E-06	1.78E-06	1.48E-04	2.24E-07	0.00E+00
CHILD	1.95E-06	1.24E-06	6.12E-06	4.74E-06	2.90E-06	2.93E-04	3.44E-07	0.00E+00
INFANT	2.87E-06	2.11E-06	1.04E-05	9.55E-06	4.72E-06	7.13E-04	6.24E-07	0.00E+00
GOATMILK								
ADULT	2.13E-06	4.38E-07	3.30E-06	3.25E-06	1.59E-06	1.12E-04	3.22E-07	0.00E+00
TEEN	2.18E-06	5.60E-07	5.92E-06	5.73E-06	2.81E-06	1.78E-04	6.66E-07	0.00E+00
CHILD	2.12E-06	4.18E-07	1.42E-05	9.92E-06	4.67E-06	3.52E-04	1.02E-06	0.00E+00
INFANT	2.72E-06	5.20E-07	2.37E-05	1.99E-05	7.72E-06	8.56E-04	1.85E-06	0.00E+00
INHAL								
ADULT	2.45E-08	2.75E-07	2.48E-08	3.01E-08	1.83E-08	1.87E-06	4.89E-06	0.00E+00
TEEN	2.77E-08	3.04E-07	3.39E-08	4.06E-08	2.51E-08	2.35E-06	7.17E-06	0.00E+00
CHILD	2.72E-08	5.22E-07	4.51E-08	3.81E-08	2.33E-08	2.72E-06	5.82E-06	0.00E+00
INFANT	1.49E-08	4.05E-07	2.87E-08	2.87E-08	1.50E-08	2.48E-06	3.75E-06	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 4.90E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 7.56E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.06E-05	5.06E-05	5.06E-05	5.06E-05	5.06E-05	5.06E-05	5.11E-05	1.01E-04
GROUND	7.12E-04	7.12E-04	7.12E-04	7.12E-04	7.12E-04	7.12E-04	7.12E-04	8.38E-04
VEGET								
ADULT	1.45E-05	9.31E-05	1.94E-05	1.03E-05	3.36E-06	3.43E-04	4.98E-07	0.00E+00
TEEN	2.06E-05	9.95E-05	3.09E-05	1.61E-05	5.20E-06	4.61E-04	9.32E-07	0.00E+00
CHILD	3.85E-05	6.55E-05	7.29E-05	2.63E-05	8.43E-06	8.83E-04	1.42E-06	0.00E+00
MEAT								
ADULT	3.15E-06	2.45E-05	4.64E-07	1.75E-06	2.04E-07	9.17E-06	4.54E-08	0.00E+00
TEEN	2.41E-06	1.32E-05	3.78E-07	1.37E-06	1.63E-07	6.64E-06	4.27E-08	0.00E+00
CHILD	3.64E-06	6.67E-06	6.88E-07	1.67E-06	2.03E-07	1.00E-05	4.99E-08	0.00E+00
COW MILK								
ADULT	3.15E-06	5.86E-06	3.53E-06	4.29E-06	2.55E-06	2.59E-04	3.38E-07	0.00E+00
TEEN	3.87E-06	6.95E-06	6.34E-06	7.54E-06	4.50E-06	4.10E-04	6.98E-07	0.00E+00
CHILD	5.36E-06	4.66E-06	1.52E-05	1.29E-05	7.44E-06	8.14E-04	1.07E-06	0.00E+00
INFANT	8.08E-06	4.82E-06	2.59E-05	2.64E-05	1.24E-05	1.98E-03	1.94E-06	0.00E+00
GOATMILK								
ADULT	6.54E-06	1.31E-06	8.73E-06	9.99E-06	4.73E-06	3.11E-04	1.01E-06	0.00E+00
TEEN	6.63E-06	1.65E-06	1.57E-05	1.76E-05	8.39E-06	4.92E-04	2.09E-06	0.00E+00
CHILD	6.20E-06	1.21E-06	3.79E-05	3.06E-05	1.39E-05	9.77E-04	3.21E-06	0.00E+00
INFANT	7.77E-06	1.22E-06	6.29E-05	6.11E-05	2.30E-05	2.37E-03	5.81E-06	0.00E+00
INHAL								
ADULT	1.77E-07	1.99E-06	1.01E-07	2.17E-07	1.44E-07	1.51E-05	4.07E-05	0.00E+00
TEEN	2.09E-07	1.84E-06	1.41E-07	2.93E-07	1.99E-07	1.92E-05	5.94E-05	0.00E+00
CHILD	2.14E-07	8.76E-07	1.91E-07	2.75E-07	1.87E-07	2.29E-05	4.82E-05	0.00E+00
INFANT	1.18E-07	4.03E-07	1.32E-07	2.11E-07	1.22E-07	2.11E-05	3.07E-05	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 1.20E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.85E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.24E-05	1.25E-05	2.47E-05
GROUND	5.44E-04	5.44E-04	5.44E-04	5.44E-04	5.44E-04	5.44E-04	5.44E-04	6.40E-04
VEGET								
ADULT	1.07E-05	7.02E-05	9.07E-06	7.55E-06	2.14E-06	1.92E-04	3.68E-07	0.00E+00
TEEN	1.53E-05	7.49E-05	1.45E-05	1.18E-05	3.33E-06	2.58E-04	6.89E-07	0.00E+00
CHILD	2.84E-05	4.91E-05	3.42E-05	1.92E-05	5.41E-06	4.93E-04	1.05E-06	0.00E+00
MEAT								
ADULT	2.38E-06	1.87E-05	2.79E-07	1.30E-06	1.31E-07	5.12E-06	3.20E-08	0.00E+00
TEEN	1.82E-06	1.01E-05	2.29E-07	1.02E-06	1.05E-07	3.71E-06	3.01E-08	0.00E+00
CHILD	2.76E-06	5.08E-06	4.18E-07	1.24E-06	1.32E-07	5.60E-06	3.53E-08	0.00E+00
COW MILK								
ADULT	2.24E-06	4.34E-06	2.26E-06	2.98E-06	1.59E-06	1.45E-04	2.52E-07	0.00E+00
TEEN	2.70E-06	5.13E-06	4.08E-06	5.24E-06	2.82E-06	2.29E-04	5.20E-07	0.00E+00
CHILD	3.64E-06	3.43E-06	9.80E-06	9.00E-06	4.67E-06	4.55E-04	7.99E-07	0.00E+00
INFANT	5.40E-06	3.31E-06	1.65E-05	1.83E-05	7.77E-06	1.11E-03	1.45E-06	0.00E+00
GOATMILK								
ADULT	4.76E-06	8.62E-07	5.87E-06	7.26E-06	3.21E-06	1.74E-04	7.54E-07	0.00E+00
TEEN	4.75E-06	1.07E-06	1.06E-05	1.28E-05	5.69E-06	2.75E-04	1.56E-06	0.00E+00
CHILD	4.24E-06	7.74E-07	2.56E-05	2.22E-05	9.45E-06	5.46E-04	2.40E-06	0.00E+00
INFANT	5.08E-06	7.57E-07	4.20E-05	4.42E-05	1.56E-05	1.33E-03	4.33E-06	0.00E+00
INHAL								
ADULT	1.47E-07	1.67E-06	7.91E-08	1.77E-07	1.15E-07	1.22E-05	3.44E-05	0.00E+00
TEEN	1.73E-07	1.53E-06	1.11E-07	2.40E-07	1.59E-07	1.56E-05	5.02E-05	0.00E+00
CHILD	1.77E-07	6.20E-07	1.50E-07	2.25E-07	1.49E-07	1.86E-05	4.07E-05	0.00E+00
INFANT	9.71E-08	2.34E-07	1.04E-07	1.72E-07	9.70E-08	1.70E-05	2.60E-05	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.96E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 3.02E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.02E-04	2.02E-04	2.02E-04	2.02E-04	2.02E-04	2.02E-04	2.04E-04	4.05E-04
GROUND	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.67E-04
VEGET								
ADULT	5.48E-06	3.20E-05	2.07E-05	4.18E-06	2.13E-06	2.85E-04	1.90E-07	0.00E+00
TEEN	7.80E-06	3.45E-05	3.28E-05	6.48E-06	3.26E-06	3.83E-04	3.54E-07	0.00E+00
CHILD	1.47E-05	2.30E-05	7.71E-05	1.06E-05	5.26E-06	7.34E-04	5.37E-07	0.00E+00
MEAT								
ADULT	1.05E-06	7.93E-06	3.37E-07	6.54E-07	1.27E-07	7.62E-06	2.13E-08	0.00E+00
TEEN	8.03E-07	4.27E-06	2.71E-07	5.12E-07	1.00E-07	5.52E-06	1.98E-08	0.00E+00
CHILD	1.21E-06	2.16E-06	4.88E-07	6.24E-07	1.23E-07	8.33E-06	2.30E-08	0.00E+00
COW MILK								
ADULT	1.43E-06	2.21E-06	2.21E-06	2.11E-06	1.70E-06	2.15E-04	1.23E-07	0.00E+00
TEEN	1.88E-06	2.65E-06	3.94E-06	3.69E-06	2.99E-06	3.41E-04	2.55E-07	0.00E+00
CHILD	2.86E-06	1.81E-06	9.42E-06	6.29E-06	4.92E-06	6.77E-04	3.91E-07	0.00E+00
INFANT	4.51E-06	2.47E-06	1.65E-05	1.32E-05	8.26E-06	1.64E-03	7.09E-07	0.00E+00
GOATMILK								
ADULT	2.67E-06	7.58E-07	4.77E-06	4.11E-06	2.52E-06	2.58E-04	3.67E-07	0.00E+00
TEEN	2.91E-06	9.86E-07	8.55E-06	7.25E-06	4.47E-06	4.09E-04	7.59E-07	0.00E+00
CHILD	3.21E-06	7.54E-07	2.05E-05	1.26E-05	7.42E-06	8.12E-04	1.17E-06	0.00E+00
INFANT	4.60E-06	8.32E-07	3.51E-05	2.58E-05	1.25E-05	1.97E-03	2.11E-06	0.00E+00
INHAL								
ADULT	5.62E-08	4.98E-07	6.19E-08	8.54E-08	8.01E-08	7.22E-06	8.76E-06	0.00E+00
TEEN	6.94E-08	5.53E-07	8.53E-08	1.16E-07	1.10E-07	9.25E-06	1.28E-05	0.00E+00
CHILD	7.51E-08	9.76E-07	1.14E-07	1.11E-07	1.03E-07	1.11E-05	1.04E-05	0.00E+00
INFANT	4.61E-08	7.78E-07	7.97E-08	9.34E-08	6.75E-08	1.01E-05	6.71E-06	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 1.09E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.68E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.12E-04	1.12E-04	1.12E-04	1.12E-04	1.12E-04	1.12E-04	1.14E-04	2.25E-04
GROUND	1.09E-05	1.09E-05	1.09E-05	1.09E-05	1.09E-05	1.09E-05	1.09E-05	1.28E-05
VEGET								
ADULT	2.98E-07	1.63E-06	1.58E-06	2.36E-07	1.45E-07	2.07E-05	1.04E-08	0.00E+00
TEEN	4.24E-07	1.77E-06	2.50E-06	3.65E-07	2.22E-07	2.79E-05	1.93E-08	0.00E+00
CHILD	8.04E-07	1.19E-06	5.87E-06	5.99E-07	3.56E-07	5.34E-05	2.93E-08	0.00E+00
MEAT								
ADULT	5.26E-08	3.86E-07	2.38E-08	3.53E-08	8.62E-09	5.55E-07	1.30E-09	0.00E+00
TEEN	4.00E-08	2.08E-07	1.91E-08	2.77E-08	6.74E-09	4.02E-07	1.20E-09	0.00E+00
CHILD	6.03E-08	1.05E-07	3.43E-08	3.37E-08	8.22E-09	6.07E-07	1.39E-09	0.00E+00
COW MILK								
ADULT	8.55E-08	1.20E-07	1.50E-07	1.31E-07	1.17E-07	1.57E-05	6.56E-09	0.00E+00
TEEN	1.16E-07	1.45E-07	2.67E-07	2.29E-07	2.06E-07	2.48E-05	1.35E-08	0.00E+00
CHILD	1.83E-07	1.00E-07	6.36E-07	3.90E-07	3.39E-07	4.93E-05	2.08E-08	0.00E+00
INFANT	2.94E-07	1.56E-07	1.13E-06	8.26E-07	5.70E-07	1.20E-04	3.77E-08	0.00E+00
GOATMILK								
ADULT	1.52E-07	5.02E-08	3.09E-07	2.34E-07	1.61E-07	1.88E-05	1.95E-08	0.00E+00
TEEN	1.71E-07	6.60E-08	5.53E-07	4.14E-07	2.87E-07	2.98E-05	4.02E-08	0.00E+00
CHILD	2.04E-07	5.11E-08	1.33E-06	7.17E-07	4.76E-07	5.91E-05	6.18E-08	0.00E+00
INFANT	3.06E-07	5.78E-08	2.29E-06	1.49E-06	8.04E-07	1.44E-04	1.12E-07	0.00E+00
INHAL								
ADULT	1.49E-08	8.95E-08	2.58E-08	2.77E-08	3.18E-08	2.67E-06	1.00E-06	0.00E+00
TEEN	1.93E-08	1.36E-07	3.53E-08	3.80E-08	4.38E-08	3.42E-06	1.49E-06	0.00E+00
CHILD	2.20E-08	4.78E-07	4.71E-08	3.69E-08	4.09E-08	4.09E-06	1.21E-06	0.00E+00
INFANT	1.48E-08	4.11E-07	3.30E-08	3.29E-08	2.68E-08	3.75E-06	8.10E-07	0.00E+00

TABLE 3. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.96E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 3.02E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.02E-04	2.02E-04	2.02E-04	2.02E-04	2.02E-04	2.02E-04	2.04E-04	4.05E-04
GROUND	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.27E-04	2.67E-04
VEGET								
ADULT	5.48E-06	3.20E-05	2.07E-05	4.18E-06	2.13E-06	2.85E-04	1.90E-07	0.00E+00
TEEN	7.80E-06	3.45E-05	3.28E-05	6.48E-06	3.26E-06	3.83E-04	3.54E-07	0.00E+00
CHILD	1.47E-05	2.30E-05	7.71E-05	1.06E-05	5.26E-06	7.34E-04	5.37E-07	0.00E+00
MEAT								
ADULT	1.05E-06	7.93E-06	3.37E-07	6.54E-07	1.27E-07	7.62E-06	2.13E-08	0.00E+00
TEEN	8.03E-07	4.27E-06	2.71E-07	5.12E-07	1.00E-07	5.52E-06	1.98E-08	0.00E+00
CHILD	1.21E-06	2.16E-06	4.88E-07	6.24E-07	1.23E-07	8.33E-06	2.30E-08	0.00E+00
COW MILK								
ADULT	1.43E-06	2.21E-06	2.21E-06	2.11E-06	1.70E-06	2.15E-04	1.23E-07	0.00E+00
TEEN	1.88E-06	2.65E-06	3.94E-06	3.69E-06	2.99E-06	3.41E-04	2.55E-07	0.00E+00
CHILD	2.86E-06	1.81E-06	9.42E-06	6.29E-06	4.92E-06	6.77E-04	3.91E-07	0.00E+00
INFANT	4.51E-06	2.47E-06	1.65E-05	1.32E-05	8.26E-06	1.64E-03	7.09E-07	0.00E+00
GOATMILK								
ADULT	2.67E-06	7.58E-07	4.77E-06	4.11E-06	2.52E-06	2.58E-04	3.67E-07	0.00E+00
TEEN	2.91E-06	9.86E-07	8.55E-06	7.25E-06	4.47E-06	4.09E-04	7.59E-07	0.00E+00
CHILD	3.21E-06	7.54E-07	2.05E-05	1.26E-05	7.42E-06	8.12E-04	1.17E-06	0.00E+00
INFANT	4.60E-06	8.32E-07	3.51E-05	2.58E-05	1.25E-05	1.97E-03	2.11E-06	0.00E+00
INHAL								
ADULT	5.62E-08	4.98E-07	6.19E-08	8.54E-08	8.01E-08	7.22E-06	8.76E-06	0.00E+00
TEEN	6.94E-08	5.53E-07	8.53E-08	1.16E-07	1.10E-07	9.25E-06	1.28E-05	0.00E+00
CHILD	7.51E-08	9.76E-07	1.14E-07	1.11E-07	1.03E-07	1.11E-05	1.04E-05	0.00E+00
INFANT	4.61E-08	7.78E-07	7.97E-08	9.34E-08	6.75E-08	1.01E-05	6.71E-06	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 1.31E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 2.21E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.48E-05	1.48E-05	1.48E-05	1.48E-05	1.48E-05	1.48E-05	1.49E-05	2.85E-05
GROUND	1.02E-03	1.02E-03	1.02E-03	1.02E-03	1.02E-03	1.02E-03	1.02E-03	1.20E-03
VEGET								
ADULT	2.60E-05	1.31E-04	1.88E-05	2.36E-05	6.72E-06	2.36E-04	1.78E-06	0.00E+00
TEEN	3.33E-05	1.39E-04	3.07E-05	3.73E-05	1.06E-05	3.17E-04	3.34E-06	0.00E+00
CHILD	5.57E-05	9.13E-05	7.32E-05	6.19E-05	1.74E-05	6.06E-04	5.08E-06	0.00E+00
MEAT								
ADULT	4.91E-06	3.46E-05	1.04E-06	3.17E-06	4.83E-07	6.29E-06	1.47E-07	0.00E+00
TEEN	3.59E-06	1.86E-05	8.58E-07	2.50E-06	3.91E-07	4.56E-06	1.39E-07	0.00E+00
CHILD	5.22E-06	9.39E-06	1.58E-06	3.11E-06	4.94E-07	6.88E-06	1.63E-07	0.00E+00
COW MILK								
ADULT	8.37E-06	8.02E-06	8.69E-06	1.19E-05	4.71E-06	1.79E-04	1.23E-06	0.00E+00
TEEN	8.81E-06	9.49E-06	1.57E-05	2.10E-05	8.34E-06	2.83E-04	2.54E-06	0.00E+00
CHILD	9.15E-06	6.34E-06	3.79E-05	3.63E-05	1.38E-05	5.63E-04	3.90E-06	0.00E+00
INFANT	1.17E-05	5.85E-06	6.17E-05	7.17E-05	2.26E-05	1.37E-03	7.06E-06	0.00E+00
GOATMILK								
ADULT	2.19E-05	1.84E-06	2.50E-05	3.34E-05	1.23E-05	2.14E-04	3.69E-06	0.00E+00
TEEN	2.09E-05	2.30E-06	4.53E-05	5.89E-05	2.17E-05	3.40E-04	7.62E-06	0.00E+00
CHILD	1.64E-05	1.66E-06	1.09E-04	1.02E-04	3.60E-05	6.75E-04	1.17E-05	0.00E+00
INFANT	1.68E-05	1.59E-06	1.76E-04	2.00E-04	5.83E-05	1.64E-03	2.12E-05	0.00E+00
INHAL								
ADULT	3.98E-07	3.07E-06	2.89E-07	5.28E-07	2.93E-07	2.15E-05	6.29E-05	0.00E+00
TEEN	4.18E-07	2.85E-06	4.05E-07	7.16E-07	4.03E-07	2.76E-05	9.19E-05	0.00E+00
CHILD	3.78E-07	1.41E-06	5.48E-07	6.81E-07	3.77E-07	3.32E-05	7.44E-05	0.00E+00
INFANT	2.04E-07	6.94E-07	3.59E-07	5.18E-07	2.42E-07	3.05E-05	4.75E-05	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
AT .60 MILES NNEANNUAL BETA AIR DOSE = 3.18E-06 MILLRADS
ANNUAL GAMMA AIR DOSE = 5.36E-06 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.59E-06	3.59E-06	3.59E-06	3.59E-06	3.59E-06	3.59E-06	3.62E-06	6.90E-06
GROUND	5.49E-04	5.49E-04	5.49E-04	5.49E-04	5.49E-04	5.49E-04	5.49E-04	6.45E-04
VEGET								
ADULT	1.39E-05	6.97E-05	9.06E-06	1.26E-05	3.55E-06	1.18E-04	9.54E-07	0.00E+00
TEEN	1.78E-05	7.43E-05	1.48E-05	1.99E-05	5.63E-06	1.59E-04	1.79E-06	0.00E+00
CHILD	2.97E-05	4.87E-05	3.53E-05	3.31E-05	9.20E-06	3.04E-04	2.72E-06	0.00E+00
MEAT								
ADULT	2.63E-06	1.85E-05	5.43E-07	1.69E-06	2.56E-07	3.16E-06	7.85E-08	0.00E+00
TEEN	1.92E-06	9.96E-06	4.50E-07	1.34E-06	2.07E-07	2.29E-06	7.43E-08	0.00E+00
CHILD	2.79E-06	5.03E-06	8.28E-07	1.67E-06	2.62E-07	3.45E-06	8.72E-08	0.00E+00
COW MILK								
ADULT	4.47E-06	4.28E-06	4.59E-06	6.37E-06	2.49E-06	8.97E-05	6.59E-07	0.00E+00
TEEN	4.70E-06	5.06E-06	8.33E-06	1.12E-05	4.40E-06	1.42E-04	1.36E-06	0.00E+00
CHILD	4.85E-06	3.38E-06	2.01E-05	1.94E-05	7.30E-06	2.82E-04	2.09E-06	0.00E+00
INFANT	6.20E-06	3.08E-06	3.26E-05	3.83E-05	1.19E-05	6.86E-04	3.79E-06	0.00E+00
GOATMILK								
ADULT	1.17E-05	9.65E-07	1.33E-05	1.79E-05	6.53E-06	1.08E-04	1.98E-06	0.00E+00
TEEN	1.12E-05	1.20E-06	2.41E-05	3.15E-05	1.16E-05	1.70E-04	4.08E-06	0.00E+00
CHILD	8.72E-06	8.68E-07	5.80E-05	5.47E-05	1.92E-05	3.39E-04	6.28E-06	0.00E+00
INFANT	8.90E-06	8.23E-07	9.34E-05	1.07E-04	3.11E-05	8.23E-04	1.14E-05	0.00E+00
INHAL								
ADULT	3.30E-07	2.59E-06	2.35E-07	4.32E-07	2.34E-07	1.78E-05	5.34E-05	0.00E+00
TEEN	3.44E-07	2.38E-06	3.30E-07	5.86E-07	3.22E-07	2.29E-05	7.80E-05	0.00E+00
CHILD	3.07E-07	9.74E-07	4.47E-07	5.56E-07	3.01E-07	2.75E-05	6.32E-05	0.00E+00
INFANT	1.63E-07	3.79E-07	2.90E-07	4.19E-07	1.93E-07	2.53E-05	4.03E-05	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.85E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 2.14E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.42E-05	1.42E-05	1.42E-05	1.42E-05	1.42E-05	1.42E-05	1.44E-05	3.08E-05
GROUND	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.88E-04
VEGET								
ADULT	6.73E-06	3.39E-05	1.63E-05	6.01E-06	2.13E-06	1.48E-04	4.29E-07	0.00E+00
TEEN	8.78E-06	3.65E-05	2.64E-05	9.45E-06	3.33E-06	1.99E-04	8.04E-07	0.00E+00
CHILD	1.51E-05	2.43E-05	6.31E-05	1.57E-05	5.40E-06	3.81E-04	1.22E-06	0.00E+00
MEAT								
ADULT	1.20E-06	8.38E-06	3.92E-07	8.06E-07	1.49E-07	3.95E-06	3.79E-08	0.00E+00
TEEN	8.80E-07	4.52E-06	3.22E-07	6.36E-07	1.19E-07	2.86E-06	3.57E-08	0.00E+00
CHILD	1.28E-06	2.28E-06	5.90E-07	7.90E-07	1.48E-07	4.32E-06	4.19E-08	0.00E+00
COW MILK								
ADULT	2.18E-06	2.17E-06	2.79E-06	3.18E-06	1.58E-06	1.12E-04	2.92E-07	0.00E+00
TEEN	2.42E-06	2.60E-06	5.04E-06	5.59E-06	2.78E-06	1.78E-04	6.04E-07	0.00E+00
CHILD	2.82E-06	1.76E-06	1.21E-05	9.61E-06	4.60E-06	3.53E-04	9.29E-07	0.00E+00
INFANT	3.89E-06	2.04E-06	2.04E-05	1.92E-05	7.57E-06	8.57E-04	1.68E-06	0.00E+00
GOATMILK								
ADULT	5.39E-06	6.87E-07	7.23E-06	8.21E-06	3.37E-06	1.35E-04	8.76E-07	0.00E+00
TEEN	5.28E-06	8.85E-07	1.31E-05	1.45E-05	5.97E-06	2.13E-04	1.81E-06	0.00E+00
CHILD	4.50E-06	6.68E-07	3.15E-05	2.51E-05	9.92E-06	4.23E-04	2.78E-06	0.00E+00
INFANT	5.13E-06	6.98E-07	5.22E-05	4.97E-05	1.62E-05	1.03E-03	5.03E-06	0.00E+00
INHAL								
ADULT	7.37E-08	6.69E-07	7.02E-08	1.02E-07	6.82E-08	5.82E-06	1.12E-05	0.00E+00
TEEN	7.83E-08	6.93E-07	9.79E-08	1.38E-07	9.38E-08	7.48E-06	1.65E-05	0.00E+00
CHILD	7.19E-08	6.77E-07	1.32E-07	1.31E-07	8.75E-08	9.00E-06	1.34E-05	0.00E+00
INFANT	3.95E-08	4.53E-07	8.73E-08	1.01E-07	5.65E-08	8.26E-06	8.59E-06	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 9.60E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.62E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.08E-04	1.08E-04	1.08E-04	1.08E-04	1.08E-04	1.08E-04	1.09E-04	2.08E-04
GROUND	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.38E-05
VEGET								
ADULT	3.52E-07	1.77E-06	1.63E-06	3.06E-07	1.38E-07	1.37E-05	2.02E-08	0.00E+00
TEEN	4.69E-07	1.93E-06	2.63E-06	4.80E-07	2.14E-07	1.85E-05	3.78E-08	0.00E+00
CHILD	8.39E-07	1.31E-06	6.28E-06	7.95E-07	3.45E-07	3.54E-05	5.75E-08	0.00E+00
MEAT								
ADULT	5.79E-08	3.99E-07	2.88E-08	4.11E-08	9.37E-09	3.67E-07	1.97E-09	0.00E+00
TEEN	4.26E-08	2.15E-07	2.35E-08	3.24E-08	7.40E-09	2.66E-07	1.85E-09	0.00E+00
CHILD	6.23E-08	1.09E-07	4.31E-08	4.01E-08	9.12E-09	4.01E-07	2.16E-09	0.00E+00
COW MILK								
ADULT	1.15E-07	1.20E-07	1.82E-07	1.72E-07	1.07E-07	1.04E-05	1.35E-08	0.00E+00
TEEN	1.36E-07	1.45E-07	3.28E-07	3.02E-07	1.89E-07	1.65E-05	2.79E-08	0.00E+00
CHILD	1.78E-07	1.01E-07	7.90E-07	5.17E-07	3.11E-07	3.28E-05	4.29E-08	0.00E+00
INFANT	2.61E-07	1.42E-07	1.37E-06	1.05E-06	5.16E-07	7.98E-05	7.76E-08	0.00E+00
GOATMILK								
ADULT	2.62E-07	5.05E-08	4.28E-07	3.99E-07	1.91E-07	1.25E-05	4.03E-08	0.00E+00
TEEN	2.67E-07	6.64E-08	7.74E-07	7.05E-07	3.38E-07	1.98E-05	8.34E-08	0.00E+00
CHILD	2.53E-07	5.14E-08	1.87E-06	1.22E-06	5.61E-07	3.94E-05	1.28E-07	0.00E+00
INFANT	3.22E-07	5.64E-08	3.17E-06	2.44E-06	9.27E-07	9.58E-05	2.32E-07	0.00E+00
INHAL								
ADULT	9.99E-08	2.24E-07	1.16E-07	1.91E-07	1.58E-07	2.45E-06	1.13E-06	0.00E+00
TEEN	1.36E-07	5.05E-07	1.62E-07	2.63E-07	2.18E-07	3.16E-06	1.72E-06	0.00E+00
CHILD	1.66E-07	2.75E-06	2.20E-07	2.57E-07	2.04E-07	3.83E-06	1.43E-06	0.00E+00
INFANT	1.18E-07	2.54E-06	1.71E-07	2.38E-07	1.34E-07	3.50E-06	1.07E-06	0.00E+00

TABLE 4. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 1.85E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 2.14E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.42E-05	1.42E-05	1.42E-05	1.42E-05	1.42E-05	1.42E-05	1.44E-05	3.08E-05
GROUND	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.45E-04	2.88E-04
VEGET								
ADULT	6.73E-06	3.39E-05	1.63E-05	6.01E-06	2.13E-06	1.48E-04	4.29E-07	0.00E+00
TEEN	8.78E-06	3.65E-05	2.64E-05	9.45E-06	3.33E-06	1.99E-04	8.04E-07	0.00E+00
CHILD	1.51E-05	2.43E-05	6.31E-05	1.57E-05	5.40E-06	3.81E-04	1.22E-06	0.00E+00
MEAT								
ADULT	1.20E-06	8.38E-06	3.92E-07	8.06E-07	1.49E-07	3.95E-06	3.79E-08	0.00E+00
TEEN	8.80E-07	4.52E-06	3.22E-07	6.36E-07	1.19E-07	2.86E-06	3.57E-08	0.00E+00
CHILD	1.28E-06	2.28E-06	5.90E-07	7.90E-07	1.48E-07	4.32E-06	4.19E-08	0.00E+00
COW MILK								
ADULT	2.18E-06	2.17E-06	2.79E-06	3.18E-06	1.58E-06	1.12E-04	2.92E-07	0.00E+00
TEEN	2.42E-06	2.60E-06	5.04E-06	5.59E-06	2.78E-06	1.78E-04	6.04E-07	0.00E+00
CHILD	2.82E-06	1.76E-06	1.21E-05	9.61E-06	4.60E-06	3.53E-04	9.29E-07	0.00E+00
INFANT	3.89E-06	2.04E-06	2.04E-05	1.92E-05	7.57E-06	8.57E-04	1.68E-06	0.00E+00
GOATMILK								
ADULT	5.39E-06	6.87E-07	7.23E-06	8.21E-06	3.37E-06	1.35E-04	8.76E-07	0.00E+00
TEEN	5.28E-06	8.85E-07	1.31E-05	1.45E-05	5.97E-06	2.13E-04	1.81E-06	0.00E+00
CHILD	4.50E-06	6.68E-07	3.15E-05	2.51E-05	9.92E-06	4.23E-04	2.78E-06	0.00E+00
INFANT	5.13E-06	6.98E-07	5.22E-05	4.97E-05	1.62E-05	1.03E-03	5.03E-06	0.00E+00
INHAL								
ADULT	7.37E-08	6.69E-07	7.02E-08	1.02E-07	6.82E-08	5.82E-06	1.12E-05	0.00E+00
TEEN	7.83E-08	6.93E-07	9.79E-08	1.38E-07	9.38E-08	7.48E-06	1.65E-05	0.00E+00
CHILD	7.19E-08	6.77E-07	1.32E-07	1.31E-07	8.75E-08	9.00E-06	1.34E-05	0.00E+00
INFANT	3.95E-08	4.53E-07	8.73E-08	1.01E-07	5.65E-08	8.26E-06	8.59E-06	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 1.93E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 3.10E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.08E-05	2.08E-05	2.08E-05	2.08E-05	2.08E-05	2.08E-05	2.10E-05	4.11E-05
GROUND	4.75E-03	4.75E-03	4.75E-03	4.75E-03	4.75E-03	4.75E-03	4.75E-03	5.59E-03
VEGET								
ADULT	8.93E-05	6.68E-04	6.21E-05	6.80E-05	1.96E-05	1.32E-03	2.37E-06	0.00E+00
TEEN	1.35E-04	7.11E-04	9.72E-05	1.05E-04	2.96E-05	1.78E-03	4.30E-06	0.00E+00
CHILD	2.65E-04	4.66E-04	2.26E-04	1.64E-04	4.57E-05	3.42E-03	6.41E-06	0.00E+00
MEAT								
ADULT	2.35E-05	1.77E-04	4.09E-06	1.81E-05	4.39E-06	3.57E-05	7.98E-07	0.00E+00
TEEN	1.84E-05	9.53E-05	3.11E-06	1.40E-05	3.26E-06	2.59E-05	7.19E-07	0.00E+00
CHILD	2.84E-05	4.82E-05	5.20E-06	1.67E-05	3.75E-06	3.90E-05	8.17E-07	0.00E+00
COW MILK								
ADULT	2.08E-05	5.37E-05	1.65E-05	3.47E-05	2.26E-05	9.86E-04	8.72E-07	0.00E+00
TEEN	3.23E-05	6.26E-05	2.78E-05	5.91E-05	3.75E-05	1.56E-03	1.79E-06	0.00E+00
CHILD	5.92E-05	4.10E-05	6.20E-05	9.32E-05	5.80E-05	3.08E-03	2.74E-06	0.00E+00
INFANT	8.35E-05	1.10E-04	9.93E-05	1.74E-04	8.54E-05	7.49E-03	5.03E-06	0.00E+00
GOATMILK								
ADULT	1.75E-05	8.20E-06	2.30E-05	2.73E-05	1.51E-05	1.18E-03	2.35E-06	0.00E+00
TEEN	1.94E-05	9.86E-06	4.11E-05	4.80E-05	2.64E-05	1.87E-03	4.86E-06	0.00E+00
CHILD	2.23E-05	6.78E-06	9.82E-05	8.21E-05	4.33E-05	3.70E-03	7.46E-06	0.00E+00
INFANT	3.01E-05	1.51E-05	1.64E-04	1.64E-04	7.09E-05	8.99E-03	1.35E-05	0.00E+00
INHAL								
ADULT	1.57E-06	2.08E-05	5.91E-07	2.02E-06	9.72E-07	1.13E-04	4.10E-04	0.00E+00
TEEN	2.00E-06	1.94E-05	8.08E-07	2.67E-06	1.31E-06	1.39E-04	5.99E-04	0.00E+00
CHILD	2.18E-06	1.19E-05	1.06E-06	2.40E-06	1.18E-06	1.55E-04	4.86E-04	0.00E+00
INFANT	1.18E-06	6.81E-06	7.28E-07	1.66E-06	7.24E-07	1.41E-04	3.11E-04	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
 AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 7.17E-06 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.15E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	7.73E-06	7.73E-06	7.73E-06	7.73E-06	7.73E-06	7.73E-06	7.80E-06	1.53E-05
GROUND	3.58E-03	3.58E-03	3.58E-03	3.58E-03	3.58E-03	3.58E-03	3.58E-03	4.21E-03
VEGET								
ADULT	6.72E-05	5.02E-04	4.14E-05	5.12E-05	1.48E-05	1.00E-03	1.78E-06	0.00E+00
TEEN	1.02E-04	5.35E-04	6.48E-05	7.88E-05	2.23E-05	1.35E-03	3.23E-06	0.00E+00
CHILD	1.99E-04	3.50E-04	1.50E-04	1.23E-04	3.45E-05	2.59E-03	4.82E-06	0.00E+00
MEAT								
ADULT	1.77E-05	1.33E-04	3.02E-06	1.36E-05	3.31E-06	2.70E-05	6.02E-07	0.00E+00
TEEN	1.39E-05	7.18E-05	2.29E-06	1.06E-05	2.46E-06	1.96E-05	5.43E-07	0.00E+00
CHILD	2.14E-05	3.63E-05	3.84E-06	1.26E-05	2.82E-06	2.96E-05	6.16E-07	0.00E+00
COW MILK								
ADULT	1.57E-05	4.04E-05	1.22E-05	2.61E-05	1.70E-05	7.47E-04	6.53E-07	0.00E+00
TEEN	2.43E-05	4.71E-05	2.05E-05	4.45E-05	2.83E-05	1.18E-03	1.34E-06	0.00E+00
CHILD	4.46E-05	3.09E-05	4.56E-05	7.02E-05	4.37E-05	2.33E-03	2.06E-06	0.00E+00
INFANT	6.29E-05	8.30E-05	7.30E-05	1.31E-04	6.44E-05	5.67E-03	3.77E-06	0.00E+00
GOATMILK								
ADULT	1.31E-05	6.12E-06	1.68E-05	2.05E-05	1.13E-05	8.96E-04	1.76E-06	0.00E+00
TEEN	1.45E-05	7.35E-06	3.00E-05	3.60E-05	1.99E-05	1.42E-03	3.64E-06	0.00E+00
CHILD	1.67E-05	5.04E-06	7.16E-05	6.16E-05	3.26E-05	2.80E-03	5.59E-06	0.00E+00
INFANT	2.26E-05	1.13E-05	1.19E-04	1.23E-04	5.34E-05	6.80E-03	1.01E-05	0.00E+00
INHAL								
ADULT	1.32E-06	1.79E-05	4.80E-07	1.69E-06	8.03E-07	9.69E-05	3.51E-04	0.00E+00
TEEN	1.68E-06	1.78E-05	6.56E-07	2.24E-06	1.08E-06	1.19E-04	5.13E-04	0.00E+00
CHILD	1.83E-06	2.14E-05	8.64E-07	2.01E-06	9.77E-07	1.32E-04	4.16E-04	0.00E+00
INFANT	9.84E-07	1.57E-05	5.88E-07	1.38E-06	5.95E-07	1.21E-04	2.67E-04	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 2.21E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 3.54E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.38E-04	2.38E-04	2.38E-04	2.38E-04	2.38E-04	2.38E-04	2.40E-04	4.70E-04
GROUND	8.39E-04	8.39E-04	8.39E-04	8.39E-04	8.39E-04	8.39E-04	8.39E-04	9.87E-04
VEGET								
ADULT	1.89E-05	1.32E-04	1.08E-04	1.31E-05	4.33E-06	3.44E-04	5.09E-07	0.00E+00
TEEN	2.84E-05	1.43E-04	1.69E-04	2.02E-05	6.55E-06	4.64E-04	9.30E-07	0.00E+00
CHILD	5.65E-05	9.58E-05	3.94E-04	3.18E-05	1.02E-05	8.88E-04	1.39E-06	0.00E+00
MEAT								
ADULT	4.17E-06	3.11E-05	1.82E-06	3.23E-06	8.07E-07	9.24E-06	1.47E-07	0.00E+00
TEEN	3.26E-06	1.68E-05	1.42E-06	2.52E-06	6.02E-07	6.69E-06	1.33E-07	0.00E+00
CHILD	5.01E-06	8.51E-06	2.49E-06	3.00E-06	6.95E-07	1.01E-05	1.51E-07	0.00E+00
COW MILK								
ADULT	4.28E-06	1.01E-05	7.91E-06	6.92E-06	4.63E-06	2.59E-04	2.18E-07	0.00E+00
TEEN	6.46E-06	1.20E-05	1.36E-05	1.18E-05	7.77E-06	4.11E-04	4.48E-07	0.00E+00
CHILD	1.16E-05	7.99E-06	3.17E-05	1.89E-05	1.21E-05	8.14E-04	6.87E-07	0.00E+00
INFANT	1.66E-05	2.01E-05	5.32E-05	3.61E-05	1.83E-05	1.98E-03	1.25E-06	0.00E+00
GOATMILK								
ADULT	4.62E-06	2.67E-06	1.47E-05	6.85E-06	3.80E-06	3.11E-04	6.07E-07	0.00E+00
TEEN	5.18E-06	3.42E-06	2.58E-05	1.20E-05	6.69E-06	4.93E-04	1.25E-06	0.00E+00
CHILD	6.25E-06	2.56E-06	6.13E-05	2.07E-05	1.10E-05	9.77E-04	1.93E-06	0.00E+00
INFANT	8.84E-06	4.02E-06	1.04E-04	4.16E-05	1.82E-05	2.37E-03	3.49E-06	0.00E+00
INHAL								
ADULT	6.17E-07	3.58E-06	6.69E-07	1.06E-06	7.70E-07	1.82E-05	5.22E-05	0.00E+00
TEEN	8.28E-07	5.08E-06	9.22E-07	1.45E-06	1.06E-06	2.27E-05	7.67E-05	0.00E+00
CHILD	9.90E-07	1.76E-05	1.24E-06	1.39E-06	9.88E-07	2.59E-05	6.24E-05	0.00E+00
INFANT	6.61E-07	1.56E-05	9.10E-07	1.22E-06	6.44E-07	2.37E-05	4.10E-05	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 1.24E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.99E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.34E-04	1.34E-04	1.34E-04	1.34E-04	1.34E-04	1.34E-04	1.35E-04	2.64E-04
GROUND	3.74E-05	3.74E-05	3.74E-05	3.74E-05	3.74E-05	3.74E-05	3.74E-05	4.40E-05
VEGET								
ADULT	9.25E-07	6.23E-06	7.37E-06	6.11E-07	2.15E-07	1.82E-05	2.51E-08	0.00E+00
TEEN	1.38E-06	6.80E-06	1.15E-05	9.43E-07	3.26E-07	2.45E-05	4.60E-08	0.00E+00
CHILD	2.78E-06	4.63E-06	2.69E-05	1.49E-06	5.11E-07	4.70E-05	6.90E-08	0.00E+00
MEAT								
ADULT	1.87E-07	1.38E-06	1.10E-07	1.45E-07	3.68E-08	4.89E-07	6.72E-09	0.00E+00
TEEN	1.45E-07	7.47E-07	8.63E-08	1.13E-07	2.75E-08	3.54E-07	6.08E-09	0.00E+00
CHILD	2.23E-07	3.79E-07	1.52E-07	1.35E-07	3.19E-08	5.34E-07	6.93E-09	0.00E+00
COW MILK								
ADULT	2.07E-07	4.68E-07	4.85E-07	3.29E-07	2.23E-07	1.38E-05	1.14E-08	0.00E+00
TEEN	3.08E-07	5.57E-07	8.40E-07	5.65E-07	3.76E-07	2.18E-05	2.35E-08	0.00E+00
CHILD	5.45E-07	3.76E-07	1.96E-06	9.09E-07	5.92E-07	4.33E-05	3.60E-08	0.00E+00
INFANT	7.89E-07	9.12E-07	3.32E-06	1.75E-06	9.03E-07	1.05E-04	6.56E-08	0.00E+00
GOATMILK								
ADULT	2.46E-07	1.52E-07	9.34E-07	3.59E-07	1.99E-07	1.65E-05	3.21E-08	0.00E+00
TEEN	2.77E-07	1.97E-07	1.64E-06	6.32E-07	3.52E-07	2.62E-05	6.64E-08	0.00E+00
CHILD	3.40E-07	1.50E-07	3.90E-06	1.09E-06	5.80E-07	5.20E-05	1.02E-07	0.00E+00
INFANT	4.87E-07	2.15E-07	6.62E-06	2.19E-06	9.59E-07	1.26E-04	1.85E-07	0.00E+00
INHAL								
ADULT	2.65E-07	9.28E-07	3.45E-07	4.90E-07	3.82E-07	4.42E-06	8.01E-06	0.00E+00
TEEN	3.61E-07	1.83E-06	4.75E-07	6.74E-07	5.27E-07	5.61E-06	1.19E-05	0.00E+00
CHILD	4.42E-07	9.18E-06	6.38E-07	6.58E-07	4.93E-07	6.62E-06	9.81E-06	0.00E+00
INFANT	3.10E-07	8.33E-06	4.73E-07	6.01E-07	3.24E-07	6.06E-06	6.84E-06	0.00E+00

TABLE 5. DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 2.21E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 3.54E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.38E-04	2.38E-04	2.38E-04	2.38E-04	2.38E-04	2.38E-04	2.40E-04	4.70E-04
GROUND	8.39E-04	8.39E-04	8.39E-04	8.39E-04	8.39E-04	8.39E-04	8.39E-04	9.87E-04
VEGET								
ADULT	1.89E-05	1.32E-04	1.08E-04	1.31E-05	4.33E-06	3.44E-04	5.09E-07	0.00E+00
TEEN	2.84E-05	1.43E-04	1.69E-04	2.02E-05	6.55E-06	4.64E-04	9.30E-07	0.00E+00
CHILD	5.65E-05	9.58E-05	3.94E-04	3.18E-05	1.02E-05	8.88E-04	1.39E-06	0.00E+00
MEAT								
ADULT	4.17E-06	3.11E-05	1.82E-06	3.23E-06	8.07E-07	9.24E-06	1.47E-07	0.00E+00
TEEN	3.26E-06	1.68E-05	1.42E-06	2.52E-06	6.02E-07	6.69E-06	1.33E-07	0.00E+00
CHILD	5.01E-06	8.51E-06	2.49E-06	3.00E-06	6.95E-07	1.01E-05	1.51E-07	0.00E+00
COW MILK								
ADULT	4.28E-06	1.01E-05	7.91E-06	6.92E-06	4.63E-06	2.59E-04	2.18E-07	0.00E+00
TEEN	6.46E-06	1.20E-05	1.36E-05	1.18E-05	7.77E-06	4.11E-04	4.48E-07	0.00E+00
CHILD	1.16E-05	7.99E-06	3.17E-05	1.89E-05	1.21E-05	8.14E-04	6.87E-07	0.00E+00
INFANT	1.66E-05	2.01E-05	5.32E-05	3.61E-05	1.83E-05	1.98E-03	1.25E-06	0.00E+00
GOATMILK								
ADULT	4.62E-06	2.67E-06	1.47E-05	6.85E-06	3.80E-06	3.11E-04	6.07E-07	0.00E+00
TEEN	5.18E-06	3.42E-06	2.58E-05	1.20E-05	6.69E-06	4.93E-04	1.25E-06	0.00E+00
CHILD	6.25E-06	2.56E-06	6.13E-05	2.07E-05	1.10E-05	9.77E-04	1.93E-06	0.00E+00
INFANT	8.84E-06	4.02E-06	1.04E-04	4.16E-05	1.82E-05	2.37E-03	3.49E-06	0.00E+00
INHAL								
ADULT	6.17E-07	3.58E-06	6.69E-07	1.06E-06	7.70E-07	1.82E-05	5.22E-05	0.00E+00
TEEN	8.28E-07	5.08E-06	9.22E-07	1.45E-06	1.06E-06	2.27E-05	7.67E-05	0.00E+00
CHILD	9.90E-07	1.76E-05	1.24E-06	1.39E-06	9.88E-07	2.59E-05	6.24E-05	0.00E+00
INFANT	6.61E-07	1.56E-05	9.10E-07	1.22E-06	6.44E-07	2.37E-05	4.10E-05	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 3.77E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 6.14E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	4.12E-05	4.12E-05	4.12E-05	4.12E-05	4.12E-05	4.12E-05	4.15E-05	8.07E-05
GROUND	6.18E-03	6.18E-03	6.18E-03	6.18E-03	6.18E-03	6.18E-03	6.18E-03	7.27E-03
VEGET								
ADULT	1.23E-04	8.58E-04	1.02E-04	9.70E-05	2.81E-05	1.70E-03	4.27E-06	0.00E+00
TEEN	1.80E-04	9.15E-04	1.61E-04	1.50E-04	4.28E-05	2.30E-03	7.86E-06	0.00E+00
CHILD	3.45E-04	6.00E-04	3.75E-04	2.38E-04	6.70E-05	4.40E-03	1.18E-05	0.00E+00
MEAT								
ADULT	3.04E-05	2.27E-04	5.65E-06	2.29E-05	5.29E-06	4.59E-05	1.02E-06	0.00E+00
TEEN	2.36E-05	1.22E-04	4.36E-06	1.78E-05	3.96E-06	3.33E-05	9.23E-07	0.00E+00
CHILD	3.61E-05	6.18E-05	7.46E-06	2.13E-05	4.59E-06	5.02E-05	1.05E-06	0.00E+00
COW MILK								
ADULT	3.08E-05	6.66E-05	2.71E-05	4.94E-05	2.94E-05	1.27E-03	2.11E-06	0.00E+00
TEEN	4.39E-05	7.79E-05	4.67E-05	8.48E-05	4.93E-05	2.02E-03	4.35E-06	0.00E+00
CHILD	7.39E-05	5.12E-05	1.07E-04	1.37E-04	7.72E-05	3.98E-03	6.67E-06	0.00E+00
INFANT	1.03E-04	1.27E-04	1.73E-04	2.60E-04	1.16E-04	9.68E-03	1.21E-05	0.00E+00
GOATMILK								
ADULT	3.98E-05	1.09E-05	5.03E-05	6.14E-05	2.82E-05	1.53E-03	6.03E-06	0.00E+00
TEEN	4.11E-05	1.33E-05	9.04E-05	1.08E-04	4.96E-05	2.42E-03	1.25E-05	0.00E+00
CHILD	4.01E-05	9.23E-06	2.17E-04	1.86E-04	8.18E-05	4.78E-03	1.92E-05	0.00E+00
INFANT	4.94E-05	1.83E-05	3.56E-04	3.69E-04	1.33E-04	1.16E-02	3.47E-05	0.00E+00
INHAL								
ADULT	1.91E-06	2.31E-05	8.86E-07	2.49E-06	1.26E-06	1.32E-04	4.54E-04	0.00E+00
TEEN	2.35E-06	2.29E-05	1.22E-06	3.32E-06	1.70E-06	1.63E-04	6.63E-04	0.00E+00
CHILD	2.48E-06	2.64E-05	1.63E-06	3.03E-06	1.56E-06	1.84E-04	5.37E-04	0.00E+00
INFANT	1.35E-06	1.93E-05	1.10E-06	2.16E-06	9.65E-07	1.68E-04	3.45E-04	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 1.07E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 1.75E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.17E-05	1.18E-05	2.30E-05
GROUND	3.90E-03	3.90E-03	3.90E-03	3.90E-03	3.90E-03	3.90E-03	3.90E-03	4.59E-03
VEGET								
ADULT	7.72E-05	5.40E-04	5.18E-05	6.11E-05	1.76E-05	1.05E-03	2.69E-06	0.00E+00
TEEN	1.13E-04	5.75E-04	8.18E-05	9.45E-05	2.68E-05	1.42E-03	4.94E-06	0.00E+00
CHILD	2.16E-04	3.77E-04	1.91E-04	1.50E-04	4.19E-05	2.73E-03	7.42E-06	0.00E+00
MEAT								
ADULT	1.92E-05	1.43E-04	3.42E-06	1.44E-05	3.34E-06	2.84E-05	6.41E-07	0.00E+00
TEEN	1.49E-05	7.71E-05	2.64E-06	1.12E-05	2.50E-06	2.06E-05	5.82E-07	0.00E+00
CHILD	2.28E-05	3.90E-05	4.51E-06	1.34E-05	2.89E-06	3.11E-05	6.64E-07	0.00E+00
COW MILK								
ADULT	1.93E-05	4.20E-05	1.64E-05	3.11E-05	1.84E-05	7.89E-04	1.32E-06	0.00E+00
TEEN	2.76E-05	4.90E-05	2.83E-05	5.33E-05	3.09E-05	1.25E-03	2.73E-06	0.00E+00
CHILD	4.65E-05	3.22E-05	6.47E-05	8.59E-05	4.84E-05	2.47E-03	4.18E-06	0.00E+00
INFANT	6.49E-05	8.00E-05	1.04E-04	1.63E-04	7.25E-05	5.99E-03	7.62E-06	0.00E+00
GOATMILK								
ADULT	2.49E-05	6.74E-06	3.04E-05	3.85E-05	1.76E-05	9.46E-04	3.79E-06	0.00E+00
TEEN	2.57E-05	8.15E-06	5.46E-05	6.77E-05	3.10E-05	1.50E-03	7.82E-06	0.00E+00
CHILD	2.50E-05	5.64E-06	1.31E-04	1.17E-04	5.11E-05	2.96E-03	1.20E-05	0.00E+00
INFANT	3.06E-05	1.14E-05	2.15E-04	2.31E-04	8.33E-05	7.19E-03	2.18E-05	0.00E+00
INHAL								
ADULT	1.60E-06	1.97E-05	7.06E-07	2.06E-06	1.01E-06	1.11E-04	3.89E-04	0.00E+00
TEEN	1.96E-06	1.94E-05	9.74E-07	2.74E-06	1.37E-06	1.37E-04	5.68E-04	0.00E+00
CHILD	2.06E-06	2.13E-05	1.30E-06	2.49E-06	1.25E-06	1.55E-04	4.60E-04	0.00E+00
INFANT	1.11E-06	1.53E-05	8.68E-07	1.75E-06	7.71E-07	1.41E-04	2.95E-04	0.00E+00

C35

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 3.39E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 5.52E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.70E-04	3.70E-04	3.70E-04	3.70E-04	3.70E-04	3.70E-04	3.74E-04	7.27E-04
GROUND	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.46E-03
VEGET								
ADULT	2.92E-05	1.92E-04	1.54E-04	2.12E-05	7.18E-06	5.61E-04	9.82E-07	0.00E+00
TEEN	4.27E-05	2.08E-04	2.42E-04	3.28E-05	1.10E-05	7.54E-04	1.81E-06	0.00E+00
CHILD	8.33E-05	1.40E-04	5.67E-04	5.24E-05	1.72E-05	1.45E-03	2.72E-06	0.00E+00
MEAT								
ADULT	6.17E-06	4.55E-05	2.66E-06	4.69E-06	1.13E-06	1.50E-05	2.15E-07	0.00E+00
TEEN	4.77E-06	2.45E-05	2.09E-06	3.65E-06	8.50E-07	1.09E-05	1.95E-07	0.00E+00
CHILD	7.27E-06	1.24E-05	3.68E-06	4.38E-06	9.90E-07	1.64E-05	2.23E-07	0.00E+00
COW MILK								
ADULT	7.13E-06	1.44E-05	1.24E-05	1.12E-05	7.10E-06	4.23E-04	5.07E-07	0.00E+00
TEEN	1.01E-05	1.71E-05	2.17E-05	1.94E-05	1.20E-05	6.70E-04	1.05E-06	0.00E+00
CHILD	1.68E-05	1.14E-05	5.07E-05	3.15E-05	1.90E-05	1.33E-03	1.60E-06	0.00E+00
INFANT	2.40E-05	2.68E-05	8.53E-05	6.08E-05	2.93E-05	3.23E-03	2.92E-06	0.00E+00
GOATMILK								
ADULT	1.01E-05	3.98E-06	2.48E-05	1.52E-05	7.52E-06	5.08E-04	1.46E-06	0.00E+00
TEEN	1.08E-05	5.10E-06	4.39E-05	2.68E-05	1.33E-05	8.04E-04	3.02E-06	0.00E+00
CHILD	1.15E-05	3.83E-06	1.05E-04	4.62E-05	2.19E-05	1.59E-03	4.64E-06	0.00E+00
INFANT	1.54E-05	5.68E-06	1.76E-04	9.22E-05	3.61E-05	3.87E-03	8.40E-06	0.00E+00
INHAL								
ADULT	8.47E-07	4.73E-06	9.03E-07	1.45E-06	1.06E-06	2.61E-05	6.95E-05	0.00E+00
TEEN	1.12E-06	6.82E-06	1.25E-06	1.98E-06	1.45E-06	3.28E-05	1.02E-04	0.00E+00
CHILD	1.33E-06	2.44E-05	1.68E-06	1.91E-06	1.36E-06	3.78E-05	8.31E-05	0.00E+00
INFANT	8.85E-07	2.16E-05	1.24E-06	1.68E-06	8.86E-07	3.46E-05	5.46E-05	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 2.64E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 4.30E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.88E-04	2.88E-04	2.88E-04	2.88E-04	2.88E-04	2.88E-04	2.91E-04	5.65E-04
GROUND	5.85E-05	5.85E-05	5.85E-05	5.85E-05	5.85E-05	5.85E-05	5.85E-05	6.88E-05
VEGET								
ADULT	1.61E-06	1.01E-05	1.44E-05	1.08E-06	4.19E-07	3.78E-05	5.27E-08	0.00E+00
TEEN	2.35E-06	1.11E-05	2.25E-05	1.68E-06	6.38E-07	5.08E-05	9.72E-08	0.00E+00
CHILD	4.66E-06	7.60E-06	5.27E-05	2.70E-06	1.01E-06	9.74E-05	1.47E-07	0.00E+00
MEAT								
ADULT	2.93E-07	2.14E-06	2.06E-07	2.25E-07	5.66E-08	1.01E-06	1.06E-08	0.00E+00
TEEN	2.26E-07	1.15E-06	1.63E-07	1.75E-07	4.27E-08	7.32E-07	9.68E-09	0.00E+00
CHILD	3.43E-07	5.86E-07	2.89E-07	2.11E-07	5.01E-08	1.10E-06	1.11E-08	0.00E+00
COW MILK								
ADULT	3.85E-07	7.32E-07	9.57E-07	5.97E-07	3.97E-07	2.87E-05	2.82E-08	0.00E+00
TEEN	5.38E-07	8.77E-07	1.67E-06	1.03E-06	6.77E-07	4.54E-05	5.83E-08	0.00E+00
CHILD	8.92E-07	5.99E-07	3.93E-06	1.69E-06	1.08E-06	9.02E-05	8.94E-08	0.00E+00
INFANT	1.30E-06	1.33E-06	6.69E-06	3.31E-06	1.69E-06	2.19E-04	1.63E-07	0.00E+00
GOATMILK								
ADULT	5.89E-07	2.81E-07	1.94E-06	8.65E-07	4.51E-07	3.44E-05	8.19E-08	0.00E+00
TEEN	6.40E-07	3.69E-07	3.43E-06	1.52E-06	7.98E-07	5.45E-05	1.69E-07	0.00E+00
CHILD	7.27E-07	2.84E-07	8.16E-06	2.63E-06	1.32E-06	1.08E-04	2.60E-07	0.00E+00
INFANT	1.01E-06	3.73E-07	1.38E-05	5.29E-06	2.18E-06	2.63E-04	4.71E-07	0.00E+00
INHAL								
ADULT	4.72E-07	1.37E-06	6.22E-07	8.89E-07	7.07E-07	7.30E-06	8.33E-06	0.00E+00
TEEN	6.45E-07	3.02E-06	8.60E-07	1.22E-06	9.74E-07	9.39E-06	1.26E-05	0.00E+00
CHILD	7.93E-07	1.64E-05	1.16E-06	1.20E-06	9.13E-07	1.13E-05	1.05E-05	0.00E+00
INFANT	5.61E-07	1.49E-05	8.63E-07	1.10E-06	6.01E-07	1.03E-05	7.69E-06	0.00E+00

TABLE 6. DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 3.39E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 5.52E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.70E-04	3.70E-04	3.70E-04	3.70E-04	3.70E-04	3.70E-04	3.74E-04	7.27E-04
GROUND	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.24E-03	1.46E-03
VEGET								
ADULT	2.92E-05	1.92E-04	1.54E-04	2.12E-05	7.18E-06	5.61E-04	9.82E-07	0.00E+00
TEEN	4.27E-05	2.08E-04	2.42E-04	3.28E-05	1.10E-05	7.54E-04	1.81E-06	0.00E+00
CHILD	8.33E-05	1.40E-04	5.67E-04	5.24E-05	1.72E-05	1.45E-03	2.72E-06	0.00E+00
MEAT								
ADULT	6.17E-06	4.55E-05	2.66E-06	4.69E-06	1.13E-06	1.50E-05	2.15E-07	0.00E+00
TEEN	4.77E-06	2.45E-05	2.09E-06	3.65E-06	8.50E-07	1.09E-05	1.95E-07	0.00E+00
CHILD	7.27E-06	1.24E-05	3.68E-06	4.38E-06	9.90E-07	1.64E-05	2.23E-07	0.00E+00
COW MILK								
ADULT	7.13E-06	1.44E-05	1.24E-05	1.12E-05	7.10E-06	4.23E-04	5.07E-07	0.00E+00
TEEN	1.01E-05	1.71E-05	2.17E-05	1.94E-05	1.20E-05	6.70E-04	1.05E-06	0.00E+00
CHILD	1.68E-05	1.14E-05	5.07E-05	3.15E-05	1.90E-05	1.33E-03	1.60E-06	0.00E+00
INFANT	2.40E-05	2.68E-05	8.53E-05	6.08E-05	2.93E-05	3.23E-03	2.92E-06	0.00E+00
GOATMILK								
ADULT	1.01E-05	3.98E-06	2.48E-05	1.52E-05	7.52E-06	5.08E-04	1.46E-06	0.00E+00
TEEN	1.08E-05	5.10E-06	4.39E-05	2.68E-05	1.33E-05	8.04E-04	3.02E-06	0.00E+00
CHILD	1.15E-05	3.83E-06	1.05E-04	4.62E-05	2.19E-05	1.59E-03	4.64E-06	0.00E+00
INFANT	1.54E-05	5.68E-06	1.76E-04	9.22E-05	3.61E-05	3.87E-03	8.40E-06	0.00E+00
INHAL								
ADULT	8.47E-07	4.73E-06	9.03E-07	1.45E-06	1.06E-06	2.61E-05	6.95E-05	0.00E+00
TEEN	1.12E-06	6.82E-06	1.25E-06	1.98E-06	1.45E-06	3.28E-05	1.02E-04	0.00E+00
CHILD	1.33E-06	2.44E-05	1.68E-06	1.91E-06	1.36E-06	3.78E-05	8.31E-05	0.00E+00
INFANT	8.85E-07	2.16E-05	1.24E-06	1.68E-06	8.86E-07	3.46E-05	5.46E-05	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018

SPECIAL LOCATION NO. 1A Site Boundary
 AT .67 MILES N

ANNUAL BETA AIR DOSE = 9.52E-05 MILLRADS
 ANNUAL GAMMA AIR DOSE = 1.52E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	1.02E-04	1.02E-04	1.02E-04	1.02E-04	1.02E-04	1.02E-04	1.03E-04	2.01E-04
GROUND	6.22E-03	6.22E-03	6.22E-03	6.22E-03	6.22E-03	6.22E-03	6.22E-03	7.32E-03
VEGET								
ADULT	1.25E-04	8.62E-04	1.50E-04	9.67E-05	2.83E-05	1.87E-03	4.33E-06	0.00E+00
TEEN	1.83E-04	9.20E-04	2.36E-04	1.50E-04	4.33E-05	2.52E-03	7.97E-06	0.00E+00
CHILD	3.49E-04	6.04E-04	5.51E-04	2.38E-04	6.81E-05	4.83E-03	1.20E-05	0.00E+00
MEAT								
ADULT	3.01E-05	2.26E-04	5.88E-06	2.19E-05	4.83E-06	5.03E-05	9.38E-07	0.00E+00
TEEN	2.34E-05	1.22E-04	4.57E-06	1.71E-05	3.63E-06	3.64E-05	8.53E-07	0.00E+00
CHILD	3.57E-05	6.16E-05	7.90E-06	2.05E-05	4.23E-06	5.50E-05	9.75E-07	0.00E+00
COW MILK								
ADULT	3.06E-05	6.51E-05	2.95E-05	4.81E-05	2.85E-05	1.40E-03	2.25E-06	0.00E+00
TEEN	4.28E-05	7.62E-05	5.12E-05	8.27E-05	4.81E-05	2.22E-03	4.64E-06	0.00E+00
CHILD	7.07E-05	5.03E-05	1.18E-04	1.34E-04	7.57E-05	4.39E-03	7.12E-06	0.00E+00
INFANT	9.95E-05	1.16E-04	1.93E-04	2.57E-04	1.15E-04	1.07E-02	1.29E-05	0.00E+00
GOATMILK								
ADULT	4.27E-05	1.15E-05	5.79E-05	6.56E-05	3.02E-05	1.68E-03	6.49E-06	0.00E+00
TEEN	4.39E-05	1.41E-05	1.04E-04	1.15E-04	5.32E-05	2.66E-03	1.34E-05	0.00E+00
CHILD	4.27E-05	9.94E-06	2.49E-04	1.99E-04	8.78E-05	5.27E-03	2.06E-05	0.00E+00
INFANT	5.28E-05	1.78E-05	4.11E-04	3.95E-04	1.43E-04	1.28E-02	3.73E-05	0.00E+00
INHAL								
ADULT	1.83E-06	2.14E-05	9.11E-07	2.39E-06	1.27E-06	1.25E-04	4.22E-04	0.00E+00
TEEN	2.24E-06	2.13E-05	1.26E-06	3.20E-06	1.73E-06	1.56E-04	6.17E-04	0.00E+00
CHILD	2.37E-06	2.43E-05	1.68E-06	2.93E-06	1.59E-06	1.78E-04	5.00E-04	0.00E+00
INFANT	1.30E-06	1.77E-05	1.15E-06	2.14E-06	9.97E-07	1.62E-04	3.21E-04	0.00E+00

C39

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 2A Site Boundary
AT .60 MILES NNE

ANNUAL BETA AIR DOSE = 2.44E-05 MILLRADS
ANNUAL GAMMA AIR DOSE = 3.89E-05 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	2.61E-05	2.61E-05	2.61E-05	2.61E-05	2.61E-05	2.61E-05	2.63E-05	5.15E-05
GROUND	4.33E-03	4.33E-03	4.33E-03	4.33E-03	4.33E-03	4.33E-03	4.33E-03	5.09E-03
VEGET								
ADULT	8.59E-05	5.95E-04	7.15E-05	6.67E-05	1.91E-05	1.21E-03	2.97E-06	0.00E+00
TEEN	1.25E-04	6.34E-04	1.13E-04	1.03E-04	2.92E-05	1.64E-03	5.48E-06	0.00E+00
CHILD	2.39E-04	4.16E-04	2.64E-04	1.64E-04	4.60E-05	3.13E-03	8.25E-06	0.00E+00
MEAT								
ADULT	2.09E-05	1.57E-04	3.71E-06	1.52E-05	3.34E-06	3.27E-05	6.49E-07	0.00E+00
TEEN	1.62E-05	8.47E-05	2.88E-06	1.19E-05	2.50E-06	2.37E-05	5.90E-07	0.00E+00
CHILD	2.48E-05	4.29E-05	4.96E-06	1.42E-05	2.91E-06	3.57E-05	6.75E-07	0.00E+00
COW MILK								
ADULT	2.10E-05	4.50E-05	1.87E-05	3.30E-05	1.94E-05	9.09E-04	1.54E-06	0.00E+00
TEEN	2.94E-05	5.26E-05	3.25E-05	5.68E-05	3.27E-05	1.44E-03	3.18E-06	0.00E+00
CHILD	4.85E-05	3.46E-05	7.49E-05	9.21E-05	5.14E-05	2.85E-03	4.88E-06	0.00E+00
INFANT	6.81E-05	8.03E-05	1.22E-04	1.76E-04	7.78E-05	6.91E-03	8.88E-06	0.00E+00
GOATMILK								
ADULT	2.91E-05	7.53E-06	3.66E-05	4.48E-05	2.03E-05	1.09E-03	4.45E-06	0.00E+00
TEEN	2.98E-05	9.16E-06	6.59E-05	7.88E-05	3.59E-05	1.73E-03	9.19E-06	0.00E+00
CHILD	2.87E-05	6.40E-06	1.58E-04	1.36E-04	5.92E-05	3.41E-03	1.41E-05	0.00E+00
INFANT	3.51E-05	1.19E-05	2.60E-04	2.70E-04	9.66E-05	8.30E-03	2.56E-05	0.00E+00
INHAL								
ADULT	1.45E-06	1.75E-05	6.69E-07	1.86E-06	9.61E-07	1.03E-04	3.47E-04	0.00E+00
TEEN	1.77E-06	1.71E-05	9.26E-07	2.48E-06	1.30E-06	1.29E-04	5.08E-04	0.00E+00
CHILD	1.86E-06	1.78E-05	1.24E-06	2.27E-06	1.20E-06	1.46E-04	4.11E-04	0.00E+00
INFANT	1.00E-06	1.26E-05	8.35E-07	1.62E-06	7.47E-07	1.34E-04	2.64E-04	0.00E+00

C40

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 3A Nearest Resident
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 5.35E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 8.54E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.72E-04	5.72E-04	5.72E-04	5.72E-04	5.72E-04	5.72E-04	5.78E-04	1.13E-03
GROUND	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.82E-03
VEGET								
ADULT	3.66E-05	2.37E-04	1.90E-04	2.66E-05	9.72E-06	8.70E-04	1.23E-06	0.00E+00
TEEN	5.33E-05	2.56E-04	2.98E-04	4.13E-05	1.48E-05	1.17E-03	2.28E-06	0.00E+00
CHILD	1.04E-04	1.72E-04	6.98E-04	6.61E-05	2.35E-05	2.24E-03	3.43E-06	0.00E+00
MEAT								
ADULT	7.60E-06	5.62E-05	3.22E-06	5.63E-06	1.33E-06	2.33E-05	2.49E-07	0.00E+00
TEEN	5.87E-06	3.03E-05	2.53E-06	4.39E-06	1.00E-06	1.69E-05	2.27E-07	0.00E+00
CHILD	8.93E-06	1.54E-05	4.48E-06	5.28E-06	1.17E-06	2.55E-05	2.60E-07	0.00E+00
COW MILK								
ADULT	9.00E-06	1.76E-05	1.56E-05	1.40E-05	9.20E-06	6.57E-04	6.62E-07	0.00E+00
TEEN	1.26E-05	2.08E-05	2.73E-05	2.42E-05	1.57E-05	1.04E-03	1.37E-06	0.00E+00
CHILD	2.07E-05	1.40E-05	6.41E-05	3.97E-05	2.50E-05	2.06E-03	2.10E-06	0.00E+00
INFANT	3.00E-05	3.10E-05	1.09E-04	7.76E-05	3.92E-05	5.01E-03	3.81E-06	0.00E+00
GOATMILK								
ADULT	1.34E-05	5.03E-06	3.15E-05	2.02E-05	1.05E-05	7.88E-04	1.92E-06	0.00E+00
TEEN	1.44E-05	6.48E-06	5.59E-05	3.56E-05	1.85E-05	1.25E-03	3.97E-06	0.00E+00
CHILD	1.55E-05	4.88E-06	1.34E-04	6.15E-05	3.06E-05	2.48E-03	6.10E-06	0.00E+00
INFANT	2.10E-05	6.93E-06	2.26E-04	1.23E-04	5.05E-05	6.02E-03	1.10E-05	0.00E+00
INHAL								
ADULT	8.91E-07	5.06E-06	9.59E-07	1.52E-06	1.13E-06	3.22E-05	7.54E-05	0.00E+00
TEEN	1.18E-06	7.05E-06	1.32E-06	2.07E-06	1.55E-06	4.05E-05	1.11E-04	0.00E+00
CHILD	1.38E-06	2.36E-05	1.78E-06	2.00E-06	1.45E-06	4.72E-05	9.01E-05	0.00E+00
INFANT	9.22E-07	2.08E-05	1.31E-06	1.75E-06	9.45E-07	4.32E-05	5.90E-05	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 3.57E-04 MILLRADS
ANNUAL GAMMA AIR DOSE = 5.69E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	3.82E-04	3.82E-04	3.82E-04	3.82E-04	3.82E-04	3.82E-04	3.85E-04	7.54E-04
GROUND	7.25E-05	7.25E-05	7.25E-05	7.25E-05	7.25E-05	7.25E-05	7.25E-05	8.53E-05
VEGET								
ADULT	1.97E-06	1.21E-05	1.60E-05	1.37E-06	5.80E-07	5.98E-05	6.51E-08	0.00E+00
TEEN	2.87E-06	1.33E-05	2.51E-05	2.12E-06	8.85E-07	8.04E-05	1.20E-07	0.00E+00
CHILD	5.64E-06	9.09E-06	5.88E-05	3.42E-06	1.41E-06	1.54E-04	1.82E-07	0.00E+00
MEAT								
ADULT	3.61E-07	2.63E-06	2.33E-07	2.72E-07	6.81E-08	1.60E-06	1.24E-08	0.00E+00
TEEN	2.77E-07	1.42E-06	1.84E-07	2.12E-07	5.16E-08	1.16E-06	1.14E-08	0.00E+00
CHILD	4.22E-07	7.22E-07	3.27E-07	2.56E-07	6.08E-08	1.75E-06	1.30E-08	0.00E+00
COW MILK								
ADULT	4.86E-07	8.86E-07	1.12E-06	7.54E-07	5.30E-07	4.53E-05	3.58E-08	0.00E+00
TEEN	6.78E-07	1.06E-06	1.96E-06	1.31E-06	9.12E-07	7.17E-05	7.38E-08	0.00E+00
CHILD	1.12E-06	7.26E-07	4.62E-06	2.15E-06	1.46E-06	1.42E-04	1.13E-07	0.00E+00
INFANT	1.65E-06	1.55E-06	7.91E-06	4.27E-06	2.33E-06	3.46E-04	2.06E-07	0.00E+00
GOATMILK								
ADULT	7.60E-07	3.37E-07	2.28E-06	1.13E-06	6.28E-07	5.43E-05	1.04E-07	0.00E+00
TEEN	8.32E-07	4.42E-07	4.02E-06	1.99E-06	1.11E-06	8.60E-05	2.15E-07	0.00E+00
CHILD	9.52E-07	3.41E-07	9.59E-06	3.44E-06	1.84E-06	1.71E-04	3.31E-07	0.00E+00
INFANT	1.35E-06	4.41E-07	1.63E-05	6.96E-06	3.06E-06	4.15E-04	5.99E-07	0.00E+00
INHAL								
ADULT	4.25E-07	1.31E-06	5.65E-07	7.98E-07	6.45E-07	9.62E-06	8.96E-06	0.00E+00
TEEN	5.78E-07	2.78E-06	7.81E-07	1.10E-06	8.89E-07	1.23E-05	1.35E-05	0.00E+00
CHILD	7.09E-07	1.46E-05	1.05E-06	1.07E-06	8.33E-07	1.48E-05	1.11E-05	0.00E+00
INFANT	5.00E-07	1.33E-05	7.80E-07	9.87E-07	5.48E-07	1.35E-05	8.03E-06	0.00E+00

TABLE 7. DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 5.35E-04 MILLRADS
 ANNUAL GAMMA AIR DOSE = 8.54E-04 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	5.72E-04	5.72E-04	5.72E-04	5.72E-04	5.72E-04	5.72E-04	5.78E-04	1.13E-03
GROUND	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.55E-03	1.82E-03
VEGET								
ADULT	3.66E-05	2.37E-04	1.90E-04	2.66E-05	9.72E-06	8.70E-04	1.23E-06	0.00E+00
TEEN	5.33E-05	2.56E-04	2.98E-04	4.13E-05	1.48E-05	1.17E-03	2.28E-06	0.00E+00
CHILD	1.04E-04	1.72E-04	6.98E-04	6.61E-05	2.35E-05	2.24E-03	3.43E-06	0.00E+00
MEAT								
ADULT	7.60E-06	5.62E-05	3.22E-06	5.63E-06	1.33E-06	2.33E-05	2.49E-07	0.00E+00
TEEN	5.87E-06	3.03E-05	2.53E-06	4.39E-06	1.00E-06	1.69E-05	2.27E-07	0.00E+00
CHILD	8.93E-06	1.54E-05	4.48E-06	5.28E-06	1.17E-06	2.55E-05	2.60E-07	0.00E+00
COW MILK								
ADULT	9.00E-06	1.76E-05	1.56E-05	1.40E-05	9.20E-06	6.57E-04	6.62E-07	0.00E+00
TEEN	1.26E-05	2.08E-05	2.73E-05	2.42E-05	1.57E-05	1.04E-03	1.37E-06	0.00E+00
CHILD	2.07E-05	1.40E-05	6.41E-05	3.97E-05	2.50E-05	2.06E-03	2.10E-06	0.00E+00
INFANT	3.00E-05	3.10E-05	1.09E-04	7.76E-05	3.92E-05	5.01E-03	3.81E-06	0.00E+00
GOATMILK								
ADULT	1.34E-05	5.03E-06	3.15E-05	2.02E-05	1.05E-05	7.88E-04	1.92E-06	0.00E+00
TEEN	1.44E-05	6.48E-06	5.59E-05	3.56E-05	1.85E-05	1.25E-03	3.97E-06	0.00E+00
CHILD	1.55E-05	4.88E-06	1.34E-04	6.15E-05	3.06E-05	2.48E-03	6.10E-06	0.00E+00
INFANT	2.10E-05	6.93E-06	2.26E-04	1.23E-04	5.05E-05	6.02E-03	1.10E-05	0.00E+00
INHAL								
ADULT	8.91E-07	5.06E-06	9.59E-07	1.52E-06	1.13E-06	3.22E-05	7.54E-05	0.00E+00
TEEN	1.18E-06	7.05E-06	1.32E-06	2.07E-06	1.55E-06	4.05E-05	1.11E-04	0.00E+00
CHILD	1.38E-06	2.36E-05	1.78E-06	2.00E-06	1.45E-06	4.72E-05	9.01E-05	0.00E+00
INFANT	9.22E-07	2.08E-05	1.31E-06	1.75E-06	9.45E-07	4.32E-05	5.90E-05	0.00E+00

TABLE 8. DOSES TO POPULATION WITHIN 50 MILES, JANUARY-MARCH 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 1.32E-04	: 1.32E-04	: 1.32E-04	: 1.32E-04	: 1.32E-04	: 1.32E-04	: 1.34E-04	: 3.24E-04
	: 88.82%	: 87.01%	: 85.68%	: 88.82%	: 88.98%	: 45.13%	: 88.12%	: 94.71%
GROUND	: 1.54E-05	: 1.54E-05	: 1.54E-05	: 1.54E-05	: 1.54E-05	: 1.54E-05	: 1.54E-05	: 1.81E-05
	: 10.35%	: 10.14%	: 9.98%	: 10.35%	: 10.36%	: 5.26%	: 10.10%	: 5.29%
INHAL	: 4.19E-08	: 2.76E-07	: 1.00E-07	: 8.47E-08	: 1.26E-07	: 1.44E-05	: 2.65E-06	: 0.00E+00
	: .03%	: .18%	: .07%	: .06%	: .08%	: 4.92%	: 1.74%	: .00%
VEGET	: 6.60E-07	: 2.77E-06	: 5.21E-06	: 3.87E-07	: 7.63E-08	: 1.69E-06	: 2.36E-08	: 0.00E+00
	: .44%	: 1.83%	: 3.38%	: .26%	: .05%	: .58%	: .02%	: .00%
COW MILK	: 4.05E-07	: 4.20E-07	: 1.28E-06	: 6.96E-07	: 7.56E-07	: 1.27E-04	: 3.28E-08	: 0.00E+00
	: .27%	: .28%	: .83%	: .47%	: .51%	: 43.20%	: .02%	: .00%
MEAT	: 1.40E-07	: 8.61E-07	: 9.35E-08	: 7.79E-08	: 1.94E-08	: 2.66E-06	: 1.87E-09	: 0.00E+00
	: .09%	: .57%	: .06%	: .05%	: .01%	: .91%	: .00%	: .00%
TOTAL	: 1.49E-04	: 1.52E-04	: 1.54E-04	: 1.49E-04	: 1.49E-04	: 2.93E-04	: 1.52E-04	: 3.42E-04

C44

TABLE 9. DOSES TO POPULATION WITHIN 50 MILES, APRIL-JUNE 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 5.84E-06	: 5.84E-06	: 5.84E-06	: 5.84E-06	: 5.84E-06	: 5.84E-06	: 5.92E-06	: 1.38E-05
	: 15.69%	: 13.90%	: 14.18%	: 15.58%	: 16.05%	: 4.68%	: 15.02%	: 28.55%
GROUND	: 2.94E-05	: 2.94E-05	: 2.94E-05	: 2.94E-05	: 2.94E-05	: 2.94E-05	: 2.94E-05	: 3.46E-05
	: 79.13%	: 70.12%	: 71.53%	: 78.57%	: 80.95%	: 23.62%	: 74.65%	: 71.45%
INHAL	: 2.96E-08	: 3.23E-07	: 6.81E-08	: 4.64E-08	: 5.08E-08	: 6.70E-06	: 3.95E-06	: 0.00E+00
	: .08%	: .77%	: .17%	: .12%	: .14%	: 5.37%	: 10.00%	: .00%
VEGET	: 1.03E-06	: 4.28E-06	: 4.33E-06	: 7.90E-07	: 1.89E-07	: 1.09E-06	: 5.10E-08	: 0.00E+00
	: 2.76%	: 10.19%	: 10.52%	: 2.11%	: .52%	: .87%	: .13%	: .00%
COW MILK	: 6.28E-07	: 6.86E-07	: 1.38E-06	: 1.18E-06	: 8.04E-07	: 7.99E-05	: 7.15E-08	: 0.00E+00
	: 1.69%	: 1.63%	: 3.35%	: 3.14%	: 2.21%	: 64.08%	: .18%	: .00%
MEAT	: 2.46E-07	: 1.42E-06	: 1.10E-07	: 1.79E-07	: 4.70E-08	: 1.72E-06	: 8.28E-09	: 0.00E+00
	: .66%	: 3.38%	: .27%	: .48%	: .13%	: 1.38%	: .02%	: .00%
TOTAL	: 3.72E-05	: 4.20E-05	: 4.12E-05	: 3.75E-05	: 3.64E-05	: 1.25E-04	: 3.94E-05	: 4.85E-05

C45

TABLE 10. DOSES TO POPULATION WITHIN 50 MILES, JANUARY-JUNE 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 1.54E-04	: 1.54E-04	: 1.54E-04	: 1.54E-04	: 1.54E-04	: 1.54E-04	: 1.57E-04	: 3.77E-04
	: 76.46%	: 73.60%	: 73.06%	: 76.36%	: 76.88%	: 35.56%	: 75.42%	: 87.85%
GROUND	: 4.43E-05	: 4.43E-05	: 4.43E-05	: 4.43E-05	: 4.43E-05	: 4.43E-05	: 4.43E-05	: 5.21E-05
	: 21.96%	: 21.14%	: 20.98%	: 21.93%	: 22.08%	: 10.21%	: 21.32%	: 12.15%
INHAL	: 7.30E-08	: 5.98E-07	: 1.71E-07	: 1.35E-07	: 1.82E-07	: 2.15E-05	: 6.59E-06	: 0.00E+00
	: .04%	: .29%	: .08%	: .07%	: .09%	: 4.96%	: 3.17%	: .00%
VEGET	: 1.69E-06	: 7.05E-06	: 9.54E-06	: 1.18E-06	: 2.65E-07	: 2.78E-06	: 7.47E-08	: 0.00E+00
	: .84%	: 3.36%	: 4.52%	: .58%	: .13%	: .64%	: .04%	: .00%
COW MILK	: 1.03E-06	: 1.11E-06	: 2.66E-06	: 1.87E-06	: 1.56E-06	: 2.07E-04	: 1.04E-07	: 0.00E+00
	: .51%	: .53%	: 1.26%	: .93%	: .78%	: 47.61%	: .05%	: .00%
MEAT	: 3.86E-07	: 2.28E-06	: 2.03E-07	: 2.57E-07	: 6.62E-08	: 4.38E-06	: 1.01E-08	: 0.00E+00
	: .19%	: 1.09%	: .10%	: .13%	: .03%	: 1.01%	: .00%	: .00%
TOTAL	: 2.02E-04	: 2.10E-04	: 2.11E-04	: 2.02E-04	: 2.01E-04	: 4.34E-04	: 2.08E-04	: 4.29E-04

TABLE 11. DOSES TO POPULATION WITHIN 50 MILES, JULY-SEPTEMBER 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 6.95E-05	: 6.95E-05	: 6.95E-05	: 6.95E-05	: 6.95E-05	: 6.95E-05	: 7.07E-05	: 1.77E-04
	: 61.26%	: 57.40%	: 58.11%	: 60.76%	: 62.02%	: 31.25%	: 58.74%	: 78.64%
GROUND	: 4.08E-05	: 4.08E-05	: 4.08E-05	: 4.08E-05	: 4.08E-05	: 4.08E-05	: 4.08E-05	: 4.80E-05
	: 35.96%	: 33.69%	: 34.11%	: 35.67%	: 36.41%	: 18.34%	: 33.90%	: 21.36%
INHAL	: 1.23E-07	: 1.52E-06	: 2.19E-07	: 2.19E-07	: 2.15E-07	: 1.57E-05	: 8.53E-06	: 0.00E+00
	: .11%	: 1.25%	: .18%	: .19%	: .19%	: 7.06%	: 7.09%	: .00%
VEGET	: 1.66E-06	: 6.29E-06	: 6.38E-06	: 1.53E-06	: 3.83E-07	: 1.25E-06	: 1.23E-07	: 0.00E+00
	: 1.46%	: 5.20%	: 5.34%	: 1.34%	: .34%	: .56%	: .10%	: .00%
COW MILK	: 1.01E-06	: 9.13E-07	: 2.51E-06	: 2.08E-06	: 1.11E-06	: 9.32E-05	: 1.87E-07	: 0.00E+00
	: .89%	: .75%	: 2.10%	: 1.82%	: .99%	: 41.90%	: .16%	: .00%
MEAT	: 3.62E-07	: 2.07E-06	: 1.80E-07	: 2.50E-07	: 5.44E-08	: 2.00E-06	: 1.24E-08	: 0.00E+00
	: .32%	: 1.71%	: .15%	: .22%	: .05%	: .90%	: .01%	: .00%
TOTAL	: 1.13E-04	: 1.21E-04	: 1.20E-04	: 1.14E-04	: 1.12E-04	: 2.22E-04	: 1.20E-04	: 2.25E-04

C47

TABLE 12. DOSES TO POPULATION WITHIN 50 MILES, OCTOBER-DECEMBER 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 2.07E-04	: 2.07E-04	: 2.07E-04	: 2.07E-04	: 2.07E-04	: 2.07E-04	: 2.09E-04	: 4.67E-04
	: 51.53%	: 46.00%	: 43.15%	: 51.66%	: 52.66%	: 29.37%	: 47.38%	: 68.85%
GROUND	: 1.79E-04	: 1.79E-04	: 1.79E-04	: 1.79E-04	: 1.79E-04	: 1.79E-04	: 1.79E-04	: 2.11E-04
	: 44.72%	: 39.93%	: 37.46%	: 44.83%	: 45.70%	: 25.49%	: 40.58%	: 31.15%
INHAL	: 4.49E-07	: 8.60E-06	: 1.31E-06	: 7.12E-07	: 6.07E-07	: 4.03E-05	: 5.27E-05	: 0.00E+00
	: .11%	: 1.91%	: .27%	: .18%	: .15%	: 5.73%	: 11.91%	: .00%
VEGET	: 8.52E-06	: 3.67E-05	: 7.63E-05	: 5.05E-06	: 1.11E-06	: 3.44E-06	: 2.32E-07	: 0.00E+00
	: 2.12%	: 8.17%	: 15.93%	: 1.26%	: .28%	: .49%	: .05%	: .00%
COW MILK	: 4.12E-06	: 6.28E-06	: 1.38E-05	: 6.82E-06	: 4.35E-06	: 2.68E-04	: 2.80E-07	: 0.00E+00
	: 1.03%	: 1.40%	: 2.87%	: 1.70%	: 1.11%	: 38.12%	: .06%	: .00%
MEAT	: 1.97E-06	: 1.17E-05	: 1.50E-06	: 1.46E-06	: 3.69E-07	: 5.67E-06	: 7.09E-08	: 0.00E+00
	: .49%	: 2.59%	: .31%	: .36%	: .09%	: .81%	: .02%	: .00%
TOTAL	: 4.01E-04	: 4.50E-04	: 4.79E-04	: 4.00E-04	: 3.93E-04	: 7.04E-04	: 4.42E-04	: 6.78E-04

C48

TABLE 13. DOSES TO POPULATION WITHIN 50 MILES, JULY-DECEMBER 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 2.89E-04	: 2.89E-04	: 2.89E-04	: 2.89E-04	: 2.89E-04	: 2.89E-04	: 2.93E-04	: 6.71E-04
	: 53.98%	: 48.84%	: 46.56%	: 53.99%	: 55.01%	: 30.44%	: 50.39%	: 71.46%
GROUND	: 2.28E-04	: 2.28E-04	: 2.28E-04	: 2.28E-04	: 2.28E-04	: 2.28E-04	: 2.28E-04	: 2.68E-04
	: 42.60%	: 38.54%	: 36.75%	: 42.61%	: 43.41%	: 24.02%	: 39.21%	: 28.54%
INHAL	: 6.02E-07	: 1.07E-05	: 1.68E-06	: 9.88E-07	: 8.76E-07	: 5.69E-05	: 5.95E-05	: 0.00E+00
	: .11%	: 1.80%	: .27%	: .18%	: .17%	: 6.00%	: 10.24%	: .00%
VEGET	: 1.02E-05	: 4.30E-05	: 8.37E-05	: 6.59E-06	: 1.50E-06	: 4.70E-06	: 3.57E-07	: 0.00E+00
	: 1.91%	: 7.28%	: 13.50%	: 1.23%	: .29%	: .50%	: .06%	: .00%
COW MILK	: 5.14E-06	: 7.20E-06	: 1.65E-05	: 8.92E-06	: 5.48E-06	: 3.63E-04	: 4.69E-07	: 0.00E+00
	: .96%	: 1.22%	: 2.65%	: 1.67%	: 1.04%	: 38.23%	: .08%	: .00%
MEAT	: 2.33E-06	: 1.37E-05	: 1.69E-06	: 1.71E-06	: 4.24E-07	: 7.69E-06	: 8.34E-08	: 0.00E+00
	: .43%	: 2.32%	: .27%	: .32%	: .08%	: .81%	: .01%	: .00%
TOTAL	: 5.35E-04	: 5.92E-04	: 6.20E-04	: 5.35E-04	: 5.25E-04	: 9.49E-04	: 5.81E-04	: 9.40E-04

C49

TABLE 14. DOSES TO POPULATION WITHIN 50 MILES, JANUARY-DECEMBER 2018

ALARA ANNUAL INTEGRATED POPULATION DOSE SUMMARY (PERSON-REM)

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	: 4.33E-04	: 4.33E-04	: 4.33E-04	: 4.33E-04	: 4.33E-04	: 4.33E-04	: 4.39E-04	: 1.03E-03
	: 59.37%	: 54.62%	: 52.46%	: 59.36%	: 60.30%	: 31.53%	: 56.70%	: 76.06%
GROUND	: 2.74E-04	: 2.74E-04	: 2.74E-04	: 2.74E-04	: 2.74E-04	: 2.74E-04	: 2.74E-04	: 3.23E-04
	: 37.68%	: 34.66%	: 33.29%	: 37.67%	: 38.26%	: 20.01%	: 35.45%	: 23.94%
INHAL	: 6.19E-07	: 1.02E-05	: 1.70E-06	: 1.04E-06	: 9.90E-07	: 7.49E-05	: 5.96E-05	: 0.00E+00
	: .09%	: 1.28%	: .21%	: .14%	: .14%	: 5.46%	: 7.70%	: .00%
VEGET	: 1.20E-05	: 5.03E-05	: 9.45E-05	: 7.80E-06	: 1.77E-06	: 7.49E-06	: 4.34E-07	: 0.00E+00
	: 1.64%	: 6.36%	: 11.46%	: 1.07%	: .25%	: .55%	: .06%	: .00%
COW MILK	: 6.20E-06	: 8.35E-06	: 1.94E-05	: 1.08E-05	: 7.05E-06	: 5.70E-04	: 5.77E-07	: 0.00E+00
	: .85%	: 1.05%	: 2.35%	: 1.49%	: .98%	: 41.56%	: .07%	: .00%
MEAT	: 2.72E-06	: 1.60E-05	: 1.91E-06	: 1.97E-06	: 4.90E-07	: 1.21E-05	: 9.37E-08	: 0.00E+00
	: .37%	: 2.03%	: .23%	: .27%	: .07%	: .88%	: .01%	: .00%
TOTAL	: 7.28E-04	: 7.92E-04	: 8.24E-04	: 7.29E-04	: 7.17E-04	: 1.37E-03	: 7.74E-04	: 1.35E-03

C50

CARBON-14 GASEOUS EFFLUENT DOSE CALCULATIONS

Doses to the maximum individual resulting from the release of Carbon-14 in gaseous effluents from the Cooper Nuclear Station (CNS) were calculated using the latest version of the GASPAR computer code included as part of NRC Dose 2.3.20 (ORNL 2015). Four pathways were selected for individual dose calculations: the nearest site boundary for inhalation, nearest garden for vegetation ingestion, nearest animal for meat ingestion, and the nearest milk animal (cow). Based on the 2018 Land Use Census, there are no meat or milk animals identified within 5 miles of CNS. However, CNS maintains a virtual cow receptor at 3.5 miles north-northwest of the plant and conservatively includes this receptor in dose calculations.

Use of a normalized Carbon-14 source term and scaling factors based on the annual thermal gigawatts (GW_T) power generation were utilized to determine the quantity of Carbon-14 in the CNS gaseous effluent discharge for 2018. Specifically, the Boiling Water Reactor proxy production rate of 5.1 curies Carbon-14 per GW_T generation using the methodology described in EPRI, 2010 was the basis for the CNS total calculated emissions of 10.3 curies of Carbon-14 in 2018.

GASPAR implements the radiological dose models of Regulatory Guide 1.109 for determining the radiation exposure to man from four principal atmospheric exposure pathways: plume, ground, inhalation, and ingestion. Doses to the maximum individual are calculated as a function of age group and pathway for significant body organs.

Tables 15 through 21 present maximum individual doses. Note that the inhalation pathway was calculated at the closest site boundary receptor and was negligible for Carbon-14 and is not included in the tables. In addition, the doses presented were conservatively calculated based on the annual site X/Qs. These X/Qs result in doses approximately 20% higher than those calculated with the X/Qs based on growing season meteorology.

Additional assumptions and data used for input to the GASPAR code are described in a separate section of this appendix (see page C66).

TABLE 15. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	4.75E-03	4.75E-03	2.37E-02	4.75E-03	4.75E-03	4.75E-03	4.75E-03	4.75E-03
TEEN	7.94E-03	7.94E-03	3.97E-02	7.94E-03	7.94E-03	7.94E-03	7.94E-03	7.94E-03
CHILD	1.93E-02	1.93E-02	9.66E-02	1.93E-02	1.93E-02	1.93E-02	1.93E-02	1.93E-02
MEAT								
ADULT	1.89E-03	1.89E-03	9.47E-03	1.89E-03	1.89E-03	1.89E-03	1.89E-03	1.89E-03
TEEN	1.60E-03	1.60E-03	8.00E-03	1.60E-03	1.60E-03	1.60E-03	1.60E-03	1.60E-03
CHILD	3.01E-03	3.01E-03	1.50E-02	3.01E-03	3.01E-03	3.01E-03	3.01E-03	3.01E-03
COW MILK								
ADULT	2.07E-03	2.07E-03	1.03E-02	2.07E-03	2.07E-03	2.07E-03	2.07E-03	2.07E-03
TEEN	3.81E-03	3.81E-03	1.91E-02	3.81E-03	3.81E-03	3.81E-03	3.81E-03	3.81E-03
CHILD	9.37E-03	9.37E-03	4.69E-02	9.37E-03	9.37E-03	9.37E-03	9.37E-03	9.37E-03
INFANT	1.96E-02	1.96E-02	9.18E-02	1.96E-02	1.96E-02	1.96E-02	1.96E-02	1.96E-02
GOATMILK								
ADULT	2.07E-03	2.07E-03	1.03E-02	2.07E-03	2.07E-03	2.07E-03	2.07E-03	2.07E-03
TEEN	3.81E-03	3.81E-03	1.91E-02	3.81E-03	3.81E-03	3.81E-03	3.81E-03	3.81E-03
CHILD	9.37E-03	9.37E-03	4.69E-02	9.37E-03	9.37E-03	9.37E-03	9.37E-03	9.37E-03
INFANT	1.96E-02	1.96E-02	9.18E-02	1.96E-02	1.96E-02	1.96E-02	1.96E-02	1.96E-02

TABLE 15. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-MARCH 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
 ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	4.07E-02	4.07E-02	2.03E-01	4.07E-02	4.07E-02	4.07E-02	4.07E-02	4.07E-02
TEEN	6.80E-02	6.80E-02	3.40E-01	6.80E-02	6.80E-02	6.80E-02	6.80E-02	6.80E-02
CHILD	1.66E-01	1.66E-01	8.28E-01	1.66E-01	1.66E-01	1.66E-01	1.66E-01	1.66E-01
MEAT								
ADULT	1.62E-02	1.62E-02	8.12E-02	1.62E-02	1.62E-02	1.62E-02	1.62E-02	1.62E-02
TEEN	1.37E-02	1.37E-02	6.86E-02	1.37E-02	1.37E-02	1.37E-02	1.37E-02	1.37E-02
CHILD	2.58E-02	2.58E-02	1.29E-01	2.58E-02	2.58E-02	2.58E-02	2.58E-02	2.58E-02
COW MILK								
ADULT	1.77E-02	1.77E-02	8.86E-02	1.77E-02	1.77E-02	1.77E-02	1.77E-02	1.77E-02
TEEN	3.27E-02	3.27E-02	1.63E-01	3.27E-02	3.27E-02	3.27E-02	3.27E-02	3.27E-02
CHILD	8.03E-02	8.03E-02	4.02E-01	8.03E-02	8.03E-02	8.03E-02	8.03E-02	8.03E-02
INFANT	1.68E-01	1.68E-01	7.87E-01	1.68E-01	1.68E-01	1.68E-01	1.68E-01	1.68E-01
GOATMILK								
ADULT	1.77E-02	1.77E-02	8.86E-02	1.77E-02	1.77E-02	1.77E-02	1.77E-02	1.77E-02
TEEN	3.27E-02	3.27E-02	1.63E-01	3.27E-02	3.27E-02	3.27E-02	3.27E-02	3.27E-02
CHILD	8.03E-02	8.03E-02	4.02E-01	8.03E-02	8.03E-02	8.03E-02	8.03E-02	8.03E-02
INFANT	1.68E-01	1.68E-01	7.87E-01	1.68E-01	1.68E-01	1.68E-01	1.68E-01	1.68E-01

CS3

TABLE 16. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	4.25E-03	4.25E-03	2.13E-02	4.25E-03	4.25E-03	4.25E-03	4.25E-03	4.25E-03
TEEN	7.11E-03	7.11E-03	3.56E-02	7.11E-03	7.11E-03	7.11E-03	7.11E-03	7.11E-03
CHILD	1.73E-02	1.73E-02	8.66E-02	1.73E-02	1.73E-02	1.73E-02	1.73E-02	1.73E-02
MEAT								
ADULT	1.70E-03	1.70E-03	8.49E-03	1.70E-03	1.70E-03	1.70E-03	1.70E-03	1.70E-03
TEEN	1.43E-03	1.43E-03	7.17E-03	1.43E-03	1.43E-03	1.43E-03	1.43E-03	1.43E-03
CHILD	2.70E-03	2.70E-03	1.35E-02	2.70E-03	2.70E-03	2.70E-03	2.70E-03	2.70E-03
COW MILK								
ADULT	1.85E-03	1.85E-03	9.26E-03	1.85E-03	1.85E-03	1.85E-03	1.85E-03	1.85E-03
TEEN	3.42E-03	3.42E-03	1.71E-02	3.42E-03	3.42E-03	3.42E-03	3.42E-03	3.42E-03
CHILD	8.40E-03	8.40E-03	4.20E-02	8.40E-03	8.40E-03	8.40E-03	8.40E-03	8.40E-03
INFANT	1.76E-02	1.76E-02	8.22E-02	1.76E-02	1.76E-02	1.76E-02	1.76E-02	1.76E-02
GOATMILK								
ADULT	1.85E-03	1.85E-03	9.26E-03	1.85E-03	1.85E-03	1.85E-03	1.85E-03	1.85E-03
TEEN	3.42E-03	3.42E-03	1.71E-02	3.42E-03	3.42E-03	3.42E-03	3.42E-03	3.42E-03
CHILD	8.40E-03	8.40E-03	4.20E-02	8.40E-03	8.40E-03	8.40E-03	8.40E-03	8.40E-03
INFANT	1.76E-02	1.76E-02	8.22E-02	1.76E-02	1.76E-02	1.76E-02	1.76E-02	1.76E-02

CS4

TABLE 16. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), APRIL-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
AT .90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	3.98E-02	3.98E-02	1.99E-01	3.98E-02	3.98E-02	3.98E-02	3.98E-02	3.98E-02
TEEN	6.65E-02	6.65E-02	3.33E-01	6.65E-02	6.65E-02	6.65E-02	6.65E-02	6.65E-02
CHILD	1.62E-01	1.62E-01	8.10E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01
MEAT								
ADULT	1.59E-02	1.59E-02	7.94E-02	1.59E-02	1.59E-02	1.59E-02	1.59E-02	1.59E-02
TEEN	1.34E-02	1.34E-02	6.71E-02	1.34E-02	1.34E-02	1.34E-02	1.34E-02	1.34E-02
CHILD	2.52E-02	2.52E-02	1.26E-01	2.52E-02	2.52E-02	2.52E-02	2.52E-02	2.52E-02
COW MILK								
ADULT	1.73E-02	1.73E-02	8.66E-02	1.73E-02	1.73E-02	1.73E-02	1.73E-02	1.73E-02
TEEN	3.20E-02	3.20E-02	1.60E-01	3.20E-02	3.20E-02	3.20E-02	3.20E-02	3.20E-02
CHILD	7.86E-02	7.86E-02	3.93E-01	7.86E-02	7.86E-02	7.86E-02	7.86E-02	7.86E-02
INFANT	1.64E-01	1.64E-01	7.69E-01	1.64E-01	1.64E-01	1.64E-01	1.64E-01	1.64E-01
GOATMILK								
ADULT	1.73E-02	1.73E-02	8.66E-02	1.73E-02	1.73E-02	1.73E-02	1.73E-02	1.73E-02
TEEN	3.20E-02	3.20E-02	1.60E-01	3.20E-02	3.20E-02	3.20E-02	3.20E-02	3.20E-02
CHILD	7.86E-02	7.86E-02	3.93E-01	7.86E-02	7.86E-02	7.86E-02	7.86E-02	7.86E-02
INFANT	1.64E-01	1.64E-01	7.69E-01	1.64E-01	1.64E-01	1.64E-01	1.64E-01	1.64E-01

CSS

TABLE 17. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	9.00E-03	9.00E-03	4.50E-02	9.00E-03	9.00E-03	9.00E-03	9.00E-03	9.00E-03
TEEN	1.51E-02	1.51E-02	7.53E-02	1.51E-02	1.51E-02	1.51E-02	1.51E-02	1.51E-02
CHILD	3.66E-02	3.66E-02	1.83E-01	3.66E-02	3.66E-02	3.66E-02	3.66E-02	3.66E-02
MEAT								
ADULT	3.59E-03	3.59E-03	1.80E-02	3.59E-03	3.59E-03	3.59E-03	3.59E-03	3.59E-03
TEEN	3.03E-03	3.03E-03	1.52E-02	3.03E-03	3.03E-03	3.03E-03	3.03E-03	3.03E-03
CHILD	5.71E-03	5.71E-03	2.85E-02	5.71E-03	5.71E-03	5.71E-03	5.71E-03	5.71E-03
COW MILK								
ADULT	3.92E-03	3.92E-03	1.96E-02	3.92E-03	3.92E-03	3.92E-03	3.92E-03	3.92E-03
TEEN	7.23E-03	7.23E-03	3.61E-02	7.23E-03	7.23E-03	7.23E-03	7.23E-03	7.23E-03
CHILD	1.78E-02	1.78E-02	8.89E-02	1.78E-02	1.78E-02	1.78E-02	1.78E-02	1.78E-02
INFANT	3.72E-02	3.72E-02	1.74E-01	3.72E-02	3.72E-02	3.72E-02	3.72E-02	3.72E-02
GOATMILK								
ADULT	3.92E-03	3.92E-03	1.96E-02	3.92E-03	3.92E-03	3.92E-03	3.92E-03	3.92E-03
TEEN	7.23E-03	7.23E-03	3.61E-02	7.23E-03	7.23E-03	7.23E-03	7.23E-03	7.23E-03
CHILD	1.78E-02	1.78E-02	8.89E-02	1.78E-02	1.78E-02	1.78E-02	1.78E-02	1.78E-02
INFANT	3.72E-02	3.72E-02	1.74E-01	3.72E-02	3.72E-02	3.72E-02	3.72E-02	3.72E-02

TABLE 17. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-JUNE 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
 ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	8.18E-02	8.18E-02	4.09E-01	8.18E-02	8.18E-02	8.18E-02	8.18E-02	8.18E-02
TEEN	1.37E-01	1.37E-01	6.84E-01	1.37E-01	1.37E-01	1.37E-01	1.37E-01	1.37E-01
CHILD	3.33E-01	3.33E-01	1.67E+00	3.33E-01	3.33E-01	3.33E-01	3.33E-01	3.33E-01
MEAT								
ADULT	3.27E-02	3.27E-02	1.63E-01	3.27E-02	3.27E-02	3.27E-02	3.27E-02	3.27E-02
TEEN	2.76E-02	2.76E-02	1.38E-01	2.76E-02	2.76E-02	2.76E-02	2.76E-02	2.76E-02
CHILD	5.19E-02	5.19E-02	2.59E-01	5.19E-02	5.19E-02	5.19E-02	5.19E-02	5.19E-02
COW MILK								
ADULT	3.56E-02	3.56E-02	1.78E-01	3.56E-02	3.56E-02	3.56E-02	3.56E-02	3.56E-02
TEEN	6.57E-02	6.57E-02	3.29E-01	6.57E-02	6.57E-02	6.57E-02	6.57E-02	6.57E-02
CHILD	1.62E-01	1.62E-01	8.08E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01
INFANT	3.38E-01	3.38E-01	1.58E+00	3.38E-01	3.38E-01	3.38E-01	3.38E-01	3.38E-01
GOATMILK								
ADULT	3.56E-02	3.56E-02	1.78E-01	3.56E-02	3.56E-02	3.56E-02	3.56E-02	3.56E-02
TEEN	6.57E-02	6.57E-02	3.29E-01	6.57E-02	6.57E-02	6.57E-02	6.57E-02	6.57E-02
CHILD	1.62E-01	1.62E-01	8.08E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01
INFANT	3.38E-01	3.38E-01	1.58E+00	3.38E-01	3.38E-01	3.38E-01	3.38E-01	3.38E-01

CS7

TABLE 18. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	4.16E-03	4.16E-03	2.08E-02	4.16E-03	4.16E-03	4.16E-03	4.16E-03	4.16E-03
TEEN	6.96E-03	6.96E-03	3.48E-02	6.96E-03	6.96E-03	6.96E-03	6.96E-03	6.96E-03
CHILD	1.70E-02	1.70E-02	8.48E-02	1.70E-02	1.70E-02	1.70E-02	1.70E-02	1.70E-02
MEAT								
ADULT	1.66E-03	1.66E-03	8.31E-03	1.66E-03	1.66E-03	1.66E-03	1.66E-03	1.66E-03
TEEN	1.40E-03	1.40E-03	7.02E-03	1.40E-03	1.40E-03	1.40E-03	1.40E-03	1.40E-03
CHILD	2.64E-03	2.64E-03	1.32E-02	2.64E-03	2.64E-03	2.64E-03	2.64E-03	2.64E-03
COW MILK								
ADULT	1.81E-03	1.81E-03	9.06E-03	1.81E-03	1.81E-03	1.81E-03	1.81E-03	1.81E-03
TEEN	3.34E-03	3.34E-03	1.67E-02	3.34E-03	3.34E-03	3.34E-03	3.34E-03	3.34E-03
CHILD	8.22E-03	8.22E-03	4.11E-02	8.22E-03	8.22E-03	8.22E-03	8.22E-03	8.22E-03
INFANT	1.72E-02	1.72E-02	8.05E-02	1.72E-02	1.72E-02	1.72E-02	1.72E-02	1.72E-02
GOATMILK								
ADULT	1.81E-03	1.81E-03	9.06E-03	1.81E-03	1.81E-03	1.81E-03	1.81E-03	1.81E-03
TEEN	3.34E-03	3.34E-03	1.67E-02	3.34E-03	3.34E-03	3.34E-03	3.34E-03	3.34E-03
CHILD	8.22E-03	8.22E-03	4.11E-02	8.22E-03	8.22E-03	8.22E-03	8.22E-03	8.22E-03
INFANT	1.72E-02	1.72E-02	8.05E-02	1.72E-02	1.72E-02	1.72E-02	1.72E-02	1.72E-02

CS8

TABLE 18. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-SEPTEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
 ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	5.41E-02	5.41E-02	2.71E-01	5.41E-02	5.41E-02	5.41E-02	5.41E-02	5.41E-02
TEEN	9.05E-02	9.05E-02	4.53E-01	9.05E-02	9.05E-02	9.05E-02	9.05E-02	9.05E-02
CHILD	2.20E-01	2.20E-01	1.10E+00	2.20E-01	2.20E-01	2.20E-01	2.20E-01	2.20E-01
MEAT								
ADULT	2.16E-02	2.16E-02	1.08E-01	2.16E-02	2.16E-02	2.16E-02	2.16E-02	2.16E-02
TEEN	1.82E-02	1.82E-02	9.12E-02	1.82E-02	1.82E-02	1.82E-02	1.82E-02	1.82E-02
CHILD	3.43E-02	3.43E-02	1.72E-01	3.43E-02	3.43E-02	3.43E-02	3.43E-02	3.43E-02
COW MILK								
ADULT	2.36E-02	2.36E-02	1.18E-01	2.36E-02	2.36E-02	2.36E-02	2.36E-02	2.36E-02
TEEN	4.35E-02	4.35E-02	2.17E-01	4.35E-02	4.35E-02	4.35E-02	4.35E-02	4.35E-02
CHILD	1.07E-01	1.07E-01	5.34E-01	1.07E-01	1.07E-01	1.07E-01	1.07E-01	1.07E-01
INFANT	2.23E-01	2.23E-01	1.05E+00	2.23E-01	2.23E-01	2.23E-01	2.23E-01	2.23E-01
GOATMILK								
ADULT	2.36E-02	2.36E-02	1.18E-01	2.36E-02	2.36E-02	2.36E-02	2.36E-02	2.36E-02
TEEN	4.35E-02	4.35E-02	2.17E-01	4.35E-02	4.35E-02	4.35E-02	4.35E-02	4.35E-02
CHILD	1.07E-01	1.07E-01	5.34E-01	1.07E-01	1.07E-01	1.07E-01	1.07E-01	1.07E-01
INFANT	2.23E-01	2.23E-01	1.05E+00	2.23E-01	2.23E-01	2.23E-01	2.23E-01	2.23E-01

CS9

TABLE 19. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	6.52E-03	6.52E-03	3.26E-02	6.52E-03	6.52E-03	6.52E-03	6.52E-03	6.52E-03
TEEN	1.09E-02	1.09E-02	5.46E-02	1.09E-02	1.09E-02	1.09E-02	1.09E-02	1.09E-02
CHILD	2.66E-02	2.66E-02	1.33E-01	2.66E-02	2.66E-02	2.66E-02	2.66E-02	2.66E-02
MEAT								
ADULT	2.60E-03	2.60E-03	1.30E-02	2.60E-03	2.60E-03	2.60E-03	2.60E-03	2.60E-03
TEEN	2.20E-03	2.20E-03	1.10E-02	2.20E-03	2.20E-03	2.20E-03	2.20E-03	2.20E-03
CHILD	4.13E-03	4.13E-03	2.07E-02	4.13E-03	4.13E-03	4.13E-03	4.13E-03	4.13E-03
COW MILK								
ADULT	2.84E-03	2.84E-03	1.42E-02	2.84E-03	2.84E-03	2.84E-03	2.84E-03	2.84E-03
TEEN	5.24E-03	5.24E-03	2.62E-02	5.24E-03	5.24E-03	5.24E-03	5.24E-03	5.24E-03
CHILD	1.29E-02	1.29E-02	6.44E-02	1.29E-02	1.29E-02	1.29E-02	1.29E-02	1.29E-02
INFANT	2.69E-02	2.69E-02	1.26E-01	2.69E-02	2.69E-02	2.69E-02	2.69E-02	2.69E-02
GOATMILK								
ADULT	2.84E-03	2.84E-03	1.42E-02	2.84E-03	2.84E-03	2.84E-03	2.84E-03	2.84E-03
TEEN	5.24E-03	5.24E-03	2.62E-02	5.24E-03	5.24E-03	5.24E-03	5.24E-03	5.24E-03
CHILD	1.29E-02	1.29E-02	6.44E-02	1.29E-02	1.29E-02	1.29E-02	1.29E-02	1.29E-02
INFANT	2.69E-02	2.69E-02	1.26E-01	2.69E-02	2.69E-02	2.69E-02	2.69E-02	2.69E-02

C60

TABLE 19. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), OCTOBER-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
AT 90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	4.30E-02	4.30E-02	2.15E-01	4.30E-02	4.30E-02	4.30E-02	4.30E-02	4.30E-02
TEEN	7.20E-02	7.20E-02	3.60E-01	7.20E-02	7.20E-02	7.20E-02	7.20E-02	7.20E-02
CHILD	1.75E-01	1.75E-01	8.76E-01	1.75E-01	1.75E-01	1.75E-01	1.75E-01	1.75E-01
MEAT								
ADULT	1.72E-02	1.72E-02	8.59E-02	1.72E-02	1.72E-02	1.72E-02	1.72E-02	1.72E-02
TEEN	1.45E-02	1.45E-02	7.25E-02	1.45E-02	1.45E-02	1.45E-02	1.45E-02	1.45E-02
CHILD	2.73E-02	2.73E-02	1.36E-01	2.73E-02	2.73E-02	2.73E-02	2.73E-02	2.73E-02
COW MILK								
ADULT	1.87E-02	1.87E-02	9.37E-02	1.87E-02	1.87E-02	1.87E-02	1.87E-02	1.87E-02
TEEN	3.46E-02	3.46E-02	1.73E-01	3.46E-02	3.46E-02	3.46E-02	3.46E-02	3.46E-02
CHILD	8.50E-02	8.50E-02	4.25E-01	8.50E-02	8.50E-02	8.50E-02	8.50E-02	8.50E-02
INFANT	1.78E-01	1.78E-01	8.32E-01	1.78E-01	1.78E-01	1.78E-01	1.78E-01	1.78E-01
GOATMILK								
ADULT	1.87E-02	1.87E-02	9.37E-02	1.87E-02	1.87E-02	1.87E-02	1.87E-02	1.87E-02
TEEN	3.46E-02	3.46E-02	1.73E-01	3.46E-02	3.46E-02	3.46E-02	3.46E-02	3.46E-02
CHILD	8.50E-02	8.50E-02	4.25E-01	8.50E-02	8.50E-02	8.50E-02	8.50E-02	8.50E-02
INFANT	1.78E-01	1.78E-01	8.32E-01	1.78E-01	1.78E-01	1.78E-01	1.78E-01	1.78E-01

TABLE 20. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	1.05E-02	1.05E-02	5.26E-02	1.05E-02	1.05E-02	1.05E-02	1.05E-02	1.05E-02
TEEN	1.76E-02	1.76E-02	8.80E-02	1.76E-02	1.76E-02	1.76E-02	1.76E-02	1.76E-02
CHILD	4.29E-02	4.29E-02	2.14E-01	4.29E-02	4.29E-02	4.29E-02	4.29E-02	4.29E-02
MEAT								
ADULT	4.20E-03	4.20E-03	2.10E-02	4.20E-03	4.20E-03	4.20E-03	4.20E-03	4.20E-03
TEEN	3.55E-03	3.55E-03	1.77E-02	3.55E-03	3.55E-03	3.55E-03	3.55E-03	3.55E-03
CHILD	6.67E-03	6.67E-03	3.34E-02	6.67E-03	6.67E-03	6.67E-03	6.67E-03	6.67E-03
COW MILK								
ADULT	4.58E-03	4.58E-03	2.29E-02	4.58E-03	4.58E-03	4.58E-03	4.58E-03	4.58E-03
TEEN	8.46E-03	8.46E-03	4.23E-02	8.46E-03	8.46E-03	8.46E-03	8.46E-03	8.46E-03
CHILD	2.08E-02	2.08E-02	1.04E-01	2.08E-02	2.08E-02	2.08E-02	2.08E-02	2.08E-02
INFANT	4.35E-02	4.35E-02	2.04E-01	4.35E-02	4.35E-02	4.35E-02	4.35E-02	4.35E-02
GOATMILK								
ADULT	4.58E-03	4.58E-03	2.29E-02	4.58E-03	4.58E-03	4.58E-03	4.58E-03	4.58E-03
TEEN	8.46E-03	8.46E-03	4.23E-02	8.46E-03	8.46E-03	8.46E-03	8.46E-03	8.46E-03
CHILD	2.08E-02	2.08E-02	1.04E-01	2.08E-02	2.08E-02	2.08E-02	2.08E-02	2.08E-02
INFANT	4.35E-02	4.35E-02	2.04E-01	4.35E-02	4.35E-02	4.35E-02	4.35E-02	4.35E-02

TABLE 20. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JULY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
AT .90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	9.70E-02	9.70E-02	4.85E-01	9.70E-02	9.70E-02	9.70E-02	9.70E-02	9.70E-02
TEEN	1.62E-01	1.62E-01	8.11E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01	1.62E-01
CHILD	3.95E-01	3.95E-01	1.97E+00	3.95E-01	3.95E-01	3.95E-01	3.95E-01	3.95E-01
MEAT								
ADULT	3.87E-02	3.87E-02	1.94E-01	3.87E-02	3.87E-02	3.87E-02	3.87E-02	3.87E-02
TEEN	3.27E-02	3.27E-02	1.63E-01	3.27E-02	3.27E-02	3.27E-02	3.27E-02	3.27E-02
CHILD	6.15E-02	6.15E-02	3.07E-01	6.15E-02	6.15E-02	6.15E-02	6.15E-02	6.15E-02
COW MILK								
ADULT	4.22E-02	4.22E-02	2.11E-01	4.22E-02	4.22E-02	4.22E-02	4.22E-02	4.22E-02
TEEN	7.79E-02	7.79E-02	3.89E-01	7.79E-02	7.79E-02	7.79E-02	7.79E-02	7.79E-02
CHILD	1.91E-01	1.91E-01	9.57E-01	1.91E-01	1.91E-01	1.91E-01	1.91E-01	1.91E-01
INFANT	4.00E-01	4.00E-01	1.88E+00	4.00E-01	4.00E-01	4.00E-01	4.00E-01	4.00E-01
GOATMILK								
ADULT	4.22E-02	4.22E-02	2.11E-01	4.22E-02	4.22E-02	4.22E-02	4.22E-02	4.22E-02
TEEN	7.79E-02	7.79E-02	3.89E-01	7.79E-02	7.79E-02	7.79E-02	7.79E-02	7.79E-02
CHILD	1.91E-01	1.91E-01	9.57E-01	1.91E-01	1.91E-01	1.91E-01	1.91E-01	1.91E-01
INFANT	4.00E-01	4.00E-01	1.88E+00	4.00E-01	4.00E-01	4.00E-01	4.00E-01	4.00E-01

TABLE 21. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018

SPECIAL LOCATION NO. 4A Nearest Cow
AT 3.50 MILES NNW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	1.98E-02	1.98E-02	9.90E-02	1.98E-02	1.98E-02	1.98E-02	1.98E-02	1.98E-02
TEEN	3.31E-02	3.31E-02	1.66E-01	3.31E-02	3.31E-02	3.31E-02	3.31E-02	3.31E-02
CHILD	8.06E-02	8.06E-02	4.03E-01	8.06E-02	8.06E-02	8.06E-02	8.06E-02	8.06E-02
MEAT								
ADULT	7.90E-03	7.90E-03	3.95E-02	7.90E-03	7.90E-03	7.90E-03	7.90E-03	7.90E-03
TEEN	6.67E-03	6.67E-03	3.34E-02	6.67E-03	6.67E-03	6.67E-03	6.67E-03	6.67E-03
CHILD	1.25E-02	1.25E-02	6.27E-02	1.25E-02	1.25E-02	1.25E-02	1.25E-02	1.25E-02
COW MILK								
ADULT	8.62E-03	8.62E-03	4.31E-02	8.62E-03	8.62E-03	8.62E-03	8.62E-03	8.62E-03
TEEN	1.59E-02	1.59E-02	7.95E-02	1.59E-02	1.59E-02	1.59E-02	1.59E-02	1.59E-02
CHILD	3.91E-02	3.91E-02	1.95E-01	3.91E-02	3.91E-02	3.91E-02	3.91E-02	3.91E-02
INFANT	8.17E-02	8.17E-02	3.83E-01	8.17E-02	8.17E-02	8.17E-02	8.17E-02	8.17E-02
GOATMILK								
ADULT	8.62E-03	8.62E-03	4.31E-02	8.62E-03	8.62E-03	8.62E-03	8.62E-03	8.62E-03
TEEN	1.59E-02	1.59E-02	7.95E-02	1.59E-02	1.59E-02	1.59E-02	1.59E-02	1.59E-02
CHILD	3.91E-02	3.91E-02	1.95E-01	3.91E-02	3.91E-02	3.91E-02	3.91E-02	3.91E-02
INFANT	8.17E-02	8.17E-02	3.83E-01	8.17E-02	8.17E-02	8.17E-02	8.17E-02	8.17E-02

TABLE 21. CARBON-14 DOSES TO MAXIMUM INDIVIDUAL (MREM), JANUARY-DECEMBER 2018 (Continued)

SPECIAL LOCATION NO. 5A Nearest Garden
 AT .90 MILES NW

ANNUAL BETA AIR DOSE = 0.00E+00 MILLRADS
 ANNUAL GAMMA AIR DOSE = 0.00E+00 MILLRADS

PATHWAY	T.BODY	GI-TRACT	BONE	LIVER	KIDNEY	THYROID	LUNG	SKIN
PLUME	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GROUND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
VEGET								
ADULT	1.81E-01	1.81E-01	9.07E-01	1.81E-01	1.81E-01	1.81E-01	1.81E-01	1.81E-01
TEEN	3.03E-01	3.03E-01	1.52E+00	3.03E-01	3.03E-01	3.03E-01	3.03E-01	3.03E-01
CHILD	7.39E-01	7.39E-01	3.69E+00	7.39E-01	7.39E-01	7.39E-01	7.39E-01	7.39E-01
MEAT								
ADULT	7.24E-02	7.24E-02	3.62E-01	7.24E-02	7.24E-02	7.24E-02	7.24E-02	7.24E-02
TEEN	6.12E-02	6.12E-02	3.06E-01	6.12E-02	6.12E-02	6.12E-02	6.12E-02	6.12E-02
CHILD	1.15E-01	1.15E-01	5.75E-01	1.15E-01	1.15E-01	1.15E-01	1.15E-01	1.15E-01
COW MILK								
ADULT	7.90E-02	7.90E-02	3.95E-01	7.90E-02	7.90E-02	7.90E-02	7.90E-02	7.90E-02
TEEN	1.46E-01	1.46E-01	7.29E-01	1.46E-01	1.46E-01	1.46E-01	1.46E-01	1.46E-01
CHILD	3.58E-01	3.58E-01	1.79E+00	3.58E-01	3.58E-01	3.58E-01	3.58E-01	3.58E-01
INFANT	7.49E-01	7.49E-01	3.51E+00	7.49E-01	7.49E-01	7.49E-01	7.49E-01	7.49E-01
GOATMILK								
ADULT	7.90E-02	7.90E-02	3.95E-01	7.90E-02	7.90E-02	7.90E-02	7.90E-02	7.90E-02
TEEN	1.46E-01	1.46E-01	7.29E-01	1.46E-01	1.46E-01	1.46E-01	1.46E-01	1.46E-01
CHILD	3.58E-01	3.58E-01	1.79E+00	3.58E-01	3.58E-01	3.58E-01	3.58E-01	3.58E-01
INFANT	7.49E-01	7.49E-01	3.51E+00	7.49E-01	7.49E-01	7.49E-01	7.49E-01	7.49E-01

C65

DOSE CALCULATION MODELS

To evaluate the radiological consequences of the routine release of liquid and gaseous effluents from the Cooper Nuclear Station, the latest versions of two computer codes were used: LADTAP II for liquid doses and GASPAR for gaseous doses included as part of NRC Dose 2.3.20 (ORNL 2015). Both of these computer codes implement the dose calculational methodologies of U.S. NRC Regulatory Guide 1.109, Revision 1.

Source terms for each quarter are combined with station-specific demographic data and either hydrological dilution factors, for liquid dose calculations, or atmospheric diffusion estimates, for gaseous dose calculations.

For liquid dose calculations, the hydrological dilution factors used for input to LADTAP II, as well as other input parameters, are listed in Table 22. Other inputs not specifically listed in this table are taken from Regulatory Guide 1.109, Revision 1. Semiannual doses are obtained by summing the contributions from the appropriate quarters.

For gaseous dose calculations, atmospheric diffusion estimates are obtained from the reduction and processing of onsite meteorological data, as described in Appendix B. Source terms for the semiannual period are obtained by summing source terms for the appropriate quarters. Additional input to GASPAR includes the following station-supplied data:

- 0 to 50 mile population distribution
- 0 to 50 mile meat, milk, and vegetable distributions
- Absolute humidity at Cooper Nuclear Station (14.61 g/m^3)
- The fraction of the year that the vegetables are grown (0.5)
- The fraction of the daily feed intake derived from pasture for milk and meat animals (0.5)

Other values used for input to GASPAR are default values from Regulatory Guide 1.109, Rev. 1.

TABLE 22. Values of Parameters Used to Make Dose Estimates Resulting From Liquid Discharges at Cooper Nuclear Station January-December 2018

Parameter	Values Assigned	
	Individual	Population
Cooling flow rate (cfs) * (Average daily value)	Q1 NR	NR
	Q2 NR	NR
	Q3 1446	1446
	Q4 716	716
Dilution factor*	Q1 NR	NR
	Q2 NR	NR
	Q3 1	2.03
	Q4 1	1.65
Holding time:		
Fish	24 hr ***	168 hr ***
Drinking water	12 hr ***	22.4 hr **
Shoreline exposure	0 hr ***	22.4 hr **
Swimming	0 hr ***	22.4 hr **
Boating	0 hr ***	22.4 hr **

* Q1, Q2, Q3, and Q4 represent first, second, third and fourth quarter station data for 2018, respectively.

** Based on an average Missouri River water flow of 5.5 ft/sec, 84 miles down the river.

*** Values from Regulatory Guide 1.109, Revision 1.

NR- No release

REFERENCES

Electric Power Research Institute, Technical Report 1021106, "Estimation of Carbon-14 in Nuclear Power Plant Gaseous Effluents", December 2010.

Oak Ridge National Laboratory, NRC Dose 2.3.20, "Code System for Evaluating Routine Radioactive Effluents from Nuclear Power Plants with Windows Interface", February 2015.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.21, "Measuring, Evaluating, and Reporting Radioactivity in Solid Wastes and Releases of Radioactive Materials in Liquid and Gaseous Effluents from Light-Water-Cooled Nuclear Power Plants", Revision 1, 1974.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.23 (Safety Guide 23), "Onsite Meteorological Programs", Revision 0, 1972.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water-Cooled Reactors", Revision 1, 1977.

U.S. Nuclear Regulatory Commission, NUREG/CR-2919, "XOQDOQ: Computer Program for the Meteorological Evaluation of Routine Effluent Releases at Nuclear Power Stations", 1982.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water-Cooled Reactors", Revision 0, 1976.

U.S. Nuclear Regulatory Commission, NUREG-0597, "User's Guide to GASPAR Code", December 1980.

U.S. Nuclear Regulatory Commission, NUREG/CR-1276, "User's Manual for LADTAP II: A Computer Code for Calculating Radiation Exposure to Man From Routine Release of Nuclear Reactor Liquid Effluents", 1980.

U.S. Nuclear Regulatory Commission, Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Evaluating Compliance with 10 CFR 50, Appendix I", Revision 1, 1977.

APPENDIX D
ANNUAL RADIOLOGICAL GROUNDWATER PROTECTION PROGRAM
(ARGPP) REPORT

***NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION
Radiological Groundwater Protection Program
2018 Annual Report
January 1, 2018 to December 31, 2018***

Prepared by
*Teledyne Brown Engineering
2508 Quality Lane
Knoxville, TN 37931-3133*

Table of Contents

I. Summary	4
II. Characteristics of Tritium (H-3)	6
III. Introduction.....	8
A. Objectives of the RGPP	10
B. Implementation of the Objectives	10
C. Program Description	10
IV. Program Description	12
A. Sample Analysis.....	13
B. Data Interpretation.....	13
V. Results and Discussion.....	15
A. Groundwater Results.....	16

Appendices

Appendix A: Location Designation of the Annual Radiological Groundwater Protection Program Report (ARGPPR)

Tables

Table A-1: Radiological Groundwater Protection Program - Sampling Locations, Nebraska Public Power District, Cooper Nuclear Station, 2018

Map

Map A-1: Routine Well Water Sample Locations for the Radiological Groundwater Protection Program, Nebraska Public Power District, Cooper Nuclear Station, 2018

Appendix B: Data Tables of the Annual Radiological Groundwater Protection Program Report (ARGPPR)

Table B-1: Exposure Pathway – Water - Ground, 2018

SECTION I. SUMMARY

I. SUMMARY

In 2008, the Cooper Nuclear Station (CNS) of the Nebraska Public Power District (NPPD) instituted a comprehensive program to evaluate the impact of station operations on groundwater in the vicinity of CNS. This report covers groundwater samples, collected outside of the Licensee required Off-Site Dose Assessment Manual (ODAM) requirements, both on and off station property in 2018. During that time period, analyses were performed on 74 samples from 24 locations.

In assessing all the data gathered for this report, it was concluded that the operation of CNS had no adverse radiological impact on the environment, and there are no known active releases into the groundwater or surface water at Nebraska Public Power District.

Tritium was not detected in any of the groundwater samples at concentrations greater than the United States Environmental Protection Agency (USEPA) drinking water standard (and the Nuclear Regulatory Commission [NRC] reporting limit) of 20,000 pCi/L. The tritium concentrations ranged from 321 ± 209 pCi/L to $2,210 \pm 289$ pCi/L.

Gamma-emitting radionuclides associated with licensed plant operations were not detected at concentrations greater than their respective Lower Limits of Detection (LLDs) as specified in NUREG-1302 in any of the groundwater samples. In the case of tritium, CNS specified that the independent laboratory achieve a lower limit of detection 10 times lower than that required by the United States Environmental Protection Agency (USEPA) regulation.

SECTION II. CHARACTERISTICS OF TRITIUM (H-3)

II. CHARACTERISTICS OF TRITIUM (H-3)

Tritium (chemical symbol H-3) is a radioactive isotope of hydrogen. The most common form of tritium is tritium oxide, which is also called "tritiated water." The chemical properties of tritium are essentially those of ordinary hydrogen.

Tritiated water functions the same as ordinary water in both the environment and the body. Tritium can be taken into the body by drinking water, breathing air, eating food, or absorption through skin. Once tritium enters the body, it disperses quickly and is uniformly distributed throughout the body. Tritium is excreted primarily through urine with a clearance rate characterized by an effective biological half-life of about 14 days. Within one month or so after ingestion, essentially all tritium is cleared. Organically bound tritium (tritium that is incorporated in organic compounds) can remain in the body for a longer period.

Tritium is produced naturally in the upper atmosphere when cosmic rays strike air molecules. Tritium is also produced during nuclear weapons explosions, as a by-product in reactors producing electricity, and in special production reactors, where the isotopes lithium-6 and/or boron-10 are activated to produce tritium. Like normal water, tritiated water is colorless and odorless. Tritiated water behaves chemically and physically like non-tritiated water in the subsurface, and therefore tritiated water will travel at the same velocity as the average groundwater velocity.

Tritium has a half-life of approximately 12.3 years. It decays spontaneously to helium-3 (^3He). This radioactive decay releases a beta particle (low-energy electron). The radioactive decay of tritium is the source of the health risk from exposure to tritium. Tritium is one of the least dangerous radionuclides because it emits very weak beta radiation and leaves the body relatively quickly. Since tritium is almost always found as water, it goes directly into soft tissues and organs. The associated dose to these tissues is generally uniform and is dependent on the water content of the specific tissue.

SECTION III. INTRODUCTION

III. INTRODUCTION

Cooper Nuclear Station is located in Nemaha County in the southeast corner of Nebraska on the Missouri River. A portion of the site extends into Missouri. The reactor is an 830-megawatt (net electrical) boiling water reactor. Initial criticality was attained on February 21, 1974.

This report covers those analyses performed by Teledyne Brown Engineering (TBE) on samples collected in 2018.

III. INTRODUCTION (cont)

A. Objectives of the Radiological Groundwater Protection Program (RGPP)

The long-term objectives of the RGPP are as follows:

1. Identify suitable locations to monitor and evaluate potential impacts from station operations before significant radiological impact to the environment and potential drinking water sources.
2. Understand the local hydrogeologic regime in the vicinity of the station and maintain up-to-date knowledge of flow patterns on the surface and shallow subsurface.
3. Perform routine water sampling and radiological analysis of water from selected locations.
4. Report new leaks, spills, or other detections with potential radiological significance to stakeholders in a timely manner.
5. Regularly assess analytical results to identify adverse trends.
6. Take necessary corrective actions to protect groundwater resources.

B. Implementation of the Objectives

The objectives identified have been implemented at CNS as discussed below:

1. Cooper Nuclear Station will continue to perform routine sampling and radiological analysis of water from selected locations.
2. Cooper Nuclear Station has implemented procedures to identify and report new leaks, spills, or other detections with potential radiological significance in a timely manner.
3. Cooper Nuclear Station staff assesses analytical results on an ongoing basis to identify adverse trends.

C. Program Description

1. Sample Collection

Sample locations can be found in Appendix A, Table A-1 and Map A-1.

Groundwater

Samples of water are collected, managed, transported and analyzed in

III. INTRODUCTION (cont)

accordance with approved procedures following regulatory methods. Sample locations, sample collection frequencies and analytical frequencies are controlled in accordance with approved station procedures. Contractor and/or station personnel are trained in the collection, preservation management, and shipment of samples, as well as in documentation of sampling events. Analytical laboratories are subject to internal quality assurance programs, inter-laboratory cross-check programs, as well as nuclear industry audits. Station personnel review and evaluate all analytical data deliverables after initial review by the contractor.

Analytical data results are reviewed by station personnel for adverse trends or changes to hydrogeologic conditions.

SECTION IV. PROGRAM DESCRIPTION

IV. Program Description

A. Sample Analysis

This section describes the general analytical methodologies used by TBE to analyze the environmental samples for radioactivity for the CNS RGPP in 2018.

In order to achieve the stated objectives, the current program analyzes each sample for tritium. If a sample indicates tritium above TBE's lower limit of detection (LLD), then the sample is analyzed for gamma emitters (Be-7, K-40, Mn-54, Co-58, Fe-59, Co-60, Zn-65, Zr-95, Ru-103, Ru-106, I-131, Cs-134, Cs-137, Ba-140, Ce-141, Ce-144, Ra-226 and Th-228). If the sample indicates gamma emitters (other than those that are naturally occurring) above TBE's LLD, then the sample is analyzed for Hard to Detects (HTDs – Gross Alpha, Fe-55, Ni-63, Sr-90, Sr-91).

Note: Statistically positive results include their respective uncertainties. Results reported below TBE's LLD for a given radio nuclide are preceded with "L.T." (= "Less Than").

B. Data Interpretation

The radiological data collected prior to CNS becoming operational were used as a baseline with which these operational data were compared. For the purpose of this report, CNS was considered operational at initial criticality. Several factors were important in the interpretation of the data:

1. Lower Limit of Detection and Minimum Detectable Concentration

The lower limit of detection (LLD) is specified by federal regulation as a minimum sensitivity value that must be achieved routinely by the analytical parameter.

2. Laboratory Measurements Uncertainty

The estimated uncertainty in measurement of tritium in environmental samples is frequently on the order of 50% of the measurement value.

Statistically, the exact value of a measurement is expressed as a range with a stated level of confidence. The convention is to report results with a 95% level of confidence. The uncertainty comes from calibration standards, sample volume or weight measurements, sampling uncertainty and other factors. CNS reports the uncertainty of a measurement created by statistical process (counting error). Each result has two values calculated. CNS reports the result with plus or minus (\pm) the estimated sample standard deviation.

IV. Program Description (cont)

Analytical uncertainties are reported at the 95% confidence level in this report for reporting consistency with the REMP.

Gamma spectroscopy results for each type of sample were grouped as follows:

For groundwater 19 nuclides, Be-7, K-40, Mn-54, Co-58, Fe-59, Co-60, Zn-65, Zr-95, Ru-103, Ru-106, I-131, Cs-134, Cs-137, Ba-140, La-140, Ce-141, Ce-144, Ra-226 and Th-228 were reported.

SECTION V. RESULTS AND DISCUSSION

V. Results and Discussion

A. *Groundwater Results*

Tritium

Samples from 23 locations were analyzed for tritium activity (Table B-1, Appendix B). Tritium was detected at six locations. Tritium values ranged from 321 to 2,210 pCi/L. All values were below the United States Environmental Protection Agency (USEPA) drinking water standard (and the Nuclear Regulatory Commission [NRC] reporting limit) of 20,000 pCi/liter.

Gamma Emitters

No gamma emitting nuclides were detected (Table B-1, Appendix B).


APPENDIX A

**LOCATION DESIGNATION OF THE ANNUAL
RADIOLOGICAL GROUNDWATER PROTECTION
PROGRAM REPORT (ARGPPR)**

TABLE A-1: Radiological Groundwater Protection Program - Sampling Locations,
Nebraska Public Power District, Cooper Nuclear Station,
2018

Site	Type
Ground High Capacity Non-Potable Well-1A	Ground Water
Ground High Capacity Non-Potable Well-1B	Ground Water
Ground Monitoring Well-1D	Ground Water
Ground Monitoring Well-1S	Ground Water
Ground Monitoring Well-2	Ground Water
Ground Monitoring Well-3	Ground Water
Ground Monitoring Well-4D	Ground Water
Ground Monitoring Well-4S	Ground Water
Ground Monitoring Well-5	Ground Water
Ground Monitoring Well-6	Ground Water
Ground Monitoring Well-7D	Ground Water
Ground Monitoring Well-7S	Ground Water
Ground Monitoring Well-8	Ground Water
Ground Monitoring Well-10	Ground Water
Ground Monitoring Well-10D	Ground Water
Ground Monitoring Well-11	Ground Water
Ground Monitoring Well-12	Ground Water
Ground Monitoring Well-13	Ground Water
Ground Monitoring Well-14	Ground Water
Ground Monitoring Well-15	Ground Water
Ground Monitoring Well-16	Ground Water
Ground Monitoring Well-17	Ground Water
Ground Monitoring Well-18	Ground Water

MAP A-1

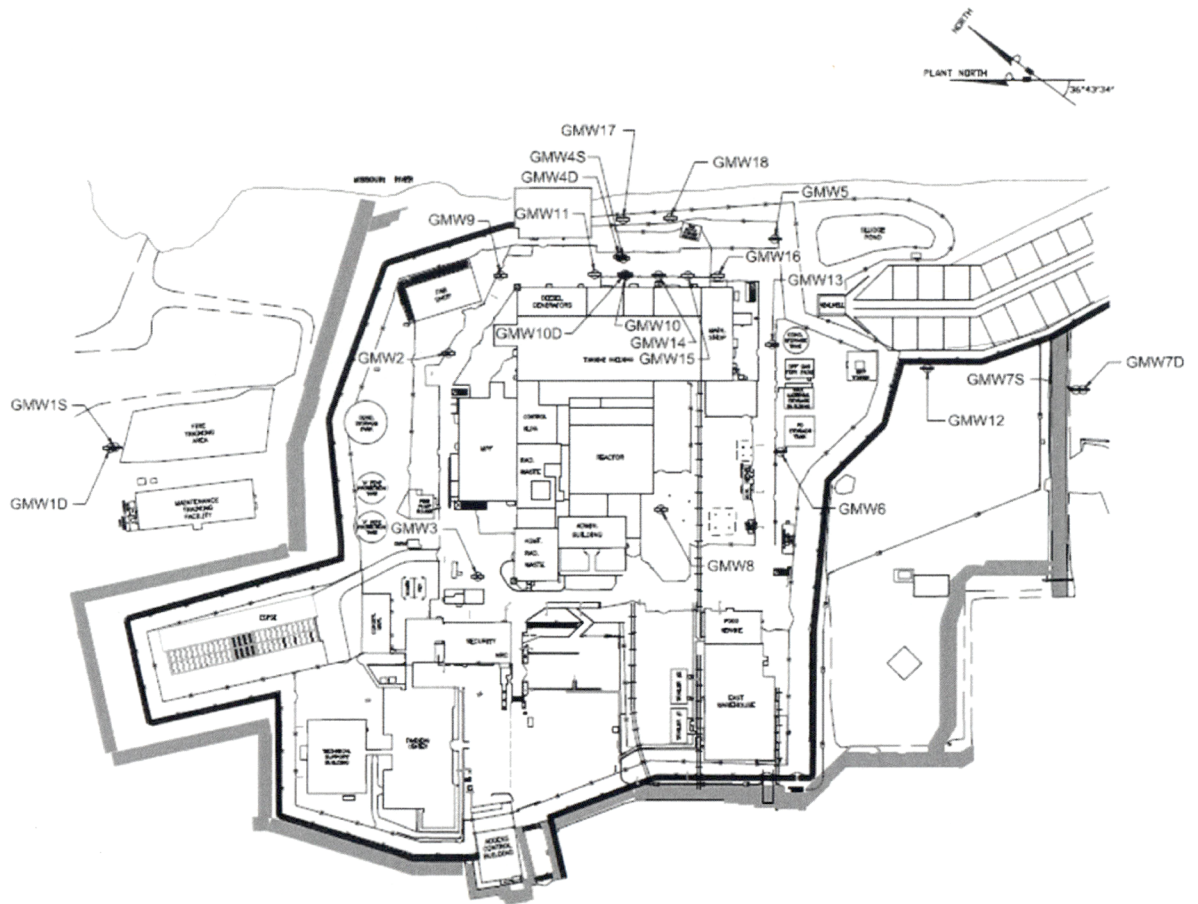

Routine Well Water Sample Locations for the Radiological Groundwater Protection Program, Nebraska Public Power District, Cooper Nuclear Station, 2018

APPENDIX B

**DATA TABLES OF THE ANNUAL RADIOLOGICAL
GROUNDWATER PROTECTION PROGRAM REPORT
(ARGPPR)**

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER RIVER WELL 1A

DATE COLLECTED 11/12/2018

GAMMA SPECTRUM ANALYSIS: (a)

BE-7
K-40
MN-54
CO-58
FE-59
CO-60
ZN-65
ZR-95
RU-103
RU-106
I-131
CS-134
CS-137
BA-140
LA-140
CE-141
CE-144
RA-226
TH-228

H-3 < 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER RIVER WELL 1B

DATE COLLECTED 2/9/2018

GAMMA SPECTRUM ANALYSIS: (a)

BE-7
K-40
MN-54
CO-58
FE-59
CO-60
ZN-65
ZR-95
RU-103
RU-106
I-131
CS-134
CS-137
BA-140
LA-140
CE-141
CE-144
RA-226
TH-228

H-3 < 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 1D

DATE COLLECTED	6/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)
BE-7		
K-40		
MN-54		
CO-58		
FE-59		
CO-60		
ZN-65		
ZR-95		
RU-103		
RU-106		
I-131		
CS-134		
CS-137		
BA-140		
LA-140		
CE-141		
CE-144		
RA-226		
TH-228		
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 1S

DATE COLLECTED	6/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)
BE-7		
K-40		
MN-54		
CO-58		
FE-59		
CO-60		
ZN-65		
ZR-95		
RU-103		
RU-106		
I-131		
CS-134		
CS-137		
BA-140		
LA-140		
CE-141		
CE-144		
RA-226		
TH-228		
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
**COOPER NUCLEAR STATION
 WATER - GROUND (PCI/LITER)**

STATION NUMBER 2

DATE COLLECTED	3/29/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 3

DATE COLLECTED	6/26/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)
BE-7		
K-40		
MN-54		
CO-58		
FE-59		
CO-60		
ZN-65		
ZR-95		
RU-103		
RU-106		
I-131		
CS-134		
CS-137		
BA-140		
LA-140		
CE-141		
CE-144		
RA-226		
TH-228		
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
**COOPER NUCLEAR STATION
 WATER - GROUND (PCI/LITER)**

STATION NUMBER 4D

DATE COLLECTED	3/30/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 4S

DATE COLLECTED	3/30/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:		(a)		
BE-7	< 4.E+01		< 4.E+01	< 2.E+01
K-40	< 4.E+01		< 4.E+01	< 4.E+01
MN-54	< 2.E+00		< 2.E+00	< 2.E+00
CO-58	< 3.E+00		< 4.E+00	< 2.E+00
FE-59	< 1.E+01		< 1.E+01	< 5.E+00
CO-60	< 2.E+00		< 2.E+00	< 1.E+00
ZN-65	< 4.E+00		< 4.E+00	< 3.E+00
ZR-95	< 7.E+00		< 7.E+00	< 4.E+00
RU-103	< 7.E+00		< 7.E+00	< 3.E+00
RU-106	< 2.E+01		< 2.E+01	< 2.E+01
I-131	< 3.E+03		< 2.E+03	< 3.E+01
CS-134	< 2.E+00		< 2.E+00	< 2.E+00
CS-137	< 2.E+00		< 2.E+00	< 2.E+00
BA-140	< 6.E+02		< 6.E+02	< 4.E+01
LA-140	< 2.E+02		< 2.E+02	< 1.E+01
CE-141	< 2.E+01		< 2.E+01	< 5.E+00
CE-144	< 1.E+01		< 2.E+01	< 1.E+01
RA-226	< 4.E+01		< 5.E+01	< 4.E+01
TH-228	< 3.E+00		< 3.E+00	< 3.E+00
H-3	3.92E+02 ± 2.12E+02	< 3.E+02	3.21E+02 ± 2.09E+02	3.53E+02 ± 2.01E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 5

DATE COLLECTED	06/27/18	11/15/18
GAMMA SPECTRUM ANALYSIS:	(a)	(a)
BE-7		
K-40		
MN-54		
CO-58		
FE-59		
CO-60		
ZN-65		
ZR-95		
RU-103		
RU-106		
I-131		
CS-134		
CS-137		
BA-140		
LA-140		
CE-141		
CE-144		
RA-226		
TH-228		
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 6

DATE COLLECTED	3/28/2018	6/27/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)		(a)
BE-7			< 4.E+01	
K-40			< 4.E+01	
MN-54			< 2.E+00	
CO-58			< 4.E+00	
FE-59			< 1.E+01	
CO-60			< 2.E+00	
ZN-65			< 4.E+00	
ZR-95			< 8.E+00	
RU-103			< 9.E+00	
RU-106			< 2.E+01	
I-131			< 5.E+03	
CS-134			< 2.E+00	
CS-137			< 2.E+00	
BA-140			< 8.E+02	
LA-140			< 3.E+02	
CE-141			< 2.E+01	
CE-144			< 2.E+01	
RA-226			< 4.E+01	
TH-228			< 3.E+00	
H-3	< 3.E+02	< 3.E+02	4.08E+02 ± 2.09E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 7D

DATE COLLECTED	6/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)
BE-7		
K-40		
MN-54		
CO-58		
FE-59		
CO-60		
ZN-65		
ZR-95		
RU-103		
RU-106		
I-131		
CS-134		
CS-137		
BA-140		
LA-140		
CE-141		
CE-144		
RA-226		
TH-228		
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 7S

DATE COLLECTED	6/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)
BE-7		
K-40		
MN-54		
CO-58		
FE-59		
CO-60		
ZN-65		
ZR-95		
RU-103		
RU-106		
I-131		
CS-134		
CS-137		
BA-140		
LA-140		
CE-141		
CE-144		
RA-226		
TH-228		
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
**COOPER NUCLEAR STATION
 WATER - GROUND (PCI/LITER)**

STATION NUMBER 8

DATE COLLECTED	3/28/2018	6/27/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 9

DATE COLLECTED	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)
BE-7			
K-40			
MN-54			
CO-58			
FE-59			
CO-60			
ZN-65			
ZR-95			
RU-103			
RU-106			
I-131			
CS-134			
CS-137			
BA-140			
LA-140			
CE-141			
CE-144			
RA-226			
TH-228			
H-3	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 10

DATE COLLECTED	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:			
	(a)		
BE-7	< 6.E+01		< 2.E+01
K-40	< 1.E+01		< 3.E+01
MN-54	< 2.E+00		< 1.E+00
CO-58	< 5.E+00		< 2.E+00
FE-59	< 2.E+01		< 5.E+00
CO-60	< 2.E+00		< 1.E+00
ZN-65	< 4.E+00		< 3.E+00
ZR-95	< 9.E+00		< 3.E+00
RU-103	< 1.E+01		< 3.E+00
RU-106	< 2.E+01		< 1.E+01
I-131	< 9.E+04		< 5.E+01
CS-134	< 2.E+00		< 1.E+00
CS-137	< 1.E+00		< 1.E+00
BA-140	< 5.E+03		< 4.E+01
LA-140	< 2.E+03		< 1.E+01
CE-141	< 3.E+01		< 5.E+00
CE-144	< 1.E+01		< 1.E+01
RA-226	< 3.E+01		< 3.E+01
TH-228	< 3.E+00		< 2.E+00
H-3	4.36E+02 ± 2.19E+02	< 3.E+02	4.34E+02 ± 2.10E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 10D

DATE COLLECTED	3/30/2018	6/28/2018	11/15/2018
----------------	-----------	-----------	------------

GAMMA SPECTRUM ANALYSIS:

BE-7	< 4.E+01	< 7.E+01	< 2.E+01
K-40	< 3.E+01	< 3.E+01	< 3.E+01
MN-54	< 2.E+00	< 2.E+00	< 2.E+00
CO-58	< 3.E+00	< 6.E+00	< 2.E+00
FE-59	< 1.E+01	< 2.E+01	< 5.E+00
CO-60	< 2.E+00	< 2.E+00	< 2.E+00
ZN-65	< 4.E+00	< 5.E+00	< 4.E+00
ZR-95	< 7.E+00	< 1.E+01	< 4.E+00
RU-103	< 7.E+00	< 1.E+01	< 3.E+00
RU-106	< 2.E+01	< 2.E+01	< 2.E+01
I-131	< 3.E+03	< 9.E+04	< 3.E+01
CS-134	< 2.E+00	< 2.E+00	< 2.E+00
CS-137	< 2.E+00	< 2.E+00	< 2.E+00
BA-140	< 6.E+02	< 5.E+03	< 4.E+01
LA-140	< 2.E+02	< 2.E+03	< 1.E+01
CE-141	< 1.E+01	< 4.E+01	< 5.E+00
CE-144	< 1.E+01	< 2.E+01	< 1.E+01
RA-226	< 3.E+01	< 4.E+01	< 4.E+01
TH-228	< 3.E+00	< 3.E+00	< 3.E+00
 H-3	 3.92E+02 ± 2.05E+02	 4.06E+02 ± 2.18E+02	 4.16E+02 ± 2.06E+02

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 11

DATE COLLECTED	3/29/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:				
BE-7	< 4.E+01	< 6.E+01	< 5.E+01	< 2.E+01
K-40	< 2.E+01	< 4.E+01	< 3.E+01	< 1.E+01
MN-54	< 2.E+00	< 2.E+00	< 2.E+00	< 2.E+00
CO-58	< 3.E+00	< 5.E+00	< 5.E+00	< 2.E+00
FE-59	< 1.E+01	< 2.E+01	< 1.E+01	< 5.E+00
CO-60	< 2.E+00	< 2.E+00	< 2.E+00	< 2.E+00
ZN-65	< 3.E+00	< 4.E+00	< 5.E+00	< 4.E+00
ZR-95	< 6.E+00	< 1.E+01	< 9.E+00	< 4.E+00
RU-103	< 7.E+00	< 2.E+01	< 9.E+00	< 3.E+00
RU-106	< 2.E+01	< 2.E+01	< 2.E+01	< 2.E+01
I-131	< 3.E+03	< 1.E+05	< 3.E+03	< 4.E+01
CS-134	< 2.E+00	< 2.E+00	< 2.E+00	< 2.E+00
CS-137	< 2.E+00	< 2.E+00	< 2.E+00	< 2.E+00
BA-140	< 6.E+02	< 6.E+03	< 7.E+02	< 4.E+01
LA-140	< 2.E+02	< 2.E+03	< 2.E+02	< 1.E+01
CE-141	< 2.E+01	< 4.E+01	< 2.E+01	< 7.E+00
CE-144	< 1.E+01	< 2.E+01	< 2.E+01	< 2.E+01
RA-226	< 3.E+01	< 4.E+01	< 5.E+01	< 5.E+01
TH-228	< 3.E+00	< 3.E+00	< 4.E+00	< 4.E+00
H-3	4.09E+02 ± 2.06E+02	4.05E+02 ± 2.22E+02	4.41E+02 ± 2.19E+02	4.21E+02 ± 2.05E+02

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 12

DATE COLLECTED 11/15/2018

GAMMA SPECTRUM ANALYSIS: (a)

BE-7
K-40
MN-54
CO-58
FE-59
CO-60
ZN-65
ZR-95
RU-103
RU-106
I-131
CS-134
CS-137
BA-140
LA-140
CE-141
CE-144
RA-226
TH-228

H-3 < 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 13

DATE COLLECTED	3/15/2018	3/30/2018	5/31/2018	6/26/2018
GAMMA SPECTRUM ANALYSIS:				
BE-7	< 2.E+01	< 5.E+01	< 2.E+01	< 2.E+01
K-40	< 3.E+01	< 7.E+01	< 3.E+01	< 3.E+01
MN-54	< 2.E+00	< 4.E+00	< 2.E+00	< 2.E+00
CO-58	< 2.E+00	< 5.E+00	< 2.E+00	< 2.E+00
FE-59	< 5.E+00	< 1.E+01	< 5.E+00	< 4.E+00
CO-60	< 2.E+00	< 5.E+00	< 2.E+00	< 2.E+00
ZN-65	< 4.E+00	< 8.E+00	< 3.E+00	< 3.E+00
ZR-95	< 3.E+00	< 9.E+00	< 4.E+00	< 3.E+00
RU-103	< 3.E+00	< 7.E+00	< 2.E+00	< 3.E+00
RU-106	< 1.E+01	< 4.E+01	< 2.E+01	< 2.E+01
I-131	< 3.E+01	< 2.E+01	< 2.E+01	< 1.E+01
CS-134	< 2.E+00	< 6.E+00	< 2.E+00	< 2.E+00
CS-137	< 2.E+00	< 5.E+00	< 2.E+00	< 2.E+00
BA-140	< 3.E+01	< 5.E+01	< 2.E+01	< 2.E+01
LA-140	< 1.E+01	< 1.E+01	< 8.E+00	< 6.E+00
CE-141	< 5.E+00	< 1.E+01	< 5.E+00	< 5.E+00
CE-144	< 1.E+01	< 4.E+01	< 1.E+01	< 1.E+01
RA-226	< 4.E+01	< 1.E+02	< 4.E+01	< 5.E+01
TH-228	< 3.E+00	< 8.E+00	< 3.E+00	< 4.E+00
H-3	2.21E+03 ± 2.89E+02	1.61E+03 ± 2.66E+02	1.45E+03 ± 2.72E+02	1.00E+03 ± 2.65E+02

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 13

DATE COLLECTED	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:		
		(a)
BE-7	< 6.E+01	
K-40	< 7.E+01	
MN-54	< 9.E+00	
CO-58	< 9.E+00	
FE-59	< 2.E+01	
CO-60	< 7.E+00	
ZN-65	< 1.E+01	
ZR-95	< 1.E+01	
RU-103	< 9.E+00	
RU-106	< 6.E+01	
I-131	< 1.E+01	
CS-134	< 8.E+00	
CS-137	< 8.E+00	
BA-140	< 3.E+01	
LA-140	< 1.E+01	
CE-141	< 1.E+01	
CE-144	< 6.E+01	
RA-226	< 2.E+02	
TH-228	< 2.E+01	
H-3	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 14

DATE COLLECTED	3/28/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 15

DATE COLLECTED	3/28/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
**COOPER NUCLEAR STATION
 WATER - GROUND (PCI/LITER)**

STATION NUMBER 16

DATE COLLECTED	3/28/2018	6/26/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
**COOPER NUCLEAR STATION
 WATER - GROUND (PCI/LITER)**

STATION NUMBER 17

DATE COLLECTED	3/30/2018	6/27/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

B-1
COOPER NUCLEAR STATION
WATER - GROUND (PCI/LITER)

STATION NUMBER 18

DATE COLLECTED	3/30/2018	6/27/2018	9/27/2018	11/15/2018
GAMMA SPECTRUM ANALYSIS:	(a)	(a)	(a)	(a)
BE-7				
K-40				
MN-54				
CO-58				
FE-59				
CO-60				
ZN-65				
ZR-95				
RU-103				
RU-106				
I-131				
CS-134				
CS-137				
BA-140				
LA-140				
CE-141				
CE-144				
RA-226				
TH-228				
H-3	< 3.E+02	< 3.E+02	< 3.E+02	< 3.E+02

(a) Gamma analysis not performed. Refer to section IV.A for additional information.

NLS2019024
Enclosure 2

Enclosure 2

Cooper Nuclear Station Offsite Dose Assessment Manual

COOPER NUCLEAR STATION
 OFFSITE DOSE ASSESSMENT MANUAL
 -ODAM-
 LIST OF EFFECTIVE PAGES

<u>Page</u>	<u>Rev/Date</u>	<u>Page</u>	<u>Rev/Date</u>	<u>Page</u>	<u>Rev/Date</u>
i	8/26/99	37	8/26/99	C-5	12/04/03
ii	8/26/99	38	8/26/99	C-6	2/06/02
		39	10/31/13	C-7	10/03/18
1	10/15/96	40	10/31/13	C-8	8/26/99
2	8/26/99	41	10/31/13	C-9	10/03/18
3	Original	42	10/31/13		
4	10/15/96	43	10/31/13	Appendix D:	
5	10/15/96	44	10/31/13		
6	8/26/99	45	10/31/13	iii	10/10/01
7	8/26/99	46	10/31/13		
8	10/15/96	47	8/26/99	D 1.0-1	10/22/04
9	8/26/99	48	2/22/01		
10	8/26/99	49	8/26/99	D 2.0-1	10/22/04
11	8/26/99	50	2/22/01	D 2.0-2	10/22/04
12	8/7/00	51	8/26/99		
13	12/29/88	52	8/26/99	D 3.0-1	10/10/01
14	12/29/88	53	8/26/99	D 3.0-2	10/10/01
15	5/16/94	54	8/26/99		
16	8/26/99			D 3.1-1	10/22/04
17	Original	Appendix A:		D 3.1-2	10/22/04
18	Original			D 3.1-3	03/31/04
19	Original	(Deleted) 1/27/89		D 3.1-4	03/31/04
20	10/15/96			D 3.1-5	10/10/01
21	8/26/99	Appendix B:		D 3.1-6	10/22/04
22	8/26/99			D 3.1-7	10/22/04
23	8/26/99	B-1 Original		D 3.1-8	10/10/01
24	8/26/99	B-2 Original		D 3.1-9	01/03/03
25	8/7/00	B-3 Original		D 3.1-10	10/10/01
26	8/26/99	B-4 Original			
27	8/26/99	B-5 Original		D 3.2-1	10/22/04
28	8/26/99	B-6 Original		D 3.2-2	0
29	8/26/99	B-7 Original		D 3.2-3	10/31/13
30	8/26/99			D 3.2-4	10/31/13
31	8/26/99	Appendix C:		D 3.2-5	10/31/13
32	8/26/99			D 3.2-6	10/22/04
33	8/26/99	C-1 Original		D 3.2-7	03/31/04
34	8/26/99	C-2 2/06/02		D 3.2-8	03/31/04
35	8/26/99	C-3 2/06/02		D 3.2-9	03/31/04
36	8/26/99	C-4 2/06/02		D 3.2-10	10/10/01

NOTE: Original refers to page in effect on July 1, 1986 when the ODAM was implemented.

COOPER NUCLEAR STATION
 OFFSITE DOSE ASSESSMENT MANUAL
 -ODAM-
 LIST OF EFFECTIVE PAGES

<u>Page</u>	<u>Rev/Date</u>	<u>Page</u>	<u>Rev/Date</u>	<u>Page</u>	<u>Rev/Date</u>
D 3.2-11	0	D 4.2-1	10/10/01	B 3.3-1	0
D 3.2-12	10/10/01			B 3.3-2	04/30/08
D 3.2-13	0	D 4.3-1	10/10/01	B 3.3-3	04/30/08
D 3.2-14	10/10/01				
D 3.2-15	08/31/06	D 5.1-1	10/10/01	B 3.4-1	0
D 3.2-16	0				
		D 5.2-1	10/22/04	B 3.5-1	0
D 3.3-1	10/10/01	D 5.2-2	0		
D 3.3-2	10/10/01			B 4.1-1	0
D 3.3-3	10/10/01	D 5.3-1	8/7/00		
D 3.3-4	10/10/01	D 5.3-2	8/7/00	B 4.2-1	0
D 3.3-5	10/10/01				
D 3.3-6	10/10/01	D 5.4-1	1	B 4.3-1	0
D 3.3-7	10/10/01	D 5.4-2	0		
D 3.3-8	10/10/01			B 5.1-1	8/26/99
D 3.3-9	02/21/18	D 5.5-1	1		
D 3.3-10	10/10/01			B 5.2-1	0
D 3.3-11	03/28/06	iv	2/22/01		
D 3.3-12	03/28/06			B 5.3-1	0
D 3.3-13	03/28/06	B 3.0-1	12/04/03		
D 3.3-14	03/20/03	B 3.0-2	12/04/03	B 5.4-1	1
D 3.3-15	08/27/14				
D 3.3-16	02/21/18	B 3.1-1	10/22/04	B 5.5-1	1
D 3.3-17	08/27/14	B 3.1-2	0		
D 3.3-18	08/27/14	B 3.1-3	0		
		B 3.1-4	0		
D 3.4-1	10/10/01	B 3.1-5	0		
D 3.4-2	10/10/01	B 3.1-6	0		
		B 3.1-7	0		
D 3.5-1	10/10/01	B 3.1-8	0		
D 3.5-2	10/31/13	B 3.1-9	0		
D 3.5-3	01/26/12				
		B 3.2-1	10/22/04		
D 4.1-1	10/10/01	B 3.2-2	8/7/00		
D 4.1-2	0	B 3.2-3	0		
D 4.1-3	0	B 3.2-4	0		
D 4.1-4	2/22/01	B 3.2-5	0		
D 4.1-5	8/26/99	B 3.2-6	0		
D 4.1-6	0	B 3.2-7	08/31/06		

NOTE: Original refers to page in effect on July 1, 1986 when the ODAM was implemented.

COOPER NUCLEAR STATION
 OFFSITE DOSE ASSESSMENT MANUAL
 FOR GASEOUS AND LIQUID EFFLUENTS

	<u>Page</u>
1.0 Introduction	-1-
2.0 Liquid Effluent	-2-
2.1 <u>Radioactivity In Liquid Waste</u>	-2-
2.2 <u>Aqueous Concentration</u>	-2-
2.3 <u>Method of Establishing Alarm Setpoints</u>	-4-
2.3.1 <u>Setpoint for a Batch Release</u>	-5-
2.3.2 <u>Setpoint for a Continuous Release</u>	-8-
2.4 <u>Radioactivity Concentration in Water Beyond the Site and Exclusion Area Boundary</u>	-10-
2.5 <u>Accumulated Personal Maximum Dose</u>	-12-
2.6 <u>Projected Personal Maximum Dose</u>	-15-
3.0 Gaseous Effluent	-17-
3.1 <u>Introduction</u>	-17-
3.2 <u>Radioactivity in Gaseous Effluent</u>	-17-
3.3 <u>Main Condenser Air Ejector Noble Gas Monitor Alarm Setpoint</u>	-19-
3.4 <u>Effluent Noble Gas Monitor Alarm Setpoint</u>	-20-
3.4.1 <u>Setpoint Based on Dose Rate</u>	-20-
3.5 <u>Noble Gas Gamma Radiation Dose Accumulated in Air</u>	-24-
3.6 <u>Noble Gas Beta Radiation Dose Accumulated in Air</u>	-27-
3.7 <u>Dose Due to Iodine and Particulates in Gaseous Effluents*</u>	-29-
3.7.1 <u>GASPAR Method</u>	-30-
3.7.2 <u>Alternate Method</u>	-31-
3.8 <u>Dose to a Person from Noble Gases</u>	-34-

3.8.1	<u>Gamma Dose to Total Body - GASPAR Method</u>	-34-
3.8.1.1	<u>Alternate Method</u>	-35-
3.8.2	<u>Dose to Skin - GASPAR Method</u>	-36-
3.8.2.1	<u>Alternate Method</u>	-36-
3.9	<u>Projected Organ Dose Due to Gaseous Effluent</u>	-37-
3.10	<u>Dose Rate Due to Tritium, Iodines, and Particulates in Gaseous Effluents</u>	-38-
4.0	<u>Dose Commitment From Releases Over Extended Time</u>	-40-
4.1	<u>Releases During A Quarter</u>	-40-
4.2	<u>Releases During 12 Months</u>	-42-
4.2.1	<u>Calculated Doses</u>	-43-
4.2.2	<u>Environmental Measurements</u>	-45-
5.0	<u>Radiological Environmental Monitoring Program</u>	-47-
5.1	<u>Environmental Sampling Program</u>	-47-

APPENDIX A - (Deleted)

APPENDIX B - Reference Meteorological Data

APPENDIX C - Environmental Radiation Monitoring Program
Sample Types and Sample Station Locations

APPENDIX D - ODAM Specifications

OFFSITE DOSE ASSESSMENT MANUAL
FOR GASEOUS AND LIQUID EFFLUENT

1.0 Introduction

This Manual describes acceptable methods of calculating radioactivity concentrations in the environment and the potentially resultant personal dose equivalent commitment beyond the site and exclusion area boundary that are associated with LWR liquid and gaseous effluents. The radioactivity concentrations and dose estimates are used to demonstrate compliance with the Appendix D Specifications required by 10 CFR 50.36.a. The methodology stated in this Manual is acceptable for use in demonstrating operational compliance with 10 CFR 20.1302, 10 CFR 50 Appendix I, and 40 CFR 190.10(a). Only the dose attributable to the Station is considered in demonstrating compliance with 40 CFR 190 since no other nuclear facility exists within 50 miles of the Station.

Calculations are made to assess the air dose from radioactive noble gases near ground level beyond the site and exclusion area boundary location that could be occupied by a person where the maximum air dose is expected. The maximum dose commitment to the person beyond the site and exclusion area boundary potentially experiencing the maximum exposure to all other radioactive material measured in gaseous and liquid effluents released from the Station is also calculated. Alternatively, the dose commitment from effluents other than radioactive noble gases may be calculated to correspond with residence at an occupiable location where airborne exposures are unlikely to underestimate those experienced by the maximally exposed person.

2.0 Liquid Effluent

2.1 Radioactivity In Liquid Waste

The concentration of radionuclides in liquid waste is determined by sampling and analysis in accord with Table D3.1.1-1, Radioactive Liquid Waste Sampling and Analysis. Alternatively, pre-release analysis of the radioactivity concentration in liquid waste required by DSR 3.1.1.1 may be done by gross β - γ counting provided an effluent concentration beyond the site and exclusion area boundary for unidentified emitters, 1×10^{-8} $\mu\text{Ci/ml}$, is applied where the discharge canal meets the river. When a radionuclide concentration is below the LLD for the analysis, it is not reported as being present in the sample. A general diagram of the liquid effluent stream components is shown in Figure 3.1A.

2.2 Aqueous Concentration

Radioactive material in liquid effluent is diluted successively by water flowing in the discharge canal and in the river. The diluted concentration of radionuclide i in a receiving stream is estimated with the equation

$$C_{zi} = C_i \frac{F_1}{F_2}$$

where C_i = concentration of radionuclide i in liquid radwaste released ($\mu\text{Ci/ml}$)

C_{zi} = concentration of radionuclide i in the receiving stream ($\mu\text{Ci/ml}$)

F_1 = release rate of liquid radwaste (ml/sec)*

F_2 = dilution flow of receiving stream of water (ml/sec)*

* F_1 , F_2 , and F_c may have any convenient units of flow (i.e., volume/time) provided the units of all are identical.

For the purpose of calculating the radioactivity concentration in water beyond the site and exclusion area boundary (Section 2.4), the flow in the discharge canal, F_d , is assigned to F_2 .

This method of estimating concentration of radionuclide i in a receiving stream is very conservative as it is based on not exceeding the concentration limits in 10CFR20 Appendix B, Table 2, Column 2 during the period of radioactive material discharge.

As an alternate to the above method, the concentration of radionuclide i in a receiving stream can be calculated using the monthly and quarterly composite samples. This method, discussed in the basis of DSR 3.1.1.2, is performed as follows:

For Sr-89, Sr-90 and Fe-55

$$C_{zi} = \frac{C_{qci} V_{rq}}{V_{dq}}$$

where C_{zi} = concentration of radionuclide i in the receiving stream ($\mu\text{ci/ml}$)

C_{qci} = concentration of radionuclide i in the quarterly composite sample ($\mu\text{ci/ml}$)

V_{rq} = volume of liquid radwaste discharged during the quarter (ml)

V_{dq} = total volume of dilution flow corresponding to the time when V_{rq} was discharged for the quarter (ml)

For all other nuclides

$$C_{zi} = \frac{C_{mci} V_{rm}}{V_{dm}}$$

- where C_{zi} = concentration of radionuclide i in the receiving stream ($\mu\text{ci/ml}$)
 C_{mci} = concentration of radionuclide i in the monthly composite sample ($\mu\text{ci/ml}$)
 V_{rm} = volume of liquid radwaste discharged during the month (ml)
 V_{dm} = total volume of dilution flow corresponding to the time when V_{rm} was discharged for the month (ml)

2.3 Method of Establishing Alarm Setpoints

The liquid waste effluent monitor and the service water monitor are connected to alarms which provide automatic indication when 10 CFR Part 20, Appendix B, Table 2, Column 2 concentrations are expected to be exceeded beyond the site and exclusion area boundary. With prompt action to reduce radioactive releases following an alarm, the liquid release limit of 10 CFR Part 20.1302 and the limits provided by 10 CFR Part 50, Appendix I, Section IV are unlikely to be exceeded after the alarm.

The alarm setpoint for the liquid effluent radiation monitor is derived from the concentration limit provided in 10 CFR Part 20, Appendix B, Table 2, Column 2 applied where the discharge canal flows into the river. The alarm setpoint does not consider dilution, dispersion, or decay of radioactive material in the river. The radiation monitoring and isolation points are located in the liquid radwaste effluent line and the service water effluent line through which radioactive effluent is, or may be, eventually discharged into the discharge canal.

The alarm setpoint calculation for each liquid effluent monitor is based upon measurement according to Table D3.1.1-1 of radioactivity in a batch of liquid to be released or in the continuous aqueous discharge. Alternatively, the alarm setpoint may be based upon gross β - γ activity analysis of the liquid waste provided the effluent concentration beyond the site and exclusion area boundary for unidentified emitters, 1×10^{-8} $\mu\text{Ci/ml}$, is observed.

In any case, a monitor may be set to alarm or trip at a lower activity concentration than the calculated setpoint.

2.3.1 Setpoint for a Batch Release

A sample of each batch of liquid radwaste is analyzed for I-131 and principal gamma emitters, or for total activity concentration prior to release. The ratio, $FMPC_{bp}$, of the activity concentration in the tank to the effluent concentration (10 CFR Part 20, Appendix B, Table 2, Column 2) beyond the site and exclusion area boundary is calculated with the equation

$$FMPC_{bp} = \sum_i \frac{C_{bpi}}{MPC_i} \text{ identified}$$

where $FMPC_{bp}$ = fraction of effluent concentration beyond the site and exclusion area boundary in batch derived from activity measured prior to release.

C_{bpi} = concentration of radionuclide i (including I-131 and principal gamma emitters) in batch sample taken prior to release ($\mu\text{Ci/ml}$).

MPC_i = effluent concentration beyond the site and exclusion area boundary of radionuclide i per 10 CFR Part 20, Appendix B, Table 2, Column 2 ($\mu\text{Ci/ml}$)

When $FMPC_{bp}$ is derived from analyses identifying iodine and principal gamma emitters only, the value $FMPC_{bp}$ may be adjusted to account for radionuclides measured in the monthly and quarterly composite sample, but not measured prior to release. This adjustment, derived from measurements during past calendar quarters, is calculated with the equation:

$$FMPC_b = FMPC_{bp} + E_b$$

where $E_b =$ (Previous quarterly average of the fraction of the effluent concentration in the discharge canal due to I-131 and primary gamma emitters) \div (Previous quarterly average of the fraction of the effluent concentration in the discharge canal due to all radionuclides in batch releases.)

A reference value of E_b , derived from representative past measurements may be used routinely.

Whether radioiodine and primary gamma emitters are identified prior to a batch release or not, the liquid radwaste effluent line radiation monitor alarm and isolation valve closure setpoint is determined with the equation:

$$S = \frac{A}{FMPC_b} \cdot \frac{F_{S2}}{F_{S1}} \cdot g + Bkg$$

- where S = radiation monitor alarm setpoint (cpm or $\mu\text{Ci/ml}$)
- A = counting rate (cpm/ml) or activity concentration ($\mu\text{Ci/ml}$) of sample from laboratory analysis*
- g = ratio of effluent radiation monitor counting rate to laboratory counting rate or activity concentration in a given batch of liquid (cpm per $\mu\text{Ci/ml}$ or $\mu\text{Ci/ml}$ per $\mu\text{Ci/ml}$)
- F_{S1} = maximum flow in the batch release line (gal/min)**
- F_{S2} = minimum flow in the discharge canal (gal/min)**
- Bkg = monitoring instrument background (cpm or $\mu\text{Ci/ml}$)

Note that $A \cdot FMPC_b$ represents the counting rate of a solution having the same radionuclide distribution as the sample and having the maximum permissible concentration of that mixture.

Gross β - γ analysis alone may be used to determine the radioactivity in a batch prior to release. In that event, the fraction of the effluent concentration beyond the site and exclusion area boundary in the batch is:

$$FMPC_{bp} = \frac{C_{bp}}{1 \times 10^{-8}}$$

where

- C_{bp} = gross or total radioactivity concentration in batch sample taken prior to release ($\mu\text{Ci/ml}$)
- 1×10^{-8} = effluent concentration beyond the site and exclusion area boundary of unidentified radionuclides ($\mu\text{Ci/ml}$)

*A equals $\sum_i C_{bpi}$ if isotopic analysis was performed or C_{bp} if gross activity analysis was performed.

**Any suitable but identical units of flow (volume/time).

The value of $FMPC_{bp}$ computed with this expression is substituted in the preceding equation to calculate the setpoint.

2.3.2 Setpoint for a Continuous Release

Continuous aqueous radioactive discharges are sampled and analyzed according to the schedule in Table D3.1.1-1. The ratio $FMPC_{cw}$, of the activity concentration in each of the continuous release streams of the effluent concentration beyond the site and exclusion area boundary is calculated with the equations.

$$FMPC_{cw} = \sum_i \frac{C_{cwi}}{MPC_i} \text{ identified}$$

where

$FMPC_{cw}$ = fraction of effluent concentration beyond the site and exclusion area boundary in continuous release based upon activity measured in weekly composite sample(s).

C_{cwi} = concentration of radionuclide i (including I-131 and principal gamma emitters) in weekly composite sample(s) ($\mu\text{Ci/ml}$)

When $FMPC_c$ is derived from analyses of I-131 and principal gamma emitters, it may be adjusted to account for radionuclides measured in the monthly and quarterly composite sample but not measured prior to release. Adjustment for radionuclides measured in monthly and quarterly composite samples but not in weekly composite samples is given by the equation

$$FMPC_c = FMPC_{cw} \div E_c$$

where $E_c =$ (Quarterly average fraction of the effluent concentration in the discharge canal due to I-131 and primary gamma emitters measured in weekly composite sample of continuous releases during previous quarter) \div (Quarterly average fraction of the effluent concentration in the discharge canal due to all radionuclides in samples of continuous releases during previous quarter.)

A reference value of E_c , derived from representative past measurements, may be used routinely, instead.

The alarm setpoint of the radiation monitor on the discharge line is determined with the equation

$$S = \frac{A}{FMPC_c} \cdot \frac{F_{S2}}{F_{S1}} \cdot g + Bkg$$

where $A =$ counting rate (cpm/ml) or activity concentration ($\mu\text{Ci/ml}$) of weekly composite sample in the laboratory.

Terms g , F_{S1} , F_{S2} , and Bkg are defined the same as in the setpoint equation for a batch release.

Gross β - γ analysis alone may be used to determine the radioactivity in a liquid radioactive discharge. In that event, the fraction of the effluent concentration beyond the site and exclusion area boundary in a sample of the release is:

$$FMPC_c = \frac{C_c}{1 \times 10^{-8}}$$

where C_c = gross or total radioactivity concentration in continuous aqueous release ($\mu\text{Ci/ml}$)
 1×10^{-8} = effluent concentration beyond the site and exclusion area boundary of unidentified radionuclides ($\mu\text{Ci/ml}$)

The value of FMPC_c computed with this expression is substituted in the preceding equation to calculate the setpoint.

In the event a long-term trend is evident in setpoints derived from the weekly sample and a setpoint value can be derived from the aggregate of the weekly samples which appears to have less variability and to better represent the effluent, then the setpoint based on the combined, long-term data may be used.

2.4 Radioactivity Concentration in Water Beyond the Site and Exclusion Area Boundary

DSR 3.1.1.2 requires that measured radioactivity concentrations in liquid releases be evaluated to verify that the activity concentration complied with Specification DLCO 3.1.1. Compliance with DLCO 3.1.1 is evaluated by calculating the average radioactivity concentration in water at the end of the discharge canal, expressed as a fraction of effluent concentration beyond the site and exclusion area boundary on the basis of measured release(s), per Table D3.1.1-1, of Fe-55, Sr-89, and Sr-90 averaged over no more than 92 days and other radionuclides averaged over no more than 31 days.

The average concentration of radioactive noble gases in discharge canal water may be calculated separately as a fraction of the effluent concentration 2×10^{-4} uCi/ml, since the critical exposure pathway for it, immersion in water, differs from the critical exposure pathway for other radionuclides in water, which is via ingestion of the water.

The average concentration, expressed as a fraction of the effluent concentration, is calculated with the equation:

$$\overline{FMPC} = \frac{1}{3785(TE-TB)} \sum_k \frac{1}{F2_k} \sum_i \frac{\hat{Q}_{ki}}{MPC_i}$$

- where \overline{FMPC} = fraction of the effluent concentration beyond the site and exclusion area boundary of a mixture of radionuclides in water (unitless, and should be limited to ≤ 1)
- 3785 = conversion factor (ml/gal)
- TE-TB = increment of time between beginning and ending period of interest during which the concentration is averaged (min)
- $F2_k$ = flow of aqueous stream beyond the site and exclusion area boundary into which radioactive release represented by sample k is diluted, i.e., the discharge canal flow during the release represented by sample k (gal/min)
- \hat{Q}_{ki} = quantity of radionuclide i represented by sample k which is released as an effluent within the time boundaries TB and TE (μ Ci)

MPC_i = maximum permissible concentration beyond the site and exclusion area boundary of radionuclide i per 10 CFR Part 20, Appendix B, Table 2, Column 2 ($\mu\text{Ci/ml}$)

The data used to compute FMPC are measured by the radioactive liquid sampling and analysis program described in Table D3.1.1-1.

2.5 Accumulated Personal Maximum Dose

DSR 3.1.3.1 requires the dose or dose commitment to a member of the public due to radioactive material released in liquid effluent to be calculated on a cumulative basis at least once every 31 days. The requirement is satisfied by computing the accumulated dose commitment to the most exposed organ and to the total body of a hypothetical person exposed by eating fish taken from the river beyond the site and exclusion area boundary near the discharge canal and drinking water taken from the river three miles downstream.

The accumulated dose commitment is computed at least once every 31 days, but may be computed as analyses becomes available. The dose will be calculated in accordance with Regulatory Guide 1.109, Revision 1, utilizing the LADTAP II computer code.*

The LADTAP II program is routinely used for calculating radiological dose assessments for inclusion in the CNS Radioactive Effluents Release Report.

*With quality factor for Tritium reduced from 1.7 to 1.0 per ICRP.

Site specific parameters input to LADTAP II are listed below. These parameters are included in the program calculations and are only changed as conditions and/or situations warrant.

- CNS effluent water flow in cfs, the average flow in the discharge canal during the time of interest.
- Dilution factor for the effluent.
 - Drinking water: ≤ 5 (for LADTAP variable Dilution factor)
 - Fish*: ≤ 5 (for LADTAP variable Dilution factor)

*Fishing - Seasonal variation: Consumption of fish is evaluated from April through November.

Alternatively, the accumulated dose commitment may be calculated in the following way:

$$\Delta D_{ank} = 3.785 \times 10^{-3} \sum_e \sum_i A_{eani} C_{ik} \cdot \Delta t_k \left(\frac{F_1}{F_2} \right)_k$$

$$D_{an} = \sum_k \Delta D_{ank}$$

where ΔD_{ank} = the dose commitment (mrem) to organ n of age group a due to the isotopes in a release represented by analysis k, where the analyses are those required by Table D3.1.1-1. Thus the contribution to the dose from gamma emitters become available on a batch basis for batch releases and on a weekly basis for

continuous releases. Similarly the contributions from H-3 are available on a monthly basis and the contributions from Sr-89, Sr-90, and Fe-55 become available on a quarterly basis.

D_{an} = the dose commitment attributed to releases represented by all analyses k to organ n , including total body, of the maximally exposed person in age group a (mrem).

A_{eani} = transfer factor relating a unit release of radionuclide i (Ci) in a unit stream flow (gal/min) to dose commitment to organ n , or total body, of an exposed person in age group a via environmental pathway e

$$\frac{mrem}{Ci \cdot min/gal}$$

$$3.785 \times 10^{-3} = 3785 \text{ ml/gal} \times 10^{-6} \text{ Ci}/\mu\text{Ci}$$

C_{ik} = the concentration of radionuclide i in the undiluted liquid waste to be discharged ($\mu\text{Ci/ml}$), i.e., in the sample k

Δt_k = elapsed time of release represented by sample k during which radionuclide i is discharged at concentration C_{ik} , i.e., the duration of the release represented by sample k (minutes)

(F_1/F_2) = the quotient of the release flow, F_1 , and the dilution flow, F_2 , during the release represented by sample k

Pathway-to-dose transfer factors, A_{eani} , for use in calculating the dose commitment arising from radioactive material released in aqueous effluents, are calculated in accordance with equations and values recommended in Regulatory Guide 1.109, Revision O. Appropriate factors representing applicable environmental pathways of exposure and most exposed age group(s) are selected and used in calculating the dose commitment. The pathway(s) and thus age group(s) selected may vary by season. For instance, when fishing near the Station during the winter is nonexistent, evaluation of the fish pathway is not required.

The age group potentially most exposed via eating fish is expected to be the adult, and the age group potentially most exposed via drinking water from the Missouri River is expected to be the infant. Normally, only these need to be evaluated for compliance with DSR 3.1.3.1. For the purpose of calculating the dose to the Member of the Public who is potentially exposed most by eating fish taken from the river beyond the site and exclusion area boundary near the discharge canal, $F_2 = 5F_c$. As long as potable water is known not to be taken from the river within three miles downstream of Cooper Station, as verified by the annual land survey, the potential dose to a Member of the Public via drinking water will be assessed on the basis of water assumed to be taken from the river three miles downstream. At that location, F_2 is conservatively assumed to be $F_2 = 5F_c$. Variables F_1 , F_2 , and F_c are defined in Section 2.2.

2.6 Projected Personal Maximum Dose

DSR 3.1.3.2 requires the maximum total body and organ doses to a person beyond the site and exclusion area boundary due to radioactive material released in liquid effluent to be projected over a quarter at least one time during every 31 days if

radioactive liquid radwaste is released and the radwaste system is not operated.

This requirement is satisfied by calculating the projected dose commitment to a hypothetical person exposed by eating fish taken from the river beyond the site and exclusion area boundary near the discharge canal and drinking water taken from the river three miles downstream. The potential dose commitments to organs and to the total body are computed separately.

The quarterly dose commitment to a maximally exposed hypothetical person is projected by computing the accumulated doses to the total body and most exposed organ during the most recent three months and assuming the result represents the projected doses during the current quarter. Doses will be calculated in accordance with Section 2.5.

As an alternative, the quarterly dose commitment to the total body and most exposed organ may be projected by using the equation

$$P_{an} = \frac{91}{X} D_{an}$$

where P_{an} = projected dose commitment (mrem) to organ n (including total body of age group a during the current quarter)

91 = number of days in a quarter

X = number of days to date in current quarter

D_{an} = dose commitment during the quarter-to-date (mrem) based upon results of aqueous effluent sampling and analyses available to date during the quarter

3.0 Gaseous Effluent

3.1 Introduction

The Station discharges gaseous effluent through a stack (Elevated Release Point) and discharges ventilation air from the radwaste, augmented radwaste, turbine, and reactor buildings through the respective building vents. These gaseous effluent streams, radioactivity monitoring points, and effluent discharge points are shown schematically in Figure 3-1. Gaseous release point locations and elevations at Cooper Station are described in Table 3-1. Gaseous discharges from the Elevated Release Point (ERP) are treated as an elevated release while discharges via building vents are assumed to be ground-level releases or split-wake releases.

Gaseous release point locations and elevations at the Station are described in Table 3-1.

3.2 Radioactivity in Gaseous Effluent

For the purpose of estimating radionuclide concentrations and radiation doses, beyond the site and exclusion area boundary measured radionuclide concentrations in gaseous effluent and in ventilation air exhausted from the Station are relied upon. Table D3.2.3-1 identifies the radioactive gaseous effluent measurements. When a radionuclide concentration is below the LLD for the analysis, it is not reported as being present in the sample.

Noble Gases. The distribution of noble gas radionuclides in a gaseous effluent is determined in one of the following ways.

1. Preferably, the radionuclide distribution is obtained by gamma spectrum analysis of effluent gas samples in accordance with DLCO 3.2.3, Table D3.2.3-1. Results of analyses of one or more samples may be averaged to obtain a representative spectrum.
2. In the event a representative radioactive noble gas distribution is unobtainable from samples taken during the period of interest, it may be derived from previous measurements or may be based upon a computed spectrum appearing in Table 3-2.
3. Alternatively, the total activity concentration of radioactive noble gases may be assumed to be krypton - 88.

The total quantity of radioactive noble gas discharged during an interval of time is determined by integrating the rate measurement of each effluent noble gas monitor. This may be done by the effluent monitoring system or the measured activity discharged via a gaseous effluent stream may be calculated with the equation

$$Q = 2.8 \times 10^4 \frac{N}{g} \cdot F$$

where Q = total radioactive noble gas release via a gaseous effluent stream during a given time interval (μCi)

N = net counts accumulated during the time interval
 g = effluent noble gas monitor counting rate response

$$\left(\frac{\text{cpm}}{\mu\text{Ci}/\text{cm}^3} \right)$$

F = gaseous effluent stream discharge rate (cfm)
 $2.8 \times 10^4 =$ conversion constant (cm^3/ft^3)

3.3 Main Condenser Air Ejector Noble Gas Monitor Alarm Setpoint

A noble gas activity monitor is provided to measure gross gamma activity in gases at the main condenser air ejector. The monitor includes an alarm that is set to report when the gamma radiation level in gas discharged by the main condenser air ejector indicates the gross radioactivity discharge rate exceeds 1 Ci/sec.

The alarm setpoint is determined with the relation

$$S = 2120 \frac{h P}{F} + Bkg$$

where S = the alarm setpoint (mr/hr)
 h = monitor response to activity concentration of SJAE offgas being monitored (mr/hr per ($\mu\text{Ci}/\text{cm}^3$))
 F = air ejector discharge rate (cfm)
 Bkg = monitoring instrument background (mr/hr)
 P = fraction of allowable limit representing a chosen margin of conservatism in the setpoint (unitless)

$$2120 = 1 \frac{\text{Ci}}{\text{Sec.}} \times \frac{1.0E6\mu\text{Ci}}{\text{Ci}} \times \frac{1 \text{ ft}^3}{28317 \text{ cm}^3} \times \frac{60 \text{ sec}}{\text{min.}}$$

3.4 Effluent Noble Gas Monitor Alarm Setpoint

DSR 3.3.2.9 requires an alarm setpoint to be determined for each radioactive noble gas effluent monitor. Each setpoint is derived to cause the alarm to report when the dose equivalent rate beyond the site and exclusion area boundary due to radioactive noble gas in gaseous effluent exceeds a limit in DLCO 3.2.1.a. Each noble gas activity monitor included in Table D3.3.2-1 except the main condenser air ejector off gas monitor is set to initiate alarm at or below the derived setpoint.

For the purpose of deriving a setpoint, the distribution of noble gas radionuclides in an effluent stream is determined as described in Section 3.2.

3.4.1 Setpoint Based on Dose Rate

The alarm setpoint of a radioactive noble gas effluent monitor may be calculated on the basis of whole body dose equivalent rate beyond the site and exclusion area boundary. A setpoint of a monitor of an elevated release, e.g., from the stack, may be calculated with the equation.

$$S = 1.06 \frac{h \cdot P}{f} \frac{\sum_i C_i}{\sum_i (C_i \cdot DF_i^s)} + Bkg$$

The setpoint of a monitor of a ground-level or split-wake release, e.g., from the turbine building vent or the AOG building, may be calculated with the equation

$$S = 1.06 \frac{h \cdot P}{f \frac{X}{Q}} \frac{\sum_i C_i}{\sum_i (C_i \cdot DF_i^s)} + Bkg$$

where

- S = the alarm setpoint (cpm, mr/hr, or $\mu\text{Ci}/\text{cm}^3$)
- h = monitor response to activity concentration of effluent being monitored, (cpm per $\mu\text{Ci}/\text{cm}^3$, mr/hr per $\mu\text{Ci}/\text{cm}^3$, or $\mu\text{Ci}/\text{cm}^3$ per $\mu\text{Ci}/\text{cm}^3$).
- C_i = relative concentration of noble gas radionuclide i in effluent at the point of monitoring ($\mu\text{Ci}/\text{cm}^3$)
- X/Q = atmospheric dispersion from point of ground-level or split-wake release to the location of potential exposure (sec/m^3)
- DF_i^s = factor converting elevated release rate of radionuclide i to total body dose equivalent rate at the location of potential exposure
(mrem)/(yr $\cdot \mu\text{Ci}/\text{sec}$)

- DF_i^v = factor converting ground-level or split-wake release of radionuclide i to the total body dose equivalent rate at the location of potential exposure
 (mrem)/(yr \cdot μ Ci/m³)
- f = flow of gaseous effluent stream, i.e., flow past the monitor (ft³/min)
- Bkg = monitoring instrument background (cpm, mr/hr, or μ Ci/cm³)
- 1.06 = $500 \text{ mrem/yr} \times 60 \text{ sec/min} \times 35.3 \text{ ft}^3/\text{m}^3 \times 1.0 \text{ m}^3/1.0 \times 10^6 \text{ cm}^3$
- P = fraction of allowable limit representing a chosen margin of conservatism in the setpoint (unitless)

Each monitoring channel has a unique response, h , which is determined by the instrument calibration. In order to ensure the correct derivation of a setpoint, the monitor background (Bkg) and the monitor response factor (h) must be in consistent units.

The concentration of each noble gas radionuclide i in a gaseous effluent is determined as discussed in Section 3.2.

The atmospheric dispersion and the dose conversion factor, DF_i^s depends upon local conditions. For the purpose of calculating radioactive noble gas effluent monitor alarm setpoints appropriate for Cooper Station, the locations of maximum potential exposure beyond the site and exclusion area boundary and the reference atmospheric dispersion factors applicable to the derivation of setpoints are:

Discharge Point	Discharge Height	Receptor Location		Atm. Dispersion (sec/m ³)
		Sector	Distance(m)	
Vent	Ground-Level or Split-Wake	NNW	1,150	3.4×10^{-6}
ERP	Elevated	W	1,800	8.2×10^{-8}

The applicable dose conversion factors, DF_i^s and DF_i^v for deriving setpoints are in Table 3-3.

3.5 Noble Gas Gamma Radiation Dose Accumulated in Air

DSR 3.2.2.1 requires the calculation on a cumulative basis of air dose due to gamma radiation from radioactive noble gas released in gaseous effluents. DLCO 3.2.2, Condition A requires reporting to the NRC when the air dose beyond the site and exclusion area boundary due to noble gas gamma radiation exceeds 5 mrad during any calendar quarter or 10 mrad during any calendar year.

The distribution of radioactive noble gases in gaseous releases and the quantity discharged during an interval of interest are determined as described in Section 3.2.

The gamma radiation dose to air beyond the site and exclusion area boundary as a consequence of noble gas released from the station will be calculated in accordance with Regulatory Guide 1.109, Revision 1, utilizing USNRC Computer Code GASPAR.*

The GASPAR program is routinely used for calculating radiological dose assessments for inclusion in the CNS Radioactive Effluents Release Report.

Site specific parameters input to GASPAR are listed below. These parameters are included in the program calculations and are only changed as conditions and/or situations warrant.

- o Source terms for the intervals of interest
- o Fraction of year milch animals are on pasture
- o Atmospheric dispersion factors, for specific locations, obtained from annual meteorological data which are used to determine noble gas (gamma and beta) air doses for the following:
 - Maximum individual site boundary
 - Maximum individual nearest resident
 - Maximum individual nearest milch cow
 - Maximum individual nearest garden
- o Population distribution (0 to 50 miles)
- o Meat, milk, and vegetable distribution (0 to 50 miles)
- o Absolute humidity at Cooper Nuclear Station
- o Fraction of the year vegetables are grown
- o Fraction of daily feed intake derived from pasture for milch and meat animals

*Quality factor for Tritium reduced from 1.7 to 1.0 per ICRP.

Alternatively, the gamma radiation dose to air beyond the site and exclusion area boundary as a consequence of noble gas released from the station may be calculated with the equation:

$$D = \sum_i \left(Q_{cs_i} \cdot A\gamma_{cs_i} \right) + \sum_i \left(Q_{cv_i} \cdot \left(\frac{X}{Q} \right)_{cv} \cdot A\gamma_{v_i} \right)$$

where D = noble gas gamma dose to air (mrad)

$Q_{cs_i} = \Sigma \Delta Q_{cs_i}$ = cumulative release of noble gas nuclide i from stack (μCi).

$A\gamma_{cs_i}$ = factor converting unit noble gas stack release to ground level air dose from overhead plume gamma radiation (mrad/ μCi).

$A\gamma_{v_i}$ = factor converting time integrated, ground level concentration of noble gas to air dose from gamma radiation

$$\left(\frac{\text{mrad}}{\mu\text{Ci} \frac{\text{sec}}{\text{m}^3}} \right)$$

$Q_{cvi} = \sum_{\text{time}} \Delta Q_{cvi} =$ cumulative release of noble gas nuclide i from building vents (μCi).

(\bar{X}) = long term average atmospheric dispersion factor for a ground level or
 $(\bar{Q})_{cv}$ = split wake release (sec/m^3).

DSR 3.2.2-1 is satisfied by calculating the noble gas gamma radiation dose to air beyond the site and exclusion area boundary at a point situated at the NNW site boundary, and on the basis of reference* atmospheric dispersion assuming continuous gaseous release. At that location, the reference atmospheric dispersion factor for a vent (ground-level) release is $X/Q = 3.4 \times 10^{-6} \text{ sec}/\text{m}^3$. Appropriate values of $A\gamma_{csi}$ and $A\gamma_v$ for use in calculating air doses at that location are listed in Table 3-4.

3.6 Noble Gas Beta Radiation Dose Accumulated in Air

DLCO 3.2.2 requires that the air dose beyond the site and exclusion area boundary from beta radiation not exceed 10 mrad during any quarter and 20 mrad during any year. DSR 3.2.2-1 requires the air dose to be calculated on a cumulative basis.

The radioactive noble gas distribution and activity discharged are determined as described in § 3.4 herein.

*Onsite meteorological data for the period July 1, 1976, to June 30, 1977, which was used in the Cooper Station Demonstrated of Compliance with 10 CFR 50, Appendix I, revision 1, January, 1978.

The beta radiation dose to air beyond the site and exclusion area boundary as a consequence of noble gas released from the station will be calculated in accordance with Regulatory Guide 1.109, Revision 1, utilizing USNRC Computer Code GASPAR.*

Alternatively, the beta radiation dose to air beyond the site and exclusion area boundary as a consequence of noble gas released from the station may be calculated with the equation

$$D = \sum_i \left(Q_{cs_i} \frac{X}{Q_{cs}} + Q_{cv_i} \frac{X}{Q_{cv}} \right) \cdot A\beta_i$$

Where

- D = noble gas beta dose to air (mrad)
- $(X/Q)_{cs}$ = long-term average atmospheric dispersion factor for stack releases (sec/m³)
- $A\beta_i$ = factor converting time integrated ground level concentration of noble gas radionuclide i to air dose from beta radiation

$$\frac{\text{mrad}}{(\mu\text{Ci sec})/\text{m}^3}$$

DSR 3.2.2.1 is satisfied by calculating the noble gas beta radiation dose to air beyond the site and exclusion area boundary at a point situated at the NNW site boundary, and on the basis of reference atmospheric dispersion assuming continuous gaseous discharge. At that location, the reference atmospheric dispersion factors are:

$$(X/Q)_s = 1.2 \times 10^{-8} \text{ sec/m}^3 \text{ at the NNW site boundary}$$

$$(X/Q)_v = 3.4 \times 10^{-6} \text{ sec/m}^3$$

Beta radiation-to-air dose conversion factors, $A\beta_i$, for noble gas radionuclides are listed in Table 3-4.

*Quality factor for Tritium reduced from 1.7 to 1.0 per ICRP.

3.7 Dose Due to Iodine and Particulates in Gaseous Effluents*

DLCO 3.2.3 requires that radioiodine, and radioactive material in particulate form having half-lives greater than eight days in gaseous effluents released to the area beyond the site and exclusion area boundary cause no more than 7.5 mrem to any organ of a member of the public during any calendar quarter or 15 mrem to an organ of a member of the public during any calendar year. DSR 3.2.3.2 requires the dose to be calculated at least once every 31 days.

Radionuclides other than noble gases or tritium in gaseous effluents that are measured by the sampling and analysis program described in Table D3.2.3-1 are used as the release term in dose calculations. Airborne releases are discharged either via the stack (ERP) as an elevated release or via building vents and treated as a ground level or split-wake release. For each of these release combinations, samples are analyzed weekly, monthly, quarterly, or for a specific release according to Table D3.2.3-1.

Each sample provides a measure of the concentration of specific radionuclides, C_i , in gaseous effluent discharged at flow, F_a , during a time increment Δt . Thus, each release is quantified according to the relation:

*The dose to any organ of a person arising from radioactive iodine-131, iodine-133, and radioactive material in particulate form having half-lives greater than eight days. Noble gases not considered.

$$\Delta Q_{ijk} = C_{ik} F_{aj} \Delta t_j$$

$$Q_{ik} = \sum_j C_{ik} F_{aj} \Delta t_j$$

- where Q_{ik} = the quantity of radionuclide i released in a given effluent stream based on analysis k (Ci)
- C_{ik} = concentration of radionuclide i in gaseous effluent identified by analysis k (Ci/m³) or (μCi/cm³)
- F_{aj} = effluent stream discharge rate during time increment Δt_j (m³/sec)
- Δt_j = elapsed time in increment j during which radionuclide i at concentration C_{ik} is being discharged (sec)

3.7.1 GASPAR Method

A person may be exposed directly to an airborne concentration of radioactive material discharged in effluent and indirectly via pathways involving deposition of radioactive material onto the ground. Dose estimates account for the separate exposure pathways. The dose commitment to a person beyond the site and exclusion area boundary associated with a gaseous release, Q_{ik} , of radioactive material other than noble gas will be calculated in accordance with Regulatory Guide 1.109, Revision 1, utilizing USNRC Computer Code GASPAR.*

The GASPAR program is routinely used for calculating radiological dose assessments. Site specific parameters input to GASPAR are listed in Section 3.5.

*Quality factor for Tritium reduced from 1.7 to 1.0 per ICRP.

3.7.2 Alternate Method

Alternatively, the dose commitment to a person beyond the site and exclusion area boundary associated with a gaseous release, Q_{ik} , of radioactive material other than noble gas may be calculated with one of the appropriate following equations

release via the stack:

$$D_{ansk} = Q_{iks} \left[\sum_i TA_{ani} \left(\frac{Xd}{Q} \right)_{cs} + \sum_e \sum_i TG_{eani} \left(\frac{D}{Q} \right)_{bse} \right]$$

release via a vent:

$$D_{anvk} = Q_{ikv} \left[\sum_i TA_{ani} \left(\frac{Xd}{Q} \right)_{bv} + \sum_e \sum_i TG_{eani} \left(\frac{D}{Q} \right)_{cve} \right]$$

where

D_{ansk} = the dose commitment (mrem) to organ n of a person in age group a due to radionuclides identified in analysis k of an elevated (ERP) release where the analysis is one required by Table D3.2.3-1.

D_{anvk} = the dose commitment from a vent release (mrem)

TA_{ani} = factor converting airborne concentration of radionuclide i to dose commitment to organ n of a person in age group a

$$\left(\frac{\text{mrem}}{(\text{Ci sec})/\text{m}^3} \right)$$

TG_{eani} = factor converting ground deposition of radionuclide i to dose commitment to organ n of a person in age group a exposed via environmental pathway e (mrem/Ci/m²)

(D/Q) = relative deposition factor (m⁻²)

(Xd/Q) = depleted atmospheric dispersion factor (mCi/m³ per mCi/sec)

The analysis index k may represent either

- p, analysis of a grab sample
- w, a weekly composite analysis
- m, a monthly composite analysis
- q, a quarterly composite analysis

The dose commitment accumulated by a person beyond the site and exclusion area boundary is computed at least every 31 days, but may be calculated as analytical results of effluent measurements, performed according to Table D3.2.3-1, become available.

The dose is accumulated in the following way.

The dose accumulated as a result of stack discharge is

$$D_{ans} = \sum_w D_{answ} + \sum_m D_{ansm} + \sum_q D_{ansq}$$

and the dose accumulated as a result of a vent discharge is

$$D_{anv} = \sum_w D_{anvw} + \sum_m D_{anvm} + \sum_q D_{anvq}$$

Doses committed during the same time period due to discharges from the stack and vents are additive, thus:

$$D_{an} = D_{ans} + \sum_v D_{anv}$$

where D_{an} = the dose commitment accumulated during the quarter to date as a result of all measured radioactive gaseous discharges except noble gases and tritium to any organ n, including total body, of a person offsite in age group a (mrem)

When the dose to a person from iodine and particulates discharged in gaseous effluent is calculated as required by DSR 3.2.3.2, appropriate environmental pathways of exposure will be evaluated. The pathway(s) and/or age group(s) selected may vary by season. Appropriate pathway-to-dose transfer factors, A_{eani} , are selected for use in calculating the dose.

The dose to a receptor 1.1 miles west of the Station is calculated on the basis of continuous gaseous release and reference meteorological conditions. The reference atmospheric dispersion and deposition factors at that location to be used for assessing compliance with DLCO 3.2.3 are:

$$\begin{aligned} \left(\frac{Xd}{Q}\right)_s &= 8.1 \times 10^{-8} \text{ sec}/m^3 & \left(\frac{D}{Q}\right)_s &= 4.6 \times 10^{-10} m^{-2} \\ \left(\frac{Xd}{Q}\right)_v &= 4.4 \times 10^{-7} \text{ sec}/m^3 & \left(\frac{D}{Q}\right)_v &= 9.5 \times 10^{-10} m^{-2} \end{aligned}$$

The receptor is assumed to drink milk produced by the milch animal which experiences the maximum D/Q. Maximum values of the relative deposition factors for a milch animal located 3.7 miles northwest of the Station, are:

$$\begin{aligned} \left(\frac{D}{Q}\right)_s &= 1.2 \times 10^{-10} m^{-2} \\ \left(\frac{D}{Q}\right)_v &= 3.7 \times 10^{-10} m^{-2} \end{aligned}$$

40 CFR Part 190. When the dose due to gaseous effluent is calculated for the purpose of evaluating compliance with 40 CFR Part 190 (reference Section 4.2), the dose contributed by tritium is included in the evaluation and is calculated in the following way.

Since tritium in water vapor is absorbed directly by vegetation, the tritium concentration in growing vegetation is proportional to the airborne concentration rather than to relative deposition as in the case of particulates. Thus the dose commitment from airborne tritium via vegetation (fruit and vegetables), air-grass-cow-milk, or air-grass-cow-meat pathways is calculated with the appropriate one(s) of the equations:

for a stack release

$$D_{ansk} = \frac{X}{Q_s} \sum_i Q_{iks} \sum_p TA_{anip}$$

for a vent release

$$D_{ankv} = \frac{X}{Q_v} \sum_i Q_{ikv} \sum_p TA_{anip}$$

3.8 Dose to a Person from Noble Gases

DSR 3.4.1.1 requires the calculation of dose to a member of the public for the purpose of assessing compliance with provisions of 40 CFR Part 190.10(a). That assessment includes the calculation of the gamma dose to the total body and the beta plus gamma dose to the skin of the person due to radioactive noble gases in gaseous effluents.

3.8.1 Gamma Dose to Total Body - GASPAR Method

The gamma radiation dose to the whole body of a member of the public as a consequence of noble gas released from the station will be calculated in accordance with Regulatory Guide 1.109, Revision 1, utilizing USNRC Computer Code GASPAR.*

*Quality factor for Tritium reduced from 1.7 to 1.0 per ICRP.

3.8.1.1 Alternate Method

Alternatively, the gamma radiation dose to the whole body of a member of the public as a consequence of noble gas released from the Station may be calculated with the equation:

$$D\gamma = \sum_i \left(Q_{csi} \cdot P\gamma_{cs_i} + Q_{cv_i} \left(\frac{X}{Q} \right)_{cv} \cdot P\gamma_{v_i} \right)$$

where

$D\gamma$ = noble gas gamma dose to total body (mrem)

$P\gamma_{cs_i}$ = factor converting unit noble gas nuclide i in stack release to total body dose at ground level received from the overhead plume (mrem/ μ Ci)

$P\gamma_{v_i}$ = factor converting time integrated, ground level concentration of noble gas nuclide i to air dose from gamma radiation

$$\left(\frac{\text{.mrem}}{\mu\text{Ci} \frac{\text{sec}}{\text{m}^3}} \right)$$

When the total body dose due to gamma radiation from noble gas is evaluated as required by DSR 3.4.1.1, the dose to the nearby resident exposed most by all applicable exposure pathways combined is computed. Alternatively, the nearby resident exposed to maximal ground-level noble gas concentrations (maximum X/Q) may be selected as the receptor. Values by $P\gamma_{cs_i}$ and $P\gamma_{v_i}$ for this receptor, 1.1 miles west of the station, appear in Table 3-5.

3.8.2 Dose to Skin - GASPAR Method

The beta radiation dose to the skin of a member of the public due to beta radiation from noble gas released from the station will be calculated in accordance with Regulatory Guide 1.109, Revision 1, utilizing USNRC Computer Code GASPAR.*

3.8.2.1 Alternate Method

Alternatively, the beta radiation dose to the skin of a member of the public due to beta radiation from noble gas released from the Station may be calculated with the equation

$$D\beta = \sum_i \left(Q_{cs_i} \frac{X}{Q_{cs}} + Q_{cv_i} \frac{X}{Q_{cv}} \right) \cdot S\beta_i$$

where $D\beta$ = noble gas beta dose to skin (mrem)

$S\beta_i$ = factor converting time integrated ground level concentration of noble gas radionuclide i to skin dose from beta radiation

$$\frac{mrem}{(\mu Ci \text{ sec})/m^3}$$

Values of $S\beta_i$ for noble gases are included in Table 3-5.

When the skin dose due to noble gas beta radiation is evaluated as required by DSR 3.4.1.1, the receptor selected is the nearby resident exposed most via all applicable exposure pathways together. Alternatively, the nearby resident exposed to maximal ground-level concentrations (maximum X/Q) may be selected as the receptor. The location of the latter resident is 1.1 miles west of the station.

*Quality factor Tritium reduced from 1.7 to 1.0 per ICRP.

The total dose to the skin from noble gases is approximately equal to the beta radiation dose to the skin plus the gamma radiation dose to the total body.

3.9 Projected Organ Dose Due to Gaseous Effluent

DSR 3.2.5.1 and DSR 3.2.4.2 requires organ dose to a member of the public due to radioactive material in air effluent be projected during each month in which radioactive material is released in gaseous effluent without treatment. The purpose is to guide plant personnel in operating the EVTS and the Offgas Treatment System.

The organ dose is projected by calculating the dose to the most exposed organ accumulated during the month to date in accordance with Sections 3.7 and by projecting it for an entire 31 day time by employing the equation:

$$PD = \frac{31}{X} D$$

where:

- PD = projected organ dose to a member of the public (mrem)
- 31 = number of days over which dose is projected
- X = number of days to date during the projection period
- D = dose accumulated to the most exposed organ of a member of the public during the month to date (mrem).

3.10 Dose Rate Due to Tritium, Iodines, and Particulates in Gaseous Effluents

DLCO 3.2.1.b requires that the dose rate to any body organ created by the release of tritium, radioiodines, and radioactive material in particulate form having half-lives greater than eight days, shall not exceed 1500 mrem/yr. DSR 3.2.1.1 requires the dose rate to be calculated at least once every 31 days.

The dose equivalent rate from tritium, iodine, and radionuclides in particulate form in airborne effluent due to exposure by inhalation plus tritium absorption through the skin may be calculated for each discharge point by using the following equations. For effluent from an elevated release point, i.e., stack discharge above building wake, the equation is:

$$D_{ans} = \frac{10^{-6}}{TE-TB} \sum_k \sum_i Q_{ski} \left(\frac{X}{Q} \right)_s TA_{eani}$$

For effluent from a ground-level release point, i.e., a building vent, the equation is:

$$D_{anv} = \frac{10^{-6}}{TE-TB} \sum_k \sum_i Q_{vki} \left(\frac{X}{Q} \right)_v TA_{eani}$$

Dose rates from separate release points may be combined to give

$$D_{an} = D_{ans} + \sum_v D_{anv}$$

where D_{an} = dose equivalent commitment rate to organ n of a person in age group a due to radioactive particulates, iodine, and tritium in airborne effluent that are inhaled (mrem/hr)

D_{ans}, D_{anv}	=	dose equivalent commitment rate due to radioactive particulates, iodine, and tritium from an elevated release and a ground-level release respectively (mrem/hr)
Q_{ski}, Q_{vki}	=	quantity of radionuclide i released in a given effluent stream, either elevated or ground-level, based on analysis k (uCi) during discharge time increment TB to TE (hr)
TE	=	ending time of effluent discharge
TB	=	beginning time of effluent discharge
$TE-TB$	=	effluent averaging time (hr)
$(X/Q)_s, (X/Q)_v$	=	atmospheric dispersion from an elevated or a ground-level release respectively to ground-level at the receptor (uCi/m ³ per uCi/sec)
TA_{eani}	=	factor converting airborne concentration of radionuclide i to dose commitment to organ n of a person in age group a and where e represents exposure via inhalation $\left(\frac{mrem}{(Ci\ sec)/m^3} \right)$
10^{-6}	=	conversion, $10^{-6}Ci/\mu Ci$

The analysis index, k , may represent either a grab sample, an integrated (continuous) sample, or a composite sample of an effluent. In turn, each sample represents certain radionuclides in the effluent during the time increment represented by the sample.

3.11 Carbon-14 Gaseous Effluent Dose Calculations

Doses to the maximum-exposed individual resulting from the release of Carbon-14 in gaseous effluents from Cooper Nuclear Station (CNS) are calculated using the GASPARG computer code. Source terms for each quarter are combined with station-specific demographic data and atmospheric diffusion estimates for gaseous dose calculations. Four pathways are selected for individual dose calculations: nearest site boundary for inhalation, nearest garden for vegetation ingestion, nearest animal for meat ingestion, and nearest milk animal (cow). Based on the 2011 Land Use Census, there are no meat or

milk animals identified within 5 miles of CNS; however, CNS maintains a virtual cow receptor at 3.5 miles north-northwest of the plant and conservatively includes this receptor in dose calculations.

Use of normalized Carbon-14 source term and scaling factors based on the annual thermal gigawatts (GW_T) power generation are utilized to determine the quantity of Carbon-14 in the CNS gaseous effluent discharge. The Boiling Water Reactor proxy production rate of 5.1 curies Carbon-14 per GW_T generation was found using the methodology described in EPRI Technical Report 1021106, Estimation of Carbon-14 in Nuclear Power Plant Gaseous Effluents.

The proxy production rate of 5.1 curies Carbon-14 per GW_T generation is then inputted into GASPARG in addition to the following data:

- 0 to 50 mile population distribution
- 0 to 50 mile meat, milk, and vegetable distributions
- Absolute humidity at Cooper Nuclear Station (14.61 g/m^3)
- The fraction of the year that the vegetables are grown (0.5)
- The fraction of the daily feed intake derived from pasture for milk and meat animals (0.5)

Other values input to GASPARG are default values from U.S. NRC Regulatory Guide 1.109, Revision 1.

GASPARG implements the radiological dose models of U.S. NRC Regulatory Guide 1.109, Revision 1, for determining the radiation exposure to man from four principal atmospheric exposure pathways: plume, ground, inhalation, and ingestion. Doses to the maximum-exposed individual are calculated as a function of age group and pathway for significant body organs.

Doses presented are conservatively calculated based on the annual site X/Qs. These X/Qs result in doses approximately 20% higher than those calculated with the X/Qs based on growing season meteorology.

4.0 Dose Commitment From Releases Over Extended Time

4.1 Releases During A Quarter

An annual assessment of radiation doses arising from liquid and gaseous effluents from the Station during each calendar quarter is required. The assessment includes the following calculations of doses for

1. total body and maximally exposed organ doses due to liquid effluent via drinking water and eating fish from the river as in § 2.6.
2. total body and maximally exposed organ doses due to gaseous effluents* other than noble gases and tritium as in § 3.7.
3. doses to air offsite due to noble gas γ as in § 3.5 and due to noble gas β as in § 3.6.

The dose calculations are based on liquid and gaseous effluents from the Station during each calendar quarter determined in accord with Tables D3.1.1-1 and D3.2.3-1.

*radioactive iodine-131, iodine-133, and radioactive material in particulate form, having half-lives greater than eight days.

Aqueous concentration is estimated according to 2.2 on the basis of quarterly averaged stream flow or stream flow during discharge. If practical, quarterly averaged meteorological conditions concurrent with the quarterly gaseous release being evaluated are used to estimate atmospheric dispersion and deposition. Otherwise, the quarterly dose commitment due to gaseous effluent will be calculated using either reference meteorology or annual averaged meteorology during the year in which the release occurred.

The receptor of the dose is described such that the dose to any resident near the Station is unlikely to be underestimated. That is, the receptor is selected on the basis of the combination of applicable pathways of exposure to gaseous effluent identified in the annual land use census and maximum ground level X/Q at the residence. Conditions (i.e., location, X/Q, and/or pathways) more conservative (i.e. expected to yield higher calculated doses) than appropriate for the maximally exposed individual may be assumed in the dose assessment.

Seasonal appropriateness of exposure pathways may be considered. Exposure by eating fresh vegetation or drinking milk from cows or goats fed fresh forage is an inappropriate assumption during the first or fourth calendar quarter; rather consumption of stored vegetation and stored forage is ordinarily assumed.

Similarly, the liquid effluent-river-fish-man pathway is not ordinarily assumed during the winter quarter.

Factors converting stack-released noble gas to gamma radiation dose from the overhead plume are calculated on the basis of reference meteorological data for the receptor location.

4.2 Releases During 12 Months

The regulation governing the maximum allowable dose or dose commitment to a member of the public from all uranium fuel cycle sources of radiation and radioactive material in the environment is stated in 40 CFR Part 190.10(a). It requires that the dose or dose commitment to a member of the public from all sources not exceed 75 mrem/yr to the thyroid or 25 mrem/yr to the total body or any other organ. DSR 3.4.1.1 requires calculation of the dose at least once per year to assess compliance with the regulation. If conditions warrant, according to provisions of DLCO 3.4.1, an assessment may be made for a portion of a calendar year.

Fuel cycle sources and nuclear power reactors other than the Station itself do not measurably or significantly increase the radioactivity concentration in the vicinity of the Station; therefore, only radiation and radioactivity in the environment attributable to the Station itself are considered in the assessment of compliance with 40 CFR Part 190.

The dose to a member of the public which is due to exposure to radioactive material in liquid and gaseous effluents from the station are ordinarily calculated while the dose attributable to irradiation is evaluated with environmental radiation dosimetry.

The receptor of the dose is selected on the basis of the combination of applicable pathways of exposure to gaseous effluent identified in the annual land use census and minimum atmospheric dispersion factor (maximum ground level X/Q) at his residence. The receptor is described such that the dose to any resident near the Station is not likely to be underestimated. Conditions more conservative than appropriate for the maximally exposed (real) person may be assumed in the dose assessment.

4.2.1 Calculated Doses

Doses to a member of the public are calculated on the basis of liquid and gaseous effluents from the station determined in accord with Tables D3.1.1-1 and D3.2.3-1.

Contributions to the dose due to liquid and gaseous effluent are calculated as described by the equation for:

1. Total body and maximally exposed organ doses due to liquid effluent via drinking water and eating fish from the river as in § 2.6.
2. Total body dose due to noble gas γ as in § 3.8.1.
3. Skin dose due to noble gas β as in § 3.8.2.
4. total body and maximally exposed organ doses due to gaseous effluents* other than noble gases as in § 3.7.

Aqueous radioactive material concentrations are estimated according to § 2.2 on the basis of annual averaged stream flow.

Atmospheric dispersion, deposition, and if calculated, exposure by irradiation from airborne emitters are based on annual averaged meteorological conditions during the year evaluated or, alternatively, on reference meteorological conditions. In the event a portion of the year is examined, average meteorology for the period examined may be used in lieu of annual averaged or reference meteorology data.

*radioactive iodine, tritium, and radioactive material in particulate form having half-lives greater than eight days.

Factors converting stack-released noble gas to gamma radiation dose from the overhead plume are calculated on the basis of annual averaged meteorological data for the receptor location.

4.2.2 Environmental Measurements

When assessing compliance with 40 CFR 190, Radiological Environmental Monitoring Program results may be used to indicate actual radioactivity levels in the environment attributable to CNS as an alternate to calculating the concentrations from radioactive effluent measurements. The measured environmental activity levels may thus be used to supplement the evaluation of doses to real persons for assessing compliance with 40 CFR 190.

The dose to a member of the public due to irradiation (external exposure to gamma radiation) from the station and station effluents will be estimated with the aid of environmental TLD, PIC, or similar environmental dosimetry. This will be done by examining the annual dosimetry data for a statistical difference between measurements near the station and background measurements. Alternatively, irradiation attributable to station effluents may be calculated by methods referenced earlier in this section.

The person most exposed to radiation and radioactive material in effluent from Cooper Station is expected to live within ten miles of the Station. Although the Station is in a rural area, the maximum personal exposure due to airborne effluent almost certainly occurs to a resident within three or four miles of it. Since the nearest public water intake downstream of Cooper Station in the Missouri River is about 85 miles, radioactive liquid effluent contamination of potable water is not foreseen to be significant. The other liquid effluent pathway of potential significance, via fish taken from the river, would be evaluated when assessing compliance with 40 CFR 190 only in the event that a significant increase in fishing downstream in the river near the Station occurs during the previous 12 months.

Fishing within about ten miles downstream of the Station is considered to be nonexistent during the first quarter and negligible during the remainder of the year. In the event the fish pathway is evaluated to assess compliance with 40 CFR 190, the fish would be taken from the river within ten miles downstream of the Station.

5.0 Radiological Environmental Monitoring Program

5.1 Environmental Sampling Program

DSR 4.1.1 requires a minimum radiological environmental monitoring program to be conducted as described in Table D4.1-1 of that document. APPENDIX C of the ODAM provides a numerical listing of the active sample stations along with a description of the sample types, locations, and maps showing their approximate location.

A radiological environmental monitoring program, approved by the Nuclear Regulatory Commission (NRC) was initiated at CNS before initial criticality was attained on February 21, 1974. The program monitors radiation levels in the air, terrestrial, and aquatic environments. Most samples are collected by Nebraska Public Power District (NPPD) personnel. However, all samples are shipped for analysis to a contractor's laboratory where there exists the special facilities required for measurements of extremely low levels of radioactivity.

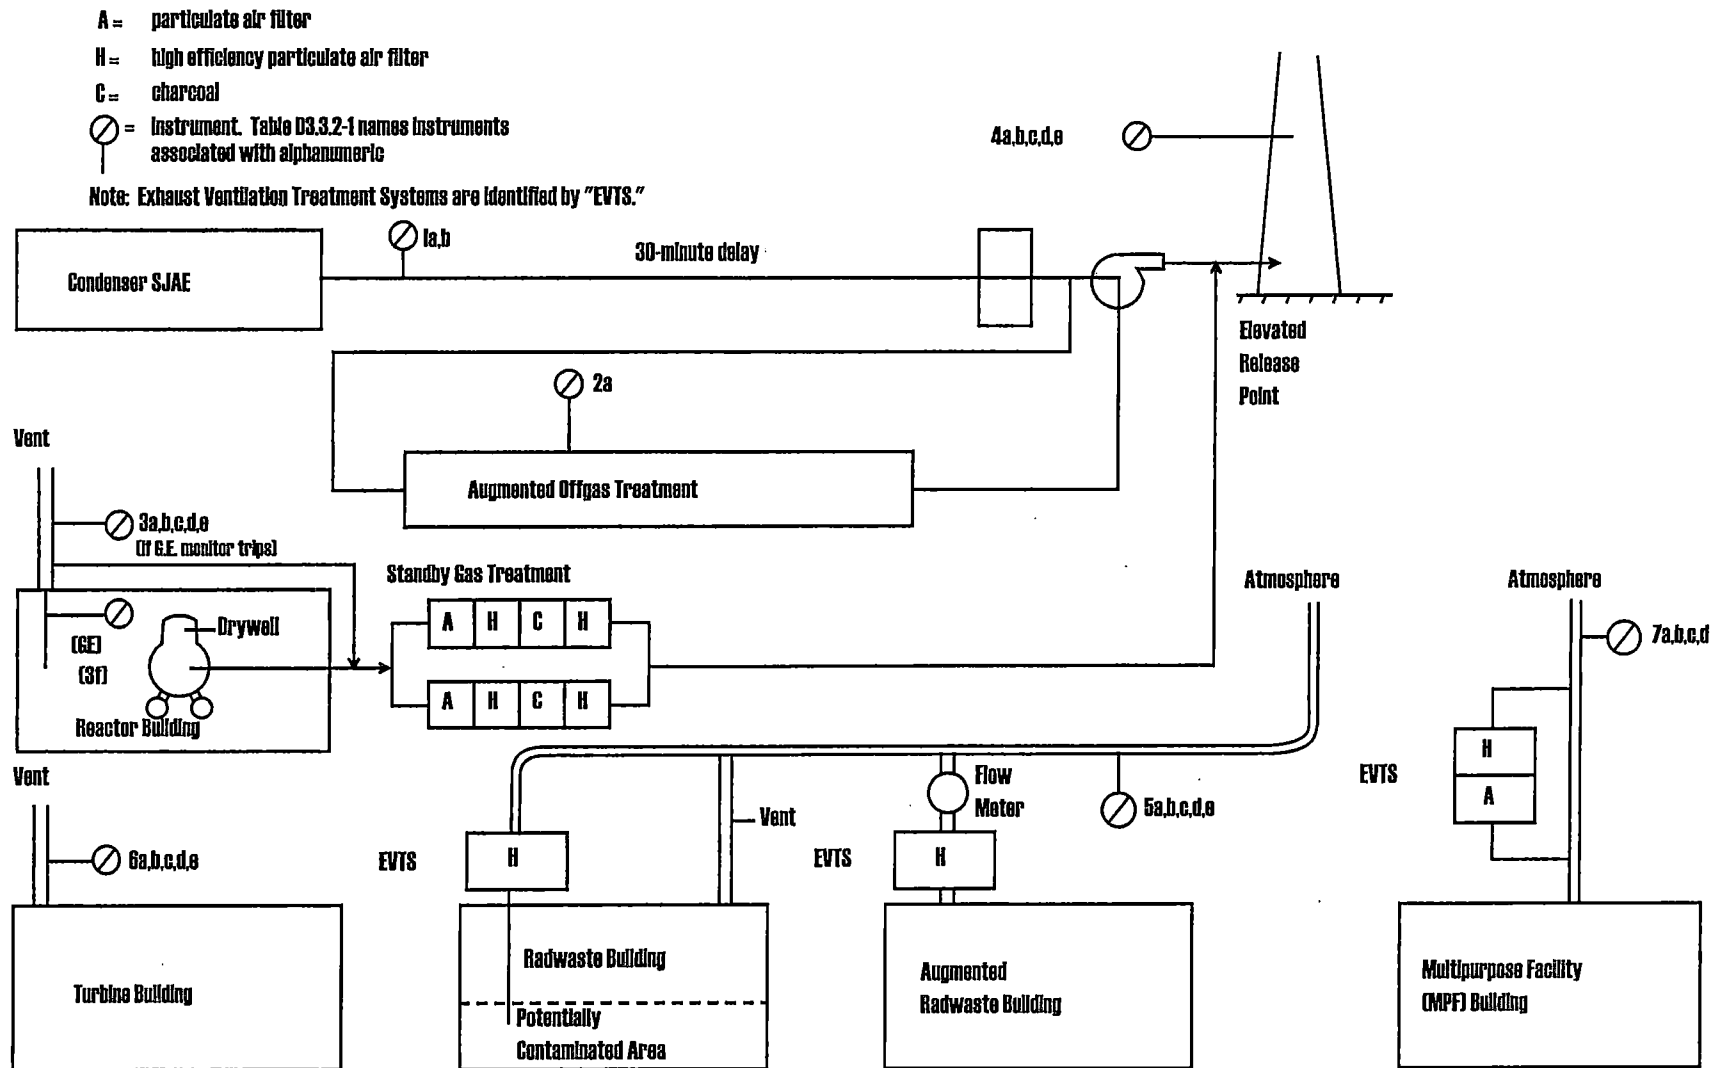


Figure 3-1 Caseous Effluent Streams, Treatment and Monitoring Equipment, and Discharge Points.

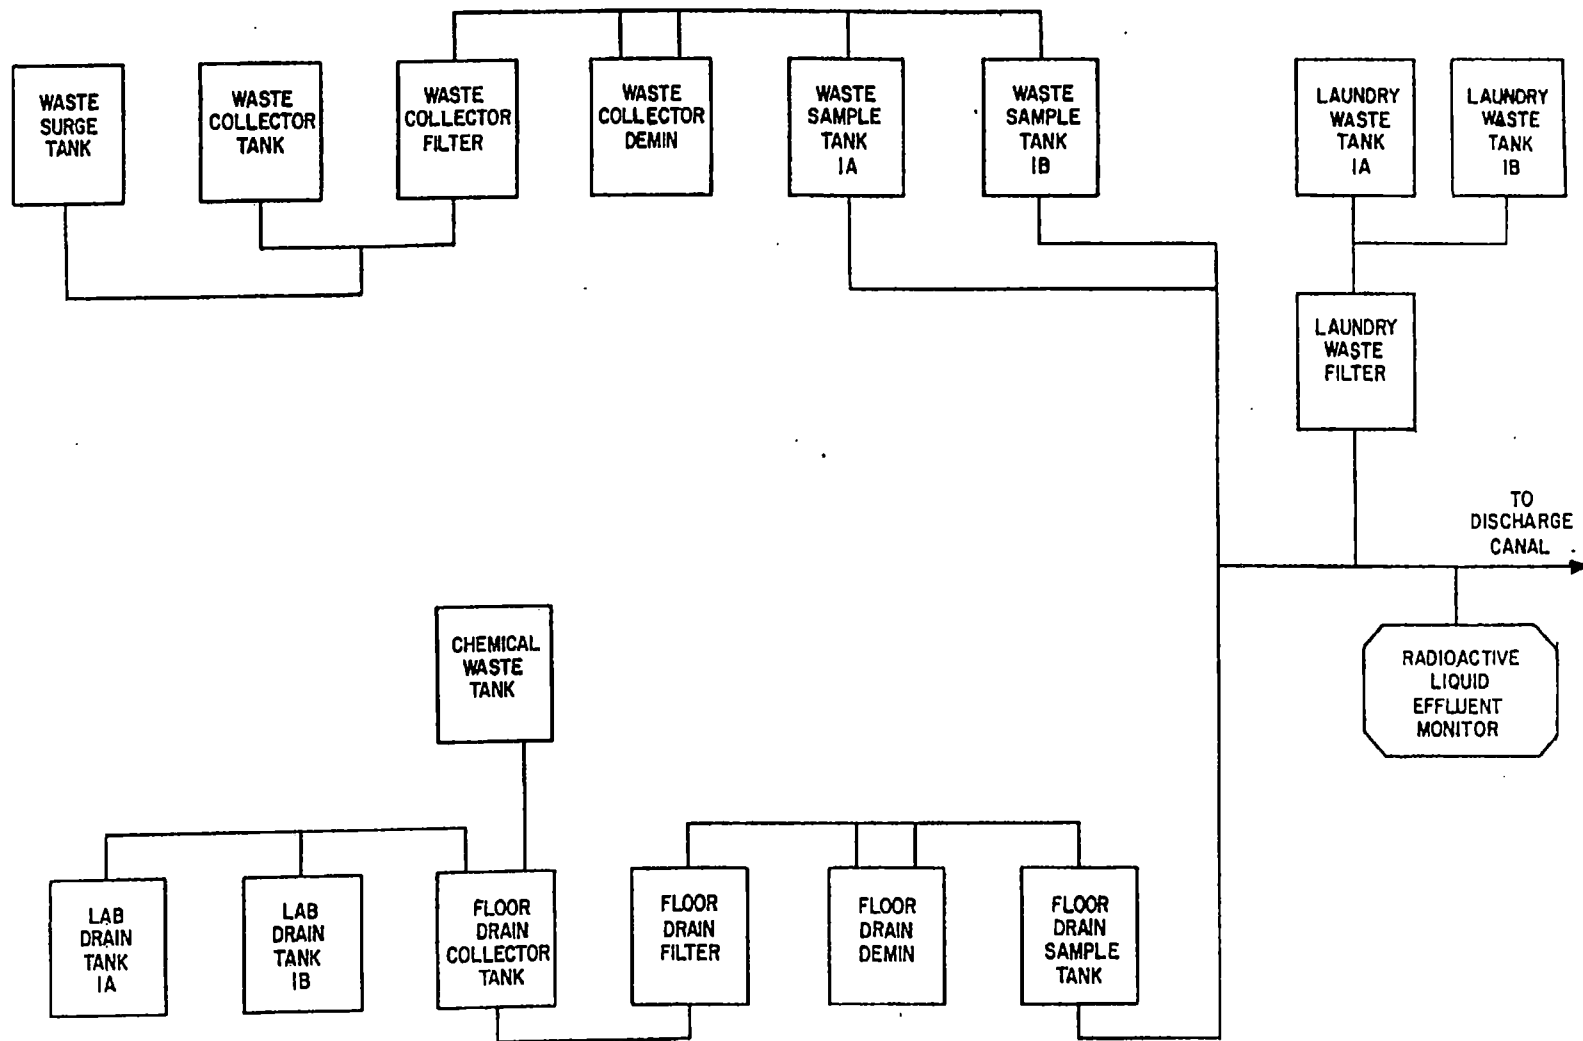


FIGURE 3.14 - LIQUID EFFLUENT STREAM, TREATMENT AND MONITORING, AND DISCHARGE POINT.

Table 3-1
 Atmospheric Gaseous Release Points at the
 Cooper Nuclear Generating Station

Structure	Reactor Building	Turbine Building	Combined Radwaste-Augmented Radwaste Building	Elevated Release Point
Number of Ducts	1	4	1	1
Duct Size (inches)	96" x 48"	48" x 96"	72" I.D.	14" I.D.
Height of Vent (feet above roof)	15	1.3	Horizontal discharge at rooftop	325 (above grade)
Flow Rate (cfm)	73405	50710(a)	67070	3000
Flow Velocity (fps)	3.82	26.4	39.5	46.7
Exhaust - Winter	70	70	70	60
Temp. (°F) - Summer	90	90	90	90
Release Mode	Partial Elevated	Ground Level	Ground Level	Elevated

(a) Data given is for one operating fan. Multiply data by total number of fans in operation.

Table 3-2
 Computed Release of Radioactive Noble Gases
 In Gaseous Effluent From Cooper Nuclear Station

Nuclide	Stack Release		Plant Vents Release	
	(Ci/yr)	Fraction	(Ci/yr)	Fraction
Kr-83m	3.60E+01	8.38E-03	0	0
Kr-85m	6.50E+01	1.51E-02	7.10E+01	1.14E-02
Kr-85	2.00E+02	4.66E-02	0	0
Kr-87	2.13E+02	4.96E-02	1.33E+02	2.13E-02
Kr-88	2.13E+02	4.96E-02	2.33E+02	3.74E-02
Kr-89	1.00E+03	2.33E-01	0	0
Xe-133m	3.00E 00	6.99E-04	0	0
Xe-133	1.51E+02	3.52E-02	2.63E+03	4.22E-01
Xe-135m	7.20E+01	1.68E-02	6.96E+02	1.12E-01
Xe-135	2.64E+02	6.15E-02	1.06E+03	1.70E-01
Xe-137	1.20E+03	2.79E-01	0	0
Xe-138	8.77E+02	2.04E-01	1.41E+03	2.26E-01
Total	4294.	1.0	6233.	1.0

Releases computed by BWR-GALE for Cooper Station Base Case gaseous radwaste treatment.

The release rate (Ci/yr) is included only to show the basis of the radionuclide distribution. To estimate the concentrations of radionuclides in a sample in which only the total radioactivity has been measured, multiply the total activity concentration by the fraction of respective radionuclides listed above.

Table 3-3
Dose Conversion Factors for Deriving Radioactive
Noble Gas Effluent Monitor Setpoints

Radionuclide	Factor DF_i^s	for Stack Release ^a	Factor DF_i^{wf} for Ground-Level or Split-Wake Release
	(mrem)/(yr · μ Ci/sec) ^a	mrem/ μ Ci ^a	(mrem)/(yr · μ Ci/m ³)
Kr-83m	3.5E-9	1.1E-16	7.56 E-2
Kr-85m	1.2E-4	3.8E-12	1.17 E3
Kr-85	1.7E-6	5.5E-14	1.61 E1
Kr-87	5.1E-4	1.6E-11	5.92 E3
Kr-88	1.4E-3	4.4E-11	1.47 E4
Kr-89	6.6E-4	2.1E-11	1.66 E4
Kr-90	--	--	1.56 E4
Xe-131m	3.1E-5	9.7E-13	9.15 E1
Xe-133m	2.3E-5	7.3E-13	2.51 E2
Xe-133	2.5E-5	8.0E-13	2.94 E2
Xe-135m	2.5E-4	7.8E-12	3.12 E3
Xe-135	1.9E-4	6.0E-12	1.81 E3
Xe-137	5.4E-5	1.7E-12	1.42 E3
Xe-138	8.0E-4	2.5E-11	8.83 E3
Xe-139	1.6E-5	5.2E-13	5.02 E3
Ar-41	9.7E-4	3.1E-11	8.84 E3

^aBased on reference meteorology; applicable at the site boundary, 1,250 meters NNW of the ERP.

Table 3-4
 Transfer Factors for Maximum Dose To A
 Person Beyond The Site And Exclusion Area Boundary Due To
 Radioactive Noble Gases

Radionuclide	Dose Transfer Factors		
	^a		
	$A\gamma_{CS_i}$ $\frac{\text{mrad}}{\mu\text{Ci}}$	$A\gamma_{V_i}$ $\frac{\text{mrad}}{\mu\text{Ci sec/m}^3}$	$A\beta_i$ $\frac{\text{mrad}}{\mu\text{Ci sec/m}^3}$
Kr-83m	2.6E-14	6.1E-7	9.13E-6
Kr-85m	4.0E-12	3.9E-5	6.24E-5
Kr-85	5.8E-14	5.4E-7	6.18E-5
Kr-87	1.7E-11	2.0E-4	3.26E-4
Kr-88	4.6E-11	4.8E-4	9.28E-5
Kr-89	2.2E-11	5.5E-4	3.36E-4
Kr-90	--	5.2E-4	2.48E-4
Xe-131m	1.1E-11	4.9E-6	3.52E-5
Xe-133m	8.7E-13	1.0E-5	4.69E-5
Xe-133	9.0E-13	1.1E-5	3.33E-5
Xe-135m	8.3E-12	1.1E-4	2.34E-5
Xe-135	6.3E-12	6.1E-5	7.79E-5
Xe-137	1.8E-12	4.8E-5	4.02E-4
Xe-138	2.7E-11	2.9E-4	1.51E-4
Ar-41	3.2E-11	2.9E-4	1.04E-4

^aDose at NNW site boundary

Table 3-5
 Transfer Factors for Maximum Dose To A
 Person Beyond Site and Exclusion Area Boundary Due To
 Radioactive Noble Gases

Radionuclide	Dose Transfer Factors		
	^{a,b}		
	$P\gamma_{CS_i}$	$P\gamma_{V_i}$	$S\beta_i$
	$\frac{\text{mrem}}{\mu\text{Ci}}$	$\frac{\text{mrem}}{\mu\text{Ci sec/m}^3}$	$\frac{\text{mrem}}{\mu\text{Ci sec/m}^3}$
Kr-83m	1.6E-16	2.4E-9	--
Kr-85m	2.4E-12	3.7E-5	4.6E-5
Kr-85	3.0E-14	5.1E-7	4.2E-5
Kr-87	7.9E-12	1.9E-4	3.1E-4
Kr-88	2.3E-11	4.7E-4	7.5E-5
Kr-89	6.7E-12	5.3E-4	3.2E-4
Kr-90	--	4.9E-4	2.3E-4
Xe-131m	7.7E-13	2.9E-6	1.5E-5
Xe-133m	5.9E-13	8.0E-6	3.1E-5
Xe-133	6.9E-13	9.3E-6	9.7E-6
Xe-135m	3.3E-12	9.9E-5	2.3E-5
Xe-135	3.7E-12	5.7E-5	5.9E-5
Xe-137	5.1E-13	4.5E-5	3.9E-4
Xe-138	1.2E-11	2.8E-4	1.3E-4
Ar-41	1.5E-11	2.8E-4	8.5E-5

^aReceptor located at 1.1 miles west of Station

^bBased on reference meteorology at Cooper Station

APPENDIX A
(DELETED)

APPENDIX B

REFERENCE METEOROLOGICAL DATA

Reference meteorological measurements were at Cooper Station during the period from July 1, 1976, through June 30, 1977. The summary data and the computer code, PUFF, were used to generate tables of reference values of X/Q , depleted X/Q , and D/Q herein.

UNDEPLETED MEAN RELATIVE CONCENTRATION (sec/m³)
 ELEVATED RELEASE POINT - STANDARD DISTANCES
 COOPER NUCLEAR STATION
 NEBRASKA PUBLIC POWER DISTRICT

DISTANCE (miles)

SECTOR	.5	1.5	2.5	3.5	4.5	7.5	15.	25.	35.	45.
NNE	6.7E-09	2.3E-08	2.2E-08	1.8E-08	1.5E-08	1.9E-08	5.8E-09	4.7E-09	3.0E-09	1.8E-09
NE	6.1E-09	1.4E-08	1.4E-08	1.3E-08	1.1E-08	1.5E-08	6.9E-09	2.7E-09	2.4E-09	1.8E-09
ENE	7.0E-09	1.4E-08	1.4E-08	1.2E-08	9.3E-09	1.3E-08	2.9E-09	3.7E-09	1.5E-09	9.4E-10
E	6.5E-09	1.4E-08	1.3E-08	1.2E-08	9.5E-09	1.5E-08	4.0E-09	2.3E-09	1.3E-09	3.0E-10
ESE	5.2E-09	1.2E-08	1.0E-08	9.8E-09	7.9E-09	7.3E-09	4.1E-09	1.8E-09	1.2E-09	6.3E-10
SE	8.2E-09	1.9E-08	1.6E-08	1.4E-08	1.2E-08	1.0E-08	3.7E-09	1.6E-09	1.3E-09	6.5E-10
SSE	1.1E-08	3.2E-08	2.3E-08	2.0E-08	3.4E-08	2.6E-08	6.1E-09	2.2E-09	2.3E-09	1.2E-09
S	1.9E-08	3.4E-08	3.3E-08	2.6E-08	2.5E-08	1.6E-08	4.8E-09	2.4E-09	1.4E-09	1.1E-09
SSW	1.0E-08	4.3E-08	1.7E-08	1.7E-08	1.4E-08	9.5E-09	2.5E-09	1.2E-09	9.9E-10	5.1E-10
SW	4.4E-09	5.0E-08	1.7E-08	1.1E-08	1.1E-08	9.3E-09	3.1E-09	1.5E-09	9.4E-10	7.3E-10
WSW	4.1E-09	6.6E-08	3.2E-08	2.8E-08	1.2E-08	6.6E-09	4.1E-09	1.6E-09	1.1E-09	5.0E-10
W	5.6E-09	6.8E-08	3.8E-08	2.2E-08	1.8E-08	6.4E-09	4.1E-09	1.3E-09	8.2E-10	4.9E-10
WNW	6.1E-09	8.0E-08	5.2E-08	3.4E-08	2.1E-08	9.5E-09	3.2E-09	1.6E-09	1.0E-09	6.6E-10
NW	4.8E-09	8.8E-08	7.4E-08	5.2E-08	3.3E-08	1.4E-08	7.2E-09	3.4E-09	1.9E-09	1.3E-09
NNW	8.4E-09	2.7E-08	7.9E-08	6.9E-08	2.2E-08	2.1E-08	5.5E-09	3.1E-09	2.2E-09	1.6E-09
N	7.5E-09	3.5E-08	3.3E-08	2.5E-08	2.0E-08	1.6E-08	6.8E-09	5.2E-09	3.4E-09	1.1E-09

UNDEPLETED MEAN RELATIVE CONCENTRATION (sec/m³)
GROUND LEVEL RELEASE POINT - STANDARD DISTANCES
COOPER NUCLEAR STATION
NEBRASKA PUBLIC POWER DISTRICT

DISTANCE (miles)

SECTOR	.5	1.5	2.5	3.5	4.5	7.5	15.	25.	35.	45.
NNE	3.2E-06	5.5E-07	2.2E-07	1.5E-07	8.0E-08	4.4E-08	1.2E-08	4.9E-09	3.2E-09	2.4E-09
NE	2.0E-06	3.3E-07	1.8E-07	1.2E-07	6.1E-08	3.1E-08	9.2E-09	4.1E-09	2.6E-09	1.4E-09
ENE	2.2E-06	2.9E-07	1.5E-07	8.1E-08	5.4E-08	2.0E-08	7.4E-09	3.1E-09	1.6E-09	8.0E-10
E	2.2E-06	3.1E-07	1.5E-07	7.2E-08	5.5E-08	2.3E-08	6.3E-09	3.1E-09	1.8E-09	9.6E-10
ESE	2.4E-06	3.9E-07	1.5E-07	7.8E-08	5.7E-08	2.7E-08	7.4E-09	2.6E-09	1.3E-09	8.1E-10
SE	2.4E-06	3.9E-07	1.6E-07	1.2E-07	6.1E-08	2.5E-08	6.5E-09	1.8E-09	1.0E-09	7.8E-10
SSE	3.8E-06	6.0E-07	2.6E-07	1.5E-07	9.6E-08	4.2E-08	8.7E-09	2.8E-09	1.7E-09	1.2E-09
S	4.6E-06	8.1E-07	3.7E-07	2.0E-07	1.4E-07	6.6E-08	1.8E-08	6.4E-09	3.6E-09	2.1E-09
SSW	2.6E-06	5.0E-07	2.1E-07	1.1E-07	8.4E-08	5.5E-08	5.6E-09	1.5E-09	8.2E-10	4.8E-10
SW	1.9E-06	2.6E-07	1.8E-07	8.1E-08	6.2E-08	2.0E-08	5.2E-09	1.0E-09	3.9E-10	2.5E-10
WSW	2.0E-06	2.8E-07	1.7E-07	9.0E-08	6.4E-08	1.7E-08	3.6E-09	1.3E-09	7.4E-10	5.1E-10
W	1.6E-06	3.7E-07	1.4E-07	1.0E-07	6.5E-08	1.9E-08	6.1E-09	2.4E-09	1.1E-09	6.0E-10
WNW	3.1E-06	4.9E-07	2.2E-07	1.2E-07	1.0E-07	3.7E-08	1.0E-08	4.1E-09	2.1E-09	1.2E-09
NW	4.9E-06	7.8E-07	3.4E-07	2.2E-07	1.3E-07	6.5E-08	1.9E-08	5.0E-09	2.8E-09	2.0E-09
NNW	6.1E-06	9.7E-07	4.1E-07	2.5E-07	1.7E-07	9.5E-08	2.9E-08	1.2E-08	5.8E-09	1.6E-09
N	5.2E-06	8.9E-07	3.9E-07	2.2E-07	1.6E-07	7.4E-08	2.4E-08	1.1E-08	6.1E-09	3.5E-09

DEPLETED MEAN RELATIVE CONCENTRATION (sec/m³)
 ELEVATED RELEASE POINT - STANDARD DISTANCES
 COOPER NUCLEAR STATION
 NEBRASKA PUBLIC POWER DISTRICT

DISTANCE (miles)

SECTOR	.5	1.5	2.5	3.5	4.5	7.5	15.	25.	35.	45.
NNE	6.6E-09	2.2E-08	2.1E-08	1.7E-08	1.5E-08	1.8E-08	5.4E-09	4.5E-09	2.8E-09	1.6E-09
NE	6.0E-09	1.4E-08	1.4E-08	1.3E-08	1.1E-08	1.5E-08	6.5E-09	2.5E-09	2.2E-09	1.7E-09
ENE	6.9E-09	1.3E-08	1.4E-08	1.1E-08	8.8E-09	1.3E-08	2.7E-09	3.5E-09	1.4E-09	8.6E-10
E	6.4E-09	1.3E-08	1.3E-08	1.1E-08	9.0E-09	1.5E-08	3.9E-09	2.2E-09	1.2E-09	2.6E-10
ESE	5.1E-09	1.1E-08	1.0E-08	9.5E-09	7.6E-09	6.9E-09	3.9E-09	1.6E-09	1.1E-09	5.6E-10
SE	8.1E-09	1.9E-08	1.6E-08	1.3E-08	1.1E-08	9.6E-08	3.4E-09	1.4E-09	1.1E-09	5.5E-10
SSE	1.1E-08	3.1E-08	2.3E-08	2.0E-08	3.3E-08	2.5E-08	5.6E-09	1.9E-09	2.0E-09	9.8E-10
S	1.9E-08	3.3E-08	3.2E-08	2.5E-08	2.4E-08	1.6E-08	4.4E-09	2.0E-09	1.1E-09	8.3E-10
SSW	1.0E-08	4.3E-08	1.7E-08	1.6E-08	1.4E-08	9.0E-09	2.3E-09	1.0E-09	8.6E-10	4.2E-10
SW	4.3E-09	4.9E-08	1.6E-08	1.1E-08	1.0E-08	9.0E-09	2.9E-09	1.4E-09	8.4E-10	6.4E-10
WSW	4.0E-09	6.6E-08	3.2E-08	1.7E-08	1.1E-08	6.3E-09	3.9E-09	1.5E-09	9.5E-10	4.2E-10
W	5.5E-09	6.8E-08	3.7E-08	2.1E-08	1.7E-08	6.0E-09	3.8E-09	1.1E-09	6.8E-10	4.0E-10
WNW	6.0E-09	7.9E-08	5.1E-08	3.3E-08	2.1E-08	9.0E-09	3.0E-09	1.4E-09	8.8E-10	5.5E-10
NW	4.7E-09	8.7E-08	7.3E-08	5.1E-08	3.2E-08	1.3E-08	6.9E-09	3.1E-09	1.7E-09	1.2E-09
NNW	8.3E-09	2.6E-08	7.8E-08	6.8E-08	2.1E-08	2.1E-08	5.1E-09	2.8E-09	2.0E-09	1.5E-09
N	7.3E-09	3.5E-08	3.2E-08	2.4E-08	1.9E-08	1.5E-08	6.3E-09	4.8E-09	3.1E-09	9.4E-10

DEPLETED MEAN RELATIVE CONCENTRATION (sec/m³)
GROUND LEVEL RELEASE POINT - STANDARD DISTANCES
COOPER NUCLEAR STATION
NEBRASKA PUBLIC POWER DISTRICT

DISTANCE (miles)

SECTOR	.5	1.5	2.5	3.5	4.5	7.5	15.	25.	35.	45.
NNE	2.8E-06	4.5E-07	1.7E-07	1.1E-07	6.1E-08	3.2E-08	7.8E-09	2.7E-09	1.6E-09	1.1E-09
NE	1.7E-06	2.8E-07	1.4E-07	9.1E-08	4.6E-08	2.2E-08	5.7E-09	2.2E-09	1.2E-09	5.6E-10
ENE	1.9E-06	2.4E-07	1.2E-07	6.2E-08	4.0E-08	1.4E-08	4.7E-09	1.7E-09	7.7E-10	3.3E-10
E	1.9E-06	2.5E-07	1.2E-07	5.5E-08	4.1E-08	1.6E-08	3.9E-09	1.5E-09	8.3E-10	3.9E-10
ESE	2.1E-06	3.2E-07	1.2E-07	6.0E-08	4.3E-08	1.9E-08	4.6E-09	1.5E-09	6.3E-10	3.9E-10
SE	2.1E-06	3.2E-07	1.3E-07	9.0E-08	4.6E-08	1.7E-08	3.9E-09	9.5E-10	5.0E-10	3.6E-10
SSE	3.3E-06	5.0E-07	2.1E-07	1.2E-07	7.3E-08	3.0E-08	5.4E-09	1.6E-09	8.5E-10	5.2E-10
S	4.0E-06	6.7E-07	3.0E-07	1.6E-07	1.1E-07	4.8E-08	1.2E-08	3.7E-09	1.9E-09	9.4E-10
SSW	2.3E-06	4.2E-07	1.7E-07	8.1E-08	6.3E-08	3.9E-09	3.4E-09	8.4E-10	4.2E-10	2.1E-10
SW	1.7E-06	2.2E-07	1.4E-07	6.1E-08	4.5E-08	1.4E-08	3.1E-09	5.8E-10	1.8E-10	1.1E-10
WSW	1.7E-06	2.3E-07	1.4E-07	6.8E-08	4.7E-08	1.2E-08	2.1E-09	7.0E-10	3.8E-10	2.5E-10
W	1.4E-06	3.0E-07	1.1E-07	7.7E-08	4.8E-08	1.3E-08	3.7E-09	1.2E-09	5.0E-10	2.7E-10
WNW	2.7E-06	4.0E-07	1.7E-07	9.2E-08	7.6E-08	2.7E-08	6.3E-09	2.3E-09	1.0E-09	5.8E-10
NW	4.1E-06	6.5E-07	2.7E-07	1.7E-07	1.0E-07	4.7E-08	1.2E-08	2.9E-09	1.5E-09	9.3E-10
NNW	5.4E-06	8.1E-07	3.3E-07	1.9E-07	1.3E-07	6.9E-08	1.9E-08	6.5E-09	3.0E-09	7.6E-10
N	4.6E-06	7.5E-07	3.1E-07	1.7E-07	1.3E-07	5.4E-08	1.5E-08	5.9E-09	3.0E-09	1.6E-09

MEAN RELATIVE DEPOSITION (m⁻²)
 ELEVATED RELEASE POINT - STANDARD DISTANCES
 COOPER NUCLEAR STATION
 NEBRASKA PUBLIC POWER DISTRICT

DISTANCE (miles)

SECTOR	.5	1.5	2.5	3.5	4.5	7.5	15.	25.	35.	45.
NNE	2.6E-10	3.0E-10	1.8E-10	1.3E-10	9.2E-11	5.7E-11	2.3E-11	1.3E-11	8.1E-12	5.8E-12
NE	1.9E-10	2.0E-10	1.2E-10	8.2E-11	6.1E-11	4.0E-11	1.6E-11	8.3E-12	6.0E-12	3.8E-12
ENE	1.4E-10	1.4E-10	8.7E-11	6.2E-11	4.5E-11	2.9E-11	1.1E-11	5.7E-12	3.8E-12	2.6E-12
E	9.6E-11	9.5E-11	6.4E-11	4.6E-11	3.6E-11	2.3E-11	7.6E-12	3.7E-12	2.5E-12	8.5E-13
ESE	7.7E-11	1.0E-10	6.6E-11	4.8E-11	3.8E-11	2.3E-11	1.2E-11	5.2E-12	3.5E-12	2.0E-12
SE	2.3E-10	2.3E-10	1.4E-10	1.0E-10	7.5E-11	4.0E-11	1.7E-11	7.5E-12	4.8E-12	3.3E-12
SSE	4.2E-10	4.5E-10	2.6E-10	1.7E-10	1.6E-10	7.7E-11	3.3E-11	1.6E-11	1.1E-11	7.6E-12
S	6.4E-10	5.1E-10	3.0E-10	2.0E-10	1.5E-10	7.2E-11	2.9E-11	1.6E-11	1.1E-11	6.7E-12
SSW	3.0E-10	3.4E-10	1.4E-10	9.7E-11	7.2E-11	3.5E-11	1.3E-11	6.5E-12	4.9E-12	2.6E-12
SW	7.9E-11	2.1E-10	8.4E-11	5.0E-11	4.0E-11	2.1E-11	7.4E-12	3.8E-12	2.4E-12	1.8E-12
WSW	5.7E-11	2.3E-10	1.0E-10	6.2E-11	4.3E-11	2.3E-11	8.5E-12	4.3E-12	2.7E-12	1.8E-12
W	1.0E-10	3.4E-10	1.6E-10	9.8E-11	6.9E-11	2.9E-11	1.3E-11	6.2E-12	3.4E-12	2.0E-12
WNW	1.2E-10	4.1E-10	2.1E-10	1.3E-10	8.3E-11	3.9E-11	1.4E-11	7.0E-12	4.1E-12	2.6E-12
NW	1.2E-10	3.8E-10	2.1E-10	1.3E-10	8.2E-11	4.1E-11	1.7E-11	1.0E-11	6.3E-12	3.9E-12
NNW	2.3E-10	2.6E-10	3.0E-10	2.0E-10	1.1E-10	6.0E-11	2.1E-11	1.1E-11	6.1E-12	3.9E-12
N	2.5E-10	3.7E-10	2.3E-10	1.5E-10	1.2E-10	7.1E-11	2.9E-11	1.7E-11	1.3E-11	5.2E-12

MEAN RELATIVE DEPOSITION (m⁻²)
GROUND LEVEL RELEASE POINT - STANDARD DISTANCES
COOPER NUCLEAR STATION
NEBRASKA PUBLIC POWER DISTRICT

DISTANCE (miles)

SECTOR	.5	1.5	2.5	3.5	4.5	7.5	15.	25.	35.	45.
NNE	8.0E-09	1.2E-09	5.2E-10	3.1E-10	2.0E-10	9.9E-11	3.3E-11	1.6E-11	9.6E-12	6.0E-12
NE	5.1E-09	7.6E-10	3.4E-10	2.0E-10	1.3E-10	6.9E-11	2.4E-11	1.1E-11	6.7E-12	4.1E-12
ENE	4.0E-09	6.1E-10	2.7E-10	1.6E-10	1.1E-10	4.8E-11	2.0E-11	7.6E-12	3.9E-12	2.5E-12
E	4.0E-09	6.1E-10	2.8E-10	1.6E-10	1.1E-10	5.0E-11	1.8E-11	8.0E-12	4.2E-12	2.3E-12
ESE	5.3E-09	8.2E-10	3.5E-10	2.0E-10	1.4E-10	6.7E-11	2.1E-11	9.6E-12	5.6E-12	3.8E-12
SE	6.4E-09	9.6E-10	3.9E-10	2.4E-10	1.6E-10	7.1E-11	2.5E-11	1.1E-11	6.8E-12	4.1E-12
SSE	1.0E-08	1.5E-09	6.1E-10	3.5E-10	2.3E-10	1.1E-10	3.9E-11	1.8E-11	1.1E-11	6.5E-12
S	8.7E-09	1.4E-09	5.8E-10	3.3E-10	2.3E-10	1.1E-10	4.0E-11	1.8E-11	1.0E-11	6.3E-12
SSW	3.7E-09	6.0E-10	2.6E-10	1.5E-10	1.0E-10	5.9E-11	1.5E-11	5.0E-12	3.0E-12	1.8E-12
SW	2.9E-09	4.4E-10	2.2E-10	1.2E-10	8.3E-11	3.5E-11	1.1E-11	3.0E-12	1.4E-12	8.7E-13
WSW	2.8E-09	4.6E-10	2.2E-10	1.3E-10	9.0E-11	3.7E-11	1.1E-11	4.2E-12	2.2E-12	1.4E-12
W	3.6E-09	5.9E-10	2.6E-10	1.5E-10	1.0E-10	4.6E-11	1.7E-11	6.9E-12	3.8E-12	2.2E-12
WNW	5.6E-09	8.7E-10	3.8E-10	2.3E-10	1.6E-10	7.3E-11	2.5E-11	1.0E-11	6.2E-12	3.8E-12
NW	1.0E-08	1.6E-09	6.8E-10	4.1E-10	2.7E-10	1.3E-10	4.5E-11	1.8E-11	1.1E-11	6.8E-12
NNW	1.1E-08	1.6E-09	6.9E-10	4.1E-10	2.8E-10	1.4E-10	5.2E-11	2.3E-11	1.3E-11	5.2E-12
N	1.2E-08	1.9E-09	8.1E-10	4.6E-10	3.2E-10	1.5E-10	5.8E-11	2.7E-11	1.7E-11	1.0E-11

APPENDIX C

ENVIRONMENTAL RADIATION MONITORING PROGRAM

Appendix C contains the active environmental sampling stations for the Environmental Radiation Monitoring Program at Cooper Nuclear Station. Included in this appendix is a description of each sample and sample station along with maps showing the approximate location of each sampling station.

**REMP SAMPLE STATION DESCRIPTION
SAMPLE TYPES AND SAMPLE LOCATIONS**
(See Sample Station Locations Map - Figures C-1 and C-2)

<u>Sample Station^(a)</u>	<u>Sample Description - Type and Location</u>	
No. 1	Type: (1) (2)	Air Particulate and Charcoal Filters Environmental Thermoluminescent Dosimetry
	Location:	Outside the northwest edge of fence, east of the gate to the LLRW storage pad on the CNS site, NW $\frac{1}{4}$, S32, T5N, R16E, Nemaha County, Nebraska.
No. 2	Type: (1) (2)	Air Particulate and Charcoal Filters Environmental Thermoluminescent Dosimetry
	Location:	On north side of county road access to the south portion of the CNS site, SW $\frac{1}{4}$, S32, T5N, R16E, Nemaha County, Nebraska.
No. 3	Type: (1) (2)	Air Particulate and Charcoal Filters Environmental Thermoluminescent Dosimetry
	Location:	Located on the north side of the Brownville State Recreation Park access road near water gauging station, SE $\frac{1}{4}$, S18, T5N, R16E, Nemaha County, Nebraska.
No. 4	Type: (1) (2)	Air Particulate and Charcoal Filters Environmental Thermoluminescent Dosimetry
	Location:	Located $\frac{1}{2}$ mile south of Phelps City, Missouri, on west side of Highway "U," NE $\frac{1}{4}$, S2, T64N, R42W, Atchison County, Missouri.
No. 5	Type: (1) (2)	Air Particulate and Charcoal Filters Environmental Thermoluminescent Dosimetry
	Location:	One-fourth mile south and $\frac{1}{4}$ mile east of Langdon, Missouri, on north side of road, west of railroad tracks, SW $\frac{1}{4}$, S18, T64N, R41W, Atchison County, Missouri.
No. 6	Type: (1) (2)	Air Particulate and Charcoal Filters Environmental Thermoluminescent Dosimetry
	Location:	One mile west of the end of Missouri State Highway "U," SW corner of the intersection, NW $\frac{1}{4}$, S34, T64N, R42W, Atchison County, Missouri.

Sample Station

Sample Description - Type and Location

- No. 7 Type: (1) Air Particulate and Charcoal Filters
 (2) Environmental Thermoluminescent Dosimetry
- Location: One-quarter mile east of Highway 67 at Nemaha on north side of road, SW¼, S6, T4N, R16E, Nemaha County, Nebraska. |
- No. 8 Type: (1) Air Particulate and Charcoal Filters
 (2) Environmental Thermoluminescent Dosimetry
- Location: One-half mile north, ¾ mile west and ¾ mile north of Nemaha on west side of road adjacent to the transmission line, NE¼, S35, T5N, R15E, Nemaha County, Nebraska. |
- No. 9 Type: (1) Air Particulate and Charcoal Filters
 (2) Environmental Thermoluminescent Dosimetry
- Location: Four miles north of Highway No. 136 on Highway No. 67. One mile east of Highway No. 67 and ½ mile north on west side of road, SW¼, S26, T6N, R15E, Nemaha County, Nebraska.
- No. 10 Type: (1) Air Particulate and Charcoal Filters
 (2) Environmental Thermoluminescent Dosimetry
- Location: One mile north of Barada, Nebraska, in SW corner of intersection, NE¼, S14, T3N, R16E, Richardson County, Nebraska.
- No. 11 Type: (1) Water - Ground
- Location: Plant well water supply header at well pits, NW¼, S32, T5N, R16E, Nemaha County, Nebraska.
- No. 12 Type: (1) Water - River
- Location: Sample (1) will be taken from the Missouri River immediately upstream from the Plant Intake Structure (River Mile 532.5). During periods when conditions warrant, Station 35 may be used as an alternate to Station 12 (upstream collection site) for sample type (1). |
- No. 20 Type: (1) Environmental Thermoluminescent Dosimetry
- Location: On NNW boundary of NPPD property, east side of county road, SE¼, S30, T5N, R16E, Nemaha County, Nebraska. |

Sample Station

Sample Description - Type and Location

No. 28

Type: (1) Water - River
(2) Fish
(3) Sediment from Shoreline

Location: Samples (1) and (3) are taken from the Missouri River or its shore, downstream, near River Mile 530. Sample (2) is taken from the Missouri river 1/2 to 3 miles downstream from the plant site.

No. 35

Type: (1) Fish
(2) Water - River (Alternate Site)
(3) Food Products - Broadleaf Vegetation

Location: Sample (1) is taken from the Missouri River about one to three miles above CNS intake structure. During periods when conditions warrant, Station 35 may be used as an alternate to Station 12 (upstream collection site) for sample type (2). Samples (2) and (3) are taken about 1/4 mile south of the Brownville State Recreation Area in Sector A.

No. 44

Type: (1) Environmental Thermoluminescent Dosimetry

Location: One-quarter mile south of Auburn Country Club on Highway No. 75, 1/2 mile east of Highway No. 75 at fence line north of county road, SE1/4, S27, T5N, R14E, Nemaha County, Nebraska.

No. 47

Type: (1) Water - Ground

Location: At Falls City Municipal Water Supply Wells approximately 2 miles south of Rulo, Nebraska (out of Main Header Flow Meter), east side of road, SW1/4, S20, T1N, R18E, Richardson County, Nebraska.

No. 56

Type: (1) Environmental Thermoluminescent Dosimetry

Location: One and one-fourth mile SW of Langdon, Missouri, on Highway "U", on the right side of the highway, NW1/4, S23, T64N, R42W, Atchison County, Missouri.

No. 58

Type: (1) Environmental Thermoluminescent Dosimetry

Location: Three miles south of Brownville, Nebraska, on county road, at the SE corner of the intersection, with the farm road leading to Sample Station No. 2, SE1/4, S31, T5N, R16E, Nemaha County, Nebraska.

No. 59

Type: (1) Environmental Thermoluminescent Dosimetry

Location: One mile SSE of the CNS Elevated Release Point, in the vicinity of the levee at the south boundary of NPPD property, SE1/4, S32, T5N, R16E, Nemaha County, Nebraska.

Sample Station

Sample Description - Type and Location

- No. 66 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two miles south of Nemaha, Nebraska, on Highway No. 67 - east side of highway, NW¼, S19, T4N, R16E, Nemaha County, Nebraska.
- No. 67 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two miles west of Brownville, Nebraska, on Highway No. 136, then north 1½ miles on county road, and east ½ mile, on north side of road, NE¼, S11, T5N, R15E, Nemaha County, Nebraska.
- No. 71 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two miles east of Phelps City, Missouri, on Highway No. 136, then south 1½ miles on county road, and west ¼ mile, SE¼, S6, T64N, R41W, Atchison County, Missouri.
- No. 79 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One and 7/8 miles south of Brownville, Nebraska, on the east side of the paved road, NPPD property, SE¼, S30, T5N, R16E, Nemaha County, Nebraska.
- No. 80 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two and 1/8 miles south of Brownville, Nebraska, on the east side of the paved road, NPPD property, NE¼, S31, T5N, R16E, Nemaha County, Nebraska.
- No. 81 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two and 3/8 miles south of Brownville, Nebraska, in the NE corner of the intersection of the paved county road and the CNS access road, NPPD property, NE¼, S31, T5N, R16E, Nemaha County, Nebraska.
- No. 82 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Seven eighths mile south of Cooper Nuclear Station in field, about ½ mile east of farm buildings on NPPD property, SW¼, S32, T5N, R16E, Nemaha County, Nebraska.
- No. 83 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two and ¼ miles south of Nemaha, Nebraska, on Highway No. 67, then east one mile to the junction of the driveway and county road on the east side of the driveway, NE¼, S19, T4N, R16E, Nemaha County, Nebraska.

Sample Station

Sample Description - Type and Location

- No. 84 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two and ½ miles west of Brownville, Nebraska, on the south side of Highway No. 136, west of school, NW¼, S22, T5N, R15E, Nemaha County, Nebraska.
- No. 85 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One mile east of Brownville, Nebraska, on Highway No. 136, then north ¼ mile on the east side of the county road, NE¼, S33, T65N, R42W, Atchison County, Missouri.
- No. 86 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One mile west of Phelps City, Missouri, on Highway No. 136, then north 1½ miles on Highway "D" - on the west side of road, SE¼, S22, T65N, R42W, Atchison County, Missouri.
- No. 87 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One mile west of Phelps City, Missouri, on Highway No. 136, then south ½ mile on county road and ¾ mile west on county road to the end of the road, NW¼, S3, T64N, R42W, Atchison County, Missouri.
- No. 88 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One mile west of Phelps City, Missouri, on Highway No. 136, then south 2 miles, west side of road, NW¼, S11, T64N, R42W, Atchison County, Missouri.
- No. 89 Type: (1) Environmental Thermoluminescent Dosimetry
Location: Two and ½ miles south of Phelps City, Missouri, on Highway "U", then ½ mile west in the SE corner of the county road intersection, NE¼, S14, T64N, R42W, Atchison County, Missouri.
- No. 90 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One and ½ miles west and ¾ mile south of Langdon, Missouri, on Highway "U", then ¼ mile west, SW¼, S23, T64N, R42W, Atchison County, Missouri.



Sample Station

Sample Description - Type and Location

- No. 91 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One half mile west of Rock Port, Missouri, on the south side of the intersection of Highway No. 136 and Highway No. 275 at the south side of the water tower, NW¼, S28, T65N, R41W, Atchison County, Missouri.
- No. 94 Type: (1) Environmental Thermoluminescent Dosimetry
Location: One quarter mile south of Langdon, Missouri, on the west side of the road, NE¼, S24, T64N, R42W, Atchison County, Missouri.
- No. 96 Type: (1) Food Products - Broadleaf Vegetation
Location: Approximately 1 mile south of Brownville, Nebraska, along paved road in the road ditch in Sector R, SW¼, S19, T5N, R16E, Nemaha County, Nebraska.
- No. 99 Type: (1) Milk - Nearest Producer
Location: One and ¼ miles south of Shubert, Nebraska, on the west side of Highway No. 67, NE¼, S24, T3N, R15E, Richardson County, Nebraska.
- No. 101 Type: (1) Food Products - Broadleaf Vegetation
Location: Five and ½ miles east and ½ mile north of Rock Port, Missouri, near the junction of Highway No. 136 and Highway No. 59, in Sector D. Encompasses portions of several sections, T65N, R40W, Atchison County, Missouri.

NOTES:


- (a) Sample Station numbers missing from the sequence are for inactive or discontinued Sample Stations.

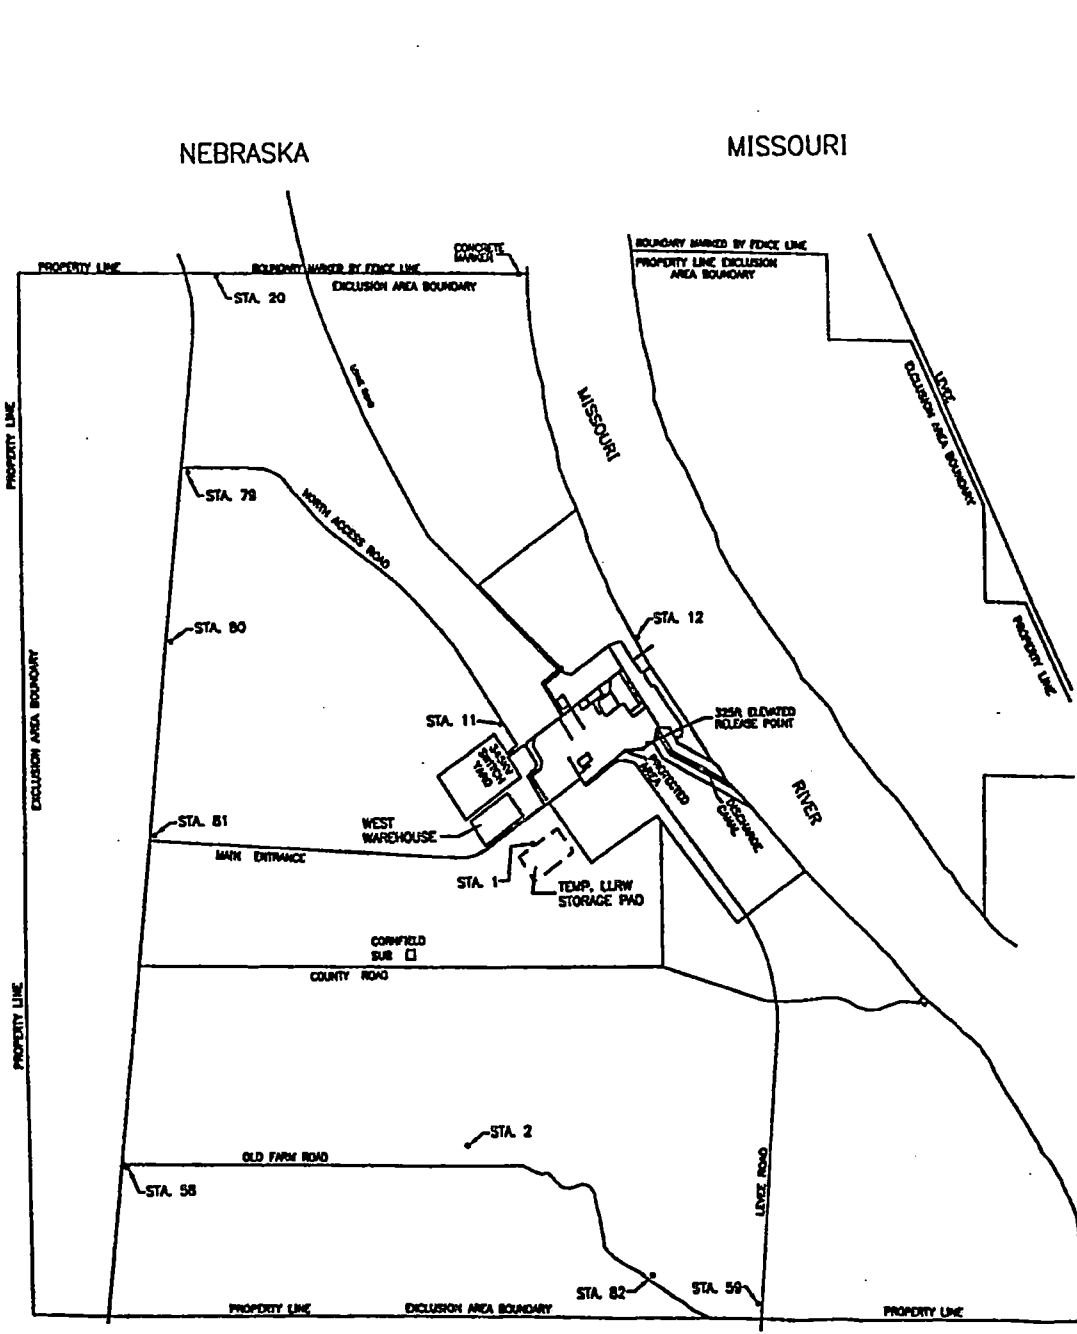

**NEBRASKA PUBLIC POWER DISTRICT
COOPER NUCLEAR STATION**

Site Sampling Station
Location Map

FIGURE C-1

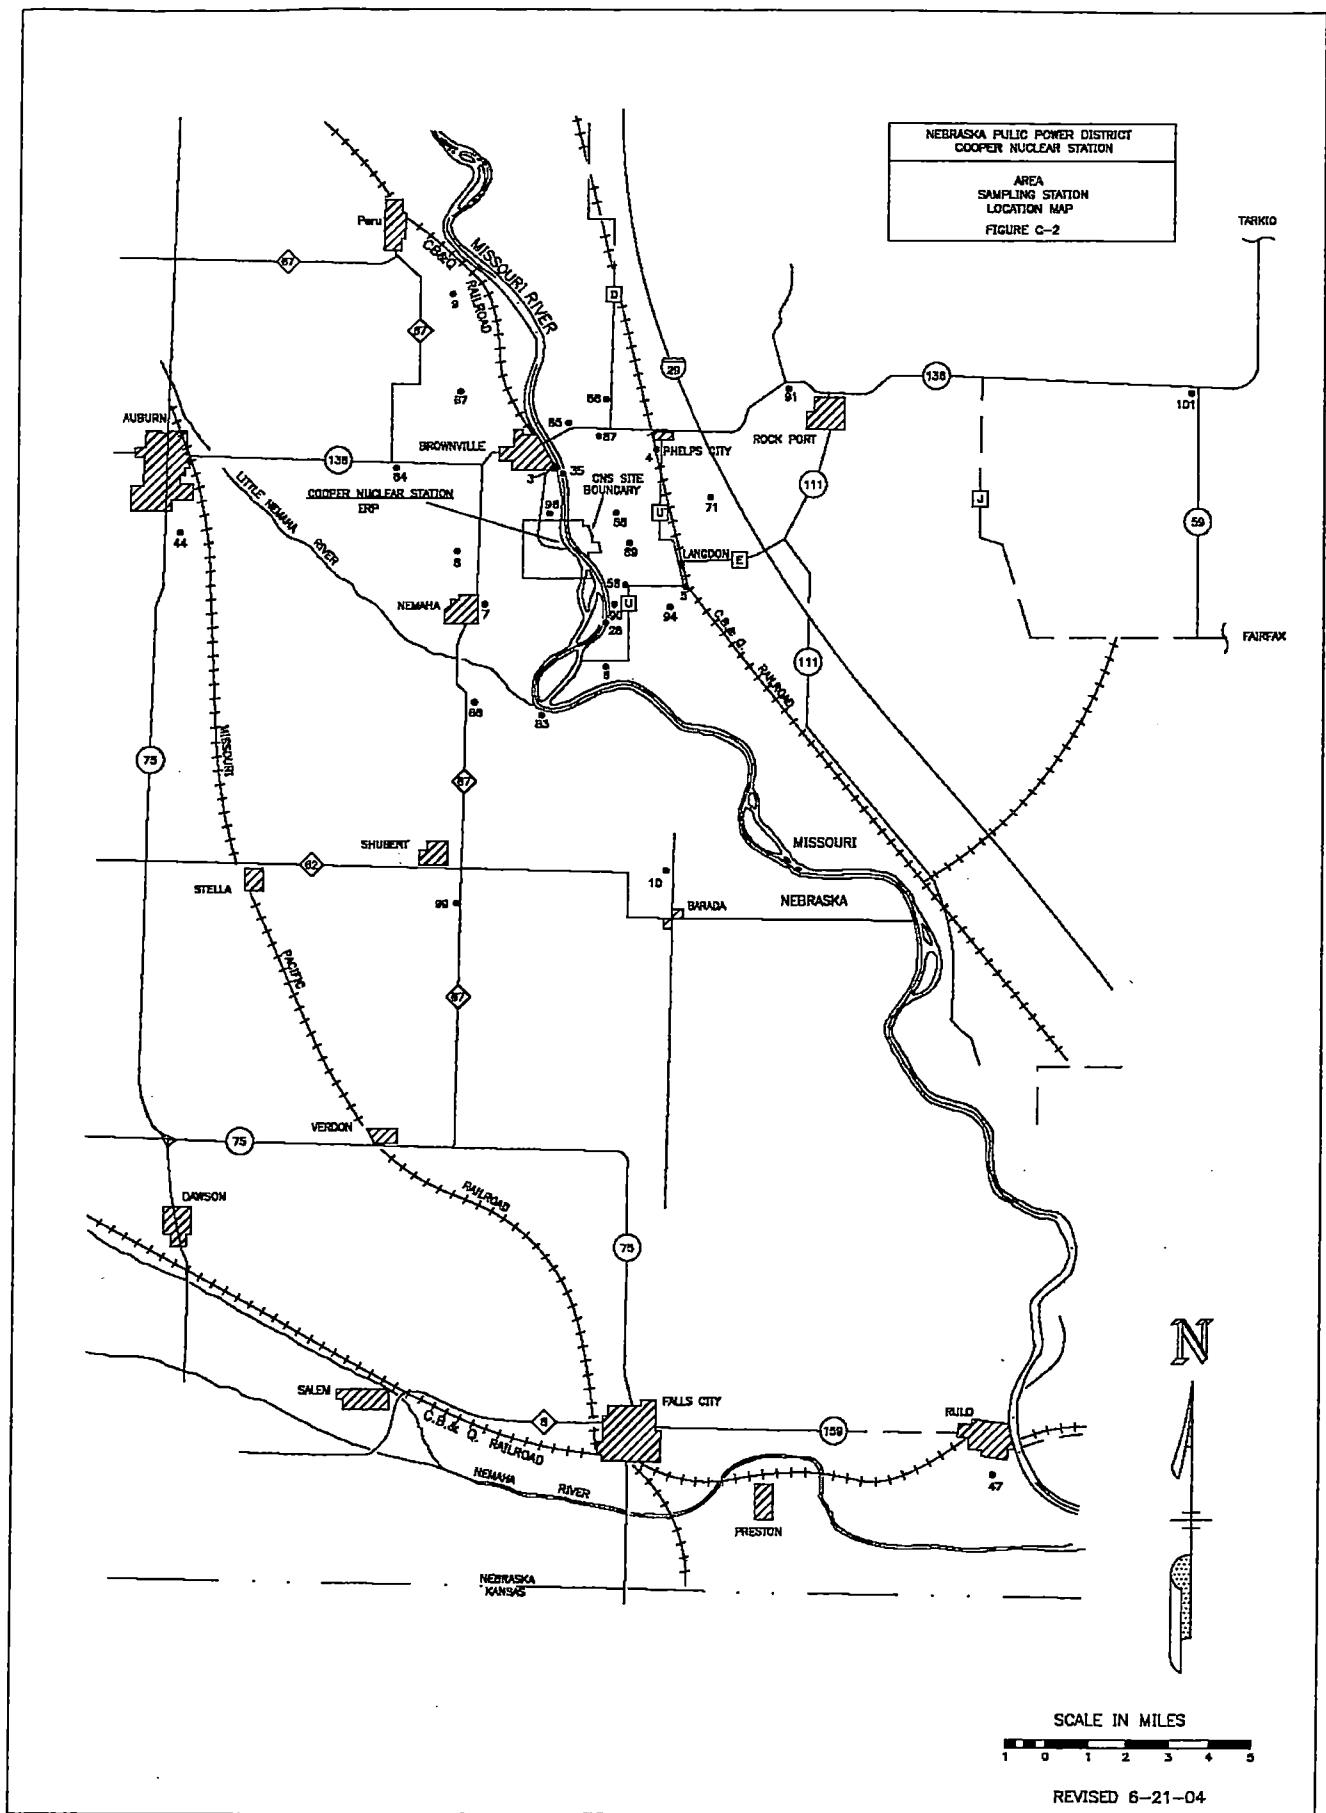

CADD FILE: M0013730

APPENDIX D

ODAM SPECIFICATIONS

**OFFSITE DOSE ASSESSMENT MANUAL
APPENDIX D**

TABLE OF CONTENTS

D 1.0	Use and Application	D 1.0-1
D 2.0	Definitions	D 2.0-1
D 3.0	ODAM Specifications Applicability	D 3.0-1
D 3.1	LIQUID EFFLUENTS	
D 3.1.1	Liquid Effluents Concentration	D 3.1-1
D 3.1.2	Liquid Waste Concentration	D 3.1-5
D 3.1.3	Liquid Effluents Dose	D 3.1-6
D 3.1.4	Outside Temporary Storage of Radioactive Liquid	D 3.1-9
D 3.2	GASEOUS EFFLUENTS	
D 3.2.1	Gaseous Effluents Concentration	D 3.2-1
D 3.2.2	Noble Gas Dose	D 3.2-3
D 3.2.3	Iodine and Particulates	D 3.2-5
D 3.2.4	Offgas Treatment System	D 3.2-10
D 3.2.5	Exhaust Ventilation Treatment System	D 3.2-12
D 3.2.6	Hydrogen Concentration	D 3.2-14
D 3.2.7	Primary Containment Venting and Purging	D 3.2-15
D 3.3	INSTRUMENTATION	
D 3.3.1	Liquid Effluent Monitoring	D 3.3-1
D 3.3.2	Gaseous Effluent Monitoring	D 3.3-8
D 3.4	LIQUID/GASEOUS DOSE	
D 3.4.1	Liquid/Gaseous Effluents Dose	D 3.4-1
D 3.5	SOLID RADIOACTIVE WASTE	
D 3.5.1	Solid Radioactive Waste	D 3.5-1
D 4.0	MONITORING PROGRAM	
D 4.1	Monitoring Program Compliance	D 4.1-1
D 4.2	Monitoring Program Concentration	D 4.2-1
D 4.3	Monitoring Program Dose	D 4.3-1
D 5.0	MISCELLANEOUS PROGRAMS/REPORTS	
D 5.1	Interlaboratory Comparison Program	D 5.1-1
D 5.2	Annual Radiological Environmental Report	D 5.2-1
D 5.3	Radioactive Effluent Release Report	D 5.3-1
D 5.4	Special Reports	D 5.4-1
D 5.5	Major Changes to Radioactive Waste Treatment Systems (Liquid, Gaseous, and Solid)	D 5.5-1

D 1.0 USE AND APPLICATION

The Offsite Dose Assessment Manual (ODAM) Specifications are contained in Section 3.0 of this appendix. They contain operational requirements, Surveillance Requirements, and reporting requirements. Additionally, the Required Actions and associated Completion Times for degraded Conditions are specified. The format is consistent with the Technical Specifications (Appendix A to the CNS Operating License).

The definitions contained in Technical Specifications Section 1.1, "Definitions," apply to the ODA M Specifications. Defined terms are shown in all capital letters, consistent with the Technical Specifications. Any definitions not appearing in the Technical Specifications are stated in Section D 2.0, Definitions of the ODA M.

The rules of usage for the ODA M Specifications are the same as those for the Technical Specifications. These rules are found in Technical Specifications Sections 1.2, "Logical Connectors;" 1.3, "Completion Times;" and 1.4; "Frequency."

D 2.0 DEFINITIONS

SITE AND EXCLUSION AREA BOUNDARY - The SITE AND EXCLUSION AREA BOUNDARY around Cooper Nuclear Station are defined in Figure D2.a-1 below.

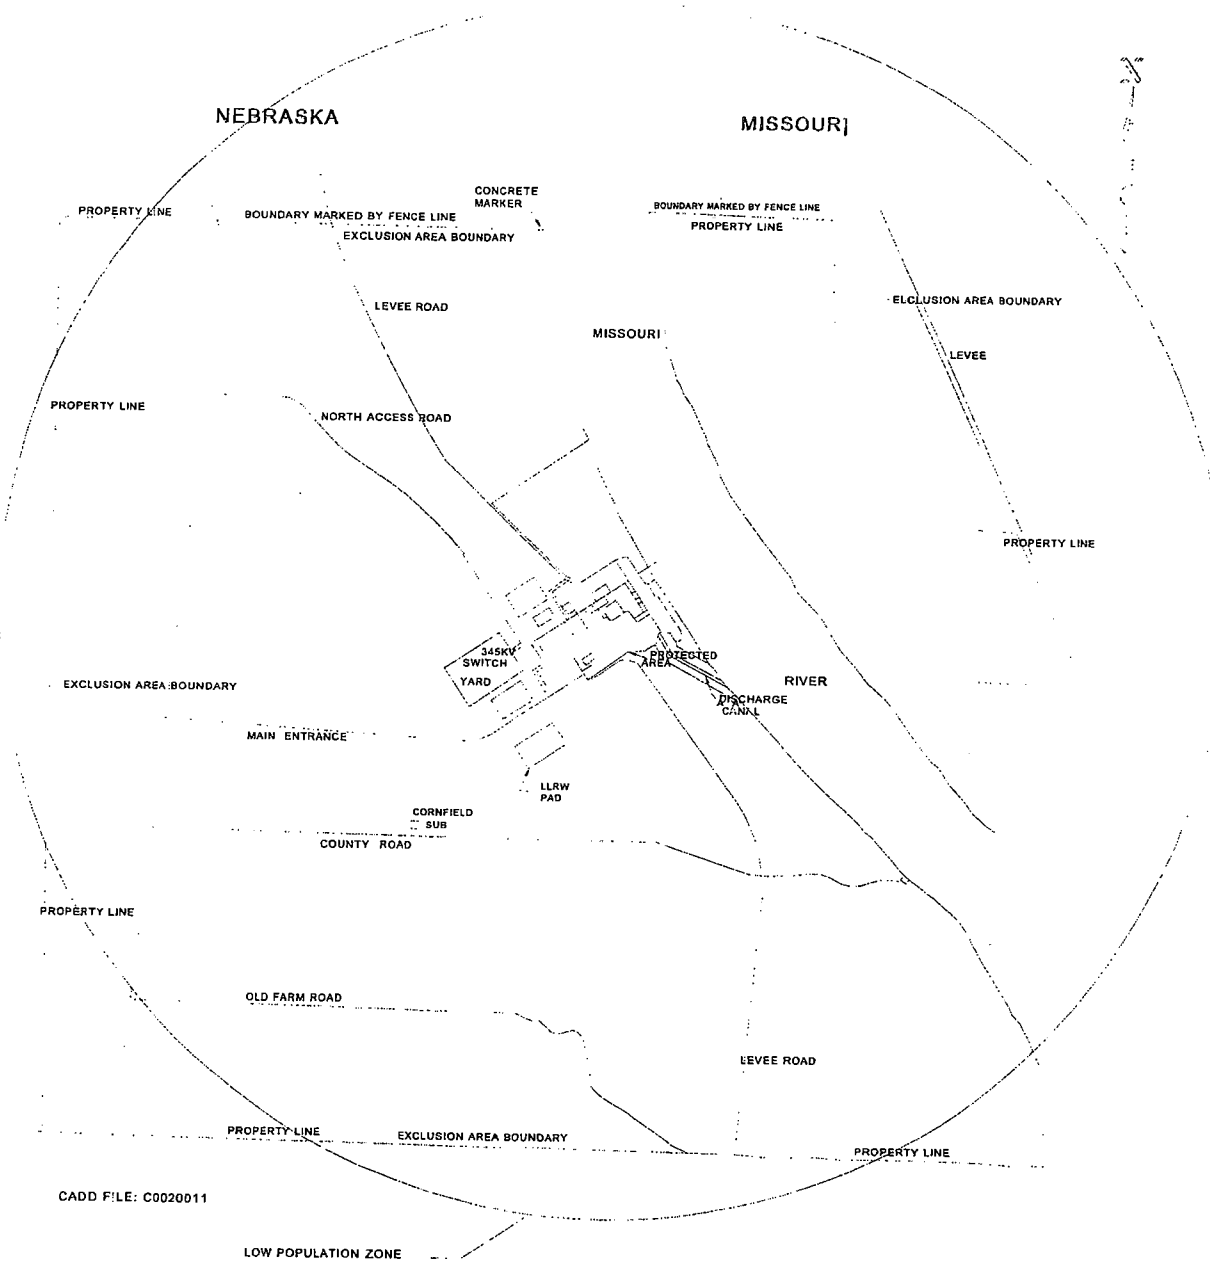


Figure D2.a-1
SITE AND EXCLUSION AREA BOUNDARY

D 2.0 DEFINITIONS

(continued)

SOURCE CHECK - A SOURCE CHECK shall be the qualitative assessment of channel response when the channel sensor is exposed to a source of radioactivity.

D 3.0 ODAM Specifications Applicability

DLCO 3.0.1 DLCOs shall be met during the MODES or other specified conditions in the Applicability, except as provided in DLCO 3.0.2.

DLCO 3.0.2 Upon discovery of a failure to meet a DLCO, the Required Actions of the associated Conditions shall be met, except as provided in DLCO 3.0.5.

If the DLCO is met or is no longer applicable prior to expiration of the specified Completion Time(s), completion of the Required Action(s) is not required, unless otherwise stated.

DLCO 3.0.3 When a DLCO is not met and the associated ACTIONS are not met, an associated ACTION is not provided, or if directed by the associated ACTIONS, action shall be initiated to:

- a. Restore compliance with the DLCO or associated ACTIONS, and
- b. Enter the circumstances into the Corrective Action Program.

-----NOTE-----
DLCO 3.0.3.b shall be completed if DLCO 3.0.3 is entered.

Exceptions to this Specification are stated in the individual Specifications.

DLCO 3.0.4 Not Applicable to ODAM Specifications.

DLCO 3.0.5 Equipment removed from service or declared inoperable to comply with ACTIONS may be returned to service under administrative control solely to perform testing required to demonstrate its OPERABILITY or the OPERABILITY of other equipment. This is an exception to DLCO 3.0.2 for the system returned to service under administrative control to perform the testing required to demonstrate OPERABILITY.

D 3.0 ODA M Specifications Applicability

DSR 3.0.1 DSRs shall be met during the MODES or other specified conditions in the Applicability for individual DLCOs, unless otherwise stated in the DSR. Failure to meet a Surveillance, whether such failure is experienced during the performance of the Surveillance or between performances of the Surveillance, shall be failure to meet the DLCO. Failure to perform a Surveillance within the specified Frequency shall be failure to meet the DLCO except as provided in DSR 3.0.3. Surveillances do not have to be performed on inoperable equipment or variables outside specified limits.

DSR 3.0.2 The specified Frequency for each DSR is met if the Surveillance is performed within 1.25 times the interval specified in the Frequency, as measured from the previous performance or as measured from the time a specified condition of the Frequency is met.

For Frequencies specified as "once," the above interval extension does not apply.

If a Completion Time requires periodic performance on a "once per . . ." basis, the above Frequency extension applies to each performance after the initial performance.

Exceptions to this Specification are stated in the individual Specifications.

DSR 3.0.3 If it is discovered that a Surveillance was not performed within its specified Frequency, then compliance with the requirement to declare the DLCO not met may be delayed, from the time of discovery, up to 24 hours or up to the limit of the specified Frequency, whichever is less. This delay period is permitted to allow performance of the Surveillance.

If the Surveillance is not performed within the delay period, the DLCO must immediately be declared not met, and the applicable Condition(s) must be entered.

When the Surveillance is performed within the delay period and the Surveillance is not met, the DLCO must immediately be declared not met, and the applicable Condition(s) must be entered.

D 3.1 LIQUID EFFLUENTS

D 3.1.1 Liquid Effluents Concentration

DLCO 3.1.1 The concentration of radioactive material in water beyond the SITE AND EXCLUSION AREA BOUNDARY (Figure D2.a-1) due to radioactive liquid effluent shall not exceed:

- a. The concentration specified in 10 CFR Part 20.1302 for radionuclides other than dissolved or entrained noble gases; and
- b. 2×10^{-4} $\mu\text{Ci/ml}$ total activity concentration for dissolved or entrained noble gases.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Concentration of radioactive material beyond the SITE AND EXCLUSION AREA BOUNDARY due to radioactive liquid effluent exceeds limits.	A.1 Initiate action to restore concentration to within limits.	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.1.1.1 Perform radioactive liquid waste sampling and activity analysis.	In accordance with Table D3.1.1-1
DSR 3.1.1.2 The analytical results shall be used with methods in the ODAM to verify that the average concentration beyond the SITE AND EXCLUSION AREA BOUNDARY does not exceed DLCO 3.1.1 when SR-89, SR-90, and Fe-55 concentrations are averaged over no more than 3 months and other radionuclide concentrations are averaged over no more than 31 days.	In accordance with ODAM Section 2.4

Table D3.1.1-1 (Page 1 of 2)
Radioactive Liquid Waste Sampling and Analysis

LIQUID RELEASE TYPE	SAMPLE TYPE	SAMPLE FREQUENCY	ANALYSIS FREQUENCY	SAMPLE ANALYSIS	SAMPLE LOWER LIMIT OF DETECTION (LLD)(h)	
Batch Waste Release Tanks (c)	Grab sample	Each batch (a)	Each batch (a)	Principal Gamma Emitters (j)(k)	5×10^{-7} $\mu\text{Ci/ml}$ (i)	
				I-131	1×10^{-6} $\mu\text{Ci/ml}$	
	Proportional Composite of grab samples (f)	Each batch (a)	31 days (b)	Dissolved and Entrained Gases (gamma emitters)	1×10^{-5} $\mu\text{Ci/ml}$	
				H-3	1×10^{-5} $\mu\text{Ci/ml}$	
				31 days (b) (l)	Gross Alpha	1×10^{-7} $\mu\text{Ci/ml}$
				92 days (b) (l)	Sr-89	5×10^{-8} $\mu\text{Ci/ml}$
			Sr-90	5×10^{-8} $\mu\text{Ci/ml}$		
			Fe-55	1×10^{-6} $\mu\text{Ci/ml}$		
Plant Service Water Effluent (d)	Grab Sample	7 days	7 days (b)	Principal Gamma Emitters (j)(k)	5×10^{-7} $\mu\text{Ci/ml}$ (i)	
Plant Continuous Discharge (e)	Proportional Composite of grab Samples (g)	24 hours	7 days (b)	Principal Gamma Emitters (j) (k)	5×10^{-7} $\mu\text{Ci/ml}$ (i)	
				I-131	1×10^{-6} $\mu\text{Ci/ml}$	
	Grab Sample	31 days	31 days (b)	Dissolved and Entrained Gases (gamma emitters)	1×10^{-5} $\mu\text{Ci/ml}$	
				H-3	1×10^{-5} $\mu\text{Ci/ml}$	
				31 days (b) (l)	Gross Alpha	1×10^{-7} $\mu\text{Ci/ml}$
				92 days (b) (l)	Sr-89	5×10^{-8} $\mu\text{Ci/ml}$
			Sr-90	5×10^{-8} $\mu\text{Ci/ml}$		
			Fe-55	1×10^{-6} $\mu\text{Ci/ml}$		

- (a) Complete prior to each release.
- (b) Analysis may be performed after release.
- (c) A batch release is the discharge of liquid wastes of a discrete volume. Prior to sampling for analyses, each batch shall be isolated and then thoroughly mixed.
- (d) A grab sample of plant service water effluent shall be analyzed at least once each week in accordance with Table D3.1.1-1, Plant Service Water Effluent. In the event the radioactivity concentration in a sample exceeds 3×10^{-6} $\mu\text{Ci/ml}$, or in the event the plant service water effluent monitor indicates the presence of an activity concentration greater than 3×10^{-6} $\mu\text{Ci/ml}$, sampling and analysis according to Table D3.1.1-1, Plant Continuous Discharge, shall commence and shall be performed as long as the condition persists.
- (e) A continuous release is the discharge of liquid wastes of a nondiscrete volume; e.g., from a volume of system that has an input flow during the continuous release.

Table D3.1.1-1 (Page 2 of 2)
Radioactive Liquid Waste Sampling and Analysis

- (f) A composite sample is one in which the quantity of liquid sampled is proportional to the quantity of liquid waste discharged and in which the method of sampling employed results in a specimen which is representative of the liquids released.
- (g) To be representative of the quantities and concentrations of radioactive materials in liquid effluents, daily grab samples shall be collected in proportion to the rate of flow of the effluent stream. Prior to analysis, all samples taken for the composite shall be thoroughly mixed in order for the composite sample to be representative of the effluent release.
- (h) The LLD is the smallest concentration of the radioactive material in a sample that will be detected with 95% probability (5% probability of falsely concluding that a blank observation represents a "real" signal).

For a particular measurement system (which may include radiochemical separation):

$$LLD = \frac{(4.66)(S_b)}{(E)(V)(2.22)(Y) e^{-\lambda \Delta t}}$$

Where:

LLD is the "a priori" lower limit of detection as described above (as picocurie per unit mass or volume),

s_b is the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute),

E is the counting efficiency (as counts per transformation),

V is the sample size (in units of mass or volume),

2.22 is the number of transformations per minute per picocurie,

Y is the fractional radiochemical yield (when applicable),

λ is the radioactive decay constant for the particular radionuclide, and

Δt is the elapsed time between midpoint of sample collection and time of counting (for plant effluents, not environmental samples).

The value of s_b used in the calculation of the LLD for a detection system shall be based on the actual observed variance of the background counting rate or of the counting rate of the blank samples (as appropriate) rather than on an unverified theoretically predicted variance. In calculating the LLD for a radionuclide determined by gamma-ray spectrometry, the background shall include the typical contributions of other radionuclides normally present in the samples. Typical values of E, V, Y and Δt shall be used in the calculation.

- (i) For certain radionuclides with low gamma yield or low energies, or for certain radionuclide mixtures, it may not be possible to measure radionuclides in concentrations near the LLD. Under these circumstances, the LLD may be increased inversely proportionally to the magnitude of the gamma yield (i.e., $5 \times 10^{-7}/I$, where I is the photon abundance expressed as a decimal fraction), but in no case shall the LLD, as calculated in this manner for a specific radionuclide, be greater than 10% of the value specified in 10 CFR 20, Appendix B, Table 2, Column 2.
- (j) The principal gamma emitters for which the LLD specification will apply are exclusively the following radionuclides: Mn-54, Fe-59, Co-58, Co-60, Zn-65, Mo-99, Cs-134, Cs-137, Ce-141, and Ce-144. This list does not mean that only these nuclides are to be detected and reported. Other peaks which are measurable and identifiable, together with the above nuclides, shall also be identified and reported. Nuclides which are below the LLD for the analysis should not be reported as being present at the LLD level. When unusual circumstances result in LLD's higher than required, the reasons shall be documented in the Radioactive Effluent Release Report.
- (k) If an isotopic analysis is unavailable, batch releases may be made for up to 14 days provided the gross beta/gamma concentration to the unrestricted area is $\leq 1 \times 10^{-8}$ $\mu\text{C}/\text{ml}$ and the sample is analyzed when the instrumentation is once again available.
- (l) Analysis to be completed within 92 days of the composite sample end date.

D 3.1 LIQUID EFFLUENTS

D 3.1.2 Liquid Waste Concentration

DLCO 3.1.2 The concentration of radioactive materials in liquid wastes from pre-release analysis shall be $\leq 0.01 \mu\text{Ci/ml}$, excluding tritium and noble gases.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Concentration of radioactive materials in liquid wastes from pre-release analysis $> 0.01 \mu\text{Ci/ml}$, excluding tritium and noble gases.</p>	<p>A.1 Appropriate parts of the liquid radwaste treatment system shall be used to reduce the concentration.</p>	<p>Prior to liquid waste discharge</p>
<p>B. Required Action and associated Completion Time not met.</p> <p><u>AND</u></p> <p>Radioactive liquid waste being discharged without treatment in excess of $0.01 \mu\text{Ci/ml}$, excluding tritium and noble gases.</p>	<p>B.1 Prepare and submit a Special Report to the NRC pursuant to Specification D 5.4 that identifies equipment or subsystems not OPERABLE and the reason for the inoperability, action(s) taken to restore the inoperable equipment to OPERABLE status and a summary description of the action(s) taken to prevent a recurrence.</p>	<p>31 days following the end of the quarter in which the limit was exceeded</p>

D 3.1 LIQUID EFFLUENTS

D 3.1.3 Liquid Effluents Dose

DLCO 3.1.3 The dose to a Member of the Public due to radioactive material in liquid effluents beyond the SITE AND EXCLUSION AREA BOUNDARY (Figure D2.a-1) shall be limited to:

- a. ≤ 1.5 mrem to the total body or ≤ 5.0 mrem to any body organ during any calender quarter; and
- b. ≤ 3.0 mrem to the total body or ≤ 10.0 mrem to any body organ during any calender year.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Calculated dose due to radioactive material in liquid effluents beyond the SITE AND EXCLUSION AREA BOUNDARY exceeds the limit.</p>	<p>A.1 Prepare and submit a Special Report, in lieu of any other report, pursuant to Specification D 5.4 to the NRC which identifies the cause(s) for exceeding the limit(s) and defines the corrective actions to be taken.</p>	<p>31 days following the end of the quarter in which the limit was exceeded</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>B. Calculated dose due to radioactive material in liquid effluents beyond the SITE AND EXCLUSION AREA BOUNDARY exceeds two times the limit.</p>	<p>B.1 Prepare and submit a Special Report, in lieu of any other report, pursuant to Specification D 5.4 to the NRC which: 1) defines actions to be taken to reduce releases and prevent recurrence, and 2) results of an exposure analysis including effluent pathways and direct radiation to determine whether the dose or dose commitment to a Member of the Public due to radiation and radioactive releases from Cooper Station during the calendar year through the period covered by the calculation was ≤ 75 mrem to the thyroid and ≤ 25 mrem to the total body and all other body organs.</p>	<p>31 days</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 3.1.3.1	Perform an assessment of compliance with DLCO 3.1.3.	31 days
DSR 3.1.3.2	Project a prospect of compliance with DLCO 3.1.3 for radioactive liquid releases without radwaste system in operation.	In any quarter in which Radioactive liquid releases are made and the radwaste system is not operated

D 3.1 LIQUID EFFLUENTS

D 3.1.4 Outside Temporary Storage of Radioactive Liquid

DLCO 3.1.4 Radioactive liquid contained in unprotected outdoor temporary liquid storage tanks shall conform to the requirements of Technical Specification (TS) 5.5.8.b.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Level of radioactivity exceeds the limits of TS 5.5.8.b.</p>	<p>A.1 Suspend addition of radioactive material.</p>	<p>Immediately</p>
	<p><u>AND</u></p> <p>A.2 Begin measures to reduce content to within the limits of TS 5.5.8.b.</p>	<p>Immediately</p>
	<p><u>AND</u></p> <p>A.3 Describe the events leading to the condition in the Radioactive Effluent Release Report.</p>	<p>In accordance with the Radioactive Effluent Release Report frequency</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 3.1.4.1	Sample and analyze radioactive liquid located in unprotected outdoor temporary liquid storage tanks for level of radioactivity.	7 days during addition of radioactive liquid to the tanks

D 3.2 GASEOUS EFFLUENTS

D 3.2.1 Gaseous Effluents Concentration

DLCO 3.2.1 The dose rate beyond the SITE AND EXCLUSION AREA BOUNDARY (Figure D2.a-1) due to radioactive gaseous effluents shall be limited to the following:

- a. For noble gases, ≤ 500 mrem per year to the total body and ≤ 3000 mrem per year to the skin; and
- b. For H-3, I-131, I-133, and radioactive material in particulate form with half lives ≥ 8 days, ≤ 1500 mrem per year to any organ when;
 - 1. The dose rate due to H-3, Sr-89, Sr-90, and alpha emitting radionuclides is averaged over ≤ 3 months and;
 - 2. The dose rate due to other radionuclides is averaged over ≤ 31 days.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Dose rates beyond the SITE AND EXCLUSION AREA BOUNDARY due to radioactive gaseous effluents exceeds limits.	A.1 Decrease release rate to comply with the limits.	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.2.1.1 Perform an assessment of compliance for DLCO 3.2.1(b).	31 days

D 3.2 GASEOUS EFFLUENTS

D 3.2.2 Noble Gases Dose

DLCO 3.2.2 The air dose beyond the SITE AND EXCLUSION AREA BOUNDARY (Figure D2.a-1) due to noble gases released in gaseous effluents shall be limited to the following:

- a. For gamma radiation, ≤ 5 mrad during any calendar quarter and ≤ 10 mrad during any calendar year; and
- b. For beta radiation, ≤ 10 mrad during any calendar quarter and ≤ 20 mrad during any calendar year.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Calculated air dose due to radioactive noble gases beyond the SITE AND EXCLUSION AREA BOUNDARY exceeds the limit.	A.1 Prepare and submit a Special Report pursuant to Specification D 5.4 to the NRC in lieu of any other report which identifies the cause(s) and defines the corrective actions taken.	31 days following the end of the quarter in which the limit was exceeded

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>B. Calculated air dose due to radioactive noble gases beyond the SITE AND EXCLUSION AREA BOUNDARY exceeds two times the limit.</p>	<p>B.1 Prepare and submit a Special Report, in lieu of any other report, pursuant to Specification D 5.4 to the NRC which: 1) defines actions to be taken to reduce releases and prevent recurrence, and 2) results of an exposure analysis including effluent pathways and direct radiation to determine whether the dose or dose commitment to a Member of the Public due to radiation and radioactive releases from Cooper Station during the calendar year through the period covered by the calculation was ≤ 75 mrem to the thyroid and ≤ 25 mrem to the total body or any other body organ.</p>	<p>31 days</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>DSR 3.2.2.1 Perform an assessment of compliance for DLCO 3.2.2</p>	<p>31 days</p>

D 3.2 GASEOUS EFFLUENTS

D 3.2.3 Iodine and Particulates

DLCO 3.2.3 The dose to a Member of the Public due to I-131, I-133 and radioactive material in particulate form having a half-life > 8 days in gaseous effluents beyond the SITE AND EXCLUSION AREA BOUNDARY (Figure D2.a-1) shall be limited to:

- a. ≤ 7.5 mrem to any organ during any calendar quarter; and
- b. ≤ 15 mrem to any organ during any calendar year.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Calculated dose due to I-131, I-133 and radioactive material in particulate form having a half-life > 8 days beyond the SITE AND EXCLUSION AREA BOUNDARY exceeds the limit.</p>	<p>A.1 Prepare and submit a Special Report, in lieu of any other report, pursuant to Specification D 5.4 to the NRC which identifies the cause(s) for exceeding the limit(s) and describes the corrective action taken.</p>	<p>31 days following the end of the quarter in which the limit was exceeded.</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>B. Calculated dose due to I-131, I-133 and radioactive material in particulate form having a half-life > 8 days beyond the SITE AND EXCLUSION AREA BOUNDARY exceeds two times the limit.</p>	<p>B.1 Prepare and submit a Special Report, in lieu of any other report, pursuant to Specification D 5.4 to the NRC which: 1) defines actions to be taken to reduce releases and prevent recurrence, and 2) results of an exposure analysis including effluent pathways and direct radiation to determine whether the dose or dose commitment to a Member of the Public due to radiation and radioactive releases from Cooper Station was ≤ 75 mrem to the thyroid and ≤ 25 mrem to the total body or any other body organ.</p>	<p>31 days</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>DSR 3.2.3.1 Perform radioactive gaseous waste sampling and activity analysis on effluents other than noble gases.</p>	<p>In accordance with Table D3.2.3-1</p>
<p>DSR 3.2.3.2 Perform a dose assessment to determine compliance with DLCO 3.2.3.</p>	<p>31 days</p>

Table D3.2.3-1 (Page 1 of 3)
Radioactive Gaseous Waste Sampling and Analysis

GASEOUS RELEASE TYPE	SAMPLE TYPE	SAMPLE FREQUENCY	ANALYSIS FREQUENCY	SAMPLE ANALYSIS	SAMPLE LOWER LIMIT OF DETECTION(LLD) (h)
1. Elevated Release Point (ERP)	Grab Sample	31 days (c)	31 days (c)	Principal Gamma Emitters (f)	1×10^{-4} $\mu\text{Ci/ml}$ (i)
	Grab Sample	92 days (a)	92 days	H-3	1×10^{-6} $\mu\text{Ci/ml}$
	Charcoal Sample	Continuous (b)	7 days (d)	I-131	1×10^{-12} $\mu\text{Ci/ml}$
				I-133	1×10^{-10} $\mu\text{Ci/ml}$
	Particulate Sample	Continuous (b)	7 days (d)	Principal Gamma Emitters (f) (I-131, Others)	1×10^{-11} $\mu\text{Ci/ml}$ (i)
	Composite Particulate Sample (e)	Continuous (b)	92 days (j)	Sr-89	1×10^{-11} $\mu\text{Ci/ml}$
				Sr-90	1×10^{-11} $\mu\text{Ci/ml}$
Gross Alpha				1×10^{-11} $\mu\text{Ci/ml}$	
Noble Gas Monitor	Continuous (b)	Continuous	Gross Noble Gases (g) (Beta, Gamma)	1×10^{-6} $\mu\text{Ci/ml}$	
2. Reactor Building Vent	Grab Sample	31 days (c)	31 days (c)	Principal Gamma Emitters (f)	1×10^{-4} $\mu\text{Ci/ml}$ (i)
	Grab Sample	92 days (a)	92 days	H-3	1×10^{-6} $\mu\text{Ci/ml}$
	Charcoal Sample	Continuous (b)	7 days (d)	I-131	1×10^{-12} $\mu\text{Ci/ml}$
				I-133	1×10^{-10} $\mu\text{Ci/ml}$
	Particulate Sample	Continuous (b)	7 days (d)	Principal Gamma Emitters (f) (I-131, Others)	1×10^{-11} $\mu\text{Ci/ml}$ (i)
	Composite Particulate Sample (e)	Continuous (b)	92 days (j)	Sr-89	1×10^{-11} $\mu\text{Ci/ml}$
				Sr-90	1×10^{-11} $\mu\text{Ci/ml}$
Gross Alpha				1×10^{-11} $\mu\text{Ci/ml}$	
Noble Gas Monitor	Continuous (b)	Continuous	Gross Noble Gases (g) (Beta, Gamma)	1×10^{-6} $\mu\text{Ci/ml}$	
3. Augmented Radwaste Building Vent	Grab Sample	31 days (c)	31 days (c)	Principal Gamma Emitters (f)	1×10^{-4} $\mu\text{Ci/ml}$ (i)
	Grab Sample	92 days (a)	92 days	H-3	1×10^{-6} $\mu\text{Ci/ml}$
	Charcoal Sample	Continuous (b)	7 days (d)	I-131	1×10^{-12} $\mu\text{Ci/ml}$

(continued)

Table D3.2.3-1 (Page 2 of 3)
Radioactive Gaseous Waste Sampling and Analysis

GASEOUS RELEASE TYPE	SAMPLE TYPE	SAMPLE FREQUENCY	ANALYSIS FREQUENCY	SAMPLE ANALYSIS	SAMPLE LOWER LIMIT OF DETECTION (LLD)(h)
3. (continued)	Charcoal Sample	Continuous (b)	7 days (d)	I-133	1×10^{-10} $\mu\text{Ci/ml}$
	Particulate Sample	Continuous (b)	7 days (d)	Principal Gamma Emitters (f) (I-131, Others)	1×10^{-11} $\mu\text{Ci/ml}$ (i)
	Composite Particulate Sample (e)	Continuous (b)	92 days (j)	Sr-89	1×10^{-11} $\mu\text{Ci/ml}$
				Sr-90	1×10^{-11} $\mu\text{Ci/ml}$
				Gross Alpha	1×10^{-11} $\mu\text{Ci/ml}$
Noble Gas Monitor	Continuous (b)	Continuous	Gross Noble Gases (g) (Beta, Gamma)	1×10^{-6} $\mu\text{Ci/ml}$	
4. Turbine Building Vent (Gaseous)	Grab Sample	31 days (c)	31 days (c)	Principal Gamma Emitters (f)	1×10^{-4} $\mu\text{Ci/ml}$ (i)
	Grab Sample	92 days (a)	92 days	H-3	1×10^{-6} $\mu\text{Ci/ml}$
	Charcoal Sample	Continuous (b)	7 days (d)	I-131	1×10^{-12} $\mu\text{Ci/ml}$
				I-133	1×10^{-10} $\mu\text{Ci/ml}$
	Particulate Sample	Continuous (b)	7 days (d)	Principal Gamma Emitters (f) (I-131, Others)	1×10^{-11} $\mu\text{Ci/ml}$ (i)
	Composite Particulate Sample (e)	Continuous (b)	92 days (j)	Sr-89	1×10^{-11} $\mu\text{Ci/ml}$
				Sr-90	1×10^{-11} $\mu\text{Ci/ml}$
				Gross Alpha	1×10^{-11} $\mu\text{Ci/ml}$
	Noble Gas Monitor	Continuous (b)	Continuous	Gross Noble Gases (g) (Beta, Gamma)	1×10^{-6} $\mu\text{Ci/ml}$
	5. Multi Purpose Facility (MPF) Building Vent (Gaseous)	Charcoal Sample	Continuous (b)	7 days (d)	I-131
I-133					1×10^{-10} $\mu\text{Ci/ml}$
Particulate Sample		Continuous (b)	7 days (d)	Principal Gamma Emitters (f) (I-131, Others)	1×10^{-11} $\mu\text{Ci/ml}$ (i)
Composite Particulate Sample (e)		Continuous (b)	92 days (j)	Sr-89	1×10^{-11} $\mu\text{Ci/ml}$
				Sr-90	1×10^{-11} $\mu\text{Ci/ml}$
				Gross Alpha	1×10^{-11} $\mu\text{Ci/ml}$

(a) A H-3 grab sample will also be taken when the reactor vessel head is removed. This sample will be taken at the ERP or Reactor Building Vent whichever will be representative dependent upon the head removal vacuum procedure.

(b) The ratio of the sample flow rate to the sampled stream flow rate shall be known for the time period covered by each dose or dose rate calculation made in accordance with Specifications D 3.2.1, D 3.2.2 and D 3.2.3.

(continued)

Table D3.2.3-1 (Page 3 of 3)
Radioactive Gaseous Waste Sampling and Analysis

- (c) Analyses shall also be performed following an increase as indicated by the gaseous release monitor of greater than 50% in the steady state release, after factoring out increases due to power changes or other operational occurrences, which could alter the mixture of radionuclides.
- (d) Analysis shall also be performed following an increase as indicated by the gaseous release monitor of greater than 50% in the steady state release, after factoring out increases due to power changes or other operational occurrences, which could alter the mixture of radionuclides. When samples collected for 24 hours or less are analyzed, the corresponding LLD's may be increased by a factor of 10.
- (e) A quarterly composite particulate sample shall include a portion of each week's particulate samples collected during the quarter.
- (f) The principal gamma emitters for which the LLD specification will apply are exclusively the following radionuclides: Kr-87, Kr-88, Xe-133, Xe-133m, Xe-135, and Xe-138 for the gaseous emissions and Mn-54, Fe-59, Co-58, Co-60, Zn-65, Mo-99, Cs-134, Cs-137, Ce-141, and Ce-144 for particulate emissions. This list does not mean that only these nuclides are to be detected and reported. Other peaks which are measurable and identifiable, together with the above nuclides, shall also be identified and reported. Nuclides which are below the LLD for the analyses should not be reported as being present at the LLD level for that nuclide. When unusual circumstances cause LLD's higher than required for more than 31 days, the reasons shall be documented in the Radioactive Effluent Release Report.
- (g) The noble gas continuous monitor shall be calibrated using laboratory analysis of the grab samples from Table D3.2.3-1 or using reference sources.
- (h) The LLD is the smallest concentration of radioactive material in sample that will be detected with 95% probability (5% probability of falsely concluding that a blank observation represents a "real" signal.)

For a particular measurement system (which may include radiochemical separation):

$$LLD = \frac{(4.66)(s_b)}{(E)(V)(2.22)(Y)e^{-\lambda \Delta t}}$$

Where:

LLD is the "a priori" lower limit of detection as described above (as picocurie per unit mass or volume),

s_b is the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute),

E is the counting efficiency (as counts per transformation),

V is the sample size (in units of mass or volume),

2.22 is the number of transformations per minute per picocurie,

Y is the fractional radiochemical yield (when applicable),

λ is the radioactive decay constant for the particular radionuclide, and

Δt is the elapsed time between midpoint of sample collection and time of counting (for plant effluents, not environmental samples).

The value of s_b used in the calculation of the LLD for a detection system shall be based on the actual observed variance of the background counting rate or of the counting rate of the blank samples (as appropriate) rather than on an unverified theoretically predicted variance. In calculating the LLD for a radionuclide determined by gamma-ray spectrometry, the background shall include the typical contributions of other radionuclides normally present in the samples. Typical values of E, V, Y and Δt shall be used in the calculation.

- (i) For certain radionuclides with low gamma yield or low energies, or for certain radionuclide mixtures, it may not be possible to measure radionuclides in concentrations near the LLD. Under these circumstances, the LLD may be increased inversely proportional to the magnitude of the gamma yield (i.e., $1 \times 10^{-4}I$, where I is the photon abundance expressed as a decimal fraction), but in no case shall the LLD, as calculated in this manner for a specific radionuclide, be greater than 10% of the values specified in 10 CFR 20, Appendix B, Table 2, Column 1.
- (j) Analysis to be completed within 92 days of the composite sample end date.

D 3.2 GASEOUS EFFLUENTS

D 3.2.4 Offgas Treatment System

DLCO 3.2.4 Gaseous releases discharged through the Offgas Treatment System shall have at least one train of charcoal adsorbers in service.

APPLICABILITY: Main condenser air ejector in service, except during startup or shutdown with reactor < 10% rated power or when system cannot function due to low offgas flow.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Gaseous releases discharged without either train of charcoal adsorbers in service.	A.1 Restore release of gaseous discharge via charcoal adsorbers.	7 days
B. Required Action and associated Completion Time not met.	B.1 Prepare and submit a Special Report pursuant to Specification D 5.4 to the NRC which identifies the inoperable equipment and describes the corrective action taken.	31 days following the end of the quarter in which the release occurred

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.2.4.1 Verify operation of the Offgas Treatment System charcoal adsorbers by using the gaseous effluent monitoring program in D 3.3.2, Gaseous Effluent Monitoring.	In accordance with the DSR frequencies of D 3.3.2.
DSR 3.2.4.2 Project the prospect of compliance with DLCO 3.2.5, Condition B.	Every 31 days when radioactive material in gaseous effluent is released without treatment.

D 3.2 GASEOUS EFFLUENTS

D 3.2.5 Exhaust Ventilation Treatment Systems (EVTS)

DLCO 3.2.5 The Exhaust Ventilation Treatment Systems (EVTS) shall be operated to treat radioactive materials in effluent air.

APPLICABILITY: When radioactive material in gaseous effluent is being released via the associated pathway.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Radioactive material in gaseous effluent released without treatment.	A.1 Ensure DSR 3.2.5.1 is met.	31 days
B. Air is discharged without treatment for > 31 days. <u>AND</u> The projected dose to a Member of the Public due to activity in air effluent via that pathway exceeds 0.3 mrem to any body organ.	B.1 Prepare and submit a Special Report pursuant to Specification D 5.4 to the NRC which identifies the inoperable equipment and describes the corrective action taken.	31 days following the end of the quarter in which the release occurred

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.2.5.1 Project the prospect of compliance with DLCO 3.2.5.	Every 31 days when radioactive material in gaseous effluent is released without treatment.

D 3.2 GASEOUS EFFLUENTS

D 3.2.6 Hydrogen Concentration

DLCO 3.2.6 The concentration of hydrogen in the augmented offgas treatment system downstream of the recombiners shall be limited to $\leq 2\%$ by volume.

APPLICABILITY: During augmented offgas treatment system operation.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Concentration of hydrogen exceeds limits.	A.1 Restore concentration to within limits.	48 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.2.6.1 Verify Hydrogen concentration in the augmented offgas treatment system downstream of the recombiners is within limits.	24 hours

D 3.2 GASEOUS RELEASES

D 3.2.7 Primary Containment Venting and Purging

DLCO 3.2.7 Venting and purging of the primary containment shall be through the Standby Gas Treatment System.

-----NOTES-----

1. This specification does not apply to Normal Ventilation.
2. This specification does not apply during startup while performing primary containment inerting in accordance with Technical Specification 3.6.3.1, Primary Containment Oxygen Concentration, following a shutdown of > 24 hours or while performing primary containment de-inerting providing one channel of the drywell atmospheric particulate and gaseous monitoring system is OPERABLE and not in the alarm state.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Requirement not met.	A.1 Suspend all venting and purging of the primary containment.	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.2.7.1 The primary containment shall be determined to be aligned for venting or purging through the Standby Gas Treatment System.	Once within 4 hours prior to venting or purging of the primary containment <u>AND</u> 12 hours thereafter during venting or purging of the primary containment.

D 3.3 INSTRUMENTATION

D 3.3.1 Liquid Effluent Monitoring

DLCO 3.3.1 The liquid effluent radiation monitoring instrumentation channels shown on Table D3.3.1-1 shall be OPERABLE with:

- a. The minimum OPERABLE channel(s) in service.
- b. The alarm and trip setpoints set to ensure that the limits of DLCO 3.1.1 are not exceeded.

APPLICABILITY: According to Table D3.3.1-1.

ACTIONS

-----NOTE-----
Separate condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Liquid effluent radiation monitoring instrumentation channel alarm and trip setpoint less conservative than required.	A.1 Suspend liquid effluent radiation release monitored by the inoperable channel.	Immediately
	<u>OR</u> A.2 Declare channel inoperable.	Immediately

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>B. One or more channels inoperable.</p>	<p>B.1 Enter the Condition referenced in Table D3.3.1-1 for the channel.</p> <p><u>AND</u></p> <p>B.2.1 Restore inoperable channel(s) to OPERABLE status.</p> <p><u>OR</u></p> <p>B.2.2 In lieu of any other report, explain in the Radioactive Effluent Release Report why the instrument was not repaired in a timely manner.</p>	<p>Immediately</p> <p>31 days</p> <p>In accordance with the Radioactive Effluent Release Report frequency.</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
F. Required Action and associated Completion Time for Condition C or E not met.	F.1 Suspend liquid effluent releases monitored by the inoperable channel(s).	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 3.3.1.1	Perform CHANNEL CHECK.	24 hours
DSR 3.3.1.2	Perform CHANNEL CHECK for each channel to demonstrate OPERABILITY by verifying indication of flow during periods of release.	24 hours on any day on which continuous, periodic, or batch releases are made
DSR 3.3.1.3	Perform SOURCE CHECK.	Completed prior to each release
DSR 3.3.1.4	Perform SOURCE CHECK.	31 days
DSR 3.3.1.5	Perform CHANNEL CALIBRATION	18 months
DSR 3.3.1.6	Perform CHANNEL FUNCTIONAL TEST. The CHANNEL FUNCTIONAL TEST shall also demonstrate automatic isolation of the pathway for instrument indication levels measured above the alarm/trip setpoint and circuit failure; and control room alarm annunciation for instrument indication levels measured above the alarm/trip setpoint, circuit failure and instrument indicating downscale failure.	92 days

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 3.3.1.7	Perform CHANNEL FUNCTIONAL TEST. The CHANNEL FUNCTIONAL TEST shall also demonstrate control room alarm annunciation for instrument indication levels measured above the alarm/trip setpoint, circuit failure, instrument indicating downscale failure, and instrument controls not set in operate mode.	92 days
DSR 3.3.1.8	Perform CHANNEL FUNCTIONAL TEST.	184 days
DSR 3.3.1.9	Perform LOGIC SYSTEM FUNCTIONAL TEST	184 days

Table D3.3.1-1
Radioactive Liquid Effluent Monitoring Instrumentation

INSTRUMENT	APPLICABILITY OR OTHER SPECIAL CONDITIONS	MINIMUM CHANNELS OPERABLE	CONDITION REFERENCED FROM ACTION B.1	SURVEILLANCE REQUIREMENTS
1. Gross Beta or Gamma Radioactivity Monitors Providing Automatic Isolation				
a. Liquid Radwaste Effluent Line	(a)	1 ^(b)	C	DSR 3.3.1.1 DSR 3.3.1.3 DSR 3.3.1.5 DSR 3.3.1.6 DSR 3.3.1.9
2. Gross Beta or Gamma Radioactivity Monitors Providing Alarm but not Providing Automatic Isolation				
a. Service Water System Effluent Line	(a)	1	D	DSR 3.3.1.1 DSR 3.3.1.4 DSR 3.3.1.5 DSR 3.3.1.7
3. Flow Rate Measurement Devices				
a. Liquid Radwaste Effluent Line	(a)	1	E	DSR 3.3.1.2 DSR 3.3.1.5 DSR 3.3.1.8

(a) During releases via this pathway.

(b) Set to alarm and automatically close the waste discharge valve prior to exceeding the limits of DLCO 3.1.1.

D 3.3 INSTRUMENTATION

D 3.3.2 Gaseous Effluent Monitoring

DLCO 3.3.2 The gaseous effluent radiation monitoring instrumentation channel(s) shown in Table D3.3.2-1 shall be OPERABLE with:

- a. The minimum OPERABLE channel(s) in service.
- b. The alarm and trip setpoints set to ensure that the limits of DLCO 3.2.1 are not exceeded.

APPLICABILITY: According to Table D3.3.2-1.

ACTIONS

NOTE

Separate Condition entry is allowed for each channel.

CONDITION		REQUIRED ACTION	COMPLETION TIME
A.	Gaseous effluent radiation monitoring instrumentation channel alarm and trip setpoint less conservative than required.	A.1 Suspend gaseous effluent radiation release monitored by inoperable channel.	Immediately
		<u>OR</u>	
		A.2 Declare channel inoperable.	Immediately

ACTIONS		
CONDITION	REQUIRED ACTION	COMPLETION TIME
B. One or more channels inoperable.	B.1 Enter the Condition referenced in Table D3.3.2-1 for the channel.	Immediately
	<u>AND</u>	
	B.2.1 Restore inoperable channel(s) to OPERABLE status.	31 days
	<u>OR</u>	
	B.2.2 In lieu of any other report, explain in the Radioactive Effluent Release Report why the instrument was not repaired in a timely manner.	In accordance with the Radioactive Effluent Release Report frequency
C As required by Required Action B.1 and referenced in Table D3.3.2-1.	C.1.1 Ensure the offgas delay system is not bypassed.	Immediately
	<u>AND</u>	
	C.1.2 Ensure the Elevated Release Point Monitoring noble gas activity monitor is OPERABLE.	Immediately
	<u>AND</u>	
	C.1.3 Restore inoperable channels to OPERABLE status.	72 hours
	<u>OR</u>	
	C.2 Place channel in trip.	12 hours
D. Required Action and associated Completion Time for Condition C not met.	D.1 Be in MODE 2.	12 hours

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>E. As required by Required Action B.1 and referenced in Table D3.3.2-1.</p>	<p>E.1 Estimate flowrate.</p>	<p>24 hours <u>AND</u> Once per 24 hours thereafter</p>
<p>F. As required by Required Action B.1 and referenced in Table D3.3.2-1.</p>	<p>F.1 Take grab samples.</p> <p><u>AND</u></p> <p>F.2 Analyze for gross activity.</p>	<p>24 hours <u>AND</u> Once per 24 hours thereafter</p> <p>24 hours from time of sampling completion</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>G. As required by Required Action B.1 and referenced in Table D3.3.2-1.</p>	<p>G.1.1 Verify one Function 2.a monitor OPERABLE. <u>AND</u></p>	<p>Immediately</p>
	<p>G.1.2 Verify recombiner exhaust temperature change less than 10°F over a 24 hour period. <u>OR</u></p>	<p>Immediately <u>AND</u> Once per 24 hours thereafter.</p>
	<p>G.2.1 Verify one Function 2.a monitor OPERABLE. <u>AND</u></p>	<p>Immediately</p>
	<p>G.2.2 Collect gas sample. <u>AND</u></p>	<p>24 hours <u>AND</u> Once per 24 hours thereafter</p>
	<p>G.2.3 Analyze gas sample and ensure within the limit of DLCO 3.2.6. <u>OR</u></p>	<p>4 hours from time of sampling completion</p>
	<p>G.3.1 Verify recombiner exhaust temperature change less than 10°F over a 24 hour period. <u>AND</u></p>	<p>Immediately <u>AND</u> Once per 24 hours thereafter.</p>
	<p>G.3.2 Collect gas sample.</p>	<p>24 hours <u>AND</u> Once per 24 hours thereafter.</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
	<p style="text-align: center;"><u>AND</u></p> <p>G.3.3 Analyze gas sample and ensure within the limit of DLCO 3.2.6.</p>	4 hours from time of sampling completion.
<p>H. Required Action and associated Completion Time for Condition G not met.</p>	<p>H.1 Discontinue operation of the augmented offgas treatment system.</p>	Immediately
<p>I. As required by Required Action B.1 and referenced in Table D3.3.2-1.</p>	<p>I.1 -----NOTE----- When the primary monitoring system is inoperable and the backup system is in service, sampling may be discontinued for up to 30 minutes only for changing particulate filters and iodine cartridges. ----- Continuously collect samples with auxiliary sampling equipment as required in Table D3.2.3-1.</p> <p style="text-align: center;"><u>OR</u></p> <p>I.2.1 If auxiliary sampling equipment cannot be established within the specified completion time, enter the problem into the Corrective Action Program to evaluate particulate and iodine effluent releases.</p> <p style="text-align: center;"><u>AND</u></p> <p>I.2.2 Report this event in the Radioactive Effluent Release Report.</p>	<p>4 Hours</p> <p>Immediately</p> <p>In accordance with the Radioactive Effluent Release Report Frequency</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
J. Required Action and associated Completion Time for Condition E or F not met.	J.1 Discontinue effluent releases via this pathway.	Immediately
K. Function 1.a trip capability not maintained. <u>AND</u> Radiation level exceeds 1.0 ci/sec (prior to 30 min. delay line) for > 15 consecutive minutes.	K.1 Close the offgas isolation valve. <u>AND</u> K.2 Initiate reactor shutdown. <u>AND</u> K.3 Be in MODE 4.	Immediately Immediately 24 hours

SURVEILLANCE REQUIREMENTS

-----NOTES-----

1. Refer to Table D3.3.2-1 to determine which DSRs apply for each instrument.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function is maintained.
-

SURVEILLANCE		FREQUENCY
DSR 3.3.2.1	Perform CHANNEL CHECK.	24 hours
DSR 3.3.2.2	Perform CHANNEL CHECK.	7 days
DSR 3.3.2.3	Perform SOURCE CHECK.	31 days
DSR 3.3.2.4	Perform CHANNEL FUNCTIONAL TEST.	31 days
DSR 3.3.2.5	Perform SOURCE CHECK.	92 days
DSR 3.3.2.6	Perform CHANNEL CALIBRATION. The CHANNEL CALIBRATION shall include the use of a standard gas sample containing a percentage of hydrogen to verify accuracy of the monitoring channel in its operating range.	92 days
DSR 3.3.2.7	Perform CHANNEL FUNCTIONAL TEST.	92 days
DSR 3.3.2.8	Perform CHANNEL FUNCTIONAL TEST. The CHANNEL FUNCTIONAL TEST shall also demonstrate that control room alarm annunciation occurs if; the instrument indicates measured levels above the alarm/trip setpoint, circuit failure, instrument indicates a downscale failure, or instrument controls not set in operate mode.	92 days

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 3.3.2.9	Perform CHANNEL FUNCTIONAL TEST. The CHANNEL FUNCTIONAL TEST shall also demonstrate that control room alarm annunciation occurs if; the instrument indicates measured levels above the alarm/trip setpoint or circuit failure.	92 days
DSR 3.3.2.10	Perform CHANNEL CALIBRATION. For Function 1.a, the time delay setting for closure of the steam jet air ejector isolation valves shall be ≤ 15 minutes and trip settings shall correspond to Technical Specification 3.7.5.	24 months
DSR 3.3.2.11	Perform CHANNEL FUNCTIONAL TEST. The CHANNEL FUNCTIONAL TEST shall also demonstrate that automatic isolation of this pathway and control room alarm annunciation occurs if; the instrument indicates measured levels above the alarm/trip setpoint, circuit failure, instrument indicates a downscale failure, or instrument controls not set in operate mode.	24 months
DSR 3.3.2.12	Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months
DSR 3.3.2.13	Perform CHANNEL CALIBRATION	18 months

Table D3.3.2-1 (Page 1 of 3)
Radioactive Gaseous Effluent Monitoring Instrumentation

INSTRUMENT	APPLICABILITY OR OTHER SPECIAL CONDITIONS	MINIMUM CHANNELS OPERABLE	CONDITION REFERENCED FROM ACTION B.1	SURVEILLANCE REQUIREMENTS
1. Steam Jet Air Ejector				
a. Noble Gas Activity Monitor	(a)	2	C	DSR 3.3.2.1 DSR 3.3.2.3 DSR 3.3.2.8 DSR 3.3.2.10 DSR 3.3.2.11 DSR 3.3.2.12
b. Effluent System Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
2. Augmented Offgas Treatment System Explosive Gas Monitoring System				
a. Hydrogen Monitor (2% monitor)	(c)	2	G	DSR 3.3.2.1 DSR 3.3.2.4 DSR 3.3.2.6
3. Reactor Building Ventilation Monitoring System				
a. Noble Gas Activity Monitor	(b) (f)	1	F	DSR 3.3.2.1 DSR 3.3.2.3 DSR 3.3.2.9 DSR 3.3.2.13
b. Iodine Sampler Cartridge	(b) (f)	1	I	DSR 3.3.2.2
c. Particulate Sampler Filter	(b) (f)	1	I	DSR 3.3.2.2
d. Effluent System Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
e. Sampler Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
f. Isolation Monitor	(d)	(d)	(d)	DSR 3.3.2.5 DSR 3.3.2.11

(continued)

- (a) During operation of the steam jet air ejector
- (b) During releases via this pathway
- (c) During augmented offgas treatment system operation
- (d) See Technical Specification 3.3.6.2
- (e) Not used.
- (f) A channel may be removed from service for up to 30 minutes for changing particulate filters or iodine cartridges or for low flow alarm check without entering Conditions or Required Actions.

Table D3.3.2-1 (Page 2 of 3)
Radioactive Gaseous Effluent Monitoring Instrumentation

INSTRUMENT	APPLICABILITY OR OTHER SPECIAL CONDITIONS	MINIMUM CHANNELS OPERABLE	CONDITION REFERENCED FROM ACTION B.1	SURVEILLANCE REQUIREMENTS
4. Elevated Release Point Monitoring System				
a. Noble Gas Activity Monitor	(b) (f)	1	F	DSR 3.3.2.1 DSR 3.3.2.3 DSR 3.3.2.9 DSR 3.3.2.13
b. Iodine Sampler Cartridge	(b) (f)	1	I	DSR 3.3.2.2
c. Particulate Sampler Filter	(b) (f)	1	I	DSR 3.3.2.2
d. Effluent System Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
e. Sampler Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
5. Radwaste Building Ventilation Monitoring System				
a. Noble Gas Activity Monitor	(b) (f)	1	F	DSR 3.3.2.1 DSR 3.3.2.3 DSR 3.3.2.9 DSR 3.3.2.13
b. Iodine Sampler Cartridge	(b) (f)	1	I	DSR 3.3.2.2
c. Particulate Sampler Filter	(b) (f)	1	I	DSR 3.3.2.2
d. Effluent System Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
e. Sampler Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
6. Turbine Building Ventilation Monitoring System				
a. Noble Gas Activity Monitor	(b) (f)	1	F	DSR 3.3.2.1 DSR 3.3.2.3 DSR 3.3.2.9 DSR 3.3.2.13
b. Iodine Sampler Cartridge	(b) (f)	1	I	DSR 3.3.2.2

(continued)

(b) During releases via this pathway

(f) A channel may be removed from service for up to 30 minutes for changing particulate filters or iodine cartridges or for low flow alarm check without entering Conditions or Required Actions.

Table D3.3.2-1 (Page 3 of 3)
Radioactive Gaseous Effluent Monitoring Instrumentation

INSTRUMENT	APPLICABILITY OR OTHER SPECIAL CONDITIONS	MINIMUM CHANNELS OPERABLE	CONDITION REFERENCED FROM ACTION B.1	SURVEILLANCE REQUIREMENTS
6. (continued)				
c. Particulate Sampler Filter	(b) (f)	1	I	DSR 3.3.2.2
d. Effluent System Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
e. Sampler Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
7. Multi Purpose Facility (MPF) Building Ventilation Monitoring System				
a. Iodine Sampler Cartridge	(b) (f)	1	I	DSR 3.3.2.2
b. Particulate Sampler Filter	(b) (f)	1	I	DSR 3.3.2.2
c. Effluent System Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13
d. Sampler Flow Rate Measuring Device	(b)	1	E	DSR 3.3.2.1 DSR 3.3.2.7 DSR 3.3.2.13

(b) During releases via this pathway

(f) A channel may be removed from service for up to 30 minutes for changing particulate filters or iodine cartridges or for low flow alarm check without entering Conditions or Required Actions.

D 3.4 LIQUID/GASEOUS DOSE

D 3.4.1 Liquid/Gaseous Effluents Dose

DLCO 3.4.1 The dose or dose commitment to an actual Member of the Public due to radiation and radioactive releases from Cooper Station shall be limited to ≤ 75 mrem to the thyroid and ≤ 25 mrem to the total body or any other body organ during a calendar year.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Estimated dose or dose commitment due to radiation and radioactive releases exceeds limits.	A.1 Verify the condition resulting in doses exceeding these limits is corrected.	Immediately
B. Required Action and associated Completion Time not met.	<p>B.1 -----NOTE----- This is the Special Report required by D 3.1.2, D 3.1.3, or D 3.2.3 supplemented with the following.</p> <p>-----</p> <p>Submit a Special Report pursuant to Specification D 5.4, including information specified in 40 CFR Part 190.11(b). This submission shall be deemed a timely request for variance in accord with provisions of 40 CFR Part 190. The variance is granted until NRC staff action on the item is complete.</p>	31 days

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 3.4.1.1 Perform a cumulative dose calculation due to radioactive material in gaseous and liquid effluents to determine compliance with DLCO 3.4.1.	12 months

D 3.5 SOLID RADIOACTIVE WASTE

D 3.5.1 Solid Radioactive Waste

DLCO 3.5.1 The appropriate equipment of the solid radwaste system shall be OPERABLE to process radioactive waste containing liquid and liquid destined for disposal subject to 10 CFR Part 61 to a form that meets applicable requirements of 10 CFR Part 61.56 before the waste is shipped from the site.

APPLICABILITY: During solid radwaste processing.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Container of waste does not comply with 10 CFR Part 61.56.	A.1 Suspend delivery to a carrier for transport.	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 3.5.1.1	Deleted	Deleted
DSR 3.5.1.2	Inspect solidified or dewatered radioactive waste to insure that there is no free standing liquid on top of the solid waste.	Prior to capping each drum or High Integrity Container (HIC)
DSR 3.5.1.3	<p>The following information should be reported for shipments of radioactive solid waste (radioactive material destined for waste processing or direct burial) and irradiated fuel transported from the site during the report period for the Radioactive Effluent Release Report per the Reporting Requirements in Technical Specification 5.6.3;</p> <p>a) The total quantity in cubic meters and the total radioactivity in curies for the categories or types of waste for the following:</p> <ol style="list-style-type: none"> 1) Spent resins, filter sludges, evaporator bottoms. 2) Dry compressible waste, contaminated equipment, etc. 3) Irradiated components, control rods, etc. 4) Other (furnish description). 	<p>In accordance with 10 CFR 50.36a</p> <p>(continued)</p>

SURVEILLANCE REQUIREMENTS (continued)

SURVEILLANCE		FREQUENCY
DSR 3.5.1.3 (continued)	b)	An estimate of the major nuclide composition in the categories of waste in 3.5.1.3 a above.
	c)	The disposition of solid waste shipments. (Identify the number of shipments, the mode of transport, and the destination.)
	d)	The disposition of irradiated fuel shipments. (Identify the number of shipments, the mode of transport, and the destination.)
	e)	Estimates of the total error associated with certain total values should be provided in each report. These error values should be the best effort of an overall estimate of the errors associated with the totals in the report.

D 4.0 MONITORING PROGRAM

D 4.1 Monitoring Program Compliance

DLCO 4.1 The radiological environmental monitoring program shall be conducted as specified in Table D4.1-1, using analytical techniques such that the detection capabilities in Table D4.1-2 are achieved.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Radiological environmental monitoring program not conducted as specified in Table D4.1-1.</p>	<p>A.1 Prepare and submit to the NRC in the Annual Radiological Environmental Report the reasons for not conducting the program in accordance with Table D4.1-1 and the plans for preventing recurrence.</p>	<p>May 15th following the end of the year</p>
<p>B. Environmental sampling medium is not available from a sampling location as specified in Table D4.1-1.</p>	<p>B.1 Report in the Annual Radiological Environmental Report the cause and location where replacement samples were obtained.</p>	<p>May 15th following the end of the year</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
DSR 4.1.1	Perform radiological environmental sampling and analysis.	In accordance with Table D4.1-1
DSR 4.1.2	Conduct a land use census to identify the location of the nearest garden that is greater than 500 square feet in area and that yields edible leafy vegetables, the location of the nearest milk animal, and the location of the nearest resident in each of the 16 meteorological sectors within 3 miles of the Station.	12 months
DSR 4.1.3	Summarize results of radiological environmental analysis in the Annual Radiological Environmental Report.	May 15th following the end of the year
DSR 4.1.4	Submit results of the land use census in the Annual Radiological Environmental Report.	May 15th following the end of the year

Table D4.1-1 (Page 1 of 2)
Radiological Environmental Monitoring Program

EXPOSURE PATHWAY AND/OR SAMPLE	NUMBER OF SAMPLE STATIONS	SAMPLING AND COLLECTION FREQUENCY	TYPE AND FREQUENCY OF ANALYSIS
1. Airborne			
a. Radioiodine and Particulate	At least 5 locations	Continuous operation of sampler with sample collection as required by dust loading but at least once per 7 days.	Radioiodine canister: Analyze at least once per 7 days for I-131. Particulate sample: Analyze for gross beta radioactivity ≥ 24 hours following filter change. Perform gamma isotopic ^(a) analysis on each sample in which gross beta activity is >10 times the yearly mean of control samples. Perform gamma isotopic ^(a) analysis on composite (by location) sample at least once per 92 days.
2. Direct Radiation	At least 32 locations	Thermoluminescent Dosimeters (TLD) ^(b) exchange and read-out at least once per 92 days.	Gamma dose: At least once per 92 days.
3. Waterborne			
a. River Water	At least 2 locations	Collect a one (1) gallon grab sample at least once per 31 days.	Gamma isotopic ^(a) analysis of each sample. Composite grab sample for tritium analysis at least once per 92 days.
b. Ground Water	At least 2 locations	Collect a one (1) gallon grab sample at least once per 92 days.	Gamma isotopic ^(a) and tritium analysis of each sample.
c. Sediment from Shoreline	At least 1 location	Two (2) times a year, once in the spring and once in the fall.	Gamma isotopic ^(a) analysis of each sample.
4. Ingestion			
a. Milk (nearest producer)	At least 1 location	At least once per 15 days during Peak Pasture Period ^(c) ; at least once per 31 days at other times.	Gamma isotopic ^(a) and I-131 analysis of each sample.
b. Milk (other producers)	At least 2 locations	At least once per 92 days.	Gamma isotopic ^(a) and I-131 analysis of each sample.
c. Fish	At least 2 locations	Two times per year (once in the summer and once in the fall). Attempt to include the following: 1. Bottom feeding species 2. Middle-Top feeding species	Gamma isotopic ^(a) analysis on edible portions.

(continued)

Table D4.1-1 (Page 2 of 2)
Radiological Environmental Monitoring Program

EXPOSURE PATHWAY AND/OR SAMPLE	NUMBER OF SAMPLE STATIONS	SAMPLING AND COLLECTION FREQUENCY	TYPE AND FREQUENCY OF ANALYSIS
4. (continued)			
d. Food Products	Samples of three different kinds of broad leaf vegetation grown nearest each of two different offsite locations of highest predicted annual average ground-level D/Q if milk sampling is not performed.	Monthly when available.	Gamma isotopic ^(a) and I-131 analysis
	One sample of each of the similar broad leaf vegetation grown 15-30 km distant in the least prevalent wind direction if milk sampling is not performed.	Monthly when available.	Gamma isotopic ^(a) and I-131 analysis

(a) Gamma isotopic analysis refers to high resolution gamma spectrum analysis as follows: the sample is scanned for gamma-ray activity. If no activity is found for a selected nuclide, the detection sensitivity for that nuclide will be calculated using the counting time, detector efficiency, gamma energy, geometry, and detector background appropriate to the particular sample in question. The following nineteen (19) nuclides shall be analyzed routinely:

BaLa-140	Cs-137	Ra-226
Be-7	Fe-59	Ru-103
Ce-141	I-131	Ru-106
Ce-144	K-40	Th-228
Co-58	Nb-95	Zn-65
Co-60	Mn-54	Zr-95
Cs-134		

Any radionuclide detected, i.e., having a measured concentration greater than the LLD, whether or not it is one of the 19 nuclides listed above, shall be regarded as present in the sample.

- (b) Thermoluminescent Dosimeters (TLD) is a single phosphore. Two or more phosphores in one package are considered to be two or more dosimeters.
- (c) Peak Pasture Period is June 1 through September 30 of each year.

Table D4.1-2 (Page 1 of 2)
Detection Capabilities for Environmental Sample Analysis

LOWER LIMIT OF DETECTION ^(a) (LLD) ^(b)						
ANALYSIS	WATER (pCi/l)	AIRBORNE PARTICULATE OR GAS (pCi/m ³)	FISH (pCi/kg, wet)	MILK (pCi/l)	FOOD PRODUCTS (pCi/kg, wet)	SEDIMENT (pCi/kg, dry)
gross beta	4	1 x 10 ⁻²				
H-3	2000					
Mn-54	15		130			
Fe-59	30		260			
Co-58	15		130			
Co-60	15		130			
Zn-65	30		260			
Zr-95	30					
Nb-95	15					
I-131	1 ^(c)	7 x 10 ⁻²		1	60	
Cs-134	15	5 x 10 ⁻²	130	15	60	150
Cs-137	18	6 x 10 ⁻²	150	18	80	180
Ba-140	60			60		
La-140	15			15		

(a) This list does not mean that only these nuclides are to be detected and reported. Other peaks which are measurable and identifiable, together with the above nuclides, shall also be identified and reported.

Table D4.1-2 (Page 2 of 2)
Detection Capabilities for Environmental Sample Analysis

- (b) The LLD is the "a priori" smallest concentration of radioactive material in a sample that will be detected with 95% probability (5% probability of falsely concluding that a blank observation represents a "real" signal).

For a particular measurement system (which may include radiochemical separation):

$$LLD = \frac{(4.66)(s_b)}{(E)(V)(2.22)(Y)(e^{-\lambda\Delta t})}$$

Where:

LLD is the "a priori" lower limit of detection as described above (as picocurie per unit mass or volume),

s_b is the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute),

E is the counting efficiency (as counts per transformation),

V is the sample size (in units of mass or volume),

2.22 is the number of transformations per minute per picocurie,

Y is the fractional radiochemical yield (when applicable)

λ is the radioactive decay constant for the particular radionuclide, and

Δt is the elapsed time between sample collection (or midpoint of the sample collection period) and time of counting.

The value of s_b used in the calculation of the LLD for a detection system shall be based on the actual observed variance of the background counting rate or of the counting rate of the blank samples (as appropriate) rather than on an unverified theoretically predicted variance. In calculating the LLD for a radionuclide determined by gamma-ray spectrometry, the background shall include the typical contributions of other radionuclides normally present in the samples (e.g., potassium-40 in milk samples).

Analysis shall be performed in such a manner that the stated LLD's will be achieved under routine conditions. Occasionally background fluctuations, unavoidably small sample sizes, the presence of interfering nuclides, or other uncontrollable circumstances may render these LLD's unachievable. In such cases, the contributing factors will be identified and described in the Annual Radiological Environmental Report.

- (c) LLD for drinking water.

D 4.0 MONITORING PROGRAM

D 4.2 Monitoring Program Concentration

DLCO 4.2 Radioactivity concentrations in sampled medium from the radiological environmental monitoring program shall not exceed values specified in Table D5.4-1 when averaged over a calender quarter.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Radioactivity concentrations of sampled medium from the radiological environmental monitoring program exceeds values specified in Table D5.4-1, averaged over a calender quarter which is attributable to release(s) from the Station.</p>	<p>A.1 Prepare and submit to the NRC a Special Report in accordance with Specification D 5.4 which includes an evaluation of any release conditions, environmental factors or other conditions which caused the value(s) to be exceeded.</p>	<p>31 days following the end of the quarter</p>
<p>B. Radioactivity concentrations of sampled medium from the radiological environmental monitoring program exceeds values specified in Table D5.4-1, averaged over a calender quarter which is not attributable to release(s) from the Station.</p>	<p>B.1 Report and explain in the Annual Radiological Environmental Report the results of the sample(s).</p>	<p>May 15th following the end of the year</p>

D 4.0 MONITORING PROGRAM

D 4.3 Monitoring Program Dose

DLCO 4.3 The calculated personal dose associated with sampled exposure pathway(s) shall not exceed 120% of the calculated dose at the maximum dose location associated with like pathways at a location where sampling is conducted as specified in Table D4.1-1.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Location(s) identified at which the calculated dose associated with the exposure pathway(s) exceeds 120% of the calculated dose at the maximum dose location associated with like pathways at a location where sampling is conducted as specified in Table D4.1-1.</p>	<p>A.1 -----NOTE----- Only applicable if samples are reasonably attainable at the new location. ----- Add new sampling location(s) identified having maximum exposure potential to the radiological environmental monitoring program and Table D4.1-1.</p>	<p>92 days</p>
	<p><u>AND</u> A.2 Describe change made to Table D4.1-1 in the Annual Radiological Environmental Report.</p>	

D 5.0 MISCELLANEOUS PROGRAMS/REPORTS

D 5.1 Interlaboratory Comparison Program

DLCO 5.1 Analyses shall be performed on radioactive materials supplied as part of the Interlaboratory Comparison Program.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Analyses not performed.	A.1 Report to the NRC in the Annual Radiological Environmental Report the corrective actions taken to prevent recurrence.	May 15th following the end of the year

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
DSR 5.1.1 Submit a brief summary of the results obtained from the Interlaboratory Comparison Program in the Annual Radiological Environmental Report pursuant to Technical Specification 5.6.2.	May 15th following the end of the year

D 5.0 MISCELLANEOUS PROGRAMS/REPORTS

D 5.2 Annual Radiological Environmental Report

The Annual Radiological Environmental Report covering the operation of the unit during the previous calendar year shall be submitted by May 15 of each year. The report shall include summaries, interpretations, and analyses of trends of the results of the radiological environmental monitoring program for the reporting period. The material provided shall be consistent with the objectives outlined in the Offsite Dose Assessment Manual (ODAM), and in 10 CFR50, Appendix I, Section IV.B.2, IV.B.3, and IV.C.

The Annual Radiological Environmental Report shall include the results of analyses of all radiological environmental samples and of all environmental radiation measurements taken during the period pursuant to the locations specified in the table and figures in the ODA M, as well as summarized and tabulated results of these analyses and measurements in the format of the table in Regulatory Guide 4.8, December 1975. In the event that some individual results are not available for inclusion with the report, the report shall be submitted noting and explaining the reasons for the missing results. The missing data shall be submitted in a supplementary report as soon as possible.

Details of the report shall include the following:

- a. A summary of doses to a Member of the Public beyond the SITE AND EXCLUSION AREA BOUNDARY due to Cooper Nuclear Station aqueous and airborne radioactive effluents, calculated in accordance with methods compatible with the ODA M.
 - b. A summary of the results of the land use census required in DSR 4.1.2.
 - c. Summarized and tabulated results in the format of Table D5.2-1 of analysis of samples required by the radiological environmental monitoring program, and taken during the report period.
 - d. A summary description of the radiological environmental monitoring program including any changes; a map of all sampling locations keyed to a table giving distances and directions from the reactor; and, the results of participation in the Interlaboratory Comparison Program, required by D 5.1.
 - e. Summaries, interpretations, and analysis of trends of the results of the radiological environmental monitoring program for the reporting period.
-

Table D5.2-1
Environmental Radiological Monitoring Program Summary

Name of Facility Cooper Nuclear Station Docket No. 50-298
 Location of Facility Nemaha, Nebraska Reporting Period _____
 (County, State)

Medium of Pathways Sampled (Unit of Measurement)	Type & Total No. of Analyses Performed	Lower Limit of Detection (1) (LLD)	All Indicator Locations Mean [] (2) Range (2)	Location with Highest Annual Mean		Control Locations Mean [] (2) Range (2)	No. of Reportable Occurrences
				Name Distance & Direction	Mean [] (2) Range (2)		

D 5.2-2

Table Notes:

- (1) Nominal Lower Limit of Detection (LLD).
- (2) Mean and Range based upon detectable measurements only. Fraction of detectable measurements at specified location indicated in brackets [].

D 5.0 MISCELLANEOUS PROGRAMS/REPORTS

D 5.3 Radioactive Effluent Release Report

The Radioactive Release Report covering the operation of the unit shall be submitted in accordance with 10 CFR 50.36a. The report shall include a summary of the quantities of radioactive liquid and gaseous effluents and solid waste released from the unit. The material provided shall be consistent with the objectives outlined in the ODAM and the Process Control Program and in conformance with 10 CFR 50.36a and 10 CFR 50, Appendix I, Section IV.B.1.

The Radioactive Effluent Release Report shall be submitted to the NRC by May 1 of each year and shall include the following:

- a. A summary by calendar quarter of the quantities of radioactive liquid and gaseous effluents released from the Station, reported in the format recommended in Regulatory Guide 1.21, Appendix B, Tables 1 and 2.
- b. A summary of radioactive solid waste shipped from CNS, including information provided in DSR 3.5.1.3.
- c. A summary of meteorological data collected during the year.
- d. A list and brief description of each unplanned release of gaseous or liquid radioactive effluent that causes a limit in DLCO 3.1.1, DLCO 3.1.3, DLCO 3.2.1, DLCO 3.2.2 or DLCO 3.2.3 to be exceeded.
- e. Calculated offsite dose to humans resulting from the release of effluents and their subsequent dispersion on the atmosphere reported in accordance with Regulatory Guide 1.21.
- f. A summary of changes made to the CNS Process Control Program. The summary shall contain sufficiently detailed information to totally support the rationale for the change without benefit of additional or supplemental information; a determination that the change did not reduce the overall conformance of the solidified waste product to existing criteria for solid wastes; and documentation of the fact that the change has been reviewed and found acceptable by the SORC.

D 5.3 Radioactive Effluent Release Report (continued)

- g. Changes made to the CNS Offsite Dose Assessment Manual shall be submitted to the NRC in the form of a complete, legible copy of the entire ODAM as part of, or concurrent with the Radioactive Effluent Release Report for the period of the report in which any change in the ODAM was made. Each change shall be identified by markings in the margin of the affected pages, clearly indicating the area of the page that was changed, and shall indicate the date (i.e., month and year) the change was implemented.
-
-

D 5.0 MISCELLANEOUS PROGRAMS/REPORTS

D 5.4 Special Reports

Special reports shall be submitted to the Director, Nuclear Reactor Regulation, USNRC, Washington, D.C. 20555 and to the NRC Regional Administrator within the time period specified for each report.

Special reports (in lieu of Licensee Event Reports) may be required covering inspections, test and maintenance activities. These special reports are determined on an individual basis for each unit and their preparation and submittal are designated in the Offsite Dose Assessment Manual.

A special report is required if measured levels of radioactivity in an environmental sampling medium determined to exceed the reporting level values of Table D5.4-1 when averaged over any calendar quarter sampling period. When more than one of the radionuclides in Table D5.4-1 are detected in the sampling medium, this report shall be submitted if:

$$\frac{\text{Concentration (1)}}{\text{Limit Level (1)}} + \frac{\text{Concentration (2)}}{\text{Limit Level (2)}} + \dots \geq 1.0$$

When radionuclides other than those in Table D5.4-1 are detected and are the result of plant effluents, this report shall be submitted if the potential annual dose to an individual is equal to or greater than the calendar year limits of DLCO 3.1.3 and 3.2.3. This report is not required if the measured level of radioactivity was not the result of plant effluents; however, in such an event, the condition shall be reported and described in the Annual Radiological Environmental Report.

Table D5.4-1
Reporting Levels for Radioactivity Concentrations in Environmental Samples

ANALYSIS	Reporting Levels				
	WATER (pCi/l)	AIRBORNE PARTICULATE OR GASES (pCi/m ³)	FISH (pCi/Kg, Wet)	MILK (pCi/l)	FOOD PRODUCTS (pCi/Kg, Wet)
H-3	2E + 4(a) 3E + 4(c)				
Mn-54	1E + 3		3E + 4		
Fe-59	4E + 2		1E + 4		
Co-58	1E + 3		3E + 4		
Co-60	3E + 2		1E + 4		
Zn-65	3E + 2		2E + 4		
Zr-Nb-95	4E + 2(b)				
I-131	2	0.9		3	1E + 2
Cs-134	30	10	1E + 3	60	1E + 3
Cs-137	50	20	2E + 3	70	2E + 3
Ba-La-140	2E + 2(b)			3E + 2(b)	

- (a) For drinking water samples. This is the 40 CFR 141 value.
- (b) Concentration of parent or daughter.
- (c) For samples of water not used as a source of drinking water.

Major Changes to Radioactive Waste Treatment Systems
D 5.5

D 5.0 MISCELLANEOUS PROGRAMS/REPORTS

D 5.5 Major Changes to Radioactive Waste Treatment Systems (Liquid, Gaseous,
and Solid)

The radioactive waste treatment systems (liquid, gaseous, and solid) are those systems described in the facility Safety Analysis Report and amendments thereto, which are used to maintain that control over radioactive materials in gaseous and liquid effluents and in solid waste packaged for offsite shipment required to meet the DLCO's set forth in Specifications D 3.1.1, D 3.1.2, D 3.1.3, D 3.1.4, D 3.2.1, D 3.2.2, D 3.2.3, D 3.2.4, D 3.2.5, D 3.2.6, D 3.2.7, D 3.3.2, D 3.4.1, and D 3.5.1. The NRC is notified of major changes to these systems under the provisions of 10 CFR Part 50.59 and Part 50.71 (USAR revisions).

**OFFSITE DOSE ASSESSMENT MANUAL
APPENDIX D**

TABLE OF CONTENTS - BASES

B 3.0	ODAM SPECIFICATION APPLICABILITY	B 3.0-1
B 3.1	LIQUID EFFLUENTS	
B 3.1.1	Liquid Effluents Concentration	B 3.1-1
B 3.1.2	Liquid Waste Concentration	B 3.1-2
B 3.1.3	Liquid Effluents Dose	B 3.1-5
B 3.1.4	Outside Temporary Storage of Radioactive Liquid	B 3.1-9
B 3.2	GASEOUS EFFLUENTS	
B 3.2.1	Gaseous Effluents Concentration	B 3.2-1
B 3.2.2	Noble Gas Dose	B 3.2-2
B 3.2.3	Iodine and Particulates	B 3.2-3
B 3.2.4	Offgas Treatment System	B 3.2-4
B 3.2.5	Exhaust Ventilation Treatment System	B 3.2-5
B 3.2.6	Hydrogen Concentration	B 3.2-6
B 3.2.7	Primary Containment Venting and Purging	B 3.2-7
B 3.3	INSTRUMENTATION	
B 3.3.1	Liquid Effluent Monitoring	B 3.3-1
B 3.3.2	Gaseous Effluent Monitoring	B 3.3-2
B 3.4	LIQUID/GASEOUS EFFLUENTS DOSE	
B 3.4.1	Liquid/Gaseous Effluents Dose	B 3.4-1
B 3.5	SOLID RADIOACTIVE WASTE	
B 3.5.1	Solid Radioactive Waste	B 3.5-1
B 4.0	MONITORING PROGRAM	
B 4.1	Monitoring Program Compliance	B 4.1-1
B 4.2	Monitoring Program Concentration	B 4.2-1
B 4.3	Monitoring Program Dose	B 4.3-1
B 5.0	MISCELLANEOUS PROGRAMS/REPORTS	
B 5.1	Interlaboratory Comparison Program	B 5.1-1
B 5.2	Annual Radiological Environmental Report	B 5.2-1
B 5.3	Radiological Effluent Release Report	B 5.3-1
B 5.4	Special Reports	B 5.4-1
B 5.5	Major Changes to Radioactive Waste Treatment Systems (Liquid, Gaseous, and Solid)	B 5.5-1

B 3.0 ODA M Specification Applicability

BASES

DLCOs 3.0.1, 3.0.2, and 3.0.5, and DSRs 3.0.1 and 3.0.2 reflect parallel requirements in the Technical Specifications. Refer to the Technical Specification Bases for appropriate discussion.

DSR 3.0.3 establishes the flexibility to defer declaring affected equipment inoperable or an affected variable outside the specified limits when a Surveillance has not been complete within the specified Frequency. A delay period of up to 24 hours or up to the limit of the specified Frequency, whichever is less, applies from the point in time that it is discovered that the Surveillance has not been performed in accordance with DSR 3.0.2, and not at the time that the specified Frequency was not met. This delay period provides adequate time to complete Surveillances that have been missed. This delay period permits the completion of a Surveillance before complying with Required Actions or other remedial measures that might preclude completion of the Surveillance.

The basis for this delay period includes consideration of unit conditions, adequate planning, availability of personnel, the time required to perform the Surveillance, the safety significance of the delay in completing the required Surveillance, and the recognition that the most probable result of any particular Surveillance being performed is the verification of conformance with the requirements.

When a Surveillance with a Frequency based not on time intervals, but upon specified unit conditions or operational situations, is discovered not to have been performed when specified, DSR 3.0.3 allows the full delay period of 24 hours to perform the Surveillance.

DSR 3.0.3 also provides a time limit for completion of Surveillances that become applicable as a consequence of MODE changes imposed by Required Actions.

Failure to comply with specified Frequencies for DSRs is expected to be an infrequent occurrence. Use of the delay period established by DSR 3.0.3 is a flexibility which is not intended to be used as an operational convenience to extend Surveillance intervals.

If a Surveillance is not completed within the allowed delay period, then the equipment is considered inoperable or the variable is considered outside the specified limits and the Completion Times of the Required Actions for the applicable DLCO Conditions begin immediately upon expiration of the delay period. If a Surveillance is failed within the delay period, then the equipment is inoperable, or the variable is outside the specified limits and the Completion Times of the Required Actions for the applicable DLCO Conditions begin immediately upon the failure of the Surveillance.

Completion of the Surveillance within the delay period allowed by this Specification, or within the Completion Time of the ACTIONS, restores compliance with DSR 3.0.1.

BASES

(continued)

ODAM Specification DLCO 3.0.3, in lieu of imposing a plant shutdown as paralleled in Technical Specification 3.0.3, requires: (a) an Action to initiate efforts to restore compliance with the ODAM or associated Actions; and (b) an Action that requires entering the circumstances into the Corrective Action Program (CAP). These actions ensure that the appropriate actions continue to be focused on and that the circumstances concerning failure to comply with the ODAM Actions would be reviewed. This review will be conducted in accordance with the procedural guidance for CAP Notifications.

There are no ODAM 3.0 Specifications that parallel Technical Specification LCO 3.0.4 or SR 3.0.4. Restrictions in entering MODES or other specified conditions in the Applicability have historically not been applied to ODAM Specifications. There are also no ODAM 3.0 Specifications that parallel Technical Specification LCO 3.0.6 and LCO 3.0.7, which allow for exceptions and revisions of other Technical Specifications. They are not applicable to the ODAM since it is not permitted to allow the ODAM to revise a Technical Specification.

(Note that there currently are no identified ODAM DLCOs that support Technical Specification systems; however, this discussion is presented to address the philosophy that would be applied.) An allowance similar to Technical Specification LCO 3.0.6 does not apply to the ODAM. When a Technical Specification supported system LCO is discovered to be not met solely due to a ODAM support system DLCO not met, appropriate Technical Specification ACTIONS are required to be entered immediately. This applies even in instances where the ODAM contains a delay prior to declaring a Technical Specification supported system inoperable. In this case, certain ODAM inoperabilities may not directly impact the OPERABILITY of the Technical Specification supported system and delayed declaration of inoperability of the supported system is acceptable. In other cases, discovered support system inoperabilities that directly result in supported system inability to perform the safety function, should result in immediate declaration of inoperability of the supported system.

Technical Specification LCO 3.0.7 has no parallel in the ODAM since it provides for explicit changes to specified Technical Specifications by the Section 3.10 Specifications. However, in the event that LCO 3.0.7 provides for changes to the Technical Specification MODE definitions by the Section 3.10 Specifications, the revised MODE definitions apply to all plant references, including ODAM references.

B 3.1 LIQUID EFFLUENTS

B 3.1.1 Liquid Effluents Concentration

BASES

This specification is provided to ensure that the concentration of radioactive materials released in liquid waste effluents from the site to unrestricted areas will be less than the concentration levels specified in 10 CFR Part 20.1302. This limitation provides additional assurance that the levels of radioactive materials in bodies of water outside the site will result in exposures within (1) the Section IV.A guides on technical specifications in Appendix I, 10 CFR Part 50, for an individual and (2) the limits of 10 CFR Part 20.1301 and 20.1302(b)(2)(i) to the population. The concentration limit for noble gases is based upon the assumption that Xe-135 is the controlling radioisotope and its MPC in air (submersion) was converted to an equivalent concentration in water using the methods described in International Commission on Radiological Protection (ICRP) Publication 2.

Since Service Water is not a normal or expected source of significant radioactive release, routine sampling and monitoring for radioactivity is precautionary. An activity concentration of 3×10^{-6} $\mu\text{Ci/ml}$ in Service Water effluent is diluted in the discharge canal to about 1.5% of the 10 CFR 20 Appendix B Table 2 Column 2 concentration with only one circulating water pump operating. During normal Station operation the dilution would be even greater. By monitoring Service Water effluent continuously for radioactivity and by confirmatory sampling weekly, reasonable assurance that its activity concentration can be kept to a small fraction of the 10 CFR Part 20.1302 limit and within the Specification D 3.1.3 limit is provided.

By monitoring Service Water continuously and liquid radwaste continuously during discharge with the monitor set to alarm or trip before the limit specified in 10 CFR 20.1302 is exceeded, reasonable assurance of compliance with Specification D 3.1.1 is provided. Verification that radioactivity in liquid effluent averaged only a small fraction of the concentration limit is provided by calculations demonstrating compliance with Specification D 3.1.3.

Compliance with 10 CFR Part 20.1302(b)(2)(i) implies that the concentration limit represented by 10 CFR Part 20, Appendix B, Table 2 will be met within a suitable and reasonable averaging time for assessing compliance. That averaging time is dependent upon the resolving time of the measurements or estimates which are used to evaluate compliance. Assessment of compliance is done by sampling and analysis according to DSR 3.1.1.2, by estimating or measuring the maximum release flow and the minimum dilution flow coincident during the period of release represented by the sample, and by computing the concentration as a fraction of the limit beyond the SITE AND EXCLUSION AREA BOUNDARY periodically on the basis of these data.

Reporting by Special Reports and other reports required by the ODAM and Section 5.6 of Technical Specifications is used in lieu of reporting per 10 CFR 50.73.

B 3.1 LIQUID EFFLUENTS

B 3.1.2 Liquid Waste Concentration

BASES

Specification D 3.1.2 implements the requirements of 10 CFR Part 50.36a(a)(1) that operating procedures be established and followed and that equipment be maintained and used to keep releases to the environment as low as is reasonably achievable. The OPERABILITY of the liquid radwaste treatment system ensures that the appropriate portions will be available for use whenever liquid effluents require treatment prior to release to the environment. The specification that the portions of the system which were used to establish compliance with the design objectives in 10 CFR Part 50, Appendix I, Section II be used when specified provides reasonable assurance that releases of radioactive material in liquid effluent will be kept as low as is reasonably achievable. The activity concentration, 0.01 $\mu\text{Ci/ml}$, below which liquid radwaste treatment would not be cost beneficial, and therefore not required, is demonstrated below:

The quantity of radioactive material in liquid effluent released annually from Cooper Station has been calculated to be¹

total iodines	3.65 curies
total others (less H ³)	<u>0.7</u>
	total 4.35 curies

The population dose commitment resulting from the radioactive material in liquid effluent released annually has been calculated to be

thyroid	1.95 manrem
total body	<u>0.56</u>
	total 2.5 manrem

Therefore, population doses are about 0.5 manrem per curie of iodine released and about 0.8 manrem per curie of other radionuclides (less H³) released in liquids. It would be conservative to assume one manrem committed per curie released in liquid effluent.

The volume of liquid waste processed and intended for discharge is estimated to be:

Low Purity Waste	5700 gal/day	1.8 x 10 ⁶ gal/yr
Chem Waste + Demin Regenerant Waste	4000 gal/day	1.2 x 10 ⁶ gal/yr

(continued)

BASES

(continued)

The annual costs to operate the radwaste processing equipment, neglecting credit for capital recovery, are estimated according to Regulatory Guide 1.110 to be:

Dirty Waste Ionex	\$ 88,000/yr
Evaporator	\$114,000/yr

Unit volume operating costs are about:

$$\text{Cost to ion exchanger} = \frac{\$ 88,000}{1.8E+6 \text{ gal}} = \$0.05/\text{gal}$$

$$\text{Cost to evaporate} = \frac{\$114,000}{1.2E+6 \text{ gal}} = \$0.10/\text{gal}$$

Assuming the cost-benefit balance is \$1,000 expenditure per manrem reduction and assuming treatment removes all radioactivity from the liquid, then

- (1) the activity concentration in a batch below which treatment is not cost-beneficial is

$$C = \frac{\$88,000}{1.8E+6 \text{ gal} \times 3785 \frac{\text{ml}}{\text{gal}}} \times \frac{1 \text{ curie}}{\text{manrem}} \times \frac{10^6 \mu\text{Ci}}{\text{curie}} \times \frac{1 \text{ manrem}}{\$1,000}$$

$$C = 0.013 \mu\text{Ci/ml}$$

- (2) the activity concentration below which evaporation is not costbeneficial is

$$C = \frac{\$114,000}{1.2E+6 \text{ gal} \times 3785 \frac{\text{ml}}{\text{gal}}} \times \frac{1 \text{ curie}}{\text{manrem}} \times \frac{10^6 \mu\text{Ci}}{\text{curie}} \times \frac{1 \text{ manrem}}{\$1,000}$$

$$C = 0.025 \mu\text{Ci/ml}$$

Therefore, to one significant digit, radwaste treatment of liquids containing less than 0.01 $\mu\text{Ci/ml}$ is not justified.

(continued)

BASES

(continued)

¹Demonstration of Compliance with 10 CFR 50 Appendix I, Revision 1 and Supplement 2, Nebraska Public Power District, Cooper Nuclear Station, January 9, 1978.

B 3.1 LIQUID EFFLUENTS

B 3.1.3 Liquid Effluents Dose

BASES

Note: The Bases discussion refers to "technical specifications" and quotes the Staff's use of "technical specifications." The statements and opinions pre-date Generic Letter 89-01, Implementation of Programmatic Controls for Radiological Effluent Technical Specifications in the Administrative Controls Section of the Technical Specifications and the relocation of procedural details of RETS to the Offsite Dose Calculation Manual or to the Process Control Program.

Generic Letter 89-01 provides the guidance and justification for relocation of these "technical specifications" to the Offsite Dose Assessment (ODAM) Manual and the Process Control Program (PCP). Therefore, "technical specifications" as used in this Bases refers to ODA M Specifications.

Specifications D 3.1.3, D 3.2.2 and D 3.2.3 implement the requirements of 10 CFR Part 50.36a and of 10 CFR Part 50, Appendix I, Section IV. These specifications state ODA M LIMITING CONDITIONS FOR OPERATION (DLCO) to keep levels of radioactive materials in LWR effluents as low as is reasonably achievable. Compliance with these specifications will also keep average releases of radioactive material in effluents at small percentages of the limits specified in 10 CFR Part 20.1301. Surveillance Requirements provide for the measurement of releases and calculation of doses to verify compliance with the Specifications. Action statements in these Specifications implement the requirements of 10 CFR Part 50.36(c)(2) and 10 CFR Part 50, Appendix I, Section IV.A in the event an LCO is not met. Annual dose limitations stated in Specifications D 3.1.3, D 3.2.2 and D 3.2.3 are not strict limits as used elsewhere in the Technical Specifications (are not an immediate safety concern) but do obligate NPPD to take the applicable Required Action in Specifications D 3.1.3, D 3.2.2 and D 3.2.3.

(continued)

BASES

(continued)

10 CFR Part 50 contains two distinctly separate statements of requirements pertaining to effluents from nuclear power reactors. The first concerns a description of equipment to maintain control over radioactive materials in effluents, determination of design objectives, and means to be employed to keep radioactivity in effluents ALARA. This requirement is stated in Part 50, Section 34a and Appendix I, Section II. Appendix I, Section III stipulates that conformance with the guidance on design objectives be demonstrated by calculations (since demonstration is expected to be prospective). The other is a requirement for developing limiting conditions for operation in technical specifications. It is stated in 10 CFR Part 50, Section 36a and Appendix I, Section IV. Both the intent of the Commission and the requirement are clearly stated in the Opinion of the Commission; ¹ relevant paragraphs from that document follow:

Section 50.36a(b) of 10 CFR Part 50 provides that licensees shall be guided by certain considerations in establishing and implementing operating procedures specified in technical specifications which take into account the need for operating flexibility and at the same time ensure that the licensee will exert his best efforts to keep levels of radioactive materials in effluents as low as practicable. The Appendix I that we adopt provides more specific guidance to licensees in this respect.

A. The Rule

Section IV of Appendix I specifies action levels for the licensee. If, for any individual light water cooled nuclear power reactor, the quantity of radioactive material actually released in effluents to unrestricted areas during any calendar quarter is such as to cause radiation exposure, calculated on the same basis as the design objective exposure, which would exceed one-half the annual design objective exposure, the licensee shall make an investigation to identify the causes of these high release rates, define and initiate a program of action to correct the situation, and report these actions to the Commission within 30 days of the end of the calendar quarter.

The conclusion of the NRC Staff in the Appendix I Rulemaking Hearing ² agrees with that of the Commission. The Staff recommended, "...that the limiting conditions for operation described in Appendix I, Section IV be applicable upon publication to technical specifications included in any license authorizing operation of a light water cooled nuclear power reactor..." (p. 73).

(continued)

BASES

(continued)

The action to be taken by a licensee in the event a limiting condition is exceeded, is stated in Appendix I, Section IV.A and in the Opinion of the Commission. ³ ODAM Specifications D 3.1.3, D 3.2.2, D 3.2.3 and Surveillances DSR 3.1.3.1, 3.1.3.2, 3.2.2.1, 3.2.3.1 and 3.2.3.2 for Cooper Station conform to this requirement.

Guidance for developing limiting conditions for operation for surveillance and monitoring is included in Appendix I, Section IV.B.

Although "it is expected that the annual releases of radioactive material in effluents from light water cooled nuclear power reactors can generally be maintained within the levels set forth as numerical guides for design objectives in Section II" (Appendix I, Section IV), no recommendation was made by either the Staff in its Concluding Statement ⁴ or by the Commission in its Opinion ⁵ that design objective values should appear as technical specification limits. The Opinion of the Commission and the statement of Appendix I are clear. Limiting conditions of operation (LCO) related to the quantity of radioactive material in effluents released to an unrestricted area stated in technical specifications shall conform to Appendix I, Section IV.A. Licensee action in the event an LCO is exceeded should be in accord with Section IV.A. Finally, surveillance and monitoring of effluents and the environment should conform to Section IV.B.

With the implementation of Specification D 3.1.3 and Surveillances DSR 3.1.3.1 and 3.1.3.2, there is reasonable assurance that Station operation will not cause a radionuclide concentration in public drinking water taken from the River that exceeds the standard for anthropogenic radioactivity in community drinking water.

¹NRC Commissioners, "Opinion of the Commission," in the Appendix I Rulemaking hearing, Docket Rm 502, p. 101-102, April 30, 1975.

²NRC Staff, "Concluding Statement of the Regulatory Staff," in the Appendix I Rule-making Hearing, Docket RM 502, pp. 17, 69, 73, 115, February, 1974.

³NRC Commissioners, p. 101

⁴NRC Staff, op. cit.

⁵NRC Commissioners, op. cit.

(continued)

BASES

(continued)

⁶Generic Letter 89-01, Implementation of Programmatic Controls for Radiological Effluent Technical Specifications in the Administrative Controls Section of the Technical Specifications and the relocation of procedural details of RETS to the Offsite Dose Calculation Manual or to the Process Control Program.

Outside Temporary Storage of Radioactive Liquid
B 3.1.4

B 3.1 LIQUID EFFLUENTS

B 3.1.4 Outside Temporary Storage of Radioactive Liquid

BASES

Custom Technical Specifications Bases did not exist.

B 3.2 GASEOUS EFFLUENTS

B 3.2.1 Gaseous Effluents Concentration

BASES

DLCO 3.2.1(a) is included to assure that a measure of control is provided over the concentration of radionuclides in air leaving the exclusion area. Radioactive noble gases are monitored by instruments that provide a measure of release rate and cause automatic alarm when the noble gas concentration beyond the SITE AND EXCLUSION AREA BOUNDARY is expected to exceed the dose rate specified in DLCO 3.2.1(a). With prompt action to reduce the radioactive noble gas concentration in effluent following alarm initiation, it can be maintained at a small fraction of the annual limit. The specified release rate limits restrict the corresponding gamma and beta dose rates above background to an individual at or beyond the SITE AND EXCLUSION AREA BOUNDARY to ≤ 500 mrem/year to the total body or to ≤ 3000 mrem/year to the skin.

Radioiodines and radionuclides in particulate form are sampled with integrating samplers that permit assessment of the average release rate during each sample collection period. By complying with DLCO 3.2.2 and 3.2.3 the average concentration beyond the SITE AND EXCLUSION AREA BOUNDARY will be maintained at a small fraction of the 10 CFR Part 20.1302(b)(2)(i) concentration limit.

B 3.2 GASEOUS EFFLUENTS

B 3.2.2 Noble Gases Dose

BASES

Assessments of dose required by Surveillances DSR 3.2.2.1 and DSR 3.2.3.2 to verify compliance with Appendix I, Section IV is based on measured radioactivity in gaseous effluent and on calculational methods stated in the ODAM. Pathways of exposure and location of individuals are selected such that the dose to a nearby resident is unlikely to be underestimated. Dose assessment methodology described in the ODAM for gaseous effluent will be consistent with the methodology in Regulatory Guides 1.109 and 1.111. Cumulative and projected assessments of dose made during a quarter are based on historical average, or reference (the same period of record used in the design objective Appendix I evaluation) atmospheric conditions. Assessments made for the Annual Radiological Environmental Report will be based on quarterly and annual averages of atmospheric conditions during the period of release.

The bases for Specification D 3.2.2 and Surveillance DSR 3.2.2.1 are also discussed in the bases for Specification D 3.1.3 and Surveillances DSR 3.1.3.1 and 3.1.3.2.

B 3.2 GASEOUS EFFLUENTS

B 3.2.3 Iodine and Particulates

BASES

This bases for Specification D 3.2.3 and Surveillances DSR 3.2.3.1 and 3.2.3.2 are discussed in the bases for Specification D 3.1.3 and Surveillances DSR 3.1.3.1 and 3.1.3.2.

B 3.2 GASEOUS EFFLUENT

B 3.2.4 Offgas Treatment System

BASES

The OPERABILITY of the gaseous radwaste treatment system ensures that the system will be available for use whenever gaseous effluents require treatment prior to release to the environment. The requirement that the appropriate portions of this system be used when specified provides reasonable assurance that the releases of radioactive materials in gaseous effluents will be kept "as low as is reasonably achievable." This specification implements the requirements of 10 CFR Part 50.36a, General Design Criterion 60 of Appendix A to 10 CFR Part 50, and design objective Section IID of Appendix I to 10 CFR Part 50. The specified limits governing the use of appropriate portions of this system are specified as a suitable fraction of the dose design objectives set forth in Sections II.B and II.C of Appendix I, 10 CFR Part 50, for gaseous effluents.

B 3.2 GASEOUS EFFLUENTS

B 3.2.5 Exhaust Ventilation Treatment Systems

BASES

An Exhaust Ventilation Treatment System (EVTS) is a system intended to remove radioiodine or radioactive material in particulate form from gaseous effluent by passing exhaust ventilation air through charcoal absorbers and/or HEPA filters before exhausting the air to the environment. An EVTS is not intended to affect noble gas in gaseous effluent. Engineered Safety Feature (ESF) gaseous treatment systems are not considered to be EVTS. The Standby Gas Treatment System is an ESF and not an EVTS. EVTS are specifically identified in ODAM Figure 3-1.

The OPERABILITY of the exhaust ventilation treatment systems ensures that the systems will be available for use whenever gaseous effluents require treatment prior to release to the environment. The requirement that the appropriate portions of these systems be used when specified provides reasonable assurance that the releases of radioactive materials in gaseous effluents will be kept "as low as is reasonably achievable." This specification implements the requirements of 10 CFR Part 50.36a, General Design Criterion 60 of Appendix A to 10 CFR Part 50, and design objective Section IID of Appendix I to 10 CFR Part 50. The specified limits governing the use of appropriate portions of the system are specified as a suitable fraction of the dose design objectives set forth in Sections II.B and II.C of Appendix I, 10 CFR Part 50, for gaseous effluents.

B 3.2 GASEOUS EFFLUENTS

B 3.2.6 Hydrogen Concentration

BASES

This specification is provided to ensure that the concentration of potentially explosive gas mixtures contained in the waste gas treatment system is maintained below the flammability limits of hydrogen and oxygen. While the Augmented Treatment System is in service the hydrogen and oxygen concentrations are prevented from reaching the flammability limits. Maintaining the concentration of hydrogen below its flammability limit provides assurance that the releases of radioactive materials will be controlled in conformance with the requirements of General Design Criterion 60 of Appendix A to 10 CFR 50.

For this specification, reporting by Special Reports and the other reports required by the ODAM and Section 5.6 of Technical Specifications is used in lieu of reporting per 10 CFR 50.73.

B 3.2 GASEOUS RELEASES

B 3.2.7 Primary Containment Venting and Purging

BASES

This specification provides reasonable assurance that releases of Iodine from primary containment purging during power operations, during startup while performing primary containment inerting within 24 hours after shutdown, and while de-inerting will not be excessively large, particularly due to Iodine spiking. The exemptions to using the SBGT system are intended to minimize the time the SBGT system is on line while coolant temperature is greater than 200°F, hence to decrease the probability of damage to the SBGT filters that could occur from overpressurization due to a LOCA and the main purge and vent valves open. The exception in Note 2 is restricted by a requirement that one channel of the drywell atmospheric particulate and gaseous monitoring system is OPERABLE and not in the alarm state. This restriction provides reasonable assurance that releases from primary containment purging operations will not exceed the annual dose limits of 10CFR20 for unrestricted use.

For this specification, reporting by Special Reports and the other reports required by the ODAM and Section 5.6 of Technical Specifications is used in lieu of reporting per 10 CFR 50.73.

B 3.3 INSTRUMENTATION

B 3.3.1 Liquid Effluent Monitoring

BASES

The radioactive liquid effluent instrumentation is provided to monitor and control, as applicable, the release of radioactive material in liquid effluents. The OPERABILITY and use of these instruments implements the requirements of 10 CFR Part 50, Appendix A, General Design Criteria 60, 63, and 64. The alarm and/or trip setpoints for these instruments are calculated in the manner described in the ODAM to assure that the alarm and/or trip will occur before the limit specified in 10 CFR Part 20.1302 is exceeded. Control of the normal liquid discharge pathway is assured by station procedures governing locked discharge valves and valve line-up verification.

The liquid radwaste monitor assures that all liquid discharged to the discharge canal does not exceed the limits of Specification D 3.1.1. Upon sensing a high discharge level, an isolation signal is generated which closes the radwaste discharge valve. The set point is adjustable to compensate for variable isotopic discharges and dilution flow rates.

For this specification, reporting by Special Reports and the other reports required by the ODAM and Section 5.6 of Technical Specifications is used in lieu of reporting per 10 CFR 50.73.

B 3.3 INSTRUMENTATION

B 3.3.2 Gaseous Effluent Monitoring

BASES

The radioactive gaseous effluent instrumentation is provided to monitor and control, as applicable, the releases of radioactive materials in gaseous effluents during actual or potential releases of gaseous effluents. The location of this instrumentation is indicated by a Figure in the ODAM (page 48). The simplified flow diagram shows the gaseous effluent treatment and monitoring equipment and defines the delay system (30 minute hold up line) and the treatment system (AOG charcoal beds). The alarm/trip setpoints for these instruments shall be calculated in accordance with methods in the ODAM, which have been reviewed by NRC, to ensure that the alarm will occur prior to exceeding the limits of 10 CFR Part 20. The process monitoring instrumentation includes provisions for monitoring the concentrations of potentially explosive gas mixtures in the augmented offgas treatment system. The OPERABILITY and use of this instrumentation is consistent with the requirements of General Design Criteria 60, 63, and 64 of Appendix A to 10 CFR Part 50.

Two air ejector off-gas monitors are provided and when their trip point is reached, cause an isolation of the air ejector off-gas line. Isolation is initiated when both instruments reach their high trip point or one has an upscale trip and the other a downscale trip. There is a fifteen minute delay accounted for by the 30-minute holdup time of the off-gas before it reaches the stack. Both instruments are required for trip but the instruments are so designed that any instrument failure gives a downscale trip. Radioactive sources ("bug-sources") may be installed. During periods of low power operation or reactor shutdown when process background levels are low and downscale trips may pose operational issues, the bug sources maintain on-scale indication and inhibit unnecessary isolations initiated by two downscale channels. This does not defeat the downscale nor inoperable alarm and trip functions which continue to function in the event of a failed instrument or open circuit. The trip setting of 1.0 ci/sec (prior to 30 min. delay) provides an improved capability to detect fuel pin cladding failures to allow prevention of serious degradation of fuel pin cladding integrity which might result from plant operation with a misoriented or misloaded fuel assembly. This limit is more restrictive than 0.39 ci/sec noble gas release rate at the air ejectors (after 30 min. delay) which was used as the source term for an accident analysis of the augmented off-gas system. Using the .39 ci/sec source term, the maximum off-site total body dose would be less than the .5 rem limit.

A footnote has been added to Table D3.3.2-1 to indicate that a channel of the Noble Gas Activity Monitor, the Iodine Sampler Cartridge, or the Particulate Sampler Filter, in the ventilation monitoring systems for the Reactor Building, Radwaste Building, Turbine Building, Elevated Release Point, and Multi Purpose Facility, may be removed from service for up to 30 minutes for changing particulate filters or iodine cartridges or for the low flow alarm check without entering the conditions and required actions. The channel will continue to be declared inoperable when removed from service, but the Conditions and Required Actions will not be entered due to the short duration that the channel is inoperable and the facts that the system must be removed from service to perform the required ODAM surveillance and is returned to an

OPERABLE condition prior to expiration of the Completion Time for initiating the Required Action.

A note has been added to Required Action I.1 stating that continuous monitoring may be discontinued for up to 30 minutes only for changing particulate filters and iodine cartridges when the backup monitoring system is in service. Replacement of these filters and cartridges is a normal activity, and not a condition that is appropriate for entry into the Corrective Action Program or for including in the Radioactivity Effluent Release Report. This allowance to discontinue the sampling is acceptable based on (1) four hours are allowed to begin the continuous collection of samples with auxiliary equipment when the primary monitoring system is inoperable, (2) occasions when the primary monitoring system is inoperable and the backup monitoring system is in service are expected to be rare, and (3) the short period of time (30 minutes) that the monitor is allowed to be out of service.

In the event no flow rate measurement device is operable on a gaseous stream, alternative 24-hour estimates are adequate since the system design is constant flow and loss of flow is alarmed in the control room.

Required Action G.1.2 and G.3.1 requires monitoring of the recombiner exhaust temperature. This temperature is being monitored for changes rather than for any maximum temperature or range of temperatures. This temperature is affected by various plant parameters, including reactor power level, change of AOG dryer beds, air in-leakage into the main condenser, and the quantity and rate of hydrogen injection into reactor coolant for chemistry control. The recombiner exhaust temperature is expected to remain steady if none of these parameters are changing. If a temperature fluctuation greater than 10°F is observed, Condition H is entered and Required Action H.1 shall be performed unless the temperature fluctuation can be explained by changes in plant parameters.

For this specification, reporting by Special Reports and the other reports required by the ODAM and Section 5.6 of Technical Specifications is used in lieu of reporting per 10 CFR 50.73.

B 3.4 LIQUID/GASEOUS DOSE

B 3.4.1 Liquid/Gaseous Effluents Dose

BASES

This specification is provided to meet the reporting requirements of 40 CFR Part 190. In the event an analysis is required to determine compliance with 40 CFR 190, the dose to a member of the public due to radiation direct from the station will be estimated with the aid of environmental TLD, PIC, or similar environmental radiation dosimetry. A contribution from another fuel cycle facility is not added since there is no licensed fuel cycle facility within 50 miles of Cooper Station.

B 3.5 SOLID RADIOACTIVE WASTE

B 3.5.1 Solid Radioactive Waste

BASES

The OPERABILITY of the solid radwaste system ensures that the system will be available for use whenever solid radwastes require materials processing and packaging prior to being shipped offsite. This specification implements the requirements of 10 CFR Part 50.36a and General Design Criteria 60 of Appendix A to 10 CFR Part 50.

B 4.0 MONITORING PROGRAM

B 4.1 Monitoring Program Compliance

BASES

The radiological environmental monitoring program, including the land use census, is conducted to satisfy the requirements of 10 CFR Part 50, Appendix I, Section IV.B.2 and 3. The radiological monitoring program required by this specification provides measurements of radiation and of radioactive materials in those exposure pathways and for those radionuclides which lead to the highest potential radiation exposures of individuals resulting from the station operation. This monitoring program thereby supplements the radiological effluent monitoring program by verifying that the measureable concentrations of radioactive materials and levels of radiation are not higher than expected on the basis of the effluent measurements and modeling of the environmental exposure pathways.

The environmental monitoring program described in Table D4.1-1 is the minimum program which will be maintained. The Offsite Dose Assessment Manual (ODAM) describes in detail the actual monitoring program which is performed to ensure compliance with the specified minimum program.

The land use census is conducted annually to identify changes in use of the unrestricted area in order to recommend modifications in monitoring programs for evaluating individual doses from principal exposure pathways.

The need to adjust the program to current conditions and to assure that the integrity of the program is maintained are thereby provided. Restricting the census to gardens of greater than 500 square feet provides assurance that significant exposure pathways via leafy vegetables will be identified and monitored since a garden of this size is the minimum required to produce the quantity (26 kg/year) of leafy vegetables assumed in Regulatory Guide 1.109 for consumption by a child. To determine this minimum garden size, the following assumptions were used, 1) that 20% of the garden was used for growing broad leaf vegetation (i.e., similar to lettuce and cabbage), and 2) a vegetation yield of 2 kg/square meter.

B 4.0 MONITORING PROGRAM

B 4.2 Monitoring Program Concentration

BASES

Custom Technical Specifications Bases did not exist.

B 4.0 MONITORING PROGRAM

B 4.3 Monitoring Program Dose

BASES

Like pathways monitored (sampled) at a location, excluding the control station location(s), having the lowest associated calculated personal dose may be deleted from Table D4.1-1 at the time the new pathway(s) and locations are added.

B 5.0 MISCELLANEOUS PROGRAMS/REPORTS

B 5.1 Interlaboratory Comparison Program

BASES

The requirement for participation in a Interlaboratory Comparison Program is provided to ensure that independent checks on the precision and accuracy of the measurements of radioactive material in environmental sample matrices are performed as part of a quality assurance program for environmental monitoring in order to demonstrate that the results are reasonably valid.

B 5.0 MISCELLANEOUS PROGRAMS/REPORTS

B 5.2 Annual Radiological Environmental Report

BASES

Custom Technical Specifications Bases did not exist.

B 5.0 MISCELLANEOUS PROGRAMS/REPORTS

B 5.3 Annual Radiological Effluent Release Report

BASES

Custom Technical Specifications Bases did not exist.

B 5.0 MISCELLANEOUS PROGRAMS/REPORTS

B 5.4 Special Reports

BASES

Custom Technical Specifications Bases did not exist.

Major Changes to Radioactive Waste Treatment Systems
B 5.5

B 5.0 MISCELLANEOUS PROGRAMS/REPORTS

B 5.5 Major Changes to Radioactive Waste Treatment Systems (Liquid, Gaseous,
and Solid)

BASES

Custom Technical Specifications Bases did not exist.
